

LOT 59L

RF28HFEDBSR

28 cu. ft. French Door Refrigerator with CoolSelect Pantry™



Features

- Large Capacity – 28 cu. ft.
- Twin Cooling Plus System™
- Ice Master Ice Maker in the Refrigerator
- ENERGY STAR® Compliant
- CoolSelect Pantry™ with Temperature Control
- Premium External Filtered Water and Ice Dispenser
- High-Efficiency Top and Side LED Lighting
- EZ-Open Handle™ on Freezer Door
- Adjustable Shelf for Tall Oversized Items
- Two Humidity-Controlled Crispers
- Tempered Glass Spill-Proof Shelves
- Auto Pull-Out Upper Freezer Drawer
- Easy-to-Access Water Filter


Convenience

- Cool Tight Door
- Door Alarm
- Water Filter Indicator

ENERGY STAR® Rated: CEE Tier 1
 (10% more efficient than Federal Standard)
 725 kWh/yr.

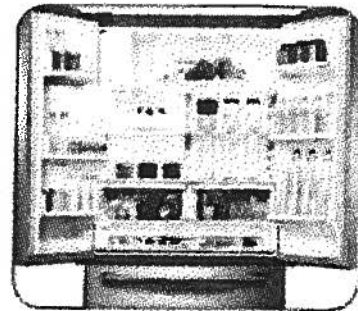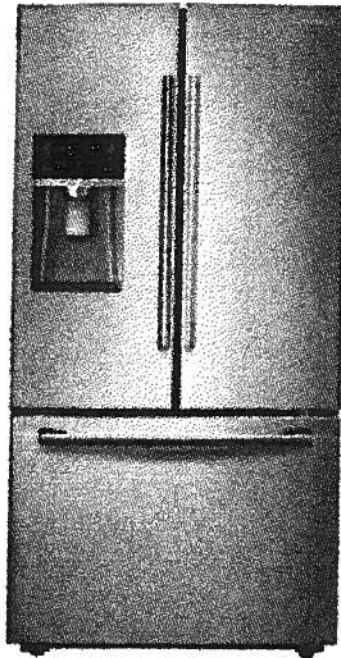

Ice Master

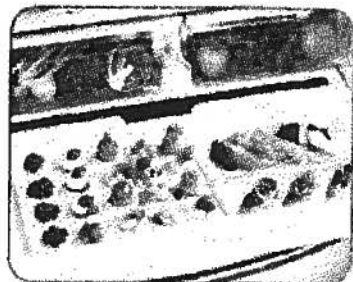

CoolSelect Pantry™ with Temperature Control

Available Colors



Stainless Steel



White



Black

Signature Features

TWIN COOLING PLUS™

- Keeps food fresher longer – Twin Cooling Plus™ humidity levels up to 3x higher than single cooling.
- Refrigerator air is kept at higher, near commercial grade humidity levels to keep perishable fruits and vegetables fresher longer.
- Cold freezer air circulates less, freezes food for better-tasting frozen foods.

ICE MASTER

- Produces 10 lbs. of ice per day and stores 4.7 lbs.
- Space-saving design leaves more room in the refrigerator.

COOLSELECT PANTRY™

- Provides additional temperature control for your food storage needs with Cold, Fresh and Chilled options.



Ranked "Highest in customer satisfaction with French Door refrigerators, in a tie."®

—J.D. Power

SAMSUNG


RF28HFEDBSR

28 cu. ft. French Door Refrigerator with CoolSelect Pantry™


Installing Your Refrigerator

1. Measure the height, width and depth of the opening, making sure to include baseboards, molding, tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper oil circulation and water/electrical connections. Allow a 1/3" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and layout information is for planning purposes only. For complete installation details consult manual packed with product, or download manual on-line at samsung.com.

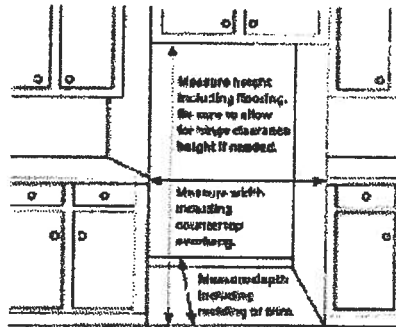

Dimensions

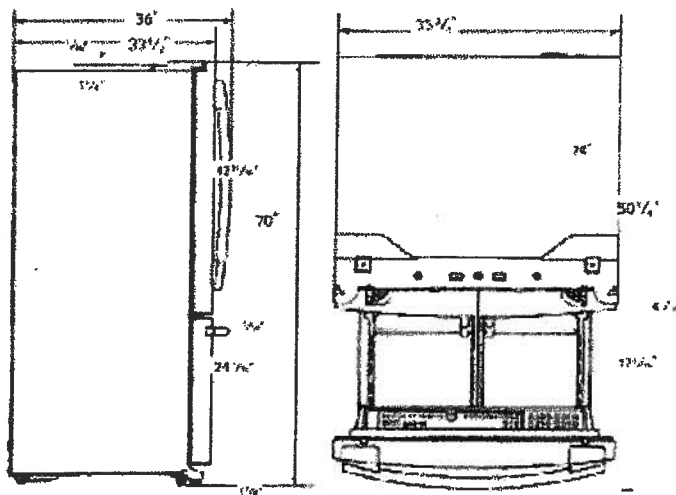

Total Capacity: 28.07 cu. ft.

Refrigerator: 19.14 cu. ft.

- Premium External Filtered Water and Ice Dispenser
- Ice Master Ice Maker
- CoolSelect Pantry™ with Temperature Control – Deli (41°F), Fresh (38°F) and Chilled (32°F) options
- 2 Humidity-Controlled Crispers
- 5 Tempered Glass Spill-Proof Shelves
- Adjustable Shelf for Tall oversized Items
- 6 Door Bins
 - Right Door: 3 Gallon Bins
 - Left Door: 3 Regular Bins
- High-Efficiency Top and Side LED Lighting

Freezer: 8.93 cu. ft.

- EZ-Open Handle™
- 1 Drawer Divider
- High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labor on Refrigerator

Five (5) Years Parts and Labor on Sealed Refrigeration System Only*

Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor

*Compressor, evaporator, condenser, meter, connecting tubing

Product Dimensions & Weight

Dimensions (WxHxD) with hinges, handles and doors): 35 1/4" x 70" x 36"

Dimensions (WxHxD without hinges and door): 35 1/4" x 68 1/4" x 29"

Dimensions (WxHxD with hinge and door, no handle): 35 1/4" x 70" x 33 1/2"

Weight: 326 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 1/4" x 76 1/4" x 36 1/4"

Weight: 352 lbs.

Color	Model #	UPC Code
Stainless Steel	RF28HFEDBSR	887276966083
White	RF28HFEDBSRW	887276967691
Black	RF28HFEDBSR	887276968415

SAMSUNG

Samsung received the highest numerical score for French door refrigerators in a side-by-side panel study. D. Evans, 2014 Consumer Appliance Study™. Study based on 13,000+ responses to a surveying 16 French door refrigerator brands and manufacturers of new owners of their new appliances purchased in the past 75 months. Preliminary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.

Accessories may vary. Design specifications and color availability are subject to change without notice. Actual weight and dimensions may vary.

©2014 Samsung Electronics America, Inc. 35 Challenger Road, Ridgefield Park, NJ 07650. TX: 800-SAMSUNG samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.

NX58H9500WS

5.8 cu. ft. Slide-in Gas Range with Intuitive Controls

Features



- Slide-in Design
- 5 Gas Burners
 - Right Front: Dual 18K BTU
 - Left Front: 15K BTU
 - Right Rear: 9.5K BTU
 - Left Rear: 9.5K BTU
 - Center: 9.5K BTU (Oval)
- Large Oven Capacity - 5.8 cu. ft.
- Guiding Light Controls
- Cast Iron 3 Piece Grates
- Reversible Cast Iron Griddle
- Wok Grate
- True Convection Oven (3-Fan)
- Temperature Probe
- Warming Drawer (3 Levels)
- Grate Indicator Marks
- Healthy Cook Options

Convenience

- Auto Oven Light
- Sabbath Mode
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock
- Self Clean
- 3 Favorite Cook Presets
- 4 Healthy Cook Presets
- 3 Chrome Oven Racks, including 1 Split Rack



Ranked "Highest in Customer Satisfaction with Ranges, Cooktops and Ovens."*
- J.D. Power

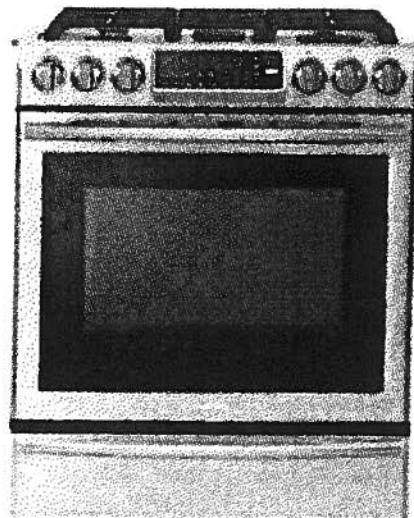

Power/Flexible Cooktop



Guiding Light Controls



Cast Iron Reversible Griddle

Available Color



Stainless Steel

Signature Features

POWERFUL/FLEXIBLE COOKTOP

- True dual-power burner allows for even heat distribution and reduced cooking time, plus the convenience of a large oval burner.

GUIDING-LIGHT CONTROLS

- Intuitive controls offer simple, step-by-step instructions for choosing cooking options.
- Only six simple cooking options that are able to be selected and gets browned, fast, light, eliminating lock and forth.
- Control temperature and time settings, select cooking functions and program your favorite recipes.

TRUE CONVECTION

- Heated fan system is great for baking and broiling because temperature is distributed thoroughly and food cooks evenly.

REVERSIBLE CAST IRON GRIDDLE

- Reversible griddle provides the flexibility of cooking on flat or gridded surface, while the Cast iron provides even cooking.

GRATE INDICATOR MARKS

- Indicator marks located on the grates allow cookware to be properly placed for precise cooking.

SAMSUNG


NX58H9500WS

5.8 cu. ft. Slide-in Gas Range with Intuitive Controls

INSTALLING YOUR RANGE



30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no. 28 MSG shear steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

** 18" minimum between the countertop and the adjacent cabinet bottom.

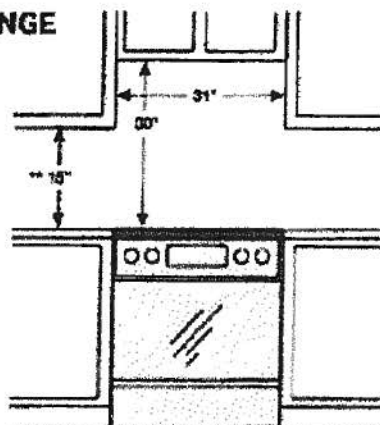


IMPORTANT: To eliminate the risk of fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

Dimensions



Glass cooktop overless and sits on top of your kitchen countertop to give a built-in look. Cut out space for the range is 29 1/2".



Total Power (BTU)
57,000 BTU

Power Source
120 V/60 Hz

Black Enamel 5 Burner Cooktop

- Right Front: 18000 BTU - Dual
- Left Front: 15000 BTU
- Right Rear: 5000 BTU
- Left Rear: 5500 BTU
- Center Rear: 2500 BTU - Oval

Oven

- Bake: 150°F - 550°F
- Convection Bake: 150°F - 550°F
- Bake Burner: 18000 BTU
- Broil Burner: 16000 BTU
- Variable Broil: Low/Hi (3/5°F - 480°F)
- Convection Roast: 150°F - 550°F
- Sabbath Mode

Warming Drawer

- Capacity: 0.7 cu. ft.
- Heating Performance: 600 W
- Temperature Settings: 3 Level

Warranty

One (1) Year All Parts and Labor
Five (5) Years Gas Cooktop

Product Dimensions & Weight (WxHxD)

Actual Oven Dimensions:

25" x 21 1/8" x 19"

Outside Dimensions:

29 13/16" x 36 7/16" - 37 1/16" (Adjustable) x 26 1/2"

Weight: 202 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions:

32 7/8" x 43 13/16" x 30 1/2"

Weight: 225 lbs.

Color

Stainless Steel

Model#

NX58H9500WS

UPC Code

887276032047

SAMSUNG

*Samsung received the highest numerical score for ranges, cooktops and ovens in the proprietary J.D. Power 2014 U.S. Home Appliance Study™. Study based on 13,380 total responses measuring 17 ranges, cooktops and ovens based on performance, reliability and customer service. Visit www.jd.com for details. Your experience may vary. ©2014 Samsung America, Inc.

Actual color may vary. Design, specification and price availability are subject to change without notice. Dimensions, weights and measurements are approximate.

©2014 Samsung Electronics America, Inc. 85 Franklin Blvd., Bldg. 400, Franklin Park, NJ 07646. Tel: 800-SAMSUNG, www.samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDT780SAD
WDT780SAD
WDT920SAD

WDL78553A
WDT7809AF

Electrical Requirements: 120-volt, 60 Hz. AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or non-metallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.



Use a UL Listed or CSA Approved cord/jil connector

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.



Power supply cord must plug into a grounded three-prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line.

Note: $\frac{3}{8}$ " minimum plastic tubing is not recommended.

Use a 90° elbow with $\frac{1}{4}$ " hose connection with rubber washer (part number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/APAO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended:



that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.


Make sure to use an air gap.
If the drain hose is
connected to house
plumbing lower than 20"
(50.8 cm) above subfloor or

floor.

Use $\frac{1}{4}$ " (1.3 cm) minimum I.D. drain line fittings

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

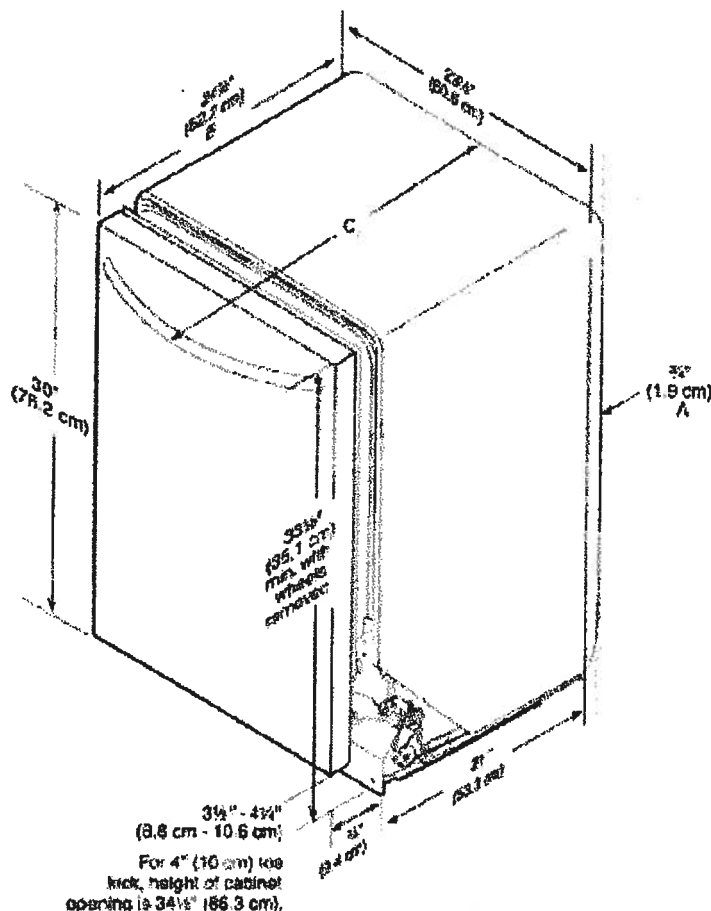


- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 3/4" (1.9 cm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher; varies by model.

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33 1/2" (85.1 cm) by removing the rear leveling legs from dishwasher.

** Minimum, measured from narrowest point of opening.

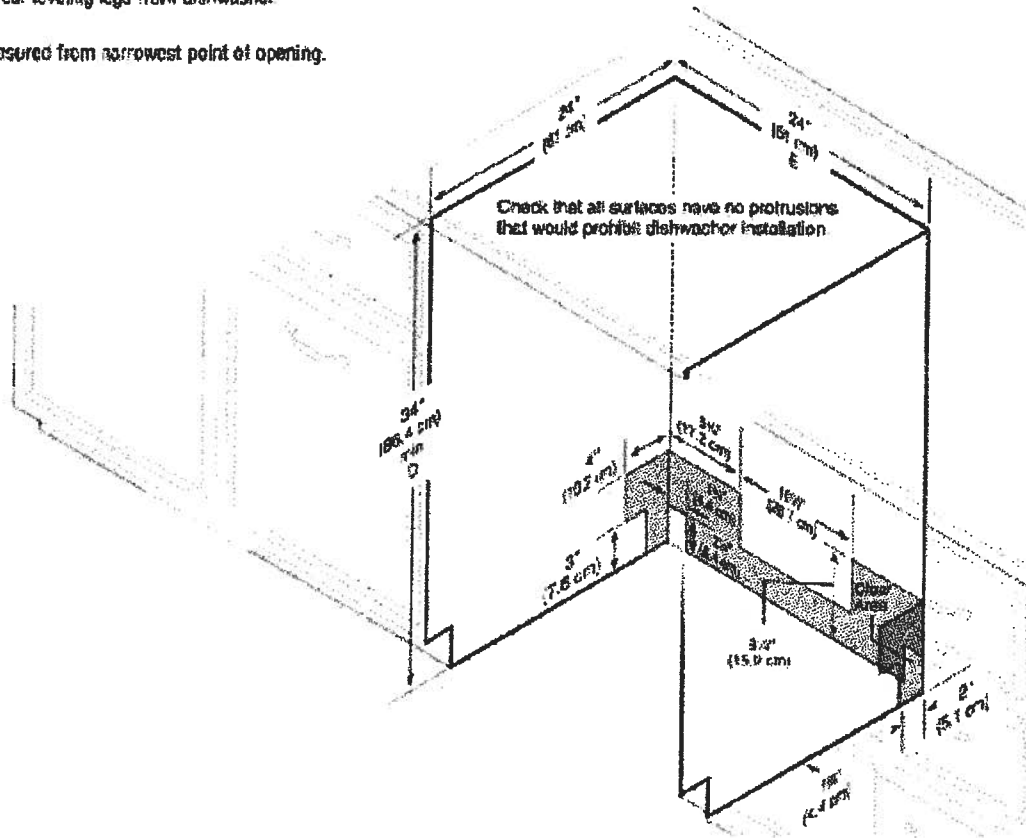



EuroDesign

ZEPHYR

UNDER
CABINET
HOOD

MODEL ZK5600

SIZE 30"

PERFORMANCE

Internal Blower 325 - 650 cfm
Noise Level Up to 5 sones

COLOR

Black, White, Stainless Steel B. W. SS

FEATURES


Controls Electronic Touch
Speed Levels 3
Auto Delay-Off No
Lighting Halogen Lights
Dual-Level Lighting Yes
Filters N/A
Removable Safety Grilles 2
Recirculating No
Duct Cover Extension N/A
Self Cleaning Yes

DUCT SPECIFICATIONS

Internal Blower - Vertical 6" or 3 1/4" x 10"
Internal Blower - Horizontal 5 1/4" x 10"

AC INPUT 120V - 60Hz

AC POWER Max. 240W - 212 Amps

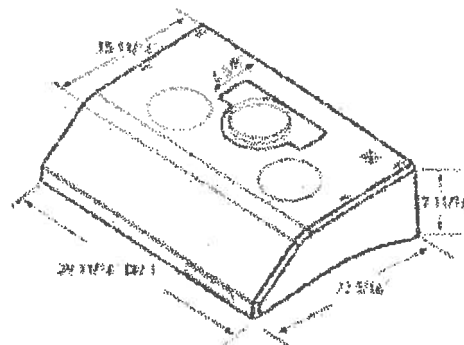

MOUNTING HEIGHTS

Minimum height 24" from cooking surface
Head mounted 66" from floor

March 2013



Drain facility

The recommended height of the standpipe is 18 in/46 cm. The drain hose must be routed through the drain hose clip to the standpipe. The standpipe must be large enough to accept the outside diameter of the drain hose. The drain hose is attached at the factory.

Flooring

For best performance, you must install your washer on a solidly constructed floor. Wood floors may need to be reinforced to minimize vibration and/or unbalanced load situations. Carpeting and soft tile surfaces are contributing factors to vibration which can cause your washer to move slightly during the spin cycle.

Never install your washer on a platform or weakly supported structure.

Location considerations

Do not install your washer in areas where water may freeze, since your washer will always retain some water in its water valve, pump, and hose ends. Freezing water can damage the belts, the pump, hoses and other components.

Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

Sides - 1 in / 25 mm



Top - 17 in / 432 mm

Rear - 5.9 in / 150 mm

Closet Front - 2 in / 51 mm


If the washer and dryer are installed together, the closet front must have at least a 72 in² (465 cm²) unobstructed air opening. Your washer alone does not require a specific air opening.

A. Recessed area

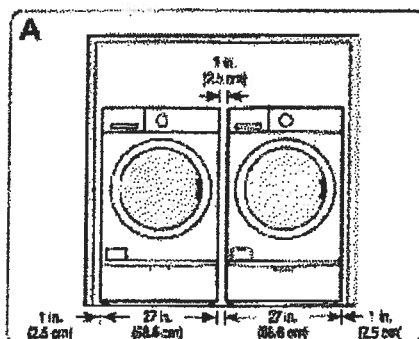

B. Side view - closet or confined area


Undercounter installation (washer only)

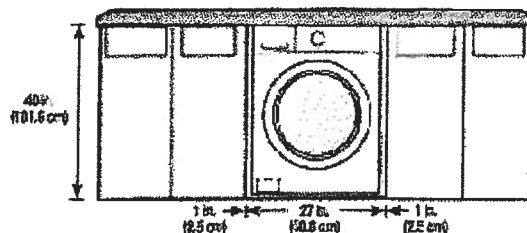


Installing your washer

With optional pedestal base or stacking kit

Required Dimensions for Installation With Pedestal (Model No : WE357*)

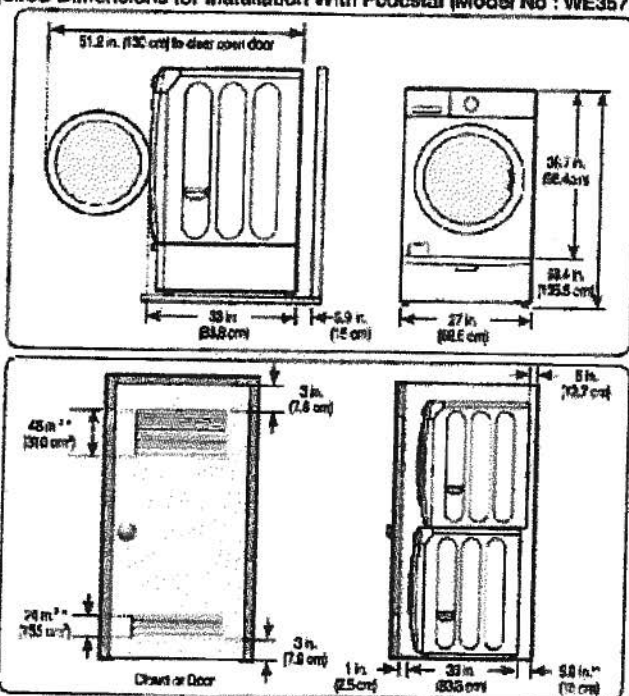

Required Dimensions for Installation With Stacking Kit (Model No : SK-5A)

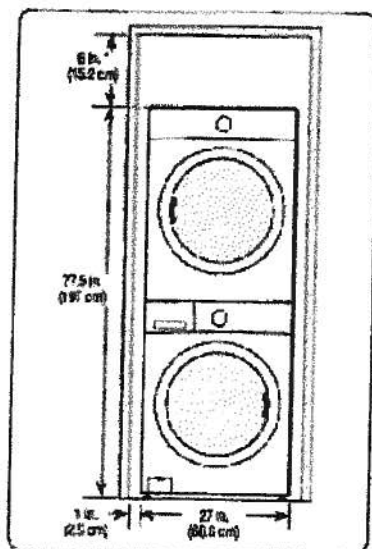

* Required spacing

** External exhaust elbow requires additional space.