


PYE22PSH

GE Profile™ Series ENERGY STAR® 22.1 Cu. Ft. French-Door Counter-Depth Refrigerator

Features and Benefits

- Counter-depth design - Offers a built-in look by fitting nearly flush with surrounding cabinetry
- Hands-free Autofill - Lets you walk away while the dispenser automatically fills any container with filtered water
- Hands-free Precise Fill - Multi-task while the dispenser automatically fills your container with the exact measurement of water you choose
- TwinChill™ evaporators - Separate climates in the fresh food and freezer sections help keep foods fresh
- Full-width electronic temperature-controlled drawer with LED lights - 3 accurate settings deliver the optimal temperatures for your favorite foods, while colored lights indicate the chosen setting
- Color LCD screen with photo upload - Add a personal touch when you upload photos to the color LCD display from your flash drive
- Showcase LED lighting - Positioned throughout the interior and under fresh food doors to spotlight foods inside the refrigerator and in the freezer
- Advanced water filtration uses RPWF6 replacement filter - Removes trace pharmaceuticals from water and ice
- Drop-down tray - Allows for extra door storage when you need it and tucks away when you don't
- Model PYE22PSHSS - Stainless steel

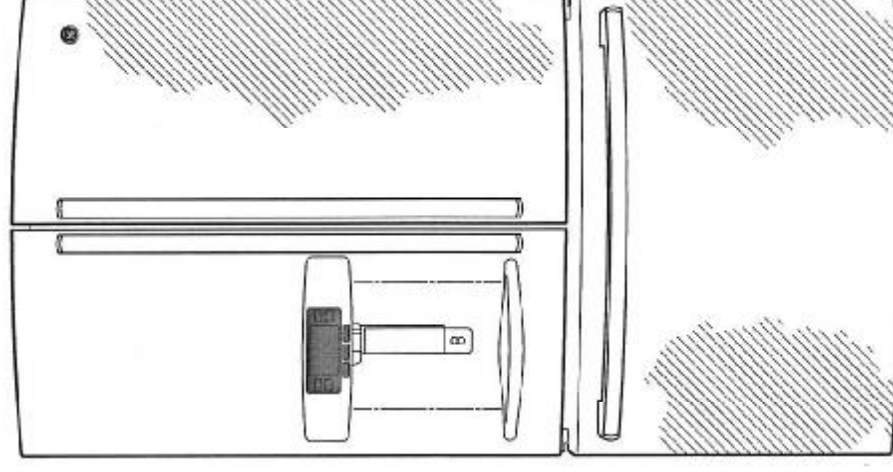

imagination at work




Specification Revised 3/15

PYE22PSH

GE Profile™ Series ENERGY STAR® 22.1 Cu. Ft. French-Door Counter-Depth Refrigerator

Dimensions and Installation Information (in inches)

Overall Dimensions	Height to top of hinge (in.) A	69-7/8
	Height to top of case (in.) B	69
	Case depth without door (in.) C	24-3/8
	Case depth less door handle (in.) D	30-1/4
	Case depth with door handle (in.) E	31-1/4
	Depth with fresh food door open 90° (in.) F	43-3/8
	Width (in.) G	35-3/4
	Width with door open 90° inc. door handle (in.) H	44-5/8
Air	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	2

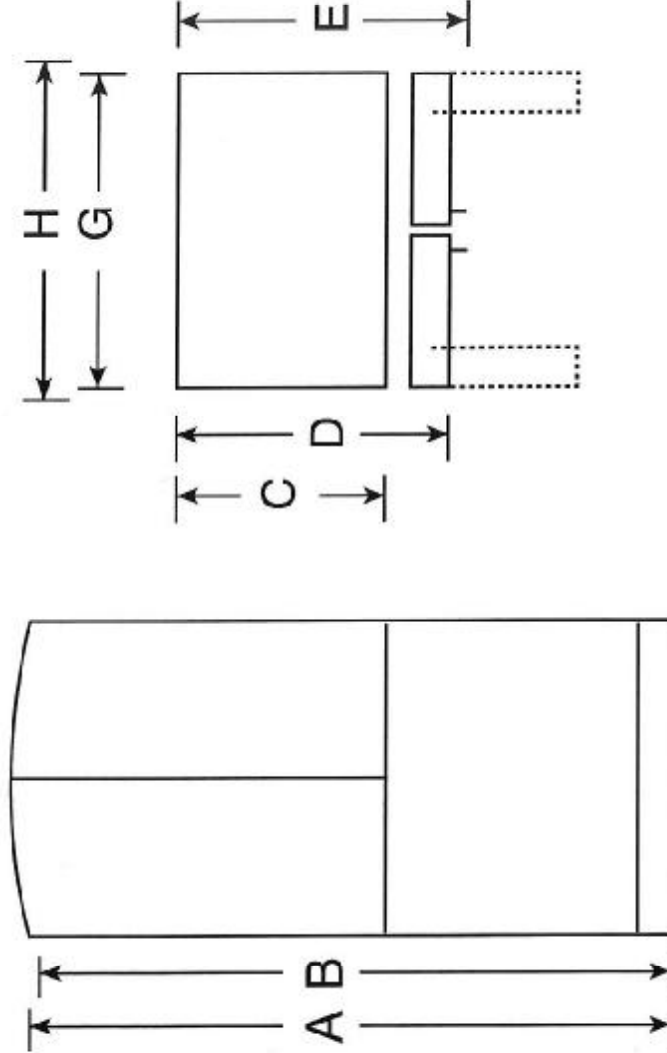

For answers to your Monogram® Café™ Series, Profile™ Series or GE® appliance questions, visit our website applianceanswers.com or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

Specification Revised 3/15

**GE PCS940SFSS****Stainless Steel**

30" Slide-In Electric Self Cleaning Convection
Range with Baking Drawer



Representational Photo
View Line Drawing

Reasons to buy:

- True European Convection
- Heavy Duty Self-Clean Oven Racks
- Glass Touch Oven Controls
- Bridge Element
- Hidden Bake Oven Interior
- Tri-ring Ribbon Element
- Extension Gliding Roller Rack

Other Colour(s) Available:

Black on Black-PCS940DFBB

White on White-PCS940DFWW

Approx Dimensions (in.):

Height: 36-3/4 Depth: 26-1/2 Width: 29-7/8

Approx Dimensions (cm.):

Height: 93.34 Depth: 67.31 Width: 75.88

Approx Shipping Weight:


Weight: 204 lbs./93 kgs.

For more information, please call the Mabe
Customer Service Centre at 1-800-361-1100.

Capacity	
Lower Oven	1.0
Main Oven	5.6
Total Oven Capacity	6.6
Controls	
Audible Preheat Signal	Yes
Range Lockout	Yes
SmartSet Controls	Glass Touch
Temperature Display	Yes
Auto Oven Shut-Off With Override	Yes
Auto Recipe Convection Conversion	Yes
Auto Self-Clean	Yes
Automatic Meat Thermometer (Probe)	Yes
Certified Sabbath Mode	Yes
Convection Bake	Multi/Single Rack Bake
Convection Roast	Yes
C° or F° Programmable	Yes
Delay Bake Option (Time Bake)	Yes
Delay Bake Option With Cook & Hold	Yes
Electronic Clock & Timer	Yes
Light Self Clean Option	Yes
QuickSet Controls	QuickSet VI Glass Touch Controls
TrueTemp™ System	Yes
Variable Broil	Yes
Variable Cleaning Time	w/Delay Clean Option
Features	
3-in-1 VersaCook System (VCS)	Yes
4 Pass Broil Element	3410 watt
6 Pass Hidden Bake Element	2850 watt
Automatic Oven Light	Yes
Automatic Self-Clean Oven Door Lock	Yes
Delay Clean Option	Yes
Dishwasher Safe Knobs	Yes
Drawer System, Bake/Warm/Storage	Bake
Flat-back Convection	Yes
Fuel Type	Electric
Glass-Ceramic Cooktop	Black
Hidden Bake Element	Yes
Indicator Lights	2
Oven Cavity Colour	Black
Oven Interior Light	Halogen

Oven Shelves	3 Heavy Duty Self-Clean
Oven Type / Cleaning	Convection Self-Clean
Select Clean	Yes
6" Heating Element	1 ribbon (1200W)
7" Heating Element	2 ribbon (1800 Watt)
Bridge Element	1 (800 watt)
Convection Element	1200 W
Infinite Heat Controls	Yes
Tri-Ring 6"/9"/12" Heating Element	1 ribbon (1050/1950/3000 Watt)
Warming Zone	6" ribbon element, 120 watts
Gliding oven racks	1
Optional Closed Door Broil	Yes
Removable Baking Drawer Liner	Included
Indicator Lights	
"On" Indicator Light	Yes
Hot Surface	4
Appearance	
Colour Appearance	Stainless Steel
Control Location	Upfront
Flush appearance Installation	Yes
Frameless Lift-off Oven Door	Black Glass
Handle Style	Stainless Steel
Knob Colour	Stainless Steel Appearance
Other Colours Available	WW; SS
Oven Door Type	Black Glass
Oven Door with Window	Big ClearView™
Textured Steel Side Panels	Grey
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	204
Cabinet Width Required (in.)	30
Cooktop Width (in.)	31-1/8
Cutout Dimensions (w x h x d) (in.)	30 x 35-7/8 x 23-3/8
Depth with Door Open (in.)	46-3/4
Overall Depth (in.)	26-1/2
Overall Height (in.)	36-3/4
Overall Width (in.)	29-7/8
Electrical Requirements	
Amps @ 240V/208V	40
KW Rating at 208V	10.9
KW Rating at 240V	14.5
EnerGuide Rating	
EnerGuide Rating (kWh/year)	570
Wattage	
Convection Wattage	1200 W
Warranty	
Full 1 Year	Entire Appliance; In Home; Parts & Labour
Limited Additional 4 Years (5 Years)	Radiant Heating Elements & Smoothtop Surface Against Thermal Breakage; Parts


Installation Preparation

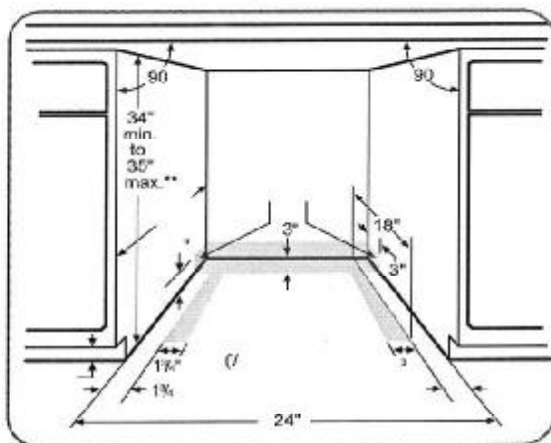

- The rough cabinet opening must be at least 24" deep. The opening should be 35" max. height.

- The dishwasher must be installed so that drain hose is no more than 10 feet in length for proper drainage.
- The dishwasher must be fully enclosed on the top, sides and back, and must not support any part of the enclosure.

CLEARANCES: When installed into a corner, allow 2" min. clearance between dishwasher and adjacent cabinet, wall or other appliances. Allow 25-5/8" min. clearance from the front of the dishwasher for door opening. Figure B

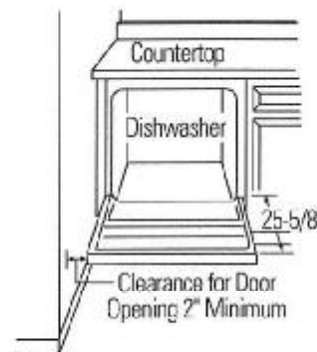

DRAIN REQUIREMENTS

- Follow local codes and ordinances.
- Do not exceed 10 feet distance to drain.
- Do not connect drain lines from other devices to the dishwasher drain hose.
- Dishwasher must be connected to waste line with an air gap (not supplied) or 32" minimum high drain loop, depending on local codes and ordinances to prevent back flow into the dishwasher.
- Air gap must be used if waste tee or disposer connection is less than 18" above the floor to prevent siphoning.

DRAIN PREPARATION

The type of drain installation depends on answers to the following questions:

- Do local codes or ordinances require an air gap?
- Will waste tee or disposer connection be less than 18" above the floor?
- Will installation have a drain loop less than 32" above floor?

If the answer to **ANY** of the 3 questions above is **YES**, **Method 1 MUST be used**. Otherwise either Method 1 or Method 2 may be used. Figure C or Figure D.




CAUTION:

An air gap **MUST BE USED** if the drain hose is connected to waste tee or disposer lower than 18" above the floor.


Failure to provide the proper drain connection height with air gap or 32" minimum, high drain loop will result in improper draining of the dishwasher.

Method 1 – Air Gap with Waste Tee or Disposer

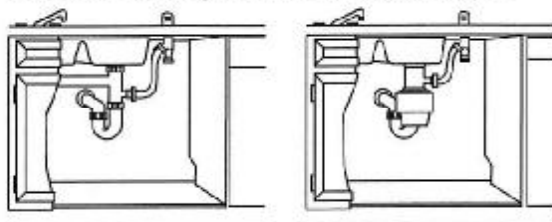

Method 2 – High Drain with Waste Tee or Disposer

Provide a method to attach drain hose to underside of countertop.

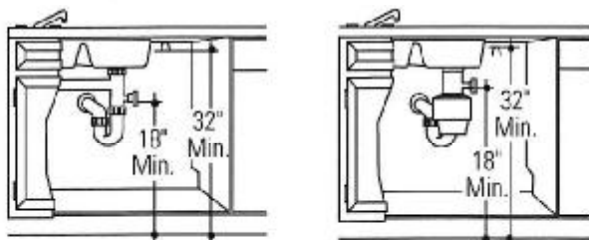

Install waste tee or disposer and air gap according to manufacturer's instructions.

CABINET PREPARATION

- Drill a 1-1/2" dia. hole in the cabinet wall within the shaded areas shown in Figure A for the drain hose connection. The hole should be smooth with no sharp edges.

Installation Preparation

PREPARE ELECTRICAL WIRING



WARNING

FOR PERSONAL SAFETY: Remove house fuse or open circuit breaker before beginning installation. Do not use an extension cord or adapter plug with this appliance.

Electrical Requirements

- This appliance must be supplied with 120V, 60 Hz., and connected to an individual properly grounded branch circuit, protected by a 15 or 20 ampere circuit breaker or time delay fuse.
- Wiring must be 2 wire with ground.
- If the electrical supply does not meet the above requirements, call a licensed electrician before proceeding.

Grounding Instructions – Cable Direct

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment grounding conductor must be run with the circuit conductors and be connected to the equipment grounding terminal or lead on the appliance.


Grounding Instructions – Power Cord Models

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electrical shock by providing a path of least resistance for electric current. The plug must be plugged into an appropriate outlet that is installed and grounded in accordance with local codes and ordinances.



WARNING

The improper connection of the equipment grounding conductor can result in a risk of electric shock. Check with a qualified electrician or service representative if you are in doubt that the appliance is properly grounded.

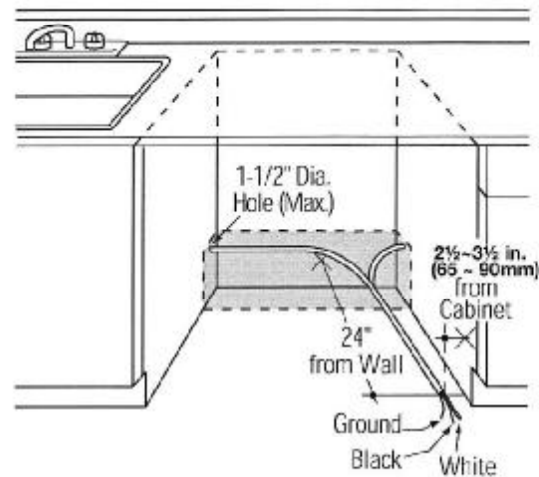

Cabinet Preparation & Wire Routing


- The wiring may enter the opening from either side, rear or the floor within the shaded area.
- Cut a 1-1/2 max. dia. hole to admit the electrical cable. The hole must be free of sharp edges. If the cabinet wall is metal, the hole edge must be covered with a bushing.
- Cable direct connections may pass through the same hole as the drain hose and hot water line, if convenient. If cabinet wall is metal, the hole edge must be covered with a bushing. NOTE: Power cords with plug must pass through a separate hole.

Electrical Connection to Dishwasher

Electrical connection is on the right front of dishwasher.

- For cable direct connections the cable must be routed as shown in Figure E. Cable must extend a minimum of 24" from the rear wall.
- For power cord connections, install a 3-prong grounding type receptacle. The power-supply receptacle for the appliance shall be installed in a cabinet or on a wall adjacent to the undercounter space in which the appliance is to be installed.

FRONT LOAD WASHERS

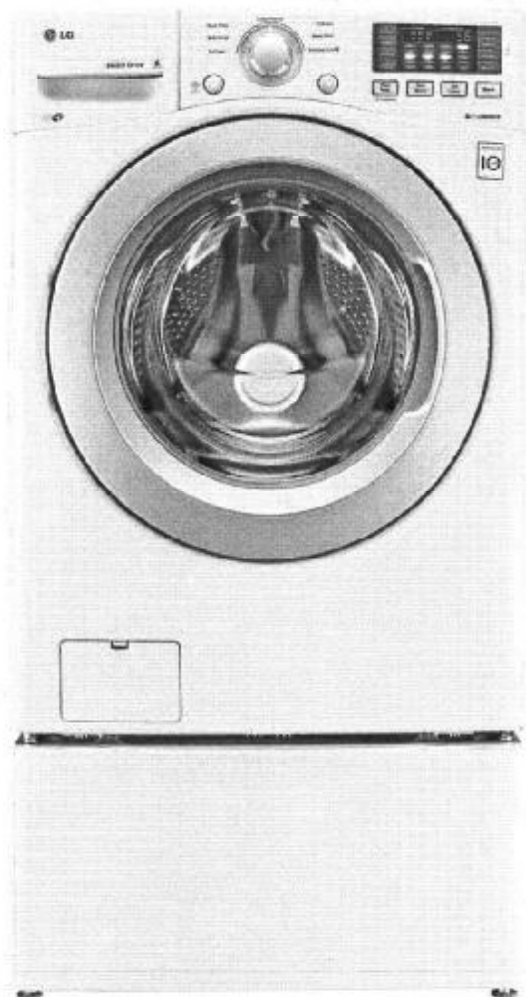

WM3170CW

Performance

- 5.0 cu.ft. Ultra Large Capacity with NeveRust™ Stainless Steel Drum (IEC)
- DirectDrive™ Motor for the Ultimate in Durability and Reliability with 10 Year Warranty
- 10" TiLTub™ for Easy Reach into the Rear of the Drum
- 1300 RPM Powerful Spin for Efficient Water Extraction

Intelligent Fabric Care


- ColdWash™ Technology
- 6Motion™ Technology
- NFC Tag On
- SmartDiagnosis™
- TrueBalance™ Anti-Vibration System
- Magnet Ventilation
- SenseClean™ System for Intelligent Fabric Care
- 7 Washing Programs and 5 Temperature Settings
- Delay Wash up to 19 hours for Washing Convenience

Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Silver Spray Rimmed Glass Door

Technology Benefits

- LoDecibel™ Quiet Operation
- Highly Energy and Water Efficient



DirectDrive

**LG**

Life's Good

FRONT LOAD WASHERS

More Free Time

Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The **ultra large capacity (5.0 cu.ft.)** washer lets you do more laundry in fewer loads. That's time well saved.

All the Right Moves

With **6Motion™ Technology**, each wash cycle combines up to 6 different wash motions to provide a revolutionary cleaning experience and ultimate fabric care.

The Hottest Thing in Cold

Now using the cold cycle on your washer doesn't mean compromising on how clean your clothes are. **ColdWash™ Technology** uses cold water and enhanced washing motions to penetrate deep into fabrics, giving you cold-water savings with warm-water performance.

Count On It


When you buy a washer, you don't want to worry that it won't last. Because the **DirectDrive™ Motor** uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a **10-year warranty**.

NFC Tag On

Easily change and customize cycles with a **simple tap of a smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

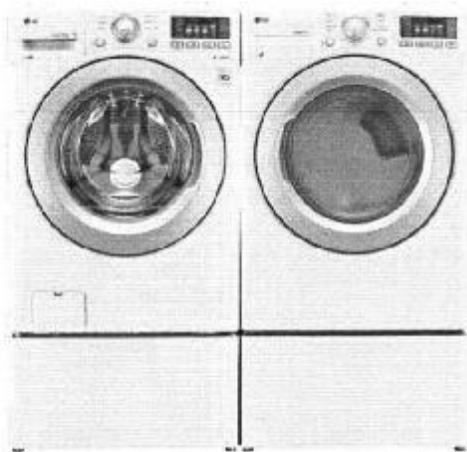


LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X6
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623

WM3170CW	
TYPE	
Front Loader	•
Design Look	Front Control
Intelligent Electronics Controls with Cool LED Display	•
Del-A-Cycle™	•
Capacity	IEC 5.0 cu.ft.
ENERGY	
Energy Star	•
WASH PROGRAMS	
7 Programs	Cotton/Normal, Bulky/Large, Perm Press, Delicates, SpeedWash, Tub Clean, Download/Small Load
9 Options	Prewash, Rinse+Spin, Water Plus, Extra Rinse, Child Lock, ColdWash™, FreshCare™, Custom Program, Delay Wash (up to 19 hours)
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)
Spin Speeds	Extra High (1300 max), High, Medium, Low, No Spin
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	3
FABRIC CARE FEATURES	
ColdWash™	•
6Motion™	•
SenseClean™ System	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cap), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
NFC Tag On	•
SmartDiagnosis™	•
Load Sense	•
Status Indicator(s)	•
End of Cycle Signal	•
Child Lock	•
Auto Suds Removal	•
Forced Drain System	•
Easy Loading Tilt™	•
Leveling Legs	4 Adjustable Legs
LoDecibel™ Quiet Operation	•
MOTOR AND AGITATOR	
Motor Type / Motor Speed / Axis	Direct Drive / Variable / Horizontal
MATERIALS AND FINISHES	
Wash Drum™ Stainless Steel Drum	•
Cabinet	Painted Steel
Control Panel	Plastic
Top Plate	Painted
Transparent Glass Door	•
Door Rim	Silver Rimmed Glass Door
Available Colours	White (W)
POWER SOURCE	
Rating / Electrical Requirements / Type	LL Listed / 120V, 5 Amps / Electric
OPTIONS	
Pedestal	WDP4W
Pedestal (White)	27" x 13 3/5" x 28 2/5"
Stacking Kit	K51K1
DIMENSIONS	
Product (WxHxD)	27" x 36 11/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	28 1/2" x 43 5/16" x 31 5/16"
Weight (Product/Carton)	196.2 lbs/212.7 lbs
UPC CODES	
WM3170CW	772454 063657
WDP4W	048231 011211
K51K1	772454 059896
WARRANTY	
1 year parts and labour; 5 years part on Drum; 10 years part on DirectDrive™ Motor	

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.
All trademarks are property of their respective owners.

ELECTRIC/GAS DRYERS

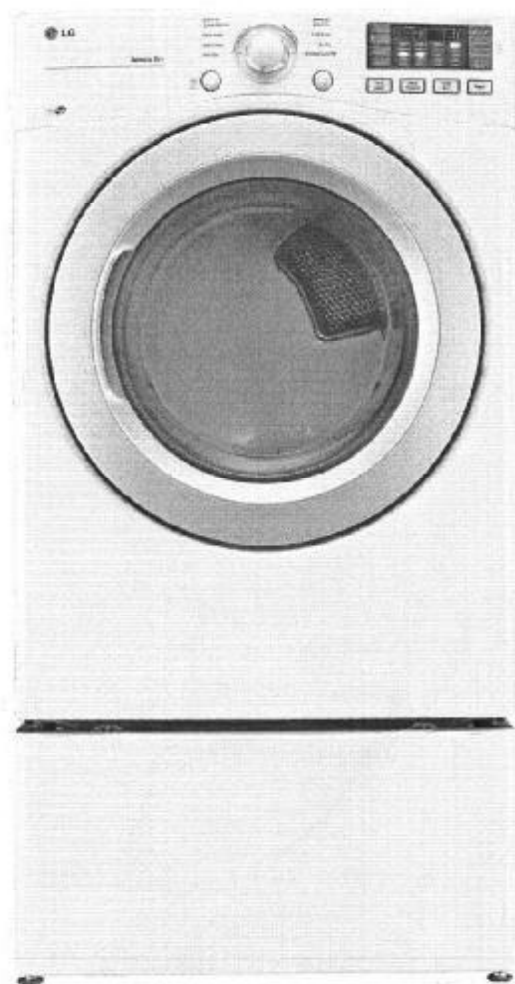

DLE3170W
DLG3171W

Performance

- 7.4 cu.ft. Ultra Large Capacity with Aluminized Alloy Steel Drum

Intelligent Fabric Care



- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- NFC Tag On
- SmartDiagnosis™
- 8 Drying Programs
- 5 Temperature Settings
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Wrinkle Care Option
- Anti-Bacterial Option
- Energy Saver Option
- Delicates Cycle
- Custom Program
- Damp Dry Signal

Style and Design

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Silver Spray Rimmed Glass Door

Technology Benefits

- LoDecibel™ Quiet Operation

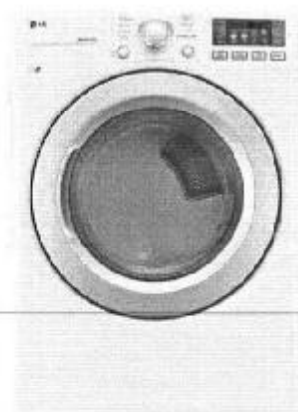

ELECTRIC/GAS DRYERS

Dry Big Loads

Accurately dry big and bulky loads with **7.4 cu.ft. ultra large capacity**. Less time in laundry room, more time for life.

NFC Tag On

Easily change and customize cycles with a **simple tap of a smart phone app**. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

Accurate Drying

LG's **Sensor Dry System** measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.

Pressed for Time

With the **Wrinkle Care Option** just pop your dry clothes in for a tumble on the Wrinkle Care Option to reduce creases.



DLE3170W / DLG3171W

TYPE	
Front Loader	•
Design Lock	Front Control
Intelligent Electronic Controls with Dual LED Display	•
Del-A-Cycle™	•
Capacity	7.4 cu.ft.
Dry Load Capacity	> 10.2 kg
DRYING PROGRAMS	
8 Programs	Sensor Dry: Cotton/Normal, Preen Press, Delicates, Bulky/Large, Download/Speed Dry Manual Dry: Freshen up, Speed Dry, Air Dry
9 Options	More Time, Less Time, Custom Program, Damp Dry Signal, Wrinkle Care, Child Lock, Signal ON/OFF, Anti Bacteria, Energy Saver
5 Temperature Settings	High, Medium High, Medium Low, Ultra Low
6 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	50 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
Sensor Dry	•
Precise Temperature Control and Variable Heater	•
CONVENIENCE FEATURES	
NFC Tag On	•
SmartDiagnosis™	•
FlowSense™ Duct Clogging Indicator	•
Wrinkle Care Option	•
Remaining Time Display/Status Indicator(s)	•
End of Cycle Signal	•
Child Lock	•
Drum Light	•
Reversible Door	•
Leveling Legs	4 Adjustable Legs
Venting Options	Electric: 4 Way Venting / Gas: 3 Way Venting
3 Minute Installation Check	•
LoadSaver™ Quiet Operation	•
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum (Aluminum)	•
Cabinet	Painted Steel
Control Panel	Plastic
Top Panel	Painted
Transparent Glass Door	•
Door Trim	Silver Rimmed Glass Door
Available Colors	White (W)
POWER SOURCE	
Range	1.8, 1 and 3
Electrical Requirements	Electric: 240V, 50 Amps / Gas: 120V, 15 Amps
Type	Electric: DLE3170W / Gas: DLG3171W
BTU	20,000
OPTIONS	
Pecental	WDP4W
Pecental (Wrinkle)	27" x 13 3/5" x 29 2/5"
Stacking Kit	KS7K1
DIMENSIONS	
Product (WxHxD)	27" x 36 1 1/16" x 29 3/4" (51" D with door open)
Carton (WxHxD)	39 1/2" x 42 1/8" x 31 1/4"
Weight (Product/ Carton)	130 lbs/144 lbs
UPC CODES	
DLE3170W	772454 063661
DLG3171W	772454 063671
WDP4W	048231 611211
KS7K1	772454 053695
WARRANTY	
	1 year parts and labour

Design, features and specifications are subject to change without notice.
Metric weights and measurements are approximate.
All trademarks are property of their respective owners.



LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X5
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623

Printed in January 2015