GOEMANS APPLIANCES

1-877-463-6267

HST#105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansApplia

PACKING SLIP

HB00011952-1 Salesperson: MIKE ALBANESE

Purchase Date:

2/12/16

Invoice Finished Date:

Delivery/Pickup Date:

Jul 14, 2016

Invoice Type: Date Printed:

VBL

Feb 12, 2016

Page:

Tell us how we did at

ww.goemanscustomersurvey.com for a chance win fabulous prizes! See store for details

ONLINE BANKING ACCOUNT

BILL TO: 9056694133

CONGIUSTI, STEPHANIE/BRUNO 4 FORTIS CRES BRADFORD, ON

(905) 669-4133

BUS#

SHIP TO: 6478871824

CONGIUSTI, STEPHANIE/BRUNO

(647) 887-1824

4 FORTIS CRES

LOT 70L

TEL#

BRADFORD, ON

BUS#

Directions: HWY 88

QTY	LOC MODEL#	SERIAL# COLOUR	BRAND - DESCRIPTION
1	FHWC3055LS	STAINLES	
	, h	earance product requires	30W,400CFM,CONVERTIBLE,3SPD,D/W SAFE FILTERS a 50% deposit & is considered FINAL SALE.
1	x_ RF23HCEDBSR/AA	STAINLES	· · · · · · · · · · · · · · · · · · ·
200	Payment	Topodo en el circo	23 CU.FT BM FD FRIDGE, IW DISP, COUNTER DEPTH INTERAC
	The second of th	Act State of the S	
		Manada, in a special of the special	
Service and the service and th	- American	WARLE STORMER TO THE STORMER TONMER TO THE STORMER TO THE STORMER TO THE STORMER TO THE STORMER	
	T CONTRACTOR OF THE CONTRACTOR	Al control of the second of th	
1000		elicon place en	
1		Provided the second of the sec	

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY


FRIGIDAIRE

Chimney Hood

FHWC3055LS



30' Wall Mount

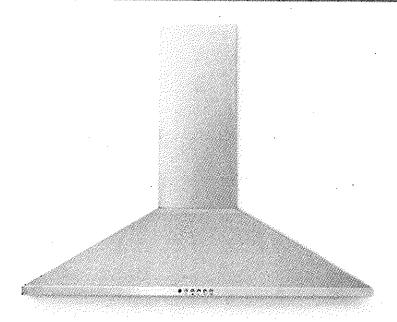

Signature Features

Stainless Steel Canopy Design

Classic flood design is constructed of durable stainless steel and very attractive.

Washable Filters

Dishwasher-safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.

Centrifugal Fan

Move air quietly and efficiently — up to 400 cu.ft. of air per minute,

Halogen Lighting

For bright illumination of the cooktop surface.

Nominal Width	30"
Inst≋llation Type	Wall Mount
Style	Stainless Steel/ Chimney
Air Discharge	Vertical
Air Delivery (CFM)	400
Blower Type	Centrifugal
Centrols	Electronic Push Button
Fan Speeds	3
Sound Level (dBA)	69.9
Dual Halogen Lights	Yes
Dishwasher-Safe Filters	Yes
Exhaust Duct	Convertible*
🚅 transport 🚅 grand filtra a grand and state of the state of the filtra and the state of the s	TO ME TO A CONTRACT CONTRACT OF THE
Duct Required	6" Round
	6" Round
Optional Accessories	6" Round PN# FHWRKTSSL
Duct Required Optional Accessories Duct-Free Kit 10' Flue Extension Kit	
Optional Accessories Duct-Free Kit 10' Flue Extension Kit	PN# FHWRKTSSL
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications	PN# FHWRKTSSL
Optional Accessories Duct-Free Kit	PN# FHWRKTSSL
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications Product Dimensions - Height (With One Cover)	PN# FHWRKTSSLS PN# FHWIOXSSLS 26-25/32" min. 31-11/16" min.
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications Product Dimensions - Height (With One Cover) (With Flue Extension)	PN# FHWRKTSSLS PN# FHWIOXSSLS 26-25/32" min. 31-11/16" min. 45" max
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications Product Dimensions - Height (With One Cover) (With Flue Extension) Width Depth	PN# FHWRKTSSL PN# FHWIOXSSLS 26-25/32" min. 31-11/16" min. 45" max 29-7/8"
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications Product Dimensions - Height (With One Cover) (With Flue Extension) Width Depth Voltage Rating	PN# FHWRKTSSLS PN# FHWIOXSSLS 26-25/32" min. 31-11/16" min. 45" max 29-7/8"
Optional Accessories Duct-Free Kit 10' Flue Extension Kit Specifications Product Dimensions - Height (With One Cover) (With Flue Extension) Width	PN# FHWRKTSSLS PN# FHWIOXSSLS 26-25/32" min, 31-11/16" min, 45" max 29-7/8" 19-11/16"

Ventilation is convertible to be either discled outside, or recirculates lessee requiring no ducting (Resirculated onto requires use of actional Dust-Free Kir.)

For use on adequately wired 120V, dedicated circuit having 2-wire restrict with a separate ground wire Appliance must be grounded for safe operation.

NOTE Always contain local and national electric codes. Check how building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation matructions on the web at fractioners.


Specifications subject to charge

Available in.

Stainless (5)

frigidaire,ca

FHWC3055LS 36" Wall Mount

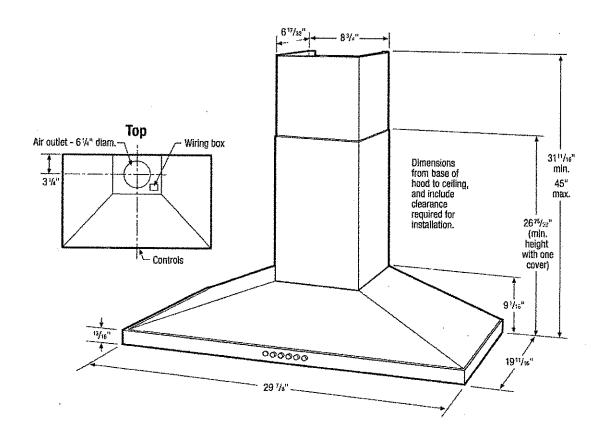

Chimney Wall-Mount Hood Specifications

- Product Shipping Weight (approx.) 80 Lbs.
- Wall-Mount Installation
- Ventilation system is preset to exhaust air outside. If outside ducting is not possible, optional Duct-Free Recirculation Kit (PN# FHWRKTSSLS) is available to convert ventilation to allow air to recirculate inside. (Refer to Ducted Option Specifications for outside ventilation.)
- Sones Rating 7.9
- Voltage Rating 120V/60 Hz/15 Amps
 Connected Load (kW Rating) © 120 Volts = 0.516kW
 (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe oppration.)
- Amps @ 120 Volts = 4 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Minimum installation height allowed from bottom of nood to standard 36"-high electric or gas cooking surface is 26" 35". (NOT more than 32" recommended.) For detailed instructions regarding install heights in 8", 9" and 10" ceiling applications, refer to installation guide on web. "To prepare mounting surface, adequate structure and support must be provided, capable of supporting 100 lbs.

Ducted Option Specifications

- · For outside ventilation.
- Exhaust Duct Required 6" round
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex cucting only to connect rigid duct directly to transitions (if allowed by code).
 Thermal breaks such as short section of nonmetallic duct, should
- be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper
- Refer to installation instructions on web for detailed exhaust duct preparation and converting vent blower system for recirculating inside.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detalled instructions.

Optional Accessories

- Duct-Free Recirculation Kit (PN# FHWRKT55LS).
- •10' Flue Extension Kit (PN# FHW10x55LS).



RF23HCEDBSR

22.5 cu. ft. Counter-Depth French Door Refrigerator with CoolSelect Pantry

Features

- * 3-Door Counter-Depth Design
- Large Capacity 22.5 cu, ft.
- Twin Cooling Plus® System
- ENERGY STAR* Compliant
- Ice Master Ice Maker in the Refrigerator
- CoolSelect Pantry[®] with Temperature Control
- Premium External Filtered Water and Ice Dispenser
- High-Efficiency LED Lighting
- EZ-Open Handle on Freezer Door
- Adjustable Shelf for Tall, Oversized Items
- Two Humidity-Controlled Crispers
- Tempered Glass Spill-Proof Shelves
- Auto Pull-Out Upper Freezer Drawer
- Easy-to-Access Water Filter

Convenience

- Door Alarm
- Water Filter Indicator
- Child Lock →





Ranked "Highest in Customer Satisfaction with French door Refrigerators" in 2014 by J.D. Power and Associates.





Ice Master



CoolSelect Pantry with Temperature Control

Available Colour:



Stainless Steel

Signature Features

SLEEK, BUILT-IN LOOK

- Stylish, counter-depth design allows for more work space in the kitchen.
- Sleek, built-in look enhances overall kitchen design.

TWIN COOLING PLUS

- Refrigerator is kept at higher humidity levels to keep perishable fruits and vegetables fresher longer;
- Freezer air is kept drier for less freezer burn and better tasting frozen foods.
- Fruits and veggies are no longer limited to the crispers. Produce can be placed anywhere in the fresh food compartment and retain ultimate freshness.

"Whos compared to Samsung frage reside's that do not have triple cooling.

ICE MASTER

- Produces up to 10 lbs. of ice per day and stores 4.2 lbs.
- Space-saving design leaves more room in the refrigerator.

COOLSELECT PANTRY

 Provides additional temperature control for your food storage needs with Deli, Fresh and Chilled options.

SAMSUNG


RF23HCEDBSR

22.5 cu. ft. Counter-Depth French Door Refrigerator with CoolSelect Pantry


Installing Your Refrigerator

- Measure the height, width and depth of the opening, making sure to include baseboards, moulding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions.
- Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
- Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
- Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cut-out information is for planning purposes only. For complete installation details consult manual packed with product, or download manual online at samsung.com.



Dimensions

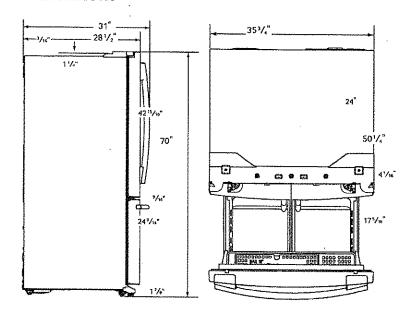

Total Capacity: 22.5 cu. ft.

Refrigerator: 15.7 cu. ft.

- Premium External Filtered Water and Ice Dispenser
- Ice Master Ice Maker
- CoolSelect Pantry with Temperature Control Deli (41°C), Fresh (38°F) and Chilled (32°F) options
- 2 Humidity-Controlled Crispers
- 5 Tempered Glass Spill-Proof Shelves
- Adjustable Shelf for Tall, Oversized Items
- 6 Door Bins
- Right Door: 3 Gallon Bins
- -Left Door: 3 Regular Bins
- High-Efficiency LED Lighting

Freezer: 6.8 cu. ft.

- EZ-Open Handle
- 1 Drawer Divider
- High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labour on Refrigerator Five (5) Years Parts and Labour on Sealed Refrigeration System Only* Ten (10) Years Parts and Five (5) Years Labour on Digital Inverter Compressor

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors): $35^3/_4$ " x 70" x 31"

Dimensions (WxHxD without hinges and door): $35^3/_{\rm s}$ x $68^7/_{\rm s}$ " x 24"

Dimensions (WxHxD with hinge and door, no handle): $35^3/4$ " x 70" x $28^1/2$ "

Weight: 297.62 lbs.

Shipping Dimensions & Weight (WxHxD) Dimensions: $38\frac{1}{4}$ " x $76\frac{5}{8}$ " x $31\frac{1}{4}$ "

Weight: 321.87 lbs.

Colour Model #
Stainless Steel RF23HCEDBSR

UPC Code 887276966106

SAMSUNG

Samsung received the highest numerical score for ranges/cooktops/svens, microwaves, and french door refrigerators (3-way be) in the proprietary (D. Power and Associates 2014 kitchen Appliance Study. The 2014 kitchen Appliance Satisfaction Study is based on more than 3.200 evaluations from customers whis our chased cooktops/ranges/ovens; more than 2.100 evaluations from customers who purchased evertife-range microwaves, and more than 0.400 evaluations from customers who purchased refrigerators during the pair 24 months. The study was fielded from farruary through March 2014 Actual coolur may vary. Design, specifications, and colour availability are subject to change without notice.

O 7014 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd., used with perintsion

^{*}Compressor, evaporator, condenser, drier, connecting tubing