

KitchenAid®

FOR THE WAY IT'S MADE.®

PRODUCT MODEL NUMBERS

KRSC500E KRSC503E
KRSF505E

Electrical: A 115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

Side by Side Refrigerator

PRODUCT DIMENSIONS

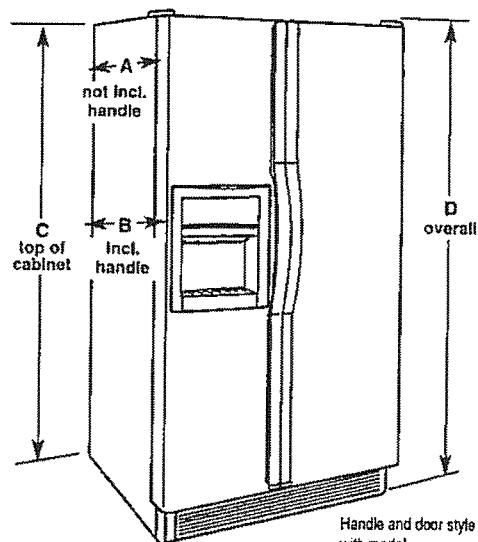


Handle and door style will vary with model.

Dimensions "C" and "D" include rollers extended 3/4" (1.9 cm).

Model	Model Size	Depth without Handle "A"	Depth with Handle "B"	Cabinet Height "C"	Overall Height "D"	Cabinet Width "E"	Depth "F" with Doors Open 90°
KRSC500E	22.5	27 1/2" (69.9 cm)	29 3/4" (75.6 cm)	68 1/2" (174.9 cm)	69" (175.3 cm)	35 1/2" (90.2 cm)	45 1/2" (116.5 cm)
KRSC503E	22.7	27 1/2" (69.9 cm)	30" (76.2 cm)	71" (180.3 cm)	71 1/4" (181 cm)	35 3/4" (90.8 cm)	45 3/4" (116.5 cm)
KRSF505E	25.6	32 3/4" (81.6 cm)	34" (86.4 cm)	68 3/4" (173.7 cm)	69" (175.3 cm)	35 3/4" (90.8 cm)	50 1/2" (128.3 cm)

LOCATION REQUIREMENTS

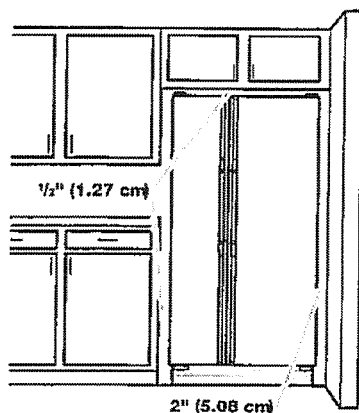

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.



Electrolux


59 Lewis Ave
Lot 213, Plan 51M-1063
Bradford West Gwillimbury

FRONT LOAD WASHERS

5.1 Cu. Ft. I.E.C.

EFLS617S TT/IW

Perfect Steam™ Washer with LuxCare™ Wash, SmartBoost™ and IQ-Touch™ Controls

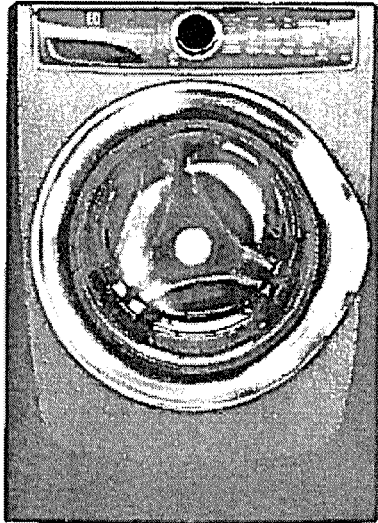

Most Efficient
2016

PRODUCT DIMENSIONS

Height	38"
Width	27"
Depth	32"

MORE EASY-TO-USE FEATURES

SANITIZE OPTION

Certified to kill and remove 99% of bacteria and 95% of allergens¹

STAINSOAK™ OPTION ELIMINATES PRE-TREAT

Unlike other washers, it starts by premixing water, detergent, and stain remover before the cycle begins to create a powerful, yet gentle cleaning solution. Then, the temperature, tumbling actions, and time are optimized based on the stain you select.

ENERGY STAR®-CERTIFIED MOST EFFICIENT

Meets the strictest criteria for efficient performance. In fact, you can save 40 gallons of water per week on average² compared to a leading high-efficiency top load washer.

10-YEAR MOTOR WARRANTY PLUS LIFETIME TUB WARRANTY

Rest easy knowing your washer is backed by a 10-year motor and lifetime tub warranty.

SMARTBOOST™ KEEPS COLOURS VIBRANT, LONGER³

Exclusive SmartBoost™ technology delivers an exceptional clean in cold water so your favourites stay flawless and colours stay vibrant, longer.

PERFECT BALANCE® SYSTEM & SECOND FLOOR GUARANTEE

Balances loads for smooth, quiet operation. So quiet you can even run your washer on the second floor or near bedrooms without noticing it.⁴


FRESH WATER RINSE REMOVES RESIDUAL DETERGENT

We use fresh water in our final rinse to ensure more detergent is removed, which is gentler on sensitive skin and provides better fabric care.

FITS MORE ROOMS WITH REVERSIBLE WASHER DOOR


With reversible washer door four-way venting and a standard 27" platform, our products are designed to fit just about anywhere you want to put them.

SIGNATURE FEATURES




THE MOST EFFECTIVE STAIN REMOVAL WITH SMARTBOOST™¹

Unlike other washers, our washer with SmartBoost™ premixes water and detergent before the cycle begins, maximizing the cleaning power of the detergent.




PERFECT STEAM™ REMOVES TOUGH STAINS

Unlike many washers, our Perfect Steam™ rises from the bottom, gently lifting dirt and stains from fibers.



THOROUGH CLEANING WITH LUXCARE™ WASH SYSTEM

Our LuxCare™ Wash System offers a thorough clean with improved wash actions, temperature control, and smart load sensing.



15-MINUTE FAST WASH²

Quickly deep cleans the items you need most.

Available in



Titanium
(TT)



Island White
(IW)

1. NSF Certified to Kill and Remove 99% of Bacteria and 95% of Allergens. 2. Based on Energy Star Most Efficient 2016 criteria. 3. Based on a 2013 survey of 1,000 consumers. 4. Based on a 2013 survey of 1,000 consumers.

5. Based on a 2013 survey of 1,000 consumers.

6. Based on a 2013 survey of 1,000 consumers.

7. Based on a 2013 survey of 1,000 consumers.

8. Based on a 2013 survey of 1,000 consumers.

9. Based on a 2013 survey of 1,000 consumers.

ELECTROLUXAPPLIANCES.CA

EFLS617S TT/IW



Electrolux

Capacity: 11.6 C. 11.6 C. ft

FEATURES	
Push-to-Open Door	Yes
10 Touch™ Controls	Yes
Perfect Steam™ Wash System	Yes
Balance System	Perfect Balance™
Second Wash	Wash Guard™
Lighting	Wash Guard™
Push-to-Open Dispenser Drawer	Yes
Wash System	Wash Guard™
Integral Water Inlet	Yes
Wash Door	Stainless Steel
Automatic Temperature Control	Yes
Automatic Water Level Adjustment	Yes
Auto Pre-Rinse Detergent Dispenser & Rinse Holders	Yes
Auto Bleach Dispenser Rinse Holders	Yes
Auto Detergent Dispenser Rinse Holders	Yes
Auto Fabric Softener Dispenser Rinse Holders	Yes
Variable Speed (RPM)	Variable
Spin Speed (RPM)	500
Reversible Door	Yes
Adjustable Loading Tray	Yes
ENERGY STAR®	Meets EPA req.
NSF® Certified Sanitizer	Yes

Heavy Duty, Warest Wares, Normal, Casual, Colour,
15 Min Fast Wash, Delicates, Sinc & Spin, Ciro Wash

```
options
```

Wash / Rinse Temperature Combinations

Temperature Selection	5
Add Steam	Yes
Spin Speed Selection	1000 RPM
Soil Level Selection	4
Delay Start	Yes
End-of-Cycle Delay	00:00

Free-standing Budget Counter* Shaded along a Dyer.

Protestant Hidden in Church, Second Floor

Luxury-Glide® Pedestal with Spacious Storage Drawer



Aluminum - Pile PPH017511	Ophory
Black White - Pile PPH017512	Ophory
Digger Slacking Pul - Pile SLACK17X	Ophory
Drum Ho - Pile PPH017513	Ophory

Codeword:

141mm	11
Island White	14
Power Supply Location	Top Right floor
Water Inlet Location	Top Left Near
Water Pump	120V 60Hz
Cabinet (to Load and Storage) 1.0 Voids	2
220V @ 120 Voids	1.25G
Pumps @ 120 Voids	22
Shipping Weight (Approx.)	230 Lbs

[illegible]



59 Lewis Ave.
Lot 213, Plan SIM-1063
Bradford

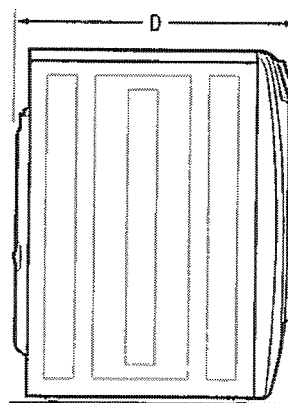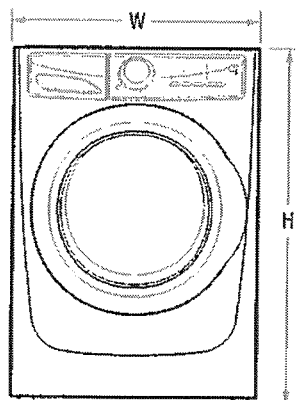

Heqin Co., Ltd. is Professional 38

Water	37
Deposits on Cash, at Acct Not including losses	32
Bank Bal. 00. Oper.	53 14

Elevates washer height to 53 1/4".
For detailed pedestal installation,
refer to instructions included
with pedestal or on web.
Pedestal installation may require
modified utility hookup locations.
For details, refer to Product
Install on Guide on web.



CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EFLSG17S 10/16

© 2016 Electrolux Major Appliances, N.A.

Printed in Canada

High standards of quality at Electrolux Home Products Inc. mean we are constantly working to improve our products. We reserve the right to change specifications of Electrolux products without notice.



Electrolux


59 Lewis Ave.
Lot 213, Plan SIM-1063
Bradford, West Gwill

ELECTRIC FRONT LOAD DRYERS

8.0 Cu. Ft.

EFMC617S TT/IW

Perfect Steam™ Dryer with Instant Refresh™ and IQ-Touch™ Controls

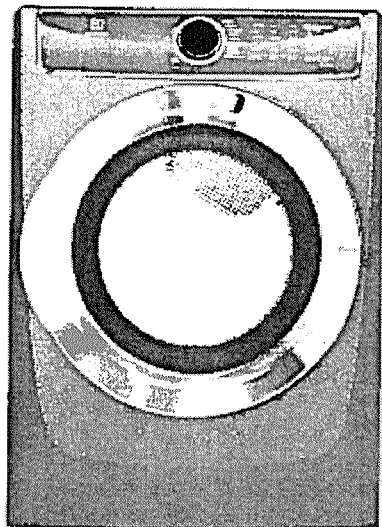

PRODUCT DIMENSIONS

Height	38"
Width	27"
Depth	31-5/8"

MORE EASY-TO-USE FEATURES

ENERGY STAR®-CERTIFIED

Rigorously tested to do more with less. Electrolux dryers meet strict criteria to guarantee high-quality energy efficient performance.

PERFECT STEAM™ WRINKLE RELEASE OPTION

Gently releases wrinkles and reduces static to keep clothes looking their best.

EXTENDED TUMBLE OPTION KEEPS CLOTHES TANGLE-FREE

Gently tumbles your clothes without heat to keep them tangle-free — perfect for when you cannot remove clothes right after the cycle ends.

LARGEST CAPACITY DRYER

Dry more in each load. Our 8.0 cu. ft. dryers have the largest capacity for a standard 27" platform.¹

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes three-year coverage on parts and one year on labour.²

9 CYCLES TO CARE FOR EVERY FABRIC

Perfectly dry every item with tailored cycles for towels, allergen, delicates, and more.

REVERSIBLE DOOR FITS MORE ROOMS

Enjoy easy loading no matter how your washer and dryer are configured.

OPTIONAL PEDESTALS AND STACKING KIT FOR MORE INSTALLATION OPTIONS

Raise your units with optional pedestal drawers that provide extra storage. Or use the optional stacking kit for convenient placement in small spaces.

LUXURY-DESIGN® LIGHTING

Conveniently find any article of clothing with premium LED lighting that provides visibility inside your dryer.

Available in




Titanium
(TT)




Island White
(IW)

SIGNATURE FEATURES




INSTANT REFRESH™ CYCLE REVIVES FABRICS

Remove wrinkles and quickly refresh items with steam in 10 minutes.



KEEPS CLOTHES LOOKING THEIR BEST

Clothes are gently tumbled while moisture sensors detect when clothes are dry to prevent over-drying. Customizable options and cycles allow you to care for every fabric.



15-MINUTE FAST DRY¹

Quickly dry the items you need most.



ALLERGEN CYCLE

Specialty cycle keeps clothes fresh.

For more information, visit www.electrolux.ca

¹Based on manufacturer's specifications for drying times. Drying times may vary based on load size and fabric type.

²Warranty limited to parts and labour. See www.electrolux.ca for details. © 2013 Electrolux North America. All rights reserved.

ELECTRIC FRONT LOAD DRYERS

EPMC617S TT/IW



59 Lewis Avenue
Lot 213, Plan SIM-1063
Bradford, West
Gwillima

27" ELECTRIC FRONT LOAD DRYER

Capacity	8.0 Cu Ft
FEATURES	
Full-Size Open Door	Yes
10 Touch Controls	Yes
Perfect Steam™ Dry System	Yes
Dry System	Luxury-Dry™
Sound System	Luxury-Silent
Lighting	Luxury-Design®
Tumble System	Gentle Tumble™
Modular Version	Yes
Dryer Drum	Stainless Steel
Tumble Speed (RPM)	50
Reversible Door	Yes
Adjustable Leveling Legs	Yes
ENERGY STAR®	Yes
ESF® Certified Sanitize	

CYCLES

Timed Dry (20, 45, 60, 75, Allergo Heavy Duty, Towel)	9
Normal 15-Min Fast Dry (Auto) Delicates Instant Refresh™	

OPTIONS

Temperature Selections	5
Add Steam	Yes
Electronic Auto Dry System	Yes
Manual Timed Dry Selections	4
Delay Start (Hours)	12
End-of-Cycle Chime	On/Off
Extended Tumble	Yes
Ash Stash	Yes
Less Dry	Yes
Shrink Guard	Yes
Dryness Levels	5

INSTALLATION OPTIONS

Freestanding, Under Counter*, Stacked Above Washer, Partial Installation in Closet, Second Floor	Yes
4-Way Dryer Venting	Yes



ACCESSORIES

Luxury-Glide® Pedestal with Storage Drawer	
Titanium - PHE EPD617S TT	Optional
Island White - PHE EPD617S TW	Optional
Black Stacking Kit - PHE STACKKIT	Optional
Drying Rack - PHE PD4640D	Optional

SPECIFICATIONS

Color	
Titanium	TT
Island White	TW
Maximum Exhaust Duct Length** (ft)	125
Power Supply Connection Location	Rear
Voltage Rating	240V/60Hz/30A
Connected Load (kW Rating @ 240 Volt)	6.0
Amps @ 240 Volts	25
Heating Element @ 240 Volt (Watts)	5,400
Shipping Weight (Approx.)	111 lbs.

* See installation instructions for details. ** See installation instructions for details.
* See installation instructions for details. ** See installation instructions for details.
* See installation instructions for details. ** See installation instructions for details.

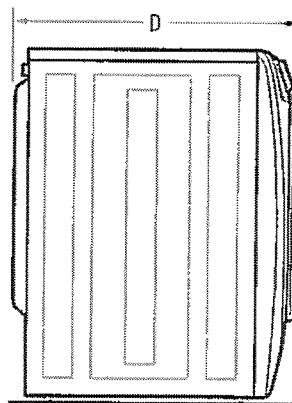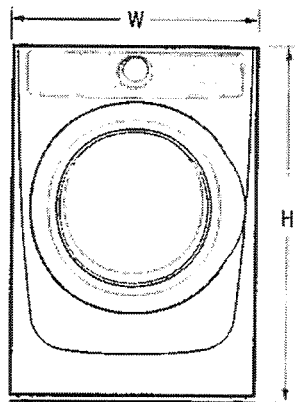


PRODUCT DIMENSIONS

Height (without 15" Pedestal)	33"
Height (with 15" Pedestal)	53 1/4"
Width	27"
Depth (to Center of Drum) (not including hoses)	31 1/2"
Depth (to Back) (not including hoses)	53 1/2"

15" Pedestal Drawer Installation

Elevates dryer height to 53 1/4". For detailed pedestal installation, refer to instructions included with pedestal or on web. Pedestal installation may require modified utility hookups. For details, refer to Product Installation Guide on web.

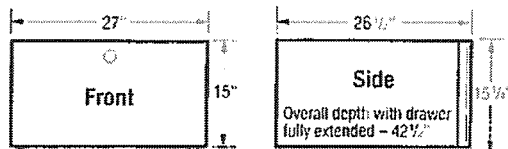

Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EPMC617S 04-16

© 2016 Electrolux Major Appliances, N.A.

Printed in Canada

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.