

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00015682

Salesperson: JASON NG
Purchase Date: 3/26/17
Invoice Finished Date:
Delivery/Pickup Date: Oct 16, 2017
Invoice Type: VBL
Date Printed: Mar 29, 2017
Page: 1

ONLINE BANKING ACCOUNT

BILL TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190

BUS# (416) 903-1081

SHIP TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190

BUS# (416) 903-1081

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		RF23J9011SR/AA		STAINLES	SAM, REBC4: REFRIGERATOR, FRENCH 4-DOOR, C 4 DOOR, 2 FRZ DOORS, 22.5 CUFT, TRPL COOLING, I&W, LED
-1		P-GPS0317-SAMTAX			
1		CCGS985SETSS		STAINLES	GEC, RAGF: RANGE, GAS, FREE-STANDING BLCK CAV OVN, FRONT CTRL, CNV, LWR OVN, CNTR OVAL BRNR
-1		P-GPS0317-GETAX			
1		CDT865SSJSS		Stainless Ste	GEC, DIS: DISHWASHER E-STAR, 140+JETS WASH SYSTEM, TOP CONTROLS, SS DOO
-1		P-GPS0317-GETAX			
1		NNGD693S		STAINLES	PAN, MICT: MICROWAVE, COUNTER-TOP 1.1 CU.FT., 1000W, BROWNER, INVERTER, POP OUT DIAL, SS
-1		P-GPS0317-PANTAX			
1		C-VAUGHAN SALES ALLOWANCE			
1		NNTK623S		STAINLES	PAN, AMI: ACCESSORY, MICROWAVE 27 TRIM KIT NNGD693/NNST661/671/681/NNSD671/691
		This special order or clearance product requires a 50% deposit & is considered FINAL SALE.			
		x _____			
-1		C-VAUGHAN SALES ALLOWANCE			
1		KC2SS10LS		STAINLES	KITC, COUN: COUNTER-TOP APPLIANCES 10 PIECE SET (8,10,1.5,3.0, 3.5, 8.0)
		This special order product requires a 50% deposit & is considered FINAL SALE. x _____			
		PLEASE ALLOW UP TO 4-12 WEEKS FOR DELIVERY OF THIS PIECE.			

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993 WWW.GOEMANS.COM
Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00015682

Salesperson: JASON NG
Purchase Date: 3/26/17
Invoice Finished Date:
Delivery/Pickup Date: Oct 16, 2017
Invoice Type: VBL
Date Printed: Mar 29, 2017
Page: 2

ONLINE BANKING ACCOUNT

BILL TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190 BUS# (416) 903-1081

Directions: 6TH LINE & SIMCOE ROAD

SHIP TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190 BUS# (416) 903-1081

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		P-GPS0317-GIVCOO			
1		WFW92HEFBD		BLACK DI	WHI, WAFL: WASHER, FRONT LOAD, LARGE CAPA DUET®, 5.2 CU FT. IEC, 12 CYCLES, 1200 RPM, STAINL
-1		P-GPS0317-WHITAX			
		MUST ADD WASHER HOSES			
1		YWED92HEFBD		BLACK DI	WHI, DREFL: DRYER, ELECTRIC - TO MATCH LAR DUET®, 7.4 CU FT., 10 CYCLES, ADVANCED MOISTURE S
-1		P-GPS0317-WHITAX			
		MUST ADD HOSES FOR STEAM DRYER# W10473735			
1		XHPC155YBD		BLACK DI	WHI, ALAU: ACCESSORY, LAUNDRY 15.5 PEDESTAL, 2.3 CU.FT. STORAGE DRAWER
1		P-GPS0317-WHIPEDS			
		This special order or clearance product requires a 50% deposit & is considered FINAL SALE.			
		x _____			
1		XHPC155YBD		BLACK DI	WHI, ALAU: ACCESSORY, LAUNDRY 15.5 PEDESTAL, 2.3 CU.FT. STORAGE DRAWER
1		P-GPS0317-WHIPEDS			
		This special order or clearance product requires a 50% deposit & is considered FINAL SALE.			
		x _____			
1		HOSE KIT WS5SS-ST			REL, ALAU: ACCESSORY, LAUNDRY HOSE-KIT, FOR STEAM DRYER, ALSO INCLUDES 1 WSHR HOSE
1		HOSE LNDRY 6FT 48			REL, AWA: ACCESSORY WASHER 1X 6 FT WASH HOSE, 3/4, STAINLESS STEEL BRAID

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

GOEMANS APPLIANCES

1-877-463-6267

HST # 105167993

WWW.GOEMANS.COM

Find us on Facebook at www.facebook.com/GoemansAppliances

PACKING SLIP

HB00015682

Salesperson: JASON NG
Purchase Date: 3/26/17
Invoice Finished Date:
Delivery/Pickup Date: Oct 16, 2017
Invoice Type: VBL
Date Printed: Mar 29, 2017
Page: 3

ONLINE BANKING ACCOUNT

BILL TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190 BUS# (416) 903-1081

SHIP TO: 4169903190

SHTERENBERG, ALEX & ALINA

28 TUPLING ST

LOT# 318

BRADFORD, ON L3Z 0A4

TEL# (416) 990-3190 BUS# (416) 903-1081

Directions: 6TH LINE & SIMCOE ROAD

QTY	LOC	MODEL #	SERIAL #	COLOUR	BRAND - DESCRIPTION
1		P-DELIVERY \$5,000-9,999			
-1		SALES DELIVERY ALLOWANCE			
		Payment		AMEX	

- All products remain the property of Goemans until paid in full.
- Removal of old appliances at owner's risk and must be disconnected.
- Please refer to delivery/installation brochures for important details.
- All authorized returned products will be subject to a restocking charge.
- Interest of 18% per annum will be charged on overdue accounts.
- Upon delivery customer agrees to accept service in accordance with manufacturer's warranty.
- This sales invoice is based on delivery within 12 months from date of purchase. After 12 months (or if market conditions adversely change) Goemans reserves the right to review pricing/delivery on this order and offer our customers options to accommodate these changes. Any & all date sensitive supplier promotions are exempt from the 12 month price guarantee and must be taken by the promotional delivery deadline.

WHITE CUSTOMER COPY

PINK GOEMANS COPY

RF23J9011SR



22.5 cu. ft. Counter Depth 4-Door Refrigerator with CoolSelect Plus

Features


- 4-Door Counter-Depth Design
- Large Capacity – 22.5 cu. ft.
- CoolSelect Plus[®]
- Triple Cooling System
- Ice Master Ice Maker in the Refrigerator
- ENERGY STAR[®] Compliant
- High-Efficiency LED Lighting
- Stainless-Look Display
- Stainless Steel Accents on Interior Shelving and Door Bins
- Fingerprint-Resistant Coating
- Tempered Glass Spill-Proof Shelves
- Flip-Up Shelf
- Gallon Door Bins
- Two Clear Crispers

Convenience

- Door Alarm
- Water Filter Indicator

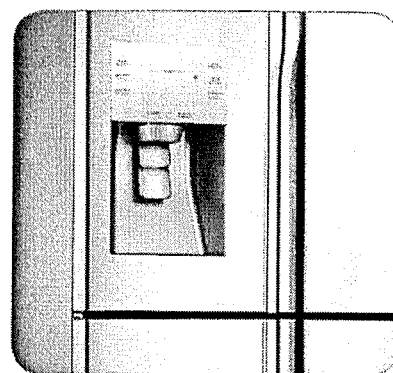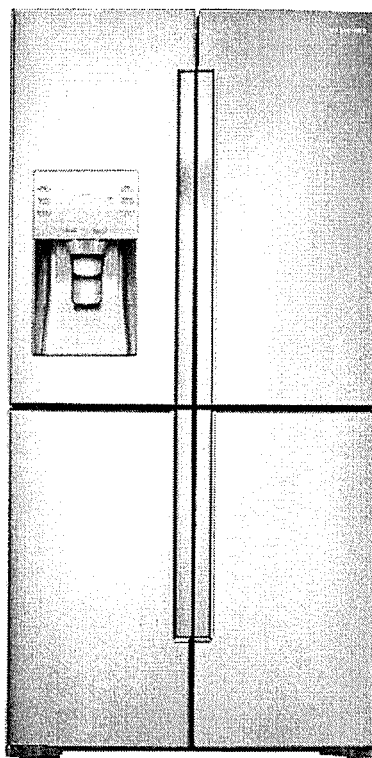

Clean, Modern Design

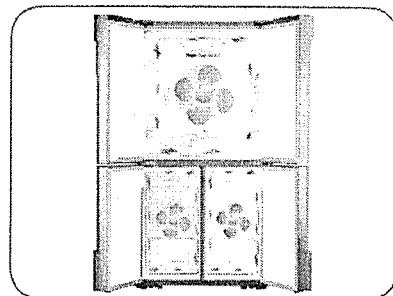

Triple Cooling System

Available Colour:



Stainless Steel

Signature Features

CLEAN, MODERN DESIGN

- Artful and symmetric design expresses individuality.
- Beautifully appointed stainless steel body and interior trim.

COUNTER DEPTH

- More capacity, smaller floor space.
- Our 22.5 cu. ft. capacity French Door has enough room to fit up to 22 bags of groceries.¹
- Stylish counter-depth design allows for more workable space in the kitchen.

Grocery comparison based on each cubic foot of usable space equalling one paper bag.

COOLSELECT PLUS

- Versatile bottom-right door can be a fridge or freezer, maximizing fresh food storage space.
- Fresh food storage space available at 18.05 cu. ft., when CoolSelect Plus is used as a refrigerator.
- Four customizable temperature settings available: Freezer at -23°C – -18°C, Soft Freeze at -5°C, Chill at -1°C and Cool at 5°C.



Ranked "Highest in customer satisfaction with French door refrigerators, in a tie."*

—J.D. Power

SAMSUNG


RF23J9011SR

22.5 cu. ft. Counter Depth 4-Door Refrigerator with CoolSelect Plus


Installing Your Refrigerator

1. Measure the height, width and depth of the opening, making sure to include baseboards, moulding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2" of clearance on hinge side of refrigerator when installing next to a wall where the handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entry way in the home is wide enough for the refrigerator to be moved through easily.

Please note: The following dimension and cut-out information is for planning purposes only. For complete installation details consult manual packed with product, or download manual online at samsung.com.

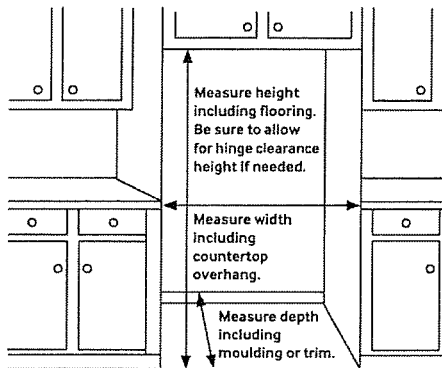

Dimensions

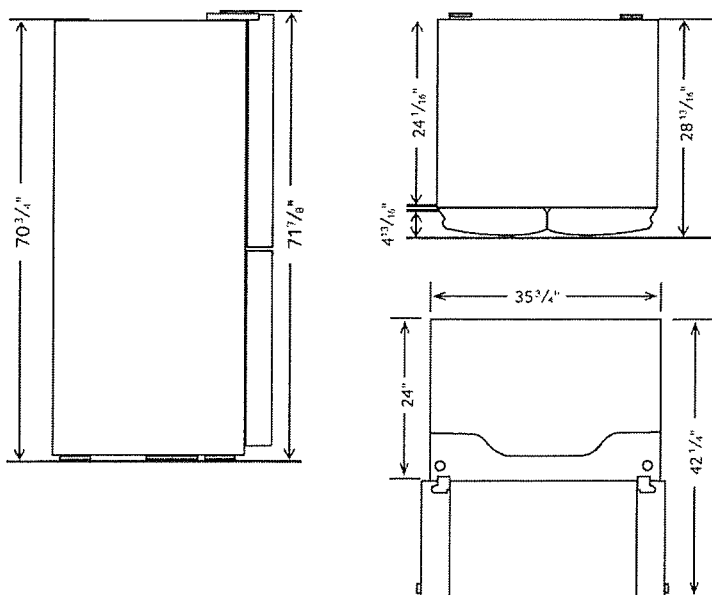

Total Capacity: 22.5 cu. ft.

Refrigerator: 13.6 cu. ft.

- Premium External Filtered Water and Ice Dispenser (Crushed or Cubed Ice)
- Ice Master Ice Maker
- High-Efficiency LED Lighting
- 2 Clear Crispers
- 5 Tempered Glass Spill-Proof Shelves
 - 1 Slide-in & fold-up
 - 1 Flip-Up
 - 3 Fixed

CoolSelect Plus: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Drawers
- 4 Temperature Zones:
 - 5°C
 - -1°C
 - -5°C
 - -23°F – -18°F
- High-Efficiency LED Lighting

Freezer: 4.45 cu. ft.

- 1 EZ Slide-Out Shelf
- 2 Freezer Drawers
- High-Efficiency LED Lighting

Accessories

Water Filter: HAF-CIN

Warranty

One (1) Year Parts and Labour on Refrigerator
Five (5) Years Parts and Labour on Sealed Refrigeration System Only*
Ten (10) Years Parts and Five (5) Years Labour on Digital Inverter Compressor

*Compressor, evaporator, condenser, drier, connecting tubing

Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):
35 3/4" x 71 7/8" x 28 7/8"

Dimensions (WxHxD without hinges and door):
35 3/4" x 70 3/4" x 24 1/16"

Dimensions (WxHxD with hinge and door, no handle):
35 3/4" x 71 7/8" x 28 7/8"

Weight: 352.7 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions: 38 5/16" x 78" x 31 5/16"

Weight: 385.8 lbs.

Colour	Model #	UPC Code
Stainless Steel	RF23J9011SR/AA	887276088969

SAMSUNG

*Samsung received the highest numerical score for French door refrigerators in a tie in the proprietary J.D. Power 2014 Kitchen Appliance StudySM Study based on 15,380 total responses measuring 10 French door refrigerators brands and measures opinions of consumers about their new appliance purchased in the past 24 months. Proprietary study results are based on experiences and perceptions of consumers surveyed in January-March 2014. Your experiences may vary. Visit jdpower.com.

Actual colour may vary. Design, specifications, and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. Clearance requirements are the recommended minimum only. Check the regulations and codes in your area for any additional requirements.

© 2015 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.


CGS985SETSS

GE Café™ Series 30" Slide-In Front Control Range with Baking Drawer

FEATURES AND BENEFITS

- Gas convection oven - Convection heating circulates the air to keep the heat consistent, enhancing the baking or roasting results
- 5.4 cu. ft. oven capacity - Enough room to cook an entire meal at once
- Baking drawer - Offers an additional 1.0 cu. ft. of capacity for convenient baking from 140° to 450°
- Self-Clean Oven - Conveniently cleans the oven cavity without the need for scrubbing
- Non-Stick Griddle - Provides a flat, non-stick surface for cooking and warming all types of foods
- 20,000 BTU tri-ring burner - Three-in-one burner is designed for accelerated boiling and gentle simmering
- Center oval burner - oval fifth burner in the center of the cooktop is large to accommodate odd-sized cookware or griddles
- Precise Simmer burner - Allows for low, even heat distribution that is ideal for delicate foods and sauces
- Black gloss oven interior - Black oven interior adds a stylish touch to any kitchen

Model CGS985SETSS - Stainless steel

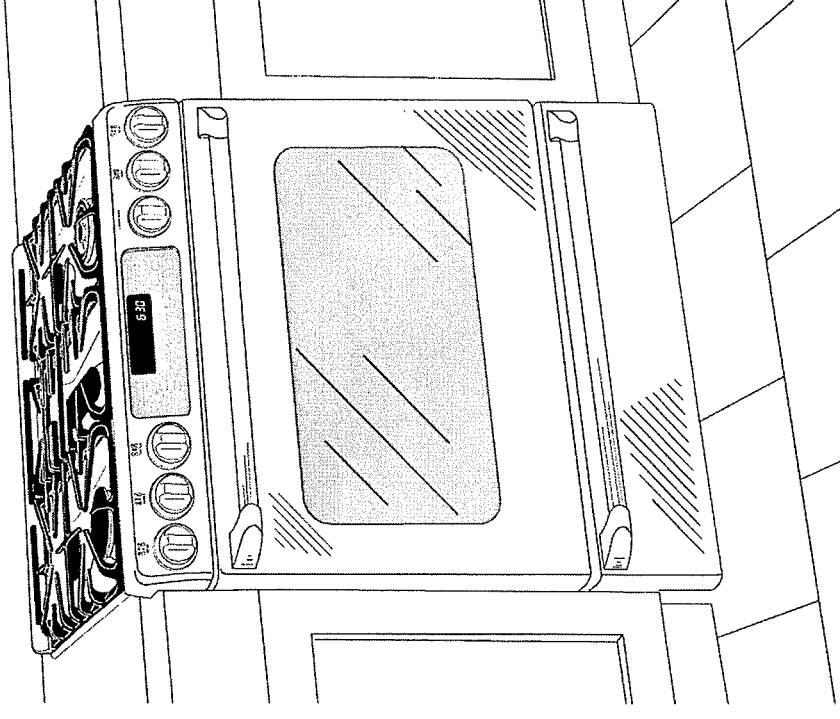

*GE Cafe™ Series 30" Slide-In Front Control
Range with Baking Drawer*

ELECTRICAL REQUIREMENTS: 120V; 60Hz, 15A

Technical drawing of a refrigerator with dimensions:

- Door height: $36 \frac{1}{4}'' \pm 1/4''$
- Door width (w/handle): $29 \frac{3}{8}''$
- Door width (w/o handle): $25''$
- Main body width: $*47 \frac{1}{2}''$
- Main body height: $25''$
- Door thickness: $1 \frac{1}{2}''$
- Main body depth: $30''$



GE APPLIANCES

All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important required step in the installation of the range.



Specification Revised 5/16


CAUTION
To prevent drafts from operation, seal all openings.

Recommended area for through-the-floor connection of pipe stub and shut-off valve.

Recommended area 120V outlet on rear wall and area for through-the-wall connection of pipe stub and shut-off valve.

! CAUTION

To prevent drafts from affecting burner operation, seal all openings in floor and wall.

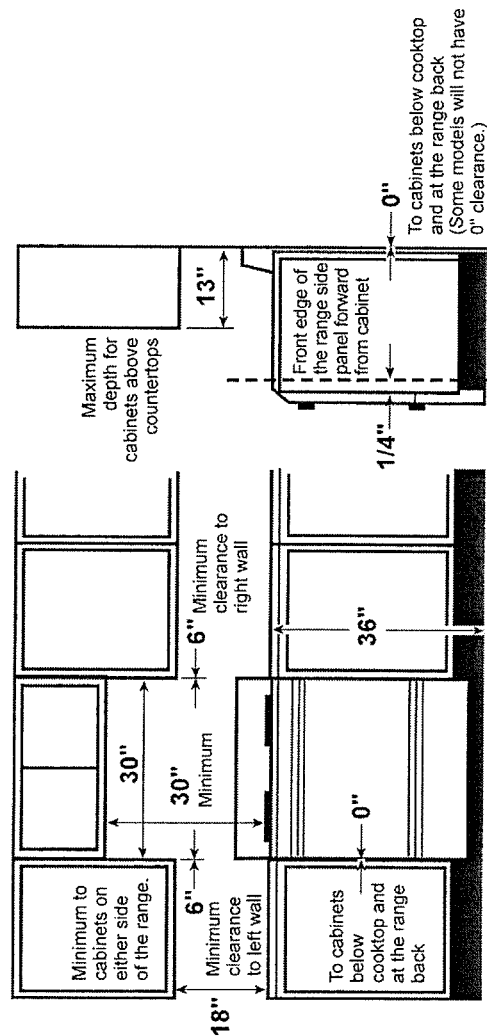

CDT865SSJ

GE Cafe™ Series Stainless Steel Interior Dishwasher with Hidden Controls



DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRICAL RATING

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	9.0
Calrod® heater watts max.....	1060

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

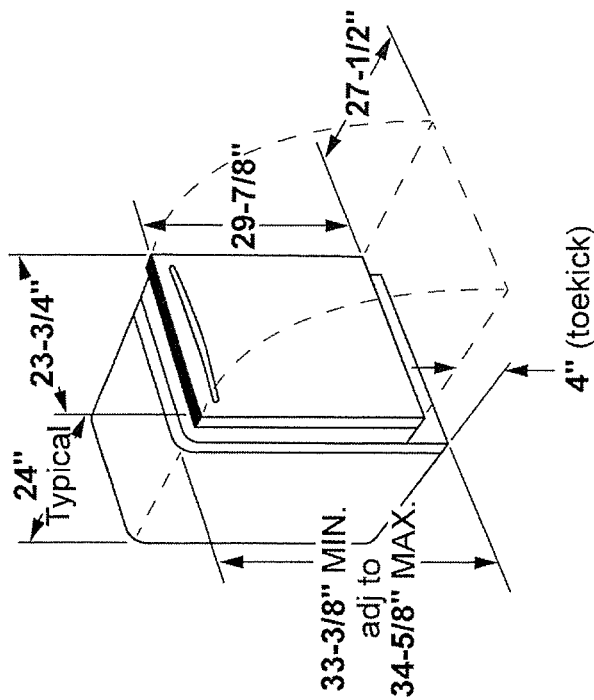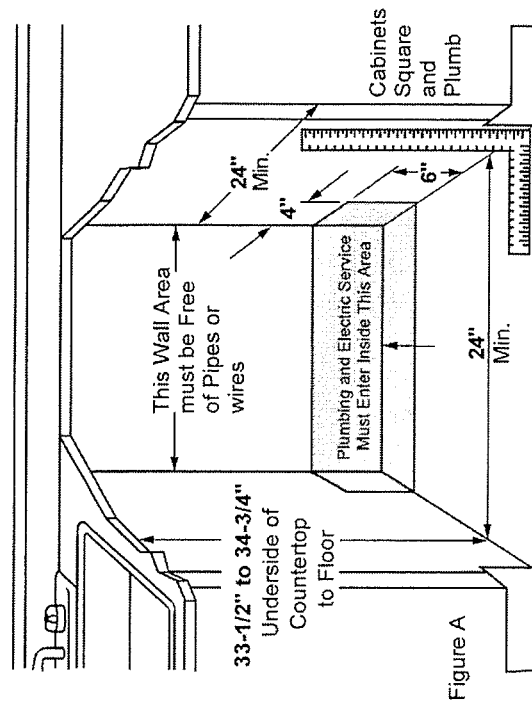

For answers to your Monogram, GE Cafe™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

Specification Revised 5/10

CDT865SSJ

GE Cafe™ Series Stainless Steel Interior Dishwasher with Hidden Controls

FEATURES AND BENEFITS

Advanced wash system with more than 140 cleaning jets - Achieve the ultimate clean from an industry-leading number of jets that deliver complete washing coverage to every corner of the dishwasher

Deep Clean silverware jets - No matter how you load your silverware basket, powerful jets blast away stuck-on food for silverware that's always spotless

Third Rack - Easily clean an entire flatware collection, knives and small utensils with an additional rack across the top of the dishwasher

Bottle Jets - Clean hard-to-reach areas inside tall items with dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

Reversing quad blade wash arm - Dishes come out impressively clean thanks to this revolutionary lower wash arm, with 25 spray jets reversing direction to hit items from every angle


Hidden vent with fan dry and hidden heater - Get dry and table-ready items every time thanks to a 1,000-watt hidden heater and fan that circulates the air to remove moisture


Easy touch adjustable upper rack with 2 Stem Safe shelves - Quickly adjust the upper rack 2 inches up or down to accommodate tall glassware and 10 ½" plates with plenty of room in the bottom rack for large platters and cookie sheets

Top control with LCD display - User-friendly controls complement the sleek stainless look

Side jets - Cascading water fills the dishwasher while hydrating soils
40 dBA - Ultra-quiet operation creates a peaceful kitchen environment even as it delivers powerful wash performance

Model CDT865SSJSS - Stainless steel

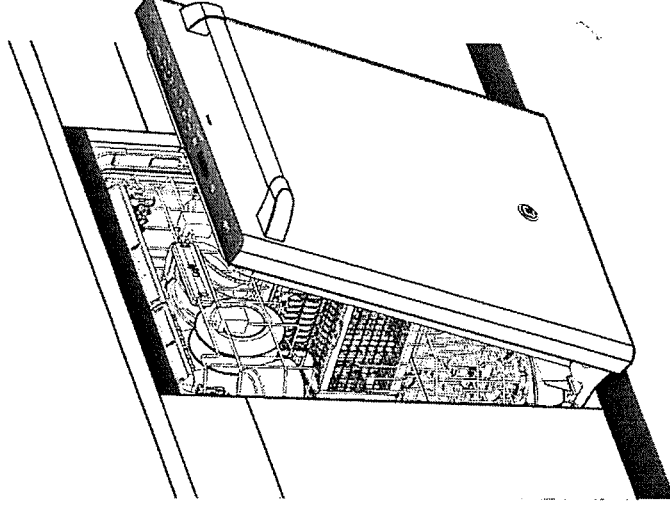



Microwave Ovens

Countertop

Countertop NN-GD693SC


Model Number	NN-GD693SC	
Type	Mid-size	
Capacity	1.1 cu.ft.	
Technology	Inverter®	
Power	Microwave	1,000 W
	Grill	1,100 W Quartz (550 W × 2)
	Grill Power Level	3 (High / Med / Low)
	Convection	NA
Combination	Microwave + Grill	yes (Simultaneous)
	Power Level	3 (High / Med / Low)
Design	Colour	Stainless Steel
	Dial / Button	Chrome Ring / Chrome Button
	Door Release	Push Open
	Finish	Half Mirror
Control Panel	Panel Design	Pop-up Dial + Buttons
Display	Type	4 Digit + Icon
	Colour	Blue
	Back Light	yes
Power Level + Other.	Power Level	10
	Delay Start	yes
	Clock	12 Hour
	Child Lock	yes

Menu	Stage Cooking	3 Stage
	Sensor	yes
	Turbo Defrost	yes
	Popcorn	yes
	Keep Warm	yes (up to 30 minutes)
	Quick Min	yes (up to 10 minutes)
	Auto Reheat	Sensor Reheat
	# of Auto Cook Categories	18
Turntable Size		340 mm
Accessory		Glass Tray / Wire Rack
Trim Kit		NNTK623S
Power Source		120 V / 60 Hz
Power Consumption	Microwave	1,310 W / 11.1 A
	Grill	1,140 W / 9.5 A
	Combination	1,310 W / 11.1 A
Cooking Power	Microwave	1,000 W
	Grill	1,100 W
Dimensions	Outside (W × D × H)	525 × 414 × 310 mm 20.7 x 16.3 x 12.3 inch
	Oven (W × D × H)	359 × 362 × 247 mm 14.1 x 14.3 x 9.7 inch
Weight	Net	13.2 kg
	Shipping	15.3 kg
NOTE		Specifications are subject to change without notice.

2. Installation Diagram

2. Schéma d'installation

2. Diagrama de instalación

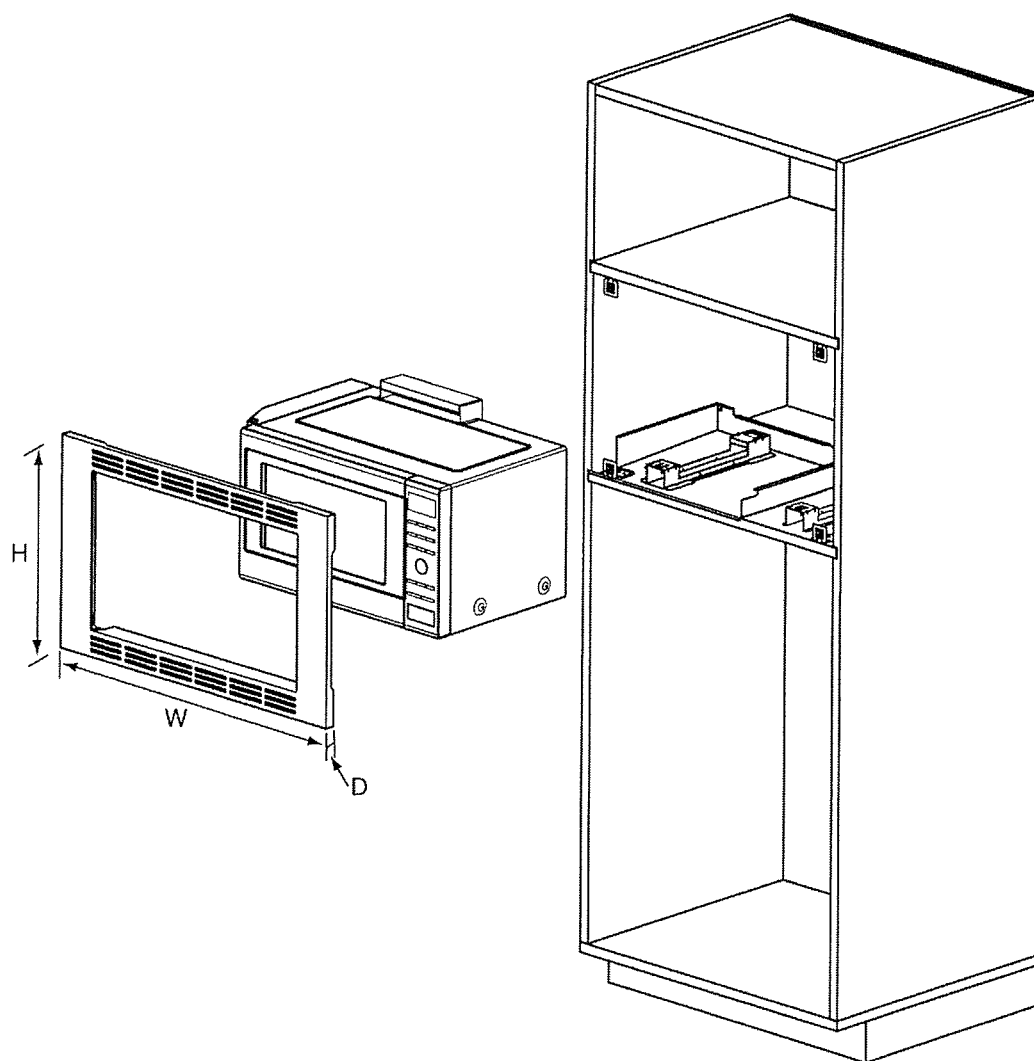

Trim Kit Dimensions	
Width	27" (684 mm)
Height	16½" (419 mm)
Depth (Thickness)	¾" (20 mm)

Dimensions du nécessaire d'encastrement	
Largeur	684 mm (27 po)
Hauteur	419 mm (16 ½ po)
Profondeur (épaisseur)	20 mm (¾ po)


Dimensiones del juego de acabados	
Ancho	27" (684 mm)
Altura	16½" (419 mm)
Profundidad (grosor)	¾" (20 mm)

3. Cabinet Diagram and Dimensions

3. Schéma de l'armoire et dimensions

3. Dimensiones y diagrama del gabinete

fig 1.

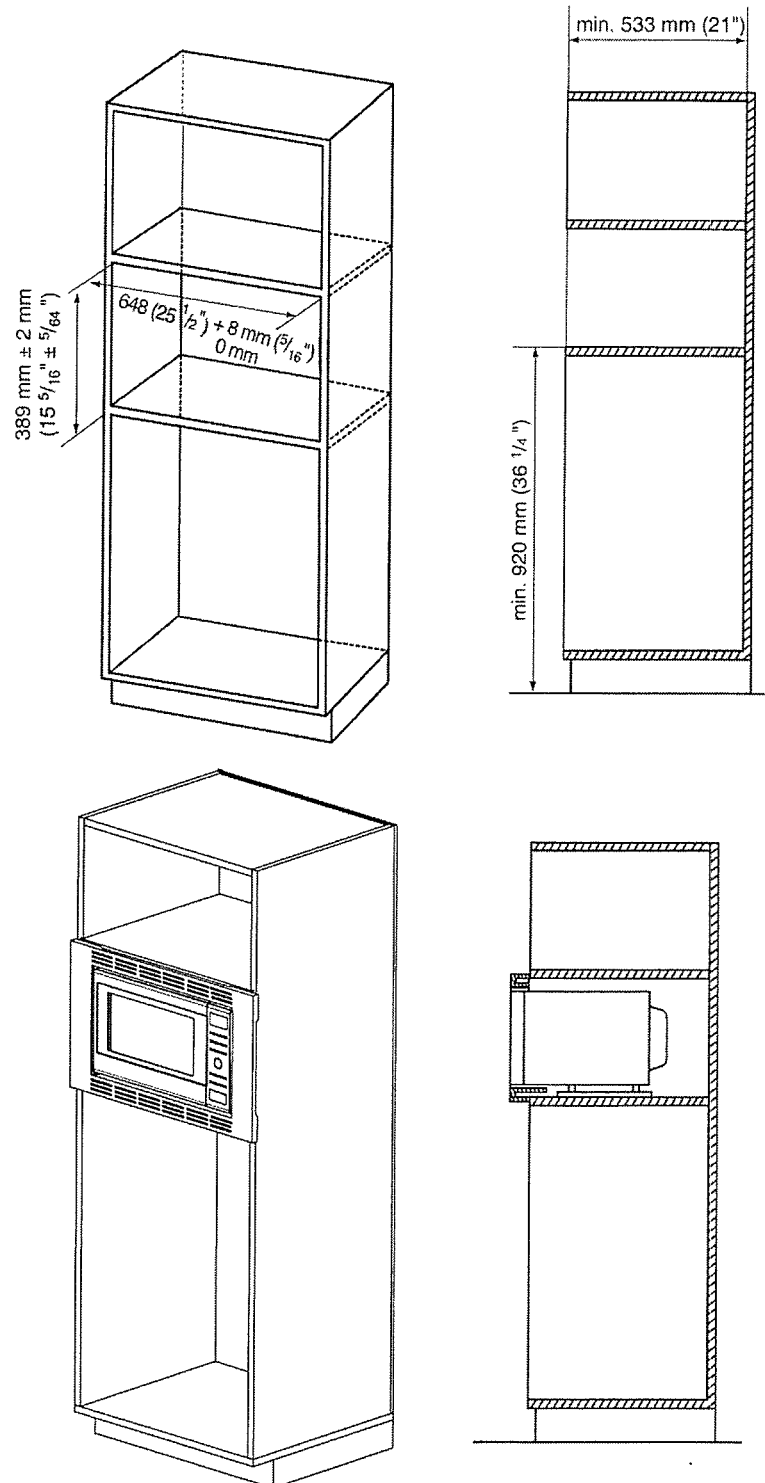




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,
WFW90HEF, WFW92HEF

Washer Dimensions:

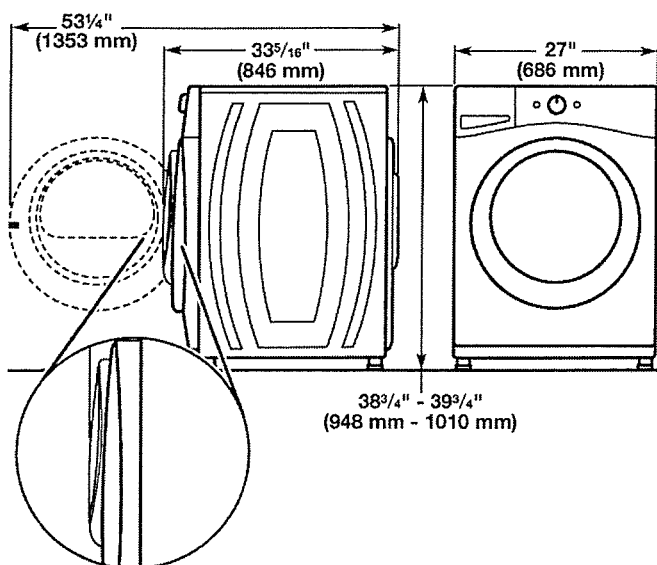

Recessed or closet installation -
stacked washer and dryer

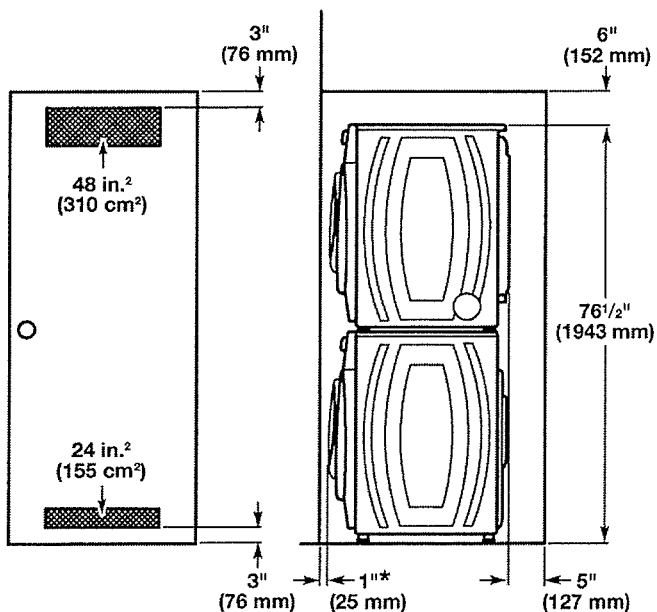


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

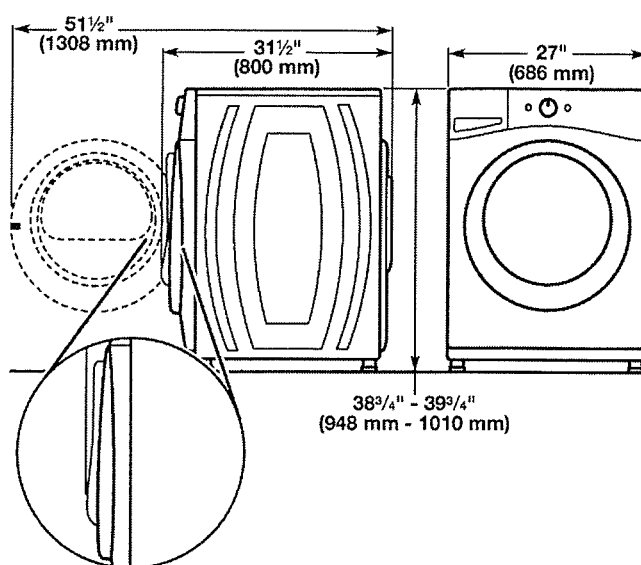


Recessed area or closet installation (washer only):

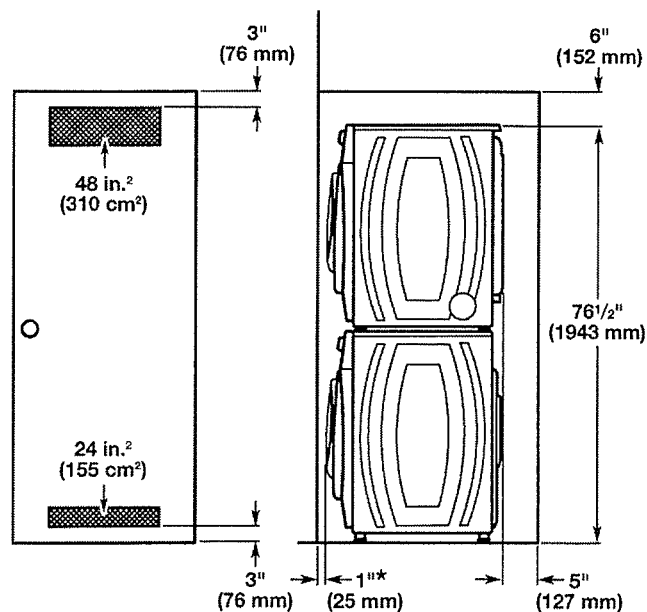


* Add spacing of 1" (25 mm) on all sides of washer.

Custom cabinet installation (washer only):

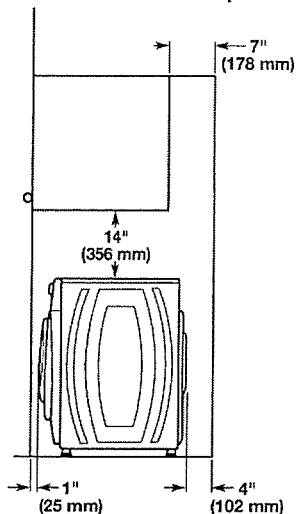

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

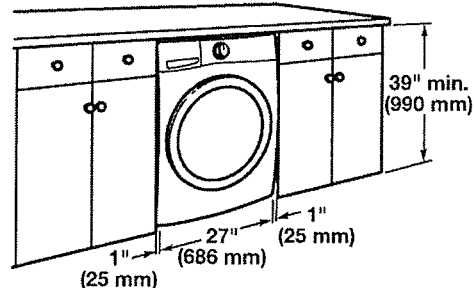

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

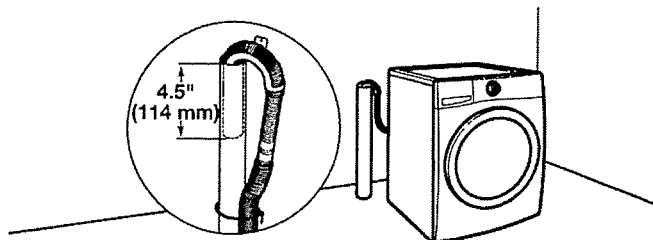


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

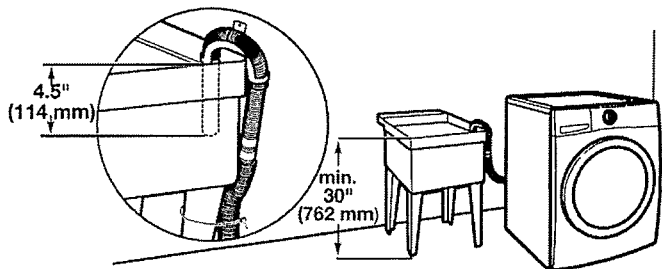


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

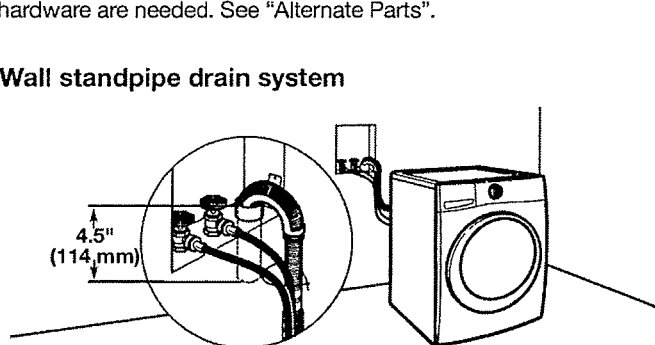

See requirements for floor standpipe drain system.

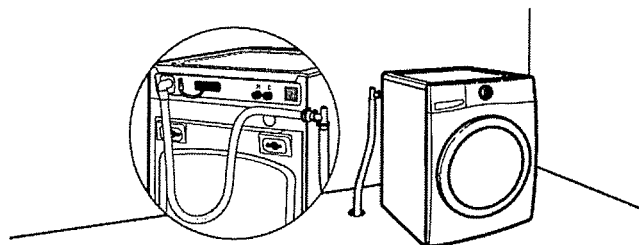

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)




Electric Dryer

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F,
WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions

Front view:

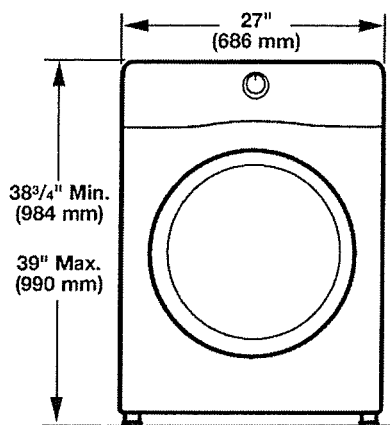


Side view:

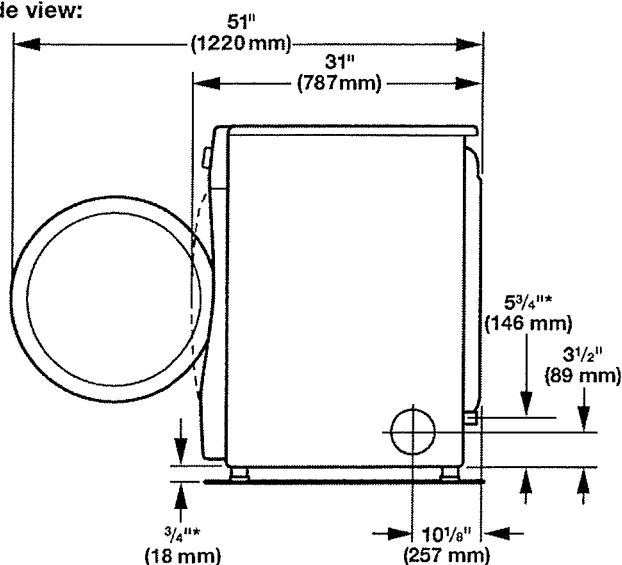

Back view:

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

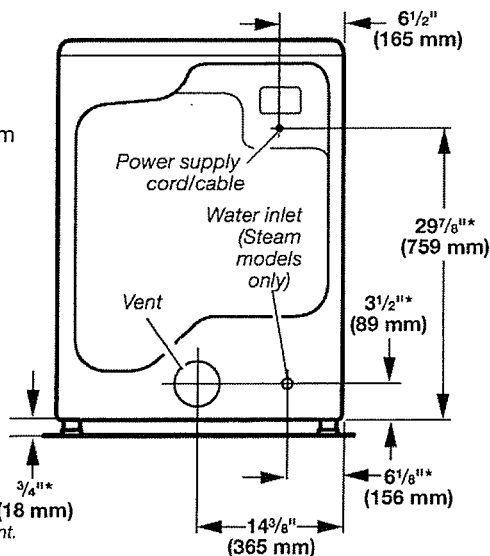


*Approx. measurement.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

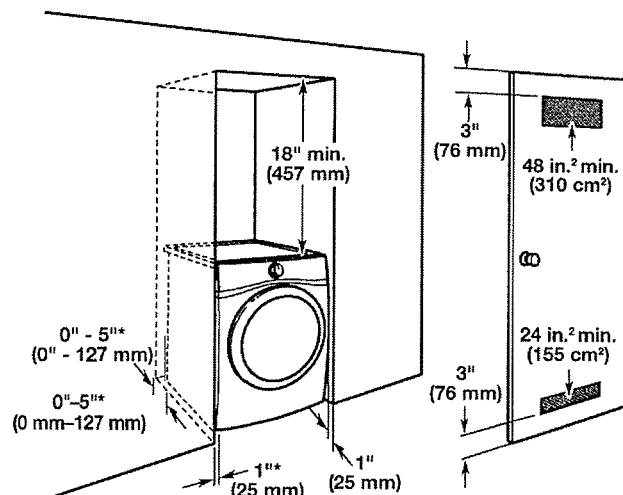


*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

**0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

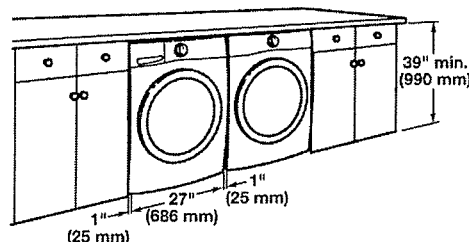

W10868947A
10/2016

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.


WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**

IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.


- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.
- Do not use plastic or metal foil vent.

Exhaust hoods:

Recommended Styles:




Louvered Hood



Box Hood

Acceptable Style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.