


FROM PLAN DATED: JAN 2018
BUILDER: BAYVIEW WELLINGTON
SITE: ALCONA SHORES
MODEL: TH-5
ELEVATION: A,B,B2
LOT:
CITY: INNISFIL
SALESMAN: M D
DESIGNER: CZ
REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7, TABLES 1 & 2.
CERAMIC TILE APPLICATION AS PER
O.B.C 9.30.6.
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 31/07/2018

1st FLOOR

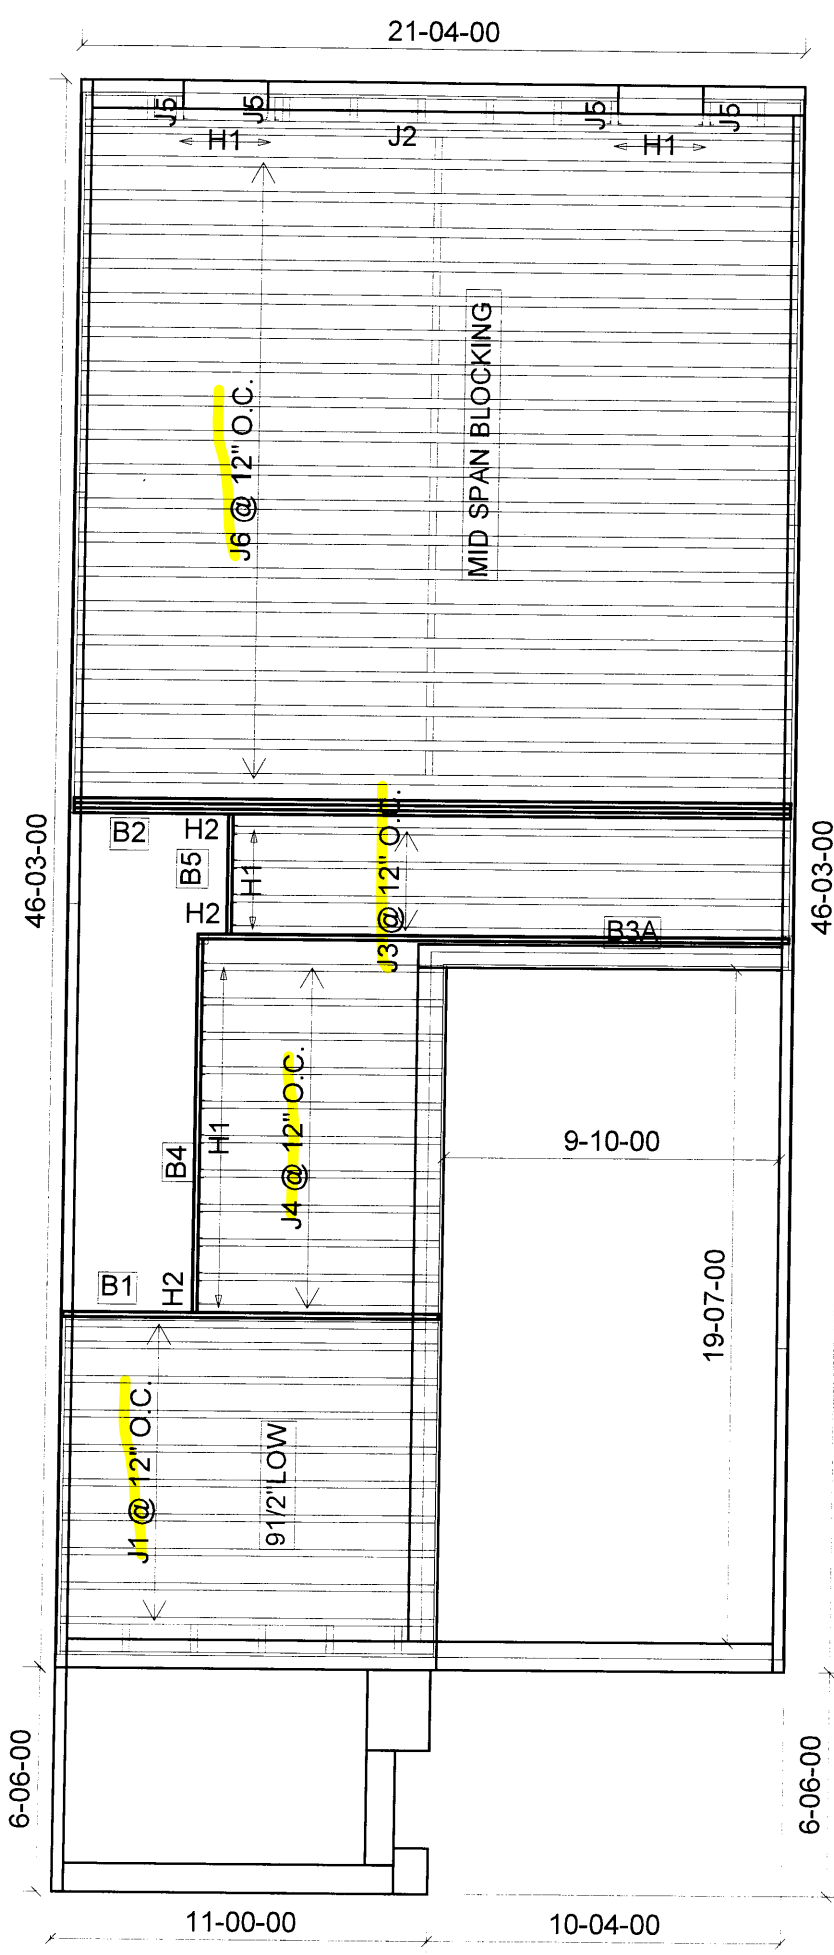


Town of Innisfil Certified Model
10/23/2018 5:45:09 PM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1	12-00-00	9 1/2" NI-40x	1	10
J2	22-00-00	11 7/8" NI-40x	2	2
J3	18-00-00	11 7/8" NI-40x	1	4
J4	8-00-00	11 7/8" NI-40x	1	11
J5	2-00-00	11 7/8" NI-40x	1	4
J6	22-00-00	11 7/8" NI-80	1	19
B2	22-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3
B3A	18-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B1	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B4	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
15	H1	IUS2.56/11.88
4	H1	IUS2.56/11.88
2	H2	HUS1.81/10
1	H2	HUS1.81/10


4440
8/16

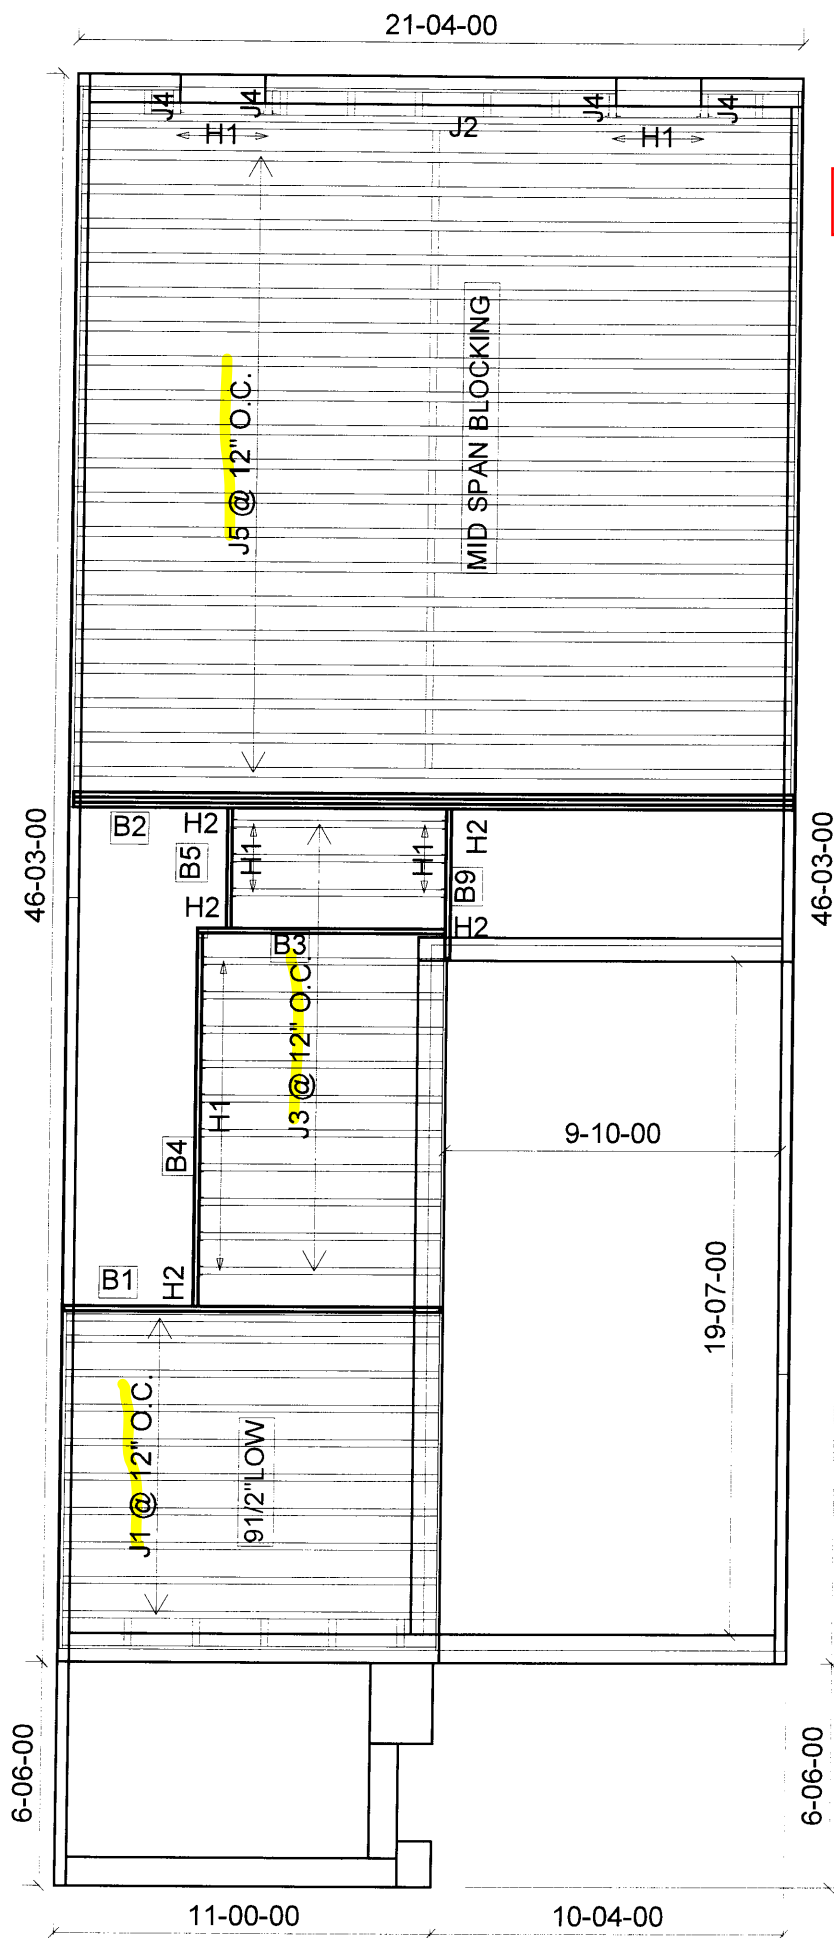

Town of Innisfil Certified Model
10/23/2018 5:45:20 PM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1	12-00-00	9 1/2" NI-40x	1	10
J2	22-00-00	11 7/8" NI-40x	2	2
J3	8-00-00	11 7/8" NI-40x	1	13
J4	2-00-00	11 7/8" NI-40x	1	4
J5	22-00-00	11 7/8" NI-80	1	19
B2	22-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3
B1	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B4	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B3	8-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B9	6-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B5	4-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
16	H1	IUS2.56/11.88
4	H1	IUS2.56/11.88
3	H2	HUS1.81/10
2	H2	HUS1.81/10



FROM PLAN DATED: JAN 2018

BUILDER: BAYVIEW WELLINGTON

SITE: ALCONA SHORES

MODEL: TH-5

ELEVATION: A,B,B2

LOT:

CITY: INNISFIL

SALESMAN: M D

DESIGNER: CZ

REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7, TABLES 1 & 2.
CERAMIC TILE APPLICATION AS PER
O.B.C 9.30.6.


LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft

SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 31/07/2018

1st FLOOR


SUNKEN

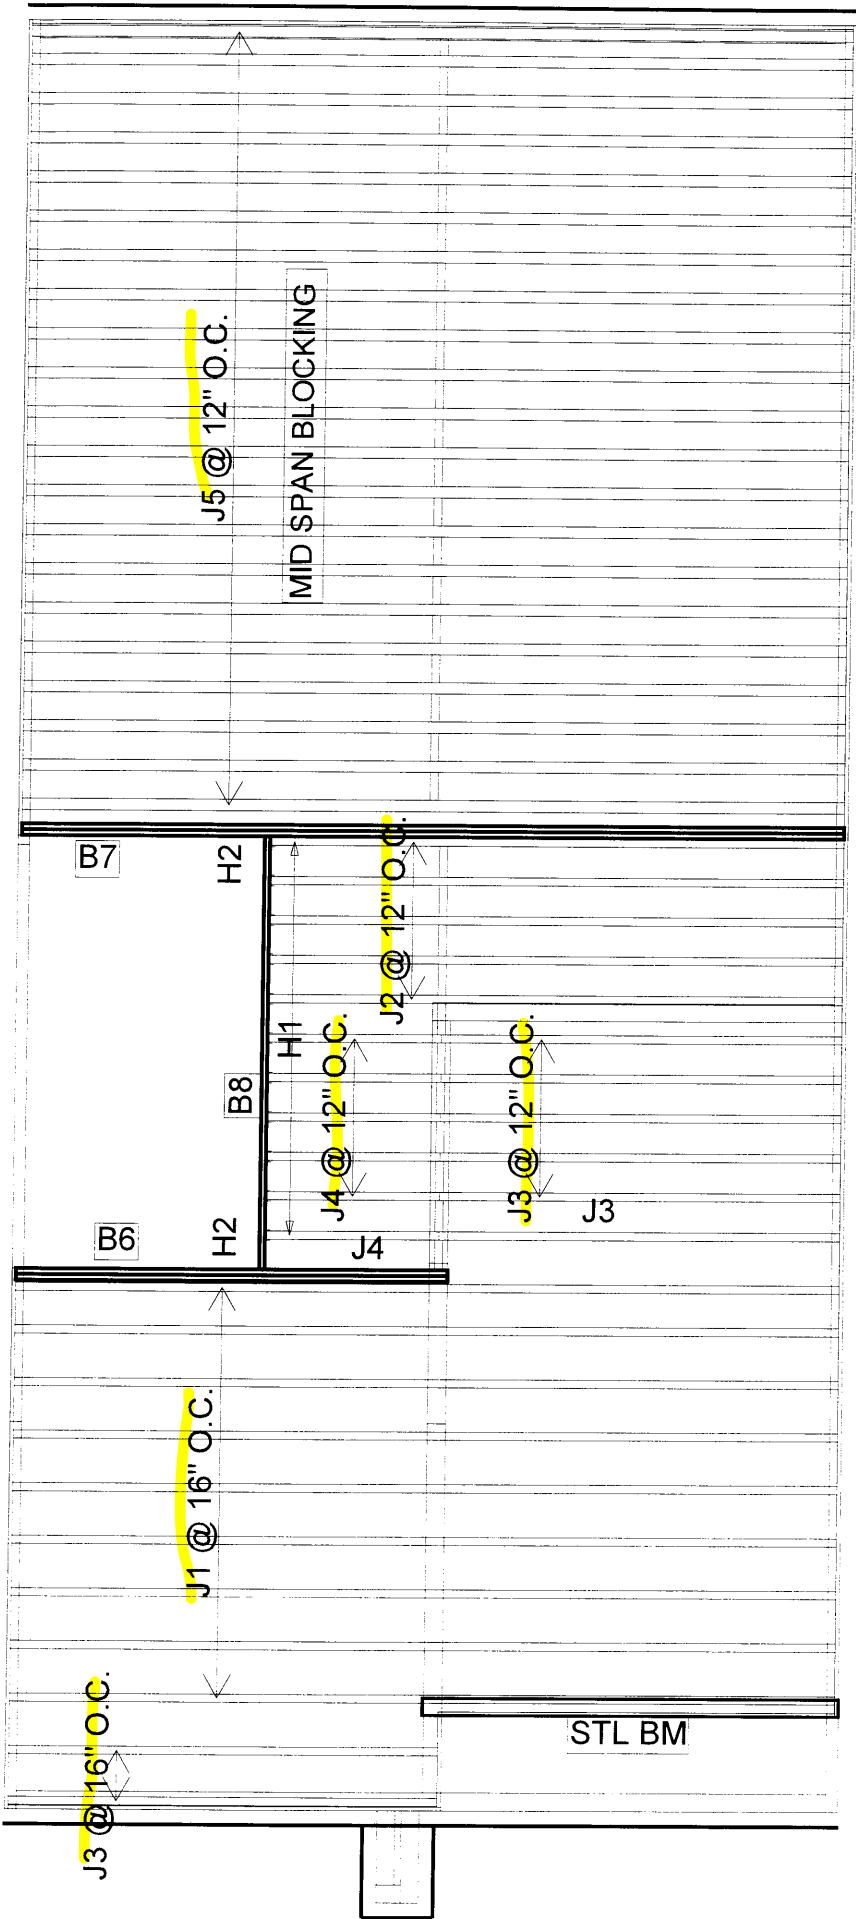

Town of Innisfil Certified Model
10/23/2018 5:45:23 PM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1	22-00-00	11 7/8" NI-40x	1	9
J2	16-00-00	11 7/8" NI-40x	1	5
J3	12-00-00	11 7/8" NI-40x	1	8
J4	6-00-00	11 7/8" NI-40x	1	6
J5	22-00-00	11 7/8" NI-80	1	21
B7	22-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B8	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B6	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2

Connector Summary		
Qty	Manuf	Product
11	H1	IUS2.56/11.88
2	H2	HUS1.81/10



FROM PLAN DATED: JAN 2018
BUILDER: BAYVIEW WELLINGTON
SITE: ALCONA SHORES
MODEL: TH-5
ELEVATION: A,B,B2
LOT:
CITY: INNISFIL
SALESMAN: M D
DESIGNER: CZ
REVISION:

NOTES:
REFER TO THE NORDIC
INSTALLATION GUIDE FOR PROPER
STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2
S.P.F. REQ'D UNDER INTERIOR
UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D
UNDER CONCENTRATED LOADS. SEE
FIGURE 1. CANTILEVERED JOISTS
INCLUDING CANT' OVER BRICK REQ.
I-JOIST BLOCKING ALONG BEARING
AND RIMBOARD CLOSURE AT ENDS.
SEE FIGURE 7 TABLES 4 & 5 FOR
REINFORCEMENT REQUIREMENTS.
FOR HOLES INCLUDING DUCT
CHASE AND FIELD CUT OPENINGS
SEE FIGURE 7 TABLES 1 & 2 OF THE
INSTALLATION GUIDE. CERAMIC TILE
APPLICATION AS PER O.B.C. 9.30.6
LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft
TILED AREAS: 20 lb/ft
SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 31/07/2018

2nd FLOOR

NORDIC STRUCTURES

COMPANY
TAMARACK LUMBER
3269 NORTH SERVICE ROAD
BURLINGTON, ON
by CZ
May 10, 2018 09:51


PROJECT
J5-2ND FL.wwb

Design Check Calculation Sheet Nordic Sizer – Canada 7.0


Loads:

Load	Type	Distribution	Pat-tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs), Bearing Resistances (lbs) and Bearing Lengths (in) :

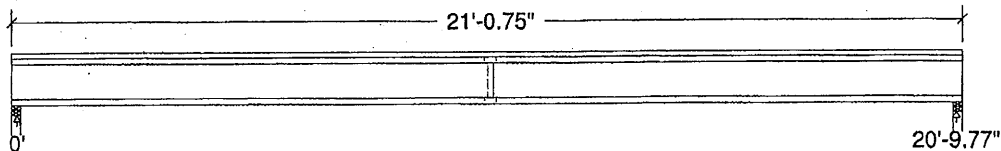

Unfactored:			
Dead	208		208
Live	416		416
Factored:			
Total	885		885
Bearing:			
Resistance			
Joist	2186		2186
Support	5559		5559
Des ratio			
Joist	0.40		0.40
Support	0.16		0.16
Load case	#2		#2
Length	2-3/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	1.00		1.00
fcp sup	769		769
Kzcp sup	1.09		1.09



Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

Nordic 11-7/8" NI-80 Floor joist @ 12" o.c.

Supports: All - Lumber Wall, No.1/No.2

Total length: 21'-0.75"; Clear span: 20'-9.77"; 3/4" nailed and glued OSB sheathing with 1 row of blocking and 1/2" gypsum ceiling

This section PASSES the design code check.

DWG NO. TAM 4332-86
STRUCTURAL
COMPONENT ONLY

T.18071531

Limit States Design using CSA-O86-09 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 885	Vr = 2336	lbs	Vf/Vr = 0.38
Moment(+)	Mf = 4603	Mr = 11609	lbs-ft	Mf/Mr = 0.40
Perm. Defl'n	0.15 = < L/999	0.69 = L/360	in	0.22
Live Defl'n	0.30 = L/822	0.52 = L/480	in	0.58
Total Defl'n	0.46 = L/548	1.04 = L/240	in	0.44
Bare Defl'n	0.34 = L/729	0.69 = L/360	in	0.49
Vibration	Lmax = 20'-9.8	Lv = 24'-3.6	ft	0.86
Defl'n	= 0.022	= 0.031	in	0.70

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	11609	1.00	1.00	-	1.000	-	-	-	#2
EI	547.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+): LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L


Load Types: D=dead W=wind S=snow H=earth, groundwater E=earthquake
L=live (use, occupancy) Ls=live (storage, equipment)

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:Deflection: E_{ieff} = 625e06 lb-in² K= 6.18e06 lbs

"Live" deflection = Deflection from all non-dead loads (live, wind)

**Design Notes:**

1. WoodWorks analysis and design are in accordance with the 2010 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-09 Engineering Design in Wood standard, which includes Update No.1
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.

CONFORMS TO OBC 2012

DWG NO. TAM 4332-84
STRUCTURAL
COMPONENT ONLY

T-18071531(2)

NORDIC STRUCTURES

COMPANY
TAMARACK LUMBER
3269 NORTH SERVICE ROAD
BURLINGTON, ON
by CZ
Apr. 26, 2018 16:32


PROJECT
J6-1ST FL.wwb

Design Check Calculation Sheet Nordic Sizer – Canada 7.0

Loads:

Load	Type	Distribution	Pat- tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs), Bearing Resistances (lbs) and Bearing Lengths (in) :

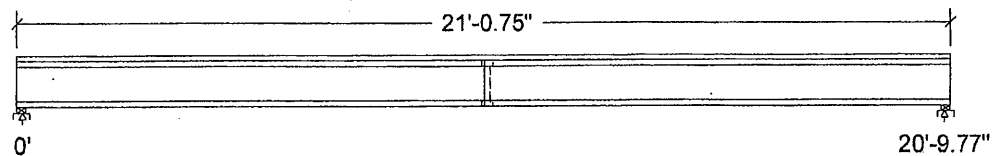

Unfactored:			
Dead	208		208
Live	416		416
Factored:			
Total	885		885
Bearing:			
Resistance			
Joist	2186		2186
Support	5559		5559
Des ratio			
Joist	0.40		0.40
Support	0.16		0.16
Load case	#2		#2
Length	2-3/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	1.00		1.00
fcp sup	769		769
Kzcp sup	1.09		1.09



Nordic 11-7/8" NI-80 Floor joist @ 12" o.c.

Supports: All - Lumber Sill plate, No.1/No.2

Total length: 21'-0.75"; Clear span: 20'-7.99"; 3/4" nailed and glued OSB sheathing with 1 row of blocking.

This section PASSES the design code check.

DWG NO. TAM 4333-18H
STRUCTURAL
COMPONENT ONLY

T-18071532

Limit States Design using CSA-O86-09 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 885	Vr = 2336	lbs	Vf/Vr = 0.38
Moment (+)	Mf = 4603	Mr = 11609	lbs-ft	Mf/Mr = 0.40
Perm. Defl'n	0.15 = < L/999	0.69 = L/360	in	0.22
Live Defl'n	0.30 = L/822	0.52 = L/480	in	0.58
Total Defl'n	0.46 = L/548	1.04 = L/240	in	0.44
Bare Defl'n	0.34 = L/729	0.69 = L/360	in	0.49
Vibration	Lmax = 20'-9.8	Lv = 22'-6.2	ft	0.92
Defl'n	= 0.026	= 0.031	in	0.83

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	11609	1.00	1.00	-	1.000	-	-	-	#2
EI	547.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L


Load Types: D=dead W=wind S=snow H=earth, groundwater E=earthquake
L=live(use, occupancy) Ls=live(storage, equipment) f=fire

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:Deflection: E_{ieff} = 625e06 lb-in² K= 6.18e06 lbs

"Live" deflection = Deflection from all non-dead loads (live, wind, snow...)

**Design Notes:**

1. WoodWorks analysis and design are in accordance with the 2010 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-09 Engineering Design in Wood standard, which includes Update No. 1
2. Please verify that the default deflection limits are appropriate for your application. **CONFORMS TO OBC 2012**
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.

DWG NO. TAM 4333
STRUCTURAL
COMPONENT ONLY

T.18071532(2)



Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLOOR FRAMING\Flush Beams\B1(i474)

Dry | 1 span | No cant.

May 10, 2018 10:22:17

BC CALC® Design Report

Build 6215

Job name:

File name: TH-5.mmdl

Address:

Description: 1ST FLOOR FRAMING\Flush Beams\B1(i474)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer: CZ

Code reports:

CCMC 12472-R

Company:

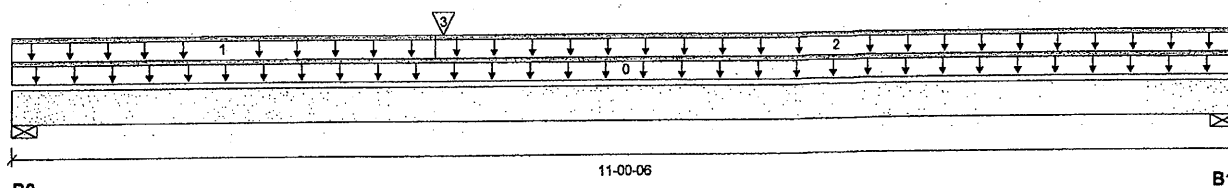

Total Horizontal Product Length = 11-00-06

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	511 / 0	501 / 0		
B1, 4-3/8"	347 / 0	255 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-00-06		6			00-00-00
1	WALL	Unf. Lin. (lb/ft)	L	00-00-00	03-09-08		60			n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	03-09-08	11-00-06	20	10			n/a
3	B4(i475)	Conc. Pt. (lbs)	L	03-10-06	03-10-06	710	388			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	4,450 ft-lbs	13,592 ft-lbs	32.7 %	1	03-10-06
End Shear	1,287 lbs	7,232 lbs	17.8 %	1	01-03-08
Total Load Deflection	L/999 (0.107")	n/a	n/a	4	05-01-10
Live Load Deflection	L/999 (0.062")	n/a	n/a	5	05-01-10
Max Defl.	0.107"	n/a	n/a	4	05-01-10
Span / Depth	10.6				


Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1,393 lbs	42.6 %	18.6 %	Unspecified
B1	Wall/Plate 4-3/8" x 1-3/4"	838 lbs	20.5 %	9.0 %	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Calculations assume unbraced length of Top: 03-06-00, Bottom: 03-06-00.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012



Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).
 Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods.
 Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

DWG NO. TAM 4334184
 STRUCTURAL
 COMPONENT ONLY

T.18071533



Boise Cascade



Triple 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLOOR FRAMING\Flush Beams\B2(i631)

BC CALC® Member Report

Dry | 1 span | No cant.

July 31, 2018 14:02:40

Build 6475

Job name:

File name: TH-5.mmdl

Address:

Description: 1ST FLOOR FRAMING\Flush Beams\B2(i631)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer: CZ

Code reports:

CCMC 12472-R

Company:

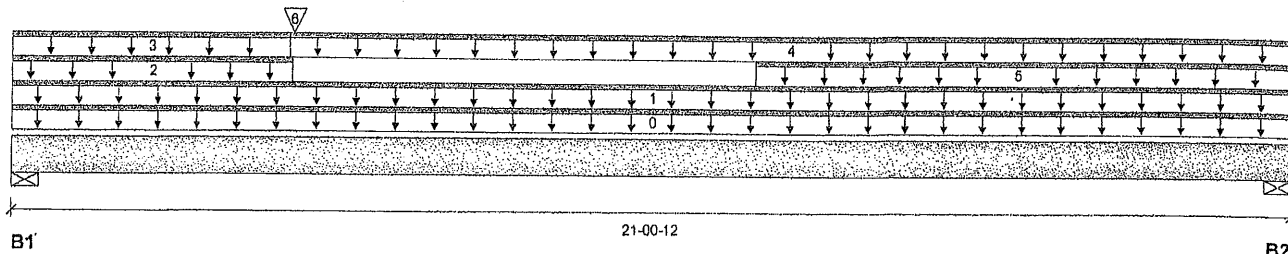

Total Horizontal Product Length = 21'-0"

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B1, 2-3/8"	1,041 / 0	1,075 / 0		
B2, 2-3/8"	517 / 0	901 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	21-00-12	Top	18	0.65	1.00	1.15	00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	21-00-12	Top	16	8			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	04-06-13	Top		60			n/a
3	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	04-06-06	Top	9	4			n/a
4	FC1 Floor Material	Unf. Lin. (lb/ft)	L	04-06-06	21-00-12	Top	14	7			n/a
5	WALL	Unf. Lin. (lb/ft)	L	12-02-06	21-00-12	Top		60			n/a
6	B5(i633)	Conc. Pt. (lbs)	L	04-07-04	04-07-04	Top	948	485			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	11,571 ft-lbs	55,212 ft-lbs	21.0 %	1	08-08-14
End Shear	2,725 lbs	21,696 lbs	12.6 %	1	01-02-04
Total Load Deflection	L/550 (0.454")	n/a	43.6 %	4	10-00-12
Live Load Deflection	L/1,173 (0.213")	n/a	30.7 %	5	09-09-14
Max Defl.	0.454"	n/a	n/a	4	10-00-12
Span / Depth	21.0				



Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 2-3/8" x 5-1/4"	2,905 lbs	43.6 %	19.1 %	Unspecified
B2	Wall/Plate 2-3/8" x 5-1/4"	1,262 lbs	29.2 %	12.8 %	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

CONFORMS TO OBC 2012

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Nailing schedule applies to both sides of the member.

pe 1/2
 DWG NO. YAM 4940-18 H
 STRUCTURAL
 COMPONENT ONLY

T-1808172



Boise Cascade



Triple 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLOOR FRAMING\Flush Beams\B2(i631)

Dry | 1 span | No cant.

July 31, 2018 14:02:40

BC CALC® Member Report

Build 6475

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R


File name: TH-5.mmdl

Description: 1ST FLOOR FRAMING\Flush Beams\B2(i631)

Specifier:

Designer: CZ

Company:

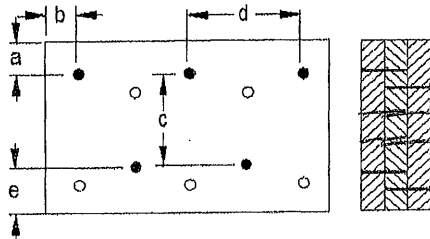Connection Diagram: Full Length of Member

4 rows

a minimum = 0"
b minimum = 3"c = 6-7/8"
d = 12"
e minimum = 2"

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Nailing schedule applies to both sides of the member.

Connectors are: Nails

3-1/2" ARDOX SPIRAL**Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

DWGN, TAM 4940-18k
STRUCTURAL
COMPONENT ONLY

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

T-1808173



Boise Cascade

**Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLOOR FRAMING\Flush Beams\B3(i859)**

Dry | 1 span | No cant.

July 31, 2018 14:02:10

BC CALC® Member Report

Build 6475

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R


File name: TH-5-SUNKEN.mmdl

Description: 1ST FLOOR FRAMING\Flush Beams\B3(i859)

Specifier:

Designer: CZ

Company:

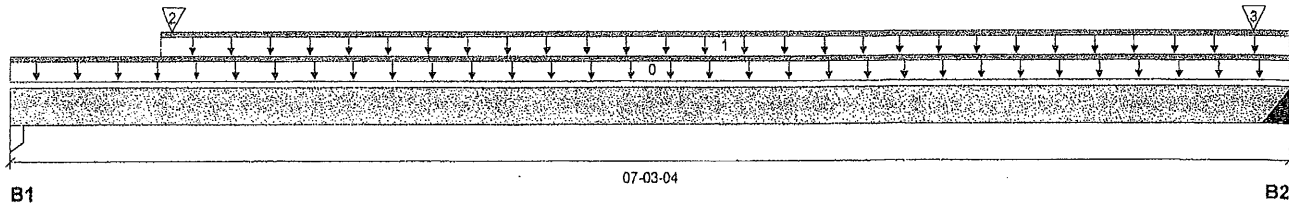**Reaction Summary (Down / Uplift) (lbs)**


Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	646 / 0	355 / 0		
B2, 2"	258 / 0	160 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-03-04	Top	6				00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-10-00	07-03-04	Top	40	20			n/a
2	B5(i831)	Conc. Pt. (lbs)	L	00-10-14	00-10-14	Top	587	304			n/a
3	FC1 Floor Material	Conc. Pt. (lbs)	L	07-00-14	07-00-14	Top	60	38			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1,057 ft-lbs	17,696 ft-lbs	6.0 %	1	02-05-00
End Shear	926 lbs	7,232 lbs	12.8 %	1	01-03-06
Total Load Deflection	L/999 (0.013")	n/a	n/a	4	03-05-11
Live Load Deflection	L/999 (0.008")	n/a	n/a	5	03-05-11
Max Defl.	0.013"	n/a	n/a	4	03-05-11
Span / Depth	7.0				

**Bearing Supports**

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 3-1/2" x 1-3/4"	1,413 lbs	28.4 %	18.9 %	Unspecified
B2	Hanger 2" x 1-3/4"	587 lbs	n/a	13.7 %	HUS1.81/10

Cautions

Header for the hanger HUS1.81/10 at B2 is a Single 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF. Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Calculations assume member is fully braced.
 Hanger Manufacturer: Unassigned
 Resistance Factor phi has been applied to all presented results per CSA O86. **CONFORMS TO OBC 2012**
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 9


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

DWG NO. YAM 4941-18
 STRUCTURAL
 COMPONENT ONLY

7-1808174

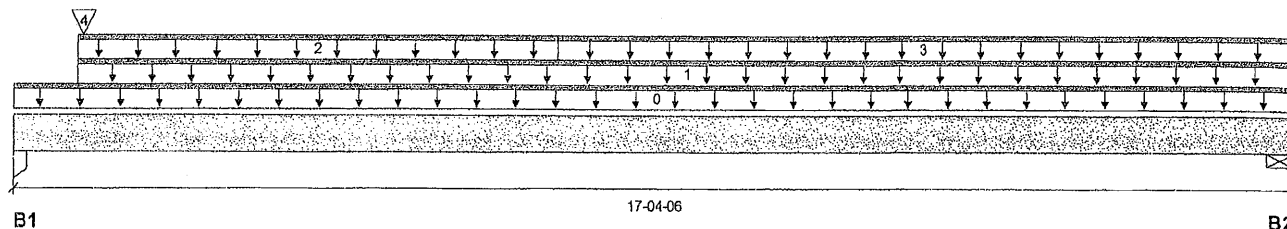

Total Horizontal Product Length = 17-04-06

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	1,132 / 0	628 / 0		
B2, 2-3/8"	224 / 0	164 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	17-04-06	Top	1.00	0.65	1.00	1.15	00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-10-00	17-04-06	Top	4	2			n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-10-00	07-04-00	Top	18	9			n/a
3	FC1 Floor Material	Unf. Lin. (lb/ft)	L	07-04-00	17-04-06	Top	17	8			n/a
4	B5(i633)	Conc. Pt. (lbs)	L	00-10-14	00-10-14	Top	1,000	510			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	2,715 ft-lbs	17,696 ft-lbs	15.3 %	1	07-01-11
End Shear	1,664 lbs	7,232 lbs	23.0 %	1	01-03-06
Total Load Deflection	L/959 (0.213")	n/a	25.0 %	4	08-03-10
Live Load Deflection	L/1,617 (0.126")	n/a	22.3 %	5	08-03-10
Max Defl.	0.213"	n/a	n/a	4	08-03-10
Span / Depth	17.2				


Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 3-1/2" x 1-3/4"	2,484 lbs	49.9 %	33.2 %	Unspecified
B2	Wall/Plate 2-3/8" x 1-3/4"	542 lbs	24.4 %	10.7 %	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. **CONFORMS TO OBC 2012**

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC!®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DW000.YAM 4942-18H
STRUCTURAL
COMPONENT ONLY

T-1808175



Boise Cascade

**Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLOOR FRAMING\Flush Beams\B4(i440)**

Dry | 1 span | No cant.

April 26, 2018 15:45:52

BC CALC® Design Report

Build 6215

Job name:

File name: TH-5.mmdl

Address:

Description: 1ST FLOOR FRAMING\Flush Beams\B4(i440)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

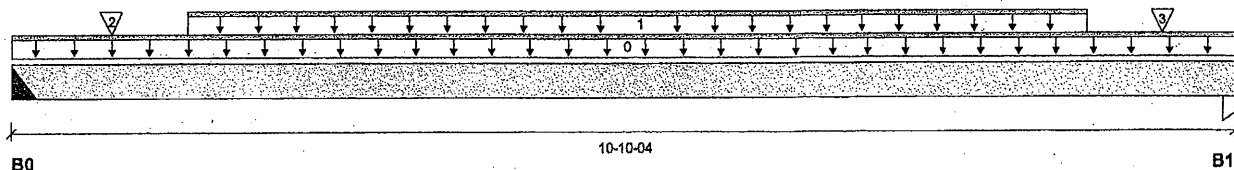

Total Horizontal Product Length = 10-10-04

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 2"	719 / 0	393 / 0		
B1, 1-3/4"	729 / 0	398 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-10-04		6			00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	01-06-08	09-06-08	142	71			n/a
2	J4(i433)	Conc. Pt. (lbs)	L	00-10-08	00-10-08	167	83			n/a
3	J4(i428)	Conc. Pt. (lbs)	L	10-02-08	10-02-08	147	73			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	4,371 ft-lbs	17,696 ft-lbs	24.7 %	1	04-10-08
End Shear	1,460 lbs	7,232 lbs	20.2 %	1	01-01-14
Total Load Deflection	L/986 (0.13")	n/a	24.3 %	4	05-04-08
Live Load Deflection	L/999 (0.084")	n/a	n/a	5	05-04-08
Max Defl.	0.13"	n/a	n/a	4	05-04-08
Span / Depth	10.8				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Hanger 2" x 1-3/4"	1,569 lbs	n/a	36.7 %	HUS1.81/10
B1	Column 1-3/4" x 1-3/4"	1,592 lbs	64.0 %	42.6 %	Unspecified

Cautions

Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012**Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®, DWG NO. TAM 4337-184
STRUCTURAL COMPONENT ONLY

T-18671536



Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

BC CALC® Design Report
Build 6215


1ST FLOOR FRAMING\Flush Beams\B5(i487)

Dry | 1 span | No cant.

May 10, 2018 10:26:02

Job name:
Address:
City, Province, Postal Code: INNISFIL
Customer:
Code reports: CCMC 12472-R

File name: TH-5-SUNKEN.mmdl
Description: 1ST FLOOR FRAMING\Flush Beams\B5(i487)
Specifier:
Designer: CZ
Company:

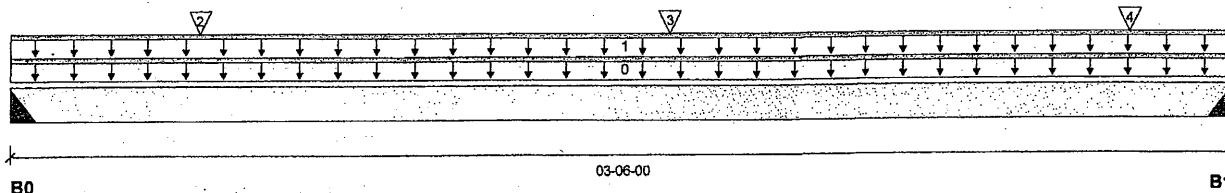

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 2"	619 / 0	320 / 0		
B1, 2"	642 / 0	331 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-06-00	6				00-00-00
1	STAIR	Unf. Lin. (lb/ft)	L	00-00-00	03-06-00	240	120			n/a
2	J3(i454)	Conc. Pt. (lbs)	L	00-06-08	00-06-08	128	64			n/a
3	J3(i419)	Conc. Pt. (lbs)	L	01-10-08	01-10-08	176	88			n/a
4	J3(i415)	Conc. Pt. (lbs)	L	03-02-08	03-02-08	117	58			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1,083 ft-lbs	17,696 ft-lbs	6.1 %	1	01-10-08
End Shear	561 lbs	7,232 lbs	7.8 %	1	01-01-14
Total Load Deflection	L/999 (0.003")	n/a	n/a	4	01-08-14
Live Load Deflection	L/999 (0.002")	n/a	n/a	5	01-08-14
Max Defl.	0.003"	n/a	n/a	4	01-08-14
Span / Depth	3.3				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Hanger 2" x 1-3/4"	1,328 lbs	n/a	31.1 %	HUS1.81/10
B1	Hanger 2" x 1-3/4"	1,377 lbs	n/a	32.2 %	HUS1.81/10


Cautions

Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
Design meets Code minimum (L/360) Live load deflection criteria.
Calculations assume member is fully braced.
Hanger Manufacturer: Unassigned
Resistance Factor phi has been applied to all presented results per CSA O86.
BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.
Design based on Dry Service Condition.
Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).
Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods.
Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DWG NO. TAM 4338-18X
STRUCTURAL
COMPONENT ONLY

T-18071537



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLOOR FRAMING\Flush Beams\B6(i477)

BC CALC® Design Report

Dry | 1 span | No cant.

May 10, 2018 10:30:09

Build 6215

Job name:

File name: TH-5.mmdl

Address:

Description: 2ND FLOOR FRAMING\Flush Beams\B6(i477)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer: CZ

Code reports:

CCMC 12472-R

Company:

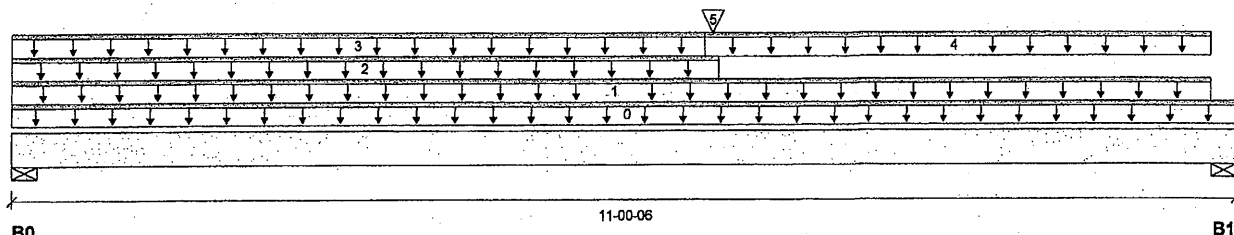

Total Horizontal Product Length = 11-00-06

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 2-3/8"	396 / 0	546 / 0		
B1, 5-1/2"	565 / 0	479 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-00-06		12			00-00-00
1	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	10-09-10	6	3			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	06-03-14		60			n/a
3	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	06-02-06	6	3			n/a
4	FC3 Floor Material	Unf. Lin. (lb/ft)	L	06-02-06	10-09-10	20	10			n/a
5	B8(i480)	Conc. Pt. (lbs)	L	06-03-04	06-03-04	764	414			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	5,563 ft-lbs	35,392 ft-lbs	15.7 %	1	06-03-04
End Shear	1,356 lbs	14,464 lbs	9.4 %	1	09-07-00
Total Load Deflection	L/999 (0.07")	n/a	n/a	4	05-06-14
Live Load Deflection	L/999 (0.036")	n/a	n/a	5	05-06-14
Max Defl.	0.07"	n/a	n/a	4	05-06-14
Span / Depth	10.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 2-3/8" x 3-1/2"	1,277 lbs	28.8 %	12.6 %	Unspecified
B1	Wall/Plate 5-1/2" x 3-1/2"	1,446 lbs	14.1 %	6.2 %	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

CONFORMS TO OBC 2012

Importance Factor: Normal Part code: Part 9

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.



DWG NO. TAM 4339-18 lt
STRUCTURAL
COMPONENT ONLY

T-18071538



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED**

BC CALC® Design Report

Build 6215

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R

2ND FLOOR FRAMING\Flush Beams\B6(i477)

Dry | 1 span | No cant.

May 10, 2018 10:30:09


File name: TH-5.mmdl

Description: 2ND FLOOR FRAMING\Flush Beams\B6(i477)

Specifier:

Designer: CZ

Company:

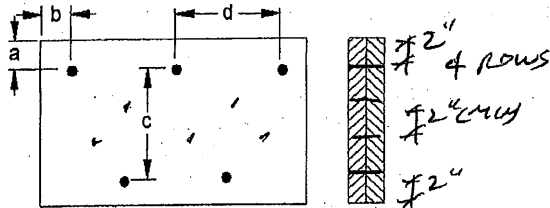Connection Diagram

a minimum = 2"

b minimum = 3"

c = 7-7/8"

d = 4"

Calculated Side Load = 150.8 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Connectors are:

Nails

3-1/2" ARDOX SPIRAL**Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.

DWG NO. TAM 4339-18
STRUCTURAL
COMPONENT ONLY

T. 18071538(2)



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****2ND FLOOR FRAMING\Flush Beams\B7(i362)**

Dry | 1 span | No cant.

April 26, 2018 15:45:52

BC CALC® Design Report

Build 6215

Job name:

File name: TH-5.mmdl

Address:

Description: 2ND FLOOR FRAMING\Flush Beams\B7(i362)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

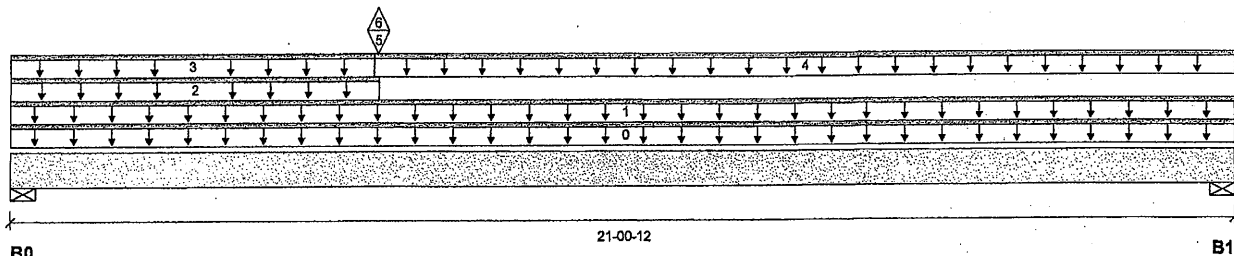

Total Horizontal Product Length = 21-00-12

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 2-3/8"	1,391 / 3	1,168 / 0		
B1, 2-3/8"	756 / 1	569 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	21-00-12	12				00-00-00
1	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	21-00-12	13	6			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	06-03-07		60			n/a
3	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	06-02-06	6	3			n/a
4	FC3 Floor Material	Unf. Lin. (lb/ft)	L	06-02-06	21-00-12	14	7			n/a
5	B8(i405)	Conc. Pt. (lbs)	L	06-03-04	06-03-04	1,635	850			n/a
6	B8(i405)	Conc. Pt. (lbs)	L	06-03-04	06-03-04	-4				n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	19,208 ft-lbs	35,392 ft-lbs	54.3 %	1	06-03-04
End Shear	3,392 lbs	14,464 lbs	23.5 %	1	01-02-04
Total Load Deflection	L/272 (0.916")	n/a	88.1 %	6	09-08-01
Live Load Deflection	L/465 (0.536")	n/a	77.4 %	8	09-08-01
Max Defl.	0.916"	n/a	n/a	6	09-08-01
Span / Depth	21.0				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 2-3/8" x 3-1/2"	3,547 lbs	79.9 %	35.0 %	Unspecified
B1	Wall/Plate 2-3/8" x 3-1/2"	1,846 lbs	41.6 %	18.2 %	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.


 DWG NO. TAM 4340-18lt
 STRUCTURAL
 COMPONENT ONLY

T-18071539



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****2ND FLOOR FRAMING\Flush Beams\B7(i362)**

BC CALC® Design Report

Dry | 1 span | No cant.

April 26, 2018 15:45:52

Build 6215

Job name:

File name: TH-5.mmdl

Address:

Description: 2ND FLOOR FRAMING\Flush Beams\B7(i362)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

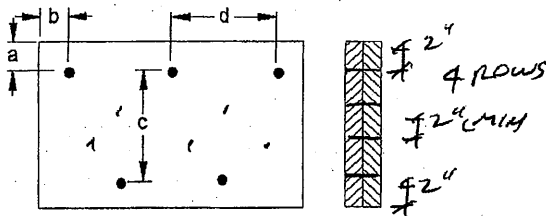Connection Diagram

a minimum = 2"
b minimum = 3"

c = 7-7/8"
d = 8"

Calculated Side Load = 166.6 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Connectors are:

Nails

3-1/2" ARDOX SPIRAL

**Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

DWG NO. TAM 4340-18 ft
STRUCTURAL
COMPONENT ONLY

T.18071539(2)



Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

BC CALC® Design Report

Build 6215

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R

Dry | 1 span | No cant.

May 10, 2018 10:23:10


File name: TH-5.mmdl

Description: 2ND FLOOR FRAMING\Flush Beams\B8(i480)

Specifier:

Designer: CZ

Company:

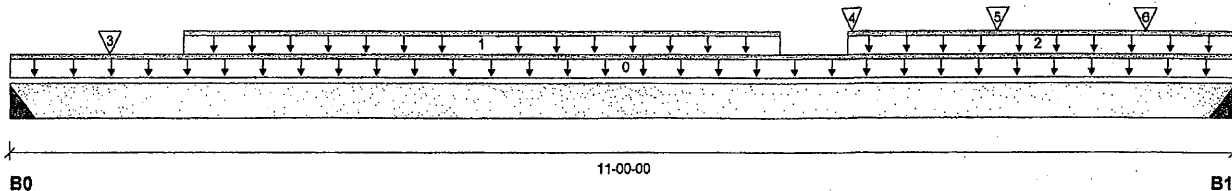

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B0, 2"	753 / 0	408 / 0		
B1, 2"	1,819 / 0	943 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-00-00	6				00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	01-06-08	06-10-08	92	46			n/a
2	STAIR	Unf. Lin. (lb/ft)	L	07-06-00	11-00-00	240	120			n/a
3	J4(i486)	Conc. Pt. (lbs)	L	00-10-08	00-10-08	108	54			n/a
4	J2(i501)	Conc. Pt. (lbs)	L	07-06-08	07-06-08	397	199			n/a
5	J2(i541)	Conc. Pt. (lbs)	L	08-10-08	08-10-08	397	199			n/a
6	J2(i519)	Conc. Pt. (lbs)	L	10-02-08	10-02-08	338	169			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	6,974 ft-lbs	17,696 ft-lbs	39.4 %	1	07-06-08
End Shear	3,045 lbs	7,232 lbs	42.1 %	1	09-10-02
Total Load Deflection	L/654 (0.198")	n/a	36.7 %	4	05-10-08
Live Load Deflection	L/999 (0.13")	n/a	36.0 %	5	05-10-08
Max Defl.	0.198"	n/a	n/a	4	05-10-08
Span / Depth	10.9				



Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Hanger 2" x 1-3/4"	1,640 lbs	n/a	38.4 %	HUS1.81/10
B1	Hanger 2" x 1-3/4"	3,908 lbs	n/a	91.5 %	HUS1.81/10

Cautions

Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).

Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DWG NO. TAM 4341-18H
STRUCTURAL
COMPONENT ONLY

T.18071540



Boise Cascade



Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLOOR FRAMING\Flush Beams\B9(i860)

BC CALC® Member Report

Dry | 1 span | No cant.

July 31, 2018 14:02:10

Build 6475

Job name:

File name: TH-5-SUNKEN.mmdl

Address:

Description: 1ST FLOOR FRAMING\Flush Beams\B9(i860)

City, Province, Postal Code: INNISFIL


Specifier:

Customer:

Designer: CZ

Code reports: CCMC 12472-R

Company:

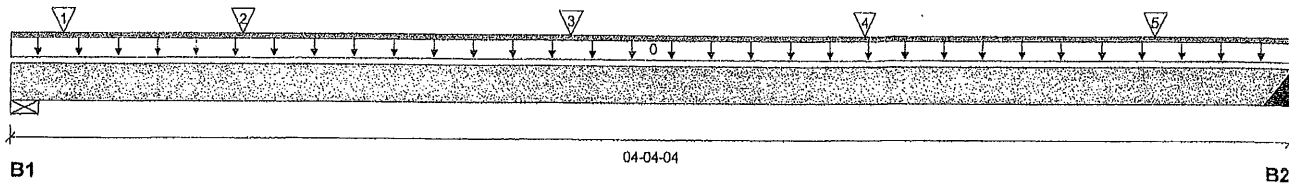

Total Horizontal Product Length = 04-04-04

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4-3/4"	368 / 0	1,027 / 0		
B2, 2"	271 / 0	152 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-04-04	Top	1.00	0.65	1.00	1.15	00-00-00
1	3(i149)	Conc. Pt. (lbs)	L	00-02-00	00-02-00	Top		801			n/a
2	B3(i859)	Conc. Pt. (lbs)	L	00-09-06	00-09-06	Top	256	159			n/a
3	J3(i818)	Conc. Pt. (lbs)	L	01-10-12	01-10-12	Top	139	70			n/a
4	J3(i814)	Conc. Pt. (lbs)	L	02-10-12	02-10-12	Top	132	66			n/a
5	J3(i827)	Conc. Pt. (lbs)	L	03-10-12	03-10-12	Top	110	55			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	634 ft-lbs	17,696 ft-lbs	3.6 %	1	01-10-12
End Shear	466 lbs	7,232 lbs	6.4 %	1	01-04-10
Total Load Deflection	L/999 (0.003")	n/a	n/a	4	02-03-04
Live Load Deflection	L/999 (0.002")	n/a	n/a	5	02-03-04
Max Defl.	0.003"	n/a	n/a	4	02-03-04
Span / Depth	4.0				



Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4-3/4" x 1-3/4"	1,437 lbs	49.8 %	21.8 %	Unspecified
B2	Hanger 2" x 1-3/4"	597 lbs	n/a	14.0 %	HUS1.81/10

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

Cautions

Header for the hanger HUS1.81/10 at B2 is a Double 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF. Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes




Design meets Code minimum (L/240) Total load deflection criteria.
Design meets Code minimum (L/360) Live load deflection criteria.
Calculations assume member is fully braced.
Hanger Manufacturer: Unassigned
Resistance Factor phi has been applied to all presented results per CSA O86. **CONFORMS TO OBC 2012**
BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.
Design based on Dry Service Condition.
Importance Factor : Normal Part code : Part 9

DWNO.YAM 4943 -18
STRUCTURAL
COMPONENT ONLY

T-1808176

Maximum Floor Spans



Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing



Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-2"	13'-9"	N/A	15'-7"	14'-8"	14'-2"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	N/A	16'-8"	15'-3"	14'-5"	N/A
	NI-40x	17'-11"	16'-11"	16'-1"	N/A	18'-5"	17'-1"	16'-1"	N/A
	NI-60	18'-2"	17'-1"	16'-4"	N/A	18'-7"	17'-4"	16'-4"	N/A
	NI-70	19'-2"	17'-10"	17'-2"	N/A	19'-7"	18'-3"	17'-7"	N/A
	NI-80	19'-5"	18'-0"	17'-4"	N/A	19'-10"	18'-5"	17'-8"	N/A
11-7/8"	NI-20	19'-6"	18'-1"	17'-3"	N/A	19'-11"	18'-3"	17'-3"	N/A
	NI-40x	21'-0"	19'-6"	18'-8"	N/A	21'-7"	20'-2"	19'-2"	N/A
	NI-60	21'-4"	19'-9"	18'-11"	N/A	21'-11"	20'-4"	19'-6"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-5"	20'-5"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-8"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-11"	20'-11"	N/A	24'-3"	22'-7"	21'-7"	N/A
	NI-60	24'-0"	22'-3"	21'-3"	N/A	24'-8"	22'-11"	21'-11"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-11"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	25'-3"	24'-2"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.





Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-9"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-6"	16'-7"	15'-11"	15'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-7"	18'-5"	17'-3"	16'-7"	15'-11"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-6"	18'-6"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-6"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-11"	22'-1"	20'-6"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-70	20'-0"	18'-7"	17'-9"	16'-7"	20'-5"	18'-11"	17'-10"	16'-7"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-7"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-70	23'-4"	21'-8"	20'-8"	19'-7"	23'-10"	22'-3"	21'-2"	19'-9"
	NI-80	23'-7"	21'-11"	20'-11"	19'-9"	24'-1"	22'-6"	21'-5"	20'-0"
14"	NI-90x	24'-3"	22'-6"	21'-6"	20'-4"	24'-8"	23'-0"	22'-0"	20'-9"
	NI-40x	24'-5"	22'-9"	21'-8"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
	NI-60	24'-10"	23'-1"	22'-0"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-70	26'-1"	24'-3"	23'-2"	21'-10"	26'-8"	24'-11"	23'-9"	22'-4"
	NI-80	26'-6"	24'-7"	23'-5"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-9"	27'-9"	25'-11"	24'-8"	23'-4"
	NI-60	27'-3"	25'-5"	24'-2"	22'-10"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-70	28'-8"	26'-8"	25'-4"	23'-11"	29'-3"	27'-4"	26'-1"	24'-8"
	NI-80	29'-1"	27'-0"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90x	29'-11"	27'-10"	26'-6"	25'-0"	30'-6"	28'-5"	27'-2"	25'-8"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing




Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
14"	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
16"	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	17'-9"	16'-1"	15'-1"	N/A	17'-9"	16'-1"	15'-1"	N/A
	NI-60	18'-1"	16'-4"	15'-4"	N/A	18'-1"	16'-4"	15'-4"	N/A
	NI-70	19'-2"	17'-10"	16'-9"	N/A	19'-7"	17'-10"	16'-9"	N/A
	NI-80	19'-5"	18'-0"	17'-1"	N/A	19'-10"	18'-3"	17'-1"	N/A
11-7/8"	NI-20	18'-9"	17'-0"	16'-0"	N/A	18'-9"	17'-0"	16'-0"	N/A
	NI-40x	21'-0"	19'-3"	17'-9"	N/A	21'-3"	19'-3"	17'-9"	N/A
	NI-60	21'-4"	19'-8"	18'-5"	N/A	21'-8"	19'-8"	18'-5"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-4"	20'-0"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-5"	N/A
	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
14"	NI-40x	23'-7"	21'-5"	19'-6"	N/A	24'-1"	21'-5"	19'-6"	N/A
	NI-60	24'-0"	22'-3"	21'-0"	N/A	24'-8"	22'-5"	21'-0"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-9"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
16"	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	24'-10"	23'-4"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing



Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-0"	16'-0"	15'-1"	13'-11"	17'-5"	16'-1"	15'-1"	13'-11"
	NI-60	17'-2"	16'-2"	15'-5"	14'-3"	17'-6"	16'-5"	15'-5"	14'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-6"	18'-5"	17'-3"	16'-7"	15'-6"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	15'-10"
11-7/8"	NI-20	17'-10"	16'-10"	16'-0"	14'-10"	18'-6"	17'-1"	16'-0"	14'-10"
	NI-40x	19'-4"	17'-11"	17'-3"	15'-10"	19'-11"	18'-6"	17'-9"	15'-10"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-1"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-5"	22'-1"	20'-6"	19'-6"	17'-5"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-9"	16'-1"	15'-1"	13'-11"	17'-9"	16'-1"	15'-1"	13'-11"
	NI-60	18'-1"	16'-5"	15'-5"	14'-3"	18'-1"	16'-5"	15'-5"	14'-3"
	NI-70	19'-10"	17'-11"	16'-9"	15'-6"	19'-10"	17'-11"	16'-9"	15'-6"
	NI-80	20'-2"	18'-3"	17'-1"	15'-10"	20'-2"	18'-3"	17'-1"	15'-10"
11-7/8"	NI-20	18'-10"	17'-1"	16'-0"	14'-10"	18'-10"	17'-1"	16'-0"	14'-10"
	NI-40x	21'-3"	19'-3"	17'-9"	15'-10"	21'-3"	19'-3"	17'-9"	15'-10"
	NI-60	21'-9"	19'-8"	18'-5"	17'-1"	21'-9"	19'-8"	18'-5"	17'-1"
	NI-70	23'-4"	21'-5"	20'-1"	18'-6"	23'-8"	21'-5"	20'-1"	18'-6"
	NI-80	23'-7"	21'-10"	20'-5"	18'-11"	24'-1"	21'-10"	20'-5"	18'-11"
14"	NI-90x	24'-3"	22'-6"	21'-3"	19'-7"	24'-8"	22'-7"	21'-3"	19'-7"
	NI-40x	24'-2"	21'-5"	19'-6"	17'-5"	24'-2"	21'-5"	19'-6"	17'-5"
	NI-60	24'-9"	22'-5"	21'-0"	19'-6"	24'-9"	22'-5"	21'-0"	19'-6"
	NI-70	26'-1"	24'-3"	22'-9"	21'-0"	26'-8"	24'-3"	22'-9"	21'-0"
	NI-80	26'-6"	24'-7"	23'-3"	21'-6"	27'-1"	24'-10"	23'-3"	21'-6"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-4"	27'-9"	25'-10"	24'-3"	22'-4"
	NI-60	27'-3"	24'-11"	23'-5"	21'-7"	27'-6"	24'-11"	23'-5"	21'-7"
	NI-70	28'-8"	26'-8"	25'-3"	23'-4"	29'-3"	26'-11"	25'-3"	23'-4"
	NI-80	29'-1"	27'-0"	25'-9"	23'-10"	29'-8"	27'-6"	25'-10"	23'-10"
	NI-90x	29'-11"	27'-10"	26'-6"	24'-10"	30'-6"	28'-5"	26'-11"	24'-10"



- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



NORDIC

ENGINEERED WOOD

INSTALLATION GUIDE FOR RESIDENTIAL FLOORS

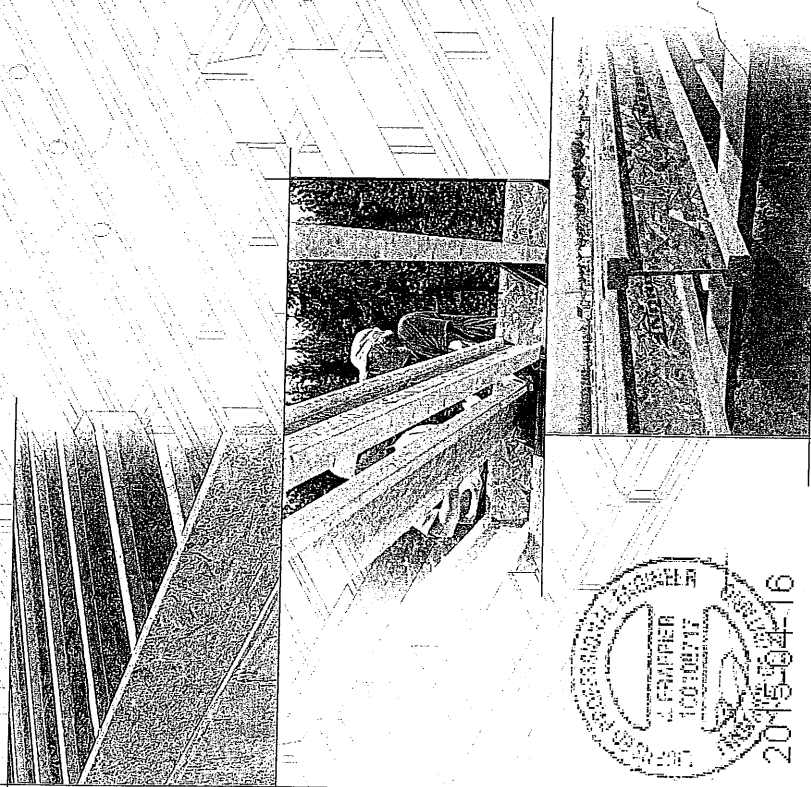

Distributed by:



SAFETY AND CONSTRUCTION PRECAUTIONS


WARNING

I-joists are not stable until completely installed, and will not carry any load until fully braced and sheathed.


Avoid Accidents by Following these Important Guidelines:

1. Brace and nail each I-joist as it is installed, using hangers, blocking panels, rim board, and/or cross-bridging at joist ends. When I-joists are applied continuous over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
2. When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joists. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joist rollover or buckling.
 - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each I-joist. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joists.
 - Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of I-joists at the end of the bay.
3. For cantilevered I-joists, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bridging.
4. Install and fully nail permanent sheathing to each I-joist before placing loads on the floor system. Then, stack building materials over beams or walls only.
5. Never install a damaged I-joist.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.




Do not walk on I-joists until fully fastened and braced, or serious injuries can result.



Never stack building materials over unsheathed I-joists. Once sheathed, do not over-stress I-joist with concentrated loads from building materials.


STORAGE AND HANDLING GUIDELINES

1. Bundle wrap can be slippery when wet. Avoid walking on wrapped bundles.
2. Store, stack, and handle I-joists vertically and level only.
3. Always stack and handle I-joists in the upright position only.
4. Do not store I-joists in direct contact with the ground and/or flatwise.
5. Protect I-joists from weather, and use spacers to separate bundles.
6. Bundled units should be kept intact until time of installation.
7. When handling I-joists with a crane on the job site, take a few simple precautions to prevent damage to the I-joists and injury to your work crew.
 - Pick I-joists in bundles as shipped by the supplier.
 - Orient the bundles so that the webs of the I-joists are vertical.
 - Pick the bundles at the 5th points, using a spreader bar if necessary.
8. Do not handle I-joists in a horizontal orientation.
9. NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.

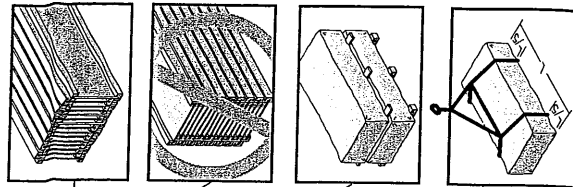

I-JOIST HANGERS

1. Hangers shown illustrate the three most commonly used metal hangers to support I-joists.
2. All nailing must meet the hanger manufacturer's recommendations.
3. Hangers should be selected based on the joist depth, flange width and load capacity based on the maximum spans.
4. Web stiffeners are required when the sides of the hangers do not laterally brace the top flange of the I-joist.



Face Mount

NORDIC I-JOIST SERIES

WEB STIFFENER INSTALLATION DETAILS

A **bearing stiffener** is required when the joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.

units conversion: 1 inch = 25.4 mm

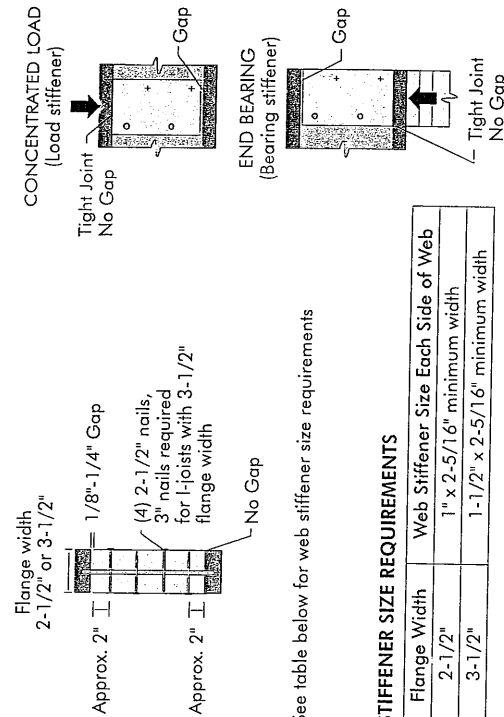


FIGURE 2

WEB STIFFENER INSTALLATION DETAILS

See table below for web stiffener size requirements

STIFFENER SIZE REQUIREMENTS

Flange Width	Web Stiffener Size Each Side of Web
2-1/2"	1" x 2-5/16" minimum width
3-1/2"	1-1/2" x 2-5/16" minimum width

MAXIMUM FLOOR SPANS FOR NORDIC I-JOISTS
SIMPLE AND MULTIPLE SPANS

Joist Depth	Joist Series	Simple spans			Multiple spans		
		On centre spacing			On centre spacing		
		12"	16"	24"	12"	16"	24"
9 1/2"	NI-20	15-1"	14-2"	13-9"	13-5"	16-3"	14-10"
	NI-40x	16-1"	15-2"	14-8"	14-19"	17-5"	15-10"
	NI-60	16-3"	15-4"	14-10"	14-11"	17-7"	15-5"
	NI-70	17-1"	16-1"	15-6"	15-7"	18-7"	16-0"
	NI-80	17-3"	16-3"	15-8"	15-9"	18-10"	16-10"
	NI-20	16-11"	16-0"	15-5"	15-6"	18-10"	16-11"
	NI-40x	18-1"	17-0"	16-5"	16-6"	20-0"	17-3"
	NI-60	18-4"	17-3"	16-7"	16-9"	20-3"	17-7"
	NI-70	19-6"	18-0"	17-4"	17-5"	20-3"	18-0"
	NI-80	19-9"	18-3"	17-6"	17-7"	21-9"	19-1"
14"	NI-90	20-2"	18-7"	17-10"	17-11"	22-3"	20-2"
	NI-90x	20-4"	18-9"	17-11"	18-0"	22-5"	20-7"
	NI-40x	20-1"	18-7"	17-10"	17-11"	22-2"	20-9"
	NI-60	20-5"	18-11"	18-1"	18-2"	22-7"	20-6"
	NI-70	21-7"	20-0"	19-1"	19-2"	23-10"	20-11"
	NI-80	21-11"	20-3"	19-4"	19-5"	24-3"	21-1"
	NI-90	22-5"	20-8"	19-9"	19-10"	24-9"	21-5"
	NI-90x	22-7"	20-11"	19-11"	20-0"	25-0"	22-10"
	NI-60	22-3"	20-8"	19-9"	19-10"	24-7"	22-10"
	NI-70	23-6"	21-9"	20-9"	20-10"	26-0"	22-9"
16"	NI-80	23-11"	22-1"	21-1"	21-2"	26-5"	23-0"
	NI-90	24-5"	22-6"	21-5"	21-6"	28-11"	23-9"
	NI-90x	24-8"	22-9"	21-9"	21-10"	27-3"	24-0"
						25-2"	24-1"

CCMC EVALUATION REPORT 13032-R


[illegible]

Chantiers Chibougamau Ltd. harvests its own trees, which enables Nordic products to adhere to strict quality control procedures throughout the manufacturing process. Every phase of the operation, from logging to the finished product, reflects our commitment to quality.

Nordic Engineered Wood I-joists use only finger-jointed back-to-back lumber in their flanges, ensuring consistent quality, superior strength and longer span carrying capacity.


2019-2020

1e




Transfer load from above to bearing below. Install squash blocks per detail 1d. Match bearing area of blocks below to post above.

1f

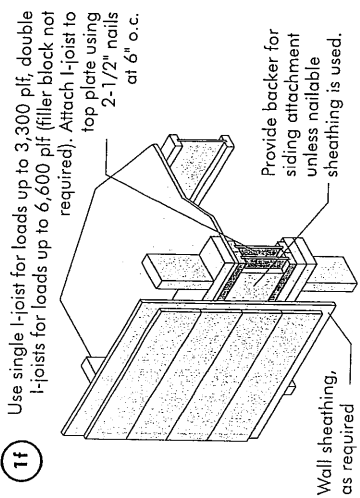

Use single I-joist for loads up to 3,300 plf; double I-joists for loads up to 6,600 plf (filler block not required). Attach I-joist to top plate using 2-1/2" nails at 6" o.c.


1i



Top- or face-mount hanger installed per manufacturer's recommendations. For nailing schedules for multiple beams, see the manufacturer's recommendations.

Note: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.


1k



Top-mount hanger installed per manufacturer's recommendations


Note: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

1m

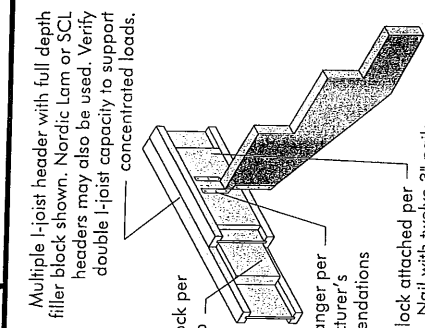


Multiple I-joist header with full depth filler block shown. Nordic Lam or SCL headers may also be used. Verify double I-joist capacity to support concentrated loads.

1n




Do not bevel-cut joist beyond inside face of wall.

1g

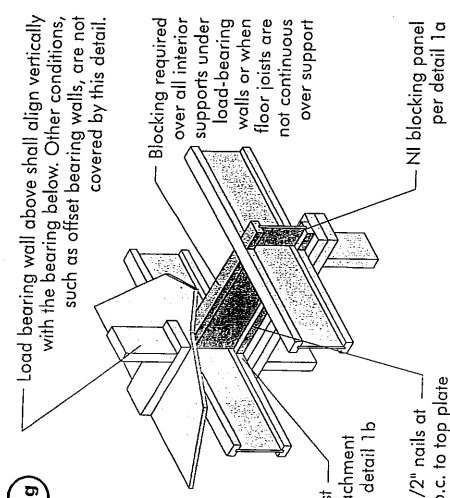

Load bearing wall above shall align vertically with the bearing below. Other conditions, such as offset bearing walls, are not covered by this detail.

1h

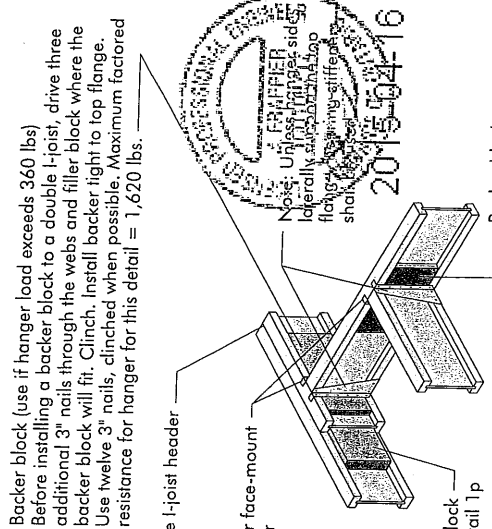

Backer block (use if hanger load exceeds 360 lbs). Before installing a backer block to a double I-joist, drive three additional 3" nails through the webs and filler block where the backer block will fit. Clinch. Install backer tight to top flange. Use twelve 3" nails, clinched when possible. Maximum factored resistance for hanger for this detail = 1,620 lbs.

For hanger capacity see hanger manufacturer's recommendations. Verify double I-joist capacity to support concentrated loads.


BACKER BLOCKS (Blocks must be long enough to permit required nailing without splitting)

Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

* Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA-O325 or CAN/CSA-O437 Standards.

** For face-mount hangers use net joist depth minus 3-1/4" for joists with 1-1/2" thick flanges. For 2" thick flanges use net depth minus 4-1/4".

1p



1/8" to 1/4" gap between top flange and filler block


Notes:

- Support back of I-joist web during nailing to prevent damage to web/flange connection.
- Leave a 1/8 to 1/4-inch gap between top of filler block and bottom of top I-joist flange.
- Filler block is required between joists for full length of span.
- Nail joists together with two rows of 3" nails at 12 inches o.c. (clinched when possible) on each side of the double I-joist. Total of four nails per foot required. If nails can be clinched, only two nails per foot are required.
- The maximum factored load that may be applied to one side of the double joist using this detail is 860 lb/ft. Verify double I-joist capacity.

FILLER BLOCK REQUIREMENTS FOR DOUBLE I-JOIST CONSTRUCTION


Flange Size	Joist Depth	Filler Block Size
2-1/2" x 1-1/2"	9-1/2"	2-1/8" x 6"
	11-7/8"	2-1/8" x 8"
	14"	2-1/8" x 10"
	16"	2-1/8" x 12"
3-1/2" x 1-1/2"	9-1/2"	3" x 6"
	11-7/8"	3" x 8"
	14"	3" x 10"
	16"	3" x 12"
3-1/2" x 2"	11-7/8"	3" x 7"
	14"	3" x 9"
	16"	3" x 11"

1r

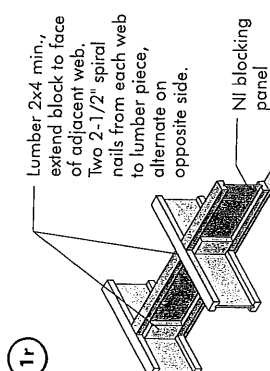

Lumber 2x4 min., extend block to face of adjacent web. Two 2-1/2" spiral nails from each web to lumber piece, alternate on opposite side.

1s

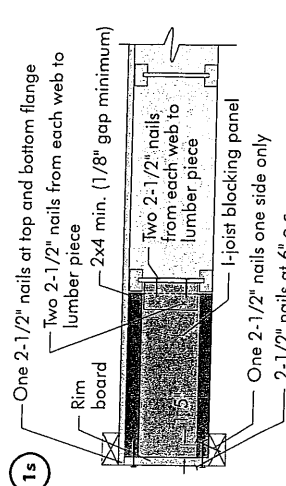

Notes:
- In some local codes, blocking is prescriptively required in the first joist space (or first and second joist space) next to the starter joist. Where required, see local code requirements for spacing of the blocking.
- All nails are common spiral in this detail.

INSTALLING NORDIC I-JOISTS

- Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, contact your supplier.
- Except for cutting to length, I-joist flanges should **never** be cut, drilled, or notched.
- Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
- I-joists must be anchored securely to supports before floor sheathing is attached, and supports for multiple spans must be level.
- Minimum bearing lengths: 1-3/4 inches for end bearings and 3-1/2 inches for intermediate bearings.
- When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
- Leave a 1/16-inch gap between the I-joist end and a header.
- Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unusual or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
- Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
- Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
- For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squash blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
- Due to shrinkage, common framing lumber set on edge **may never** be used as blocking or rim boards. I-joist blocking panels or other engineered wood products – such as rim board – must be cut to fit between the I-joists, and an I-joist-compatible depth selected.
- Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
- If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
- Nail spacing: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.






FIGURE 1

TYPICAL NORDIC I-JOIST FLOOR FRAMING AND CONSTRUCTION DETAILS

Some framing requirements such as erection bracing and blocking panels have been omitted for clarity.

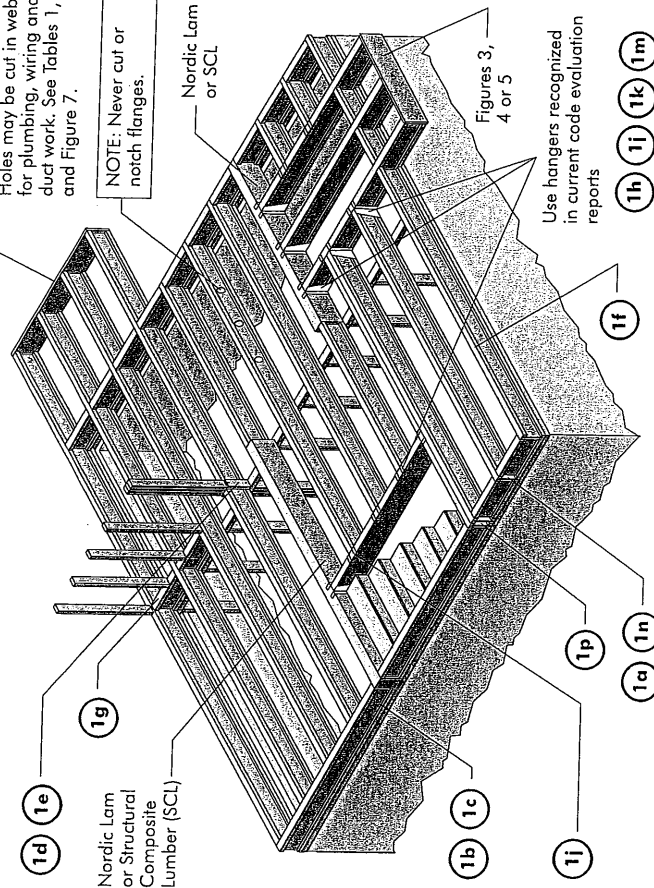


All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.122" dia.) common spiral nails may be substituted for 2-1/2" (0.128" dia.) common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.

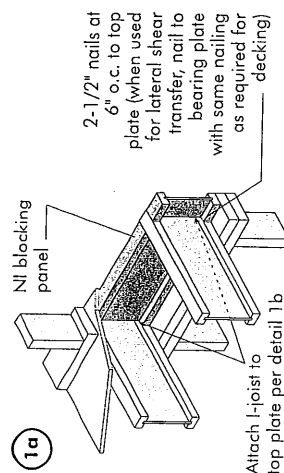

Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
NI Joists	3,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.




Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	8,090


*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

Attach rim board to top plate using 2-1/2" wire or spiral toe-nails at 6" o.c.
To avoid splitting flange, start nails at least 1-1/2" from end of I-joist. Nails may be driven at an angle to avoid splitting of bearing plate.
Minimum bearing length shall be 1-3/4" for the end bearings, and 3-1/2" for the intermediate bearings when applicable.

1c
Attach rim joist to floor joist with one nail at top and bottom. Nail must provide 1 inch minimum penetration into floor joist. Toe-nailing may be used.

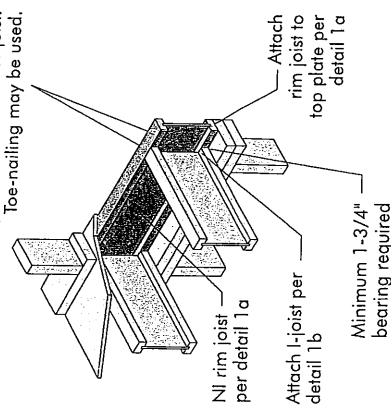

1d
NI or rim board blocking panel per detail 1a

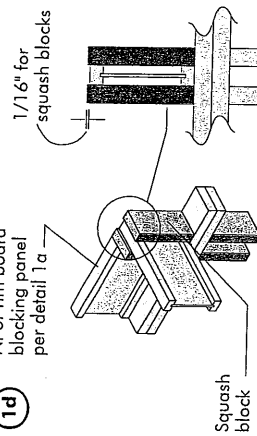


Pair of Squash Blocks	Maximum Factored Vertical per Pair of Squash Blocks (lbs)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300

Provide lateral bracing per detail 1a, 1b, or 1c

CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)

4a Method 1 — SHEATHING REINFORCEMENT ONE SIDE

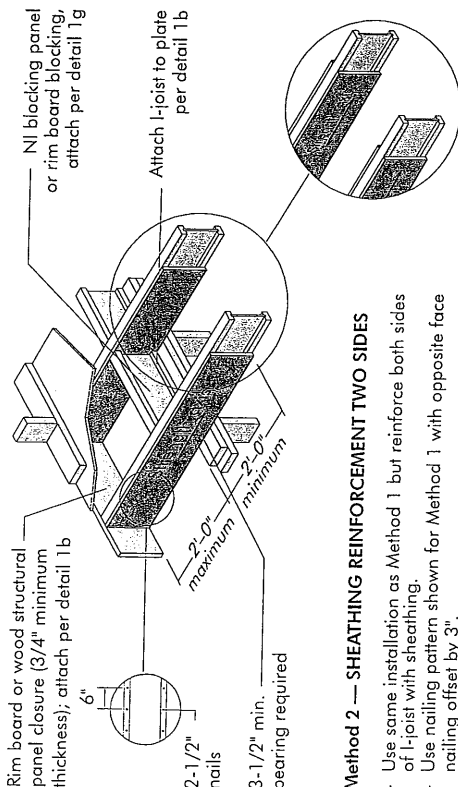

Method 2 — SHEATHING REINFORCEMENT TWO SIDES

- Use same installation as Method 1 but reinforce both sides of L-joist with sheathing.
- Use nailing pattern shown for Method 1 with opposite face nailing offset by 3".

Note: Canadian softwood plywood sheathing or equivalent (minimum thickness 3/4") required on sides of joist. Depth shall match the full height of the joist. Nail with 2-1/2" nails at 6" o.c., top and bottom flange. Install with face grain horizontal. Attach L-joist to plate at all supports per detail 1b. Verify reinforced L-joist capacity.

4b Alternate Method 2 — DOUBLE L-JOIST


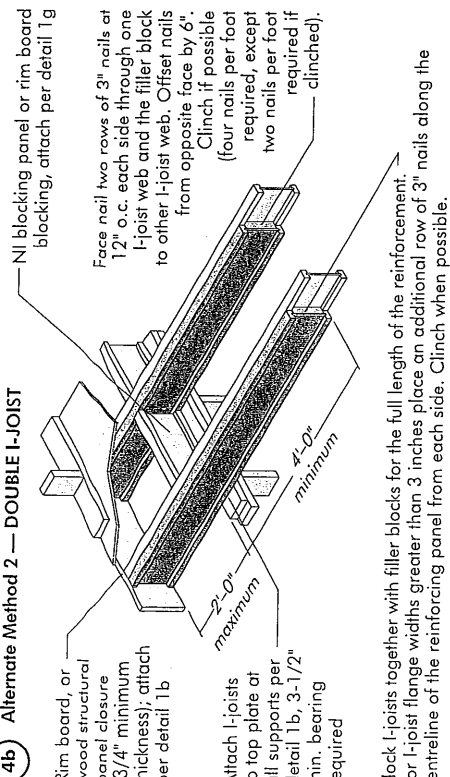


FIGURE 4 (continued)

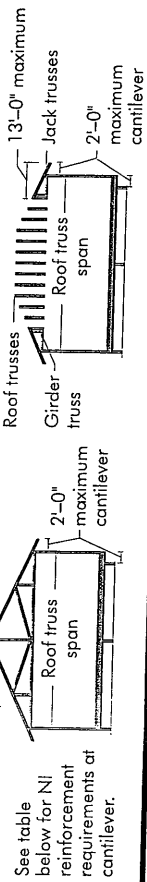

For hip roofs with the jack trusses running parallel to the cantilevered floor joists, the L-joist reinforcement requirements for a span of 26 ft. shall be permitted to be used.

CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft.)	ROOF LOADING (UNFACTORED)													
		LL = 30 psf, DL = 15 psf						LL = 40 psf, DL = 15 psf							
		JOIST SPACING (in.)						JOIST SPACING (in.)							
		12	16	19.2	24		12	16	19.2	24		12	16	19.2	24
9'-1/2"	26	N	N	1	2		N	1	2	X		N	2	X	X
	28	N	1	1	X		N	1	2	X		N	2	X	X
	30	N	1	1	X		N	1	2	X		N	2	X	X
	32	N	1	2	X		N	2	X	X		N	X	X	X
	34	N	1	2	X		N	2	X	X		N	X	X	X
11'-7/8"	36	N	1	2	X		1	2	X	X		1	X	X	X
	26	N	N	N	1		N	N	1	2		N	N	1	2
	28	N	N	N	1		N	N	1	2		N	1	1	X
	30	N	N	1	1		N	N	1	2		N	1	2	X
	32	N	1	1	1		N	N	1	2		N	1	2	X
14"	34	N	1	2	2		N	1	1	2		N	1	2	X
	36	N	1	1	2		N	1	2	X		N	1	2	X
	38	N	1	1	2		N	1	2	X		N	1	2	X
	26	N	N	N	N		N	N	N	1		N	N	N	1
	28	N	N	N	N		N	N	N	1		N	N	N	1
16"	30	N	N	N	N		N	N	N	1		N	N	N	1
	32	N	N	1	1		N	N	N	1		N	N	1	1
	34	N	N	1	1		N	N	N	1		N	N	1	1
	36	N	N	1	1		N	N	N	1		N	N	1	1
	38	N	N	1	1		N	N	N	1		N	N	1	1
18"	40	N	N	1	1		N	N	N	1		N	N	1	1
	42	N	N	N	N		N	N	N	1		N	N	N	1

1. N = No reinforcement required.
2. N = NI reinforced with 3/4" wood structural panel on one side only.
3. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.
4. For larger openings, or multiple 3'-0" width openings spaced less than 6'-0" o.c., additional joists beneath the opening & cripple studs may be required.
5. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.

For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam. When the roof is framed using a ridge board, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.


5. Cantilevered joists supporting girder trusses or roof beams may require additional reinforcing.

WEB HOLES

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:


- 1. The distance between the inside edge of the support and the centreline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
- 2. I-joist top and bottom flanges must NEVER be cut, notched, or otherwise modified.
- 3. Whenever possible, field-cut holes should be centred on the middle of the web.
- 4. The maximum size hole or the maximum depth of a duct chase opening that can be cut into an I-joist web shall equal the clear distance between the flanges of the I-joist minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole or opening and the adjacent I-joist flange.
- 5. The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
- 6. Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the longest side of the opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively).
- 7. A knockout is **not** considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
- 8. Holes measuring 1-1/2 inches or smaller shall be permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.
- 9. A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
- 10. All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
- 11. Limit three maximum size holes per span, of which one may be a duct chase opening.
- 12. A group of round holes at approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

FIGURE 7
FIELD-CUT HOLE LOCATOR

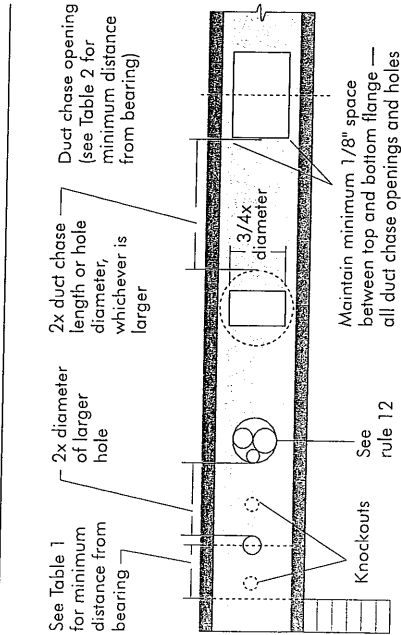

A knockout is **NOT** considered a hole, may be utilized wherever it occurs and may be ignored for purposes of calculating minimum distances between holes.

Knockouts are pre-scored holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on centre along the length of the I-joist. Where possible, it is preferable to use knockouts instead of field-cut holes.



Never drill, cut or notch the flange, or over-cut the web.

Holes in webs should be cut with a sharp saw.

For rectangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joist.

TABLE 1
LOCATION OF CIRCULAR HOLES IN JOIST WEBS
Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of hole (ft.-in.)														Span adjustment Factor
		2	3	4	5	6	6 1/4	7	8	8 5/8	9	10	10 3/4	11	12	
9-1/2"	NL20	0-7 1/2	1-6"	2-10"	4-3"	5-8"	6-0"	---	---	---	---	---	---	---	---	---
	NL40x	0-7 1/2	1-6"	3-0"	4-4"	6-0"	6-4"	---	---	---	---	---	---	---	---	---
	NL60	1-3"	2-6"	4-0"	5-4"	7-0"	7-5"	---	---	---	---	---	---	---	---	---
	NL80	2-3"	3-6"	5-0"	6-6"	8-8"	8-8"	---	---	---	---	---	---	---	---	---
11-7/8"	NL20	0-7 1/2	0-8"	1-0"	2-4"	3-8"	4-0"	5-0"	6-6"	7-9"	---	---	---	---	---	---
	NL40x	0-7 1/2	0-8"	1-3"	2-8"	4-0"	4-4"	5-5"	7-0"	8-4"	---	---	---	---	---	---
	NL60	0-7 1/2	1-8"	3-0"	4-3"	5-9"	6-0"	7-3"	8-10"	10-0"	---	---	---	---	---	---
	NL80	1-6"	2-10"	4-0"	5-4"	6-9"	7-2"	8-4"	10-0"	11-2"	10-3"	11-4"	---	---	---	---
14"	NL20	0-7 1/2	0-8"	1-5"	3-2"	4-10"	5-4"	6-9"	8-9"	10-2"	---	---	---	---	---	---
	NL40x	0-7 1/2	0-8"	0-9"	2-5"	4-4"	4-9"	6-3"	---	---	---	---	---	---	---	---
	NL60	0-7 1/2	0-8"	1-8"	3-0"	4-3"	4-8"	5-8"	7-2"	8-0"	8-8"	10-4"	11-9"	---	---	---
	NL80	0-10"	2-0"	3-4"	4-5"	5-10"	6-5"	7-3"	8-9"	9-9"	10-4"	12-0"	13-5"	---	---	---
16"	NL20	0-7 1/2	0-8"	0-10"	2-5"	4-0"	4-5"	5-9"	7-5"	8-8"	9-4"	11-4"	12-11"	---	---	---
	NL40x	0-7 1/2	0-8"	0-8"	2-0"	3-9"	4-2"	5-5"	7-3"	8-5"	9-2"	11-4"	12-11"	---	---	---
	NL60	0-7 1/2	0-8"	0-8"	1-6"	2-10"	3-2"	4-2"	5-6"	6-4"	7-0"	8-5"	9-8"	10-2"	12-2"	13-9"
	NL80	0-7 1/2	1-3"	2-6"	3-10"	5-3"	5-6"	6-6"	8-0"	9-0"	9-5"	10-8"	12-3"	12-9"	14-0"	15-6"
20-10"	NL20	0-7 1/2	0-8"	0-8"	1-9"	3-3"	3-8"	4-9"	6-5"	7-5"	8-0"	9-10"	11-3"	11-9"	13-9"	15-4"
	NL40x	0-7 1/2	0-8"	0-8"	2-0"	3-6"	4-0"	5-0"	6-9"	7-9"	8-4"	10-2"	11-6"	12-0"	14-5"	16-0"
	NL60	0-7 1/2	0-8"	0-8"	2-0"	3-6"	4-0"	5-0"	6-9"	7-9"	8-4"	10-2"	11-6"	12-0"	14-5"	16-0"
	NL80	0-7 1/2	0-8"	0-8"	2-0"	3-6"	4-0"	5-0"	6-9"	7-9"	8-4"	10-2"	11-6"	12-0"	14-5"	16-0"

Above table may be used for 1-1/2" spacing of 24" inches on centre or less.

- 1. Above table may be used for I-joist spacing of 24 inches on centre or less.
- 2. Hole location distance is measured from inside face of supports to centre of hole.
- 3. Distances in this chart are based on uniformly loaded joists.

OPTIONAL:

The above table is based on the I-joists used at their maximum span. If the I-joists are placed at less than their full maximum span (see Maximum Span Table) the minimum distance from the centreline of the hole to the face of any support (D) as given above may be reduced as follows:

$D_{reduced} = \frac{L_{actual} \times D}{L_{max}}$

Where:

- $D_{reduced}$ = Distance from the inside face of any support to centre of hole, reduced for less-than-maximum span applications (ft.)
 - L_{actual} = The actual measured span distance between the inside faces of supports (ft.)
 - L_{max} = Span Adjustment Factor given in this table.
 - D = The minimum distance from the inside face of any support to centre of hole from this table.
- If L_{actual} is greater than L_{max} , use L_{max} in the above calculation for L_{actual} .




TABLE 2
DUCT CHASE OPENING SIZES AND LOCATIONS — Simple Span Only


Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of opening (ft.-in.)										Span adjustment Factor	
		8	10	12	14	16	18	20	22	24	26	28	30
9-1/2"	NL20	4-11"	4-3"	4-10"	5-4"	5-8"	6-1"	6-6"	7-1"	7-5"	7-9"	8-3"	8-7"
	NL40x	5-3"	5-8"	6-0"	6-5"	6-10"	7-3"	7-8"	8-2"	8-6"	9-0"	9-4"	9-8"
	NL60	5-4"	5-8"	6-2"	6-7"	7-1"	7-5"	7-9"	8-3"	8-7"	9-1"	9-5"	9-9"
	NL80	5-4"	5-8"	6-2"	6-7"	7-1"	7-5"	7-9"	8-3"	8-7"	9-1"	9-5"	9-9"
11-7/8"	NL20	5-9"	6-2"	6-6"	7-1"	7-5"	7-9"	8-3"	8-7"	9-1"	9-5"	9-9"	10-3"
	NL40x	6-8"	7-2"	7-6"	8-1"	8-6"	9-0"	9-4"	9-8"	10-2"	10-6"	11-0"	11-4"
	NL60	7-3"	7-7"	8-1"	8-6"	9-0"	9-4"	9-8"	10-2"	10-6"	11-0"	11-4"	11-8"
	NL80	7-3"	7-7"	8-1"	8-6"	9-0"	9-4"	9-8"	10-2"	10-6"	11-0"	11-4"	11-8"
14"	NL20	7-7"	8-1"	8-5"	9-0"	9-4"	9-8"	10-2"	10-6"	11-0"	11-4"	11-8"	12-2"
	NL40x	8-7"	9-1"	9-5"	10-0"	10-4"	10-8"	11-2"	11-6"	12-0"	12-4"	12-8"	13-2"
	NL60	8-7"	9-1"	9-5"	10-0"	10-4"	10-8"	11-2"	11-6"	12-0"	12-4"	12-8"	13-2"
	NL80	8-7"	9-1"	9-5"	10-0"	10-4"	10-8"	11-2"	11-6"	12-0"	12-4"	12-8"	13-2"
16"	NL20	10-3"	10-8"	11-2"	11-6"	12-1"	12-5"	12-9"	13-3"	13-7"	14-1"	14-5"	14-9"
	NL40x	10-4"	10-9"	11-3"	11-7"	12-1"	12-5"	12-9"	13-3"	13-7"	14-1"	14-5"	14-9"
	NL60	10-4"	10-9"	11-3"	11-7"	12-1"	12-5"	12-9"	13-3"	13-7"	14-1"	14-5"	14-9"
	NL80	10-4"	10-9"	11-3"	11-7"	12-1"	12-5"	12-9"	13-3"	13-7"	14-1"	14-5"	14-9"

- 1. Above table may be used for I-joist spacing of 24 inches on centre or less.
- 2. Duct chase opening location distance is measured from inside face of supports to centre of opening.
- 3. The above table is based on simple-span joists only. For other applications, contact your local distributor.
- 4. Distances are based on uniformly loaded floor joists that meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. For other applications, contact your local distributor.

BRICK CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)


5a SHEATHING REINFORCEMENT

Provide full depth blocking between joists over support (not shown)

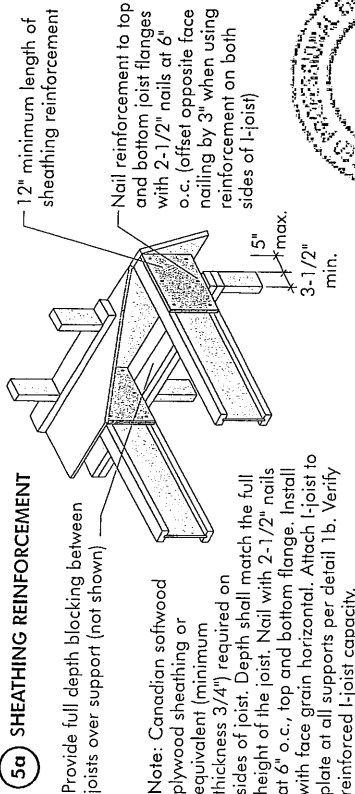

5b SET-BACK DETAIL

Rim board or wood structural panel closure (3/4 inch minimum thickness), attach per detail 1b.

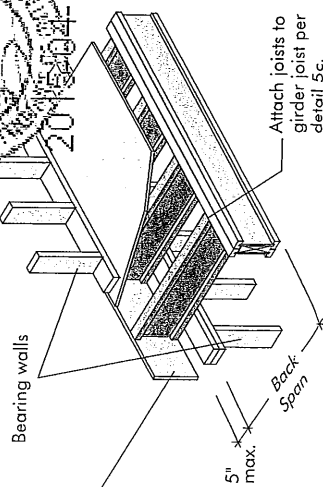


Notes:

- Provide full depth blocking between joists over support (not shown for clarity)
- Attach I-joist to plate at all supports per detail 1b.
- 3-1/2 inch minimum I-joist bearing required.

5c SET-BACK CONNECTION



Vertical solid sawn blocks (2x6 S-P-F No. 2 or better) nailed through joist web and web of girder using 2-1/2 inch nails. Alternate for opposite side.

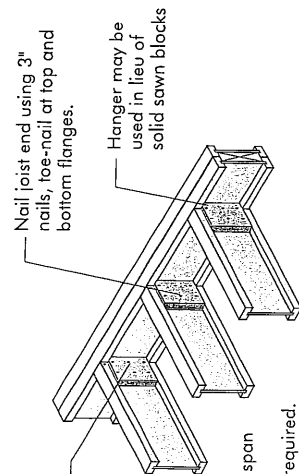

Notes:

- Verify girder joist capacity if the back span exceeds the joist spacing.
- Attach double I-joist per detail 1p, if required.

FIGURE 5 (continued)

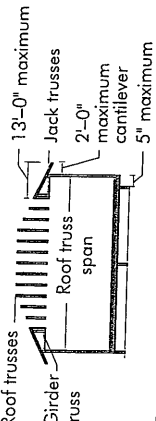

For hip roofs with the jack trusses running parallel to the cantilevered floor joists, the I-joist reinforcement requirements for a span of 26 ft. shall be permitted to be used.

BRICK CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft.)	ROOFLOADING (UNFACTORED)									
		LL = 30 psf, DL = 15 psf					LL = 40 psf, DL = 15 psf				
		JOIST SPACING (in.)					JOIST SPACING (in.)				
		12	16	19.2	24		12	16	19.2	24	
9-1/2"	26	1	X	X	X	2	X	X	X	X	2
	28	1	X	X	X	2	X	X	X	X	2
	30	1	X	X	X	2	X	X	X	X	2
	32	2	X	X	X	2	X	X	X	X	2
	34	2	X	X	X	2	X	X	X	X	2
11-7/8"	26	2	X	X	X	2	X	X	X	X	2
	28	2	X	X	X	2	X	X	X	X	2
	30	2	X	X	X	2	X	X	X	X	2
	32	2	X	X	X	2	X	X	X	X	2
	34	2	X	X	X	2	X	X	X	X	2
14"	26	2	X	X	X	2	X	X	X	X	2
	28	2	X	X	X	2	X	X	X	X	2
	30	2	X	X	X	2	X	X	X	X	2
	32	2	X	X	X	2	X	X	X	X	2
	34	2	X	X	X	2	X	X	X	X	2
16"	26	2	X	X	X	2	X	X	X	X	2
	28	2	X	X	X	2	X	X	X	X	2
	30	2	X	X	X	2	X	X	X	X	2
	32	2	X	X	X	2	X	X	X	X	2
	34	2	X	X	X	2	X	X	X	X	2

1. N = No reinforcement required.

2 = Nf reinforced with 3/4" wood structural panel on one side only.

3 = Nf reinforced with 3/4" wood structural panel on both sides, or double I-joist.

X = Try a deeper joist or closer spacing.

2. Maximum design load shall be: 15 psf roof dead load, 55 psf floor total load, and 80 psf wall load. Wall load is based on 3-0" maximum width window or door openings.

For larger openings, or multiple 3-0" width openings spaced less than 6-0" o.c., additional joists beneath the opening's cripple studs may be required.

3. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.

4. For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam.

When the roof is framed using a ridge board, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.

5. Cantilevered joists supporting girder trusses or roof beams may require additional reinforcing.

INSTALLING THE GLUED FLOOR SYSTEM

1. Wipe any mud, dirt, water, or ice from I-joist flanges before gluing.
2. Snap a chalk line across the I-joists four feet in from the wall for panel edge alignment and as a boundary for spreading glue.
3. Spread only enough glue to lay one or two panels at a time, or follow specific recommendations from the glue manufacturer.
4. Lay the first panel with tongue side to the wall, and nail in place. This protects the tongue of the next panel from damage when tapped into place with a block and sledgehammer.
5. Apply a continuous line of glue (about 1/4-inch diameter) to the top flange of a single I-joist. Apply glue in a winding pattern on wide areas, such as with double I-joists.
6. Apply two lines of glue on I-joists where panel ends butt to assure proper gluing of each end.
7. After the first row of panels is in place, spread glue in the groove of one or two panels at a time before laying the next row. Glue line may be continuous or spaced, but avoid squeeze-out by applying a thinner line (1/8 inch) than used on I-joist flanges.
8. Tap the second row of panels into place, using a block to protect groove edges.
9. Stagger end joints in each succeeding row of panels. A 1/8-inch space between all end joints and 1/8-inch at all edges, including T&G edges, is recommended. (Use a spacer tool or an 2-1/2" common nail to assure accurate and consistent spacing.)
10. **Complete all nailing of each panel before glue sets.** Check the manufacturer's recommendations for cure time. (Warm weather accelerates glue setting.) Use 2" ring- or screw-shank nails for panels 3/4-inch thick or less, and 2-1/2" ring- or screw-shank nails for thicker panels. Space nails per the table below. Closer nail spacing may be required by some codes, or for diaphragm construction. The finished deck can be walked on right away and will carry construction loads without damage to the glue bond.

FASTENERS FOR SHEATHING AND SUBFLOORING (1)

Maximum Joist Spacing (in.)	Minimum Panel Thickness (in.)	Nail Size and Type				Maximum Spacing of Fasteners	
		Common Wire or Spiral Nails	Ring Thread Nails or Screws	Staples		Edges	Interm. Supports
16	5/8	2"	1-3/4"	2"		6"	12"
20	5/8	2"	1-3/4"	2"		6"	12"
24	3/4	2"	1-3/4"	2"		6"	12"

1. Fasteners of sheathing and subflooring shall conform to the above table.
2. Staples shall not be less than 1/16-inch in diameter or thickness, with not less than a 3/8-inch crown driven with the crown parallel to framing.
3. Flooring screws shall not be less than 1/8-inch in diameter.
4. Special conditions may impose heavy traffic and concentrated loads that require construction in excess of the minimums shown.
5. Use only adhesives conforming to CAN/CGSB-71.26 Standard, Adhesives for Field-Gluing Plywood to Lumber Framing for Floor System, applied in accordance with the manufacturer's recommendations. If OSB panels with sealed surfaces and edges are to be used, use only solvent-based glues; check with panel manufacturer.

Ref.: NRC-CNRC, National Building Code of Canada 2010, Table 9.23.3.5.

IMPORTANT NOTE:


Floor sheathing must be field glued to the I-joist flanges in order to achieve the maximum spans shown in this document. If sheathing is nailed only, I-joist spans must be verified with your local distributor.

RIM BOARD INSTALLATION DETAILS


8a ATTACHMENT DETAILS WHERE RIM BOARDS ABUT

Rim board joint between floor joists


2-1/2" nails at 6" o.c. (typical)

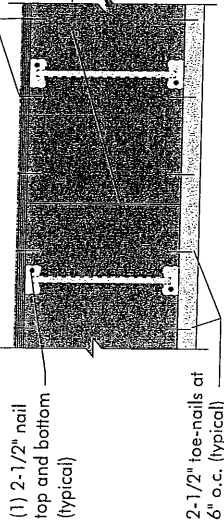


Rim board joint at corner

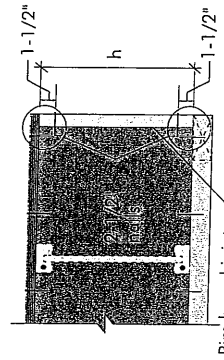

8b TOE-NAIL CONNECTION AT RIM BOARD



8c 2X LEDGER TO RIM BOARD ATTACHMENT DETAIL

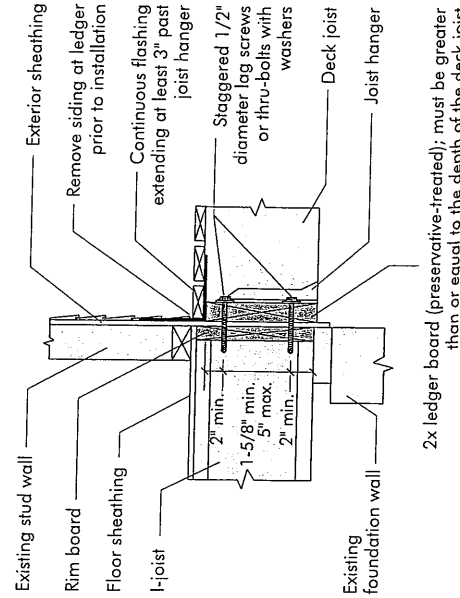

PRODUCT WARRANTY

Chantiers Chibougamau guarantees that, in accordance with our specifications, Nordic products are free from manufacturing defects in material and workmanship.

Furthermore, Chantiers Chibougamau warrants that our products, when utilized in accordance with our handling and installation instructions, will meet or exceed our specifications for the lifetime of the structure.

