


Town of Innisfil Certified Model  
10/26/2018 9:46:51 AM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1	10-00-00	9 1/2" NI-40x	1	8
J1DJ	10-00-00	9 1/2" NI-40x	2	2
B1	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1




FROM PLAN DATED: JAN 2018  
BUILDER: BAYVIEW WELLINGTON  
SITE: ALCONA SHORES  
MODEL: TH-11E  
ELEVATION: A  
LOT:  
CITY: INNISFIL  
SALESMAN: M D  
DESIGNER: CZ  
REVISION:

NOTES:  
REFER TO THE NORDIC  
INSTALLATION GUIDE FOR PROPER  
STORAGE AND INSTALLATION.  
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2  
S.P.F REQ'D UNDER INTERIOR  
UNIFORM LOAD BEARING WALLS.  
MULTIPLE SQUASH BLOCKS REQ'D  
UNDER CONCENTRATED LOADS. SEE  
FIGURE 1. CANTILEVERED JOISTS  
INCLUDING CANT' OVER BRICK REQ.  
I-JOIST BLOCKING ALONG BEARING  
AND RIMBOARD CLOSURE AT ENDS.  
SEE FIGURES 4 & 5 FOR  
REINFORCEMENT REQUIREMENTS.  
FOR HOLES INCLUDING DUCT  
CHASE AND FIELD CUT OPENINGS  
SEE FIGURE 7, TABLES 1 & 2.  
CERAMIC TILE APPLICATION AS PER  
O.B.C 9.30.6.  
LOADING:  
DESIGN LOADS: L/480.000  
LIVE LOAD: 40.0 lb/ft²  
DEAD LOAD: 15.0 lb/ft  
TILED AREAS: 20 lb/ft  
SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 30/07/2018


LOW FOYER

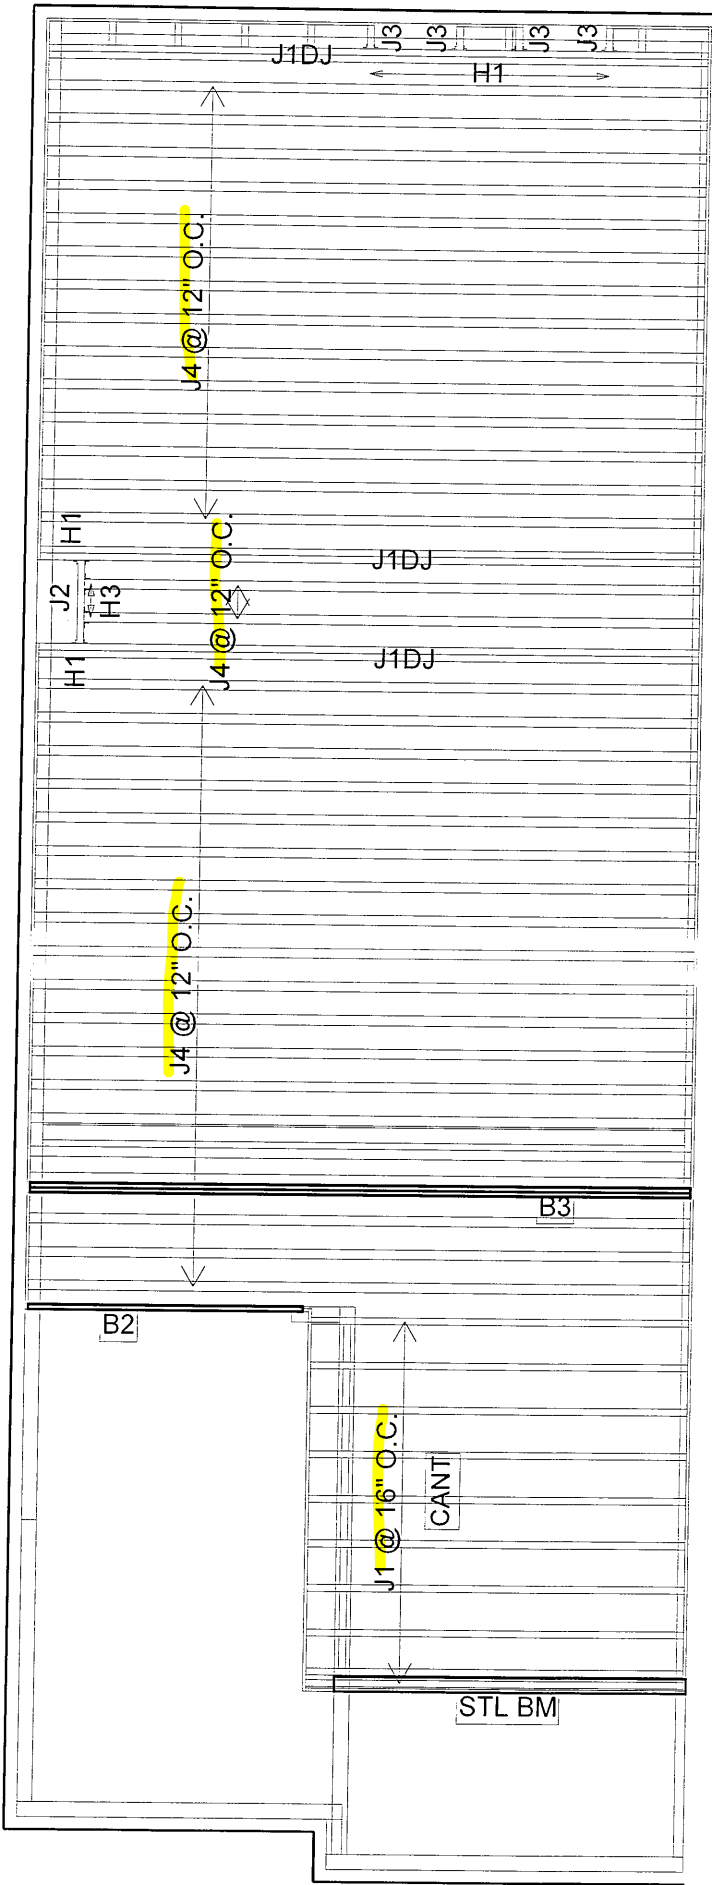

Town of Innisfil Certified Model  
10/26/2018 9:46:55 AM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1DJ	20-00-00	11 7/8" NI-40x	2	6
J1	12-00-00	11 7/8" NI-40x	1	10
J2	4-00-00	11 7/8" NI-40x	1	1
J3	2-00-00	11 7/8" NI-40x	1	4
J4	20-00-00	11 7/8" NI-80	1	35
B3	20-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B2	10-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
6	H1	IUS2.56/11.88
2	H3	IUS3.56/11.88




FROM PLAN DATED: JAN 2018  
BUILDER: BAYVIEW WELLINGTON  
SITE: ALCONA SHORES  
MODEL: TH-11E  
ELEVATION: A  
LOT:  
CITY: INNISFIL  
SALESMAN: M D  
DESIGNER: CZ  
REVISION:

NOTES:  
REFER TO THE NORDIC  
INSTALLATION GUIDE FOR PROPER  
STORAGE AND INSTALLATION.  
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2  
S.P.F. REQ'D UNDER INTERIOR  
UNIFORM LOAD BEARING WALLS.  
MULTIPLE SQUASH BLOCKS REQ'D  
UNDER CONCENTRATED LOADS. SEE  
FIGURE 1. CANTILEVERED JOISTS  
INCLUDING CANT' OVER BRICK REQ.  
I-JOIST BLOCKING ALONG BEARING  
AND RIMBOARD CLOSURE AT ENDS.  
SEE FIGURE 7 TABLES 4 & 5 FOR  
REINFORCEMENT REQUIREMENTS.  
FOR HOLES INCLUDING DUCT  
CHASE AND FIELD CUT OPENINGS  
SEE FIGURE 7 TABLES 1 & 2 OF THE  
INSTALLATION GUIDE. CERAMIC TILE  
APPLICATION AS PER O.B.C. 9.30.6  
LOADING:  
DESIGN LOADS: L/480.000  
LIVE LOAD: 40.0 lb/ft²  
DEAD LOAD: 15.0 lb/ft  
TILED AREAS: 20 lb/ft  
SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 30/07/2018

MAIN FLOOR



FROM PLAN DATED: JAN 2018  
BUILDER: BAYVIEW WELLINGTON  
SITE: ALCONA SHORES  
MODEL: TH-11E  
ELEVATION: A  
LOT:  
CITY: INNISFIL  
SALESMAN: M D  
DESIGNER: CZ  
REVISION:


NOTES:  
REFER TO THE NORDIC  
INSTALLATION GUIDE FOR PROPER  
STORAGE AND INSTALLATION.  
SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2  
S.P.F. REQ'D UNDER INTERIOR  
UNIFORM LOAD BEARING WALLS.  
MULTIPLE SQUASH BLOCKS REQ'D  
UNDER CONCENTRATED LOADS. SEE  
FIGURE 1. CANTILEVERED JOISTS  
INCLUDING CANT' OVER BRICK REQ.  
I-JOIST BLOCKING ALONG BEARING  
AND RIMBOARD CLOSURE AT ENDS.  
SEE FIGURE 7 TABLES 4 & 5 FOR  
REINFORCEMENT REQUIREMENTS.  
FOR HOLES INCLUDING DUCT  
CHASE AND FIELD CUT OPENINGS  
SEE FIGURE 7 TABLES 1 & 2 OF THE  
INSTALLATION GUIDE. CERAMIC TILE  
APPLICATION AS PER O.B.C. 9.30.6  
LOADING:  
DESIGN LOADS: L/480.000  
LIVE LOAD: 40.0 lb/ft<sup>2</sup>  
DEAD LOAD: 15.0 lb/ft  
TILED AREAS: 20 lb/ft  
SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 30/07/2018  
UPPER FLOOR

Town of Innisfil Certified Model  
10/26/2018 9:47:00 AM kbayley

Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	11 7/8" NI-40x	1	13
J2	10-00-00	11 7/8" NI-40x	1	4
J3	20-00-00	11 7/8" NI-80	1	35
B4	20-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3
B5	20-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	3	3
B6	14-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2

Connector Summary		
Qty	Manuf	Product
13	H1	IUS2.56/11.88
2	H2	HGUS410

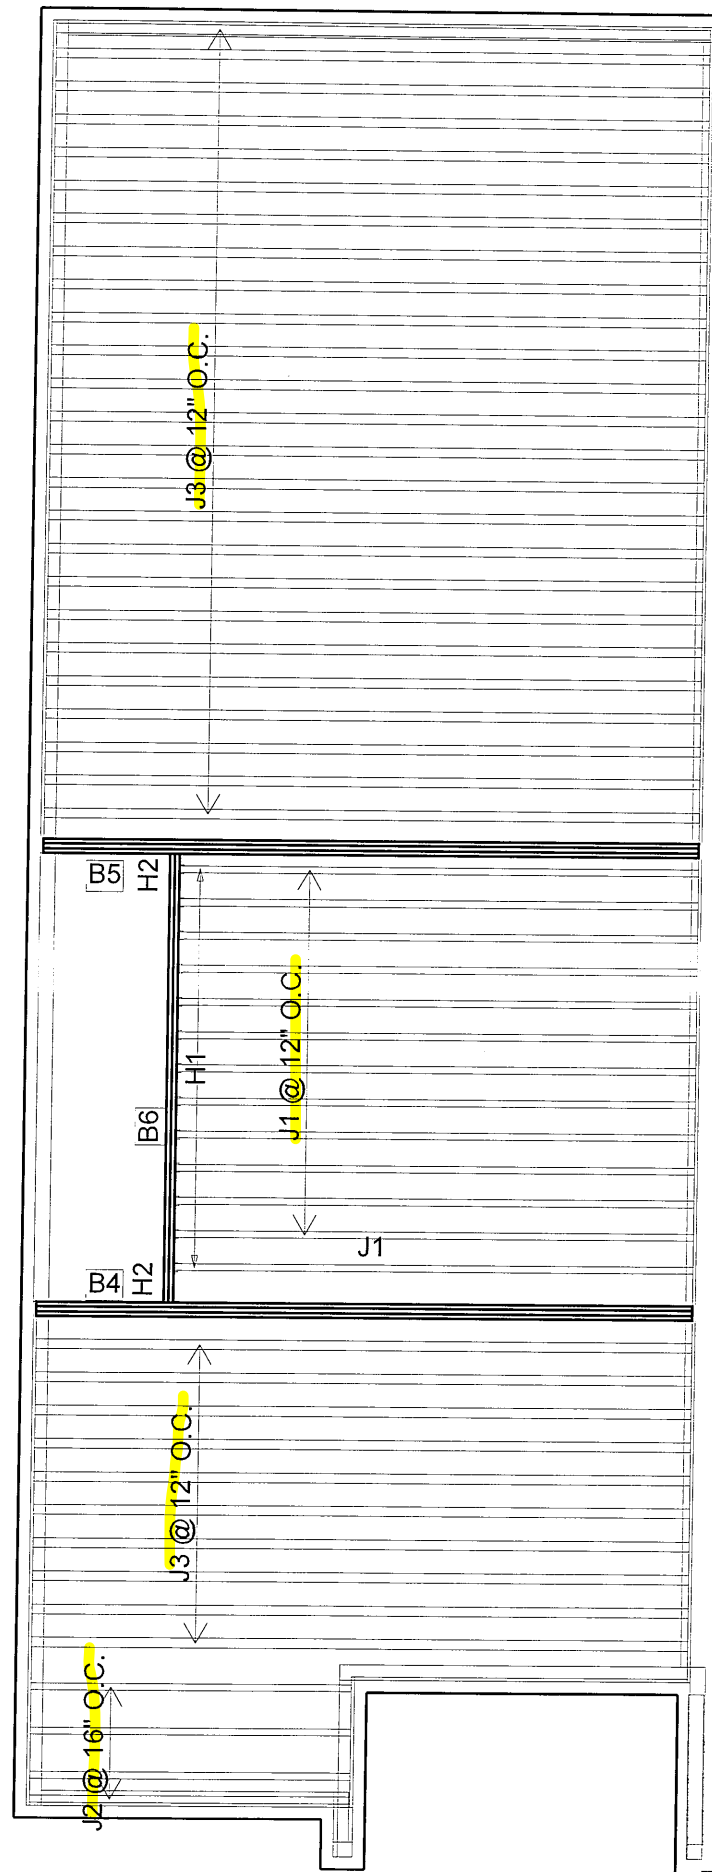

# NORDIC STRUCTURES

**COMPANY**  
TAMARACK LUMBER  
3269 NORTH SERVICE ROAD  
BURLINGTON, ON  
by CZ  
May 1, 2018 17:15


**PROJECT**  
J4-2ND FL.wwb

## Design Check Calculation Sheet Nordic Sizer – Canada 7.0


### Loads:

Load	Type	Distribution	Pat- tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

### Maximum Reactions (lbs), Bearing Resistances (lbs) and Bearing Lengths (in) :

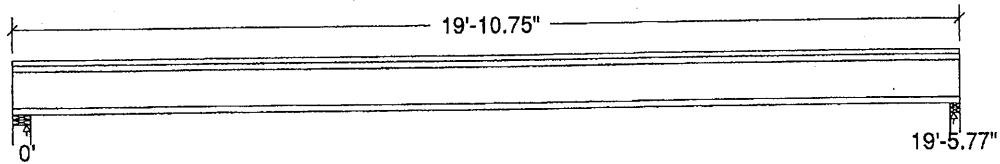

Unfactored:			
Dead	195		195
Live	390		390
Factored:			
Total	828		828
Bearing:			
Resistance			
Joist	2336		2186
Support	10829		5559
Des ratio			
Joist	0.35		0.38
Support	0.08		0.15
Load case	#2		#2
Length	4-3/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	1.00		1.00
fcp sup	769		769
Kzcp sup	1.15		1.09



Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

### Nordic 11-7/8" NI-80 Floor joist @ 12" o.c.

Supports: All - Lumber Wall, No.1/No.2

Total length: 19'-10.75"; Clear span: 19'-3.99"; 3/4" nailed and glued OSB sheathing with 1/2" gypsum ceiling

**This section PASSES the design code check.**

DWG NO. TAM 4224-18H  
STRUCTURAL  
COMPONENT ONLY

T.18071461

**Limit States Design using CSA-O86-09 and Vibration Criterion:**

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 828	Vr = 2336	lbs	Vf/Vr = 0.35
Moment(+)	Mf = 4032	Mr = 11609	lbs-ft	Mf/Mr = 0.35
Perm. Defl'n	0.12 = < L/999	0.65 = L/360	in	0.18
Live Defl'n	0.24 = L/987	0.49 = L/480	in	0.49
Total Defl'n	0.36 = L/658	0.97 = L/240	in	0.36
Bare Defl'n	0.27 = L/877	0.65 = L/360	in	0.41
Vibration	Lmax = 19'-5.8	Lv = 21'-8.9	ft	0.90
Defl'n	= 0.025	= 0.033	in	0.76

**Additional Data:**

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	11609	1.00	1.00	-	1.000	-	-	-	#2
EI	547.1 million	-	-	-	-	-	-	-	#2

**CRITICAL LOAD COMBINATIONS:**

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth,groundwater E=earthquake

L=live(use,occupancy) Ls=live(storage,equipment) f=fire

Load Patterns: s=S/2 L=L+Ls \_=no pattern load in this span


All Load Combinations (LCs) are listed in the Analysis output

**CALCULATIONS:**Deflection: EIEff = 625e06 lb-in<sup>2</sup> K= 6.18e06 lbs

"Live" deflection = Deflection from all non-dead loads (live, wind, snow...)


**Design Notes:**

1. WoodWorks analysis and design are in accordance with the 2010 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-09 Engineering Design in Wood standard, which includes Update No.1 **CONFORMS TO OBC 2012**
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.



DWG NO. TAM 4274-18H  
STRUCTURAL  
COMPONENT ONLY

T.18076461(2)



# Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

**PASSED**

## 1ST FLOOR FRAMING\Flush Beams\B1(i723)

Dry | 1 span | No cant.

July 30, 2018 17:10:01

BC CALC® Member Report

Build 6475

Job name:

File name: TH-11E.mmdl

Address:

Description: 1ST FLOOR FRAMING\Flush Beams\B1(i723)

City, Province, Postal Code: INNISFIL


Specifier:

Customer:

Designer: CZ

Code reports: CCMC 12472-R

Company:

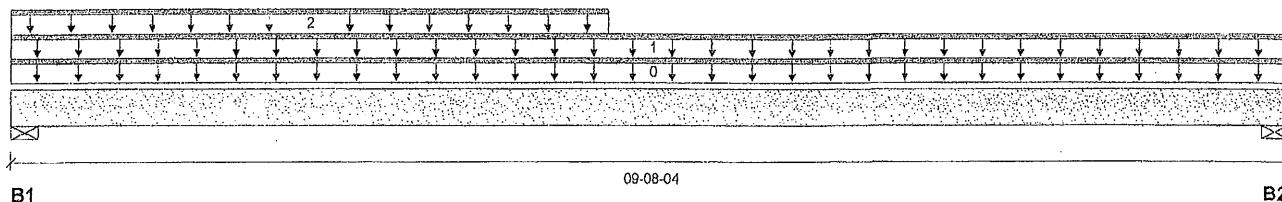

### Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4-3/8"	367 / 0	207 / 0		
B2, 4-3/8"	162 / 0	104 / 0		

### Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-08-04	Top	5				00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	09-08-04	Top	17	9			n/a
2	STAIR	Unf. Lin. (lb/ft)	L	00-00-00	04-05-14	Top	80	40			n/a

### Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1,298 ft-lbs	11,610 ft-lbs	11.2 %	1	03-09-02
End Shear	562 lbs	5,785 lbs	9.7 %	1	01-01-14
Total Load Deflection	L/999 (0.051")	n/a	n/a	4	04-06-10
Live Load Deflection	L/999 (0.032")	n/a	n/a	5	04-06-10
Max Defl.	0.051"	n/a	n/a	4	04-06-10
Span / Depth	11.5				

### Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4-3/8" x 1-3/4"	808 lbs	19.8 %	8.7 %	Unspecified
B2	Wall/Plate 4-3/8" x 1-3/4"	373 lbs	9.1 %	4.0 %	Unspecified

### Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

### Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

DWG NO. TAM 4952-18  
STRUCTURAL  
COMPONENT ONLY

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.

T-1808812



Boise Cascade



## Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

**PASSED**

BC CALC® Design Report

Build 6215

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R

Dry | 1 span | No cant.

File name: TH-11E.mmdl


Description: 2ND FLOOR FRAMING\Flush Beams\B2(i623)

Specifier:

Designer: CZ

Company:

May 3, 2018 07:53:43

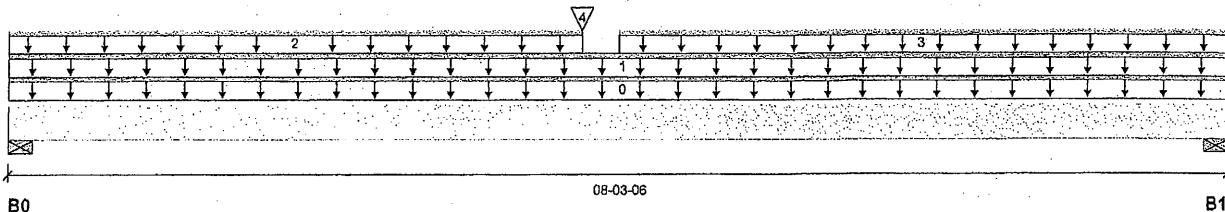

Total Horizontal Product Length = 08-03-06

**Reaction Summary (Down / Uplift) (lbs)**

Bearing	Live	Dead	Snow	Wind
B0, 4-3/8"	391 / 0	408 / 0		
B1, 4"	905 / 0	531 / 0		

**Load Summary**

Tag	Description	Load Type	Ref.	Start	End	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	08-03-06	6				00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	08-03-06	15	7			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	03-10-06		60			n/a
3	STAIR	Unf. Lin. (lb/ft)	L	04-01-05	08-03-06	240	120			n/a
4	LANDING	Conc. Pt. (lbs)	L	03-10-05	03-10-05	175	96			n/a

**Controls Summary**

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3,196 ft-lbs	17,696 ft-lbs	18.1 %	1	04-06-11
End Shear	1,295 lbs	7,232 lbs	17.9 %	1	06-11-08
Total Load Deflection	L/999 (0.048")	n/a	n/a	4	04-03-08
Live Load Deflection	L/999 (0.028")	n/a	n/a	5	04-04-09
Max Defl.	0.048"	n/a	n/a	4	04-03-08
Span / Depth	7.8				

**Bearing Supports**

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 4-3/8" x 1-3/4"	1,097 lbs	26.8 %	11.7 %	Unspecified
B1	Wall/Plate 4" x 1-3/4"	2,021 lbs	54.1 %	23.7 %	Unspecified

**Notes**

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

**CONFORMS TO CBC 2012****Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

DWG NO. TAM 4276-84  
STRUCTURAL  
COMPONENT ONLY

T-18071463



Boise Cascade



## Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

**PASSED**

## 2ND FLOOR FRAMING\Flush Beams\B3(I531)

Dry | 1 span | No cant.

May 3, 2018 07:53:43

BC CALC® Design Report

Build 6215

Job name:

File name: TH-11E.mmdl

Address:

Description: 2ND FLOOR FRAMING\Flush Beams\B3(I531)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer: CZ

Code reports:

CCMC 12472-R

Company:

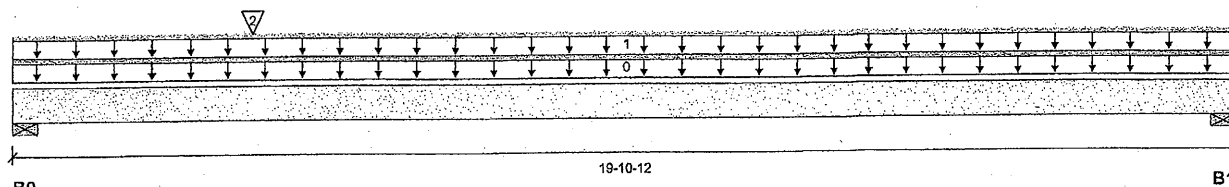

Total Horizontal Product Length = 19-10-12

## Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 4-3/8"	389 / 0	322 / 0		
B1, 2-3/8"	274 / 0	257 / 0		

## Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12		12			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12	24	12			n/a
2	LANDING	Conc. Pt. (lbs)	L	03-10-06	03-10-06	175	96			n/a

## Controls Summary

	Factored Demand	Factored Resistance	Demand/ Resistance	Case	Location
Pos. Moment	3,894 ft-lbs	35,392 ft-lbs	11.0 %	1	08-11-15
End Shear	895 lbs	14,464 lbs	6.2 %	1	01-04-04
Total Load Deflection	L/1,169 (0.2")	n/a	20.5 %	4	09-09-01
Live Load Deflection	L/999 (0.106")	n/a	n/a	5	09-09-01
Max Defl.	0.2"	n/a	n/a	4	09-09-01
Span / Depth	19.7				

## Bearing Supports

	Dim. (LxW)	Demand	Demand/ Resistance Support	Demand/ Resistance Member	Material
B0	Wall/Plate 4-3/8" x 3-1/2"	986 lbs	12.1 %	5.3 %	Unspecified
B1	Wall/Plate 2-3/8" x 3-1/2"	732 lbs	16.5 %	7.2 %	Unspecified

## Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Member has no side loads.

**CONFORMS TO OBC 2012**

DWG NO. TAM 4277-18H  
STRUCTURAL  
COMPONENT ONLY

T-18071464





Boise Cascade



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

BC CALC® Design Report  
Build 6215

2ND FLOOR FRAMING\Flush Beams\B3(i531)

Dry | 1 span | No cant.

May 3, 2018 07:53:43

Job name:

File name: TH-11E.mmdl

Address:

Description: 2ND FLOOR FRAMING\Flush Beams\B3(i531)

City, Province, Postal Code: INNISFIL

Specifier:


Customer:

Designer: CZ

Code reports:

CCMC 12472-R

Company:

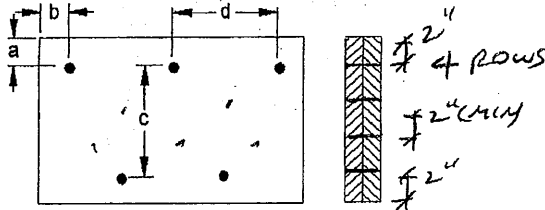**Connection Diagram**a minimum = 2"  
b minimum = 3"c = 7-7/8"  
d = 12"

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Member has no side loads.

Connectors are: 16d Nails

3-1/2" ARDOX SPIRAL

**Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DWG NO. TAM 4277-8H  
STRUCTURAL  
COMPONENT ONLY

T.18071464(2)



Boise Cascade



## Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

BC CALC® Design Report

Build 6215

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports: CCMC 12472-R

## UPPER FLOOR\Flush Beams\B4(i622)

Dry | 1 span | No cant.

May 3, 2018 07:53:43


File name: TH-11E.mmdl

Description: UPPER FLOOR\Flush Beams\B4(i622)

Specifier:

Designer: CZ

Company:

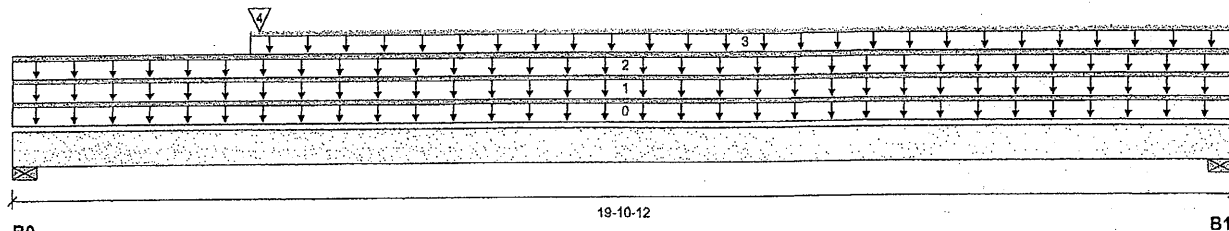

Total Horizontal Product Length = 19-10-12

## Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 4-3/8"	2,055 / 0	1,898 / 0		
B1, 2-3/8"	843 / 0	1,167 / 0		

## Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12		12			00-00-00
1	WALL	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12		60			n/a
2	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12	23	11			n/a
3	FC3 Floor Material	Unf. Lin. (lb/ft)	L	03-10-06	19-10-12	24	12			n/a
4	B6(i597)	Conc. Pt. (lbs)	L	04-00-02	04-00-02	2,041	1,203			n/a

## Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	19,235 ft-lbs	35,392 ft-lbs	54.3 %	1	05-05-15
End Shear	5,252 lbs	14,464 lbs	36.3 %	1	01-04-04
Total Load Deflection	L/247 (0.946")	n/a	97.2 %	4	09-04-11
Live Load Deflection	L/514 (0.455")	n/a	70.1 %	5	09-02-07
Max Defl.	0.946"	n/a	n/a	4	09-04-11
Span / Depth	19.7				

## Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 4-3/8" x 3-1/2"	5,456 lbs	66.7 %	29.2 %	Unspecified
B1	Wall/Plate 2-3/8" x 3-1/2"	2,724 lbs	61.4 %	26.9 %	Unspecified

## Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

Concentrated side-load exceeds allowable magnitude for connection design. Please consult a technical representative or Professional Engineer for the design of the connection. *OK WITH NAILING*

CONFORMS TO OBC 2012



PROVIDE 4 ROWS OF 3-1/2" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE / END DISTANCE. DO NOT USE AIR NAILS.



## Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DWG NO. TAM 422B-8H  
STRUCTURAL  
COMPONENT ONLY

T.18071465



Boise Cascade



## Triple 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

## UPPER FLOOR\Flush Beams\B5(i772)

Dry | 1 span | No cant.

July 30, 2018 17:09:47

BC CALC® Member Report

Build 6475

Job name:

File name: TH-11E.mmdl

Address:

Description: UPPER FLOOR\Flush Beams\B5(i772)

City, Province, Postal Code: INNISFIL


Specifier:

Customer:

Designer: CZ

Code reports: CCMC 12472-R

Company:

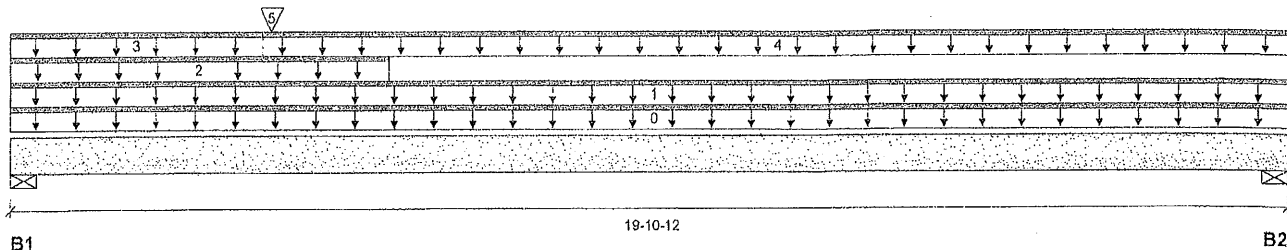

Total Horizontal Product Length = 19'-10"

## Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4-3/8"	2,148 / 0	1,871 / 0		
B2, 2-3/8"	758 / 0	678 / 0		

## Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12	Top	18	18			00-00-00
1	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	19-10-12	Top	20	10			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	05-10-00	Top	60				n/a
3	FC3 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-10-06	Top	9				n/a
4	FC3 Floor Material	Unf. Lin. (lb/ft)	L	03-10-06	19-10-12	Top	14	7			n/a
5	B6(i762)	Conc. Pt. (lbs)	L	04-00-02	04-00-02	Top	2,262	1,517			n/a

## Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	19,351 ft-lbs	55,212 ft-lbs	35.0 %	1	04-00-02
End Shear	5,347 lbs	21,696 lbs	24.6 %	1	01-04-04
Total Load Deflection	L/424 (0.551")	n/a	56.6 %	4	09-00-10
Live Load Deflection	L/782 (0.299")	n/a	46.0 %	5	09-00-10
Max Defl.	0.551"	n/a	n/a	4	09-00-10
Span / Depth	19.7				

## Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4-3/8" x 5-1/4"	5,561 lbs	45.3 %	19.8 %	Unspecified
B2	Wall/Plate 2-3/8" x 5-1/4"	1,985 lbs	29.8 %	13.0 %	Unspecified

## Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA 086. CONFORMS TO OBC 2012

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA 086.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

Concentrated side-load exceeds allowable magnitude for connection design. Please consult a technical representative or Professional Engineer for the design of the connection. O/C WITH NAILING



PROVIDE 4 ROWS OF 3-1/2" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 1" LUMBER EDGE / END DISTANCE. DO NOT USE AIR NAILS.

STAGGER NAILS 4" BETWEEN PILES

DWG NO. YAM 4953 "18K" STRUCTURAL COMPONENT ONLY

## Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJSTM, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.

T-1808813



Boise Cascade



## Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

## UPPER FLOOR\Flush Beams\B6(i706)

Dry | 1 span | No cant.

May 11, 2018 09:40:00

BC CALC® Design Report

Build 6215

Job name:

Address:

City, Province, Postal Code: INNISFIL

Customer:

Code reports:

CCMC 12472-R


File name: TH-11E.mmdl

Description: UPPER FLOOR\Flush Beams\B6(i706)

Specifier:

Designer: CZ

Company:

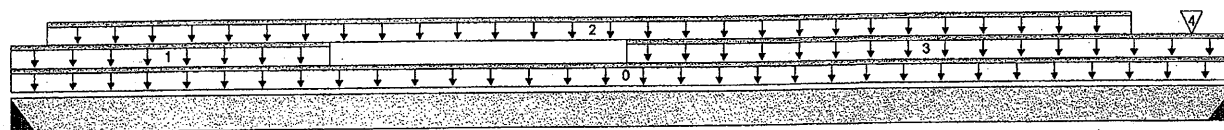

B0

13-06-04

B1

Total Horizontal Product Length = 13-06-04

## Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 2"	2,787 / 0	1,575 / 0		
B1, 2"	2,247 / 0	1,510 / 0		

## Load Summary

Tag	Description	Load Type	Ref.	Start	End	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-06-04	12	120			00-00-00
1	STAIR	Unf. Lin. (lb/ft)	L	00-00-00	03-06-00	240	162			n/a
2	Smoothed Load	Unf. Lin. (lb/ft)	L	00-04-12	12-04-12	324	162			n/a
3	WALL	Unf. Lin. (lb/ft)	L	06-09-02	13-06-04	60				n/a
4	J1(i639)	Conc. Pt. (lbs)	L	13-00-12	13-00-12	314	157			n/a

## Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	17,944 ft-lbs	35,392 ft-lbs	50.7 %	1	06-04-12
End Shear	5,457 lbs	14,464 lbs	37.7 %	1	01-01-14
Total Load Deflection	L/380 (0.42")	n/a	63.1 %	4	06-09-02
Live Load Deflection	L/615 (0.26")	n/a	58.5 %	5	06-09-02
Max Defl.	0.42"	n/a	n/a	4	06-09-02
Span / Depth	13.5				

## Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Hanger 2" x 3-1/2"	6,150 lbs	n/a	72.0 %	HGUS410
B1	Hanger 2" x 3-1/2"	5,258 lbs	n/a	61.6 %	HGUS410

## Cautions

Hanger model HGUS410 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

## Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2010 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

CONFORMS TO OBC 2012



DWG NO. TAM 4280.18 H  
STRUCTURAL  
COMPONENT ONLY

T.180714 67



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****UPPER FLOOR\Flush Beams\B6(i706)**

BC CALC® Design Report

Dry | 1 span | No cant.

May 11, 2018 09:40:00

Build 6215

Job name:

File name: TH-11E.mmdl

Address:

Description: UPPER FLOOR\Flush Beams\B6(i706)

City, Province, Postal Code: INNISFIL


Specifier:

Customer:

Designer: CZ

Code reports: CCMC 12472-R

Company:

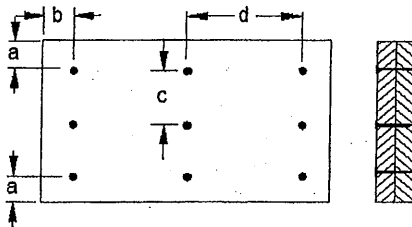**Connection Diagram**

a minimum = 2"

c = 4"


b minimum = 3"

d = 6"

Calculated Side Load = 659.2 lb/ft

Connection design assumes point load is top-loaded. For connection design of side-loaded point loads, please consult a technical representative or professional of Record.

Connectors are: 16d Nails

**3-1/2" ARDOX SPIRAL****Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.




BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

DWG NO. TAM 4280-107  
STRUCTURAL  
COMPONENT ONLY

T. 18071467(2)

## Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf  
Simple Spans, L/480 Deflection Limit  
5/8" OSB G&N Sheathing



Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-2"	13'-9"	N/A	15'-7"	14'-8"	14'-2"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A




  

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	N/A	16'-8"	15'-3"	14'-5"	N/A
	NI-40x	17'-11"	16'-11"	16'-1"	N/A	18'-5"	17'-1"	16'-1"	N/A
	NI-60	18'-2"	17'-1"	16'-4"	N/A	18'-7"	17'-4"	16'-4"	N/A
	NI-70	19'-2"	17'-10"	17'-2"	N/A	19'-7"	18'-3"	17'-7"	N/A
	NI-80	19'-5"	18'-0"	17'-4"	N/A	19'-10"	18'-5"	17'-8"	N/A
11-7/8"	NI-20	19'-6"	18'-1"	17'-3"	N/A	19'-11"	18'-3"	17'-3"	N/A
	NI-40x	21'-0"	19'-6"	18'-8"	N/A	21'-7"	20'-2"	19'-2"	N/A
	NI-60	21'-4"	19'-9"	18'-11"	N/A	21'-11"	20'-4"	19'-6"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-5"	20'-5"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-8"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-11"	20'-11"	N/A	24'-3"	22'-7"	21'-7"	N/A
	NI-60	24'-0"	22'-3"	21'-3"	N/A	24'-8"	22'-11"	21'-11"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-11"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	25'-3"	24'-2"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

## Maximum Floor Spans



Live Load = 40 psf, Dead Load = 15 psf  
Simple Spans, L/480 Deflection Limit  
3/4" OSB G&N Sheathing



Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-9"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-6"	16'-7"	15'-11"	15'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-7"	18'-5"	17'-3"	16'-7"	15'-11"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-6"	18'-6"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-6"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-11"	22'-1"	20'-6"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-70	20'-0"	18'-7"	17'-9"	16'-7"	20'-5"	18'-11"	17'-10"	16'-7"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-7"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-70	23'-4"	21'-8"	20'-8"	19'-7"	23'-10"	22'-3"	21'-2"	19'-9"
	NI-80	23'-7"	21'-11"	20'-11"	19'-9"	24'-1"	22'-6"	21'-5"	20'-0"
14"	NI-90x	24'-3"	22'-6"	21'-6"	20'-4"	24'-8"	23'-0"	22'-0"	20'-9"
	NI-40x	24'-5"	22'-9"	21'-8"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
	NI-60	24'-10"	23'-1"	22'-0"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-70	26'-1"	24'-3"	23'-2"	21'-10"	26'-8"	24'-11"	23'-9"	22'-4"
	NI-80	26'-6"	24'-7"	23'-5"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-9"	27'-9"	25'-11"	24'-8"	23'-4"
	NI-60	27'-3"	25'-5"	24'-2"	22'-10"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-70	28'-8"	26'-8"	25'-4"	23'-11"	29'-3"	27'-4"	26'-1"	24'-8"
	NI-80	29'-1"	27'-0"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90x	29'-11"	27'-10"	26'-6"	25'-0"	30'-6"	28'-5"	27'-2"	25'-8"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



## Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf  
 Simple Spans, L/480 Deflection Limit  
 5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A



Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	17'-9"	16'-1"	15'-1"	N/A	17'-9"	16'-1"	15'-1"	N/A
	NI-60	18'-1"	16'-4"	15'-4"	N/A	18'-1"	16'-4"	15'-4"	N/A
	NI-70	19'-2"	17'-10"	16'-9"	N/A	19'-7"	17'-10"	16'-9"	N/A
	NI-80	19'-5"	18'-0"	17'-1"	N/A	19'-10"	18'-3"	17'-1"	N/A
11-7/8"	NI-20	18'-9"	17'-0"	16'-0"	N/A	18'-9"	17'-0"	16'-0"	N/A
	NI-40x	21'-0"	19'-3"	17'-9"	N/A	21'-3"	19'-3"	17'-9"	N/A
	NI-60	21'-4"	19'-8"	18'-5"	N/A	21'-8"	19'-8"	18'-5"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-4"	20'-0"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-5"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-5"	19'-6"	N/A	24'-1"	21'-5"	19'-6"	N/A
	NI-60	24'-0"	22'-3"	21'-0"	N/A	24'-8"	22'-5"	21'-0"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-9"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	24'-10"	23'-4"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



## Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf  
Simple Spans, L/480 Deflection Limit  
3/4" OSB G&N Sheathing



Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-0"	16'-0"	15'-1"	13'-11"	17'-5"	16'-1"	15'-1"	13'-11"
	NI-60	17'-2"	16'-2"	15'-5"	14'-3"	17'-6"	16'-5"	15'-5"	14'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-6"	18'-5"	17'-3"	16'-7"	15'-6"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	15'-10"
	NI-20	17'-10"	16'-10"	16'-0"	14'-10"	18'-6"	17'-1"	16'-0"	14'-10"
	NI-40x	19'-4"	17'-11"	17'-3"	15'-10"	19'-11"	18'-6"	17'-9"	15'-10"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-1"
11-7/8"	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-5"	22'-1"	20'-6"	19'-6"	17'-5"
14"	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
16"	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-9"	16'-1"	15'-1"	13'-11"	17'-9"	16'-1"	15'-1"	13'-11"
	NI-60	18'-1"	16'-5"	15'-5"	14'-3"	18'-1"	16'-5"	15'-5"	14'-3"
	NI-70	19'-10"	17'-11"	16'-9"	15'-6"	19'-10"	17'-11"	16'-9"	15'-6"
	NI-80	20'-2"	18'-3"	17'-1"	15'-10"	20'-2"	18'-3"	17'-1"	15'-10"
	NI-20	18'-10"	17'-1"	16'-0"	14'-10"	18'-10"	17'-1"	16'-0"	14'-10"
	NI-40x	21'-3"	19'-3"	17'-9"	15'-10"	21'-3"	19'-3"	17'-9"	15'-10"
	NI-60	21'-9"	19'-8"	18'-5"	17'-1"	21'-9"	19'-8"	18'-5"	17'-1"
11-7/8"	NI-70	23'-4"	21'-5"	20'-1"	18'-6"	23'-8"	21'-5"	20'-1"	18'-6"
	NI-80	23'-7"	21'-10"	20'-5"	18'-11"	24'-1"	21'-10"	20'-5"	18'-11"
	NI-90x	24'-3"	22'-6"	21'-3"	19'-7"	24'-8"	22'-7"	21'-3"	19'-7"
	NI-40x	24'-2"	21'-5"	19'-6"	17'-5"	24'-2"	21'-5"	19'-6"	17'-5"
14"	NI-60	24'-9"	22'-5"	21'-0"	19'-6"	24'-9"	22'-5"	21'-0"	19'-6"
	NI-70	26'-1"	24'-3"	22'-9"	21'-0"	26'-8"	24'-3"	22'-9"	21'-0"
	NI-80	26'-6"	24'-7"	23'-3"	21'-6"	27'-1"	24'-10"	23'-3"	21'-6"
	NI-90x	27'-3"	25'-4"	24'-1"	22'-4"	27'-9"	25'-10"	24'-3"	22'-4"
16"	NI-60	27'-3"	24'-11"	23'-5"	21'-7"	27'-6"	24'-11"	23'-5"	21'-7"
	NI-70	28'-8"	26'-8"	25'-3"	23'-4"	29'-3"	26'-11"	25'-3"	23'-4"
	NI-80	29'-1"	27'-0"	25'-9"	23'-10"	29'-8"	27'-6"	25'-10"	23'-10"
	NI-90x	29'-11"	27'-10"	26'-6"	24'-10"	30'-6"	28'-5"	26'-11"	24'-10"


- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



# NORDIC

ENGINEERED WOOD

## INSTALLATION GUIDE FOR RESIDENTIAL FLOORS

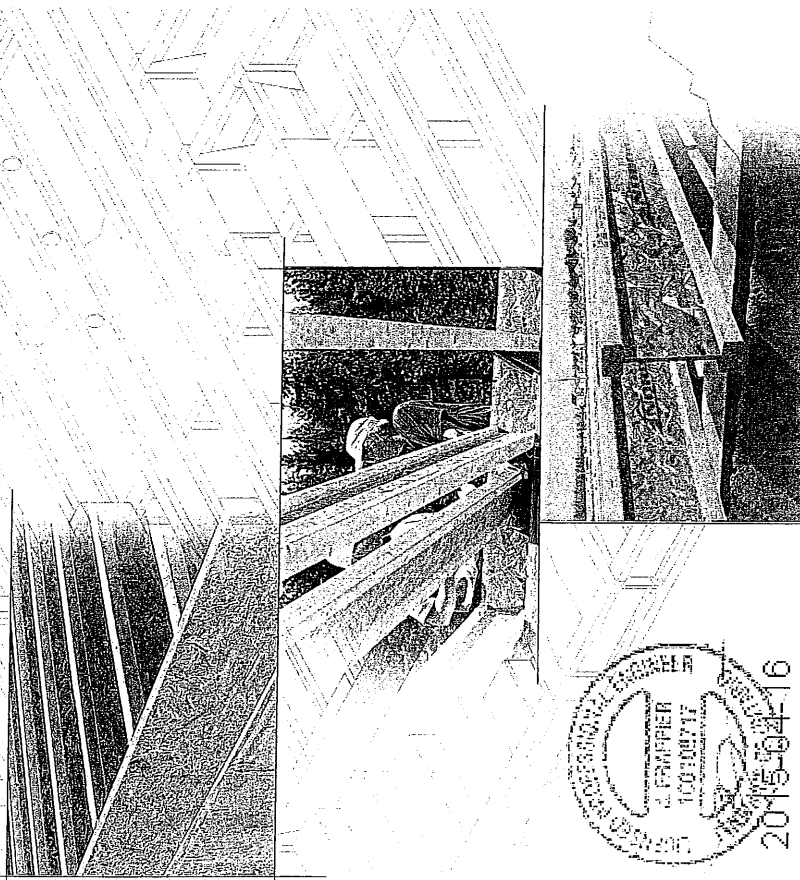


Distributed by:



## SAFETY AND CONSTRUCTION PRECAUTIONS

### WARNING



Do not walk on I-joists until fully fastened and braced, or serious injuries can result.



Never stack building materials over unsheathed I-joists. Once sheathed, do not over-stress I-joist with concentrated loads from building materials.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.





I-joists are not stable until completely installed, and will not carry any load until fully braced and sheathed.

### Avoid Accidents by Following these Important Guidelines:

1. Brace and nail each I-joist as it is installed, using hangers, blocking panels, rim board, and/or cross-bridging at joist ends. When I-joists are applied continuous over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
2. When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joists. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joist rollover or buckling.
  - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each I-joist. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joists.
  - Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of I-joists at the end of the bay.
3. For cantilevered I-joists, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bridging.
4. Install and fully nail permanent sheathing to each I-joist before placing loads on the floor system. Then, stack building materials over beams or walls only.
5. Never install a damaged I-joist.

## STORAGE AND HANDLING GUIDELINES

1. Bundle wrap can be slippery when wet. Avoid walking on wrapped bundles.
2. Store, stack, and handle I-joists vertically and level only.
3. Always stack and handle I-joists in the upright position only.
4. Do not store I-joists in direct contact with the ground and/or flatwise.
5. Protect I-joists from weather, and use spacers to separate bundles.
6. Bundled units should be kept intact until time of installation.
7. When handling I-joists with a crane on the job site, take a few simple precautions to prevent damage to the I-joists and injury to your work crew.
  - Pick I-joists in bundles as shipped by the supplier.
  - Orient the bundles so that the webs of the I-joists are vertical.
  - Pick the bundles at the 5th points, using a spreader bar if necessary.
8. Do not handle I-joists in a horizontal orientation.
9. NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.



# MAXIMUM FLOOR SPANS

- Maximum **clear** spans applicable to simple-span or multiple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration and a live load deflection limit of L/480. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less, or 3/4 inch for joist spacing of 24 inches. Adhesive shall meet the requirements given in CGSB-71.26 Standard. No concrete topping or bridging element was assumed. Increased spans may be achieved with the use of gypsum and/or a row of blocking at mid-span.
- Minimum bearing length shall be 1-3/4 inches for the end bearings, and 3-1/2 inches for the intermediate bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniform loads, an engineering analysis may be required based on the use of the design properties.
- Tables are based on Limit States Design per CAN/CSA O86-09 Standard, and NBC 2010.
- SI units conversion: 1 inch = 25.4 mm  
1 foot = 0.305 m


# WEB STIFFENERS

## RECOMMENDATIONS:

- A **bearing stiffener** is required in all engineered applications with factored reactions greater than shown in the I-joist properties table found of the I-joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
  - A **bearing stiffener** is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
  - A **load stiffener** is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.
- SI units conversion: 1 inch = 25.4 mm

FIGURE 2

## WEB STIFFENER INSTALLATION DETAILS

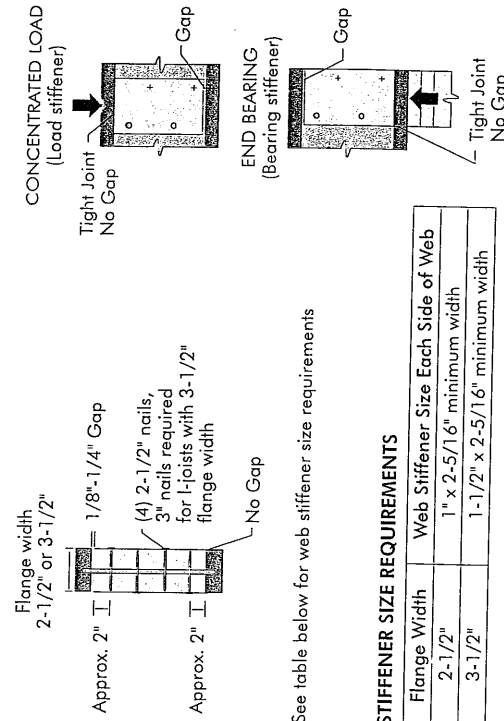

## STIFFENER SIZE REQUIREMENTS

Flange Width	Web Stiffener Size Each Side of Web
2-1/2"	1" x 2-5/16" minimum width
3-1/2"	1-1/2" x 2-5/16" minimum width

See table below for web stiffener size requirements

# NORDIC I-JOIST SERIES


NI-20	NI-40x	NI-60	NI-70	NI-80	NI-90	NI-90x
OSB 3/8"	OSB 3/8"	OSB 3/8"	OSB 3/8"	OSB 3/8"	OSB 3/8"	OSB 3/8"
1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
9-1/2"	9-1/2"	9-1/2"	9-1/2"	9-1/2"	9-1/2"	9-1/2"
11-7/8"	11-7/8"	11-7/8"	11-7/8"	11-7/8"	11-7/8"	11-7/8"
14"	14"	14"	14"	14"	14"	14"
16"	16"	16"	16"	16"	16"	16"
21-10"	21-10"	21-10"	21-10"	21-10"	21-10"	21-10"
22-2"	22-2"	22-2"	22-2"	22-2"	22-2"	22-2"
23-0"	23-0"	23-0"	23-0"	23-0"	23-0"	23-0"
23-3"	23-3"	23-3"	23-3"	23-3"	23-3"	23-3"
23-9"	23-9"	23-9"	23-9"	23-9"	23-9"	23-9"
24-0"	24-0"	24-0"	24-0"	24-0"	24-0"	24-0"
24-1"	24-1"	24-1"	24-1"	24-1"	24-1"	24-1"
24-11"	24-11"	24-11"	24-11"	24-11"	24-11"	24-11"
25-2"	25-2"	25-2"	25-2"	25-2"	25-2"	25-2"
27-3"	27-3"	27-3"	27-3"	27-3"	27-3"	27-3"
33 pieces per unit	33 pieces per unit	33 pieces per unit	33 pieces per unit	33 pieces per unit	33 pieces per unit	33 pieces per unit
S&F No.2	1950I MSR	2100I MSR	1950F MSR	2100F MSR	2400F MSR	NPG Lumber

Chantiers Chibougamau Ltd. harvests its own trees, which enables Nordic products to adhere to strict quality control procedures throughout the manufacturing process. Every phase of the operation, from forest to the finished product, reflects our commitment to quality.

Nordic Engineered Wood I-joists use only finger-jointed black spruce lumber in their flanges, ensuring consistent quality, superior strength and longer span carrying capacity.


# I-JOIST HANGERS

- Hangers shown illustrate the three most commonly used metal hangers to support I-joists.
- All nailing must meet the hanger manufacturer's recommendations.
- Hangers should be selected based on the joist depth, flange width and load capacity based on the maximum spans.
- Web stiffeners are required when the sides of the hangers do not laterally brace the top flange of the I-joist.



2015-04-16


1e



Transfer load from above to bearing below. Install squash blocks per detail 1d. Match bearing area of blocks below to post above.

1f

Use single I-joist for loads up to 3,300 plf, double I-joists for loads up to 6,600 plf (filler block not required). Attach I-joist to top plate using 2-1/2" nails at 6" o.c.




Provide backer for siding attachment unless nailable sheathing is used.

Rim board may be used in lieu of I-joists. Backer is not required when rim board is used. Bracing per code shall be carried to the foundation.


1g

Load bearing wall above shall align vertically with the bearing below. Other conditions, such as offset bearing walls, are not covered by this detail.

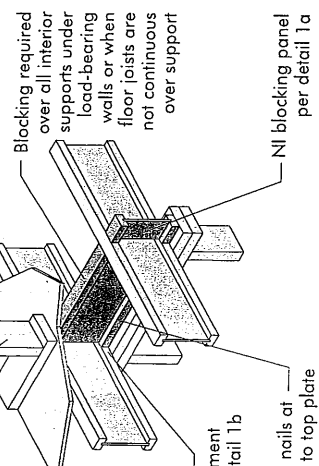

1m


Multiple I-joist header with full depth filler block shown. Nordic Lam or SCL headers may also be used. Verify double I-joist capacity to support concentrated loads.

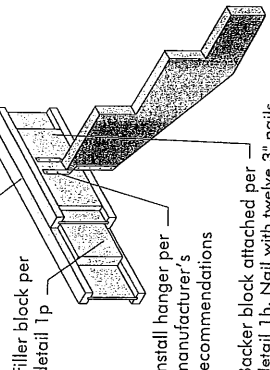

Maximum support capacity = 1,620 lbs.

1k


2x plate flush with inside face of wall or beam. 1/8" overhang allowed past inside face of wall or beam.



Top-mount hanger installed per manufacturer's recommendations.

Note: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

1i




Top- or face-mount hanger installed per manufacturer's recommendations.

Note: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

1h

Backer block (use if hanger load exceeds 360 lbs) Before installing a backer block to a double I-joist, drive three additional 3" nails through the webs and filler block where the backer block will fit. Clinch. Install backer tight to top flange. Use twelve 3" nails, clinched when possible. Maximum factored resistance for hanger for this detail = 1,620 lbs.

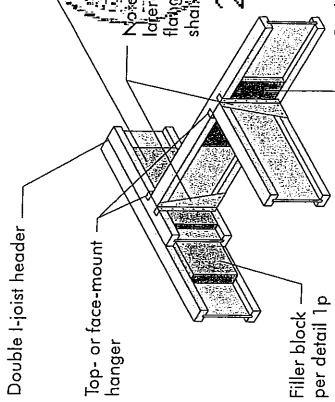


For hanger capacity see hanger manufacturer's recommendations. Verify double I-joist capacity to support concentrated loads.

BACKER BLOCKS (Blocks must be long enough to permit required nailing without splitting)

Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

\* Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA-O325 or CAN/CSA-OA37 Standard.  
\*\* For face-mount hangers use net joist depth minus 3-1/4" for joists with 1-1/2" thick flanges. For 2" thick flanges use net depth minus 4-1/4".

1p



1/8" to 1/4" gap between top flange and filler block


Notes:

- Support back of I-joist web during nailing to prevent damage to web/flange connection.
- Leave a 1/8 to 1/4-inch gap between top of filler block and bottom of top I-joist flange.
- Filler block is required between joists for full length of span.
- Nail joists together with two rows of 3" nails at 12 inches o.c. (clinched when possible) on each side of the double I-joist. Total of four nails per foot required. If nails can be clinched, only two nails per foot are required.
- The maximum factored load that may be applied to one side of the double joist using this detail is 860 lbf/ft. Verify double I-joist capacity.

#### FILLER BLOCK REQUIREMENTS FOR DOUBLE I-JOIST CONSTRUCTION

Flange Size	Joist Depth	Filler Block Size
2-1/2" x 1-1/2"	9-1/2"	2-1/8" x 6"
	11-7/8"	2-1/8" x 8"
	14"	2-1/8" x 10"
	16"	2-1/8" x 12"
3-1/2" x 1-1/2"	9-1/2"	3" x 6"
	11-7/8"	3" x 8"
	14"	3" x 10"
	16"	3" x 12"
3-1/2" x 2"	11-7/8"	3" x 7"
	14"	3" x 9"
	16"	3" x 11"

1s

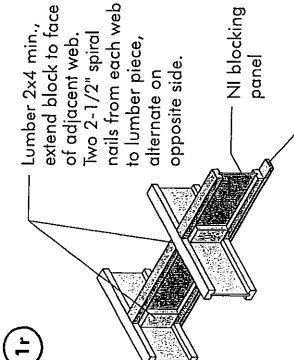

Notes:

- In some local codes, blocking is prescriptively required in the first joist space (or first and second joist space) next to the starter joist. Where required, see local code requirements for spacing of the blocking.
- All nails are common spiral in this detail.

Optional: Minimum 1x4 inch strap applied to underside of joist at blocking line or 1/2 inch minimum gypsum ceiling attached to underside of joists.


# INSTALLING NORDIC I-JOISTS

- Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, contact supplier.
- Except for cutting to length, I-joist flanges should **never** be cut, drilled, or notched.
- Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
- I-joists must be anchored securely to supports before floor sheathing is attached, and supports for multiple spans must be level.
- Minimum bearing lengths: 1-3/4 inches for end bearings and 3-1/2 inches for intermediate bearings.
- When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
- Leave a 1/16-inch gap between the I-joist end and a header.
- Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unusual or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
- Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
- Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
- For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squash blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
- Due to shrinkage, common framing lumber set on edge **may never** be used as blocking or rim boards. I-joist blocking panels or other engineered wood products – such as rim board – must be cut to fit between the I-joists, and an I-joist-compatible depth selected.
- Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
- If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
- Nail spacing: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.


FIGURE 1

## TYPICAL NORDIC I-JOIST FRAMING AND CONSTRUCTION DETAILS

Some framing requirements such as erection bracing and blocking panels have been omitted for clarity.

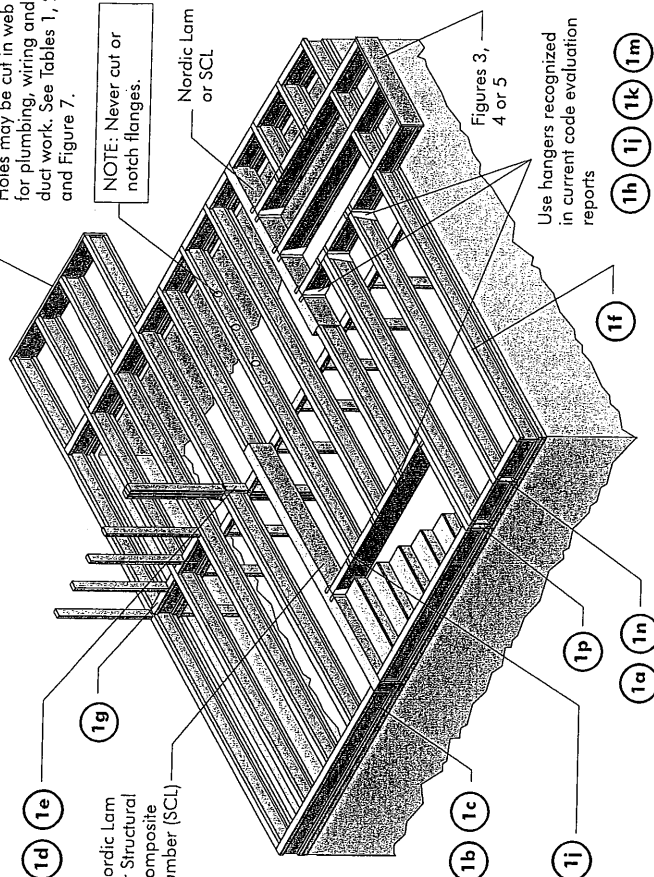


All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.122" dia.) common spiral nails may be substituted for 2-1/2" (0.128" dia.) common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.

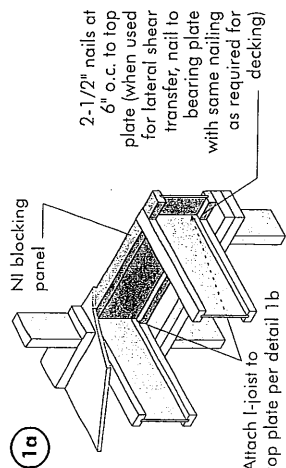


Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
NI Joists	3,300

\*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.




Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	8,090

\*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

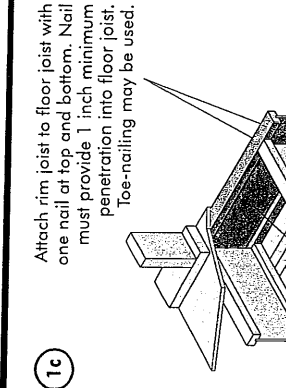

Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	4,300




Pair of Squash Blocks	Maximum Factored Vertical per Pair of Squash Blocks (lbs)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300

Provide lateral bracing per detail 1a, 1b, or 1c

# CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)

Method 1 — SHEATHING REINFORCEMENT ONE SIDE

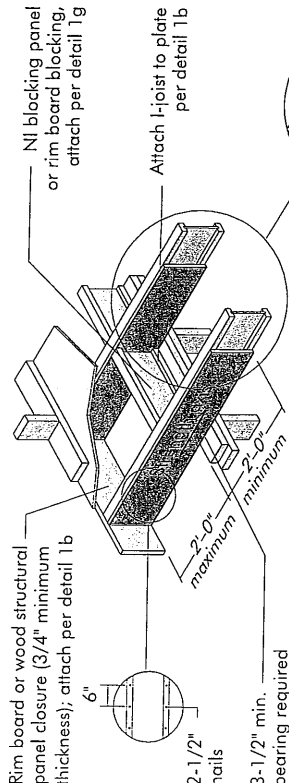


Method 2 — SHEATHING REINFORCEMENT TWO SIDES

- Use same installation as Method 1 but reinforce both sides of I-joist with sheathing.
- Use nailing pattern shown for Method 1 with opposite face nailing offset by 3".


Note: Canadian softwood plywood sheathing or equivalent (minimum thickness 3/4") required on sides of joist. Depth shall match the full height of the joist. Nail with 2-1/2" nails at 6" o.c., top and bottom flange. Install with face grain horizontal. Attach I-joist to plate at all supports per detail 1b. Verify reinforced I-joist capacity.

Alternate Method 2 — DOUBLE I-JOIST

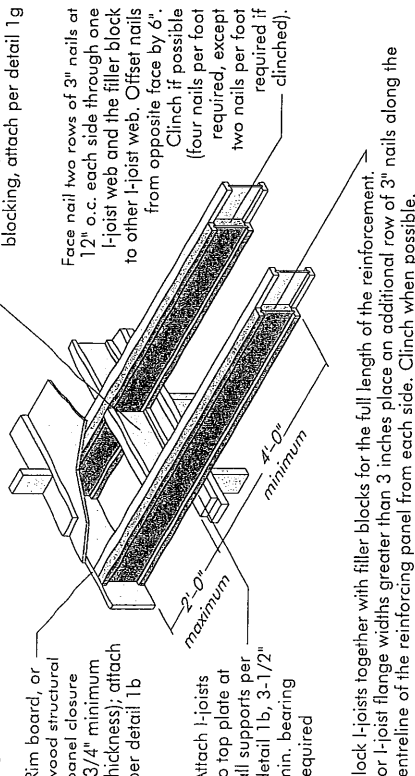

Block I-joists together with filler blocks for the full length of the reinforcement. For I-joist flange widths greater than 3 inches place an additional row of 3" nails along the centreline of the reinforcing panel from each side. Clinch when possible.

FIGURE 4 (continued)

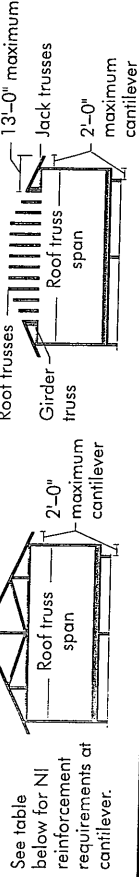

For hip roofs with the jack trusses running parallel to the cantilevered floor joists, the I-joist reinforcement requirements for a span of 26 ft. shall be permitted to be used.

CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft.)	ROOF LOADING (UNFACTORED)									
		LL = 30 psf, DL = 15 psf					LL = 40 psf, DL = 15 psf				
		JOIST SPACING (in.)					JOIST SPACING (in.)				
		12	16	19.2	24		12	16	19.2	24	
9-1/2"	26	N	N	N	2		N	N	N	2	
	28	N	N	N	X		N	N	N	X	
	30	N	N	N	X		N	N	N	X	
	32	N	N	N	X		N	N	N	X	
	34	N	N	N	X		N	N	N	X	
11-7/8"	26	N	N	N	2		N	N	N	2	
	28	N	N	N	1		N	N	N	2	
	30	N	N	N	1		N	N	N	2	
	32	N	N	N	1		N	N	N	2	
	34	N	N	N	1		N	N	N	2	
14"	26	N	N	N	2		N	N	N	2	
	28	N	N	N	1		N	N	N	2	
	30	N	N	N	1		N	N	N	2	
	32	N	N	N	1		N	N	N	2	
	34	N	N	N	1		N	N	N	2	
16"	26	N	N	N	2		N	N	N	2	
	28	N	N	N	1		N	N	N	2	
	30	N	N	N	1		N	N	N	2	
	32	N	N	N	1		N	N	N	2	
	34	N	N	N	1		N	N	N	2	


- N = No reinforcement required.
  - 1 = NI reinforced with 3/4" wood structural panel on one side only.
  - 2 = NI reinforced with 3/4" wood structural panel on both sides, or double I-joist.
  - X = Try a deeper joist or closer spacing.
2. Maximum design load shall be: 15 psf roof dead load, 55 psf floor total load, and 80 psf wall load. Wall load is based on 3'-0" maximum width window or door openings.
- For larger openings, or multiple 3'-0" width openings spaced less than 6'-0" o.c., additional joists beneath the opening's cripple studs may be required.
  - Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.
  - For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam. When the roof is framed using a ridge board, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.
  - Cantilevered joists supporting girder trusses or roof beams may require additional reinforcing.



# RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:

1. The distance between the inside edge of the support and the centreline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
2. I-joist top and bottom flanges must NEVER be cut, notched, or otherwise modified.
3. Whenever possible, field-cut holes should be centred on the middle of the web.
4. The maximum size hole or the maximum depth of a duct chase opening that can be cut into an I-joist web shall equal the clear distance between the flanges of the I-joist minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole or opening and the adjacent I-joist flange.
5. The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
6. Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the longest side of the longest rectangular hole or duct chase opening) and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
7. A knockout is **not** considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
8. Holes measuring 1-1/2 inches or smaller shall be permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.
9. A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
10. All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
11. Limit three maximum size holes per span, of which one may be a duct chase opening.
12. A group of round holes at approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

FIGURE 7  
FIELD-CUT HOLE LOCATOR

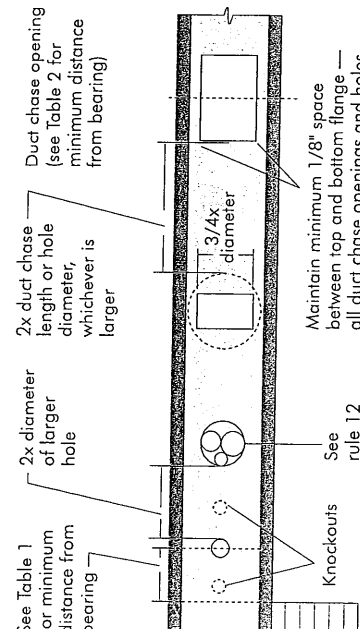

A knockout is **NOT** considered a hole, may be utilized wherever it occurs and may be ignored for purposes of calculating minimum distances between holes.

Knockouts are pre-scored holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on centre along the length of the I-joist. Where possible, it is preferable to use knockouts instead of field-cut holes.



Holes in webs should be cut with a sharp saw.

For rectangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joist.

TABLE 1  
LOCATION OF CIRCULAR HOLES IN JOIST WEBS  
Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of hole (ft.-in.)															Span adjustment Factor
		Round hole diameter (in.)															
		2	3	4	5	6	6 1/4	7	8	8-5/8	9	10	10-3/4	11	12	12-3/4	
9-1/2"	NI-20	0-7"	1-6"	2-10"	4-3"	5-8"	6-0"	...	...	...	...	...	...	...	...	13-6"	
	NI-40x	0-7"	1-6"	3-0"	4-4"	6-0"	6-4"	...	...	...	...	...	...	...	...	14-9"	
	NI-60	1-3"	2-6"	4-0"	5-4"	7-0"	7-5"	...	...	...	...	...	...	...	...	14-11"	
	NI-70	2-0"	3-4"	4-9"	6-3"	8-0"	8-4"	...	...	...	...	...	...	...	...	15-7"	
	NI-80	2-3"	3-6"	5-0"	6-6"	8-2"	8-8"	...	...	...	...	...	...	...	...	15-9"	
11-7/8"	NI-20	0-7"	0-8"	1-0"	2-4"	3-8"	4-0"	5-0"	6-6"	7-9"	...	...	...	...	...	15-9"	
	NI-40x	0-7"	0-8"	1-3"	2-8"	4-0"	4-4"	5-5"	7-0"	8-4"	...	...	...	...	...	15-6"	
	NI-60	0-7"	1-8"	3-0"	4-3"	5-9"	6-0"	7-3"	8-10"	10-0"	...	...	...	...	...	16-6"	
	NI-70	1-3"	2-6"	4-0"	5-4"	6-9"	7-2"	8-4"	10-0"	11-2"	...	...	...	...	...	16-9"	
	NI-80	1-6"	2-10"	4-2"	5-6"	7-0"	7-5"	8-6"	10-3"	11-4"	...	...	...	...	...	17-5"	
14"	NI-90	0-7"	0-8"	1-5"	3-2"	4-10"	5-4"	6-9"	8-9"	10-2"	...	...	...	...	...	17-7"	
	NI-90x	0-7"	0-8"	0-9"	2-5"	4-4"	4-9"	6-3"	...	...	...	...	...	...	...	17-11"	
	NI-40x	0-7"	0-8"	0-8"	1-0"	2-4"	2-9"	3-9"	5-2"	6-0"	6-6"	8-3"	10-2"	...	...	18-0"	
	NI-60	0-7"	0-8"	1-8"	3-0"	4-3"	4-8"	5-8"	7-2"	8-0"	8-8"	10-8"	...	...	...	17-11"	
	NI-70	0-8"	1-10"	3-0"	4-5"	5-10"	6-2"	7-3"	8-9"	9-9"	10-4"	12-0"	13-5"	...	...	18-2"	
16"	NI-80	0-10"	2-0"	3-4"	4-9"	6-2"	6-5"	7-6"	9-0"	10-0"	10-8"	12-4"	13-9"	...	...	19-2"	
	NI-90	0-7"	0-8"	0-10"	2-5"	4-0"	4-5"	5-9"	7-5"	8-8"	9-4"	11-4"	12-11"	...	...	19-5"	
	NI-90x	0-7"	0-8"	0-8"	2-0"	3-9"	4-2"	5-5"	7-3"	8-5"	9-2"	...	...	...	...	19-9"	
	NI-60	0-7"	0-8"	0-7"	1-6"	2-10"	3-2"	4-2"	5-6"	6-4"	7-6"	8-3"	9-8"	10-2"	12-2"	20-0"	
	NI-70	0-7"	1-0"	2-3"	3-6"	4-10"	5-3"	6-3"	7-8"	8-6"	9-2"	10-8"	12-4"	14-0"	15-6"	20-10"	
18"	NI-80	0-7"	1-3"	2-6"	3-10"	5-3"	5-6"	6-6"	8-0"	9-0"	9-3"	11-0"	12-3"	12-9"	14-5"	16-0"	
	NI-90	0-7"	0-8"	0-8"	1-9"	3-3"	3-8"	4-9"	6-5"	7-5"	8-0"	9-10"	11-3"	11-9"	13-9"	15-4"	
	NI-90x	0-7"	0-8"	0-9"	2-0"	3-6"	4-0"	5-0"	6-9"	7-9"	8-4"	10-2"	11-6"	12-0"	...	21-10"	

Above table may be used for L-joist sections of 4

1. Above table may be used for I-joist spacing of 24 inches on centre or less.
2. Hole location distance is measured from inside face of supports to centre of hole.
3. Distances in this chart are based on uniformly loaded joists.

## OPTIONAL:


The above table is based on the I-joists used at their maximum span. If the I-joists are placed at less than their full maximum span (see Maximum Span for Joist Series in Table 1), the minimum distance from the centreline of the hole to the face of any support (D) as given above may be reduced as follows:

$$\text{Reduced} = \frac{\text{Actual} \times D}{\text{SAF}}$$

Where:

- Reduced = Distance from the inside face of any support to centre of hole, reduced for less-than-maximum span applications (ft).
- Actual = The actual measured span distance between the inside faces of supports (ft).
- SAF = Span Adjustment Factor given in this table.
- D = The minimum distance from the inside face of any support to centre of hole from this table.

If  $\frac{\text{Actual}}{\text{SAF}}$  is greater than 1, use 1 in the above calculation for  $\frac{\text{Actual}}{\text{SAF}}$ .



2015-04-16


TABLE 2  
DUCT CHASE OPENING SIZES AND LOCATIONS — Simple Span Only

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of opening (ft-in.)											
		Duct chase length (in.)											
9-1/2"	NI-20	4-1"	4-5"	4-10"	5-4"	5-8"	6-1"	6-5"	7-1"	7-5"	7-9"	8-3"	8-7"
	NI-40	5-3"	5-8"	6-0"	6-5"	6-10"	7-3"	7-8"	8-2"	8-7"	9-1"	9-6"	10-0"
	NI-60	5-3"	5-8"	6-2"	6-7"	7-1"	7-5"	8-0"	8-3"	8-9"	9-3"	9-8"	10-2"
	NI-70	5-3"	5-8"	5-10"	6-3"	6-7"	7-1"	7-6"	8-1"	8-4"	8-9"	9-3"	9-8"
11-7/8"	NI-20	5-0"	6-2"	7-6"	8-1"	8-5"	7-9"	8-3"	8-9"	9-4"	9-8"	10-1"	10-9"
	NI-40	6-8"	7-2"	8-0"	8-6"	9-1"	9-5"	9-9"	10-3"	10-7"	11-1"	11-5"	11-9"
	NI-60	7-3"	7-7"	8-0"	8-5"	8-10"	9-3"	9-8"	10-1"	10-4"	10-9"	11-2"	11-6"
	NI-70	7-3"	7-7"	8-4"	8-9"	9-2"	9-7"	10-2"	10-5"	10-8"	11-1"	11-4"	11-8"
14"	NI-20	5-0"	8-1"	8-5"	8-10"	9-4"	9-8"	10-2"	10-6"	10-11"	10-15"	10-20"	10-24"
	NI-40	8-1"	8-7"	9-0"	9-6"	10-1"	10-7"	11-2"	11-6"	12-0"	12-5"	12-9"	13-3"
	NI-60	8-1"	8-7"	9-3"	9-8"	10-1"	10-6"	10-11"	11-6"	12-0"	12-5"	13-0"	13-4"
	NI-70	8-1"	8-7"	9-3"	9-8"	10-1"	10-6"	10-11"	11-6"	12-0"	12-5"	13-0"	13-4"
16"	NI-20	9-0"	9-3"	9-5"	10-1"	10-4"	10-8"	11-1"	11-5"	11-9"	12-2"	12-6"	13-0"
	NI-40	9-0"	9-3"	10-0"	10-7"	11-1"	11-5"	11-9"	12-3"	12-7"	13-1"	13-5"	13-9"
	NI-60	9-2"	9-8"	10-5"	11-2"	11-6"	12-0"	12-4"	12-8"	13-2"	13-6"	14-0"	14-4"
	NI-70	9-2"	9-8"	10-5"	11-2"	11-6"	12-0"	12-4"	12-8"	13-2"	13-6"	14-0"	14-4"


1. Above table may be used for I-joist spacing of 24 inches on centre or less.
2. Duct chase opening location distance is measured from inside face of supports to centre of opening.
3. The above table is based on simple-span joists only. For other applications, contact your local distributor.
4. Distances are based on uniformly loaded floor joists that meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. For other applications, contact your local distributor.

# BRICK CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)

## 5a SHEATHING REINFORCEMENT

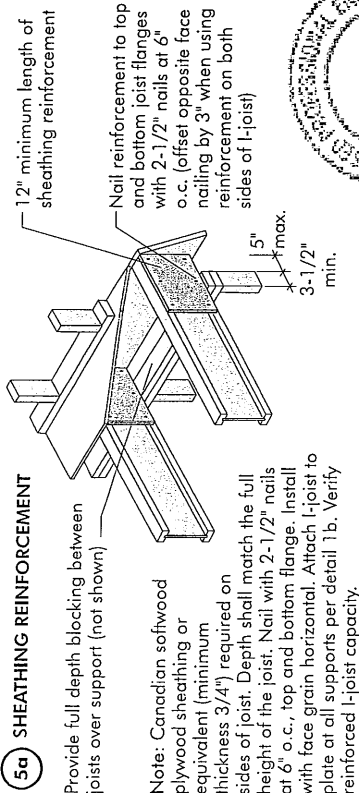

## 5b SET-BACK DETAIL

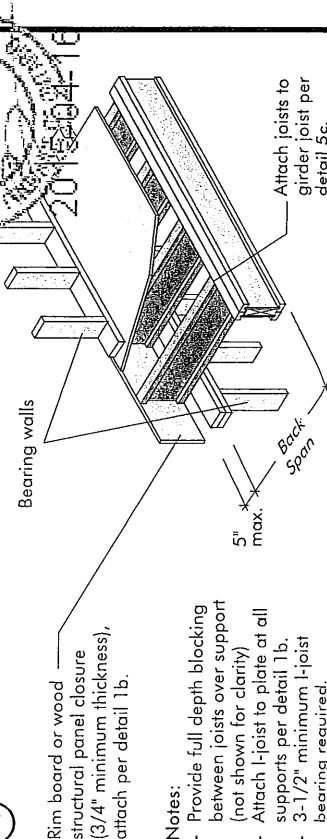

## 5c SET-BACK CONNECTION


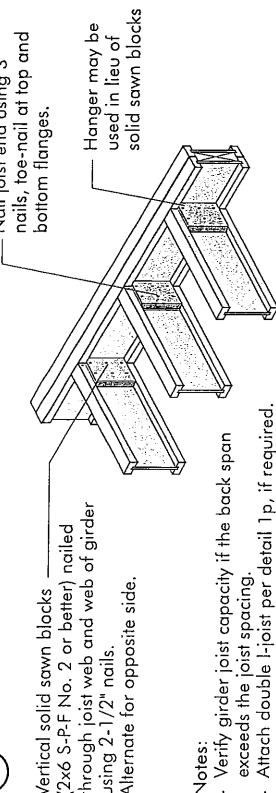


FIGURE 5 (continued)

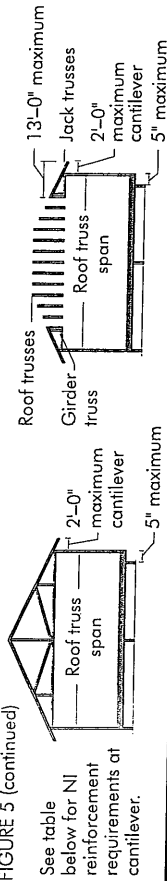

## BRICK CANTILEVER REINFORCEMENT METHODS ALLOWED

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft)	ROOFLOADING (UNFACTORED)									
		LL = 30 psf, DL = 15 psf					LL = 40 psf, DL = 15 psf				
		JOIST SPACING (in.)					JOIST SPACING (in.)				
		12	16	19.2	24		12	16	19.2	24	
9-1/2"	26	1	X	X	X	X	2	X	X	X	X
	28	1	X	X	X	X	2	X	X	X	X
	30	1	X	X	X	X	2	X	X	X	X
	32	2	X	X	X	X	2	X	X	X	X
	34	2	X	X	X	X	2	X	X	X	X
11-7/8"	26	2	X	X	X	X	2	X	X	X	X
	28	2	X	X	X	X	2	X	X	X	X
	30	2	X	X	X	X	2	X	X	X	X
	32	2	X	X	X	X	2	X	X	X	X
	34	2	X	X	X	X	2	X	X	X	X
14"	26	2	X	X	X	X	2	X	X	X	X
	28	2	X	X	X	X	2	X	X	X	X
	30	2	X	X	X	X	2	X	X	X	X
	32	2	X	X	X	X	2	X	X	X	X
	34	2	X	X	X	X	2	X	X	X	X
16"	26	2	X	X	X	X	2	X	X	X	X
	28	2	X	X	X	X	2	X	X	X	X
	30	2	X	X	X	X	2	X	X	X	X
	32	2	X	X	X	X	2	X	X	X	X
	34	2	X	X	X	X	2	X	X	X	X

1. N = No reinforcement required.
2. 1 = NI reinforced with 3/4" wood structural panel on one side only.
3. 2 = NI reinforced with 3/4" wood structural panel on both sides, or double I-joist.
4. X = Try a deeper joist or closer spacing.
5. 2 = Maximum design load shall be: 15 psf roof dead load, 55 psf floor total load, and 80 plf wall load. Wall load is based on 3'-0" maximum width window or door openings.
6. For larger openings, or multiple 3'-0" width openings spaced less than 6'-0" o.c., additional joists beneath the opening's cripple studs may be required.
7. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.
8. For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam.
9. When the roof is framed using a ridge board, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.
10. Cantilevered joists supporting girder trusses or roof beams may require additional reinforcing.



# INSTALLING THE GLUED FLOOR SYSTEM

1. Wipe any mud, dirt, water, or ice from I-joist flanges before gluing.
2. Snap a chalk line across the I-joists four feet in from the wall for panel edge alignment and as a boundary for spreading glue.
3. Spread only enough glue to lay one or two panels at a time, or follow specific recommendations from the glue manufacturer.
4. Lay the first panel with tongue side to the wall, and nail in place. This protects the tongue of the next panel from damage when tapped into place with a block and sledgehammer.
5. Apply a continuous line of glue (about 1/4-inch diameter) to the top flange of a single I-joist. Apply glue in a winding pattern on wide areas, such as with double I-joists.
6. Apply two lines of glue on I-joists where panel ends butt to assure proper gluing of each end.
7. After the first row of panels is in place, spread glue in the groove of one or two panels at a time before laying the next row. Glue line may be continuous or spaced, but avoid squeeze-out by applying a thinner line (1/8 inch) than used on I-joist flanges.
8. Tap the second row of panels into place, using a block to protect groove edges.
9. Stagger end joints in each succeeding row of panels. A 1/8-inch space between all end joints and 1/8-inch at all edges, including T&G edges, is recommended. (Use a spacer tool or an 2-1/2" common nail to assure accurate and consistent spacing.)
10. **Complete all nailing of each panel before glue sets.** Check the manufacturer's recommendations for cure time. (Warm weather accelerates glue setting.) Use 2" ring- or screw-shank nails for panels 3/4-inch thick or less, and 2-1/2" ring- or screw-shank nails for thicker panels. Space nails per the table below. Closer nail spacing may be required by some codes, or for diaphragm construction. The finished deck can be walked on right away and will carry construction loads without damage to the glue bond.

## FASTENERS FOR SHEATHING AND SUBFLOORING(1)

Maximum Joist Spacing (in.)	Minimum Panel Thickness (in.)	Nail Size and Type				Maximum Spacing of Fasteners	
		Common Wire or Spiral Nails	Ring Thread Nails or Screws	Staples			
16	5/8	2"	1-3/4"	2"		Edges	12"
20	5/8	2"	1-3/4"	2"		Edges	12"
24	3/4	2"	1-3/4"	2"		Edges	12"

1. Fasteners of sheathing and subflooring shall conform to the above table.
2. Staples shall not be less than 1/16-inch in diameter or thickness, with not less than a 3/8-inch crown driven with the crown parallel to framing.
3. Flooring screws shall not be less than 1/8-inch in diameter.
4. Special conditions may impose heavy traffic and concentrated loads that require construction in excess of the minimums shown.
5. Use only adhesives conforming to CAN/CGSB-71.26 Standard. Adhesives for Field-Gluing Plywood to Lumber Framing for Floor System, applied in accordance with the manufacturer's recommendations. If OSB panels with sealed surfaces and edges are to be used, use only solvent-based glues; check with panel manufacturer.

Ref.: NRC-CNRC, National Building Code of Canada 2010, Table 9.23.3.5.


### IMPORTANT NOTE:

Floor sheathing must be field glued to the I-joist flanges in order to achieve the maximum spans shown in this document. If sheathing is nailed only, I-joist spans must be verified with your local distributor.


# RIM BOARD INSTALLATION DETAILS

## 8a ATTACHMENT DETAILS WHERE RIM BOARDS ABUT


Rim board joint between floor joists

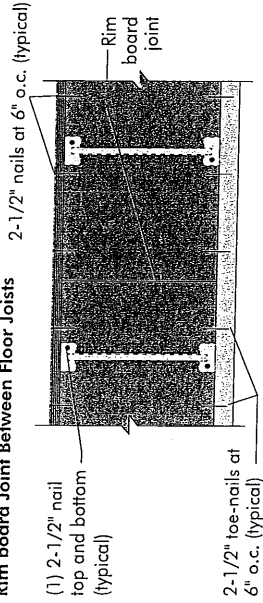


Rim board joint at corner

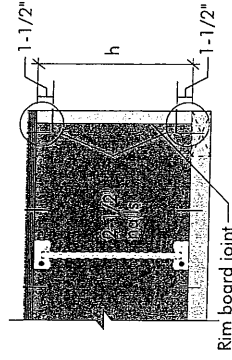

## 8b TOE-NAIL CONNECTION AT RIM BOARD



## 8c 2X LEDGER TO RIM BOARD ATTACHMENT DETAIL

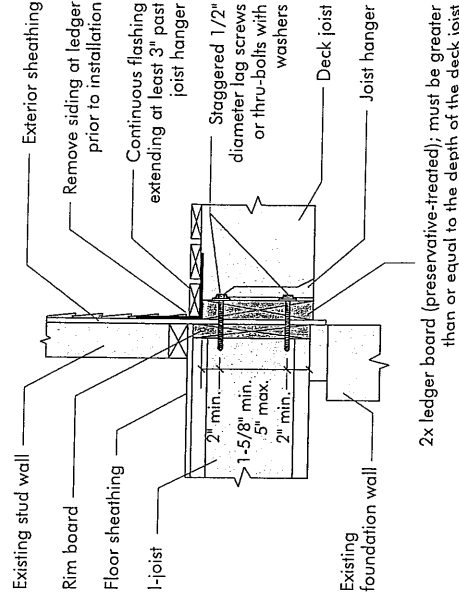

## PRODUCT WARRANTY

Chantiers Chibougamau guarantees that, in accordance with our specifications, Nordic products are free from manufacturing defects in material and workmanship.

Furthermore, Chantiers Chibougamau warrants that our products, when utilized in accordance with our handling and installation instructions, will meet or exceed our specifications for the lifetime of the structure.