

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools Needed

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level
- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- 1" (2.5 cm) drill bit (for wall cabinet installations)

Parts Needed

- UL listed or CSA approved conduit connector
- UL listed wire connectors

Parts Needed - Flush Installation

- W10801485 Stainless steel flush installation kit for 27" (68.6 cm) models
- W10801486 Stainless steel flush installation kit for 30" (76.2 cm) models
- W10801487 Black flush installation kit for 30" (76.2 cm) models

To order, see the "Assistance or Service" section of the Use and Care Guide.

Parts Supplied



- A. Spacer bars (2)
- B. Bottom vent (1)
- C. 3/8" (9.5 mm) hex-head washer screws (4)
- D. 3/4" (1.9 cm) pan-head screws (4)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.


- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with microwave oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the microwave oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- For installation above single built-in oven, the junction box must be located inside upper cabinet.
- If you are installing the junction box on rear wall behind the microwave oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the microwave oven will not fit into the cabinet opening.
- Microwave oven support surface must be solid, level, and flush with bottom of cabinet cutout. Floor must be able to support a weight of 108 lbs (49.0 kg).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Product Dimensions

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens



- | | |
|-------------------------------------|-------------------------------------|
| 27" (68.6 cm) models | 30" (76.2 cm) models |
| A. 26 1/4" (66.7 cm) | A. 28 1/4" (72.1 cm) |
| B. 17 1/4" (44.1 cm) | B. 17 1/4" (44.1 cm) |
| C. 22 1/4" (57.1 cm) | C. 22 1/4" (57.1 cm) |
| D. 29 1/4" (75.6 cm) overall width | D. 29 1/4" (75.6 cm) overall width |
| E. 19 1/4" (50.3 cm) overall height | E. 19 1/4" (50.3 cm) overall height |
| F. JAC2430HL: 25 1/4" (64.3 cm) | F. JAC2430HL: 25 1/4" (64.3 cm) |
| JAC2430HL: 24 1/4" (61.9 cm) | JAC2430HL: 24 1/4" (61.9 cm) |

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit



- | | |
|------------------------------------|------------------------------------|
| 27" (68.6 cm) models | 30" (76.2 cm) models |
| A. 26 1/4" (66.7 cm) overall width | A. 28 1/4" (72.1 cm) overall width |

NOTE: The microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/4" to 17 3/4" (44.1 to 45.1 cm) maximum cutout height.

JUL 19 2021

Millwood
Lot 20 PM



INSTALLATION INSTRUCTIONS
27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC
BUILT-IN MICROWAVE OVEN FLUSH
INSTALLATION KIT

INSTRUCTIONS D'INSTALLATION
POUR ENSEMBLE D'INSTALLATION EN
AFFLEUREMENT DE FOUR À MICRO-ONDES
ÉLECTRIQUE ENCASTRÉ DE 27" (68,6 CM)
ET 30" (76,2 CM)

27" (68.6 cm) Flush Installation Kits
Ensembles d'installation en affleurement de 27" (68,6 cm)

	Stainless Steel Acier inoxydable	Stainless Steel/ Acier inoxydable, RISE™/NOIR™
Model# / Modèle n°	Kit PN/ Ensemble référence: W10801485	Kit PN/ Ensemble référence: W11358283
JMC2427DS	**	*
JMC2427IM, JMC2427IL	*	**

30" (76.2 cm) Flush Installation Kits
Ensembles d'installation en affleurement de 30" (76,2 cm)

	Black Noir	Stainless Steel/ Acier Inoxydable	Stainless Steel/ Acier inoxydable, RISE™/NOIR™
Model# / Modèle n°	Kit PN/ Ensemble référence: W10801487	Kit PN/ Ensemble référence: W10601488	Kit PN/ Ensemble référence: W11358282
JMC2430DS	**	*	*
JMC2430DP, JMC2430DS	*	**	*
JMC2430IM, JMC2430IL	*	*	**

* Approved for use.
** Recommended color and approved for use.
* Approuvé pour l'utilisation.
** Couleur recommandée et approuvé pour l'utilisation.

Table of Contents/ Table des matières


BUILT-IN MICROWAVE OVEN SAFETY.....	2	SÉCURITÉ DU FOUR À MICRO-ONDES ENCASTRÉ.....	5
INSTALLATION REQUIREMENTS.....	2	EXIGENCES D'INSTALLATION.....	5
Tools and Parts.....	2	Outils et pièces.....	5
Location Requirements.....	2	Exigences d'emplacement.....	5
INSTALLATION INSTRUCTIONS.....	4	INSTRUCTIONS D'INSTALLATION.....	7
Prepare Built-In Oven.....	4	Assemblage de la trousse d'entretien.....	7
Install Spacer Kit.....	4	Installation de la trousse d'entretien.....	7
Install Microwave Oven.....	4	Installation du four à micro-ondes.....	7
Complete Installation.....	4	Acheter l'installation.....	7

IMPORTANT:
Save for local electrical inspector's use.
IMPORTANT:
À conserver pour consultation par l'inspecteur local des installations électriques.
W11358316A

JUL 19 2021
Millwood
Lot 20 PH1

Cabinet Dimensions - Flush Installation

A 23 1/4" (59 cm) minimum cutout depth is required. These dimensions will result in a 1/4" (6.3 mm) reveal on the top, a 1/4" (6.3 mm) reveal on the sides, and a 1/8" (3.1 mm) reveal on the bottom of the microwave over. The front face of the cleats and platform will be visible and should be treated as a finished surface.

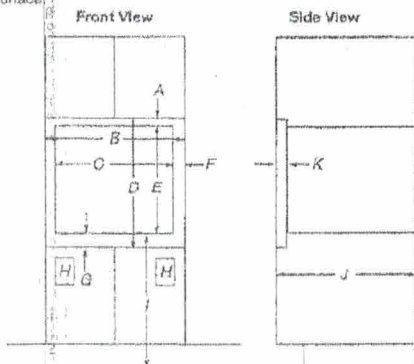

27" (68.4 cm) Models

- A. 1 1/2" (4.7 cm) top clear
- B. 30 1/4" (76.8 cm) minimum width of flush inset cutout
- C. 26 1/4" (66.7 cm) minimum width of opening
- D. 20 1/4" (51.3 cm) minimum height of flush inset cutout
- E. 17 1/2" (44.7 cm) recommended cutout height
- F. 11 1/8" (28.6 cm) side clear
- G. 3/4" (1.9 cm) bottom clear
- H. Recommended junction box location
- I. 40" (101.6 cm) bottom of cutout to floor (recommended)
- J. 23 1/4" (59.0 cm) minimum depth of cutout
- K. 1 1/2" (3.5 cm) recess from front of cabinet

30" (76.2 cm) Models


- A. 1 1/2" (4.7 cm) top clear
- B. 30 1/4" (76.8 cm) minimum width of flush inset cutout
- C. 26 1/4" (66.7 cm) minimum width of opening
- D. 20 1/4" (51.3 cm) minimum height of flush inset cutout
- E. 17 1/2" (44.7 cm) recommended cutout height
- F. 11 1/8" (28.6 cm) side clear
- G. 3/4" (1.9 cm) bottom clear
- H. Recommended junction box location
- I. 40" (101.6 cm) bottom of cutout to floor (recommended)
- J. 23 1/4" (59.0 cm) minimum depth of cutout
- K. 1 1/2" (3.5 cm) recess from front of cabinet

*Cleats must be recessed 1 1/2" (3.5 cm) from the front of the cabinet.

Minimum Installation Clearances

For proper installation, the following minimum clearances must exist below the cabinet opening.

Installation Above Single Built-In Oven



- A. Upper cabinet
- B. Lower single oven
- C. 1" (2.5 cm) from top of oven

JUL 19 2021
Millwood
Lot 20 PH

06-May-2019 13:38:40 EDT | RELEASED

In some European factories the letter "W" of the part code mentioned herein will be automatically replaced by the number "4000" (e.g. "W12345678" becomes "400012345678")

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools Needed

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level
- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- 1" (2.5 cm) drill bit (for wall cabinet installations)

Parts Needed

- UL listed or CSA approved conduit connector
- UL listed wire connectors

Parts Needed - Flush Installation

- W10801485 Stainless steel flush installation kit for 27" (68.6 cm) models
- W10801486 Stainless steel flush installation kit for 30" (76.2 cm) models
- W10801487 Black flush installation kit for 30" (76.2 cm) models

To order see the "Assistance or Service" section of the Use and Care Guide.

Parts Supplied



- A. Spacer bars (2)
- B. Bottom vent (1)
- C. 3/8" (9.5 mm) hex-head washer screws (4)
- D. 3/4" (1.9 cm) pan-head screws (4)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.


- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with microwave oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the microwave oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- For installation above single built-in oven, the junction box must be located inside upper cabinet.
- If you are installing the junction box on rear wall behind the microwave oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the microwave oven will not fit into the cabinet opening.
- Microwave oven support surface must be solid, level, and flush with bottom of cabinet cutout. Floor must be able to support a weight of 103 lbs (46.0 kg).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Product Dimensions

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens




27" (68.6 cm) models

- A. 26 1/4" (66.5 cm)
- B. 17 1/4" (44.1 cm)
- C. 22 1/4" (56.9 cm)
- D. 28 1/4" (71.9 cm) overall width
- E. 19 1/4" (49.1 cm) overall height
- F. 24 1/4" (61.6 cm) overall depth

30" (76.2 cm) models

- A. 28 1/4" (71.9 cm)
- B. 17 1/4" (44.1 cm)
- C. 22 1/4" (56.9 cm)
- D. 28 1/4" (71.9 cm) overall width
- E. 19 1/4" (49.1 cm) overall height
- F. 24 1/4" (61.6 cm) overall depth

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit



27" (68.6 cm) models

- A. 26 1/4" (66.5 cm) overall width

30" (76.2 cm) models

- A. 28 1/4" (71.9 cm) overall width

NOTE: The microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/4" (44.1 to 45.1 cm) maximum cutout height.

JUL 19 2021

Will Wood
Lot 20 Ph 1


A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" to 19 1/4" (48.3 to 50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel - Model W10469901
- 30" (76.2 cm) Stainless Steel - Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

Cabinet Dimensions

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

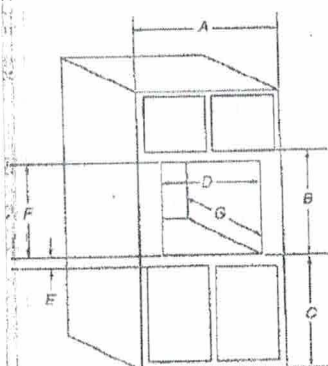


27" (68.6 cm) models
A-27" (68.6 cm) min. cabinet width
B-16 1/2" (41.9 cm) from bottom of cutout to bottom of upper cabinet door
C-10 1/4" (26.5 cm) bottom of cutout to floor (recommended)
D-26 1/4" (66.8 cm) cutout width
E-14 1/2" (36.8 cm) min. bottom of cutout to top of cabinet door
F-17 1/4" (44.1 cm) recommended cutout height (will fit cutout height from 17 1/4" (44.1 cm) to 17 3/4" (45.1 cm))
G-21 1/4" (54.5 cm) min. cutout depth

30" (76.2 cm) models
A-30" (76.2 cm) min. cabinet width
B-16 1/2" (41.9 cm) from bottom of cutout to bottom of upper cabinet door
C-10 1/4" (26.5 cm) bottom of cutout to floor (recommended)
D-26 1/4" (66.8 cm) cutout width
E-14 1/2" (36.8 cm) min. bottom of cutout to top of cabinet door
F-17 1/4" (44.1 cm) recommended cutout height (will fit cutout height from 17 1/4" (44.1 cm) to 17 3/4" (45.1 cm))
G-21 1/4" (54.5 cm) min. cutout depth

Minimum Installation Clearances

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

Installation Above Single Built-In Oven

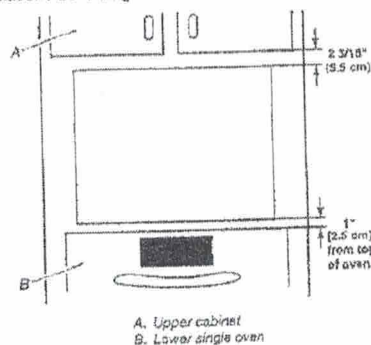

A. Upper cabinet
B. Lower single oven

Electrical Requirements

GROUNDING INSTRUCTIONS

For a permanently connected microwave oven:

The microwave oven must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the microwave oven.

SAVE THESE INSTRUCTIONS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02269-7471
CSA International
5501 East Pleasant Valley Road
Cleveland, OH 44131-5575

Electrical Connection

To properly install your microwave oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

JUL 19 2021

Millwood
Lot 20 Pni




A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" to 19 1/2" (48.3 to 50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel - Model W10469901
 - 30" (76.2 cm) Stainless Steel - Model W10469903
- To order, see the "Assistance or Service" section of the Use and Care Guide.

Cabinet Dimensions

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

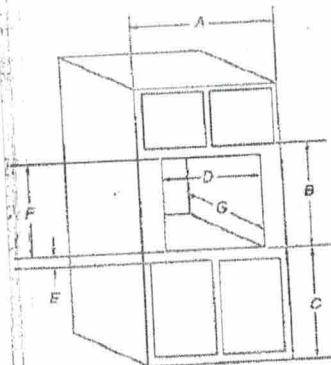


27" (68.6 cm) models
A-27 1/2" (70.2 cm) min. cabinet width
B-19 1/2" (50.2 cm) from bottom of cutout to bottom of upper cabinet door
C-19 1/2" (50.2 cm) bottom of cutout to floor (recommended)
D-26 1/2" (67.3 cm) min. cutout width
E-14 1/2" (36.8 cm) min. bottom of cutout to top of cabinet door
F-17 1/2" (44.4 cm) recommended cutout height with floor cut height from 17 1/2" (44.4 cm) to 24 1/2" (62.1 cm)
G-24 1/2" (62.1 cm) min. cutout depth

30" (76.2 cm) models
A-30 1/2" (77.2 cm) min. cabinet width
B-16 1/2" (41.9 cm) from bottom of cutout to bottom of upper cabinet door
C-16 1/2" (41.9 cm) bottom of cutout to floor (recommended)
D-21 1/2" (54.7 cm) min. cutout width
E-11 1/2" (29.3 cm) min. bottom of cutout to top of cabinet door
F-17 1/2" (44.4 cm) recommended cutout height with floor cut height from 17 1/2" (44.4 cm) to 24 1/2" (62.1 cm)
G-24 1/2" (62.1 cm) min. cutout depth

Minimum Installation Clearances

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

Installation Above Single Built-In Oven

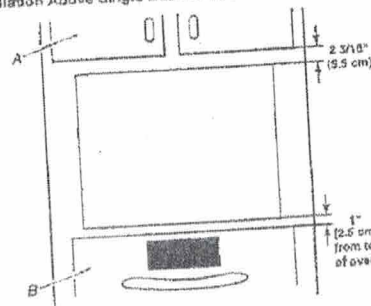

A. Upper cabinet
B. Lower single oven

Electrical Requirements

GROUNDING INSTRUCTIONS

For a permanently connected microwave oven:
The microwave oven must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the microwave oven.

SAVE THESE INSTRUCTIONS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M51 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471
CSA International
5501 East Pleasant Valley Road
Cleveland, OH 44131-3575

Electrical Connection

To properly install your microwave oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

JUL 19 2021

Millwood
Lot 20 Pnl




SINGLE WALL OVENS

JW24271 - 27" x 29-7/8" x 25-5/16"

JW24301, JW34301 - 30" x 29-7/8" x 25-5/16"

PRODUCT DIMENSIONS - SINGLE OVENS




27" (68.6 CM) MODELS

- A. 29-7/8" (75.8 cm) max. overall height
- B. 27-1/8" (68.6 cm) overall width
- C. JW24271M - 25-5/16" (67 cm)
- JW24301, JW34301 - 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 27-3/16" (69 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 25-7/16" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

30" (76.2 CM) MODELS

- A. 29-7/8" (75.8 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JW24301M - 26-3/8" (67 cm)
- JW24301L - 27-3/16" (69 cm)
- JW34301M - 26-3/8" (67 cm)
- JW34301L - 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 27-3/16" (69 cm)
- F. 48" (121.9 cm) flexible conduit length
- G. 28-7/16" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

UNDERCOUNTER CABINET DIMENSIONS - SINGLE OVENS




27" (68.6 CM) MODELS

- A. 27" (68.6 cm) min. cabinet width
- B. 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C. 5-1/4" (13.3 cm) bottom of cutout to floor
- D. 25-1/2" (64.8 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

30" (76.2 CM) MODELS

- A. 30" (76.2 cm) min. cabinet width
- B. 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C. 5-1/4" (13.3 cm) bottom of cutout to floor
- D. 28-1/2" (72.4 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

SINGLE OVENS INSTALLED IN CABINET

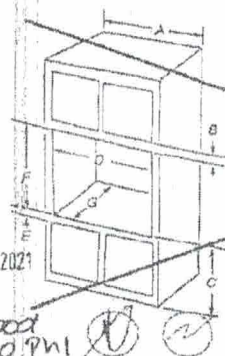

27" (68.6 CM) MODELS

- A. 27" (68.6 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 25-1/2" (64.8 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm) recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 27-1/4" (69.2 cm) and 29-7/16" (74.8 cm) for 27" single ovens.

30" (76.2 CM) MODELS

- A. 30" (76.2 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 28-1/2" (72.4 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm) recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 27-1/4" (69.2 cm) and 29-7/16" (74.8 cm) for 30" single ovens.

JUL 19 2021

Millwood
Lot 20 Pmt

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.



INSTALLATION INSTRUCTIONS 27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN FLUSH INSTALLATION KIT

INSTRUCTIONS D'INSTALLATION ENSEMBLE D'INSTALLATION EN AFFLEUREMENT POUR FOUR ÉLECTRIQUE ENCASTRÉ SIMPLE ET DOUBLE DE 27" (68,6 CM) ET 30" (76,2 CM)

27" (68.6 cm) Flush Installation Kits
Ensembles d'installation en affleurement de 27" (68,6 cm)

	Black Noir	Stainless Steel Acier inoxydable	Stainless Steel/ Acier Inoxydable, RISE™/NOIR™
Model# Modèle n°	Kit PN/ Ensemble référence: W10791232	Kit PN/ Ensemble référence: W10791228	Kit PN/ Ensemble référence: W11357781
JJW2427DB, JJW2827DB	**	*	*
JJW2427DS, JJW2827DS, JJW2727DS	*	**	*
JJW2427IM, JJW2427IL, JJW2827IM, JJW2827IL	*	*	**

30" (76.2 cm) Flush Installation Kits
Ensembles d'installation en affleurement de 30" (76,2 cm)

	Black Noir		Stainless Steel Acier inoxydable		Stainless Steel/ Acier Inoxydable, RISE™/NOIR™	
Model# Modèle n°	Kit PN Ensemble référence: W10791233	Kit PN Ensemble référence: W10837578	Kit PN Ensemble référence: W10791229	Kit PN Ensemble référence: W10837579	Kit PN Ensemble référence: W11357756	Kit PN Ensemble référence: W11357769
JJW2430DS, JJW2430DP, JJW2830DS, JJW2830DP, JJW2730DS	*		**		*	
JJW2430DB, JJW2830DB	**		*		*	
JJW2430IM, JJW2430IL, JJW2830IM, JJW2830IL	*		*		**	
JJW3430DS, JJW3430DP, JJW3830DS, JJW3830DP		*		**		*
JJW3430IM, JJW3430IL, JJW3830IM, JJW3830IL		*		*		**
JJW3430DB, JJW3830DB		**		*		*

* Approved for use.
 ** Recommended color and approved for use.
 * Approuvé pour l'utilisation.
 ** Couleur recommandée et approuvé pour l'utilisation.
IMPORTANT:
 Save for local electrical inspector's use.
IMPORTANT:
 À conserver pour consultation par l'inspecteur local des installations électriques.
 W11358314A

JUL 19 2021

Millwood
Lot 20 Ph

Parts Supplied

- Deflector bracket



- Plastic spacers - (4) single ovens, (6) double ovens



- #6-16 x 1/4" (6.3 mm) screws - (2) for 27" (68.6 cm) models; (4) for 30" (76.2 cm) models

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.

NOTE: Refer to the following "Location Requirements" and the "Location Requirements" section of the Installation Instructions provided with your built-in oven.

- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the oven.
- Oven support surface must be solid, level, and flush with bottom of the cabinet cutout.
- Floor must be able to support a single oven weight of 180 lbs (82 kg).
- Floor must be able to support a double oven weight of 357 lbs (162 kg).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Deflector Bracket Dimensions



27" (68.6 cm) Models

A. 25 1/4" (64.4 cm) overall width

30" (76.2 cm) Models

A. 29 1/4" (74.6 cm) overall width

Cabinet Dimensions - Single Ovens, Flush Installations

A 25" (63.5 cm) minimum cutout depth is required.

These dimensions will result in a 1/4" (6.3 mm) reveal on the top, a 1/4" (6.3 mm) reveal on the sides, and a 1/8" (3.1 mm) reveal on the bottom of the wall oven.


The front face of the cleats and platform will be visible and should be treated as a finished surface.

JUL 19 2021

Millwood
Lot 20 Ph1

06-May-2019 13:38:41 EDT | RELEASED

Single Ovens Installed in Cabinet - Flush Installation

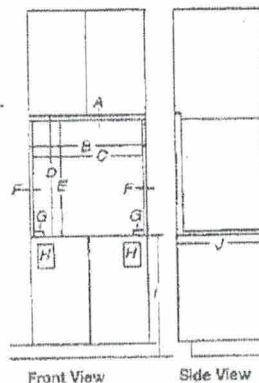

Front View

Side View

322 (83.6 cm) Models

A. 31 1/4" (79.7 mm) top cleat

B. 27 1/4" (69.9 cm) minimum width of flush inset cutout

C. 28 1/4" (71.7 cm) minimum width of opening

D. 30 1/4" (77.3 cm) minimum height of flush inset cutout

E. 29 1/4" (74.4 cm) recommended cutout height

F. 1 1/16" (1.7 cm) side cleat

G. 1 1/2" x 2" (3.8 cm x 5.1 cm) space the entire depth of the cutout

H. Recommended junction box location

I. 4 1/4" - 32" (11.3 cm - 81.3 cm) bottom of cutout to floor

J. 25" (63.5 cm) minimum depth of cutout

30" (76.2 cm) Models

A. 31 1/4" (79.7 mm) top cleat

B. 30 1/4" (76.6 cm) minimum width of flush inset cutout

C. 28 1/4" (71.7 cm) minimum width of opening

D. 30 1/4" (77.3 cm) minimum height of flush inset cutout

E. 29 1/4" (74.4 cm) recommended cutout height

F. 1 1/16" (1.7 cm) side cleat

G. 1 1/2" x 2" (3.8 cm x 5.1 cm) space the entire depth of the cutout

H. Recommended junction box location

I. 4 1/4" - 32" (11.3 cm - 81.3 cm) bottom of cutout to floor

J. 25" (63.5 cm) minimum depth of cutout

*Cleats and spacers must be recessed 1/2" (3.5 cm) from the front of the cabinet.


In some European factories the letter "W" of the part code mentioned herein will be automatically replaced by the number "4000" (e.g. "W12345678" becomes "400012345678")

JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP480H
Overall Width (A)	29-3/4" (75.5 cm)	35-3/4" (90.8 cm)	47-3/8" (121.6 cm)
Crack Depth (B)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Depth without Control Panel (C)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)
Depth with Control Panel Overhang (D)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Depth with Knobs-RISE (E)	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Depth with Photo-NOIR (F)	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

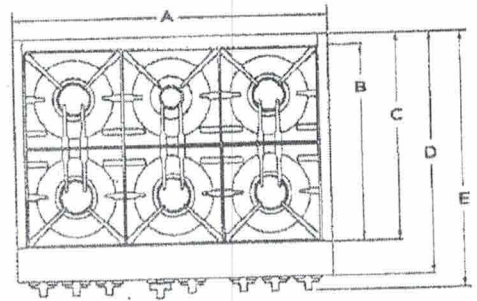

TOP VIEW



JUL 19 2021
 Millwood
 Lot 20 Phil

★ **IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any alterations based on this information. Refer to the installation guide for proper venting, venting pipe, and gas line installation. All dimensions are approximate. UL, CSA, and other applicable codes apply.

JENNAIR® DIMENSIONS
RANGETOPS
PRODUCT

	30" RANGETOP [®] JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP454H
Gate Width (F)	27-7/16" (69.7 cm)	33" (83.8 cm)	44-5/8" (112.7 cm)
Gas Inlet to Side Gas (G)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Center to Gas Inlet (H)	11" (27.9 cm)	14-1/8" (35.9 cm)	19-5/8" (49.5 cm)
Base and Rangetop Width (J)	29-1/8" (74 cm)	35" (88.9 cm)	47-3/4" (120 cm)

*Includes width of grates and griddle.



JUL 19 2021


Millwood
Lot 20 Pnl

JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Height with Grease Filter (J)	9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
Control Panel Height (K)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
Recessed Rangertop Height (L)	7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
Cooking Surface Height (M)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
Recessed Rangertop Depth (N)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Depth with Control Panel (O)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

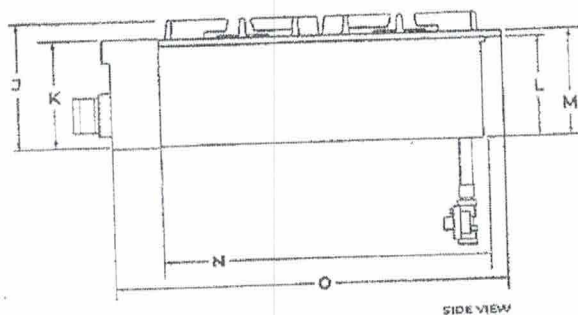

JUL 19 2021

Millwood
Lot 20 pm


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JOCF-30H	36" RANGETOP JOCF-36H	48" RANGETOP JOCF-48H
Removable Area Above Cooking Surfaces Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Rangetop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	42" (30.5 cm) min.

*Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 26 MSC sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

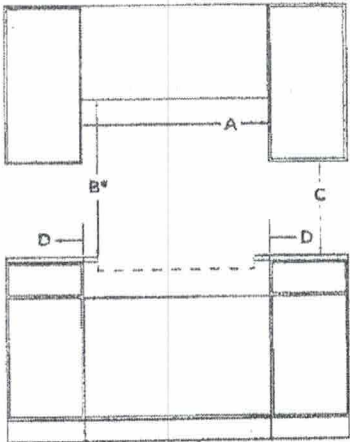


JUL 19 2021

Millwood
Lot 20 Pmt

JENNAIR® DIMENSIONS
RANGETOPS
OPENING AND CLEARANCE

	30" RANGETOP JCCP230H	36" RANGETOP JCCP430H	48" RANGETOP JCCP630H
Recommended Upper Cabinet Depth (E)	13" (33 cm)	13" (33 cm)	13" (33 cm)
Countertop Wall Depth (F)	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.
Cabinet to Countertop Height (G)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)
Cabinet Depth (H)	24" (61 cm)	24" (61 cm)	24" (61 cm)

*If the backwall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

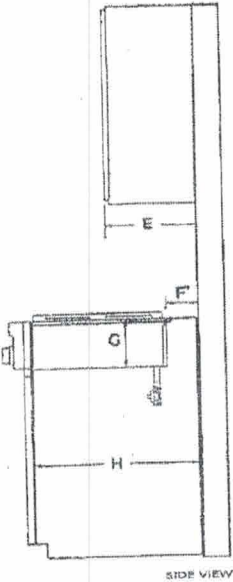

JUL 19 2021


Millwood
Lot 20 Pmt

JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JOCF430H	36" RANGETOP JOCF436H	48" RANGETOP JOCF438H
Countertop and Cabinet Cutout Width (I)	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-5/8" (120.3 cm)
Countertop and Cabinet Depth (J)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
Aperture Width (K)	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
Cutout Width (L)	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

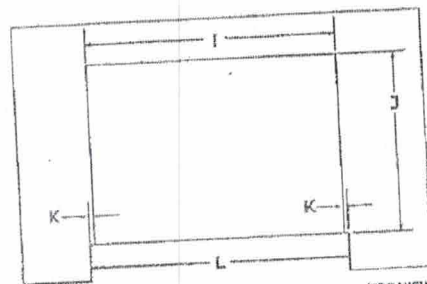

TOP VIEW

JUL 19 2021

Millwood
Lot 20 Pmt

