

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

UPGRADED EDGE PROFILES

4 cm

1/2" BEVEL


HALF BULLNOSE

FULL BULLNOSE

OGEE

DOUBLE OGEE

SINK EDGE



Undermount



Straight Polish Edge

BACK & SIDE SPLASH TOP EDGE PROFILE





Straight

Lot 5 IB  
Bowmanville  
Alves/Simpson

AS



KA

LO+SB.


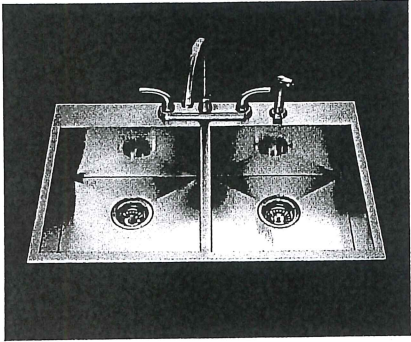


**QDLF2233/8** UPC®  
20 gauge, 18-8 stainless steel  
Topmount or undermount method  
Outside sink dimensions  
22" FB x 33 1/4" LR  
Equal size bowl dimensions  
17" FB x 15" LR x 8" DP  
36" cabinet - recommended minimum  
for Kindred topmount method  
39" cabinet - recommended minimum  
for Kindred undermount method  
33" cabinet - minimum to accept sink bowl  
(refer to Table of Contents page)



X

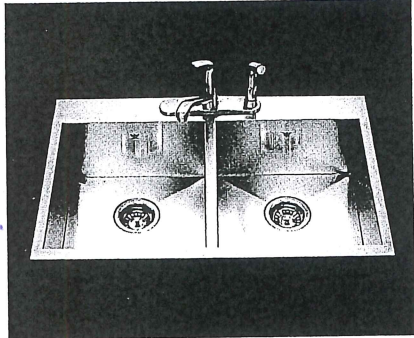



**QDLF2031/8** UPC®  
20 gauge, 18-8 stainless steel  
~~Topmount or undermount method~~  
Outside sink dimensions  
20 9/16" FB x 31 1/4" LR  
Equal size bowl dimensions  
16" FB x 14" LR x 8" DP  
33" cabinet - recommended minimum  
for Kindred topmount method  
36" cabinet - recommended minimum  
for Kindred undermount method  
33" cabinet - minimum to accept sink bowl  
(refer to Table of Contents page)

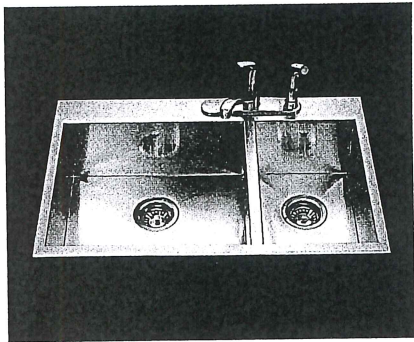

**QCLF2031R/8** UPC®  
20 gauge, 18-8 stainless steel  
Topmount or undermount method  
Outside sink dimensions  
20 9/16" FB x 31 1/4" LR  
Large bowl dimensions  
16" FB x 18" LR x 8" DP  
Small bowl dimensions  
16" FB x 10" LR x 8" DP  
33" cabinet - recommended minimum  
for Kindred topmount method  
36" cabinet - recommended minimum  
for Kindred undermount method  
33" cabinet - minimum to accept sink bowl  
(refer to Table of Contents page)

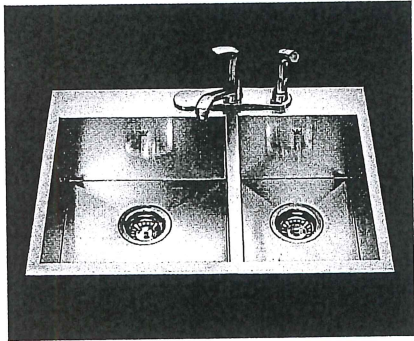


**QCLF2027R/8** UPC®  
20 gauge, 18-8 stainless steel  
Topmount or undermount method  
Outside sink dimensions  
20 9/16" FB x 27 1/4" LR  
Large bowl dimensions  
16" FB x 14" LR x 8" DP  
Small bowl dimensions  
16" FB x 10" LR x 8" DP  
30" cabinet - recommended minimum  
for Kindred topmount method  
33" cabinet - recommended minimum  
for Kindred undermount method  
27" cabinet - minimum to accept sink bowl  
(refer to Table of Contents page)

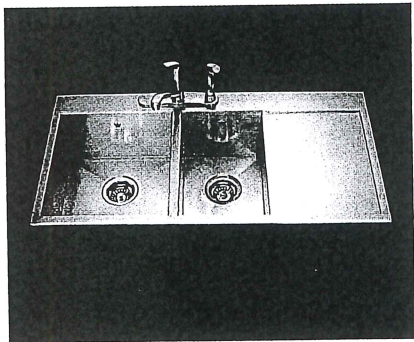

**QCLF2039DBR/8** UPC®  
20 gauge, 18-8 stainless steel  
Topmount or undermount method  
Outside sink dimensions  
20 9/16" FB x 39 3/8" LR  
Large bowl dimensions  
16" FB x 14" LR x 8" DP  
Small bowl dimensions  
16" FB x 10" LR x 8" DP  
30" cabinet - recommended minimum  
for Kindred topmount method  
45" cabinet - recommended minimum  
for Kindred undermount method  
27" cabinet - minimum to accept sink bowl  
(refer to Table of Contents page)


# Align

Traditional | Transitional | Modern

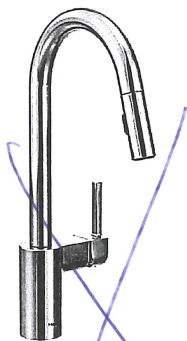


**Kitchen with Pull-Down Spout±**  
Model 7565†

Chrome:	\$	416.21
Other:	\$	519.58

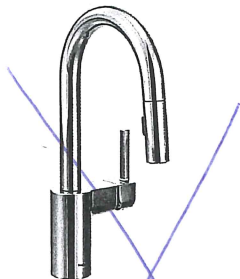

**Bar with Pull-Down Spout±**  
Model 5965†

Chrome:	\$	397.02
Other:	\$	496.03

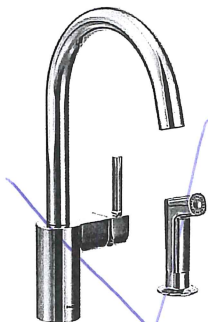

**Kitchen with Side Spray**  
Model 7165†

Chrome:	\$	342.63
Other:	\$	433.94



**Kitchen without Side Spray**  
Model 7365†

Chrome:	\$	298.27
Other:	\$	378.61

† To order, combine the model number with one of these finish letters:



Chrome  
(use faucet  
number only)



SRS

\* Single or Three Hole Installation  
± Single Hole Installation Only

 **MOEN**  
Buy it for looks. Buy it for life.®