


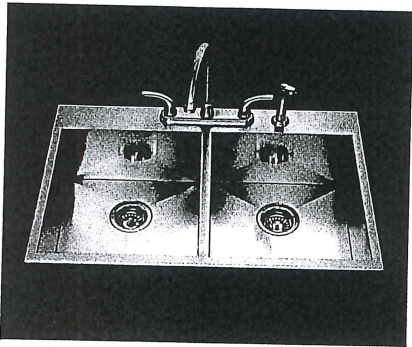


STEEL QUEEN FABRICATED SINKS • DUAL MOUNT



Lo#
37B





QDLF2233/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mod
Outside sink dimensions
22" FB x 33 1/4" LR
Equal size bowl dimensions
17" FB x 15" LR x 8" DP
36" cabinet - recommended minimum
for Kindred topmount method
39" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

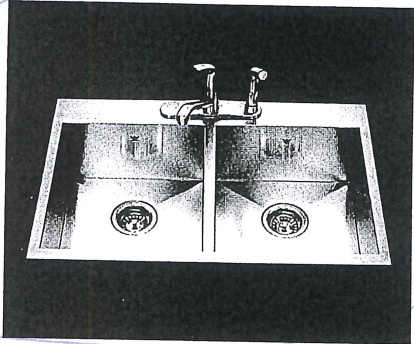



QDLF2031/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mode
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Equal size bowl dimensions
16" FB x 14" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

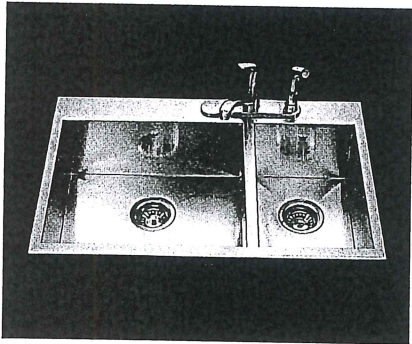

QCLF2031R/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount mode
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Large bowl dimensions
16" FB x 18" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

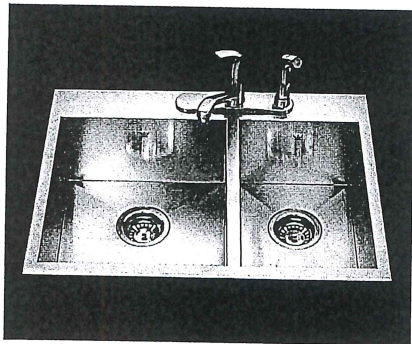

QCLF2027R/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 27 1/4" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
33" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

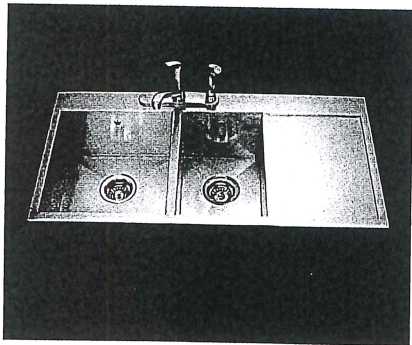

QCLF2039DBR/8 UPC®
20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 39 3/8" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
45" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

UPGRADED EDGE PROFILES

4 cm

½" BEVEL

HALF BULLNOSE

FULL BULLNOSE

OGEE

DOUBLE OGEE

SINK EDGE



Undermount



Straight Polish Edge

BACK & SIDE SPLASH TOP EDGE PROFILE.



Straight

Lot 37 RB
Bowmanville
Walton

NOV 27 2014

(Handwritten signatures in red and blue ink)