
## Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or follow local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or local codes.

## Mobile home installations require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards
- Four-wire power supply cord or cable must be used in a mobile home installation. The appliance wiring will need to be revised. See "Electrical Connection" section.

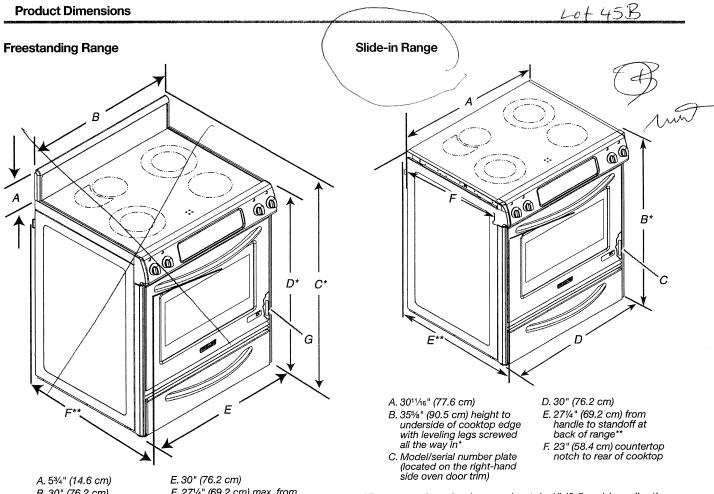

- A. 5¾" (14.6 cm)
  B. 30" (76.2 cm)
  C. 41¾" (106.0 cm)
  overall height with
  leveling legs screwed
  all the way inth
- D. 36" (91.4 cm) cooktop trim height with leveling legs screwed all the way in\*

the leveling legs.

- 271/4" (69.2 cm) max. from handle to standoff at back of range\*\*
- G. Model/serial number plate (located on the right-hand side oven door trim)
- \*Range can be raised approximately 1" (2.5 cm) by adjusting
- \*\*When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 1" (2.5 cm) beyond 24" (61.0 cm) base cabinet.
- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 13/4" (4.4 cm) beyond 24" (61.0 cm) base cabinet.