



STEEL QUEEN FABRICATED SINKS • DUAL MOUNT

W0+44B

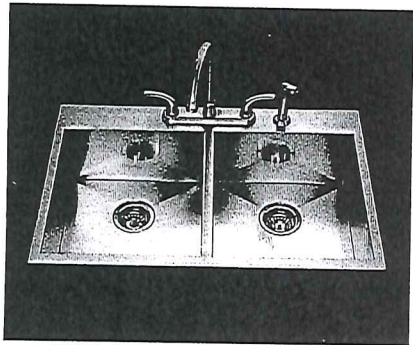

QDLF2233/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model



Outside sink dimensions
22" FB x 33 1/4" LR

Equal size bowl dimensions
17" FB x 15" LR x 8" DP

36" cabinet - recommended minimum
for Kindred topmount method

39" cabinet - recommended minimum
for Kindred undermount method

33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

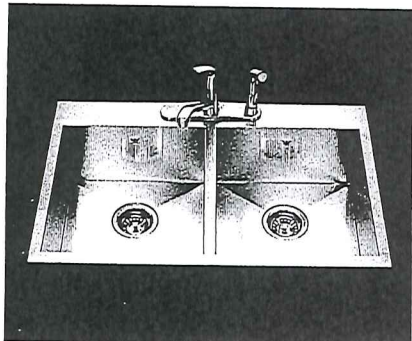

QDLF2031/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model



Outside sink dimensions
20 9/16" FB x 31 1/4" LR

Equal size bowl dimensions
16" FB x 14" LR x 8" DP

33" cabinet - recommended minimum
for Kindred topmount method

36" cabinet - recommended minimum
for Kindred undermount method

33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

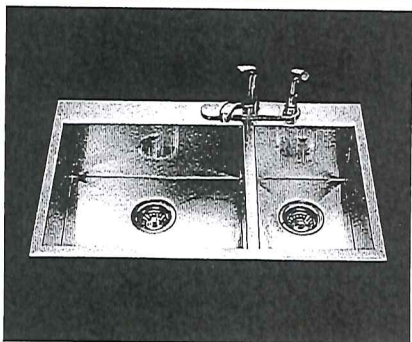

QCLF2031R/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model

Outside sink dimensions
20 9/16" FB x 31 1/4" LR



Large bowl dimensions
16" FB x 18" LR x 8" DP

Small bowl dimensions
16" FB x 10" LR x 8" DP

33" cabinet - recommended minimum
for Kindred topmount method

36" cabinet - recommended minimum
for Kindred undermount method

33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

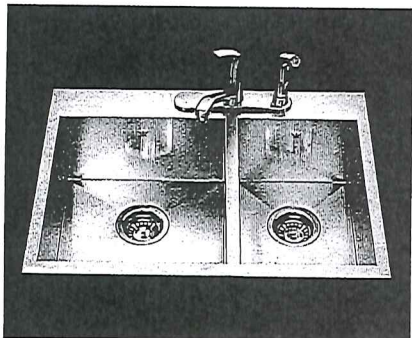

QCLF2027R/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model

Outside sink dimensions
20 9/16" FB x 27 1/4" LR



Large bowl dimensions
16" FB x 14" LR x 8" DP

Small bowl dimensions
16" FB x 10" LR x 8" DP

30" cabinet - recommended minimum
for Kindred topmount method

33" cabinet - recommended minimum
for Kindred undermount method

27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

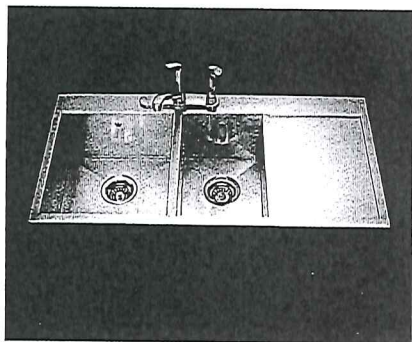

QCLF2039DBR/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model

Outside sink dimensions
20 9/16" FB x 39 3/8" LR

Large bowl dimensions
16" FB x 14" LR x 8" DP

Small bowl dimensions
16" FB x 10" LR x 8" DP


30" cabinet - recommended minimum
for Kindred topmount method

45" cabinet - recommended minimum
for Kindred undermount method

27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)



Kitchen Faucet - OPTION 1

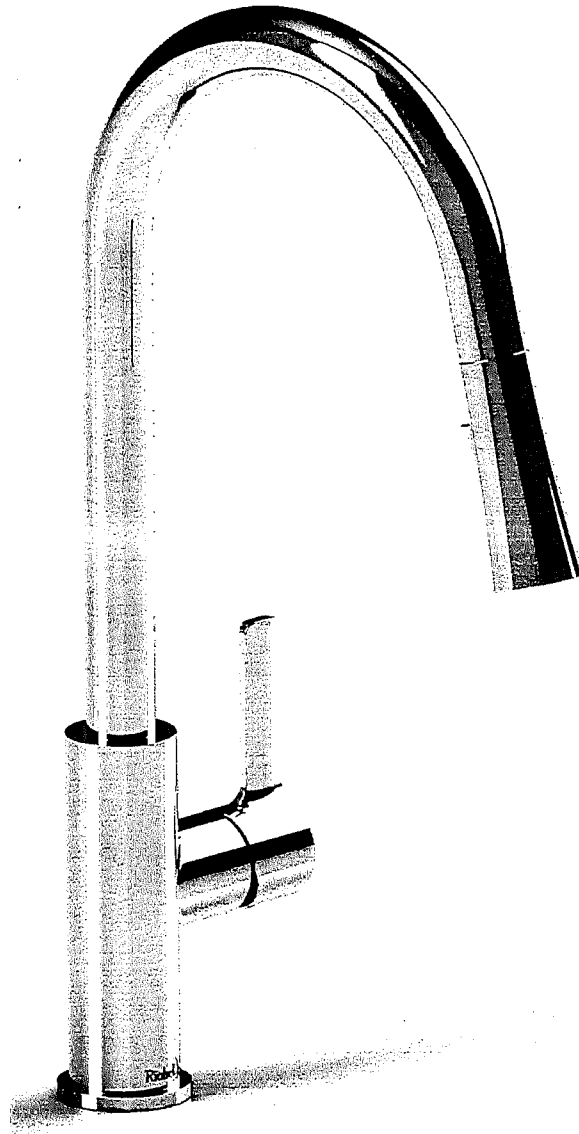

PRONTO Single Hole Dual Spray Pull-Out Faucet
P0101C

Riobel Inc. - 11 Cidermill Ave. Unit # 5 - Concord, Ontario - L4K 4B6 - PH:905-760-9009

Lot 44
Bowmanville
Krystolorich



DEC 22 2014

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

UPGRADED EDGE PROFILES

4 cm

1/2" BEVEL

HALF BULLNOSE

FULL BULLNOSE

OGEE

DOUBLE OGEE

SINK EDGE



Undermount



Straight Polish Edge

BACK & SIDE SPLASH TOP EDGE PROFILE.



Straight

Lot 44
Bowmanville
Krystolovich

BK KH

DEC 22 2014