


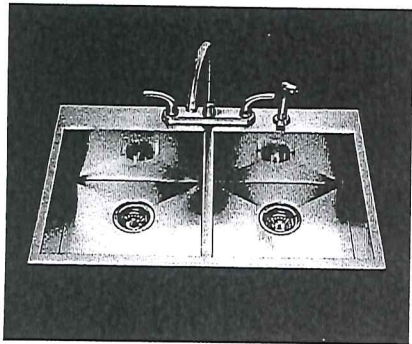


STEEL QUEEN FABRICATED SINKS • DUAL MOUNT



QDLF2233/8 cUPC®



20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
22" FB x 33 1/4" LR
Equal size bowl dimensions
17" FB x 15" LR x 8" DP
36" cabinet - recommended minimum
for Kindred topmount method
39" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

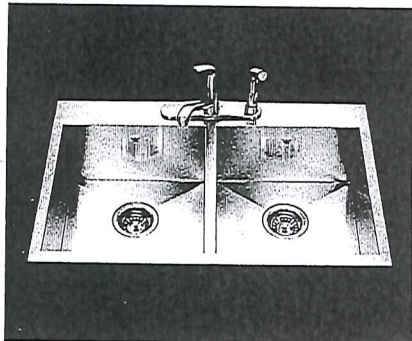

QDLF2031/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Equal size bowl dimensions
16" FB x 14" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)



Lot 368

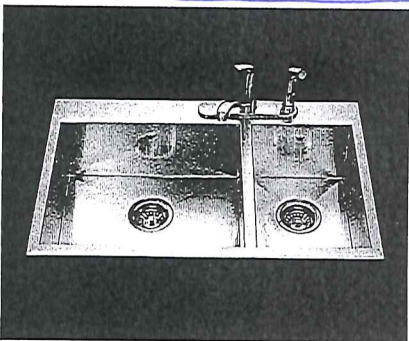

QCLF2031R/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 31 1/4" LR
Large bowl dimensions
16" FB x 18" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
33" cabinet - recommended minimum
for Kindred topmount method
36" cabinet - recommended minimum
for Kindred undermount method
33" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)



OI
B
T

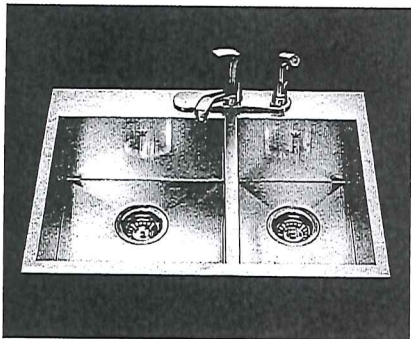

QCLF2027R/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 27 1/4" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
33" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)

OF
B
C

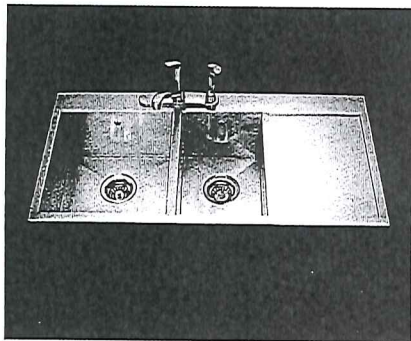

QCLF2039DBR/8 cUPC®

20 gauge, 18-8 stainless steel
Topmount or undermount model
Outside sink dimensions
20 9/16" FB x 39 3/8" LR
Large bowl dimensions
16" FB x 14" LR x 8" DP
Small bowl dimensions
16" FB x 10" LR x 8" DP
30" cabinet - recommended minimum
for Kindred topmount method
45" cabinet - recommended minimum
for Kindred undermount method
27" cabinet - minimum to accept sink bowls
(refer to Table of Contents page)


OP
BC
C

Arbor

Traditional | Transitional | Modern



Chrome: \$
BL: \$
Other: \$

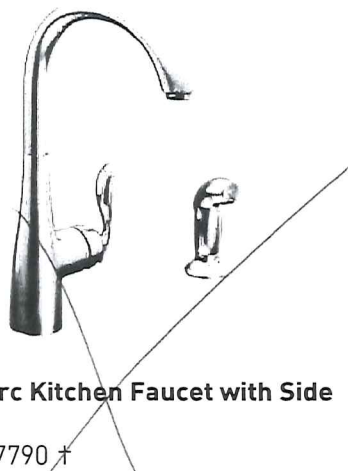


(Use model number only for Chrome finish. Not available in BL)

Chrome: \$
Other: \$




Chrome: \$
BL: \$
Other: \$



(Use model number only for Chrome finish)

Chrome: \$
BL: \$
Other: \$

† To order, combine the model number with one of these finish letters:

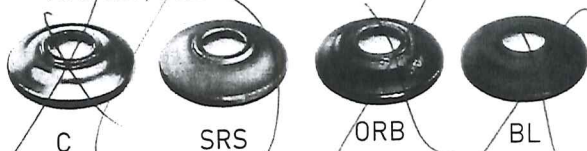

* Single or Three Hole Installation
± Single Hole Installation Only

MOEN
Buy it for looks. Buy it for life.®

Lot 36 1B
Bowmanville
Cavallo Reid

HS. LC

DEC 15 2014

EDGE PROFILE VERIFICATION FORM

STANDARD EDGE PROFILES

2 cm

STRAIGHT POLISH

UPGRADED EDGE PROFILES

4 cm

1/2" BEVEL

HALF BULLNOSE

FULL BULLNOSE

OGEE

DOUBLE OGEE

SINK EDGE



Undermount



Straight Polish Edge

BACK & SIDE SPLASH TOP EDGE PROFILE



Straight

Page 2 of 13

Lot 36 B
Bowmanville
Cavallo / Reid

H.R. K.

DEC 15 2014