


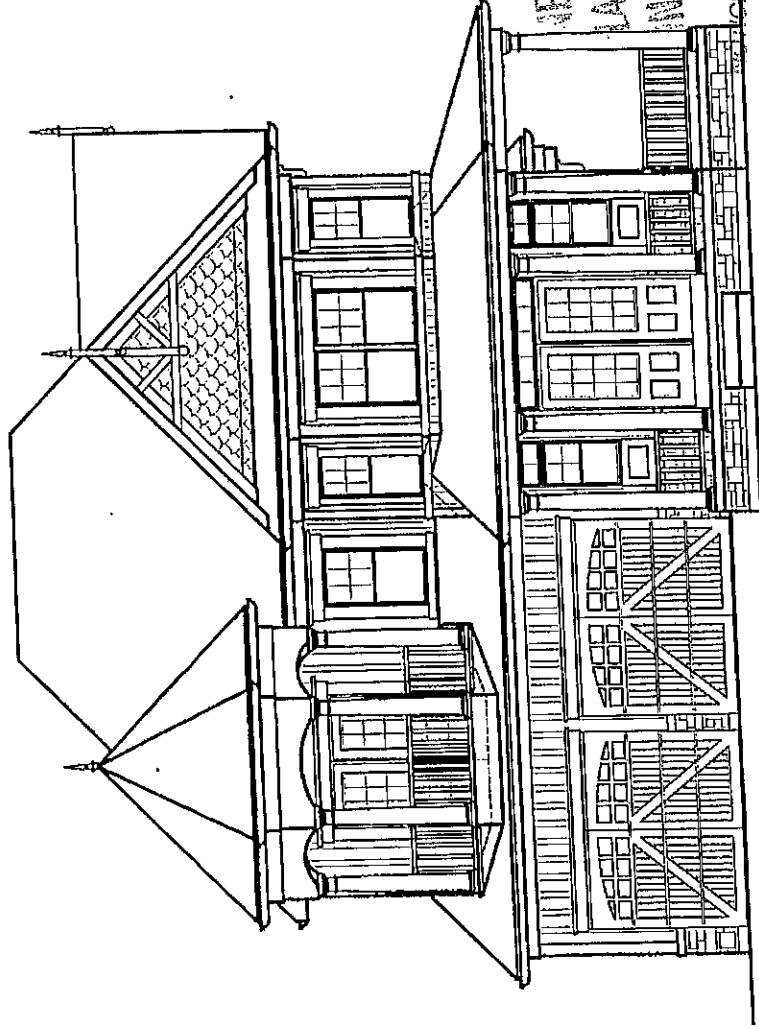

FRONT ELEVATION 'A'

MUNICIPALITY OF CLARINGTON
CERTIFIED COPY
FORMING PART OF BUILDING
PERMIT DRAWINGS

IF COPY OF THE CERTIFIED
DRAWING IS TO BE MAINTAINED
ON SITE AND READILY AVAILABLE

PERMIT REQUIREMENTS FOR INSPECTIONS

The owner or an authorized agent shall notify
the Chief Official at least two (2) business
days prior to each stage of construction for
which notice in advance is required under
the Building Code as amended from time to
time.

Kim Henry
02/11/14

DRAWING LIST:

40-5 (GEORGE) -
CORNER ELEVATION 'A'

- T1 TITLE SHEET
- A1 BASEMENT FLOOR ELEV. 'A'
- A2 GROUND FLOOR ELEV. 'A'
- A3 SECOND FLOOR ELEV. 'A'
- A4 FRONT ELEVATION 'A'
- A5 RIGHT SIDE ELEVATION 'A'
- A6 REAR ELEVATION 'A'
- A7 LEFT SIDE ELEVATION 'A'
- A8 PARTIAL PLANS ELEVATION 'A'
- A9 WALKOUT DECK CONDITION
- D1 REAR ELEVATION 'A'
- D2 WALKOUT DECK CONDITION
- D3 CONSTRUCTION SHEET
- D4 CONSTRUCTION SHEET
- D5 CONSTRUCTION SHEET
- D6 TYPICAL SECTION

GROSS GLAZING AREA 'A'			
TOTAL PERIPHERAL WALL AREA	3128.41 SF	290.63 m²	
FRONT GLAZING AREA	104.14 SF	9.67 m²	
LEFT SIDE GLAZING AREA	59 SF	5.48 m²	
RIGHT SIDE GLAZING AREA	88.06 SF	8.18 m²	
REAR GLAZING AREA	119.14 SF	11.07 m²	
TOTAL GLAZING AREA	370.34 SF	34.40 m²	
TOTAL GLAZING PERCENTAGE	11.84 %		

*Attached - NOC
- NOC
- NOC
- NOC
- NOC*

ESQUIRE HOMES
NORTHGLEN
CLARINGTON, ONTARIO



RIN design
Imagine • Inspire • Create

8395 JANE STREET
SUITE 203
VAUGHAN, ON
TEL: 905-738-3177
FAX: 905-738-5449

CONTACT PERSON:

No.	REVISION COMMENTS:	DATE	DWN	CHK	SCALE	
					AS NOTED	AS NOTED
1.	ISSUED FOR CLIENT REVIEW	NOV. 04/14	SB	NC		PROJECT No. 08080
2.	REVISED AS PER ENGINEER COMMENTS	NOV. 13/14	SB	NC		
	ISSUED FOR FINAL					
					SIGNATURE:	
					QUALIFIED DESIGNER BCIN: 21032	T1
					FIRM BCIN: 26995	
					DATE: NOVEMBER 13, 2014	

THESE DRAWINGS ARE NOT TO BE SCALED.
ALL DIMENSIONS MUST BE VERIFIED BY THE CONTRACTOR PRIOR
TO CONSTRUCTION. ANY DISCREPANCIES
MUST BE REPORTED DIRECTLY TO RIN DESIGN LTD.
MUST BE REPORTED DIRECTLY TO RIN DESIGN LTD.
REVISED: SEPTEMBER 20, 2013 - RIN STAFF IN ACCORDANCE TO SB-12 COMPLIANCE PACKAGE 1


It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Act and Regulations and all applicable provisions and any provisions including zoning and subdivision agreements. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning, building code or permit matter relating to a house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLARINGTON.

ARCHITECTURAL REVIEW & APPROVAL

NOV 13 2014

John G. Williams Limited, Architect

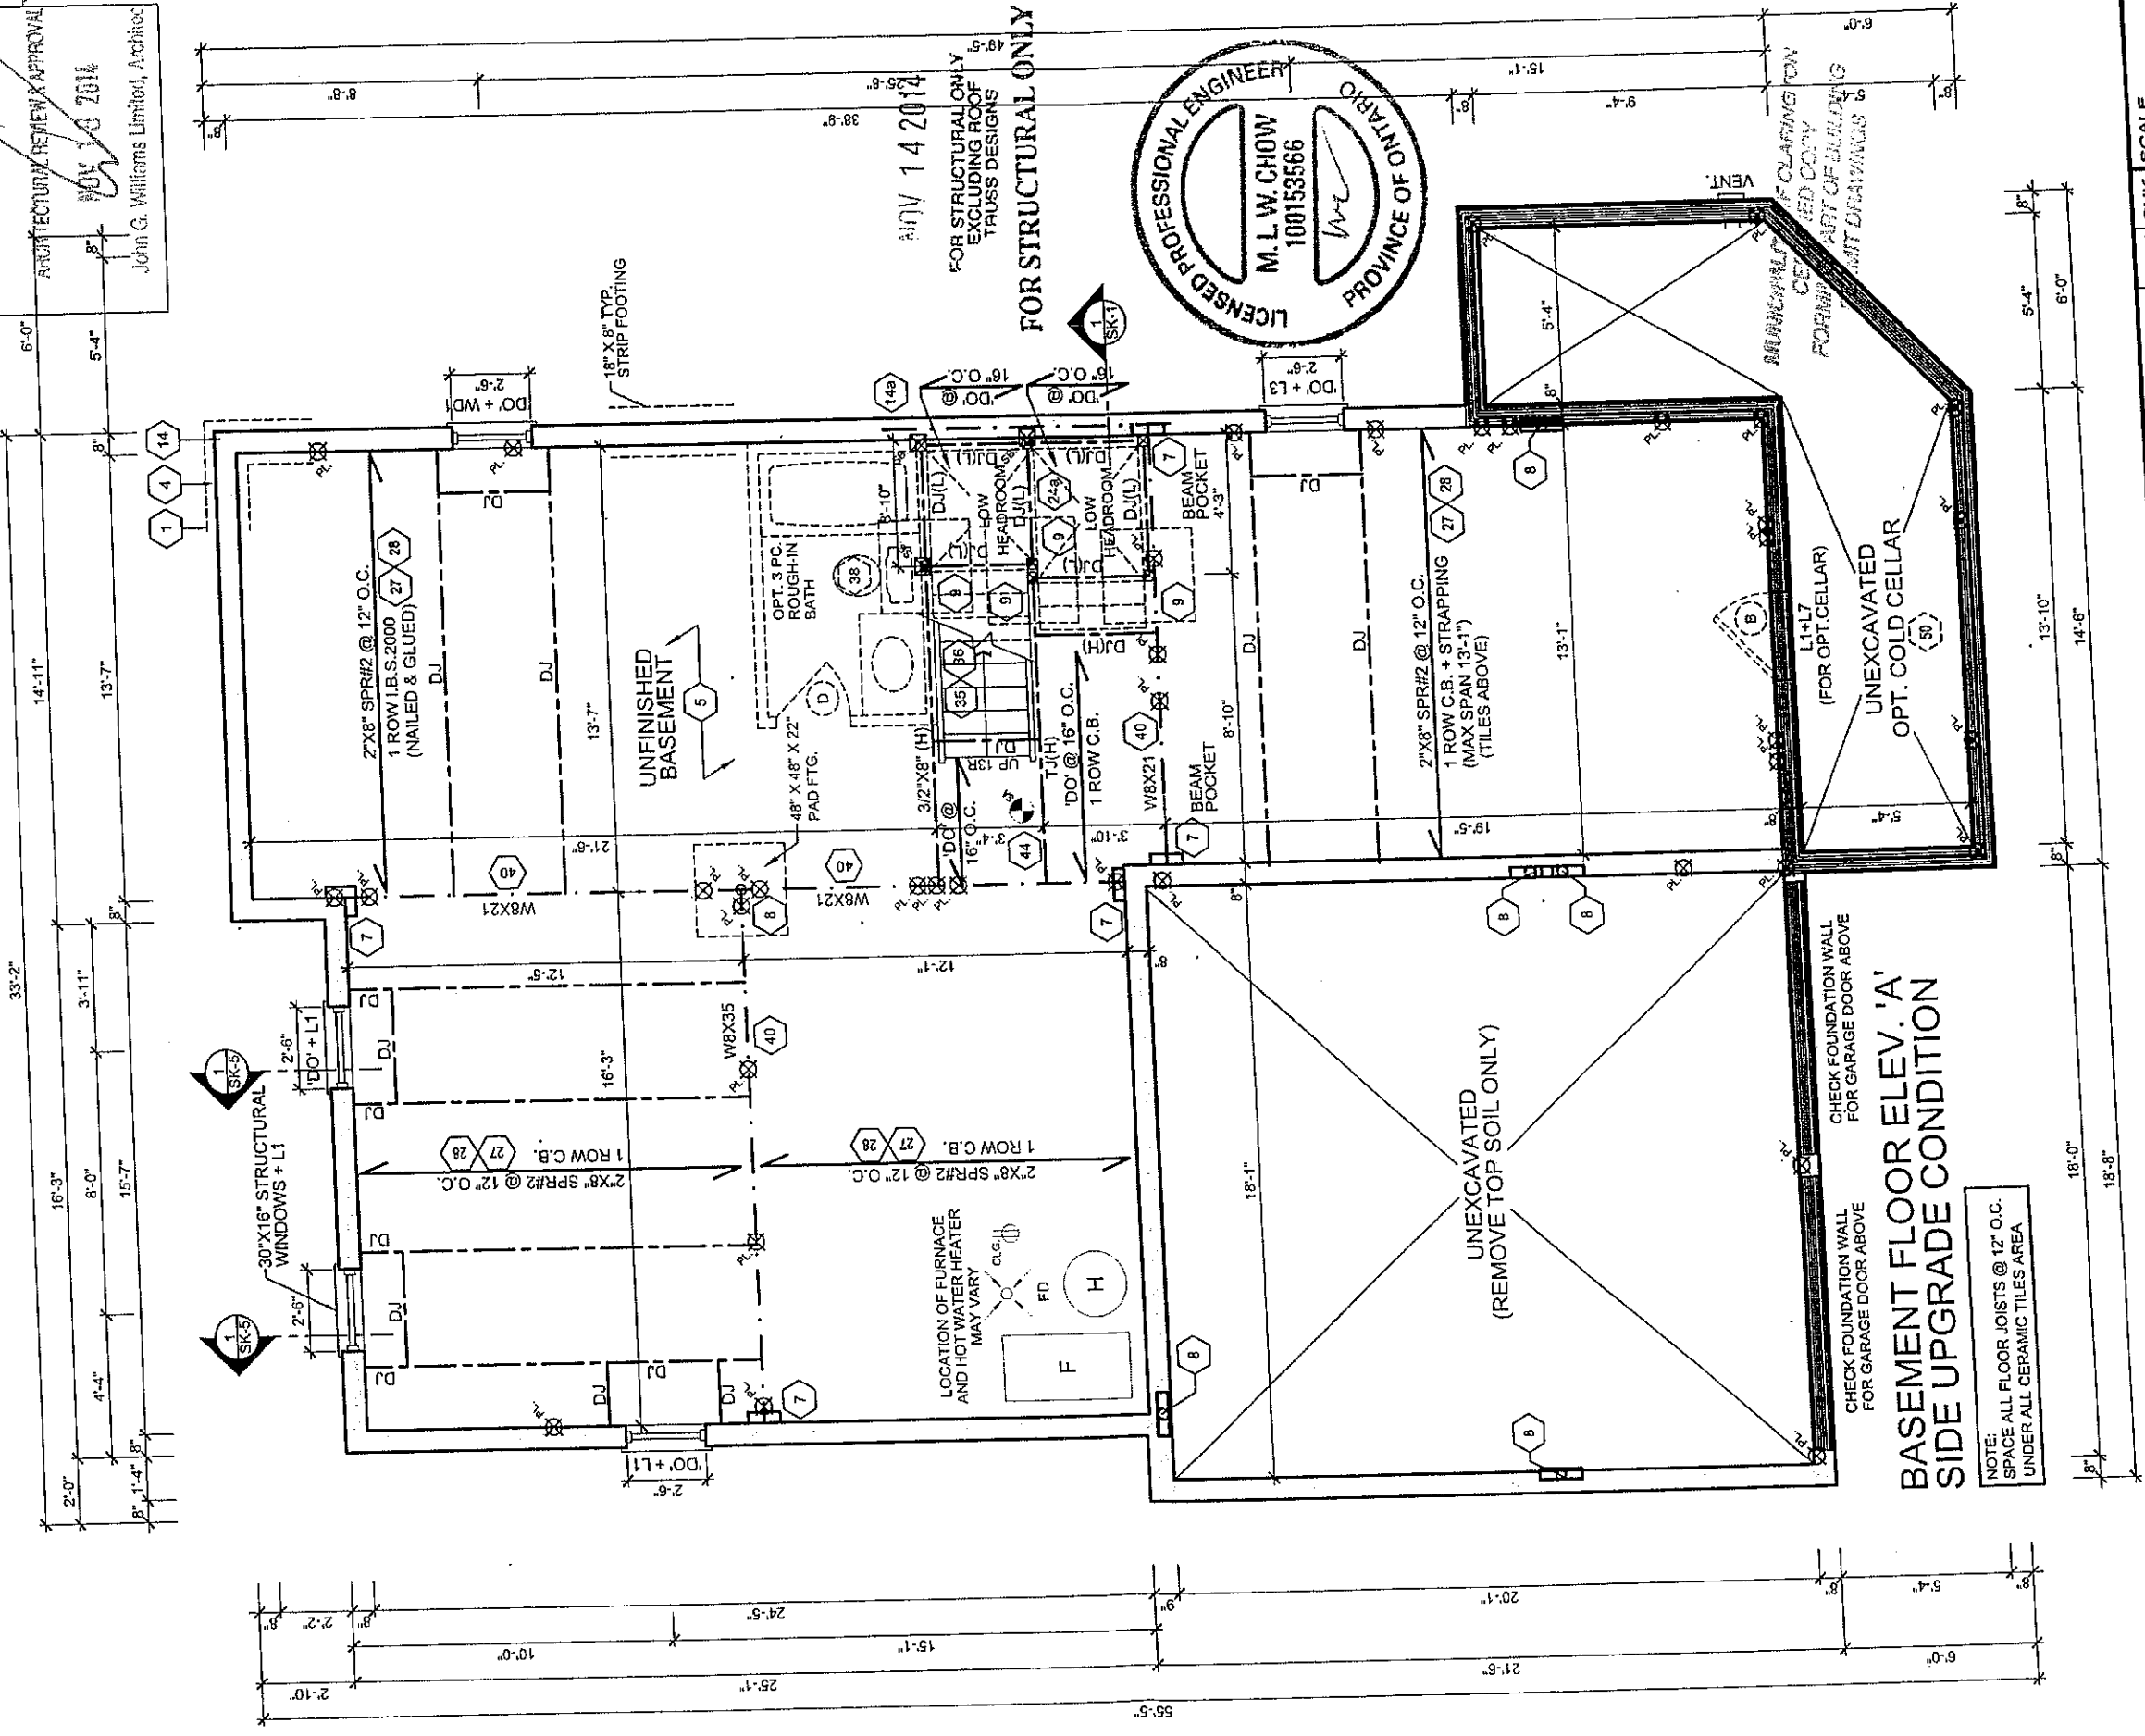

MODEL
40-5 (GEORGE) - CORNER ELEVATION 'A'

CLIENT
ESQUIRE HOMES
NORTHGLEN
CLARINGTON, ONTARIO

No.	ISSUED OR REVISION COMMENTS	DATE	DWN	CHK	SCALE
1.	ISSUED FOR CLIENT REVIEW	NOV. 04/14	SB	NC	3/16" = 1'0"
2.	REVISED AS PER ENGINEER COMMENTS	NOV. 13/14	SB	NC	
	ISSUED FOR FINAL				
SIGNATURE:					PAGE
QUALIFIED DESIGNER BCIN: 21032					A1
FIRM BCIN: 28995					
DATE: NOVEMBER 13, 2014					

THESE DRAWINGS ARE NOT TO BE SCALED.
RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LIMITED
DIVISION C, PART 3, SUBSECTION 3.2.4 OF THE BUILDING CODE
I AM QUALIFIED, AND THE FIRM IS REGISTERED, IN THE APPROPRIATE
CLASSES/CATEGORIES.


It is the builder's complete responsibility to ensure that all plans are submitted for approval to the appropriate authorities and that all applicable regulations and requirements are followed. The Architectural Guidelines in the subdivision agreement, any zoning or other applicable regulations, any way for examining or approving any plans or working drawings in respect to any zoning or other applicable regulations or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLARINGTON.

ARCHITECTURAL DESIGNER APPROVE

NOV 13 2014

John S. Williams Limited, Architect

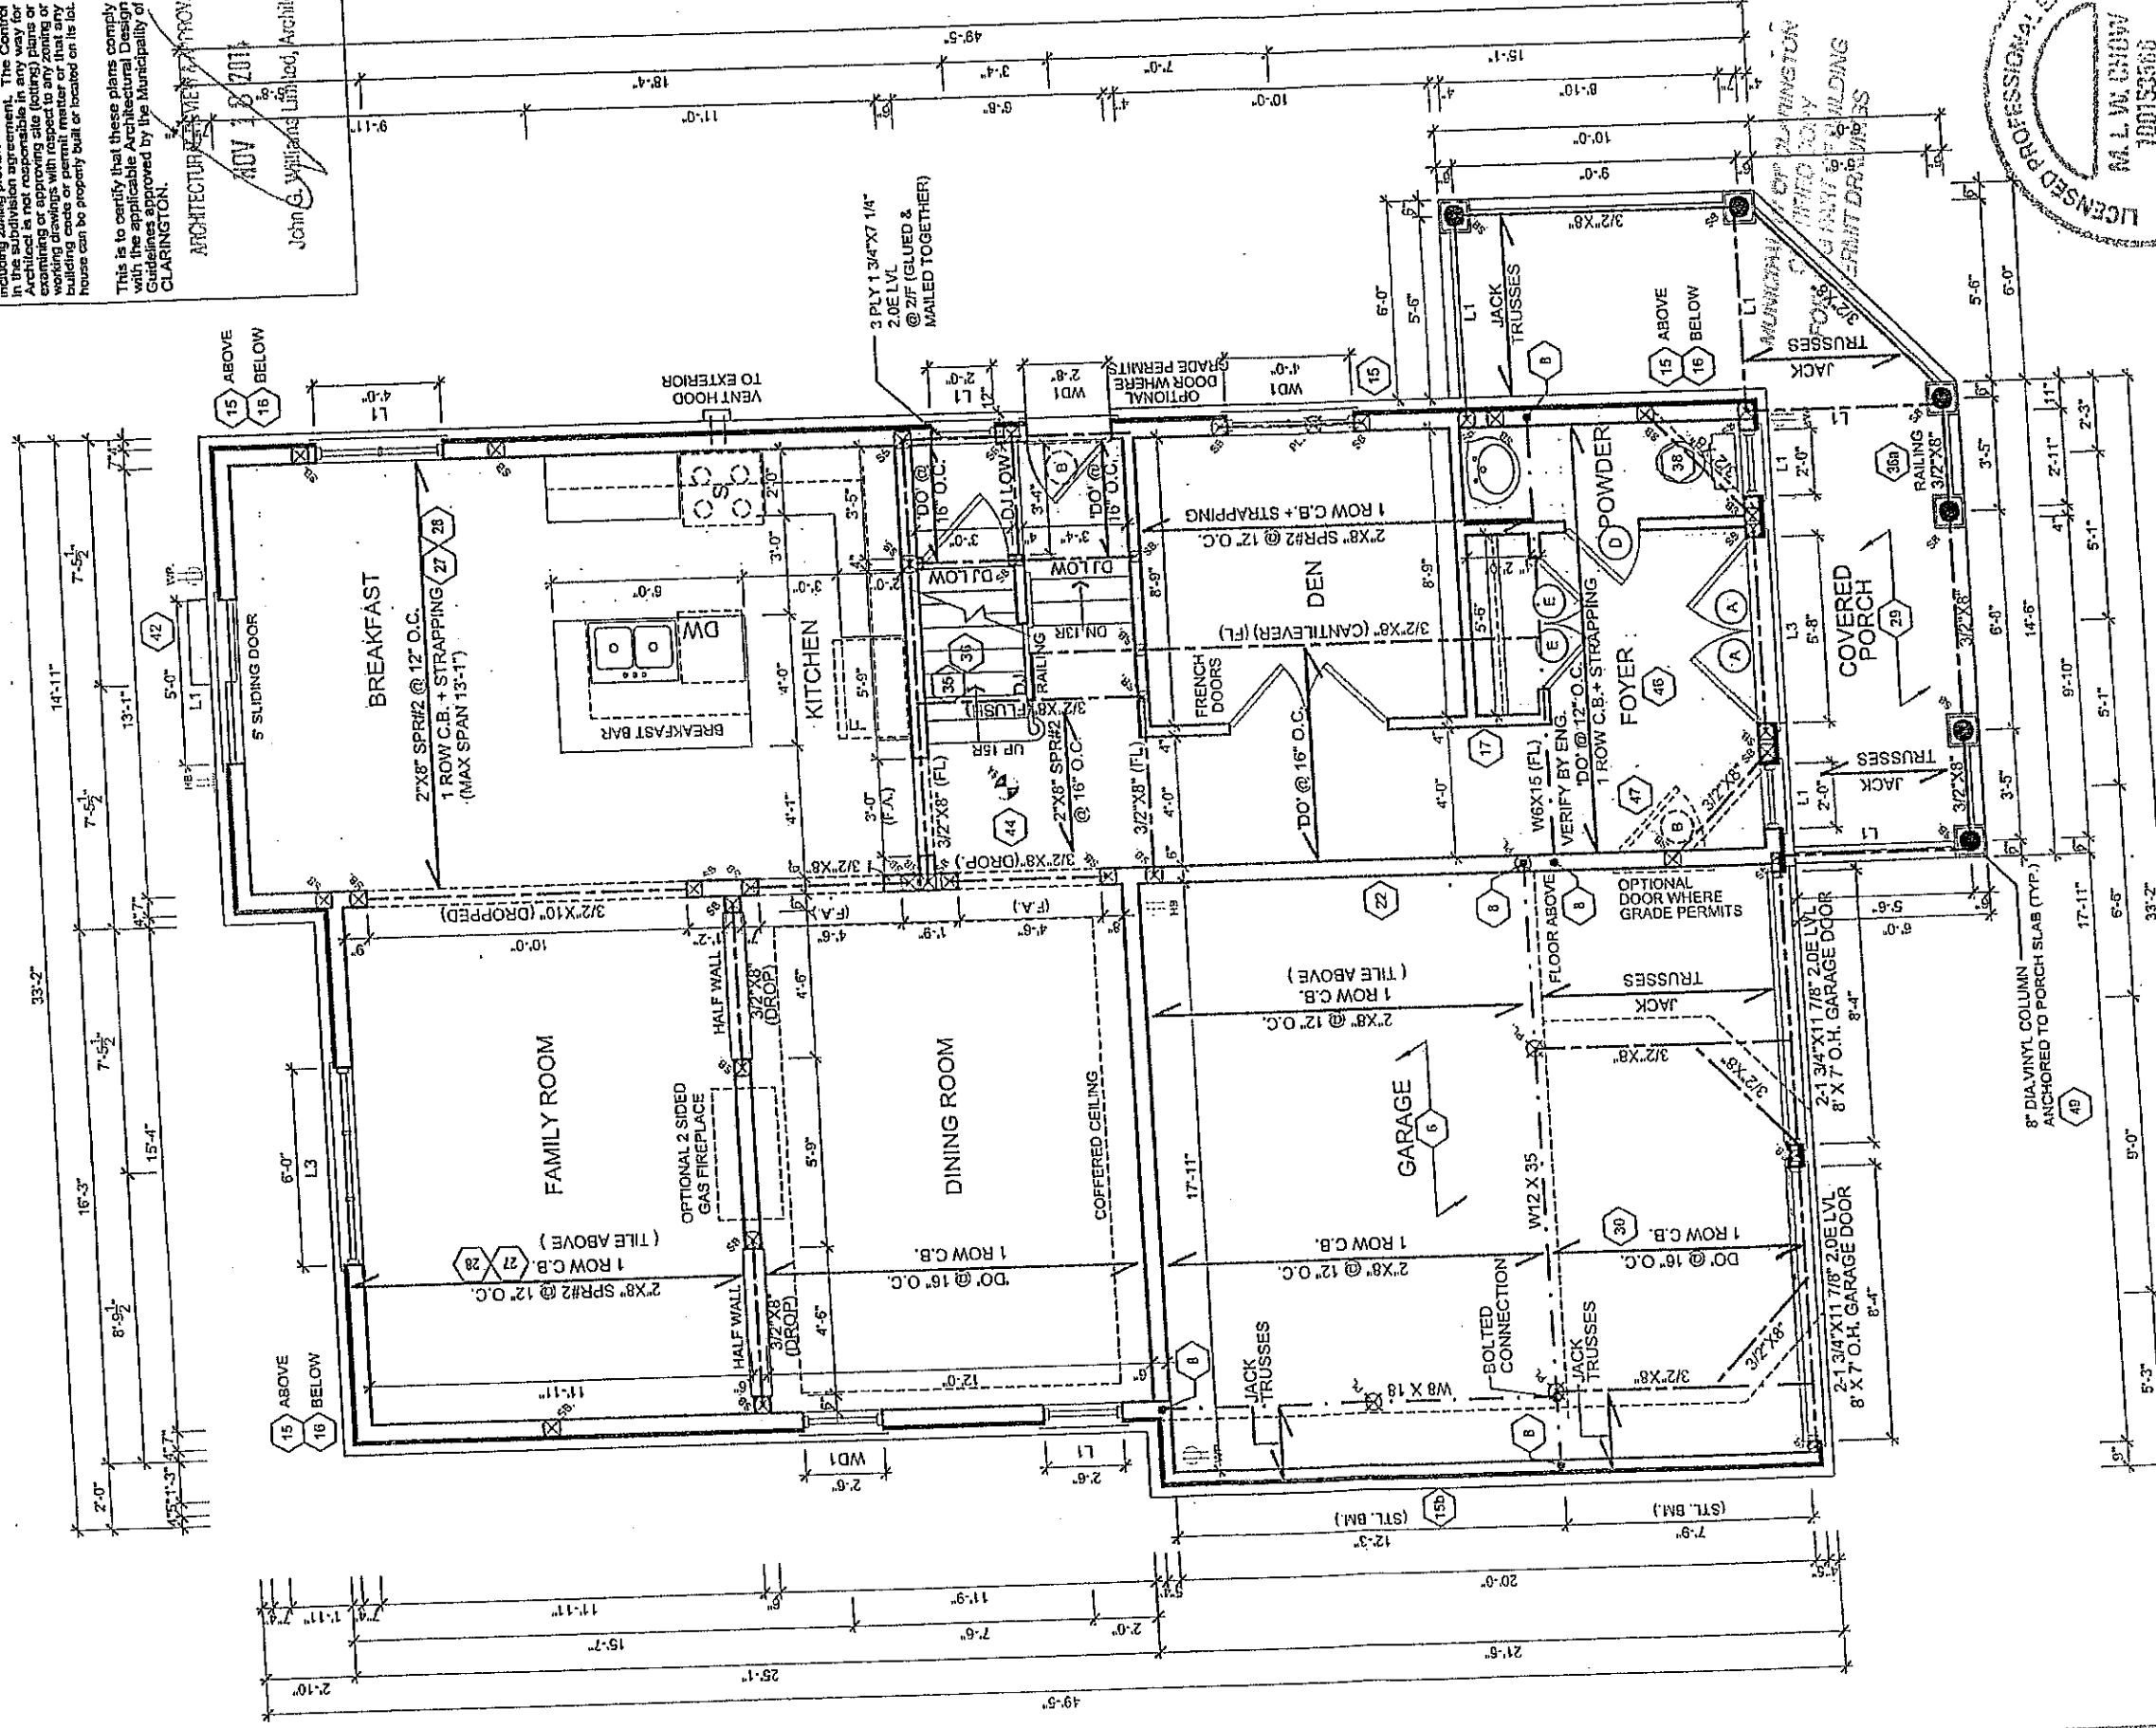


GROUND FLOOR ELEV. 'A' SIDE UPGRADE CONDITION

NOTE: SPACE ALL FLOOR JOISTS @ 12" O.C. UNDER ALL CERAMIC TILES AREA

NOTE: CONC. FRONT PORCH POURED PRIOR TO BRICK

NOV 14 2014
FOR STRUCTURAL ONLY
EXCLUDING ROOF
TRUSS DESIGNS



MODEL 40-5 (GEORGE) - CORNER ELEVATION 'A'

CLIENT
ESQUIRE HOMES
NORTHGLEN
CLARINGTON, ONTARIO



THESE DRAWINGS ARE NOT TO BE SCALED. PRIOR TO CONSTRUCTION, THE CONTRACTOR MUST VERIFY ALL DIMENSIONS AND LOCATIONS OF ALL STRUCTURAL ELEMENTS AND ANY DISCREPANCIES MUST BE REPORTED DIRECTLY TO RN DESIGN LTD. REVISION: SEPTEMBER 20, 2013 - RFI STAFF IN ACCORDANCE TO SBA12 COMPLIANCE PACKAGE J

NO.	ISSUED OR REVISION COMMENTS	DATE	DWN	CHK	SCALE
1.	ISSUED FOR CLIENT REVIEW	NOV. 04/14	SB	NC	3/16" = 1'0"
2.	REVISED AS PER ENGINEER COMMENTS	NOV. 13/14	SB	NC	
	ISSUED FOR FINAL				

PROJECT NUMBER
08080

PAGE
A2

SIGNATURE:

QUALIFIED DESIGNER BCIN: 21032

FIRM BCIN: 28995

DATE: NOVEMBER 13, 2014


It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and any provisions including zoning provisions and any provisions in the subdivision agreement. The Contractor is not responsible for any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLARINGTON.

ARCHITECTURAL REVIEW & APPROVAL

NOV 13 2014

WILLIAMS LIMITED, ARCHITECT

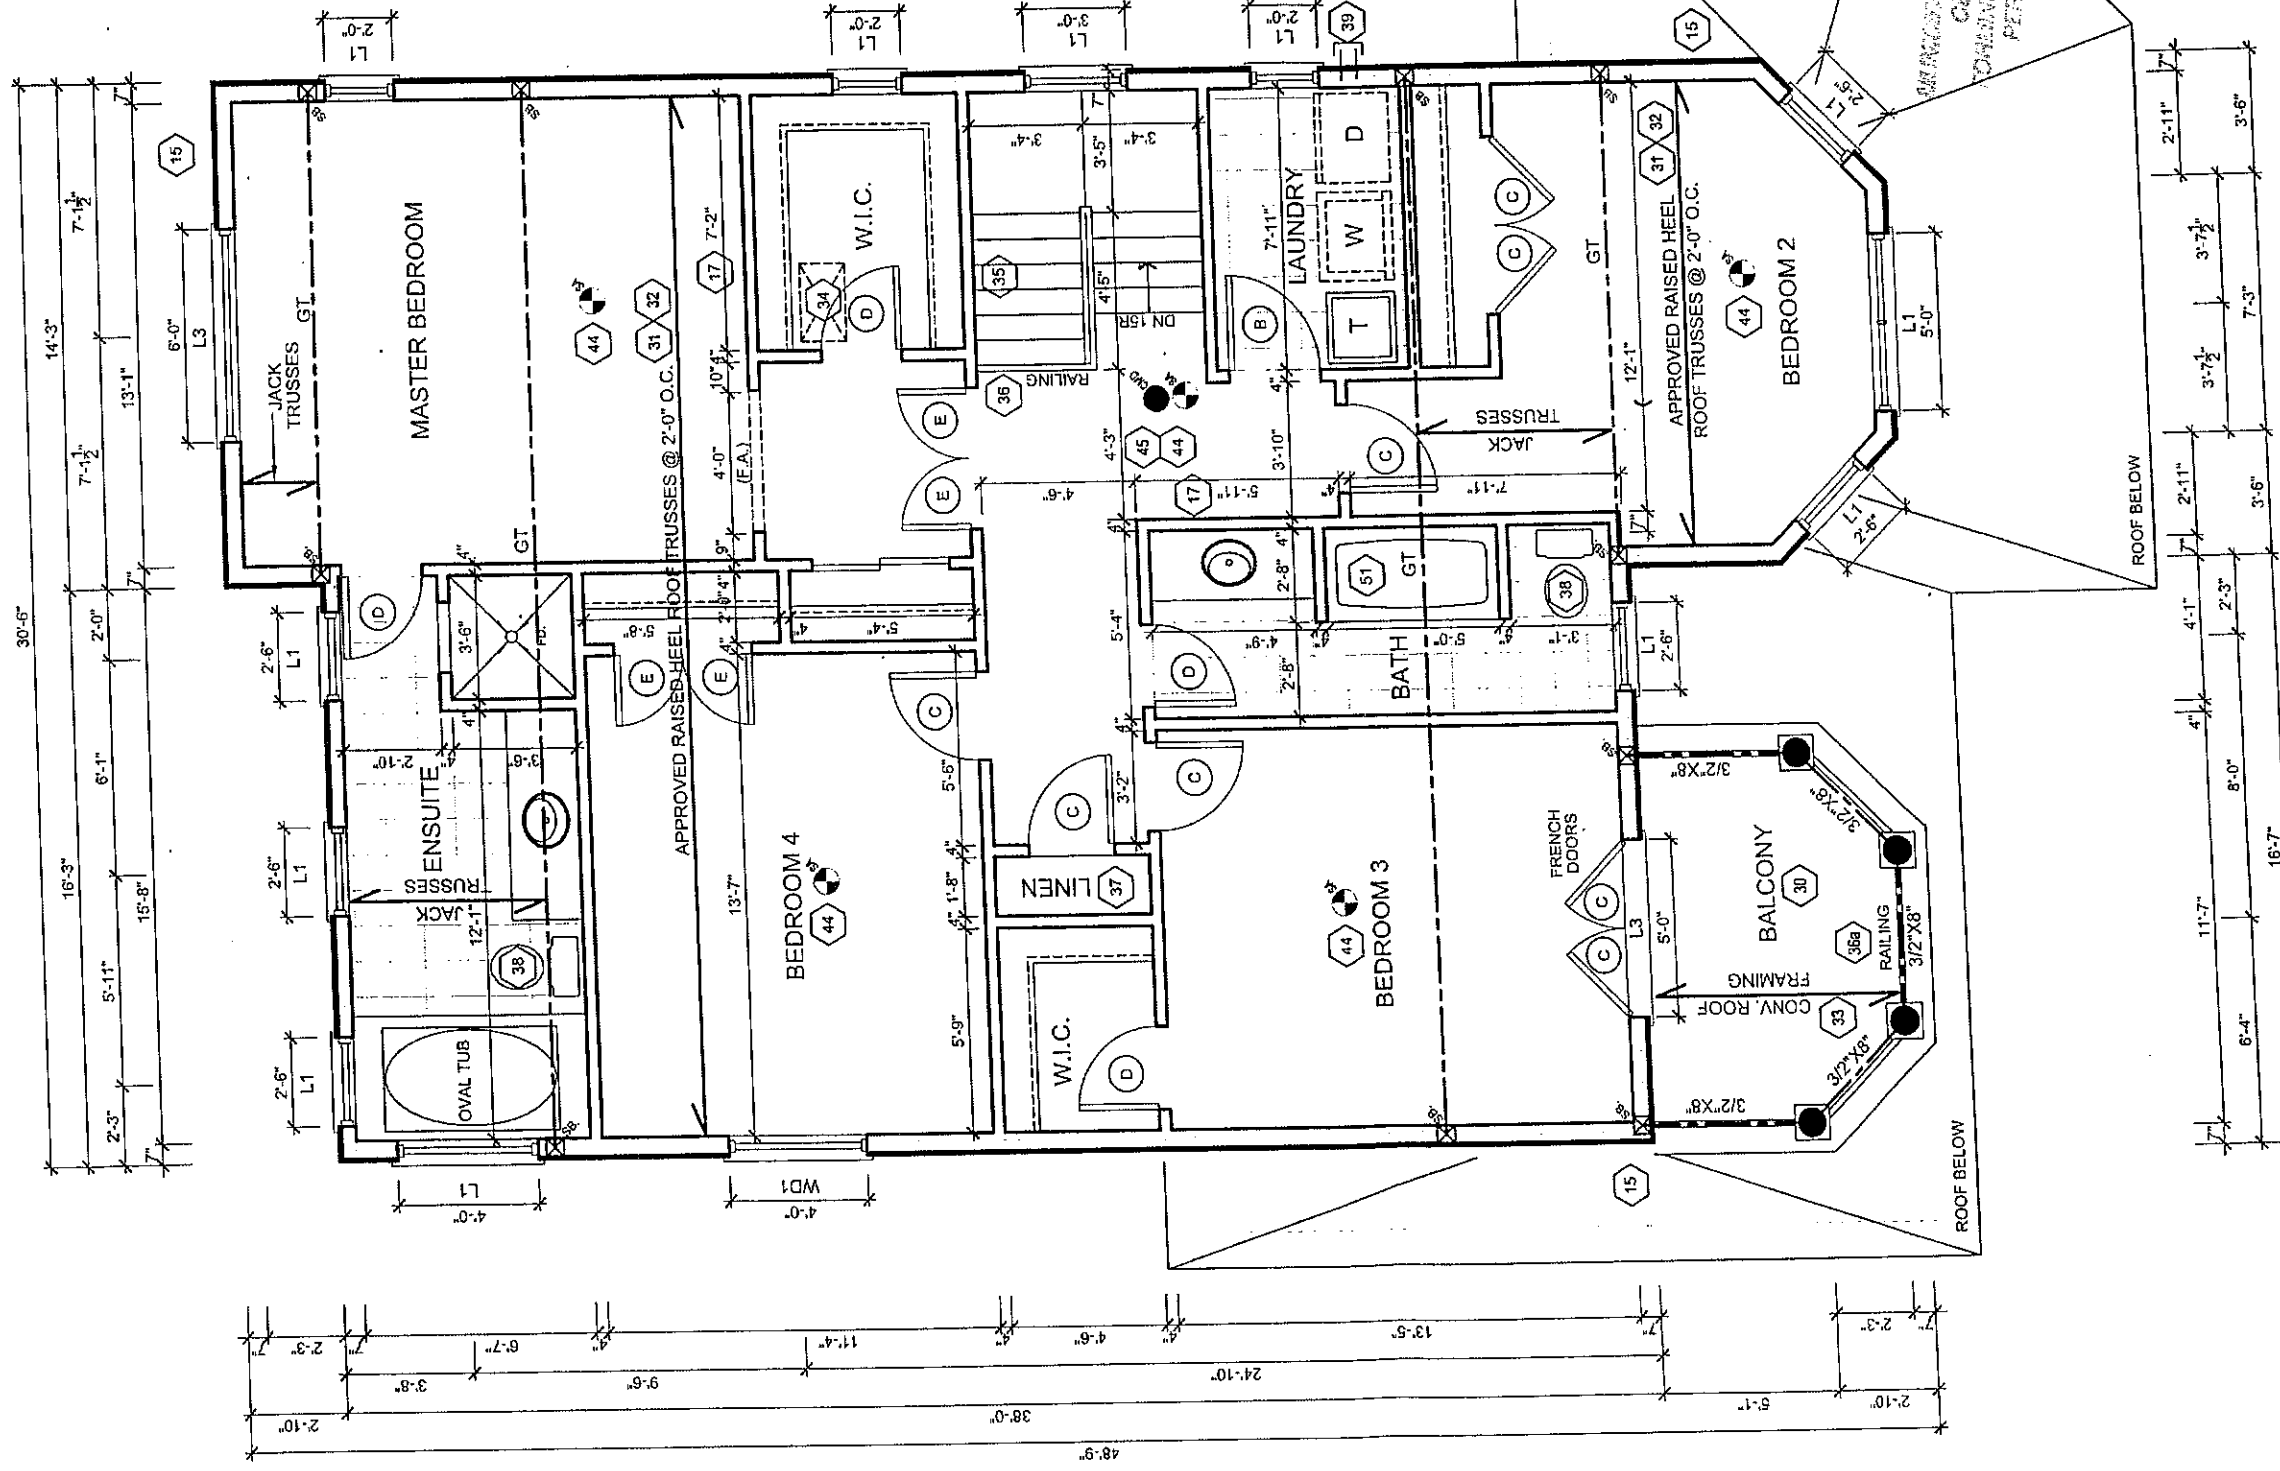


SECOND FLOOR ELEV. 'A' SIDE UPGRADE CONDITION

NOV 14 2014

FOR STRUCTURAL ONLY
EXCLUDING ROOF
TRUSS DESIGNS

NOTE:
SPACE ALL FLOOR JOISTS @ 12" O.C.
UNDER ALL CERAMIC TILES AREA

NOTE:
CONC. FRONT PORCH
POURED PRIOR TO BRICK



MODEL
40-5 (GEORGE) - CORNER ELEVATION 'A'

CLIENT
ESQUIRE HOMES
NORTHGLEN
CLARINGTON, ONTARIO

THESE DRAWINGS ARE NOT TO BE SCALED.
ALL DIMENSIONS MUST BE VERIFIED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF WORK.
TO CORRECT ANY DISCREPANCIES
MUST BE REPORTED DIRECTLY TO RN DESIGN LTD.
REVISED: SEPTEMBER 2013 RN STAFF IN ACCORDANCE TO S8-12 COMPLIANCE PACKAGE-I


I, NELSON DUNN, DECLARE THAT I HAVE REVIEWED AND TAKE DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LIMITED. I AM A REGISTERED PROFESSIONAL ENGINEER IN THE PROVINCE OF ONTARIO. THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSIFICATION CATEGORIES.

QUALIFIED DESIGNER BCIN: 21032
FIRM BCIN: 26995
DATE: NOVEMBER 13, 2014

SIGNATURE:

No.	ISSUED OR REVISION COMMENTS	DATE	DWN	CHK	SCALE
1.	ISSUED FOR CLIENT REVIEW	NOV. 04/14	SB	NC	3/16" = 1'0"
2.	REVISED AS PER ENGINEER COMMENTS ISSUED FOR FINAL	NOV. 13/14	SB	NC	PROJECT NUMBER 08080
					PAGE

A3

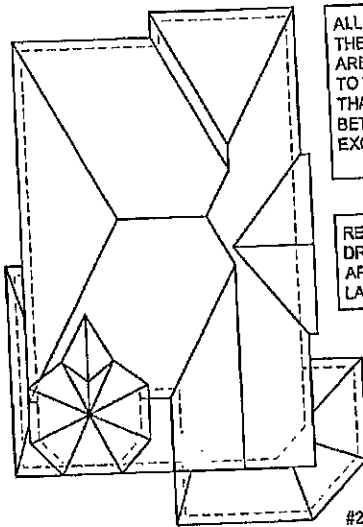

ROOF PLAN 'A'

ALL CONVENTIONAL ROOF FRAMING TO CONFORM TO PART 9 OF THE OBC. ROOF RAFTERS THAT MEET OR CROSS OVER TRUSSES ARE TO BE 2"x4" SPF @ 24" o.c. WITH A 2"x4" SPF VERTICAL POST TO THE TRUSS UNDER, AT EACH CROSS POINT. POSTS LONGER THAN 6' TO BE Laterally Braced so that the distance between end points & between rows of bracing does not exceed 6'.

REFER TO TRUSS DRAWINGS FOR APPROVED TRUSS LAYOUT.

#210 SELF SEALING ASPHALT SHINGLES W/ FLASHING AT VALLEYS

PRE-FINISHED ALUMINUM R.W.L. AND GUTTER ON PRE-FINISHED FASCIA BOARD AND VENTED SOFFIT

TOP OF PLATE

6"x2" VINYL HEADER CLADDED WOOD TRIM W/ 6" VINYL SURROUND W/ 4" VINYL SILL (TYP.)

BOARD & BATTEN VINYL SIDING W/ METAL FLASHING BEHIND (TYP.)

HARDIE BOARD
FIN. SECOND FLOOR

U/S OF GARAGE & PORCH SOFFIT

6"x2" BUILT-UP HEADER CLADDED WOOD TRIM

4" PRECAST CONC. BAND

STONE VENEER (TYP.)

TOP OF BAND


FIN. MAIN FLOOR

FIN. GRADE

U/S OF FOOTING

STEPPED FOOTING

TOP OF SLAB

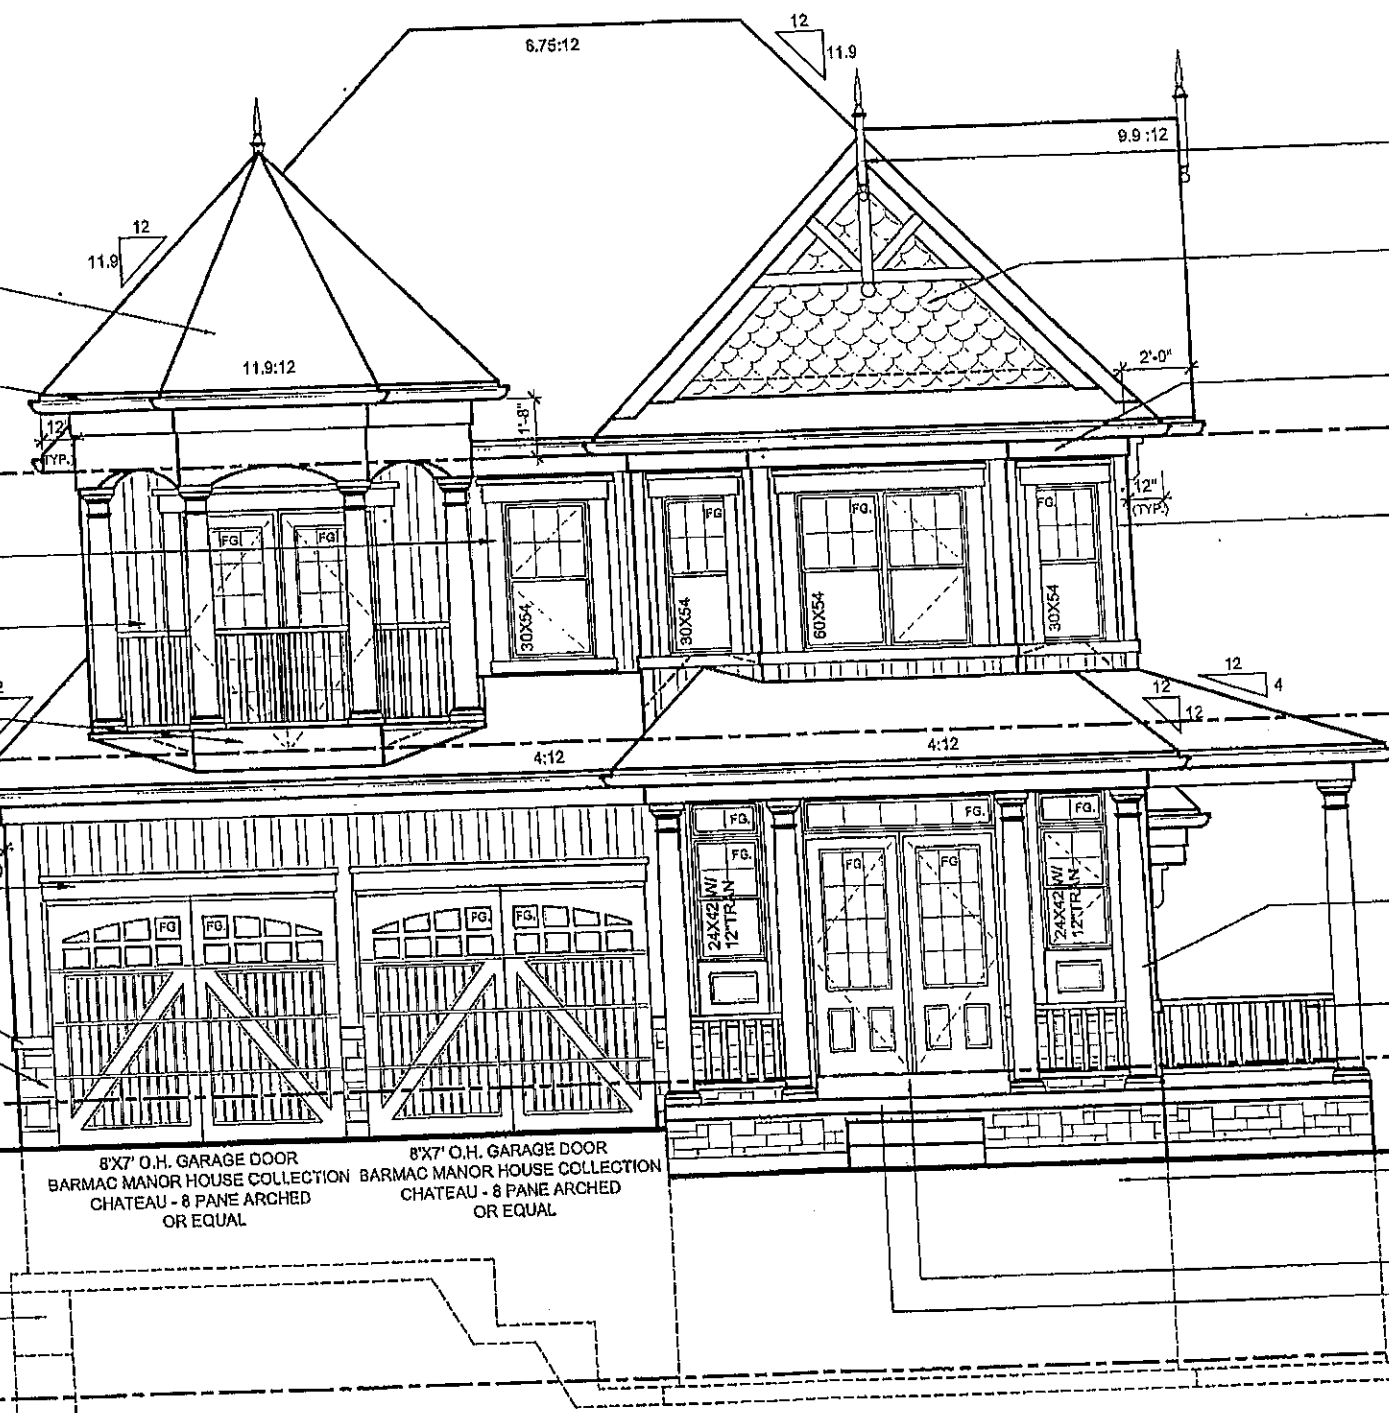

FRONT ELEVATION 'A'
CORNER UPGRADE CONDITION

It is the builder's complete responsibility to ensure that all plans submitted for approval comply with the applicable Building Code and all applicable regulations and requirements including zoning provisions and any other provisions in the subdivision agreement. The Architect is not responsible in any way for examining or approving any plans or working drawings or for any code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines and have been approved by the Municipality of CLARINGTON.

ARCHITECTURAL DESIGN APPROVAL
NOV 18/2014
John G. Williams, Architect

PEAK HEIGHT OF ROOF 29'-10"

DECOR. GABLE DETAIL

MID-POINT OF ROOF 23'-10"

FISH SCALE VINYL SIDING W/ METAL FLASHING BEHIND (TYP.)

1"x6" ALUM. FRIEZE BOARD (TYP.)

TOP OF PLATE

TOP OF WINDOW

6" VINYL CORNER TRIM (TYP.)

FIN. SECOND FLOOR

TOP OF TRANSOM

TOP OF WINDOW

8" DIA. VINYL COLUMN ANCHORED TO PORCH SLAB (TYP.)

EXTERIOR RAILING

FIN. MAIN FLOOR

FIN. GRADE

8" POURED CONC. FDTN WALLS ON 18"x8" CONC. STRIP FOOTING


POURED CONC. SILL

POURED CONC. PORCH SLAB

TOP OF SLAB

MODEL	CLIENT	No.	ISSUED OR REVISION COMMENTS	DATE	CHK	SCALE	PROJECT NUMBER	PAGE	A4
40-5 (GEORGE) - CORNER ELEVATION 'A'	ESQUIRE HOMES NORTHGLEN CLARINGTON, ONTARIO	1.	ISSUED FOR CLIENT REVIEW	NOV. 04/14	SB	NC	08080		
		2.	REVISED AS PER ENGINEER COMMENTS ISSUED FOR FINAL	NOV. 13/14	SB	NC			
		QUALIFIED DESIGNER BCIN: 21032 FIRM BCIN: 25905 DATE: NOVEMBER 13, 2014			SIGNATURE:				
		L. NELSON GUNDA DESIGN LTD. ARE THAT HAVE REVIEWED AND TAKE DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF ANY DESIGNER WHOSE RESPONSIBILITY IS NOT TRANSFERRED TO THE DESIGNER WHOSE DESIGN IS BEING REVIEWED. THE DESIGNER WHOSE DESIGN IS BEING REVIEWED IS NOT RESPONSIBLE FOR THE DESIGN WORK ON BEHALF OF ANY DESIGNER WHOSE DESIGN IS BEING REVIEWED. THE DESIGNER WHOSE DESIGN IS BEING REVIEWED IS NOT RESPONSIBLE FOR THE DESIGN WORK ON BEHALF OF ANY DESIGNER WHOSE DESIGN IS BEING REVIEWED.							

FIN design
Inspire • Create
1005/735-5448
FAX: (805) 735-5448
THESE DRAWINGS ARE NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF FIN DESIGN LTD.
ALL DIMENSIONS MUST BE VERIFIED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF ANY WORK TO FIN DESIGN LTD.
MUST BE REPORTED TO FIN DESIGN LTD. IN ACCORDANCE TO 93-12 COMPLIANCE PACKAGE
REVISED: SEPTEMBER 20, 2013 - RN START IN ACCORDANCE TO 93-12 COMPLIANCE PACKAGE

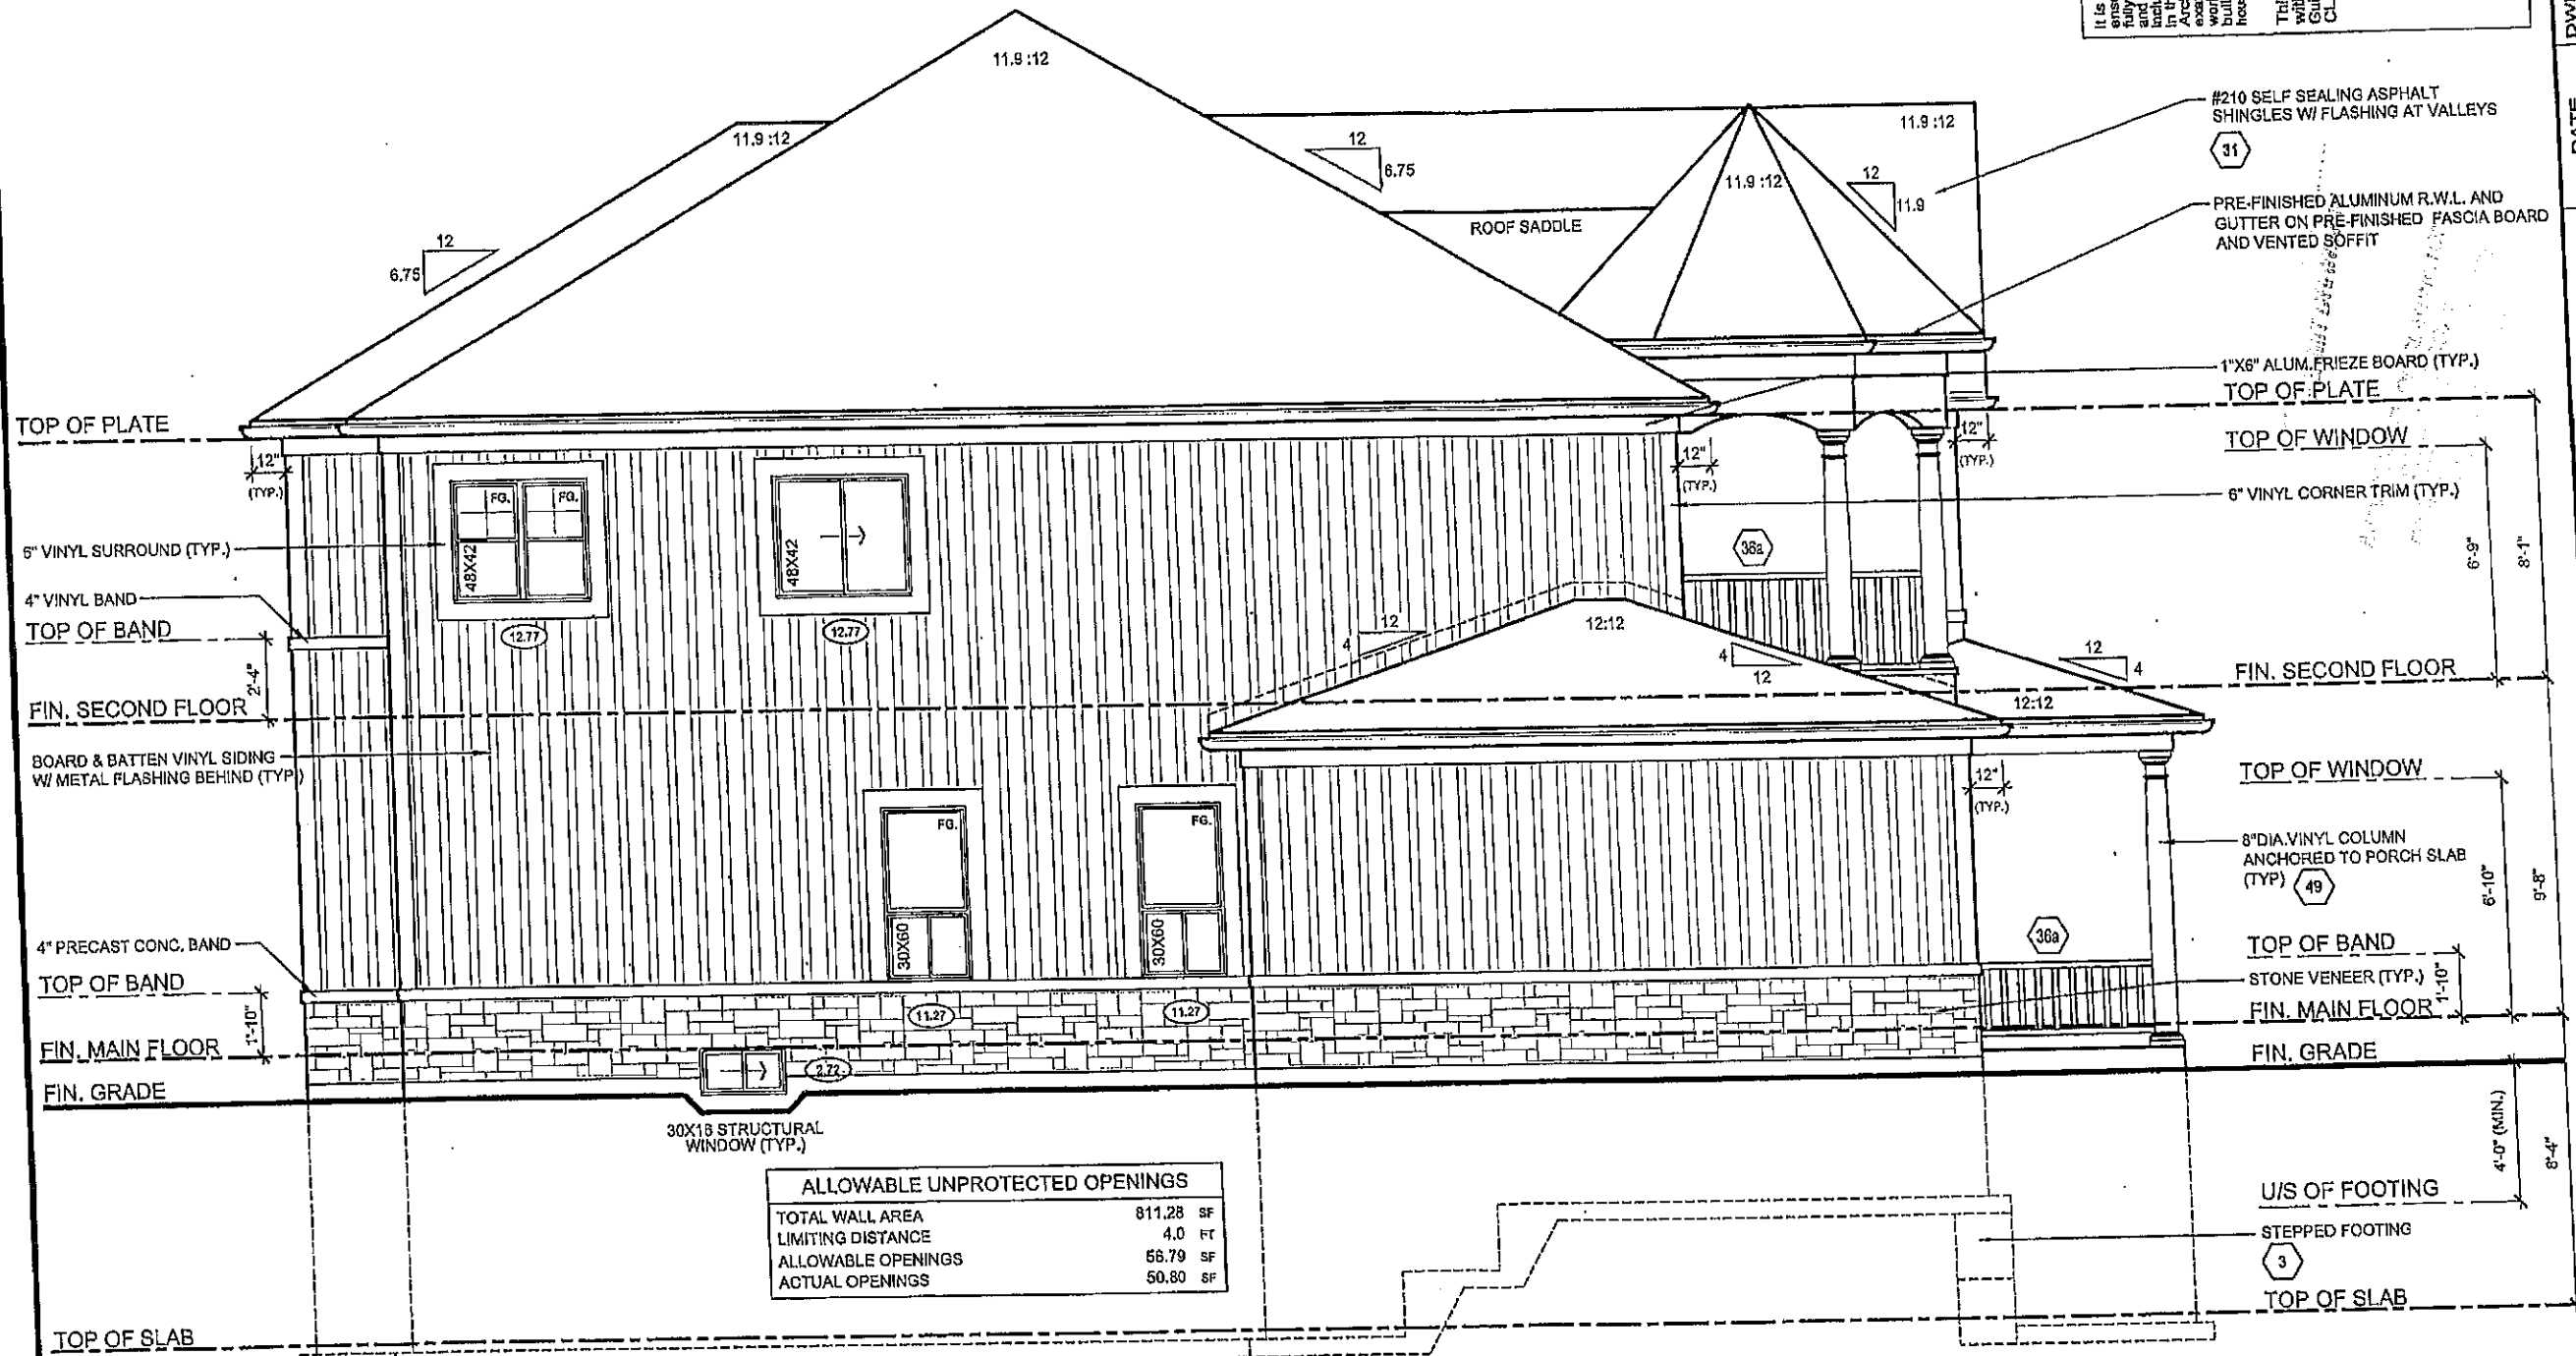

LEFT SIDE ELEVATION 'A'

It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and provisions including zoning provisions and any provisions in the zoning by-law. The Control Authority is not responsible in any way for approving or approving site (lot) plans or working drawings with respect to any zoning or building code or permit matter for the house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLARINGTON.

ARCHITECTURAL DESIGN APPROVAL
NOV 13 2014
John G. Winters, Architect, AIA

MODEL		DATE		CHK		SCALE	
40-5 (GEORGE) - CORNER ELEVATION 'A'		NOV. 04/14		DWN		3/16" = 1'0"	
		NOV. 13/14		NC		PROJECT NUMBER	
				NC		08080	
						PAGE	
						A7	



ISSUED OR REVISION COMMENTS		DATE		CHK	
1. ISSUED FOR CLIENT REVIEW		NOV. 04/14		DWN	
2. REVISED AS PER ENGINEER COMMENTS		NOV. 13/14		NC	
3. ISSUED FOR FINAL					

QUALIFIED DESIGNER BCIN:		FIRM BCIN:		DATE:	
21032		26895		NOVEMBER 13, 2014	
SIGNATURE:					

CLIENT	
ESQUIRE HOMES NORTHGLENN CLARINGTON, ONTARIO	

NOTES	
1. NELSON OLAFSON & ASSOCIATES HAVE REVIEWED AND TAKE DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LIMITED UNDER DIVISION C, PART 3, SUBSECTION 8.2.4 OF THE BUILDING ACT, 1997. THE FIRM IS REGISTERED, IN THE APPROPRIATE CLASSIFICATION CATEGORIES.	
2. THESE DRAWINGS ARE NOT TO BE SCALED. ALL DIMENSIONS SHOWN MUST BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION. ANY DISCREPANCIES MUST BE REPORTED DIRECTLY TO RN DESIGN LIMITED. REVISED: SEPTEMBER 20, 2013 - RN STAFF IN ACCORDANCE TO SS-12 COMPLIANCE PACKAGE J	

NOTE:
SPACE ALL FLOOR JOISTS @ 12" O.C.
UNDER ALL CERAMIC TILES AREA



It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning regulations and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or reviewing drawings with respect to any zoning or building code or permit matter or that any building can be properly built or located in its lot.


This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLACKAMINGHAM.

TECHNICAL REVIEW & APPROVAL

Figure 1

the Million-Labor Action

 RN design <i>Imagine • Inspire • Create</i> TEL: (905) 738-3148 FAX: (905) 738-3545		MODEL: 40-5 (GEORGE) - CORNER ELEVATION 'A'		CLIENT: ESQUIRE HOMES NORTHGLEN CLARINGTON, ONTARIO		No. ISSUED OR REVISION COMMENTS		DATE		DWN CHK		SCALE 3/16" = 1'0"	
						1. ISSUED FOR CLIENT REVIEW		NOV. 04/14		SB NC		PROJECT NUMBER 08080	
						2. REVISED AS PER ENGINEER COMMENTS ISSUED FOR FINAL		NOV. 13/14		SB NC			
												PAGE	
												A8	

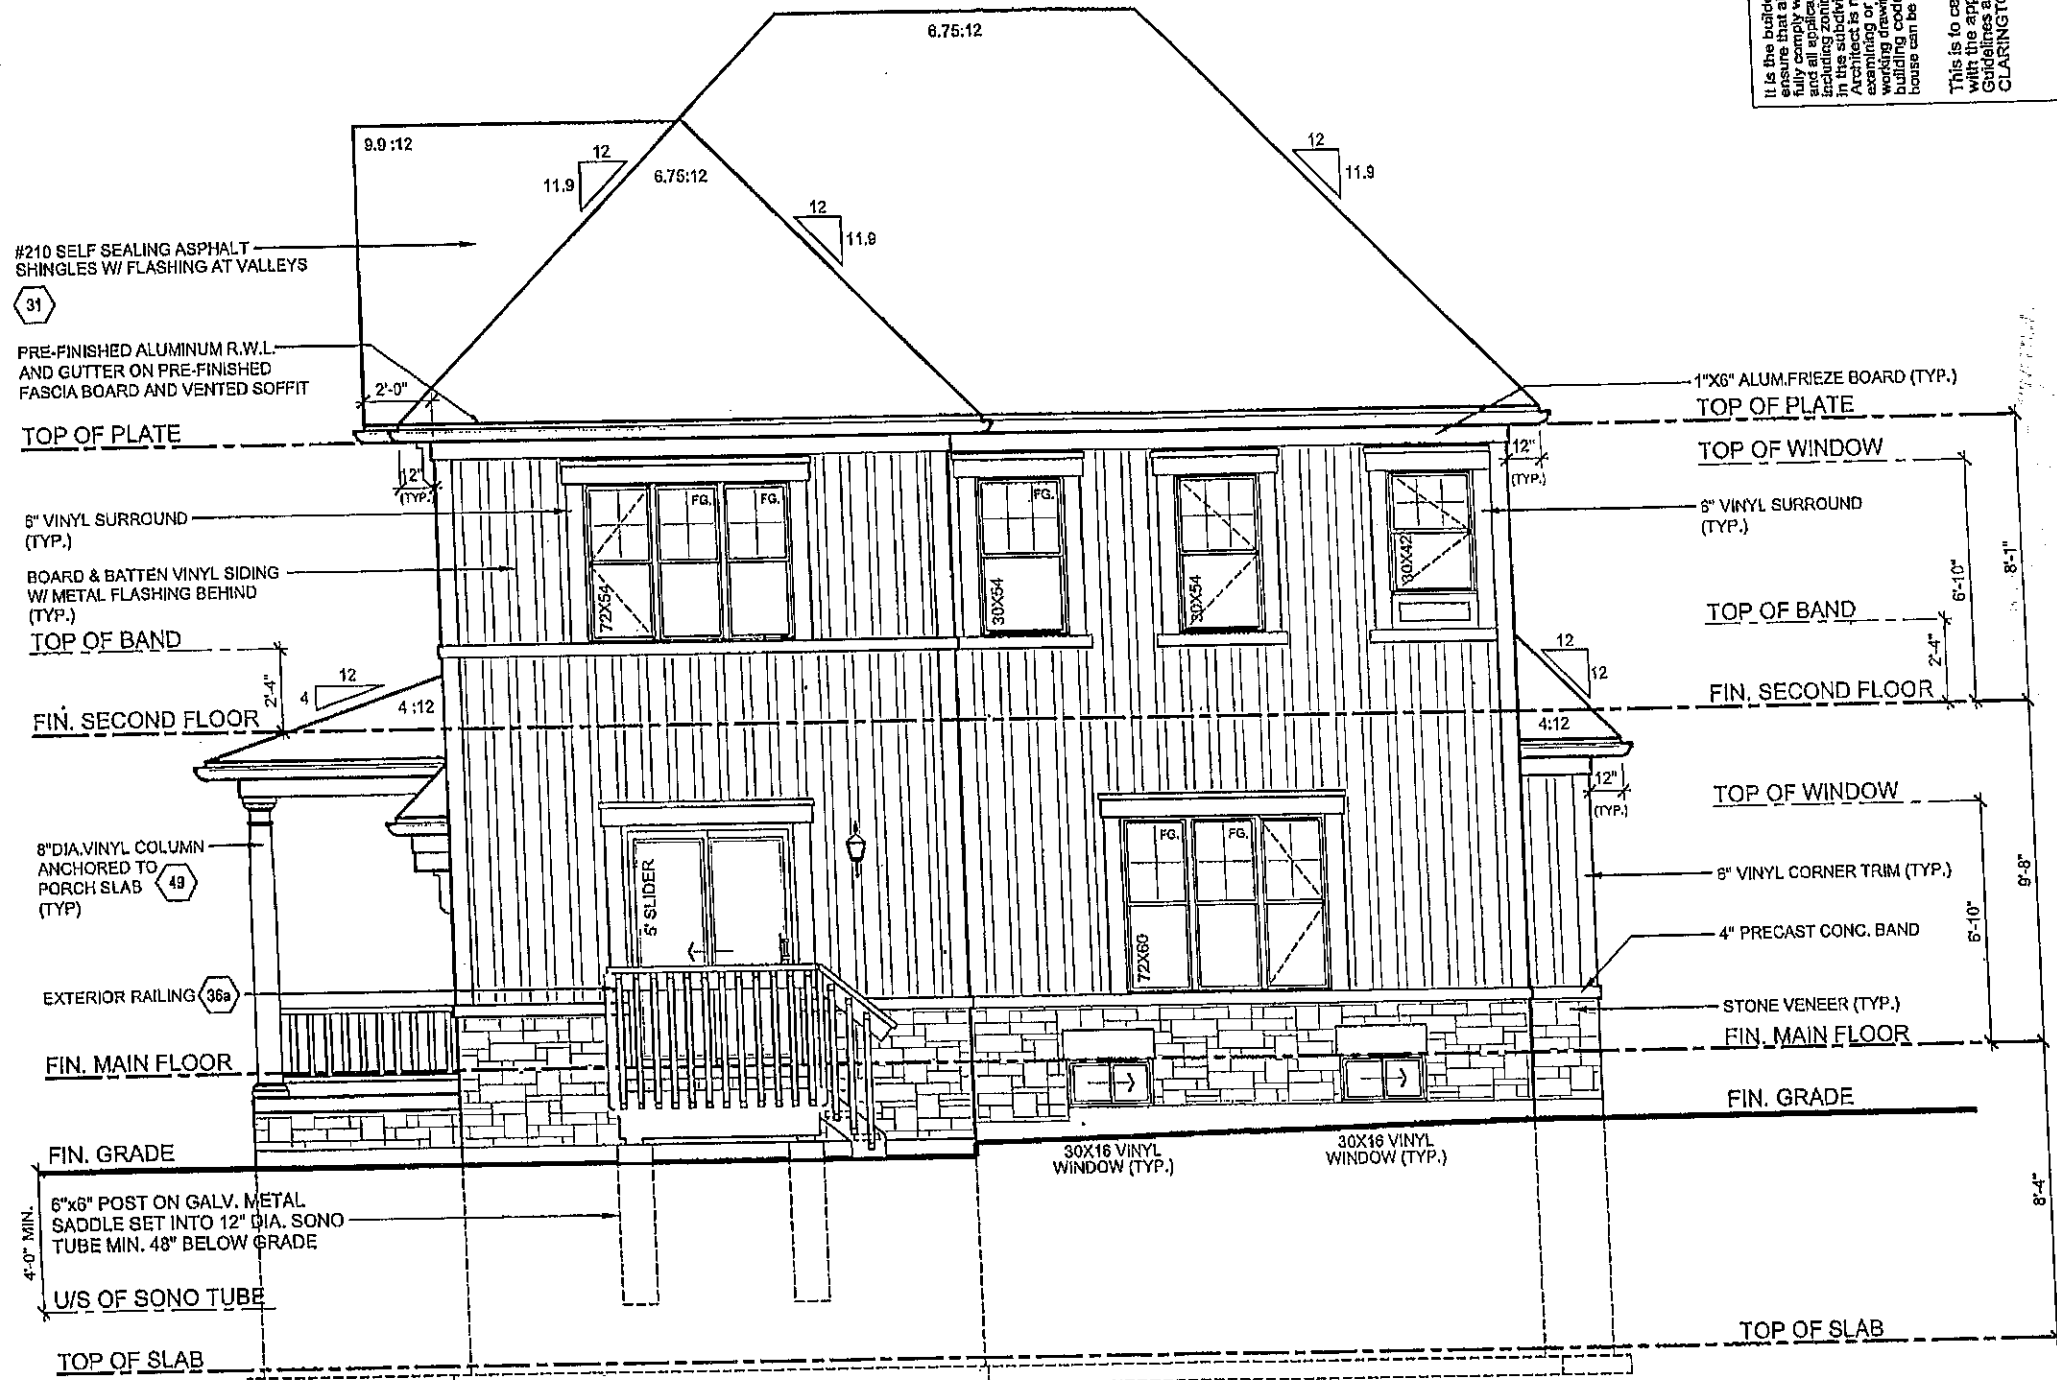

UPGRADED REAR ELEVATION 'A'
WALKOUT DECK CONDITION

It is the builder's complete responsibility to ensure that all plans submitted for approval comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any other in the subdivision agreement. In any way for Architect is not responsible for any zoning or examining or any other matter with respect to any zoning or any other matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the Municipality of CLARINGTON.

ARCHITECTURAL REVIEWER APPROVAL
 NOV 13 2014
 KIM G. VANDER LINDEN, ARCHT.

MODEL 40-5 (GEORGE) - CORNER ELEVATION 'A'	No. ISSUED OR REVISION COMMENTS 1. ISSUED FOR CLIENT REVIEW 2. REVISED AS PER ENGINEER COMMENTS ISSUED FOR FINAL		DATE NOV. 04/14 NOV. 13/14	DWN SB SB	CHK NC NC	SCALE 3/16" = 1'0"
	PROJECT NUMBER 08080					
	PAGE A9					
	SIGNATURE: _____ QUALIFIED DESIGNER BCIN: 21032 FIRM BCIN: 26995 DATE: NOVEMBER 13, 2014					
CLIENT ESQUIRE HOMES NORTHGLEN CLARINGTON, ONTARIO						
THESE DRAWINGS ARE NOT TO BE SCALED. ALL DIMENSIONS MUST BE VERIFIED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF WORK. ANY DISCREPANCIES MUST BE REPORTED DIRECTLY TO RN DESIGN LTD. MUST BE REPORTED TO RN DESIGN LTD. IN ACCORDANCE TO SB-12 COMPLIANCE PACKAGE. REVISED: SEPTEMBER 2013 - RN STAFF IN ACCORDANCE TO SB-12 COMPLIANCE PACKAGE.						



CONSTRUCTION NOTES:

COMPLIANCE PACKAGE J - O.B.C. 2012 - 2014 ENACTMENT

(UNLESS OTHERWISE NOTED)
-ALL CONSTRUCTION TO CONFORM TO THE ONTARIO BUILDING CODE (O.B.C.) AND ALL OTHER CODES AND LOCAL AUTHORITIES HAVING JURISDICTION.
-ALL DIMENSIONS GIVEN FIRST IN IMPERIAL FOLLOWED BY METRIC.
-THERMAL RESISTANCE VALUES BASED ON ZONE 1

FOOTINGS / SLABS:

TYPICAL STRIP FOOTING:

O.B.C. 9.15.3.
-BASED ON 16" (41mm) MAX. SUPPORTED JOIST LENGTH
-MIN. 2200psi (15MPa) CONCRETE AFTER 28 DAYS
-SHALL REST ON UNDISTURBED SOIL ROCK OR COMPACTED GRANULAR FILL
-W/ MIN. 10.9psi (75kPa) BEARING CAPACITY
-FIG. TO HAVE CONTINUOUS KEY
-FIG. SIZES MAY BE REDUCED FOR SOILS W/ GREATER BEARING CAPACITY (AS PER SOILS ENGINEERING REPORT)

TYPICAL STRIP FOOTING: (EXTERIOR WALLS)

O.B.C. 9.15.3.5
-FIG. TO EXTEND MIN. 4'-0" (1200mm) BELOW GRADE
BRICK VENEER - 1 STOREY - 13" X 4" (330mm X 100mm)
- 2 STOREY - 19" X 4" (485mm X 135mm)
- 3 STOREY - 26" X 9" (660mm X 230mm)

1

SIDING:
-1 STOREY - 10" X 4" (255mm X 100mm)
-2 STOREY - 14" X 4" (355mm X 100mm)
-3 STOREY - 18" X 5" (460mm X 130mm)

2

TYPICAL STRIP FOOTING: (INTERIOR BEARING WALLS)

O.B.C. 9.15.3.6
-1 STOREY MASONRY - 16" X 4" (410mm X 100mm)
-1 STOREY STUD - 12" X 4" (305mm X 100mm)
-2 STOREY MASONRY - 26" X 9" (650mm X 230mm)
-2 STOREY STUD - 18" X 5" (450mm X 130mm)
-3 STOREY MASONRY - 36" X 14" (900mm X 360mm)
-3 STOREY STUD - 24" X 8" (600mm X 200mm)

3

STEP FOOTING:

O.B.C. 9.15.3.9
-23 5/8" (600mm) MAX. VERTICAL RISE & 23 5/8" (600mm) MIN. HORIZONTAL RUN.

4

DRAINAGE TILE OR PIPE:

O.B.C. 9.14.3
-4" (100mm) MIN. DIA. Laid ON UNDISTURBED OR WELL COMPACTED SOIL
W/ TOP OF TILE OR PIPE TO BE BELOW BOTTOM OF FLR. SLAB.
-COVER TOP & SIDES OF TILE OR PIPE W/ 5 7/8" (150mm) OF CRUSHED STONE OR OTHER COARSE CLEAN GRANULAR MATERIAL.
-TILE SHALL DRAIN TO A SEWER, DRAINAGE DITCH, OR DRY WELL.

5

BASEMENT SLAB:

O.B.C. 9.13. & 9.16.
-3" (75mm) CONCRETE SLAB
-2200psi (15MPa) AFTER 28 DAYS - O.B.C. 9.16.4.5.
-DAMP-PROOF BELOW SLAB W/ MIN. 0.006" (0.15mm) POLYETHYLENE OR TYPE 5 ROLL ROOFING W/ 4" (100mm) LAPPED JOINTS.
-DAMP-PROOFING MAY BE OMITTED IF CONCRETE HAS MIN. 3600psi (25MPa) COMPRESSIVE STRENGTH AFTER 28 DAYS
-4" (100mm) OF COARSE GRANULAR MATERIAL
-PROVIDE BOND BREAKING MATERIAL BETWEEN SLAB & FIG.
-WHERE SLAB IS REQUIRED TO BE WATERPROOFED IT SHALL CONFORM TO O.B.C. 9.13.3.
-FLOOR DRAIN PER O.B.C. 9.31.4.4.
-R-10 (RSI 1.76) INSULATION AT PERIMETER OF SLAB WHERE GRADE IS WITHIN 23-1/2" (600mm) OF BASEMENT SLAB EDGE. INSULATION TO EXTEND TO NOT LESS THAN 23-1/2" (600mm) BELOW EXTERIOR GRADE LEVEL (O.B.C. 9.12-2.1.1.6 [3])
-UNLESS IT CAN BE DEMONSTRATED THAT SOIL GAS DOES NOT CONSTITUTE A PROBLEM, SOIL GAS CONTROL SHALL CONFIRM TO SUPPLEMENTARY STANDARD (O.B.C. 9.12-2.1.1.6 [3])

5a

SLAB ON GROUND:

O.B.C. 9.13. & 9.16.
-3" (75mm) CONCRETE SLAB - O.B.C. 9.16.4.5.
-2200psi (15MPa) AFTER 28 DAYS - O.B.C. 9.16.4.5.
-DAMP-PROOF BELOW SLAB W/ MIN. 0.006" (0.15mm) POLYETHYLENE OR TYPE 5 ROLL ROOFING W/ 4" (100mm) LAPPED JOINTS.
-DAMP-PROOFING MAY BE OMITTED IF CONCRETE HAS MIN. 3600psi (25MPa) COMPRESSIVE STRENGTH AFTER 28 DAYS
-4" (100mm) OF COARSE GRANULAR MATERIAL
-PROVIDE BOND BREAKING MATERIAL BETWEEN SLAB & FIG.
-WHERE SLAB IS REQUIRED TO BE WATERPROOFED IT SHALL CONFORM TO O.B.C. 9.13.3.
-FLOOR DRAIN PER O.B.C. 9.31.4.4.
-UNLESS IT CAN BE DEMONSTRATED THAT SOIL GAS DOES NOT CONSTITUTE A PROBLEM, SOIL GAS CONTROL SHALL CONFIRM TO SUPPLEMENTARY STANDARD (O.B.C. 9.12-2.1.1.6 [3])

6

GARAGE SLAB / EXTERIOR SLAB:

O.B.C. 9.13. & 9.16.
-4" (100mm) CONCRETE SLAB
-4650psi (32MPa) COMPRESSIVE STRENGTH AFTER 28 DAYS FOR UNREINFORCED CONC. & W/ 5-8% AIR ENTRAINMENT - O.B.C. 9.31.6.
-6" X 6" (152.5 X 152.5) WIRE MESH LOCATED NEAR MID-DEPTH OF SLAB
-4" (100mm) OF COARSE GRANULAR MATERIAL
-ANY FILL PLACED UNDER SLAB, OTHER THAN COARSE CLEAN GRANULAR MATERIAL, SHALL BE COMPACTED.

7

PLASTER:

O.B.C. 9.15.5.3.
-PLASTER
-CONCRETE NB - 4" X 1/2" (100mm X 300mm)
-BLOCK NB - 4" X 1/2" (100mm X 300mm) BONDED & TIED TO WALL AS PER O.B.C. 9.20.11.2. TOP 7 7/8" (200mm) SOLID.
OR
-BRAM POKET
-4" (100mm) INTO FDN. WALL W/ WIDTH TO MATCH BEAM SIZE.
-1/2" (13mm) SPACE AROUND WOOD BEAMS (O.B.C. 9.23.2.2.)

8

STEEL PIPE COLUMN:

O.B.C. 9.15.3.4. & 9.17.3.
-FIXED COLUMN
-MIN. 3 1/2" (90mm) DIA. W/ 3/16" (4.76mm) WALL THICKNESS
-FOR STEEL BEAMS, CLIPS @ TOP & MIN. 6" X 4" X 1/4" (152mm X 100mm X 6.35mm) STEEL BLM. PLATE
-FOR WOOD BEAMS, MIN. 4" X 4" X 1/4" (100mm X 100mm X 6.35mm) STEEL BLM. PLATE
-BTM. PLATES, OR TOP PLATE TO EXTEND MIN. WIDTH OF 6" (150mm) WHERE ADJUSTABLE COLUMNS TO CONFORM TO CAN/C 308.22 (1)
-IMPOSED LOAD DOES NOT EXCEED 36 kN (O.B.C. 9.13.3.4)
FIG. SIZE:
-34" X 34" X 1/4" (860mm X 860mm X 6.35mm)
-44" X 44" X 1/4" (1120mm X 1120mm X 6.35mm)
-40" X 40" X 1/4" (1016mm X 1016mm X 6.35mm)
-51" X 51" X 1/4" (1295mm X 1295mm X 6.35mm)
-MAX. 16'-0" (4880mm)
-MAX. 9'-10" (2997mm)
-3 STOREY
-MAX. 9'-10" (2997mm)
-MAX. 16'-0" (4880mm)
-WHERE COL. SITS ON FDN. WALL USE 4" X 8" X 5/8" (100mm X 200mm X 16mm) STEEL PLATE WITH 2-5/8" (16mm) ANCHOR BOLTS

8a

ALTERNATE FRAME WALL CONSTRUCTION:

O.B.C. 9.15.3.4. & 9.17.3.
-SIDING OR STUCCO AS PER ELEVATIONS. MIN. 7 7/8" (200mm) FROM FINISHED GRADE (O.B.C. 9.28.1.4. & 9.27.1)
-1/2" (12.7mm) RIGID INSULATION W/ TAPED JOINTS (O.B.C. 9.23.10.1.1) NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-REPLACE 1/2" (12.7mm) GYPSUM BOARD WITH 1/2" (12.7mm) TYPE 'X' GYPSUM BOARD.
-FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
-NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-REPLACE 1/2" (12.7mm) GYPSUM BOARD WITH 1/2" (12.7mm) TYPE 'X' GYPSUM BOARD.



rn design
Inspire • Create
P.O. Box 177
P.O. Box 177
P.O. Box 177

REVISED: SEPTEMBER 20, 2013 - RN STAFF
IN ACCORDANCE TO SB-12 COMPLIANCE PACKAGE J
◆ CLIENT SPECIFIC REVISIONS

MODEL
40-5 (GEORGE) - CORNER ELEVATION 'A'

CLIENT
ESQUIRE HOMES
NORTHGLEN
CLARINGTON, ONTARIO

No.	ISSUED OR REVISION COMMENTS
1.	ISSUED FOR CLIENT REVIEW
2.	REVISED AS PER ENGINEER COMMENTS
	ISSUED FOR FINAL

QUALIFIED DESIGNER BCIN: 21032	DATE: NOVEMBER 13, 2014
28995	

SIGNATURE:

NOV. 04/14
NOV. 13/14

DATE	DWN	CHK	SCALE
NOV. 04/14	SB	NC	N/A
NOV. 13/14	SB	NC	08080
			PAGE

D1

THESE DRAWINGS ARE NOT TO BE SCALED. ALL DIMENSIONS MUST BE VERIFIED BY CONTRACTOR PRIOR TO COMMENCEMENT OF ANY WORK. ANY DISCREPANCIES MUST BE REPORTED DIRECTLY TO RN DESIGN LTD.

O.B.C. 9.23.
-SIDING OR STUCCO AS PER ELEVATIONS. MIN. 7 7/8" (200mm) FROM FINISHED GRADE (O.B.C. 9.28.1.4. & 9.27.1)
-WALL SHEATHING MEMBRANE AS PER O.B.C. 9.27.3.2.
-1/4" (6mm) PLYWOOD (EXTERIOR TYPE) OR EQUIVALENT AS PER O.B.C. 9.23.16.
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C.
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD
-BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE
-BRICK OR STONE SILL UNDER OPENINGS. FLASHING UNDER
-1 1/2" (38mm) AIR SPACE
-2" X 4" (38mm X 89mm) WOOD STUDS @ 16" (400mm) O.C. @ 12" (300mm) O.C. ON BOTTOM FLR. WHEN 3 STOREYS
-SPRACE W/ CONT. 16 GAUGE STEEL T BRACES FROM TOP PLATE TO BTM. PLATE FOR THE FULL LENGTH OF WALL, OR
-CONT. 2" X 4" (38mm X 89mm) SOLID WOOD BLOCKING @ APPROXIMATELY 45 DEG. FROM TOP PLATE TO BTM. PLATE FOR FULL LENGTH OF WALL
-R-14 (RSI 2.46) INSULATION
-CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3. & 9.25.4.
O.B.C. 9.23.3.1.2
-1/2" (12.7mm) GYPSUM BOARD
NOTE - SUPPORT FOR 2 + 3 FLOORS ABOVE - O.B.C. 19.23.10.1.1 = 1/2" (12.7mm) GYPSUM BOARD
-FOR 2 FLOORS SUPPORTED ABOVE, 2" X 4" (38mm X 89mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
-FOR 3 FLOORS SUPPORTED ABOVE, 2" X 6" (38mm X 140mm) STUDS ARE REQUIRED TO BE SPACED @ 12" (300mm) O.C.
REQ. FOR FIRE RATING (LESS THAN 4'-0" LIMITING DISTANCE):
O.B.C. 9.23.3.1.1
-1/2" (12.7mm) GYPSUM BOARD

