


ALL CONC. FRAMING TO CONFORM WITH PARTS OF O.C.2012 ROOF RAFTERS THAT CROSS MEET OVER TRUSSES TO BE 2x4 SPACED 24" O.C. WITH A VERT. POST TO THE TRUSS UNDERNEATH AT EACH CROSS PT. VERT. POST LONGER THAN 6" TO HAVE LATERAL BRACING SO THAT THE DIST. BETWEEN END PT. & BETWEEN ROWS OF BRACING DOES NOT EXCEED 6'

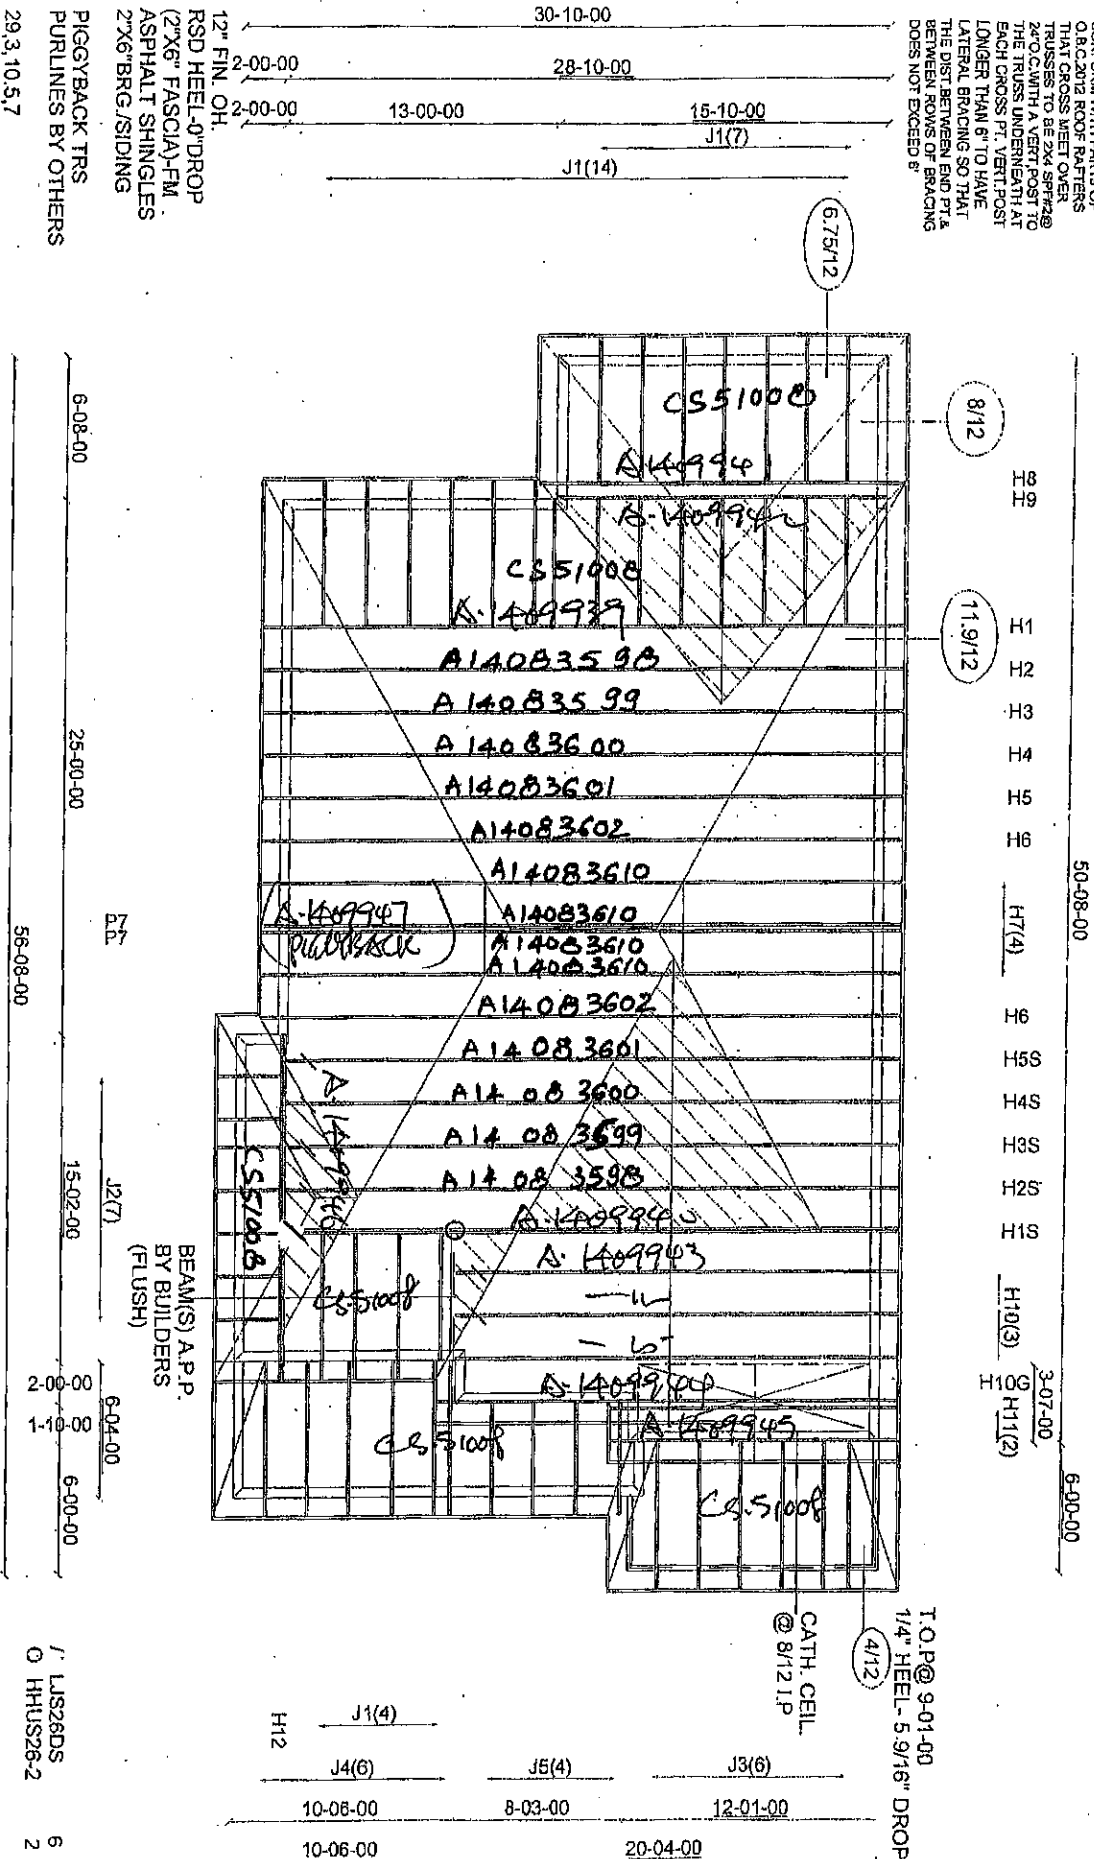

CONVENTIONAL
FRAMING BY
OTHERS

Milek Ver 7.5.0