

INSTALLATION INSTRUCTIONS **27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC BUILT-IN** **MICROWAVE/OVEN COMBINATION**

INSTRUCTIONS D'INSTALLATION **ENSEMBLE FOUR À MICRO-ONDES ET FOUR** **CONVENTIONNEL ÉLECTRIQUES ET ENCASTRÉS** **DE 27" (68,6 CM) ET 30" (76,2 CM)**

Table of Contents/Table des matières

BUILT-IN MICROWAVE/OVEN COMBINATION SAFETY.....	2	SÉCURITÉ DU FOUR À MICRO-ONDES ET DU FOUR CONVENTIONNEL COMBINÉS ET ENCASTRÉS.....	9
INSTALLATION REQUIREMENTS.....	2	EXIGENCES D'INSTALLATION.....	9
Tools and Parts.....	2	Outils et pièces.....	9
Built-In Microwave/Oven Combination Location Requirements.....	2	Exigences d'emplacement de l'ensemble four à micro-ondes et four conventionnel encastrés.....	10
Electrical Requirements.....	3	Spécifications électriques.....	11
INSTALLATION INSTRUCTIONS.....	4	INSTRUCTIONS D'INSTALLATION.....	12
Prepare Built-In Microwave/Oven Combination.....	4	Préparation de l'ensemble four à micro-ondes et four conventionnel encastrés.....	12
Remove Oven Door(s).....	4	Dépose de la/des porte(s) du four.....	12
Replace Oven Door(s).....	5	Réinstallation de la/des porte(s) du four.....	12
Make Electrical Connection.....	6	Raccordement électrique.....	13
Install Oven.....	7	Installation du four.....	14
Install Warning Drawer Deflector Kit (Only for Ovens Installed Above Warming Drawers).....	7	Installation de l'ensemble de déflecteur pour tiroir-réchaud (uniquement pour les fours installés au-dessus d'un tiroir-réchaud).....	15
Complete Installation.....	8	Achever l'installation.....	16

Item number - 668304

KITCHEN-AID

Model # KOC6500ESS

IMPORTANT:
 Save for local electrical inspector's use.

IMPORTANT :
 À conserver pour consultation par l'inspecteur local des installations électriques.

W10725683B

RECEIVED

FEB 26 2013

Lot 1 PKE2


■ Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

■ Oven support surface must be solid, level and flush with bottom of cabinet cutout. Floor must be able to support a total weight (microwave and built-in oven) of 208 lbs (95 kg) for 27" (68.6 cm) models or 249 lbs (113 kg) for 30" (76.2 cm) models.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Product Dimensions

27" and 30" (68.6 cm and 76.2 cm) Ovens

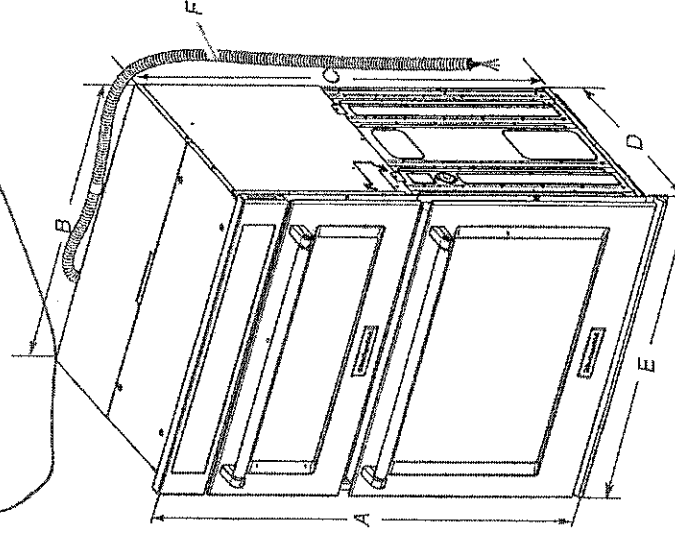

27" (68.6 cm) models


- A. 42³/₈" (108.0 cm) overall height
- B. 25⁷/₈" (64.6 cm) recessed width
- C. 41" (104.1 cm) recessed height
- D. 23¹/₂" (59.1 cm) max. recessed depth
- E. 27" (68.6 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the rear conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

30" (76.2 cm) models

- A. 42⁷/₈" (108.0 cm) overall height
- B. 28¹/₂" (72.2 cm) recessed width
- C. 41" (104.1 cm) recessed height
- D. 23¹/₂" (59.1 cm) max. recessed depth
- E. 30" (76.2 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the rear conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

27" and 30" (68.6 cm and 76.2 cm) Ovens

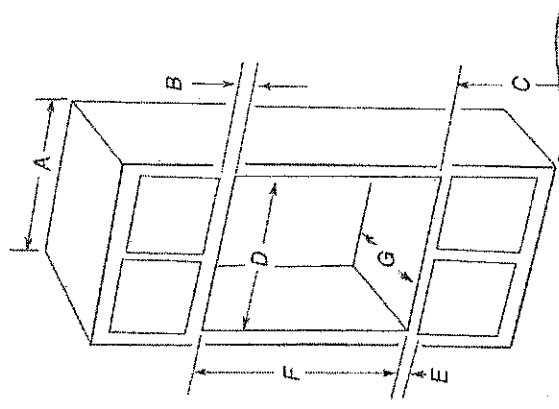

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 19¹/₂" (48.9 cm) bottom of cutout to floor is recommended.
- D. 25¹/₂" (64.8 cm) bottom of cutout to floor is acceptable.
- E. 1¹/₂" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 41⁵/₈" (105 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 19¹/₂" (48.9 cm) bottom of cutout to floor is recommended.
- D. 28¹/₂" (72.4 cm) bottom of cutout to floor is acceptable.
- E. 1¹/₂" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 41⁵/₈" (105 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 41" and 41¹/₂" (104.1 cm and 105.6 cm) for microwave/oven combination.

Electrical Requirements

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

Lot 1 BLE2

FEB 26 2003

NA30K6550TS

30" Gas Cooktop

Features


- WiFi Connectivity
- Powerful Cooktop
 - Right Front: 13K BTU
 - Left Front: 9.5K BTU
 - Right Rear: 5K BTU
 - Left Rear: 9.5K BTU
 - Center: Dual, 19K BTU (Oval)
- Cast Iron 3-Piece Grates
- Sealed Burners
- Burner On/Off Monitoring

Convenience

- Dishwasher Safe Grates
- LP Conversion Kit



19K Power Burner



LED Illuminated Backlit Knobs

Available Colors



Stainless Steel (shown)



Black Stainless Steel

Signature Features

19K POWER BURNER

- Powerful burner boils water faster.

GRIDDLE

- Cook breakfast foods, grill sandwiches, or sauté vegetables on the griddle.

LED ILLUMINATED BACKLIT KNOBS

- Visually lets you know your cooktop is on, even at a distance.

22 March 2018

H.S

SAMSUNG


NA30K6550TS

30" Gas Cooktop

Installing Your Cooktop



Can be installed over a single oven.

All horizontal clearances must be maintained for a minimum of 18" above the cooking surface.



Allow 1/8" minimum vertical clearance from the cooktop bottom (or 3 1/8" minimum depth from the countertop) to any combustible surfaces, including the upper edge of a drawer installed below the cooktop.

Maintain the following minimum clearance dimensions.

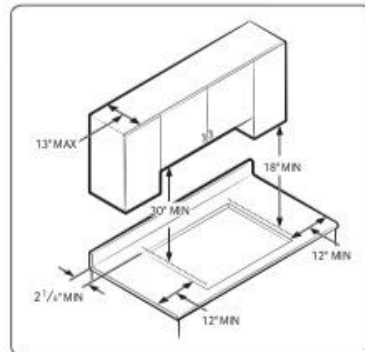

See built-in oven installation for complete installation instructions.

Total Power (BTU)

56K

Power Source

120V/60Hz

Gas Cooktop (BTU)

- Right Front: 13K
- Left Front: 9.5K
- Right Rear: 5K Simmer
- Left Rear: 9.5K
- Center: 19K (Dual)

Warranty

One (1) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (Max) Cooktop Dimensions:

30" x 3 1/8" x 21"

Cooktop Cut-Out Dimensions:

28 1/2" x 3 1/8" x 19 5/8"

Weight: 27.1 lbs. (27.6 lbs. Black Stainless Steel)

Shipping Dimensions & Weight (WxHxD)


Dimensions:

34 11/16" x 10 5/8" x 25 5/8"


Weight: 74.5 lbs. (75.0 lbs. Black Stainless Steel)

Color	Model #	UPC Code
Stainless Steel	NA30K6550TS	887276183473
Black Stainless Steel	NA30K6550TG	887276183251

Cooktop Dimensions

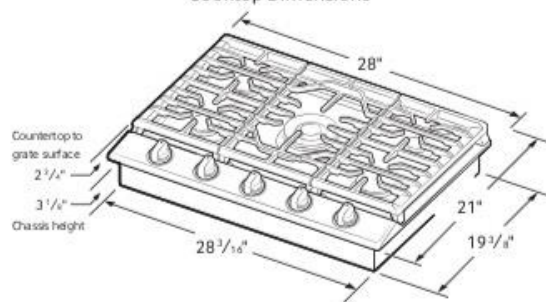

Cutout Dimensions of Countertop

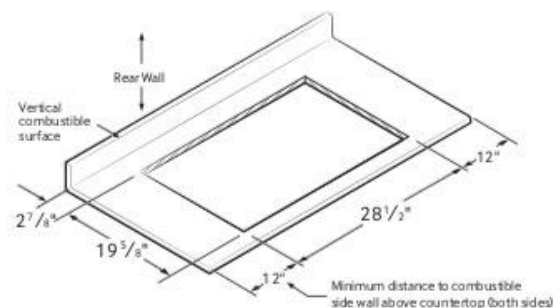

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.