

APPLIANCES

Invoice	Qty.	Description
2699 72,351 09Apr21 NoCat	1	APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY

BASEMENT WINDOWS

Invoice	Qty.	Description
2657 72,351 25Mar21	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

CERAMIC

Invoice	Qty.	Description
2754 37 12May21	1	FRONT FOYER: TILE, FLOOR, LEVEL 5 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
2754 37 12May21	1	POWDER ROOM: TILE, FLOOR, LEVEL 5 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
2754 37 12May21	1	KITCHEN: TILE, FLOOR, LEVEL 5 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.

DRYWALL

Invoice	Qty.	Description
2657 72,351 25Mar21 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

ELECTRICAL

Invoice		Qty.	Description
2657 72,351 25Mar21 **	2		BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2657 72,261 08Apr21	1		4.0 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS
25Mar21 NoCat			
2670 72,261 08Apr21	1		KITCHEN: INSTALL VAC PAN UNDER KITCHEN SINK
2670 72,273 08Apr21	1		KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG - SEE PLAN
2670 72,307 08Apr21	1		KITCHEN: RELOCATE STANDARD CEILING MOUNT FIXTURE - APPROX. CENTERED ABOVE ISLAND - SEE PLAN
2670 72,280 08Apr21	1		KITCHEN: ADDITIONAL REINFORCED CEILING OUTLET - APPROX. CENTERED ABOVE KITCHEN ISLAND - SAME SWITCH AS STANDARD
2670 72,303 08Apr21	1		KITCHEN: UNDER CABINET FLUORESCENT LIGHT FIXTURES - BUNDLE INCLUDING LIGHT VALANCE
2670 72,289 08Apr21	6		GREAT ROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - INCLUDES ONE SWITCH INCLUDED IN APS
2670 72,281 08Apr21	1		GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - APPROX. 64" A.F.F.
2670 72,307 08Apr21	1		UPPER HALL: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX. CENTRE AT OTB - SEE PLAN
2754 72,282 12May21	1		KITCHEN: ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING

FORMING

Invoice	Qty.	Description
2657 72.202 25Mar21	1	PINE VALLEY MODEL 40.06 LILAC ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING. INCL UDED IN APS

GLASS AND MIRROR

Invoice	Qty.	Description
2754 12May21 NoCat	2	MASTER ENSUITE + SHARED BATH: UPGRADE SHOWER DOOR HANDLES

HARDWOOD

Invoice	Qty.	Description
2754 4 12May21	1	THRU OUT STANDARD AREAS - MAIN HALL/ DINING/ LIBRARY/ GREAT ROOM/ UPPER HALL/ MASTER BEDROOM/ BEDROOM 2/ BEDROOM 3/ BEDROOM 4: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UV OIL FINISH - CORNER - LEVEL 4

HVAC

Invoice	Qty.	Description
2657 72.241 25Mar21	1	4.0 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS INCL UDED IN APS
2670 72.224 08Apr21	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN
2670 08Apr21 NoCat	1	KITCHEN: INSTALL VAC PAN UNDER KITCHEN SINK

INTERIOR TRIM /MOULDINGS

Invoice	Qty.	Description
2657 72.351 25Mar21 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2670 08Apr21 NoCat	1	FRT - KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN
2670 08Apr21 NoCat	1	KITCHEN: UNDER CABINET FLUORESCENT LIGHT FIXTURES - BUNDLE INCLUDING LIGHT VALANCE
2670 08Apr21 NoCat	1	KITCHEN: INSTALL VAC PAN UNDER KITCHEN SINK
2670 08Apr21 NoCat	1	TOE KICK CUT OUT REQUIRED
2754 12May21 NoCat	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE
2754 12May21 NoCat	1	ADDITIONAL 220V RECEPTABLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING.

NETWORK AND WIRING

Invoice	Qty.	Description
2670 72,259 08Apr21	1	GREAT ROOM: CONDUIT PIPE - FOR WALL MOUNT TV - APPROX 64" A.F.F., ABOVE FIREPLACE, THRU BASEMENT, TERMINATE AT CABLE LOCATION

PAINT

Invoice	Qty.	Description
2754 12May21 NoCat	2	MAIN STAIRS - STAIN STAIRS AND LANDINGS
		STAIRS AND LANDINGS WILL NOT MATCH HARDWOOD FLOORS IN COLOUR/TEXTURE/SPECIES

Lot: 26
Model: 40.06 A LILAC
Project/Phase: Pine Valley Forevergreen / 1

PLUMBING

Invoice	Qty.	Description
2670 72,332 08Apr21	1	KITCHEN: ROUGH-IN 1/4" COLD WATER LINE TO FRIDGE

STAIR AND RAILINGS

Invoice	Qty.	Description
2754 93,960 12May21	2	MAIN STAIRS: UPGRADE - EURONLINE # 1, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE D

WINDOWS - BASEMENT

Invoice	Qty.	Description
2657 72,351 25Mar21 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME



PINE VALLEY
FOREVERGREEN

PV - 26 Cabinetry Schedule

ROOM	DESCRIPTION	PRICE	QTY	TOTAL
KITCHEN	STANDARD DOOR STYLE - WEXFORD CLASSIC WHITE (N/C) WITH STANDARD CROWN TO COORDINATE	-	1	
	STANDARD HARDWARE: #039-03		1	
	ADJUST CABINETRY FOR 36" W RANGETOP (N/C)		1	
	LEAVE 42" SPACE IN UPPER CABINETS ABOVE RANGE FOR FUTURE 36" CHIMNEY (N/C)		1	
	ADD BASE POTS AND PANS BELOW RANGETOP		1	
	ADD SPICE PULL OUT ACCESSORY TO BASE CABINETS FLANKING RANGE		1	
	ADD BEVELLED GLASS INSERTS TO UPPER CABINETS FLANKING RANGE		2	
	ADD MATCHING INTERIOR TO UPPER GLASS CABINETS		1	
	CONVERT STANDARD CABINETRY TO TALL DEEP BUILT IN OVEN UNIT WITH DRAWER BELOW		1	
	ADD UNDERCABINET FLUORESCENT LIGHTING BUNDLE WITH VALANCE (PURCHASED ON P# 2670)		1	
ISLAND	STANDARD DOOR STYLE - WEXFORD CLASSIC WHITE (N/C)		1	
	ADD TWO-BIN RECYCLE CENTRE TO ISLAND		1	
	ADD OVERSIZED DECORATIVE PANELS TO SIDES OF ISLAND		1	
	ADD PROUD FURNITURE KICK TO REAR ISLAND + SIDES OF ISLAND		1	
CABINETRY TOTAL:				

HANDLE PLACEMENT: AT INSTALLERS DISCRETION

LOT #:	26	DATE:	MAY 11 2021
SIGNATURE:	A J		
SIGNATURE:	HX		

GOLDPARK
COURT HOUSE

REVISED:
2021-05-11

INTERIOR COLOUR SCHEME

*** NOTE: This is not an approved document. Document must be locked ***

Purchasers:

AMJID FAROOQ & HUMIRA YASMEEEN

Property: 26 of Plan -

Scheduled Closing Date: Tuesday, August 31, 2021

Telephone Res. / Bus: / (416) 886-1277

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor: Yolande Somerville

Model and Elevation: 40.06 A LILAC

Layout Changes: ☐ Yes ☒ No Sketch Attached: ☒ Yes ☐ No Exterior Colour Scheme:

1. Cabinetry

Style and Colour	Counter	Hardware
Kitchen / Breakfast	Wexford 'Classic White'	Granite: Arctic White
Laundry Room	Bowery 'Ello'	P-Lam: Standard White
Powder Room	Chesapeake 'Classic White'	Quartz: Ice Snow
Master Ensuite Bathroom	Monterey oak 'Storm Grey'	Quartz: Ice Snow
Second Ensuite Bathroom (If Applicable)	Chesapeake 'Classic White'	Quartz: Ice Snow
Shared Bath	Bowery 'Ello'	Quartz: Nordic Loft

Comment

2. Floor Tile

Selection
Entrance Vestibule
Main Hall
Kitchen / Breakfast
Laundry Room
Powder Room
Mud Room
Master Ensuite Bathroom
Second Ensuite Bathroom (If Applicable)
Lower Landing (If Applicable)
Shared Bath

Comment

3. Wall Tile

Selection	Listello/Inserts	Describe
Master Ensuite Bathroom	☐ Yes ☒ No	
Tub Deck	☐ Yes ☒ No	
Shower Stall	☐ Yes ☒ No	
Bathroom Walls	☐ Yes ☒ No	
Second Ensuite Bathroom (If Applicable)	☐ Yes ☒ No	
Shared Bath	☐ Yes ☒ No	
Kitchen Backsplash	☐ Yes ☒ No	Backsplash Behind Fridge

Comment

AF HX

Purchasers:

AMJID FAROOQ & HUMIRA YASMEEEN

Scheduled Closing Date: Tuesday, August 31, 2021
Property: 26 of Plan -

Telephone Res. / Bus: / (416) 886-1277

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor: Yolande Somerville

Model and Elevation: 40.06 A LILAC

4. Plumbing Fixtures

Master Ensuite Bathroom

Second Ensuite

Powder Room

Other Room - Specify

Other Washroom

Comment

See extras

5. Hardwood Flooring

Type and Stain

Upper Landing

Type and Stain

Kitchen / Breakfast

Upper Hall

Living Room

Master Bedroom

Dining Room

Bedroom #2

Family Room

Bedroom #3

Den/Library

Bedroom #4

Entrance Vestibule

Bedroom #5

Lower Landing
(If Applicable)

Other Room - Specify
Thru out standard areas

*3/4x5" white oak sculpted Athena

Comment

6. Carpeting

Ground Floor

☐

Upgrade

Description

Second Floor

☐

☐

Type

Area

Upgrade Underpad

Capped

Runner - *Upgrade

Carpet on Stairs

Comment

7. Fireplace

Living Room

☐

Purchased

☐

As Per Plan

☐

N/A

☐

Family Room

☐

Purchased

☒

As Per Plan

☐

N/A

☐

Other Room - Specify

☐

Purchased

☐

As Per Plan

☐

N/A

☐

Fireplace Type

Gas

Mantle Type

Mediterranean

Colour / Stain

Arctic White

Surround

n/a

Hearth

none

Comment

AS

HY

Purchasers: AMJID FAROOQ & HUMIRA YASMEEEN Property: 26 of Plan - Scheduled Closing Date: Tuesday, August 31, 2021

Telephone Res. / Bus: / (416) 886-1277 Project: Pine Valley Foreverggreen - Phase 1

Decor Advisor: Yolande Somerville Model and Elevation: 40.06 A LILAC

8. Trim Carpentry

Interior Doors	Carrara	Front Door Glass Inserts	Standard	Door Handles	Standard
Interior Trim	Standard Package				
Comment					

9. Plaster Mouldings and Medallions

Standard Throughout ☐ Yes ☐ No ☒ N/A

Entrance Vestibule		Kitchen/Breakfast		
Main Hall		Den/Library		
Living Room		Lower Landing		
Dining Room		Other Room - Specify		
Family Room				
Comment				

10. Railings and Spindles

Railing Package	Package D		
Railing Colour	*Grey Drizzle	Spindle Colour	*Black
Stringer / Riser	*Grey Drizzle	Treads	*Grey Drizzle
Comment	Oak Stairs ☒ Yes ☐ No ☐ N/A		

11. Wall Paint / Ceilings

Throughout Finished Areas	Cool White
Trim Paint	White
Smooth Ceilings	
Ground Floor	☒
Second Floor	☒
Note	

Comment

AJ

HY

Purchasers:

AMJID FAROOQ & HUMIRA YASMEEEN

Scheduled Closing Date: Tuesday, August 31, 2021

Telephone Res. / Bus: / (416) 886-1277

Property: 26 of Plan -

Decor Advisor:

Yolande Somerville

Project: Pine Valley Forevergreen - Phase 1

Model and Elevation: 40.06 A LILAC

12. Electrical

Hood Fan ☐ White ☐ Stainless ☐ N/A

Standard Appliances ☐

Above Kitchen Cabinet Light ☐ Yes ☒ No
Below Kitchen Cabinet Light ☒ Yes ☐ No

Over The Range Microwave ☐

Chimney Style Fan ☒

Comment

13. Heating and Air Conditioning

Air Conditioning

yes

Gas Provisions Stove

yes

Gas Provisions Dryer

no

Gas Provisions Barbecue

std

Comment

14. Additional Comments

15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. Purchaser's Initials
- 4) The Purchaser acknowledges reading and accepting the "Gold Park Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:

Signature:

AF

Date:

HY




PV-26 AF HY
May 11, 2021

PV-26 attach
March 23, 2021
PV-26 attach
April 6, 2021

The Lilac
40' SERIES
→ Elevation A • 3,425 sq.ft.
Elevation B • 3,385 sq.ft.

SCHEDULE F

APPROX.
64" A.F.F.

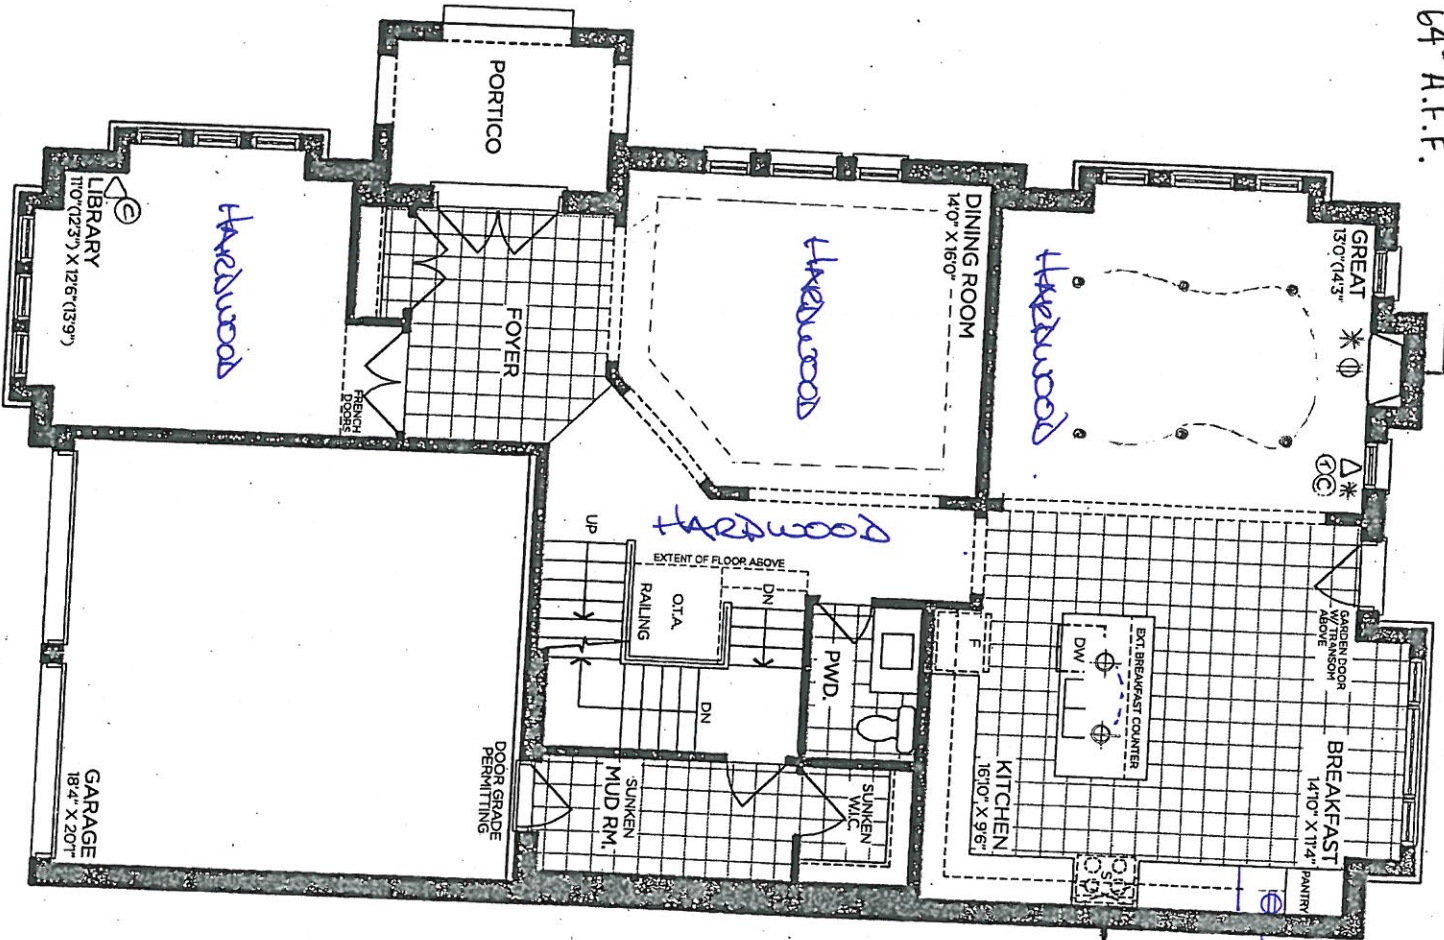

GROUND FLOOR | ELEV. A

VENDOR _____
PURCHASER _____
PURCHASER _____


GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4006

SCHEDULE 'F'

PV-26 attchd
March 23, 2021
PV-26 attchd
April 6, 2021
PV-26 AF HY
May 11, 2021

The
Lilac
40' SERIES
→ Elevation A • 3,425 sq.ft.
Elevation B • 3,385 sq.ft.

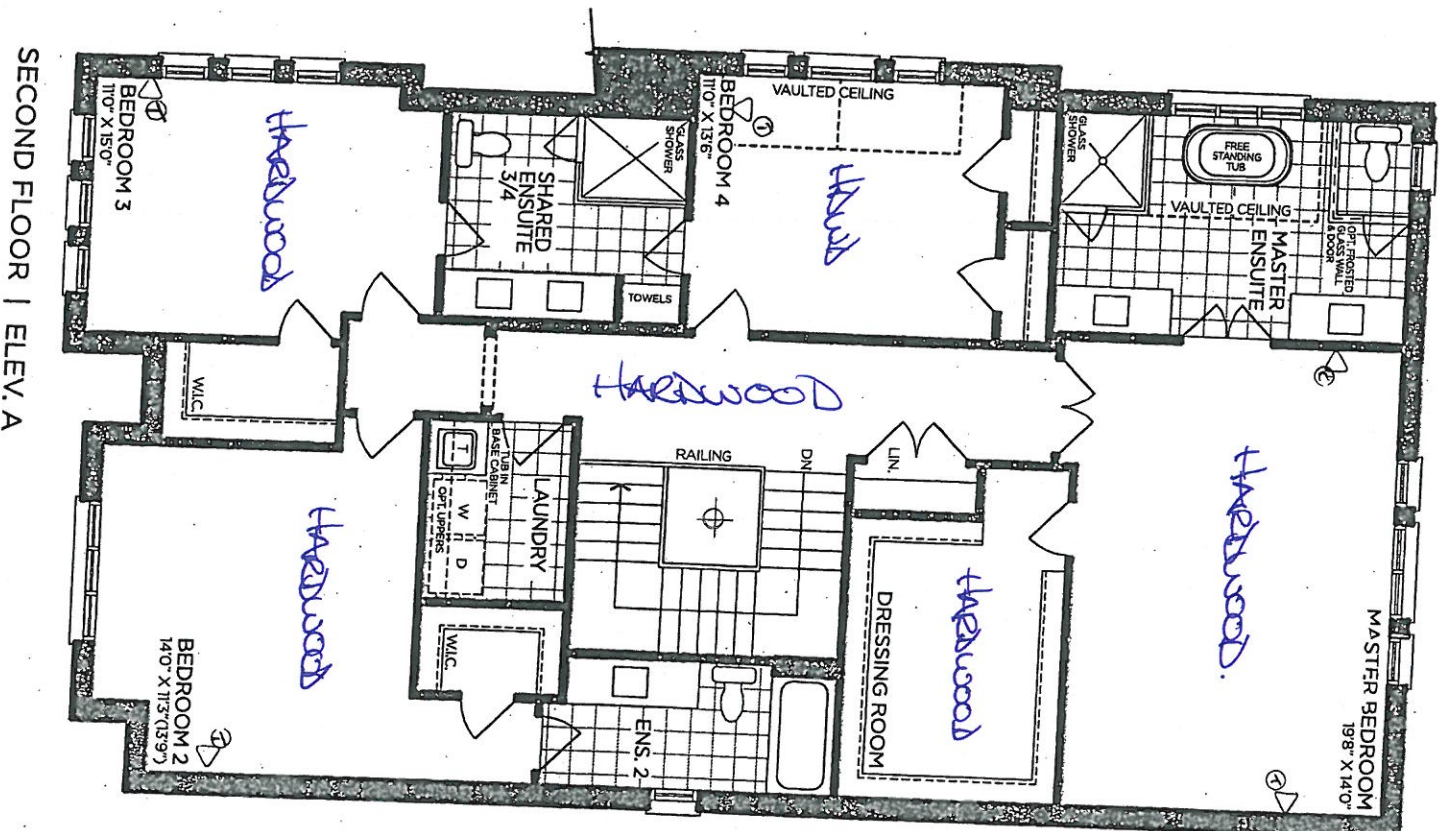

SECOND FLOOR | ELEV. A

VENDOR _____
PURCHASER _____
PURCHASER _____

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4006

PINE VALLEY
FOREVERGREEN

9 FT
BASEMENT

SCHEDULE 'F'

PV-26 attach

March 23, 2021

PV-26 attached


April 9, 2021

PV-26 AF HY

May 11, 2021

24" x 30"

40' SERIES
The Lilac
Elevation A • 3,425 sq.ft.
Elevation B • 3,385 sq.ft.

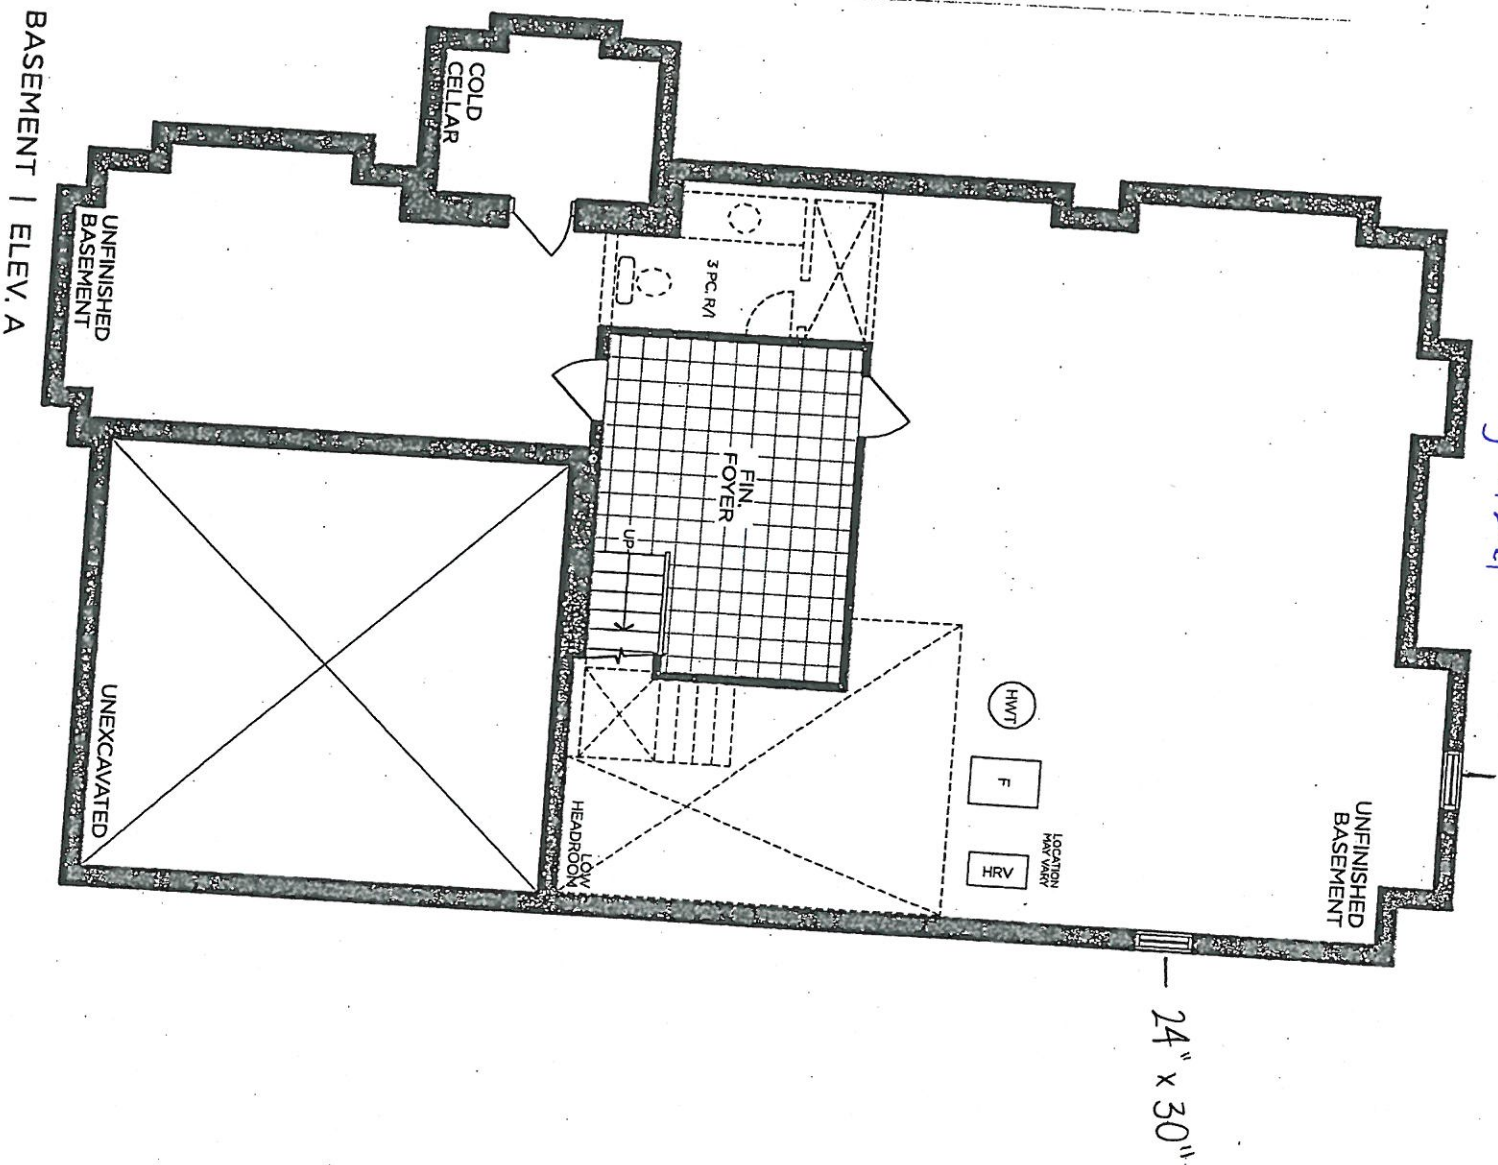

VENDOR	
PURCHASER	
PURCHASER	


GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4006



SITE STANDARD: WHITE 3/4" EXTENSION
SOFT-CLOSE DRAWERS & SOFT-CLOSE
HINGES TO KITCHEN AREA
10' CEILING - 12" H COFFERED CEILING -
M.H. = 102" + 3/4" H CONTEMPORARY
MOLDING + 5 1/4" H FURRING RAIL
+ LARGE CORNICE MOLDING TO
UNDERSIDE OF BOX

GOLDPARK HOMES
PINE VALLEY
VAUGHAN, ONTARIO
MODEL: (4006 CORNER)
LILAC






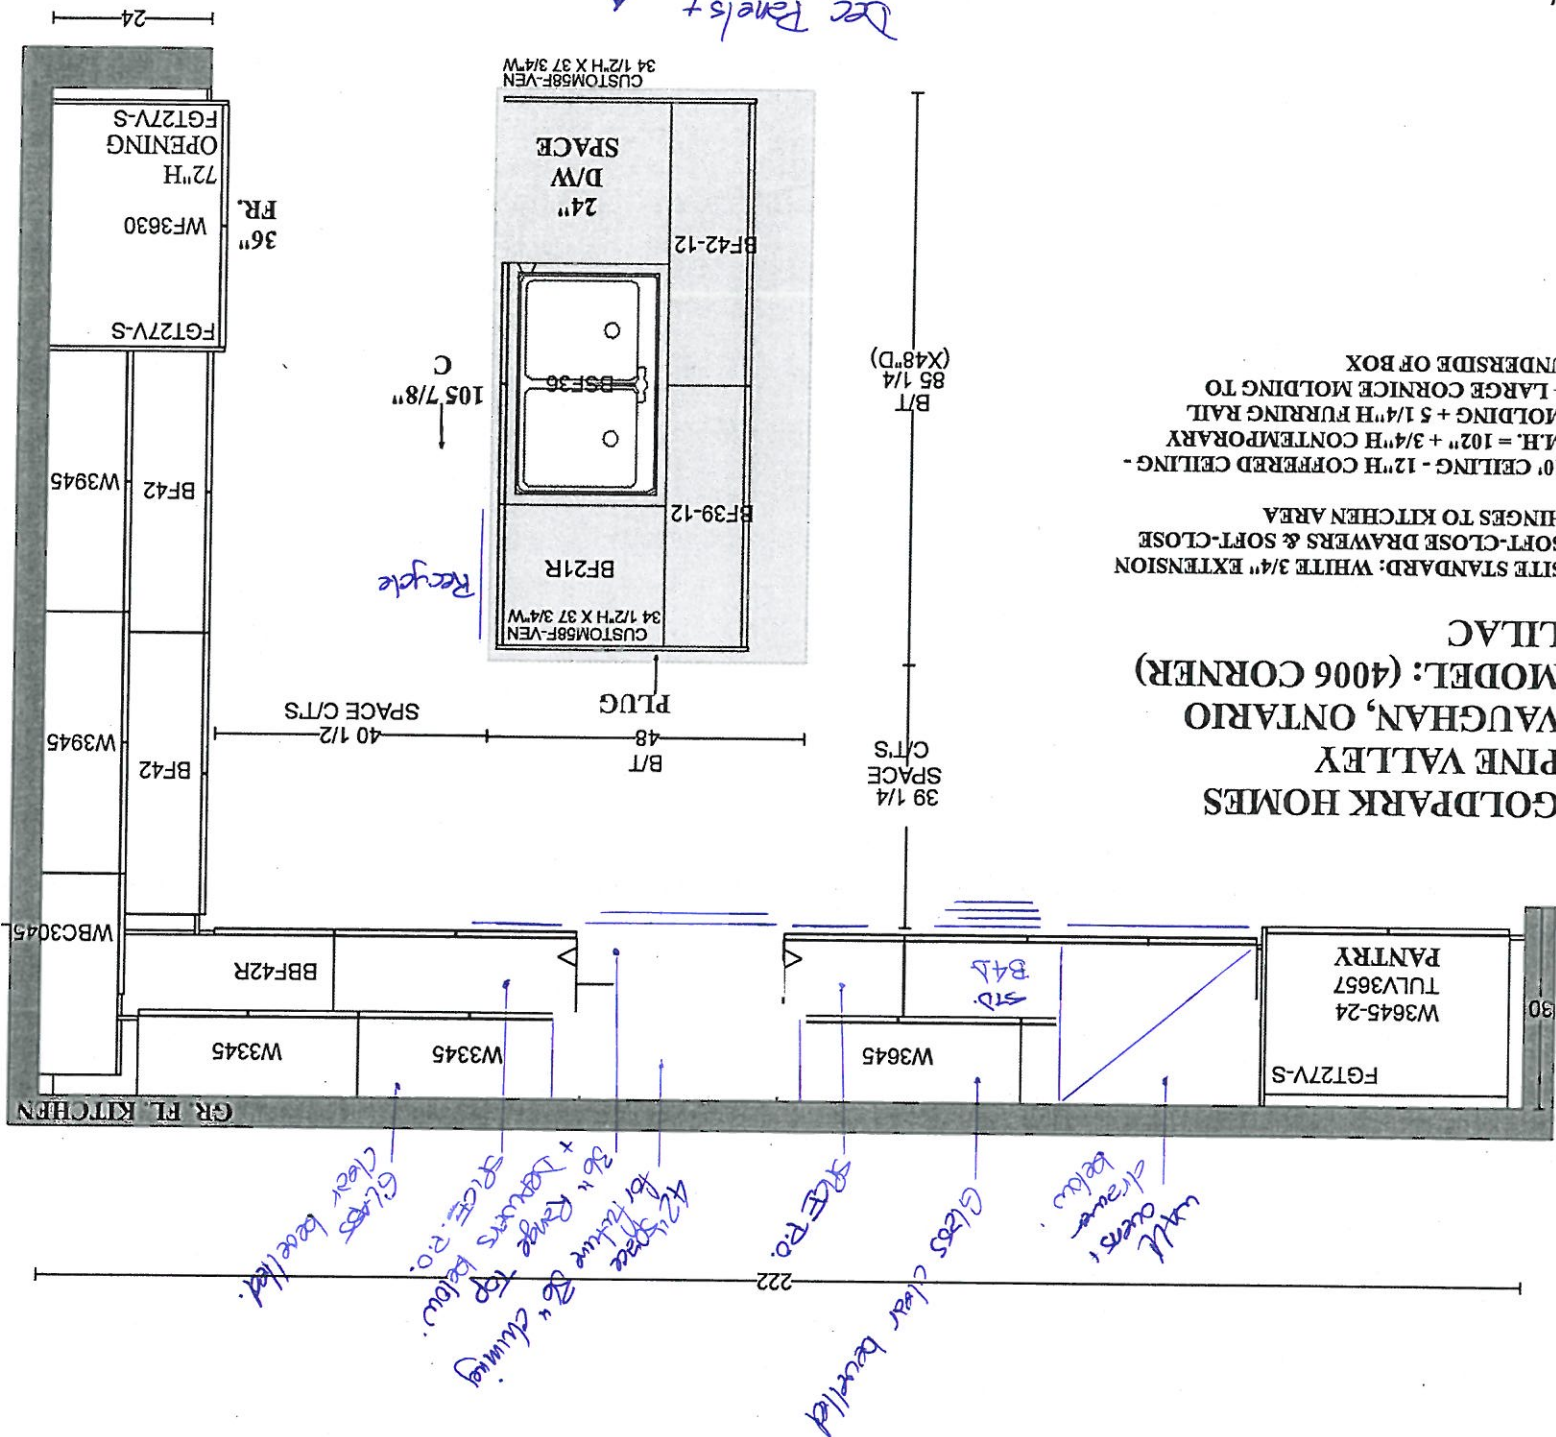


AF

HY

PV-26

May 11, 2021

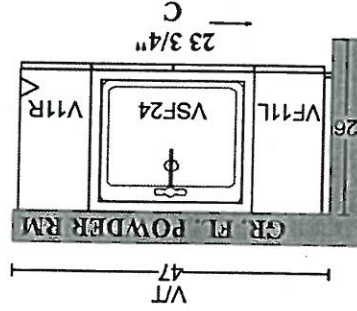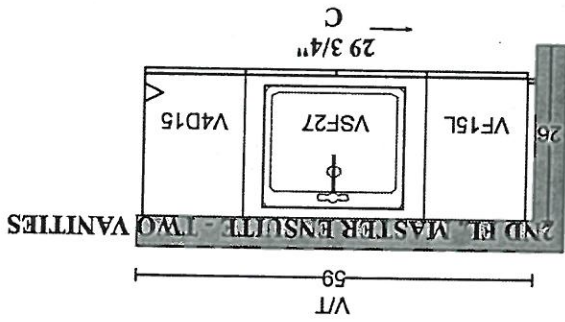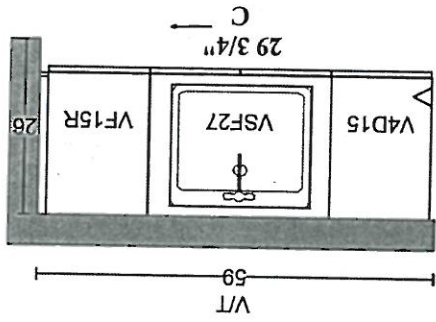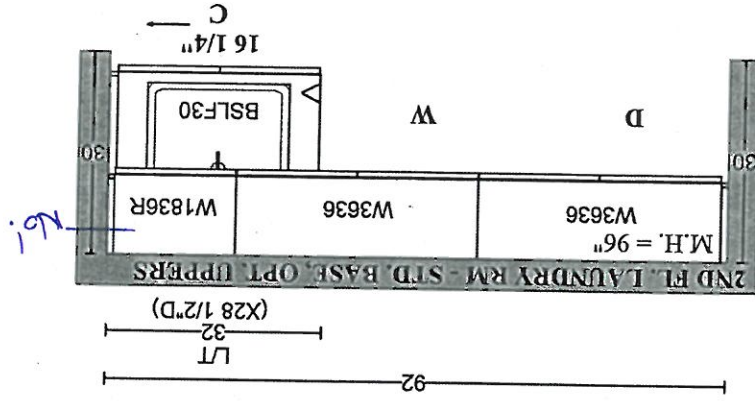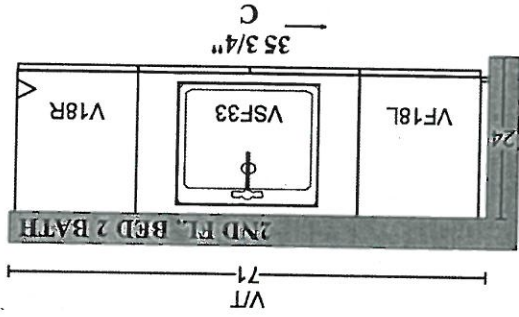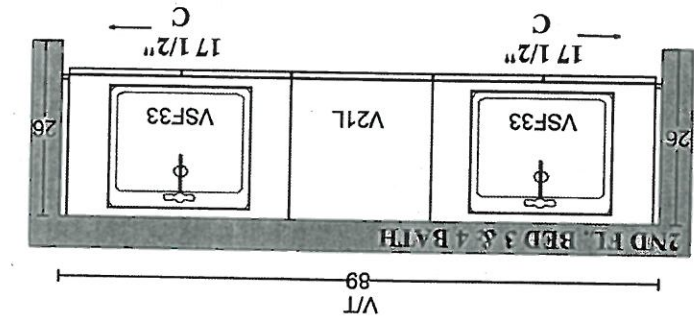

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH
VANTY, ONE BANK OF DRAWERS WHERE POSSIBLE
THROUGHOUT EACH MASTER ENSUITE VANTY
TO VANTIES
SITE STANDARD: WHITE 3/4\"/>

GOLDPARK HOMES
PINE VALLEY
VAUGHAN, ONTARIO
MODEL: (4006 CORNER) LILAC

PLAN VIEW



PV-26
May 11, 2024
H.H.
J.P.



PINE VALLEY
FOREVERGREEN

STONE COUNTERTOP EDGE PROFILES




STANDARD 2CM EASED EDGE





LOCATION:

TRU OUT.




UPGRADE 3CM EASED EDGE

LOCATION:

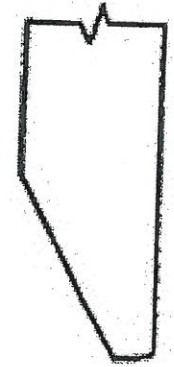

UPGRADE 4CM MITRED EDGE

LOCATION:



UPGRADE 2CM OGEE EDGE

LOCATION:

LOT #: PV-26

DATE:

May 11, 2021

SIGNATURE:

AS

SIGNATURE:

HY



STANDARD HARDWARE / HANDLES

PINE VALLEY
FOREVERGREEN

☐

H001-02

☒

H001-03

→ Laundry Room

☐

H001-04

☐

H009-03

☒

H009-09

→ Shared Ensuite
→ Ensuite 2

☐

H011-03


☒

H011-05

→ Master Ensuite

☐

H011-06

☐

H033-01

☒

H039-03

→ Kitchen

☐

*NO HARDWARE

LOT #

PV-26

DATE:

May 11, 2014

SIGNATURE:

SIGNATURE:




PINE VALLEY
FOREVERGREEN

STANDARD HARDWARE / KNOBS



☐ K002-02




☒ K002-03
Ponder Room



☐ K002-04




☐ K002-06



☐ K002-05



☐ K008-14



☐ *NO HARDWARE

☐ *TOUCH-LATCH

☐ K024-03

LOT #

PV-26

DATE:

May 11, 2021

SIGNATURE:

AF

SIGNATURE:

HY




PINE VALLEY
FOREVERGREEN

UPGRADE SHOWER HARDWARE

MT6X6

Shower Door Handle

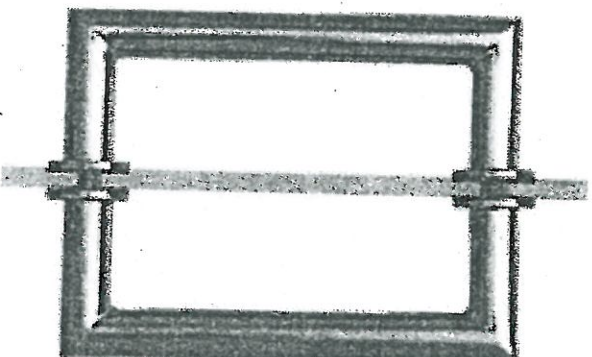

MT6X6

Shower Door Handle

6" x 6" back-to-back
3/4" dia. tube
Cut and mitred corners with
washers
(Also available single sided)

☒ CHROME

☐ MATTE BLACK

☐ BRUSHED GOLD

Lot#

PV-26

Date:

May 11, 2021

Room:

Master Ensuite, Ensuite 3/4

Signature:

AF

Signature:


HX

GOLDPARK
WORTH MORE


BATHROOM ACCESSORIES



PINE VALLEY
FOREVERGREEN

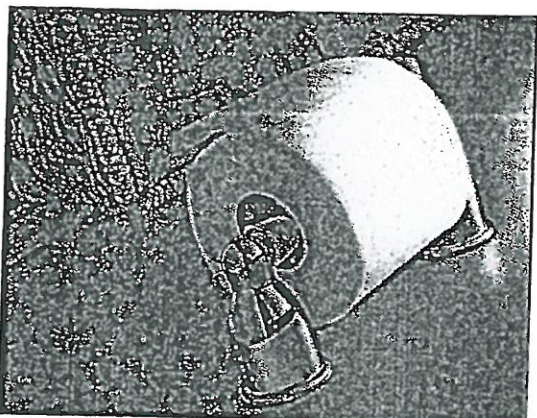

Tissue Holder
Mason - Chrome

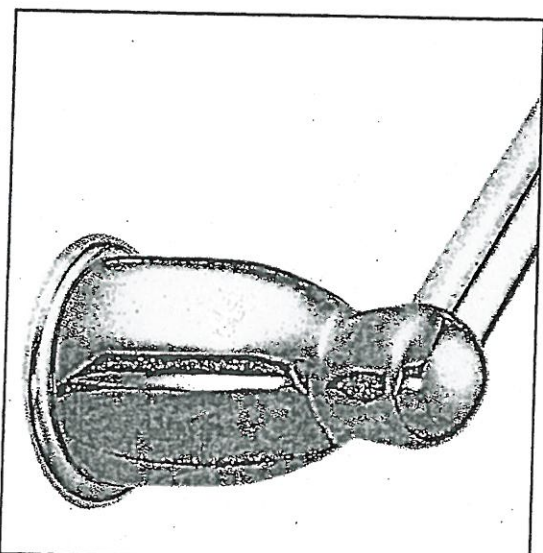

Towel Bar
Mason - Chrome

Please select one of the following:

☒ INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT
(tissue holder + towel bar) **location as per vendors discretion**

☐ ***DO NOT*** INSTALL STANDARD BATHROOM ACCESSORIES
THRU OUT **tissue holder + towel bar will not be provided**

LOT #

9V-26

DATE:

May 11, 2021

SIGNATURE:

AF

SIGNATURE:

HY



Project: Pine Valley

Lot: 26

Purchaser(s): Amjid Farooq & Humira Yasmeen

Standard Hood Fan Deletion

We acknowledge that the builder's standard hood fan will not be installed.
Do not supply, install and/or credit. We will install our own hood fan after closing.

Signature: [Signature]

Signature: Humira Yasmeen

Date: May 11, 2021

PV-26
March 23, 2021
attach

KitchenAid®

FOR THE WAY IT'S MADE.®

PRODUCT MODEL NUMBERS

KRMF606E KRMF706E

Electrical: A 115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 KPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 KPa).

Bottom Mount Refrigerator

PRODUCT DIMENSIONS

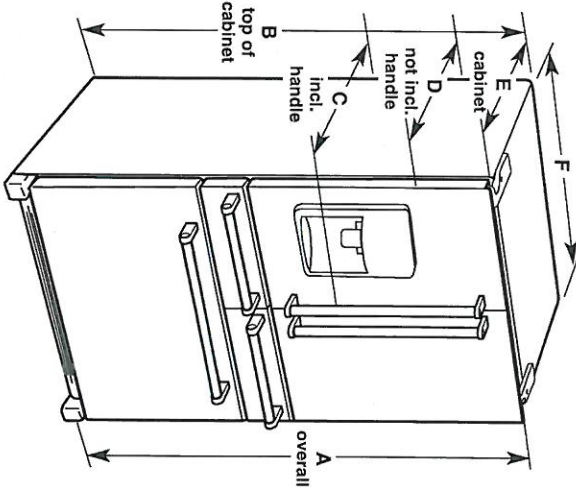


Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - With Handles "C"	Depth - Without Handles "D"	Depth - Cabinet Only "E"	Width - Cabinet "F"
25.8	70 1/8" (178.1 cm)	68 3/8" (173.7 cm)	36 1/4" (92.1 cm)	34 1/2" (87.7 cm)	29" (73.7 cm)	36" (91.4 cm)

LOCATION REQUIREMENTS

IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

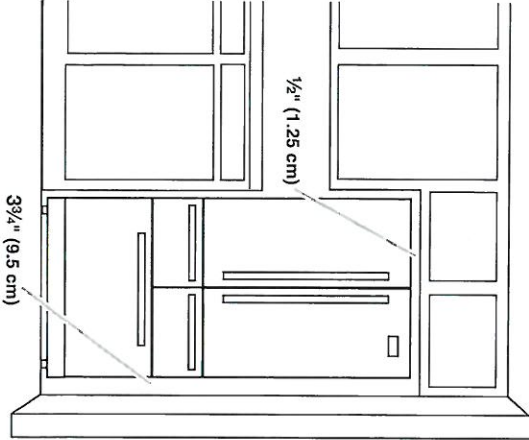


NV-26
March 23, 2021
attest

24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with:
KDFE104K, KDFE204K, KDTE204K, KDTE204LPA, KDFM404K,
KDTM404K, KDPM604K, KDTM604K, KDPM704K, KDTM704K,
KDTM704LPA, KDPM804K, KDTM804K

PRODUCT DIMENSIONS

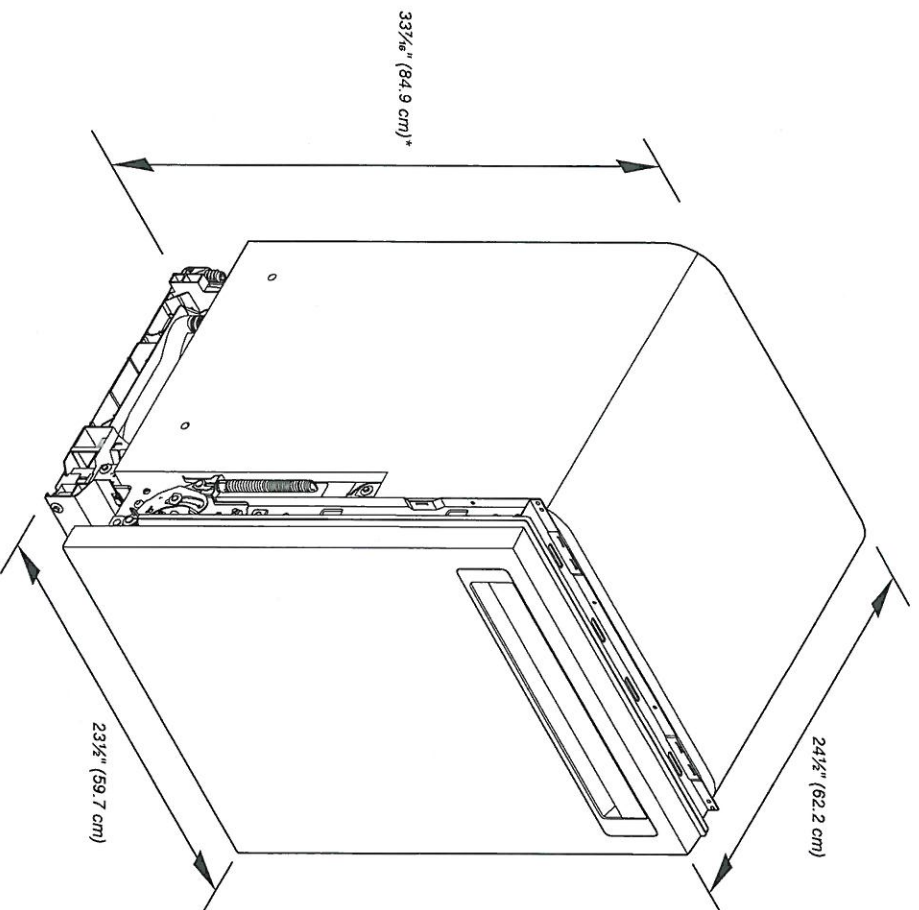

*Dishwasher can be raised 17/8" (3.7 cm) with feet fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

PV-26 attache


March 23, 2021

KitchenAid®

24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

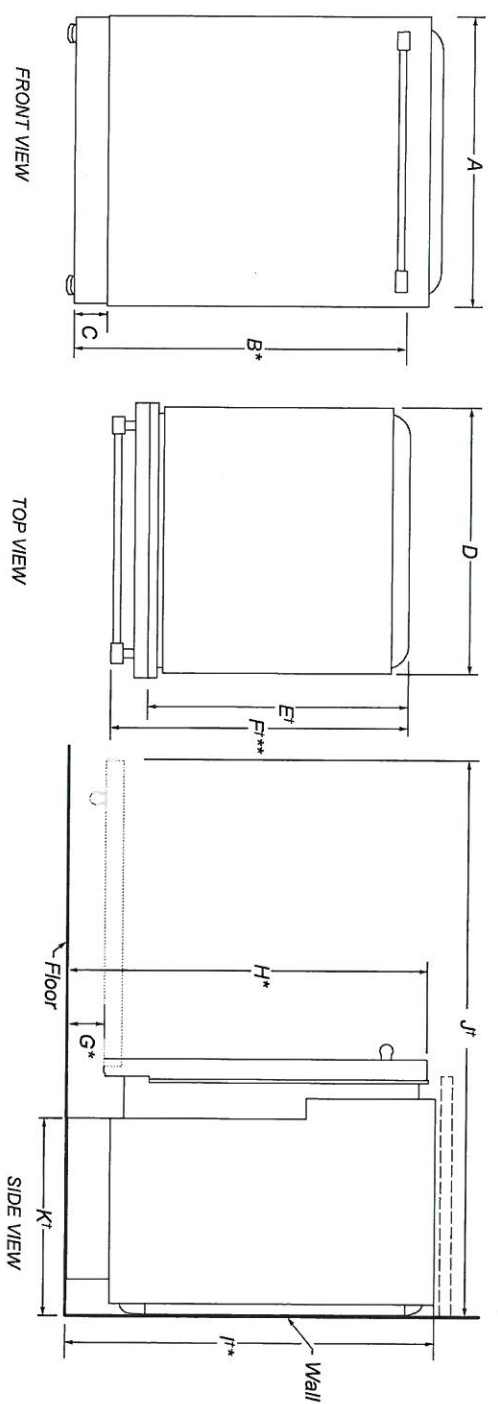

DESCRIPTION		DIMENSIONS
A	Width of door	23½" (59.7 cm)
B*	Height to top of handle	30⅜" (78.3 cm)
C	Height of adjustable toe kick	3⅝" (8.4 cm) - min. 4⅛" (11.8 cm) - max.
D	Width of recessed dishwasher	22⅝" (57.4 cm)
E†	Depth without door	22⅝" (57.5 cm)
F†**	Depth with Towel Bar Handle	26⅞" (68.3 cm)
	Depth with Pocket Handle	24½" (62.6 cm)
G*	Depth of Panel-Ready Models	24" (61.0 cm)
H*	Height to bottom of door (min.)	3⅝" (8.4 cm)
I*	Height to top of door (min.)	33⅞" (84.9 cm)
J*	Height of recessed dishwasher (min.)	33⅝" (85.4 cm)
K†	Depth with door fully open (min.)	50¾" (127.4 cm)
	Depth with toe kick (min.)	20⅜" (52.9 cm)

†Insulation blanket thickness adds up to 11/16" (1.8 cm) but can crush up to 1/8" (0.3 cm).

*Dishwasher can be raised 1⅞" (3.7 cm) with feet fully extended.

**For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


PV-26 check
March 23, 2021

KitchenAid® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

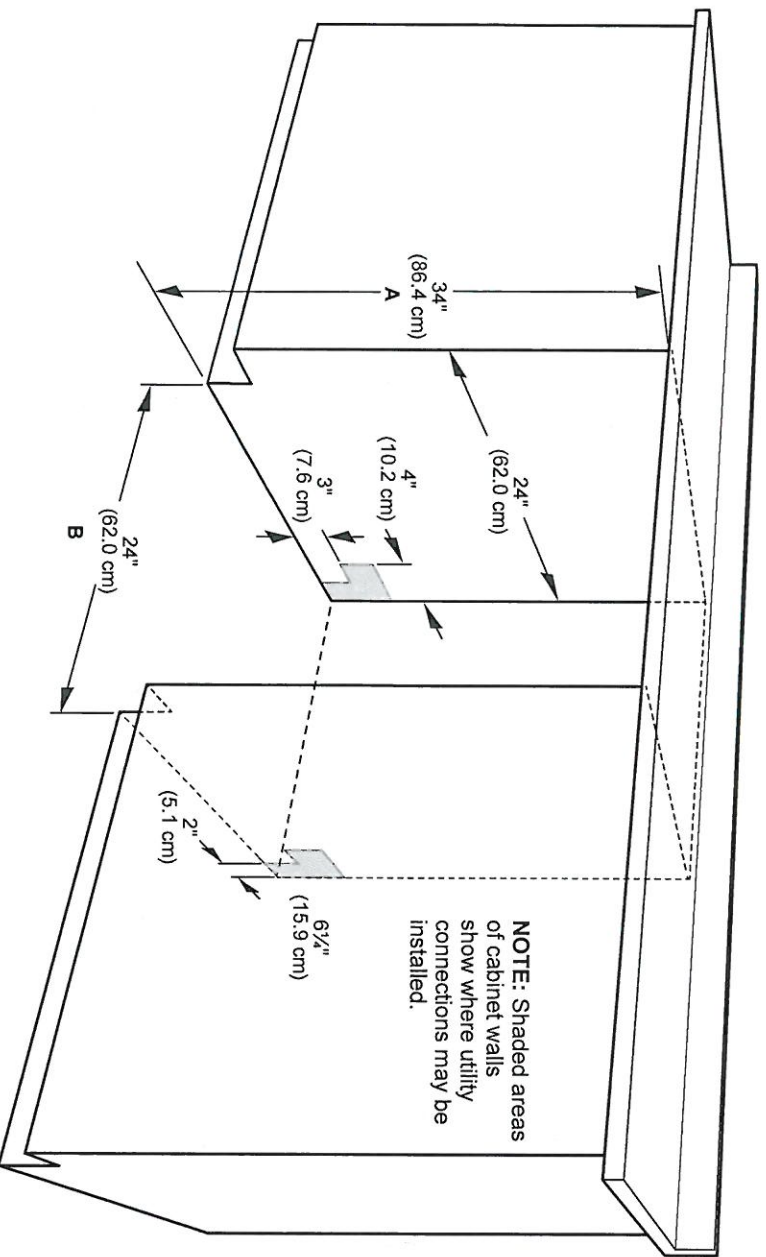

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 1/2" (85.1 cm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.

NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

RV-26 attack

March 23, 2021

KitchenAid®

FOR THE WAY IT'S MADE.®

30" (77.2 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVMB600D KVMB606D

Electrical: A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting **Wall Venting** **Non-Vented (Recirculating)**

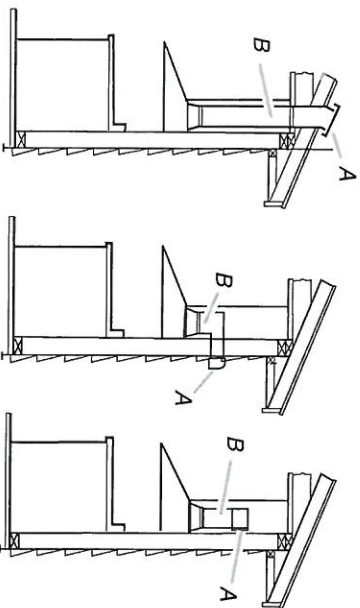

- A. Roof cap
- B. 6" (15.2 cm) round vent
- A. Wall cap
- B. 6" (15.2 cm) round vent
- A. Diverter
- B. 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.


Vent System

Vent Piece	6" (15.2 cm) Round
45° elbow	2.5 ft (0.8 m)
90° elbow	5.0 ft (1.5 m)

Maximum equivalent vent length is 35 ft (10.7 m).




Example Vent System

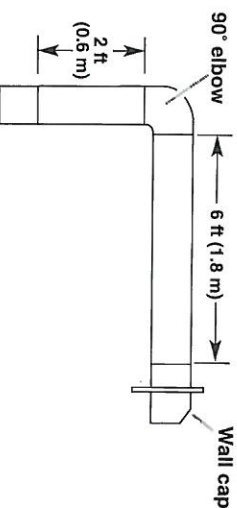

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

- 1 - 90° elbow = 5.0 ft (1.5 m)
 - 1 - wall cap = 0.0 ft (0.0 m)
 - 8 ft (2.4 m) straight = 8.0 ft (2.4 m)
- Length of system = 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

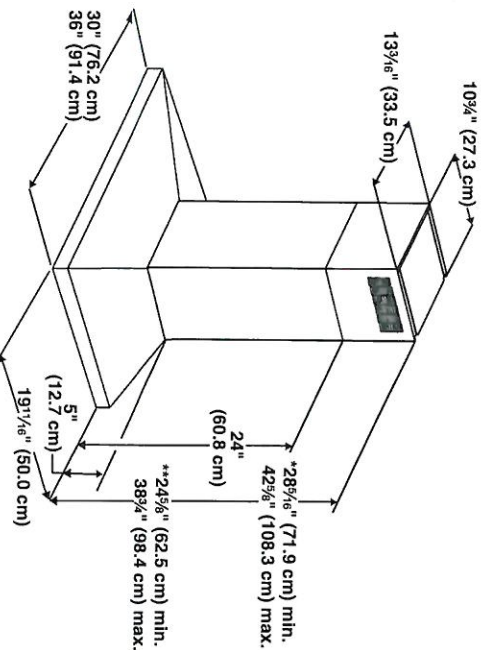


* For non-vented (recirculating) installations

** For vented installations

PV-26 attached
March 23, 2021

CABINET DIMENSIONS

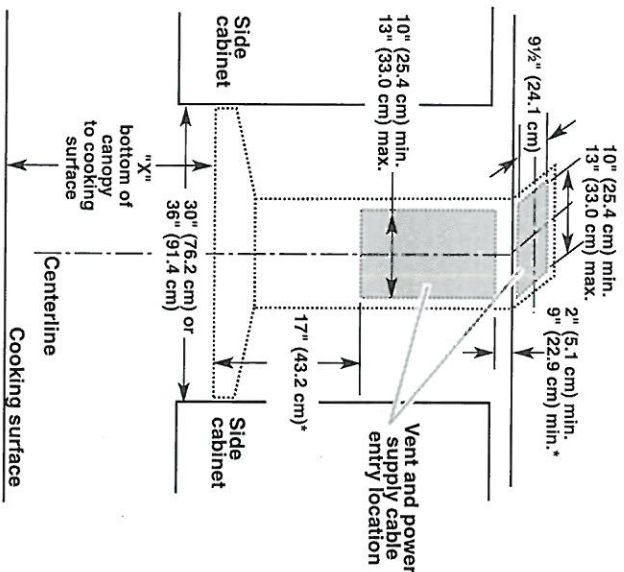

*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations	
Min. ceiling height	Max. ceiling height
Electric cooking 7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking 7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations	
Min. ceiling height	Max. ceiling height
Electric cooking 7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking 7' 4" (2.23 m)	9' 6" (2.9 m)

*NOTE: The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

PV-26
March 23, 2021

KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E KOCE500E KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - Connect a section of solid copper wire to the pigtail leads.
 - Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.


Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600

*Amperage values noted above are for information purposes only; the units are rated in watts.


Because Whirlpool Corporation includes a continues commitment to improve our products, we reserve the right to change materials and specifications without notice.



PRODUCT DIMENSIONS

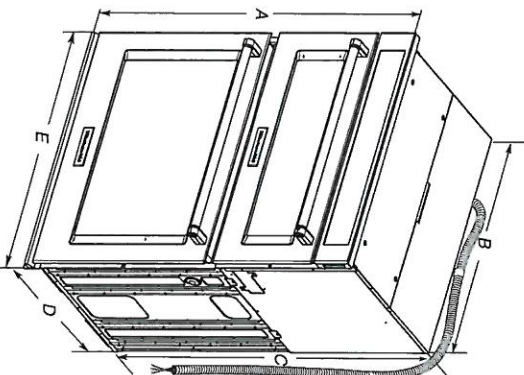

Cabinet Dimensions

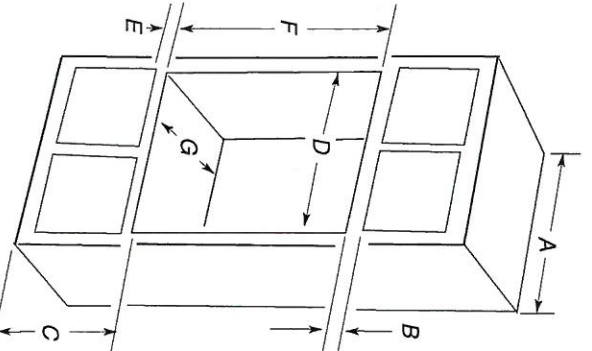


* NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

PV-26 ~~after dk~~
March 23, 2021

DIMENSIONS

COMMERCIAL-STYLE RANGETOPS
PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGG500J		36" (91.4 cm) Rangetop KCGG506J		48" (121.9 cm) Rangetop KCGG558J	
Unit of Measurement	in	cm	in	cm	in	cm
Overall Width (A)	29 3/4	75.6	35 3/4	90.8	47 3/4	121.3
Grate Depth (B)	22	55.9	22	55.9	22	55.9
Depth without Control Panel (C)	23 3/4	59.1	23 3/4	59.1	23 3/4	59.1
Depth with Control Panel Overhang (D)	27 7/8	70.8	27 7/8	70.8	27 7/8	70.8
Depth with Knobs (E)	29 3/8	74.6	29 3/8	74.6	29 3/8	74.6

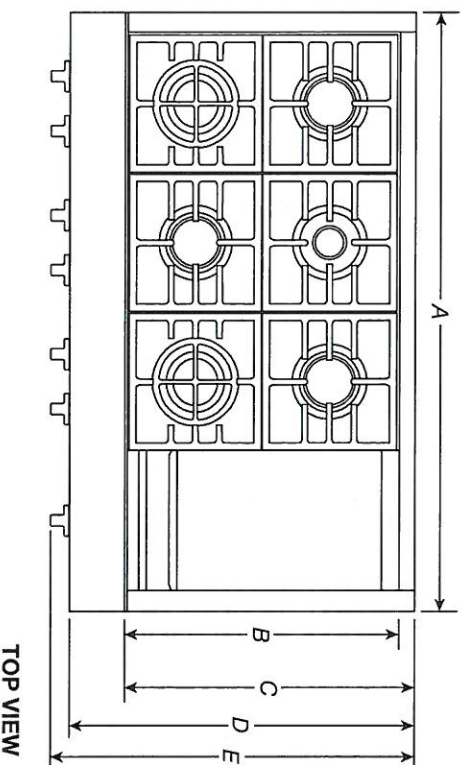

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

PV-26 attacker
March 23, 2021



DIMENSIONS

COMMERCIAL-STYLE RANGETOPS
PRODUCT DIMENSIONS



MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC568J	
Unit of Measurement	in	cm	in	cm	in	cm
Grate Width (F)*	27 ⁷ / ₁₆	69.7	33	83.8	44 ⁹ / ₁₆	112.7
Gas Inlet to Surface (G)	10 ³ / ₄	27.3	10 ³ / ₄	27.3	10 ³ / ₄	27.3
Center to Gas Inlet (H)	11	27.9	14 ¹ / ₈	35.9	19 ⁵ / ₈	49.8
Recessed Rangetop Width (I)	29 ¹ / ₈	74	35 ¹ / ₈	89.2	47 ¹ / ₈	119.7

*Includes width of grates and gridde.

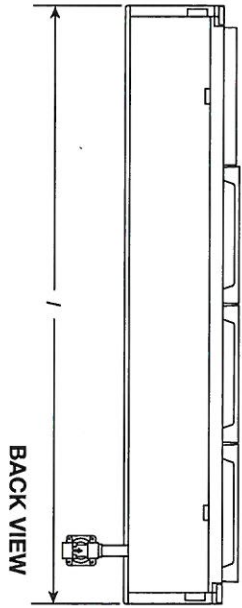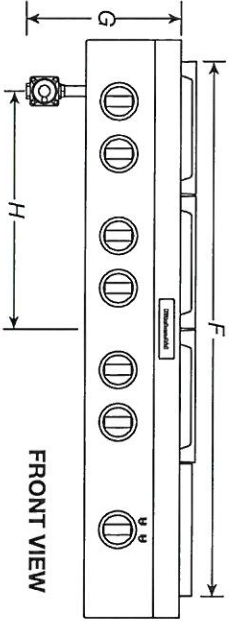

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before
selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.


Pr-26 attach
March 23, 2021

DIMENSIONS

COMMERCIAL-STYLE RANGETOPS
PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Height with Grates (J)	9	22.9	9	22.9	9	22.9
Control Panel Height (K)	7 ³ / ₁₆	19.8	7 ⁹ / ₁₆	19.8	7 ³ / ₁₆	19.8
Recessed Rangetop Height (L)	7	17.8	7	17.8	7	17.8
Cooking Surface Height (M)	7 ⁷ / ₁₆	18.9	7 ⁷ / ₁₆	18.9	7 ⁷ / ₁₆	18.9
Recessed Rangetop Depth (N)	21 ⁷ / ₈	55.6	21 ⁷ / ₈	55.6	21 ⁷ / ₈	55.6
Depth with Control Panel (O)	25 ¹ / ₂	64.8	25 ¹ / ₂	64.8	25 ¹ / ₂	64.8

IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.

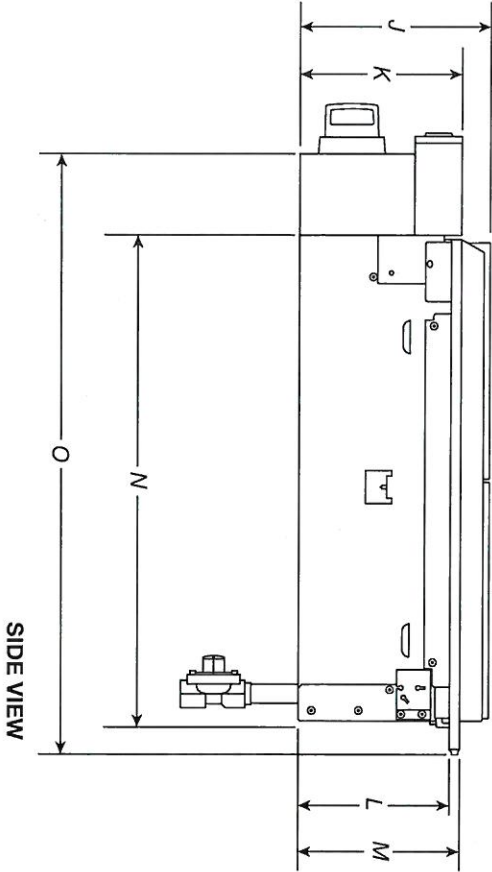

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

PV-26 *after ok*
March 23, 2021


DIMENSIONS

COMMERCIAL-STYLE RANGETOPS
OPENING/CLEARANCE DIMENSIONS



MODEL #	30" (76.2 cm) Rangetop KCGGC500J		36" (91.4 cm) Rangetop KCGGC506J		48" (121.9 cm) Rangetop KCGGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Combustible Area above Cooking Surface Width (min.) (A)	30	76.2	36	91.4	48	121.9
Bottom of Cabinet Height above Cooking Surface (min.) (B)*	42	106.7	58	147.3	58	147.3
Bottom of Cabinet Height above Countertop (min.) (C)	18	45.7	18	45.7	18	45.7
Distance to Fixed Wall or Combustible Material (D)	12	30.5	12	30.5	12	30.5

*If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

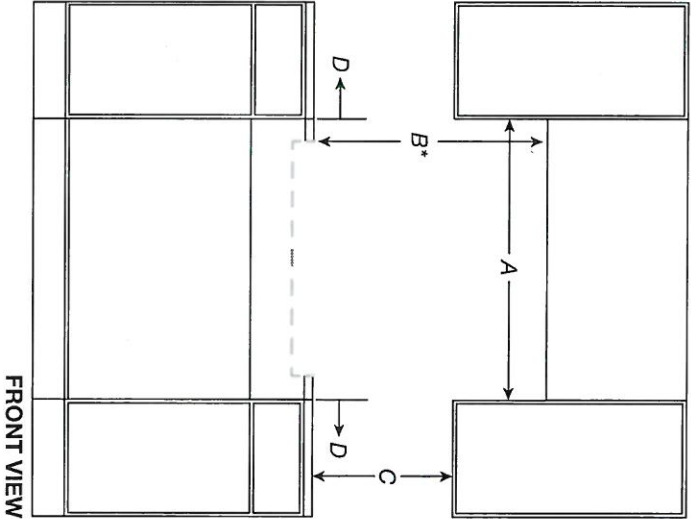

FRONT VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

9V-26 offback

March 23, 2021

DIMENSIONS


5 of 24

COMMERCIAL-STYLE RANGETOPS OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGG500J		36" (91.4 cm) Rangetop KCGG506J		48" (121.9 cm) Rangetop KCGG558J	
Unit of Measurement	in	cm	in	cm	in	cm
Recommended Upper Cabinet Depth (E)	13	33	13	33	13	33
Cutout to Wall Depth (if backwall is constructed of non-combustible material) (F)*	1 3/4	4.4	1 3/4	4.4	1 3/4	4.4
Cutout to Wall Depth (if backwall is constructed of combustible material) (F)*	7 3/4	19.7	7 3/4	19.7	7 3/4	19.7
Cabinet to Countertop Height (G)**	7 1/4	18.4	7 1/4	18.4	7 1/4	18.4
Cabinet Depth (H)	24	61	24	61	24	61

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7 3/4" (19.7 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

**The bottom of the cutout supports the product. Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout.

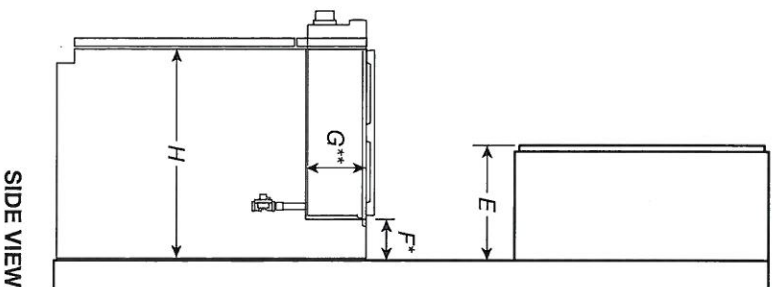

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

PV-26 extra
March 23, 2021

DIMENSIONS


6 of 24

COMMERCIAL-STYLE RANGETOPS OPENING/CLEARANCE DIMENSIONS



MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Countertop and Cabinet Cutout Width (I)	29 1/4	74.3	35 1/4	89.5	47 1/4	120.0
Countertop and Cutout Depth (J)	22 1/4	56.5	22 1/4	56.5	22 1/4	56.5
Notch Width (K)	1/4	0.6	1/4	0.6	1/4	0.6
Cutout Width (L)	29 3/4	75.5	35 3/4	90.8	47 3/4	121.2

NOTE: Due to manufacturing factory tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.

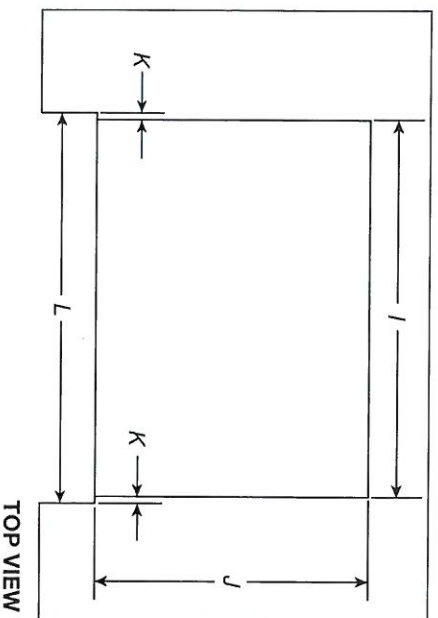

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

RV-210

LP (HX)

March 23, 2021

KitchenAid®

FOR THE WAY IT'S MADE®

PRODUCT MODEL NUMBERS

KSMF000E KSMF700E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or be cut off, could be slow, or irregular stopped.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

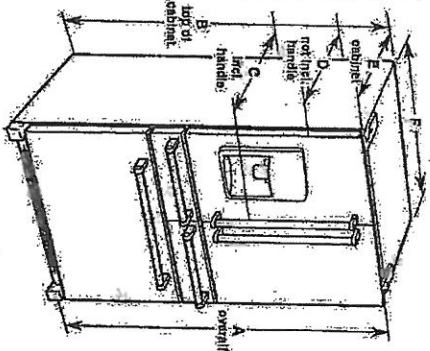

Model Size	Height - Overall in. (76 1/2 cm)	Height - Top of Cabinet in. (88 1/2 cm)	Depth - With Handle in. (24 1/2 cm)	Depth - Without Handle (only) in. (20 in.)	Width - Cabinet in. (36 in.)
238	70 1/2 (178 cm)	88 1/2 (224 cm)	24 1/2 (62 cm)	20 (51 cm)	36 (91 cm)

LOCATION REQUIREMENTS

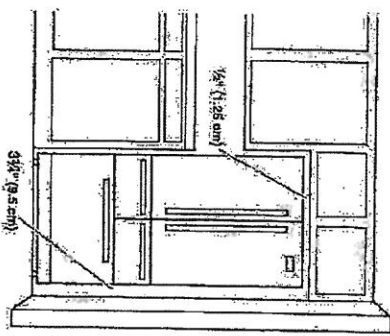

IMPORTANT: This refrigerator is designed for indoor, household use only. To ensure proper ventilation for your refrigerator allow for 2 1/4" (6.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3/4" (2.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (16°C) and 80°F (27°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

N=26
March 23, 2021
(1A)
(1A)
(1A)


KitchenAid®

24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with:
KDFE104K, KDFE204K, KDFE204LP, KDFM404K,
KDFM404K, KDFM604K, KDFM604K, KDFM704K, KDFM704K,
KDFM704LP, KDFM804K, KDFM804K

PRODUCT DIMENSIONS

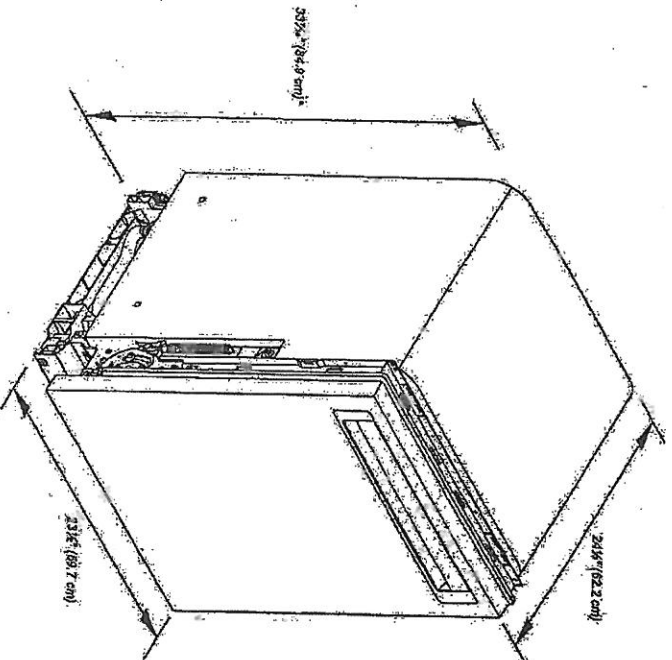

*Dishwasher can be raised 1/2" (13 mm) with feet fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

PV-2L (RB) (HX)
March 23, 2021

KitchenAid® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONT'D.)

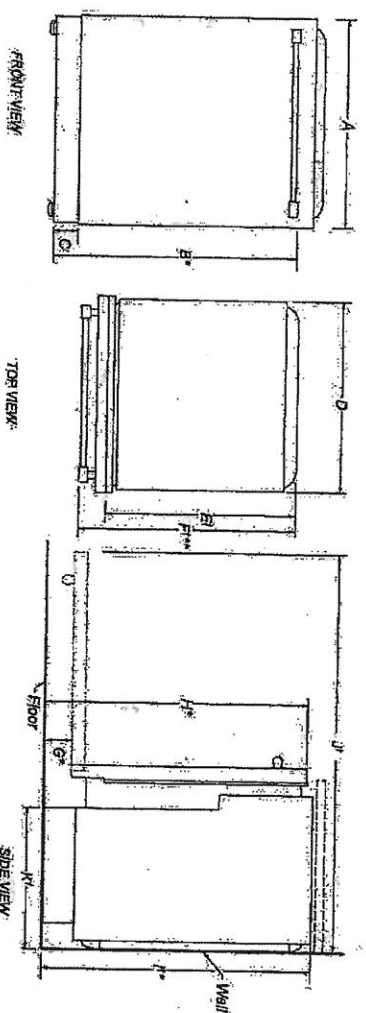

Width of door	23 1/2" (59.7 cm)
Height to top of handle	30 3/4" (78.3 cm)
Height of adjustable toe kick	3 3/4" (8.4 cm) - min. 4 1/2" (11.8 cm) - max.
Width of recessed dishwasher	22 3/4" (57.4 cm)
Depth without door	22 5/8" (57.6 cm)
Depth with Tower Bar Handle	23 7/8" (60.3 cm)
Depth with Pocket Handle	24 1/2" (62.6 cm)
Depth of PanelReady Models	24" (61.0 cm)
Height to bottom of door (min.)	3 3/4" (8.4 cm)
Height to top of door (min.)	33 3/4" (84.6 cm)
Height of recessed dishwasher (min.)	33 5/8" (85.4 cm)
Depth with door fully open (min.)	50 3/4" (127.4 cm)
Depth with toe kick (min.)	20 3/4" (52.9 cm)

Installation blanket thickness adds up to 1 1/8" (1.8 cm) but can crush up to 1/8" (0.3 cm).

*Dishwasher can be raised 1 3/4" (3.7 cm) with feet fully extended.

**For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

PV-26 (AP) (HX)
March 25, 2002

KitchenAid® 24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

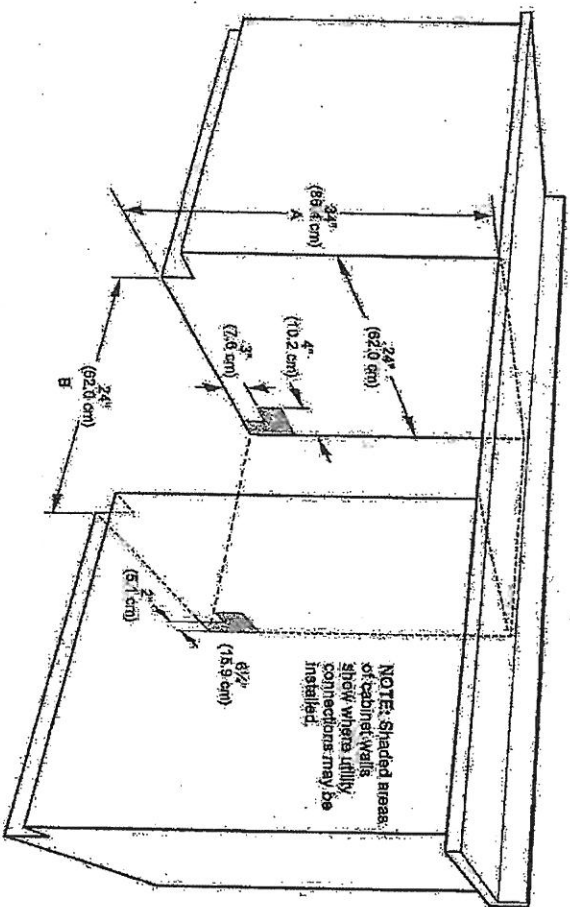

- A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 1/2" (85.1 cm) by removing the wheels and perforated area of insulation (depicted) on dishwasher.
- B. Minimum, measured from narrowest point of opening.
- C. Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because KitchenAid Corporation is not a certified manufacturer, we cannot warrant the fit or finish of our products. We reserve the right to change materials and specifications without notice.

Dimensions and for clearing purposes only. For complete details, see installation instructions. Always use proper installation techniques. Change without notice.

PN-26 (M) (M)

March 23, 2021



KitchenAid® FOR THE WAY IT'S MADE® 30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVMB6005

KVMB608D

Electrical: A 120 volt, 60 Hz, 15-amp, fused electrical circuit is required.

VENTING METHODS

The canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduces performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.

Heat Discharge


A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) installations
If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit which includes charcoal filters and a deflector. In order, see the Assistance or Service section.

Roof Venting

Wall Venting

Non-Vented
(Recirculating)

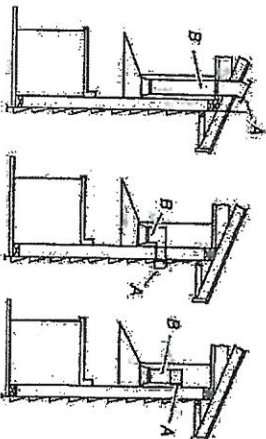

1. Roof cap
B, 6" (15.2 cm)
round vent

2. Wall cap
B, 6" (15.2 cm)
round vent

3. Deflector
B, 6" (15.2 cm)
round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece

45° elbow
2.5 ft
(0.8 m)


6" (15.2 cm) Round

90° elbow

5.0 ft
(1.5 m)



Maximum equivalent vent lengths 35 ft (10.7 m).

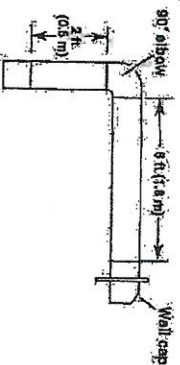

Example Vent System

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 × 90° elbow

≈ 5.0 ft (1.5 m)

1 × wall cap

≈ 0.6 ft (0.2 m)


8 ft (2.4 m) straight

≈ 8.0 ft (2.4 m)

Length of system

≈ 13.6 ft (4.2 m)


PRODUCT DIMENSIONS

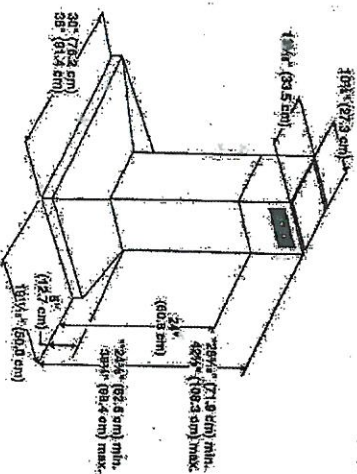

*For non-vented (recirculating) installations
For vented installations

PN-26 (AB) (AV)
 March 23, 2021

CABINET DIMENSIONS

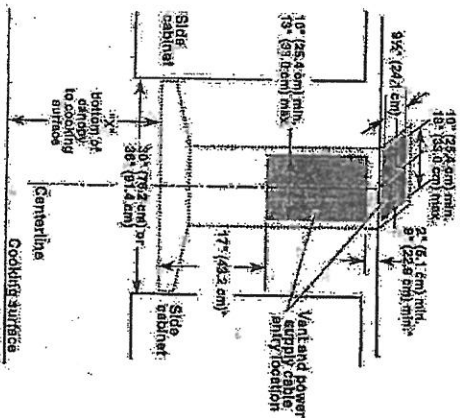

*For non-vented (recirculating) installations.

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "Y": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm).

The chimneys can be adjusted for different ceiling heights. See the following chart.			
Vented installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 3" (2.16 m)	9' 2" (2.79 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)	
Non-vented (recirculating) installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 4" (2.16 m)	9' 6" (2.9 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)	

*NOTE: The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

PV-26 (1841)
March 13, 1991



KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS
KEMS303E KOES300E KOES607E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

The oven must be connected to a grounded, metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70, latest edition or CSA Standards C22.1-91, Canadian Electrical Code, Part 1 and C22.2 No. 0-MB1, latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/naming plate. See the following illustration.



A. Model/naming plate

* Models rated from 7.2 to 9.8 kW at 240 volts (6.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.6 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.

* A circuit breaker is recommended.

* Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed copper cable (with grounding wire). See "Make Electrical Connection" section.

* Flexible conduit from the oven should be connected directly to the junction box.

* Do not cut the conduit. The length of conduit provided is for serviceability of the oven.

* If the house has aluminum wiring, follow the procedure below:

1. Connect a section of solid copper wire to the pigtail leads.
2. Connect the aluminum wiring to the solid section of copper wire using special connectors and/or code designed and UL listed for joining copper to aluminum.

Follow the electrical contractor manufacturer's recommended procedure. Aluminum copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage (V)	Amperage (A)	Rating (W)
KOES300E/KOES607E	120/240	32	48
KOES303E/KOES607E	120/208	30	38
			6500


* Amperage values noted above are for information purposes only; the units are rated in watts.

Because Whirlpool Corporation provides complete safety features in its appliances, we make no effort to design a model that is not safe without these.

Dimensions are for planning purposes only. For complete details, see illustration.

Ref. WH7255333
2/90/15

PRODUCT DIMENSIONS

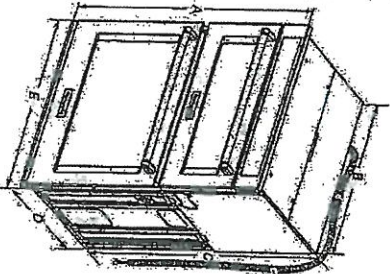

Cabinet Dimensions



- 27" (68.6 cm) models
- A: 24" (61.0 cm) inside height
 - B: 25 1/2" (64.8 cm) measured height
 - C: 41" (104.1 cm) recessed depth
 - D: 20 1/2" (51.8 cm) back width
 - E: 27" (68.6 cm) clear inside height
 - F: 28 1/2" (72.4 cm) measured height from the countertop to the top of the control cabinet.
- 30" (76.2 cm) models
- A: 25 1/2" (64.8 cm) inside height
 - B: 27" (68.6 cm) measured height
 - C: 41" (104.1 cm) recessed depth
 - D: 20 1/2" (51.8 cm) back width
 - E: 30" (76.2 cm) clear inside height
 - F: 31 1/2" (79.9 cm) measured height from the countertop to the top of the control cabinet.

* NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.


PV-26 (A) (H)
March 23, 2021

DIMENSIONS

COMMERCIAL-STYLE RANGE TOPS
PRODUCT DIMENSIONS

1 of 24

MODEL	30" (76.2 cm) Range Top KCGG500J	36" (91.4 cm) Range Top KCCG500J	48" (121.9 cm) Range Top KCGG566J
U. S. of Measurement	in		
Overall Width (A)	29 3/4	35 3/4	47 3/4
Grate Depth (B)	22	22	22
Depth without Control Panel (C)	23 1/4	23 1/4	23 1/4
Depth with Control Panel Overhang (D)	27 1/4	27 1/4	27 1/4
Depth with Knobs (E)	29 1/4	29 1/4	29 1/4

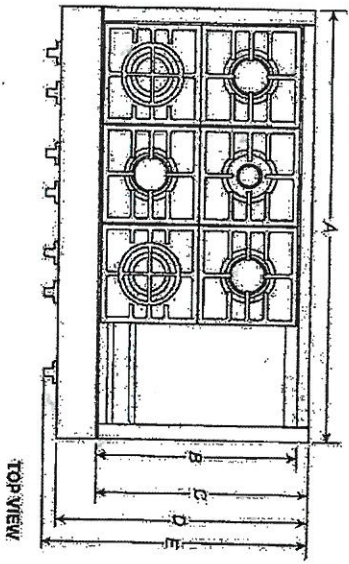

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before reflecting tabline, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

PN-26
March 23, 2021


DIMENSIONS

COMMERCIAL-STYLE RANGETOPS


2 of 24

PRODUCT DIMENSIONS

MODEL #	30 (76.2 cm) Rangetop KCCG5003	36 (91.4 cm) Rangetop KCCG5065	48 (121.9 cm) Rangetop KCCG5883
Unit of Measurement	cm	cm	cm
Grate Width (B)	27 1/8	35	44 1/4
Gas Inlet to Surface (G)	10 1/4	10 1/4	10 1/4
Cabinet to Gas Inlet (H)	11	14 1/4	19 1/4
Recessed Rangetop Width (I)	29 1/4	35 1/4	47 1/4
Includes Width of grates and guides.	89.7	89.2	119.7

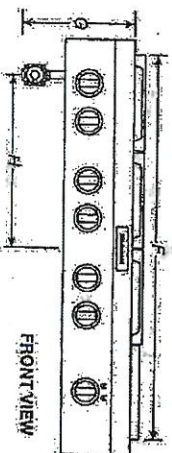

FRONT VIEW

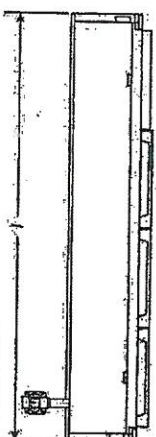

BACK VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinet, verifying electrical/gas connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, ETL or CSA approved.

KitchenAid®

PR-26 (AP) (HY)
March 25, 2021

DIMENSIONS


COMMERCIAL-STYLE RANGETOPS

3 of 24

PRODUCT DIMENSIONS

MODEL #	30 (66.2 cm) Rangetop KCGC3001	36 (91.4 cm) Rangetop KCGC3606	48 (121.9 cm) Rangetop KCGC4803
Unit Width (cm)	66.2	91.4	121.9
Height with Grates (H)	9	9	9
Control Panel Height (K)	22.9	22.9	22.9
Recessed Rangetop Height (L)	19.8	19.8	19.8
Cooking Surface Height (M)	17.8	17.8	17.8
Recessed Rangetop Depth (N)	7 1/4	7 1/4	7 1/4
Depth with Control Panel (O)	25 1/4	25 1/4	25 1/4

IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.

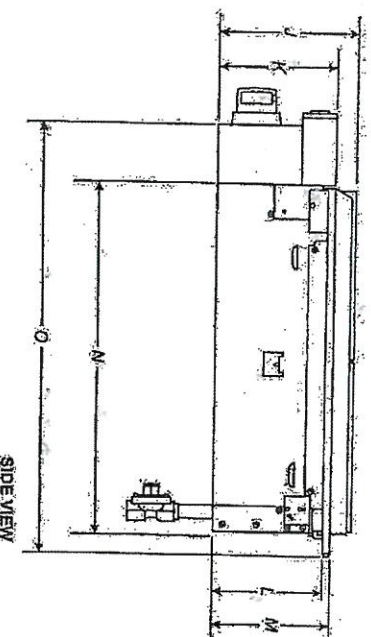

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before
selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

PV-26 (R) (H)
March 23, 2021


DIMENSIONS

COMMERCIAL-STYLE RANGE TOPS
OPENING/CLEARANCE DIMENSIONS

4 of 24

MODEL #	30" (76.2 cm) Range Top KCGG300J	36" (91.4 cm) Range Top KCGG506J	48" (121.9 cm) Range Top KCGG555J
Unit of Measurement	in	in	in
Combustible Area above Cooking Surface Width (min.) (A)	30	76.2	36
Bottom of Cabinet Height Above Cooking Surface (min.) (B)	42	106.7	66
Bottom of Cabinet Height Above Countertop (min.) (C)	18	45.7	18
Distances to Fixed Wall or Combustible Material (D)	12	30.5	12
			30.5
			12
			80.5

If installing a hood above the range top, follow the hood instructions for dimensional clearances above the cooking surface.

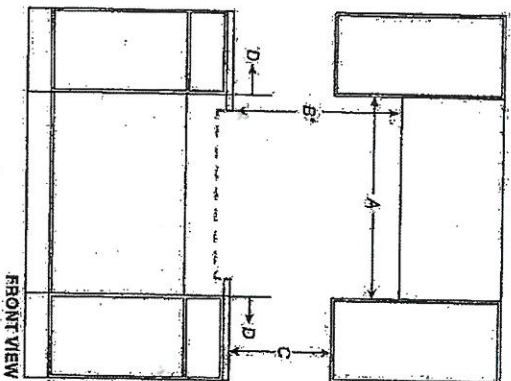

FRONT VIEW

IMPORTANT: Dimensions and specifications are provided for planning purposes only. Do not make any cuts or alterations based on this information. Refer to the installation guide before selecting cabinets, verifying electrical connections, making cutouts or beginning installation. All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

PV-26 (M) (H)
March 23, 2021

DIMENSIONS

COMMERCIAL-STYLE RANGETOPS


5 of 24

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) Rangertop KCG6500J	36" (91.4 cm) Rangertop KCG6500J	48" (121.9 cm) Rangertop KCG6550J
Left Cutout Depth (A)	18"	18"	18"
Recommended Upper-Cabinet Depth (B)	18"	18"	18"
Cutout to Wall Depth (if backwall is constructed of non-combustible material) (C)*	1 1/4"	1 1/4"	1 1/4"
Cutout to Wall Depth (if backwall is constructed of combustible material) (C)*	7 3/4"	7 3/4"	7 3/4"
Cabinet to Counter-top Height (C1)*	7 1/4"	7 1/4"	7 1/4"
Cabinet Depth (H)	24"	24"	24"

*If the backwall is constructed of a combustible material and a backsplash is not installed, a 7 1/4" (18.7 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangertop.

*The bottom of the cabinet supports the product. Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout.

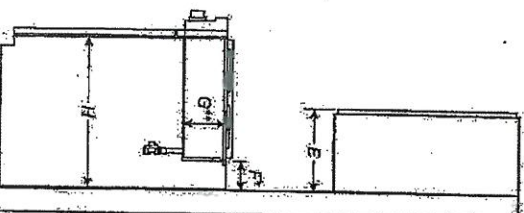

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinet. Verify electrical/gas connections, mating controls or required installation. All KitchenAid appliances are appropriately UL, CUL or CSA approved.

KitchenAid

PV-26 (A) (M)
March 23, 2021


DIMENSIONS

COMMERCIAL-STYLE RANGETOPS
OPENING/CLEARANCE DIMENSIONS

6 of 24

MODEL #	30" (76.2 cm) Rangetop KCCG500J	36" (91.4 cm) Rangetop KCCG506J	48" (121.9 cm) Rangetop KCCG588J
Unit of Measurement	in	in	in
Countertop and Cabinet Cutout Width (D)	29 1/8	36 1/4	47 1/4
Countertop and Cabinet Depth (G)	22 1/4	22 1/4	22 1/4
Mouth Width (K)	1/4	1/4	1/4
Cutout Width (L)	29 3/4	36 3/4	47 3/4

NOTE: Due to manufacturing tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.

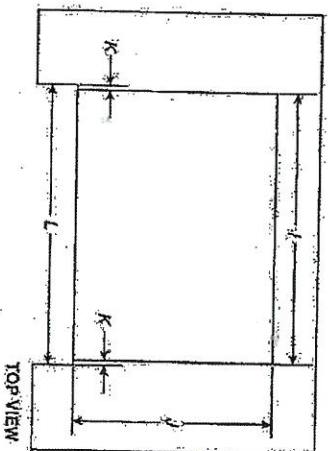

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before
selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®