



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

APPLIANCES

| Invoice                         | Qty. | Description                                                                                                                                              |
|---------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2795<br><br>03Jun21<br>NoCat    | 1    | KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY                                                                                                 |
| 2801<br>72,217<br>15Jun21<br>** | 1    | KITCHEN - UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING                                                                               |
| 2801<br><br>15Jun21<br>** NoCat | 1    | KITCHEN - UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS |

CERAMIC

| Invoice                      | Qty. | Description                                                                                                                                                                                       |
|------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR APPROX. LOCATION                |
| 2860<br>37<br>22Jul21        | 1    | FRONT FOYER: TILE, FLOOR , LEVEL 5 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION                                                                                        |
| 2860<br>45<br>22Jul21        | 1    | MASTER ENSUITE: TILE, SHOWER FLOOR, LEVEL 4 - HEX                                                                                                                                                 |
| 2860<br>50<br>22Jul21        | 1    | MASTER ENSUITE: TILE, WALL, LEVEL 4 - 10X30" LAID IN VERTICAL STACKED PATTERN                                                                                                                     |
| 2860<br><br>22Jul21<br>NoCat | 1    | KITCHEN/BREAKFAST: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, WIREBRUSH TEXTURE, UV OIL FINISH - LEVEL 3<br><br>KITCHEN/BREAKFAST: DO NOT SUPPLY / INSTALL CERAMIC - CREDIT |

CONCRETE AND DRAIN

| Invoice                      | Qty. | Description               |
|------------------------------|------|---------------------------|
| 2801<br><br>15Jun21<br>NoCat | 1    | BACK-FLOW PREVENTER VALVE |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

DRYWALL

| Invoice                         | Qty. | Description                                                                                                                                                                        |
|---------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,690<br>15Jun21<br>** | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | FRONT EXTERIOR, ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE) - SAME SWITCH AS STANDARD                                                               |
| 2801<br><br>15Jun21<br>NoCat    | 1    | FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH<br>FRONT: 2 @ UPPER SOFFIT<br>FRONT: 2 @ SOFFIT ABOVE GARAGE                                                                  |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | ***CUSTOM LAYOUT*** BEDROOM 4/ LAUNDRY - DELETE SMALL CLOSET IN BEDROOM 4, REVISED CLOSET IN LAUNDRY ROOM TO BE WIC TO ACCOMMODATE REVISION - SEE PLAN                             |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER ENSUITE: MODEL OPTIONS 42.03 - MASTER ENSUITE WATER CLOSET - OPT. FROSTED GLASS DOOR AND GLASS WALL                                                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND                                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR                                                                                                                      |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR APPROX. LOCATION |

ELECTRICAL

| Invoice                      | Qty. | Description                                                                                                                                                                                                                                     |
|------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2795<br><br>03Jun21<br>NoCat | 1    | KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY                                                                                                                                                                                        |
| 2801<br>72,292<br>15Jun21    | 1    | FRONT EXTERIOR, ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE) - SAME SWITCH AS STANDARD                                                                                                                            |
| 2801<br>72,278<br>15Jun21    | 1    | FOYER: ADDITIONAL INTERIOR SWITCH<br><br>FOR SOFFIT LIGHTS                                                                                                                                                                                      |
| 2801<br>72,291<br>15Jun21    | 4    | FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH<br>FRONT: 2 @ UPPER SOFFIT<br>FRONT: 2 @ SOFFIT ABOVE GARAGE                                                                                                                               |
| 2801<br>72,281<br>15Jun21    | 1    | GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - LOCATE APPROX. 66" A.F.F. ABOVE FIREPLACE                                                                                  |
| 2801<br>72,268<br>15Jun21    | 1    | GREAT ROOM: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT - LOCATE STANDARD HEIGHT AT TERMINATION OF CONDUIT                                                                                                          |
| 2801<br>72,268<br>15Jun21    | 1    | LIBRARY: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT<br><br>SEE PLAN FOR LOCATION                                                                                                                                   |
| 2801<br>72,268<br>15Jun21    | 1    | NICHE AT POWDER ROOM: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT                                                                                                                                                   |
| 2801<br>72,269<br>15Jun21    | 1    | KITCHEN: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON SEPARATE CIRCUIT<br><br>FOR BEVERAGE FRIDGE                                                                                                                                     |
| 2801<br>72,273<br>15Jun21    | 1    | KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG<br><br>SEE PLAN FOR APPROX LOCATION.<br>LICENCED ELECTRICIAN/GAS FITTER MAY NEED TO RELOCATE TO SPECIFIC LOCATION AFTER CLOSING |
| 2801<br>72,272<br>15Jun21    | 1    | KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR FUTURE WARMING DRAWER (APPLIANCE NOT INCLUDED)<br><br>SEE PLAN FOR LOCATION                                                                                                             |
| 2801<br>72,274<br>15Jun21    | 1    | KITCHEN: 220V WALL RECEPTACLE ON SEPARATE CIRCUIT FOR BUILT-IN WALL OVEN                                                                                                                                                                        |
| 2801<br>72,272<br>15Jun21    | 1    | KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR STEAM OVEN (APPLIANCE NOT INCLUDED)                                                                                                                                                     |

ELECTRICAL

| Invoice                      | Qty. | Description                                                                                                                                                        |
|------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,307<br>15Jun21    | 1    | UPPER HALL: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX CENTER OF OTB                                                                               |
| 2801<br>72,268<br>15Jun21    | 1    | STUDY LOFT: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT - SEE PLAN FOR LOCATION                                                        |
| 2801<br>72,279<br>15Jun21    | 1    | ENSUITE 3: ADD SHOWER POT LIGHT: 6" RECESSED POT LIGHT ABOVE TUB, COMPLETE WITH SWITCH                                                                             |
| 2801<br>72,281<br>15Jun21    | 1    | MASTER BEDROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - LOCATE APPROX 66" A.F.F. ABOVE FIREPLACE. |
| 2801<br>72,301<br>15Jun21    | 1    | MASTER ENSUITE: BATHROOM FAN : ADDITIONAL 50CFM BATHROOM EXHAUST FAN COMPLETE WITH SWITCH                                                                          |
| 2801<br>72,307<br>15Jun21    | 1    | MASTER ENSUITE: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO ALLOW FOR RAIN SHOWER                                                                          |
| 2801<br>72,279<br>15Jun21    | 1    | MASTER ENSUITE: SHOWER POT LIGHT: 6" RECESSED SHOWER POT LIGHT<br><br>SAME SWITCH AS STANDARD SHOWER LIGHT                                                         |
| 2801<br>72,307<br>15Jun21    | 1    | KITCHEN: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX CENTER ABOVE ISLAND                                                                                     |
| 2801<br>72,280<br>15Jun21    | 1    | KITCHEN: CEILING OUTLET: ADD CAPPED CEILING OULET APPROX CENTERED ABOVE ISLAND - USE SAME SWITCH AS STANDARD                                                       |
| 2801<br>72,289<br>15Jun21    | 6    | KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDED IN APS<br><br>SEE PLAN FOR LOCATION - INCLUDES 1 SWITCH                                    |
| 2801<br>72,306<br>15Jun21    | 1    | KITCHEN: RELOCATE FRIDGE FROM STANDARD LOCATION - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS                                                                  |
| 2801<br><br>15Jun21<br>NoCat | 1    | BASEMENT: PINE VALLEY MODEL 42.02 ROSEDALE ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.                                             |
| 2801<br><br>15Jun21<br>NoCat | 1    | ***CUSTOM LAYOUT*** BEDROOM 4/ LAUNDRY - DELETE SMALL CLOSET IN BEDROOM 4, REVISED CLOSET IN LAUNDRY ROOM TO BE WIC TO ACCOMMODATE REVISION - SEE PLAN             |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

ELECTRICAL

| Invoice                      | Qty. | Description                                                                                                |
|------------------------------|------|------------------------------------------------------------------------------------------------------------|
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER ENSUITE: MODEL OPTIONS 42.03 - MASTER ENSUITE WATER CLOSET - OPT. FROSTED GLASS DOOR AND GLASS WALL |
| 2801<br><br>15Jun21<br>NoCat | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR                                              |

EXTERIOR DOORS

| Invoice                   | Qty. | Description                                                   |
|---------------------------|------|---------------------------------------------------------------|
| 2801<br>72,357<br>15Jun21 | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR |

FIREPLACE

| Invoice                      | Qty. | Description                                                                                                                |
|------------------------------|------|----------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,312<br>15Jun21    | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND |
| 2860<br><br>22Jul21<br>NoCat | 1    | MASTER BEDROOM: ADD MANTLE - CAPRI                                                                                         |
| 2860<br><br>22Jul21<br>NoCat | 1    | GREAT ROOM: UPGRADE MANTLE TO CAPRI                                                                                        |

FORMING

| Invoice                   | Qty. | Description                                                                                                            |
|---------------------------|------|------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,205<br>15Jun21 | 1    | BASEMENT: PINE VALLEY MODEL 42.02 ROSEDALE ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING. |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

FRAMING

| Invoice                         | Qty. | Description                                                                                                                                                                        |
|---------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,690<br>15Jun21       | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | ***CUSTOM LAYOUT*** BEDROOM 4/ LAUNDRY - DELETE SMALL CLOSET IN BEDROOM 4, REVISED CLOSET IN LAUNDRY ROOM TO BE WIC TO ACCOMMODATE REVISION - SEE PLAN                             |
| 2801<br>72,631<br>15Jun21       | 1    | MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR APPROX. LOCATION |
| 2801<br><br>15Jun21<br>NoCat    | 1    | FRONT EXTERIOR, ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE) - SAME SWITCH AS STANDARD                                                               |
| 2801<br><br>15Jun21<br>NoCat    | 1    | FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH<br>FRONT: 2 @ UPPER SOFFIT<br>FRONT: 2 @ SOFFIT ABOVE GARAGE                                                                  |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER ENSUITE: MODEL OPTIONS 42.03 - MASTER ENSUITE WATER CLOSET - OPT. FROSTED GLASS DOOR AND GLASS WALL                                                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND                                                         |
| 2801<br><br>15Jun21<br>NoCat    | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR                                                                                                                      |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

GLASS AND MIRROR

| Invoice                      | Qty. | Description                                                                                                |
|------------------------------|------|------------------------------------------------------------------------------------------------------------|
| 2801<br>72,497<br>15Jun21    | 1    | MASTER ENSUITE: MODEL OPTIONS 42.03 - MASTER ENSUITE WATER CLOSET - OPT. FROSTED GLASS DOOR AND GLASS WALL |
| 2860<br><br>22Jul21<br>NoCat | 3    | MASTER ENSUITE + ENSUITE 2 + ENSUITE 4: UPGRADE SHOWER DOOR HANDLE - CHROME                                |

GRANITE MARBLE QUARTZ

| Invoice                      | Qty. | Description                                                                               |
|------------------------------|------|-------------------------------------------------------------------------------------------|
| 2860<br><br>22Jul21<br>NoCat | 1    | KITCHEN: ADD WATERFALL LEG TO ONE SIDE OF ISLAND - SEE PLAN FOR LOCATION (STANDARD LEVEL) |

HARDWOOD

| Invoice              | Qty. | Description                                                                                                                                                                                                                                                  |
|----------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2860<br>4<br>22Jul21 | 1    | KITCHEN/BREAKFAST: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, WIREBRUSH TEXTURE, UV OIL FINISH - LEVEL 3                                                                                                                               |
| 2860<br>4<br>22Jul21 | 1    | THRU OUT STANDARD AREAS: MAIN HALL/LIVING ROOM, GREAT ROOM, DINING ROOM, UPPER HALL/STUDY LOFT, MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, WIREBRUSH TEXTURE, UV OIL FINISH - LEVEL 3 |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

HVAC

| Invoice                         | Qty. | Description                                                                                                                                                                    |
|---------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,224<br>15Jun21       | 1    | KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN FOR APPROX LOCATION. LICENCED ELECTRICIAN/GAS FITTER MAY NEED TO RELOCATE TO SPECIFIC LOCATION AFTER CLOSING. |
| 2801<br>72,217<br>15Jun21       | 1    | KITCHEN - UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING                                                                                                     |
| 2801<br>72,690<br>15Jun21<br>** | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>NoCat    | 1    | BASEMENT: PINE VALLEY MODEL 42.02 ROSEDALE ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.                                                         |
| 2801<br><br>15Jun21<br>** NoCat | 1    | KITCHEN - UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                       |
| 2801<br><br>15Jun21<br>NoCat    | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS                                     |
| 2801<br><br>15Jun21<br>NoCat    | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND                                                     |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

INTERIOR TRIM AND DOORS

| Invoice                      | Qty. | Description                                                                                                                                            |
|------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br><br>15Jun21<br>NoCat | 1    | ***CUSTOM LAYOUT*** BEDROOM 4/ LAUNDRY - DELETE SMALL CLOSET IN BEDROOM 4, REVISED CLOSET IN LAUNDRY ROOM TO BE WIC TO ACCOMMODATE REVISION - SEE PLAN |
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND                             |
| 2860<br>155,236<br>22Jul21   | 1    | THRU OUT; UPGRADE INTERIOR DOORS TO LOGAN,<br><br>UPGRADE                                                                                              |
| 2860<br><br>22Jul21<br>NoCat | 1    | LIBRARY: UPGRADE TO FRENCH DOOR - SHAKER 3-LITE WITH FLAT CLEAR GLASS                                                                                  |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

KITCHEN AND BATH CABINETRY

| Invoice                         | Qty. | Description                                                                                                                                |
|---------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 2795<br><br>03Jun21<br>NoCat    | 1    | KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY                                                                                   |
| 2801<br>72,217<br>15Jun21<br>** | 1    | KITCHEN - UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING                                                                 |
| 2801<br>72,690<br>15Jun21<br>** | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS |
| 2801<br><br>15Jun21<br>NoCat    | 1    | KITCHEN: ADD CROWN AND FURRING PANEL TO FILL IN ABOVE CABINETRY TO CEILING (no bulkhead)                                                   |
| 2860<br><br>22Jul21<br>NoCat    | 1    | THRU OUT: SEE ATTACHED CABINETRY SCHEDULE                                                                                                  |
| 2860<br><br>22Jul21<br>NoCat    | 1    | FYI — KITCHEN: ADD WATERFALL LEG TO ONE SIDE OF ISLAND - SEE PLAN FOR LOCATION (STANDARD LEVEL)                                            |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

MASONRY

| Invoice                      | Qty. | Description                                                                                                             |
|------------------------------|------|-------------------------------------------------------------------------------------------------------------------------|
| 2801<br><br>15Jun21<br>NoCat | 1    | FRONT EXTERIOR, ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE) -<br>SAME SWITCH AS STANDARD |
| 2801<br><br>15Jun21<br>NoCat | 1    | FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH<br>FRONT: 2 @ UPPER SOFFIT<br>FRONT: 2 @ SOFFIT ABOVE GARAGE       |
| 2801<br><br>15Jun21<br>NoCat | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR                                                           |

NETWORK AND WIRING

| Invoice                   | Qty. | Description                                                                                                                                                  |
|---------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,258<br>15Jun21 | 1    | GREAT ROOM: ADDITIONAL CAT6 ETHERNET OUTLET - EACH - SEE PLAN FOR LOCATION                                                                                   |
| 2801<br>72,259<br>15Jun21 | 1    | GREAT ROOM: CONDUIT PIPE - FOR WALL MOUNT TV - LOCATE APPROX 66" A.F.F. ABOVE FIREPLACE, THRU BASEMENT TERMINATING AT CABLE LOCATION - SEE PLAN FOR LOCATION |
| 2801<br>72,258<br>15Jun21 | 1    | LIBRARY: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION                                                                                        |
| 2801<br>72,258<br>15Jun21 | 1    | NICHE AT POWDER ROOM: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION                                                                           |
| 2801<br>72,258<br>15Jun21 | 1    | STUDY LOFT: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION                                                                                     |
| 2801<br>15Jun21<br>NoCat  | 1    | MASTER BEDROOM: INSTALL STANDARD CABLE FOR FUTURE WALL HUNG TV AT APPROX 66" A.F.F. ABOVE FIREPLACE                                                          |
| 2801<br>72,258<br>15Jun21 | 1    | MASTER BEDROOM: ADDITIONAL CAT6 ETHERNET OUTLET - EACH                                                                                                       |
| 2801<br>72,261<br>15Jun21 | 1    | KITCHEN: INSTALL VAC PAN UNDER KITCHEN SINK                                                                                                                  |
| 2801<br>72,264<br>15Jun21 | 1    | MUD ROOM: ROUGH - IN FOR EXTRA SECURITY KEY PAD                                                                                                              |
| 2801<br>72,258<br>15Jun21 | 2    | FRONT EXTERIOR - @ PORTICO + @ GARAGE: ADDITIONAL CAT6 ETHERNET OUTLET - EACH - FOR FUTURE CAMERA                                                            |
| 2801<br>72,258<br>15Jun21 | 2    | REAR EXTERIOR: @ REAR + @ GARDEN DOOR: ADDITIONAL CAT6 ETHERNET OUTLET - EACH                                                                                |
| 2801<br>72,258<br>15Jun21 | 3    | BEDROOM 2/ BEDROOM 3/ BEDROOM 4: ADDITIONAL CAT6 ETHERNET OUTLET - EACH - SEE PLAN FOR LOCATION                                                              |
| 2801<br>72,260<br>15Jun21 | 1    | CONDUIT PIPE - FROM ATTIC TO BASEMENT - BASEMENT NEAR ELECTRICAL PANEL TO APPROX CENTER OF ATTIC                                                             |



CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

NETWORK AND WIRING

| Invoice                   | Qty. | Description                                                                                   |
|---------------------------|------|-----------------------------------------------------------------------------------------------|
| 2801<br>72,256<br>15Jun21 | 3    | BEDROOM 2 / BEDROOM 3 / BEDROOM 4: ADDITIONAL RG6 HIGH SPEED TV / INTERNET OUTLETS - SEE PLAN |

PAINT

| Invoice                     | Qty. | Description                                                                                                                                            |
|-----------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2801<br>15Jun21<br>NoCat    | 1    | ***CUSTOM LAYOUT*** BEDROOM 4/ LAUNDRY - DELETE SMALL CLOSET IN BEDROOM 4, REVISED CLOSET IN LAUNDRY ROOM TO BE WIC TO ACCOMMODATE REVISION - SEE PLAN |
| 2801<br>15Jun21<br>NoCat    | 1    | MASTER ENSUITE: MODEL OPTIONS 42.03 - MASTER ENSUITE WATER CLOSET - OPT. FROSTED GLASS DOOR AND GLASS WALL                                             |
| 2801<br>15Jun21<br>NoCat    | 1    | MASTER BEDROOM: MERCURY 36" DIRECT VENT GAS FIREPLACE SECOND FLOOR, INCLUDES ELECTRICAL   NOT INCLUSIVE OF MANTLE SURROUND                             |
| 2801<br>15Jun21<br>NoCat    | 1    | BREAKFAST: EXTERIOR DOORS: UPGRADE TO 8 FOOT TALL GARDEN DOOR                                                                                          |
| 2860<br>22Jul21<br>NoCat    | 2    | MAIN STAIRS 2ND FLOOR TO BASEMENT: STAIN STAIRS AND LANDINGS<br><br>WILL NOT MATCH HARDWOOD IN COLOUR, SPECIES OR TEXTURE                              |
| 2801<br>15Jun21<br>** NoCat | 1    | DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED<br><br>**IF** NO CABINETRY PURCHASED, THEN THERE WILL BE A GAP ABOVE CABINETS             |





CONSTRUCTION SUMMARY

Lot: 53  
Model: 42.02 A ROSEDALE  
Project/Phase: Pine Valley Forevergreen / 1

PLUMBING

| Invoice                      | Qty. | Description                                                                                                            |
|------------------------------|------|------------------------------------------------------------------------------------------------------------------------|
| 2801<br>72,332<br>15Jun21    | 1    | KITCHEN: ROUGH-IN 1/4" COLD WATER LINE TO FRIDGE                                                                       |
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER ENSUITE: UPGRADE TO MOEN 'ALIGN' RAIN SHOWER (from ceiling) + HAND SHOWER/SLIDE BAR - CHROME                    |
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER ENSUITE: MOEN 'ALIGN' FREE-STANDING TUB FILLER - CHROME                                                         |
| 2801<br><br>15Jun21<br>NoCat | 1    | BASEMENT: PINE VALLEY MODEL 42.02 ROSEDALE ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING. |
| 2801<br><br>15Jun21<br>NoCat | 1    | ENSUITE 3: ADD SHOWER POT LIGHT: 6" RECESSED POT LIGHT ABOVE TUB, COMPLETE WITH SWITCH                                 |
| 2801<br><br>15Jun21<br>NoCat | 1    | MASTER ENSUITE: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO ALLOW FOR RAIN SHOWER                              |
| 2801<br><br>15Jun21<br>NoCat | 1    | KITCHEN: RELOCATE FRIDGE FROM STANDARD LOCATION - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS                      |
| 2860<br><br>22Jul21<br>NoCat | 1    | KITCHEN: UPGRADE SINK<br><br>BLANCO - QUARTUS R15 U SUPER SINGLE - STAINLESS STEEL U/M<br><br>MODEL # 401518           |

STAIR AND RAILINGS

| Invoice                      | Qty. | Description                                                                                                                                            |
|------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2860<br>93,797<br>22Jul21    | 2    | MAIN STAIRS: UPGRADE - EURONLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE A-2 |
| 2801<br><br>15Jun21<br>NoCat | 1    | BASEMENT: PINE VALLEY MODEL 42.02 ROSEDALE ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.                                 |

## PV - 53 Cabinetry Schedule

| ROOM             | DESCRIPTION                                                                                                                         | PRICE | QTY | TOTAL |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------|-----|-------|
| KITCHEN          | UPGRADE FROM SERIES 2 TO SERIES 5 - MEDIO 6 'OYSTER' (UPPERS AND HOOD CANOPY)                                                       |       | 1   |       |
|                  | STANDARD DOOR - BOWERY 'AVENZA' (BASES + PANTRIES + ISLAND)                                                                         |       | 1   |       |
|                  | CROWN AND FURRING TO CEILING - 10' CEILING, NO BULKHEAD (PURCHASED ON STRUCTURAL ORDER PE#2801)                                     |       | 1   |       |
|                  | ADD CABINETRY VALANCE ONLY - NO ELECTRICAL                                                                                          |       | 1   |       |
|                  | ADD DECORATIVE HOOD CANOPY - RHS SQUARE                                                                                             |       | 1   |       |
|                  | ADJUST BASE CABINETRY FOR 48" RANGETOP (N/C)                                                                                        |       | 1   |       |
|                  | ADD POTS AND PANS DRAWERS BELOW RANGETOP                                                                                            |       | 1   |       |
|                  | CONVERT BASE CABINETS TO BASE POTS AND PANS DRAWERS                                                                                 |       | 1   |       |
|                  | ADD BEVELLED GLASS INSERTS TO UPPER CABINETS FLANKING HOOD                                                                          |       | 2   |       |
|                  | ADD MATCHING INTERIORS TO GLASS CABINETS FLANKING HOOD                                                                              |       | 4   |       |
|                  | ADD TALL DEEP SINGLE DOOR PANTRY WITH 4 ROLLOUTS                                                                                    |       | 2   |       |
|                  | ADJUST CABINETRY FOR 42" FRIDGE IN "NEW" LOCATION (N/C)                                                                             |       | 1   |       |
|                  | ADJUST BASE CABINETRY TO ALLOW FOR BEVERAGE CENTRE (N/C)                                                                            |       | 1   |       |
|                  | CONVERT CABINETRY TO TALL, DEEP BUILT IN WALL OVEN UNIT FOR OVEN, MICROWAVE, WARMING DRAWER COMBO                                   |       | 1   |       |
|                  | CONVERT CABINETRY TO TALL, DEEP PANTRY/BROOM CLOSET UNIT                                                                            |       | 1   |       |
| ISLAND           | ADD TWO-BIN RECYCLE CENTRE TO ISLAND                                                                                                |       | 1   |       |
|                  | ADD TOUCH LATCH HARDWARE TO REAR ISLAND                                                                                             |       | 1   |       |
|                  | ADD OVERSIZED DÉCOR PANEL TO ONE SIDE OF ISLAND                                                                                     |       | 1   |       |
|                  | ADD PROUD CAMDEN KICK PLATE TO REAR + ONE SIDE OF ISLAND                                                                            |       | 1   |       |
| MASTER ENSUITE   | ADD OPTIONAL FULL HEIGHT PANTRY UNIT (21"D) WITH STANDARD WHITE INTERIOR - 7 ADJUSTABLE SHELVES + RECESSED KICK PLATE + SLAM HINGES |       | 1   |       |
| CABINETRY TOTAL: |                                                                                                                                     |       |     |       |

\*\*\*HARDWARE: HORIZONTAL ON DRAWERS, VERTICAL ON DOORS\*\*\*

|              |                                                                                     |
|--------------|-------------------------------------------------------------------------------------|
| LOT #: PV-53 | DATE: July 21, 2021                                                                 |
| SIGNATURE:   |  |
| SIGNATURE:   |  |

GOLDPARK  
WORTH MORE

REVISED:  
2021-07-21

IV-53.  
July 21, 2021

POT DRAWERS  
+  
48" RANGE TOP

glass + fin.  
interiors  
POT DANGER

'RHS Square Decorative Hoodfan Cabinet

Cytaa5 + fin-interiors

PT DAWIES

GR. FL. KITCHEN

Beverages  
Centre.

Built-in — Appliances

Tall Panty

42<sup>nd</sup>  
Fridge/Freezer  
SS

**GOLDPARK HOMES  
PINE VALLEY  
VAUGHAN, ONTARIO  
MODEL: (4202) ROSEDALE**

**SITE STANDARD: WHITE 3/4" EXTENSION  
SOFT-CLOSE DRAWERS & SOFT-CLOSE  
HINGES TO KITCHEN AREA**

10' CEILING - 12"H COFFERED CEILING -  
M.H. = 102" + 3/4"H CONTEMPORARY  
MOLDING + 5 1/4"H FURRING RAIL  
+ LARGE CORNICE MOLDING TO  
UNDERSIDE OF BOX

Waterfall Leg  
(THIS SIDE ONLY)

STP. BYD

Recycle



**PLUG—**

Decor → Panel

ΛΥΛ

PLAN VIEW

PV-53  
July 21, 2021




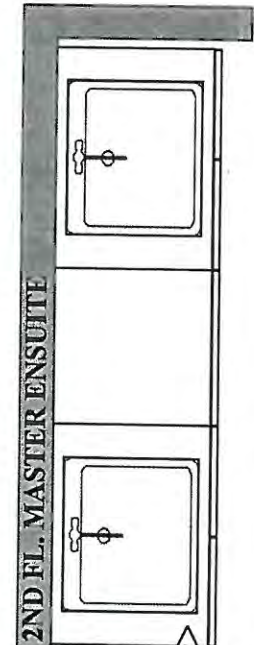
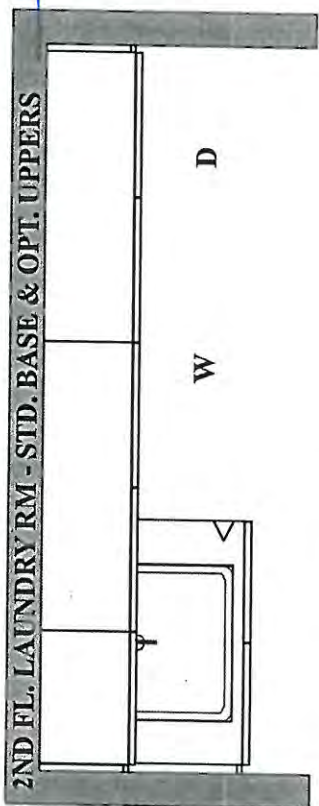


No!

**GOLDPARK HOMES  
PINE VALLEY  
VAUGHAN, ONTARIO  
MODEL: (4202) ROSEDALE**

SITE STANDARD: WHITE 3/4" EXTENSION  
SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES  
TO VANITIES

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH  
VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE  
THROUGHOUT EACH MASTER ENSUITE VANITY

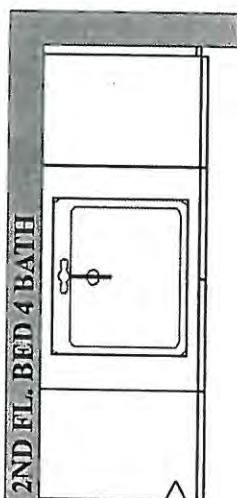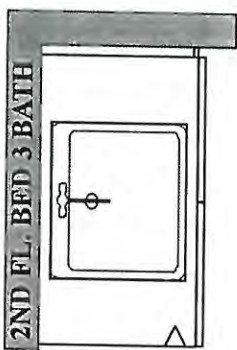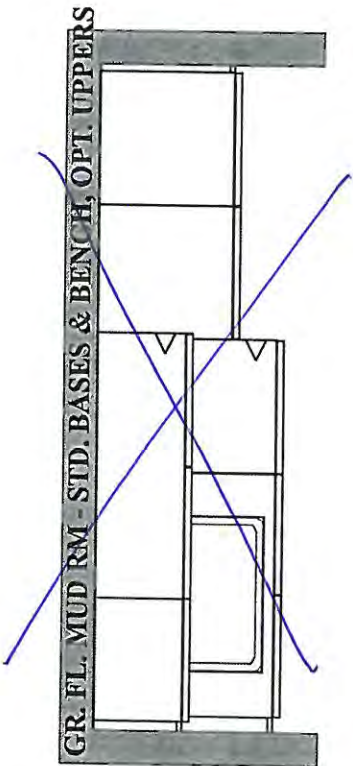




PLAN VIEW

PV-S3  
July 21, 2021



**GOLDPARK HOMES  
PINE VALLEY  
VAUGHAN, ONTARIO  
MODEL: (4202 OPT.) ROSEDALE**

SITE STANDARD: WHITE 3/4" EXTENSION  
SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES  
TO VANITIES

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH  
VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE  
THROUGHOUT EACH MASTER ENSUITE VANITY

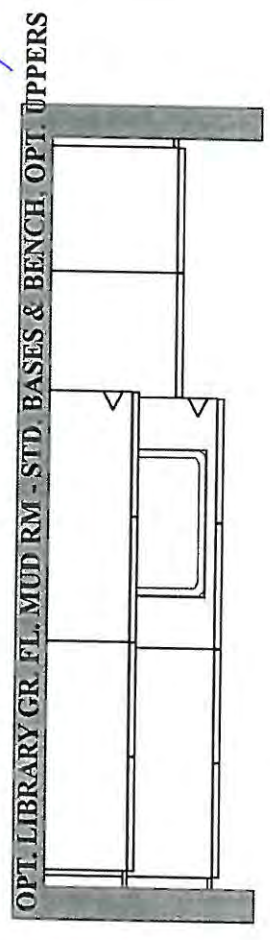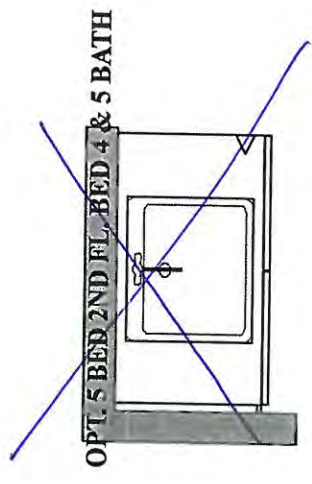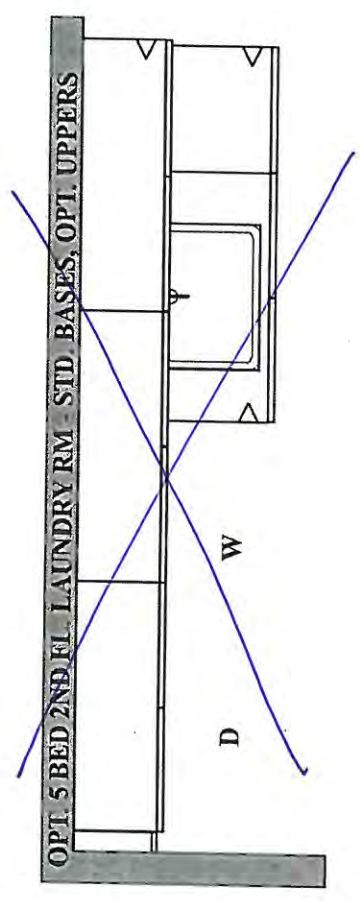

No!

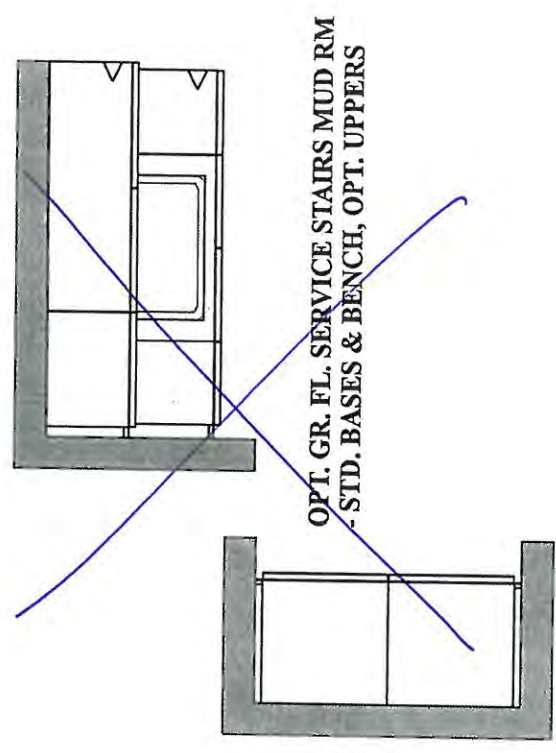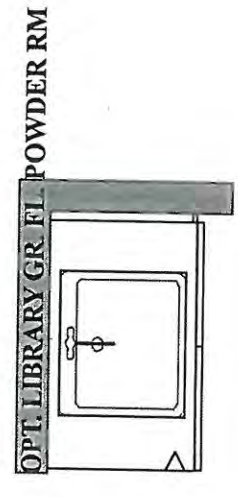

PLAN VIEW

SCHEDULE 'F'



attached  
PV-53  
June 10 2021  
PV-53  
July 21, 2021

# The Rosedale

## 42' SERIES

→ Elevation A • 3,655 sq.ft.  
Elevation B • 3,605 sq.ft.  
Elevation C • 3,590 sq.ft.


8' TALL GARDEN DOOR

DELETE  
BULKHEAD  
Add: Crown/Molding

8" DUCT

GAS + ELECT

HARDWOOD  
IN  
KITCHEN/BREAKFAST

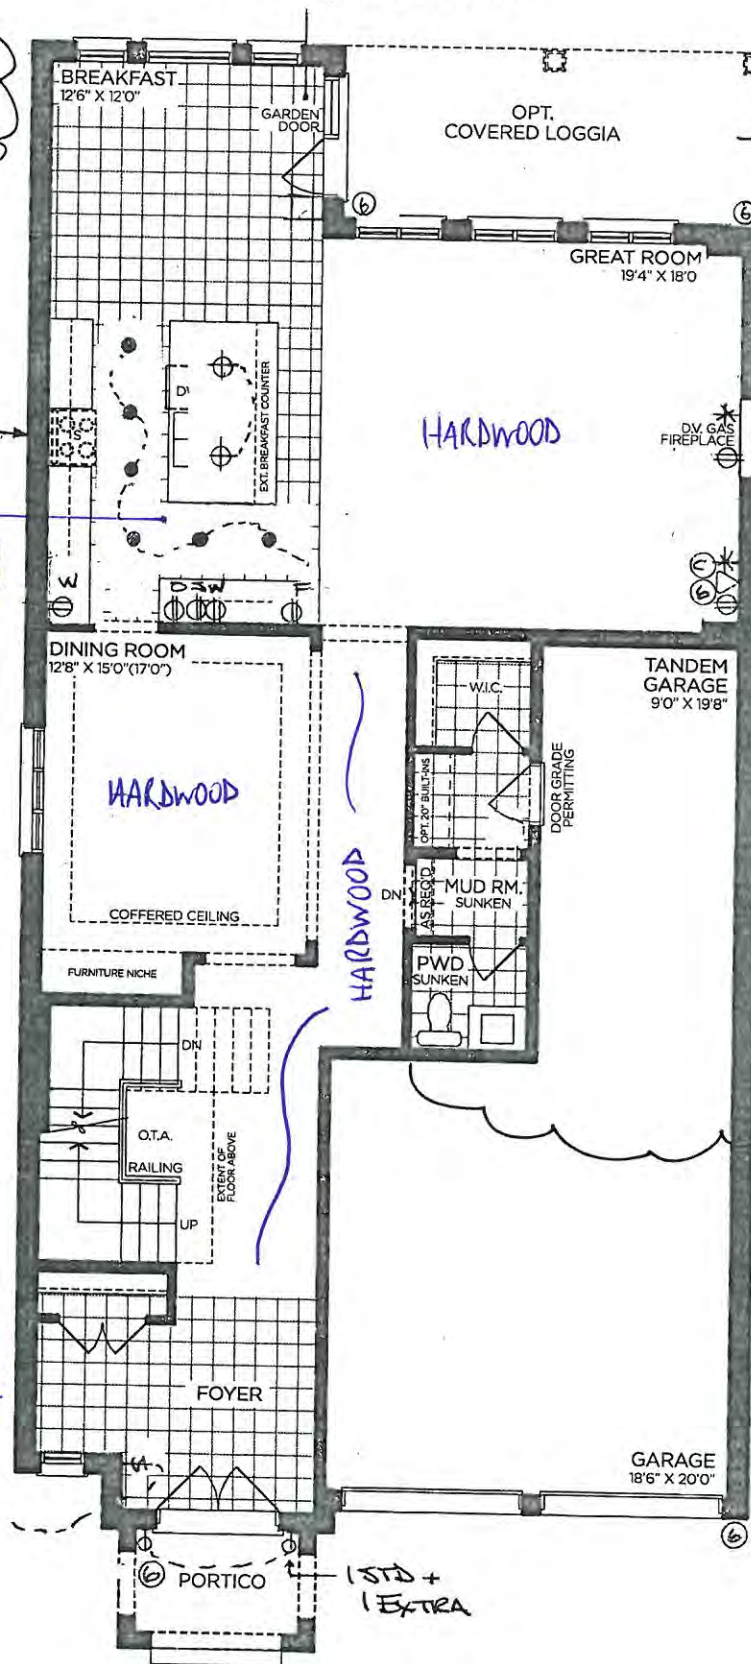

GROUND FLOOR | ELEV. A

|           |  |
|-----------|--|
| VENDOR    |  |
| PURCHASER |  |
| PURCHASER |  |

# GOLDPARK

WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4202


SCHEDULE 'F'



PV-53 (attached)  
June 10, 2021  
PV-53  
July 21, 2021  
FREE STANDING  
TUB FILTER  
↓

The  
Rosedale  
42' SERIES

→ Elevation A • 3,655 sq.ft.  
Elevation B • 3,605 sq.ft.  
Elevation C • 3,590 sq.ft.

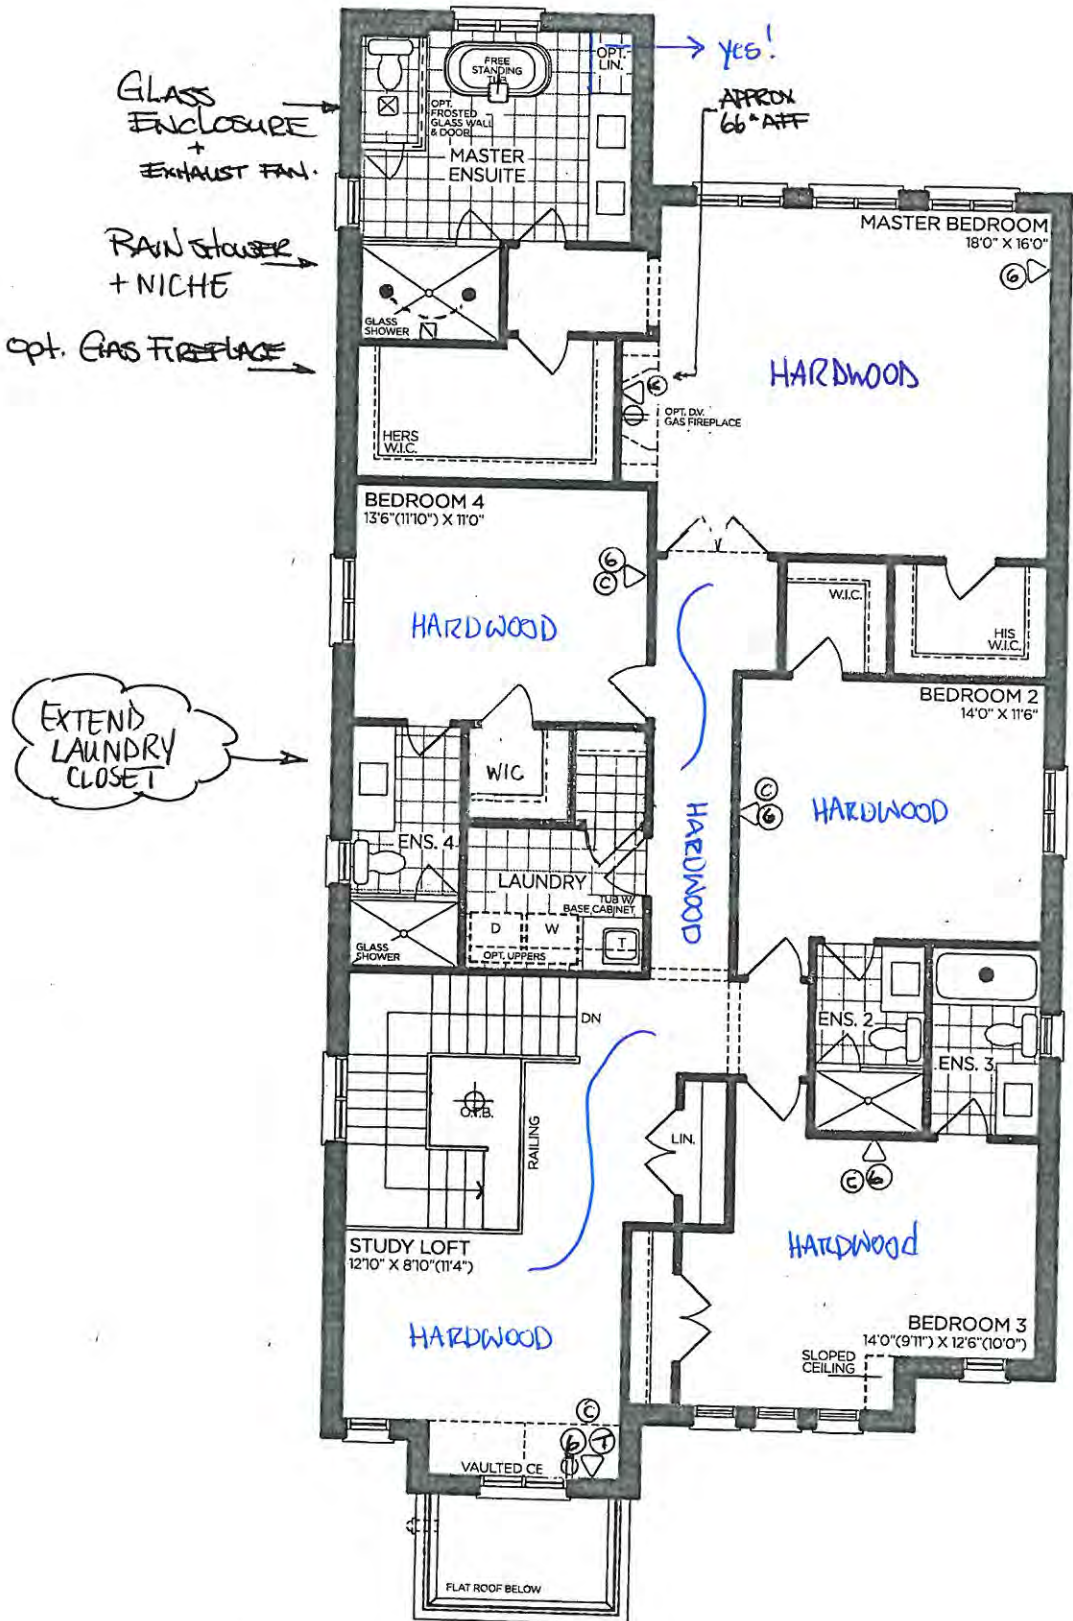

SECOND FLOOR | ELEV. A

VENDOR

PURCHASER

PURCHASER

GOLDPARK  
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4202




AV-53  
JUNE 10 2021  
PV-53  
JULY 24, 2021


## SCHEDULE 'F'

# The Rosedale 42' SERIES


→ Elevation A • 3,655 sq.ft.  
Elevation B • 3,605 sq.ft.  
Elevation C • 3,590 sq.ft.

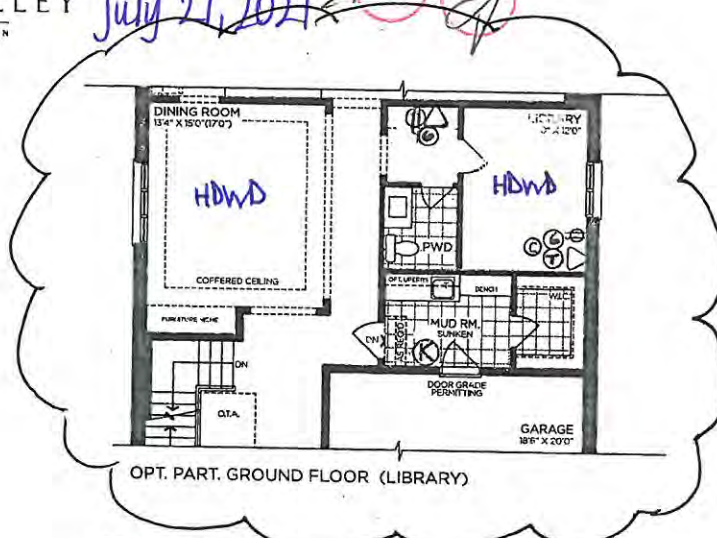


OPT. PART. GROUND FLOOR (LIBRARY)

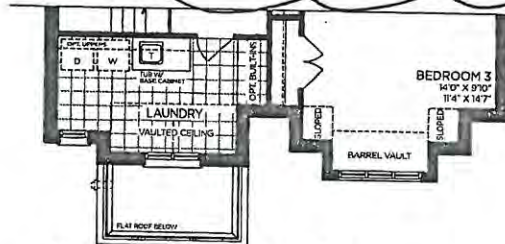


PART. OPT. SECOND FLOOR | ELEV. B  
5 BEDROOM

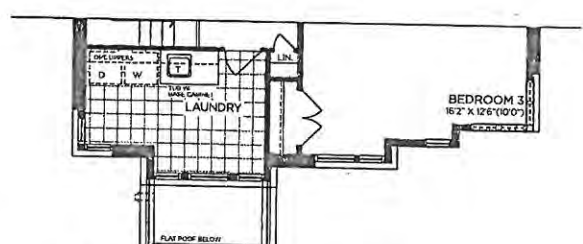


PART. OPT. SECOND FLOOR | ELEV. C  
5 BEDROOM

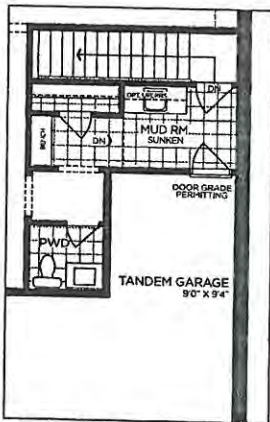


OPT. PART. SERVICE STAIRS

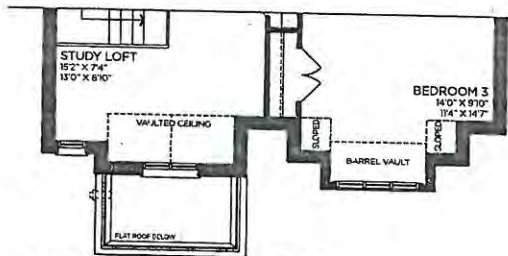


PART. SECOND FLOOR | ELEV. B

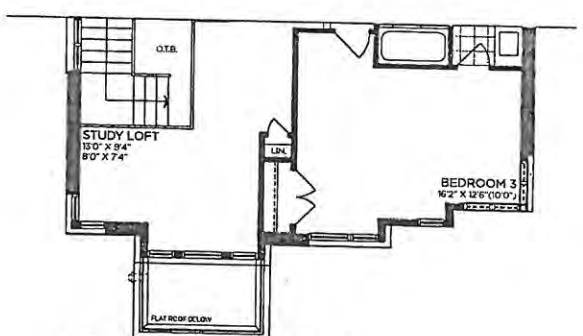


PART. SECOND FLOOR | ELEV. C

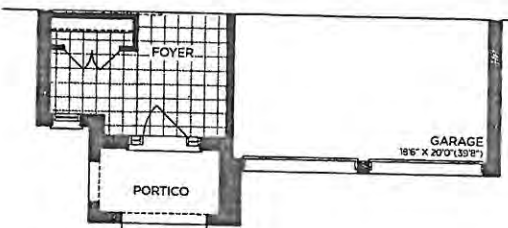


PART. GROUND FLOOR | ELEV. B

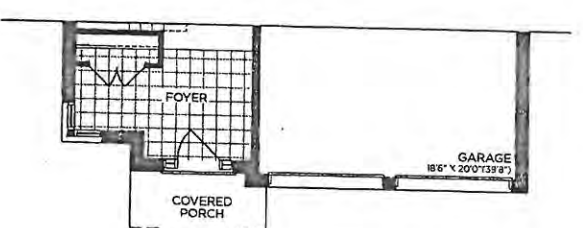

PART. GROUND FLOOR | ELEV. C



OPT. PART. SERVICE STAIRS

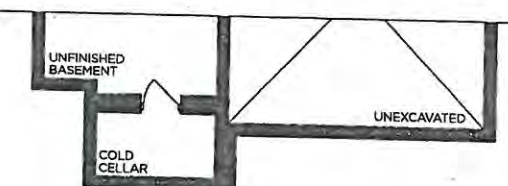

PART. BASEMENT | ELEV. B



PART. BASEMENT | ELEV. C

VENDOR

PURCHASER

PURCHASER

**GOLDPARK**  
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4202

SCHEDULE 'F'



PV-53  
JUNE 10 2021

PV-53  
JULY 21, 2021




LOB / WOB

# The Rosedale

## 42' SERIES

→ Elevation A • 3,655 sq.ft.  
Elevation B • 3,605 sq.ft.  
Elevation C • 3,590 sq.ft.

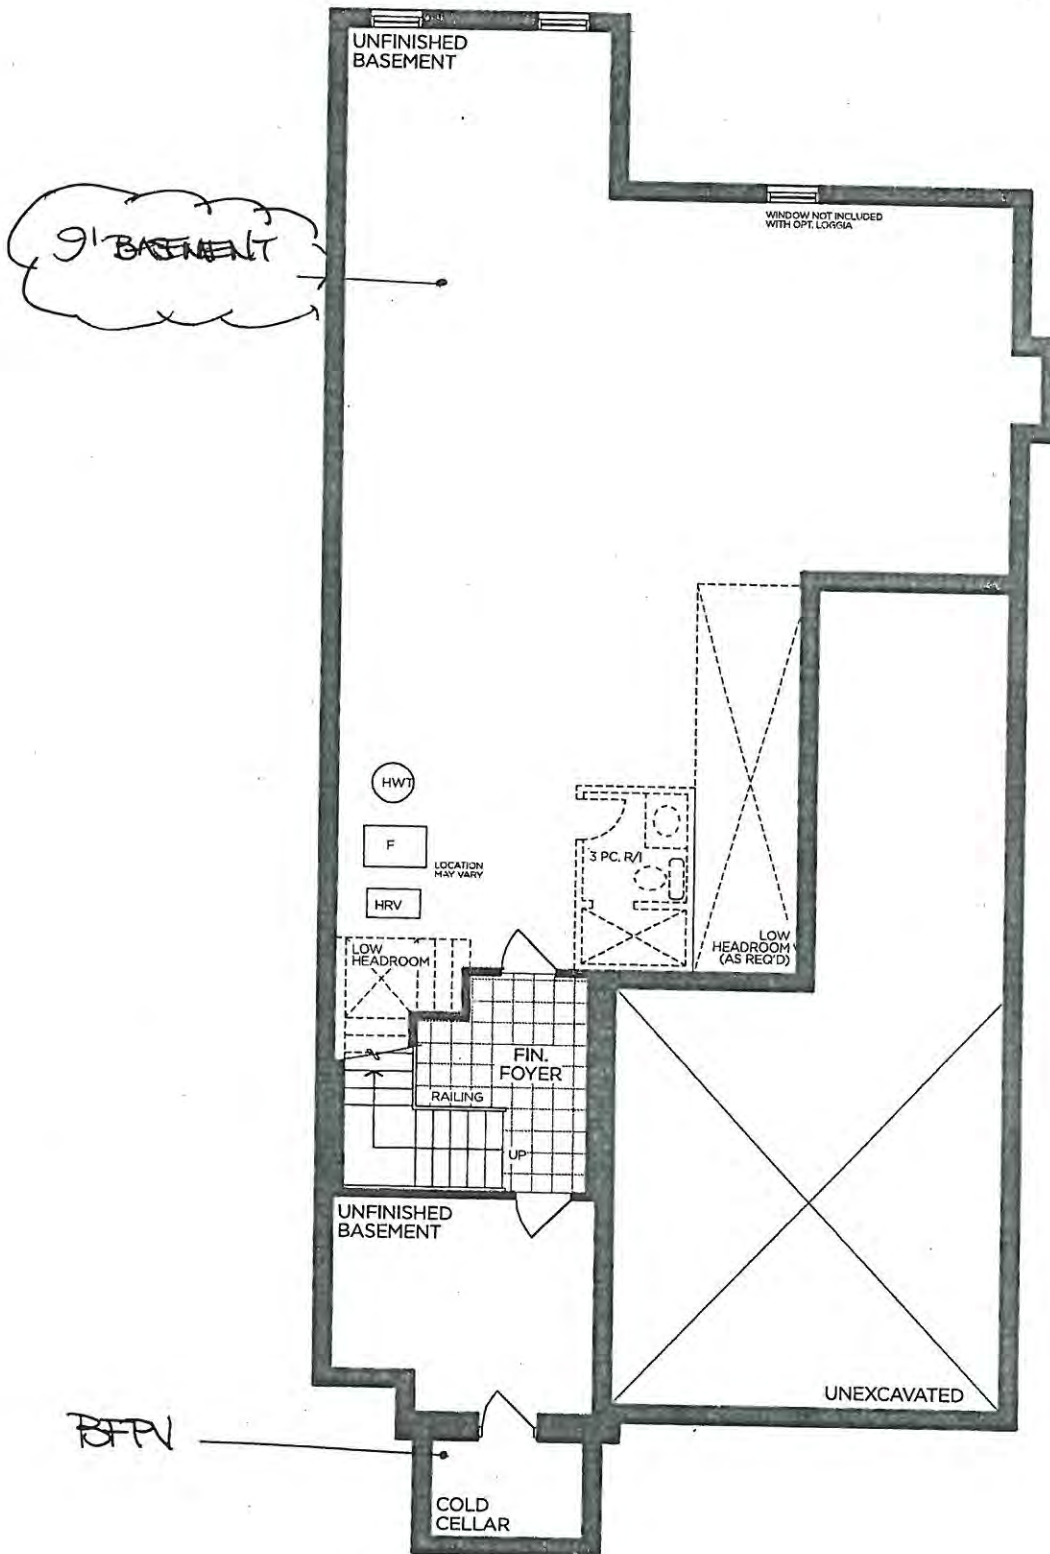

BASEMENT | ELEV. A

VENDOR

PURCHASER

PURCHASER

|          |
|----------|
|          |
|          |
| attached |

# GOLDPARK


WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4202



PINE VALLEY  
FOREVERGREEN

STONE COUNTERTOP EDGE PROFILES



STANDARD 2CM EASED EDGE

LOCATION:


\* thru-out \*

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



UPGRADE 3CM EASED EDGE


LOCATION:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

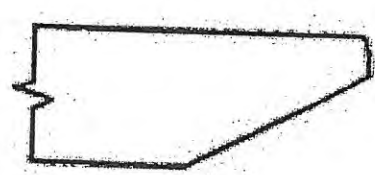

UPGRADE 4CM MITRED EDGE


LOCATION:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

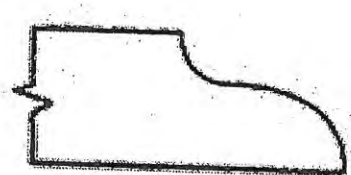

UPGRADE 2CM OGEE EDGE

LOCATION:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

|                               |                            |
|-------------------------------|----------------------------|
| LOT #: <u>PV-S3</u>           | DATE: <u>July 21, 2021</u> |
| SIGNATURE: <u>[Signature]</u> |                            |
| SIGNATURE: <u>[Signature]</u> |                            |



PINE VALLEY  
FOREVERGREEN

STANDARD HARDWARE / HANDLES

☐

H001-02

☐

H001-03

☐

H001-04

☐

H009-03

☐

H009-09

☐


H011-03

☐

H011-05

☐

H011-06

☐

H033-01

☒

H039-03

\* thru-out \*

☐

\*NO HARDWARE

LOT # PR-53

DATE: July 21, 2021

SIGNATURE:

SIGNATURE:

GOLDPARK  
WORTH MORE™




PINE VALLEY  
FOREVERGREEN

## UPGRADE SHOWER HARDWARE

MT6X6

Shower Door Handle

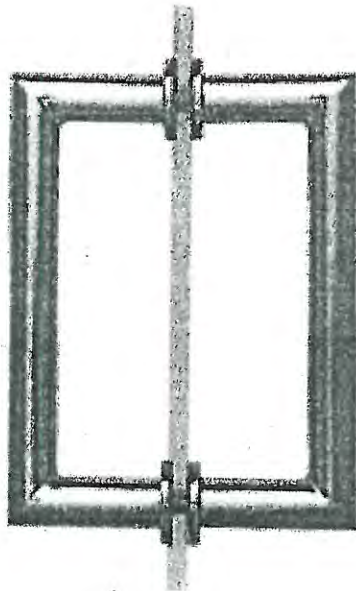

MT6X6  
Shower Door Handle

6" x 6" back-to-back  
3/4" dia. tube  
Cut and mitred corners with  
washers

☒ CHROME

☐ MATTE BLACK

Lot# PV-53


Date: July 21, 2021

Room: Master Ensuite, Ensuite 2,  
Ensuite 4


Signature:

Signature:

## BATHROOM ACCESSORIES

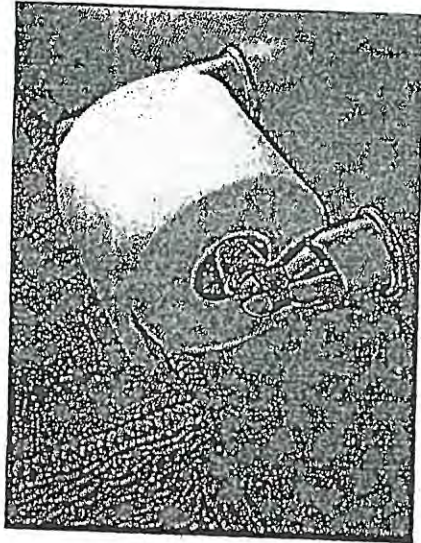

Tissue Holder  
Mason - Chrome

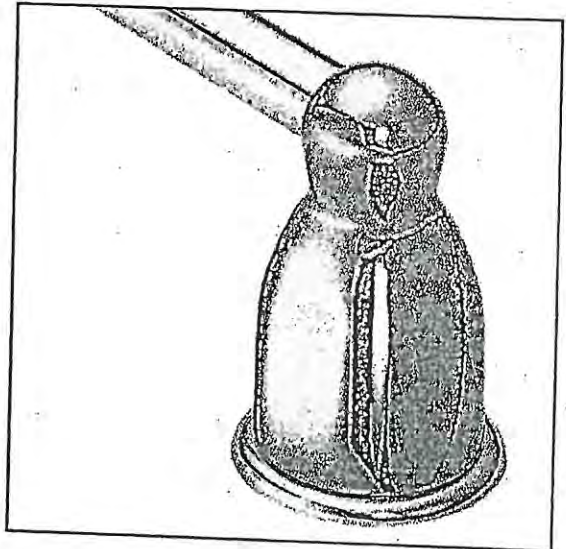

Towel Bar  
Mason - Chrome

Please select one of the following:

☒ INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT  
(tissue holder + towel bar) *\*location as per vendors discretion\**

☐ **\*DO NOT\*** INSTALL STANDARD BATHROOM ACCESSORIES  
THRU OUT *\*tissue holder + towel bar will not be provided\**

LOT # PV-53


DATE: July 21, 2021

SIGNATURE: 

SIGNATURE: 

UPGRADE INTERIOR DOOR

3-LITE SHAKER  
(Clear Glass.)

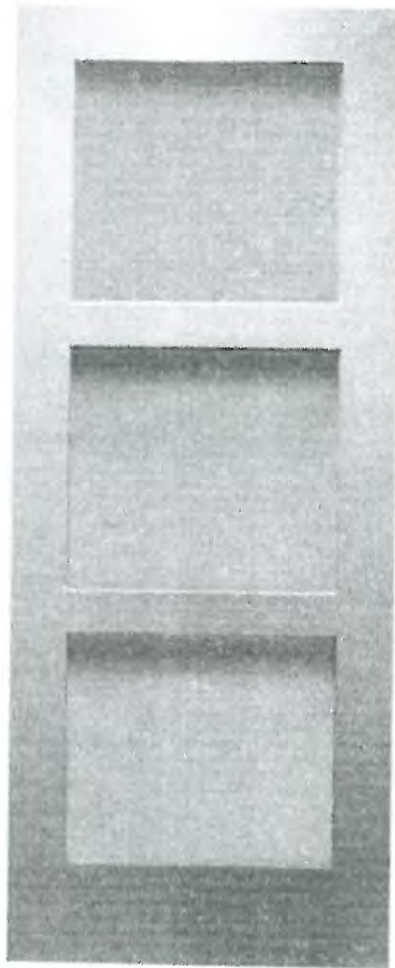


|              |                                                                                     |                   |
|--------------|-------------------------------------------------------------------------------------|-------------------|
| LOT #: PV-53 | DATE: July 21, 2021                                                                 | LOCATION: Library |
| SIGNATURE:   |  |                   |
| SIGNATURE:   |  |                   |



PINE VALLEY  
FOREVERGREEN

UPGRADE INTERIOR DOOR

LOGAN DOOR

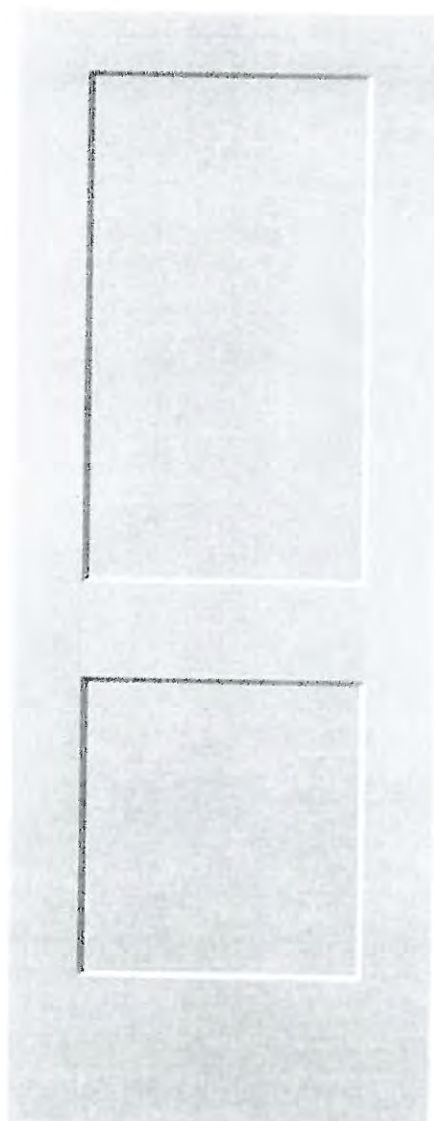

LOCATION:

\*thru-out\*

LOT #  
PV-53

DATE: July 21, 2021

SIGNATURE:

SIGNATURE:

GOLDPARK  
WORTH MORE





PINE VALLEY  
FOREVERGREEN

## UPGRADE KITCHEN SINK

### BLANCO - QUATRUS R15 U SUPER SINGLE

Stainless Steel - Undermount  
32" x 18"

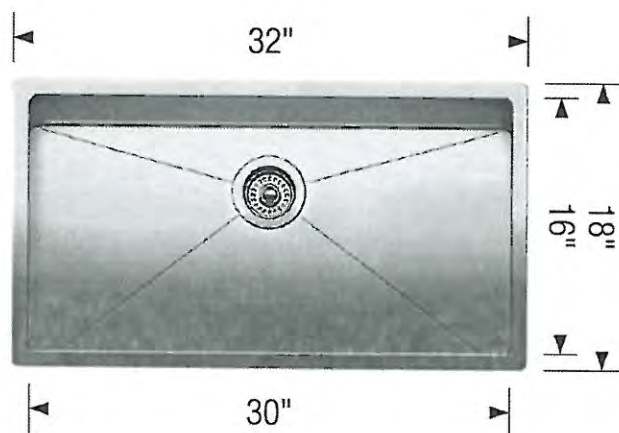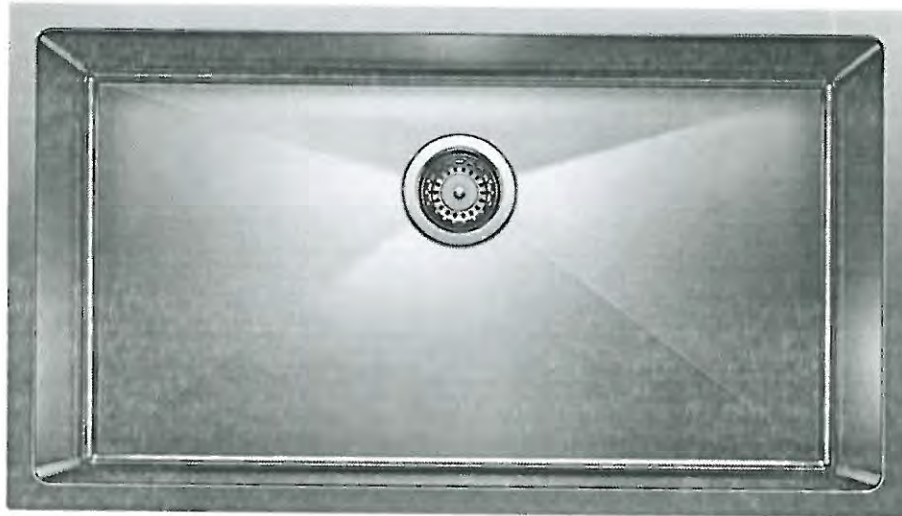

Stainless Steel

MODEL 401518 Stainless Steel

Lot#

PV-53

Room:

kitchen

Signature:

Date:

July 21, 2021


Signature:

GOLDPARK  
WORTH MORE



FIREPLACE MANTLE UPGRADE


CAPRI

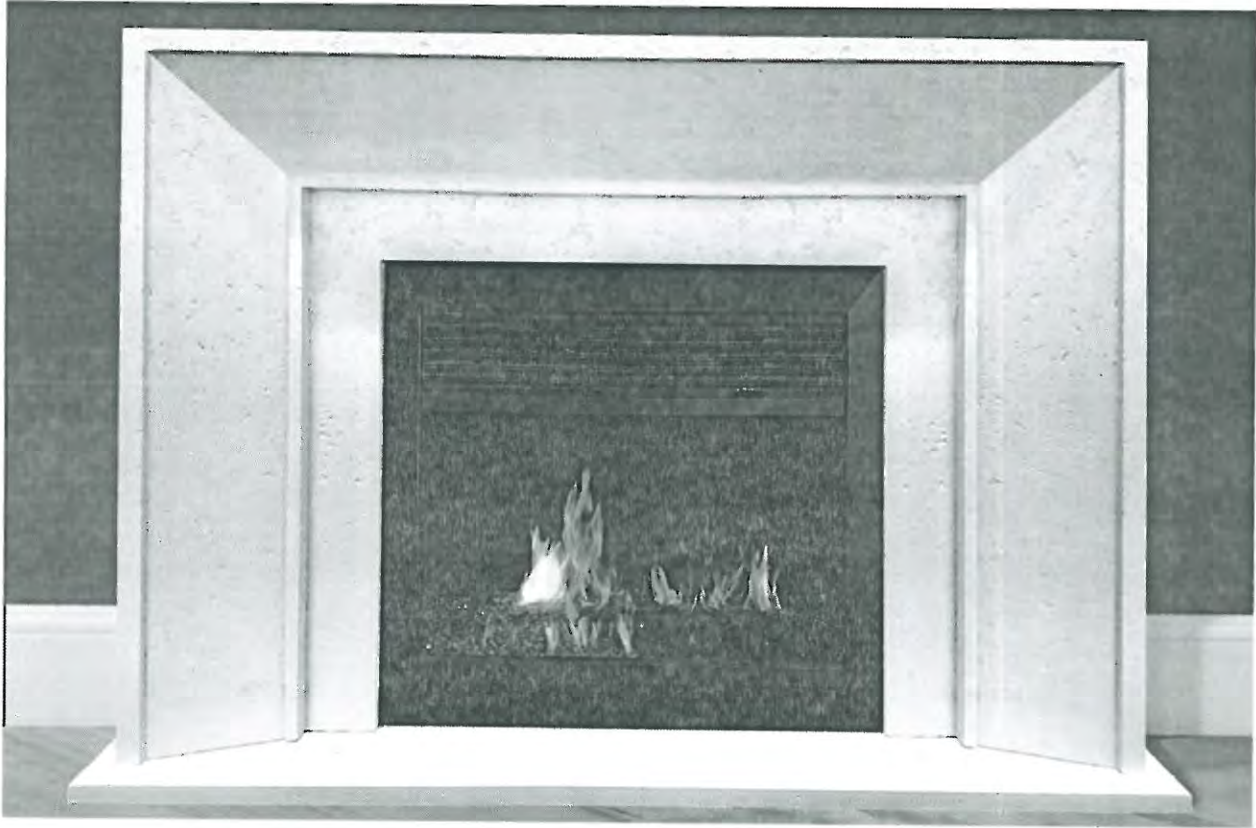

TOP VIEW



SIDE VIEW

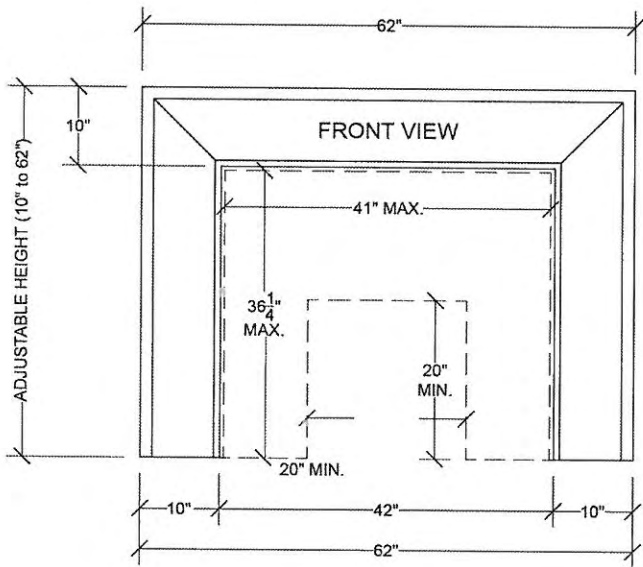

|                     |                            |                                              |
|---------------------|----------------------------|----------------------------------------------|
| LOT #: <b>PR-53</b> | DATE: <b>July 21, 2021</b> | LOCATION: <b>Master Bedroom + Great Room</b> |
|---------------------|----------------------------|----------------------------------------------|

|                                                                                                |
|------------------------------------------------------------------------------------------------|
| SIGNATURE:  |
|------------------------------------------------------------------------------------------------|

|                                                                                                |
|------------------------------------------------------------------------------------------------|
| SIGNATURE:  |
|------------------------------------------------------------------------------------------------|



Project: Pine Valley

Lot: 53

Purchaser(s): Angelica Castaneda & Alberto Rubiano

Standard Hood Fan Deletion

We acknowledge that the builder's standard hood fan will not be installed.  
Do not supply, install and/or credit. We will install our own hood fan after closing.

Signature: 


Signature: 

Date: July 21, 2021

UPGRADE KITCHEN EXTRA

RANGE HOOD - RHS SQAURE

(Insert fan not included)

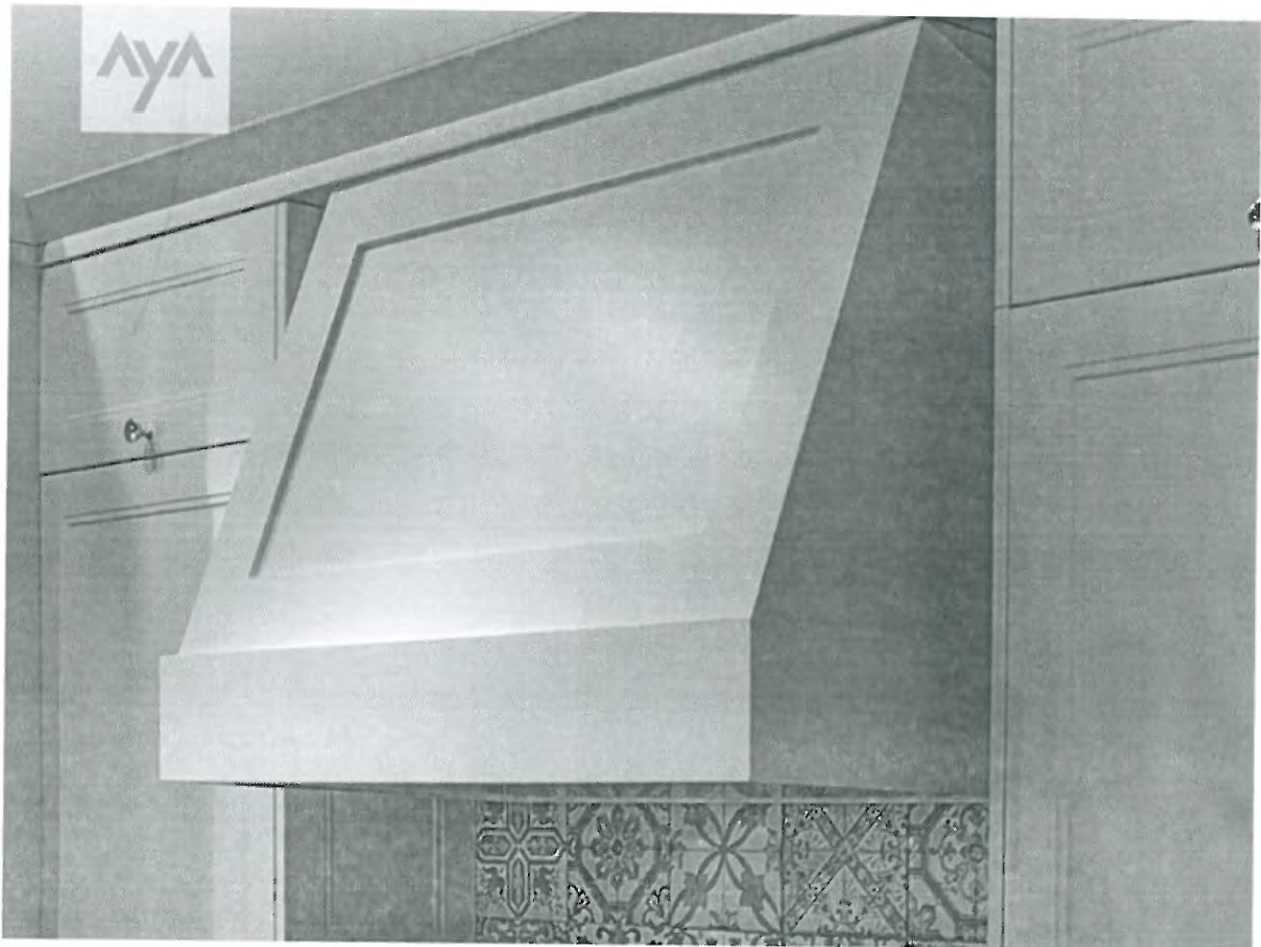

|                                                                                                |                     |                   |
|------------------------------------------------------------------------------------------------|---------------------|-------------------|
| LOT #: PV-53                                                                                   | DATE: July 21, 2021 | LOCATION: kitchen |
| SIGNATURE:  |                     |                   |
| SIGNATURE:  |                     |                   |



PLUMBING UPGRADES

MOEN - ALIGN

Posi-Temp SHOWER ONLY\* with 3 Function Transfer Valve/Trim and Slide Bar with Handshower



☒ CHROME

☐ BRUSHED NICKEL (BN)

☐ BRUSHED GOLD (BG)

☐ MATTE BLACK (BL)

\*from CEILING

MODEL: T2192EP / U361CI / UT4191 / 62320 / 3887EP / A725 / 226651

|                     |                     |                      |
|---------------------|---------------------|----------------------|
| Lot# PV-53          | Date: June 10, 2021 | Room: Master Ensuite |
| Signature: attached |                     |                      |
| Signature: attached |                     |                      |



PLUMBING UPGRADE

MOEN - ALIGN

Single Freestanding Tub Filler



- ☒ CHROME (EP)
- ☐ BRUSHED NICKEL (BN)
- ☐ MATTE BLACK (BL)
- ☐ BRUSHED GOLD (BG)

MODEL: 395 / TS50100


|                        |                        |                         |
|------------------------|------------------------|-------------------------|
| Lot#<br>PV-53          | Date:<br>June 10, 2021 | Room:<br>Master Ensuite |
| Signature:<br>attached |                        |                         |
| Signature:<br>attached |                        |                         |

PLUMBING UPGRADES



MOEN - ALIGN

Posi-Temp SHOWER ONLY\* with 3 Function Transfer Valve/Trim and Slide Bar with Handshower

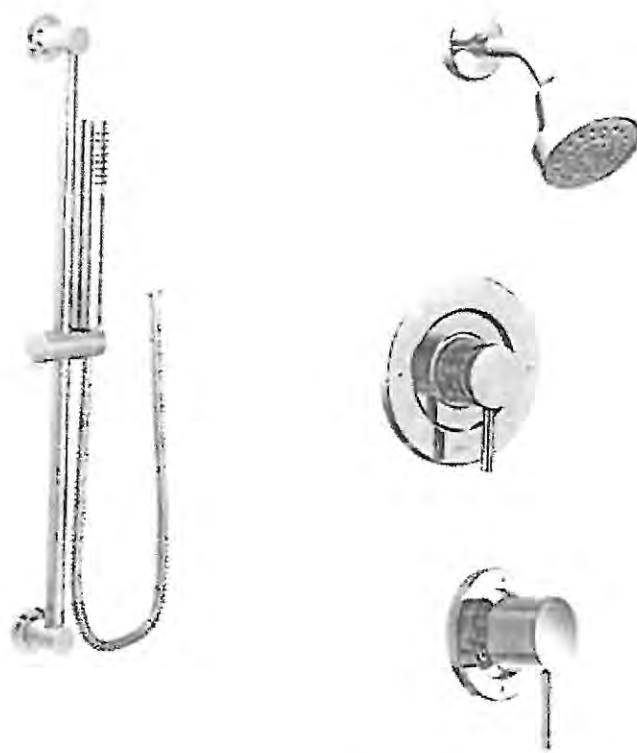

- ☒ CHROME
- ☐ BRUSHED NICKEL (BN)
- ☐ BRUSHED GOLD (BG)
- ☐ MATTE BLACK (BL)

\*from CEILING

MODEL: T2102LP / U361CI / UT4191 / 52320 / 3887EP / A225 / 226651

|                               |                     |                      |
|-------------------------------|---------------------|----------------------|
| Lot# PV-53                    | Date: June 10, 2021 | Room: Master Ensuite |
| Signature: <i>[Signature]</i> |                     |                      |
| Signature: <i>[Signature]</i> |                     |                      |

GOLD WORTH MORE

PLUMBING UPGRADE



MOEN - ALIGN

Single Freestanding Tub Filler



- ☒ CHROME (EP)
- ☐ BRUSHED NICKEL (BN)
- ☐ MATTE BLACK (BL)
- ☐ BRUSHED GOLD (BG)

MODEL: 395 / T550100

|                               |                        |                         |
|-------------------------------|------------------------|-------------------------|
| Lot#<br>PV-53                 | Date:<br>June 10, 2021 | Room:<br>Master Ensuite |
| Signature: <i>[Signature]</i> |                        |                         |
| Signature: <i>[Signature]</i> |                        |                         |


GOLD WATER SAVING



## 24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JD TSS246G, JD TSS244G, JD TSS245G, JD TSS243G, JD TSS247HS  
23" (W) x 33" (H) x 24" (Depth without door panel/handles)

### PRODUCT DIMENSIONS

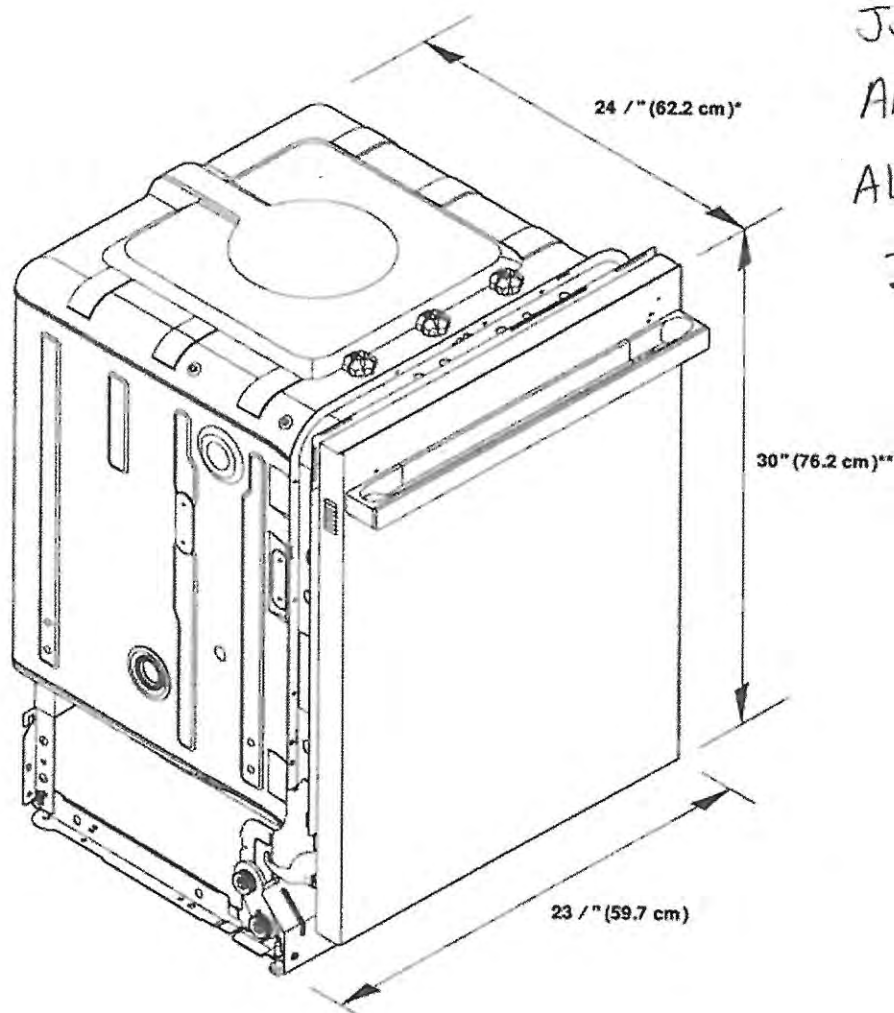

Lot 53  
June 1, 2021  
Angelica C.   
Alberto R.   
~~2/11~~  
24"

\*For custom panel models, this value may change.

\*\*With wheels removed. Add up to 1" (2.5 cm) to height with wheels and leg levelers fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.




## 24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JD TSS246G, JD TSS244G, JD TSS245G, JD TSS243G, JD TSS247HS  
23" (W) x 33" (H) x 24" (Depth without door panel/handles)


### PRODUCT DIMENSIONS CONTD.

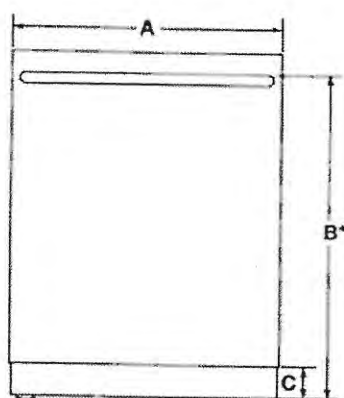

FRONT VIEW

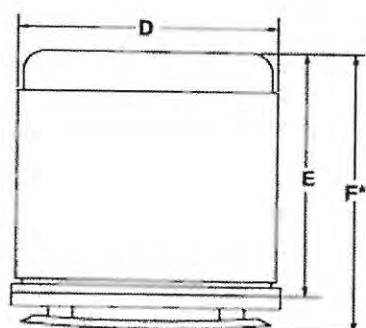

TOP VIEW

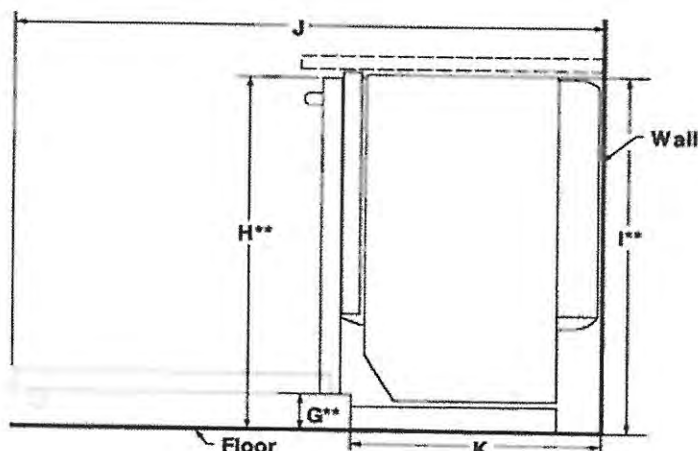

SIDE VIEW

|     | DESCRIPTION                          | JD TSS246G,<br>JD TSS244G                     | JD TSS245G,<br>JD TSS243G                     | JD TSS247HS                                   |
|-----|--------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
| A   | Width of door                        | 23 /" (60.6 cm)                               | 23 /" (60.6 cm)                               | 23 /" (60.6 cm)                               |
| B*  | Height to top of handle              | 31 /" (80.1 cm)                               | -                                             | -                                             |
| C   | Height of adjustable toe kick        | 3 /" (8.8 cm) - min.<br>4 /" (10.6 cm) - max. | 3 /" (8.8 cm) - min.<br>4 /" (10.6 cm) - max. | 3 /" (8.8 cm) - min.<br>4 /" (10.6 cm) - max. |
| D   | Width of recessed dishwasher         | 23 /" (60.6 cm)                               | 23 /" (60.6 cm)                               | 23 /" (60.6 cm)                               |
| E*  | Depth without handle                 | 22 /" (57.4 cm)                               | 22 /" (57.4 cm)                               | 22 /" (57.4 cm)                               |
| F*  | Depth with handle                    |                                               |                                               |                                               |
|     | Pro-Style® Stainless                 | 29 /" (73.9 cm)                               | -                                             | -                                             |
|     | Euro-Style Stainless                 | 28 /" (72.6 cm)                               | -                                             | -                                             |
|     | RISE™ Stainless                      | 28 /" (72.7 cm)                               | -                                             | -                                             |
|     | NOIR™ Stainless                      | 28 /" (72.6 cm)                               | -                                             | -                                             |
| G** | Height to bottom of door             | 3 /" (9.4 cm)                                 | 3 /" (9.4 cm)                                 | 3 /" (9.4 cm)                                 |
| H** | Height to top of door (min.)         | 33 /" (85.7 cm)                               | 33 /" (85.7 cm)                               | 33 /" (85.1 cm)                               |
| I** | Height of recessed dishwasher (min.) | 33 /" (85.5 cm)                               | 33 /" (85.5 cm)                               | -                                             |
| J   | Depth with door fully open (min.)    | 49 /" (125.7 cm)                              | 49 /" (125.7 cm)                              | -                                             |
| K   | Depth with toe kick (min.)           | 20 /" (52.9 cm)                               | 20 /" (52.9 cm)                               | 21" (533 mm)                                  |

Lot 53  
June 1, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




# 24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JD TSS246G, JD TSS244 G, JD TSS245G, JD TSS243G, JD TSS247HS  
23 / " (W) x 33 / " (H) x 24" (Depth without door panel/handles)


## OPENING CLEARANCE DIMENSIONS

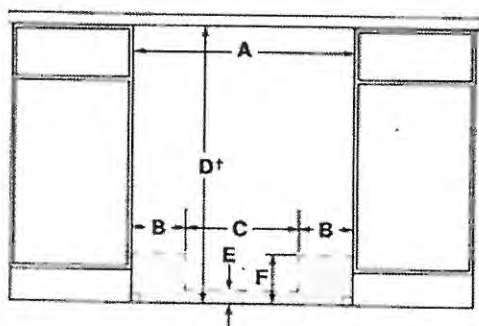

FRONT VIEW

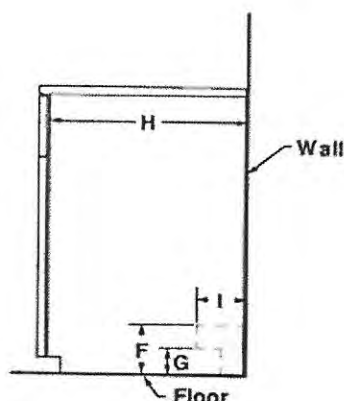

SIDE VIEW



BACK VIEW

|                                                                           | DESCRIPTION                                                   | JD TSS246G,<br>JD TSS244 G,<br>JD TSS245G,<br>JD TSS243G,<br>JD TSS247HS |
|---------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------------|
| A                                                                         | Width (min.)                                                  | 24" (61cm)                                                               |
| B                                                                         | Width of possible utility installation area (back wall)       | 6 / " (17.2 cm)                                                          |
| C                                                                         | Width of clear area (back wall)                               | 10 / " (26.7 cm)                                                         |
| D†                                                                        | Height with wheels removed (min.)                             | 34" (86.4 cm)                                                            |
| E                                                                         | Height of possible utility installation area (back wall)      | 2 / " (6.4 cm)                                                           |
| F                                                                         | Height of possible utility installation area (back/side wall) | 6 / " (15.9 cm)                                                          |
| G                                                                         | Height of clear area (side wall)                              | 3" (7.6 cm)                                                              |
| H                                                                         | Depth (min.)                                                  | 24" (61 cm)                                                              |
| I                                                                         | Depth of utility location (side wall)                         | 4" (10.2 cm)                                                             |
| Recommended drain connection location – closest to sink                   |                                                               | 1 / " (3.8 cm) dia.                                                      |
| Recommended electrical connection location – right-hand side or back wall |                                                               | 1 / " (3.8 cm) dia.                                                      |
| Recommended water connection location – left-hand side or back wall       |                                                               | 1/2" (1.3 cm) dia.                                                       |

†Measured from the lowest point on the underside of countertop.

**NOTE:** Shaded areas indicate recommended locations of electrical, water and drain connections.

### LOCATION REQUIREMENTS

Corner locations require a 2" (5.1cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Lot 53

June 1, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




## 2 1/4" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JD TSS246G, JD TSS244G, JD TSS245G, JD TSS243G, JD TSS247HS  
23 / " (W) x 33 / " (H) x 24" (Depth without door panel/handles)

### WOOD PANEL GUIDE



WOOD PANEL - TOP VIEW

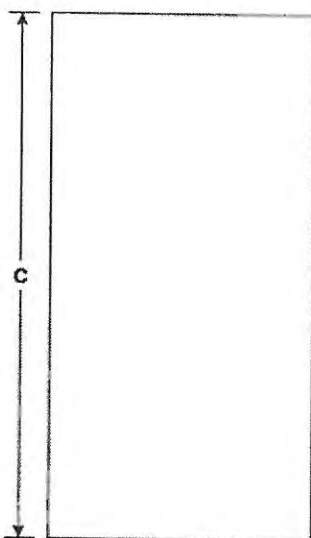

WOOD PANEL - FRONT VIEW

|   | DESCRIPTION | JD TSS245G, JD TSS243G |
|---|-------------|------------------------|
| A | Width       | 23 / " (60 cm)         |
| B | Thickness   | 3/4" (1.91 cm)         |
| C | Height      | 29 / " (76 cm)         |

Signed by:  
Angelica Castaneda  
Alberto Rubiano  
May 27, 2021

### INSTALLATION NOTES

- Overlay panel thickness is 3/4" (190 cm).
- Maximum panel weight (including handle) is 14.7 lbs (6.7 kg).
- Panel dimensions shown are the minimum size to cover the appliance door. The resulting top and side reveals are 3/16". Panels can be made taller/wider to match surrounding cabinetry.
- Minimum opening height: 34" (86.36 cm).

lot 53  
June 1, 2021



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



UNDER COUNTER BEVERAGE CENTER  
DETAILED PLANNING DIMENSIONS GUIDE  
JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFL242HX, JUBFR242HX  
23<sup>7</sup>/<sub>8</sub>" (W) x 34<sup>3</sup>/<sub>8</sub>" (H) x 23<sup>1</sup>/<sub>2</sub>" (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

| Base Unit<br>(Panel Ready)                                                         | RISE™ Model                                                                        | NOIR™ Model                                                                        |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |  |
| LH: JUBFL242HX<br>RH: JUBFR242HX                                                   | LH: JUBFL242HL<br>RH: JUBFR242HL                                                   | LH: JUBFL242HM<br>RH: JUBFR242HM                                                   |

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

RISE™ STAINLESS HANDLE KIT

- W11231237
- For use with Custom Overlay panels
- Quantity - One handle per kit

~~NOIR™ STAINLESS HANDLE KIT~~

- ~~■ W11231236~~
- ~~■ For use with Custom Overlay panels~~
- ~~■ Quantity - One handle per kit~~

Lot 53

June 1, 2021

Angelica C.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

WT1356581A




# UNDER COUNTER BEVERAGE CENTER

## DETAILED PLANNING DIMENSIONS GUIDE

JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFL242HX, JUBFR242HX

23<sup>7</sup>/<sub>8</sub>" (W) x 34<sup>1</sup>/<sub>8</sub>" (H) x 23<sup>1</sup>/<sub>8</sub>" (Depth without door panels/handles)

PRODUCT DIMENSIONS

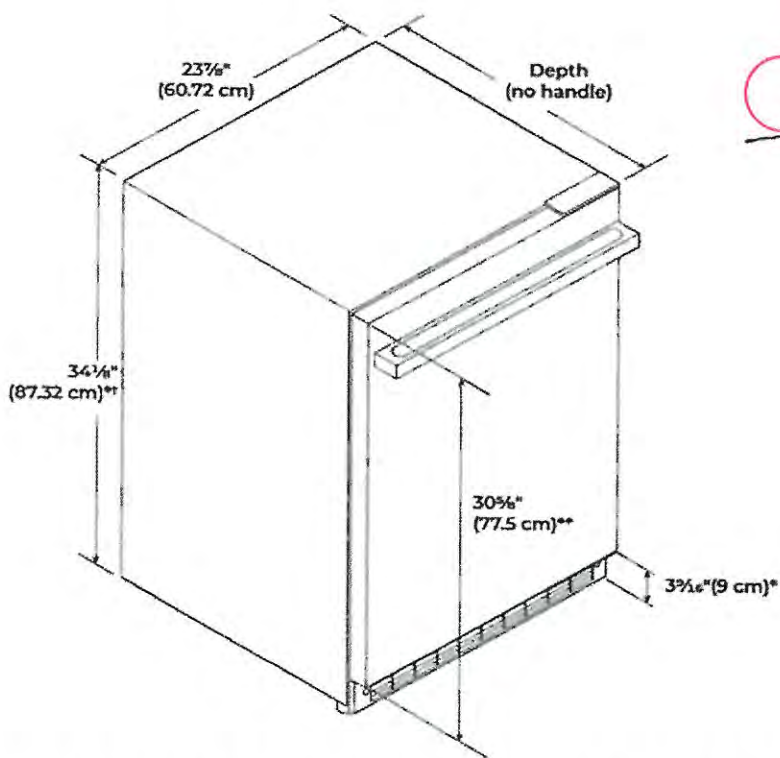

| VARIANT                              | DEPTH (NO HANDLE)                                 |
|--------------------------------------|---------------------------------------------------|
| RISE™ Model                          | 23 <sup>1</sup> / <sub>8</sub> " (60.4 cm)        |
| NOIR™ Model                          | <del>23<sup>5</sup>/<sub>8</sub>" (60.8 cm)</del> |
| Panel ready models (with 3/4" panel) | <del>23<sup>1</sup>/<sub>8</sub>" (60.2 cm)</del> |

\*Add 5/8" (1.6 cm) to the height dimension when leveling legs are fully extended.  
 \*\*For custom panel models, this will vary.  
 †Add 1/4" (6.4 mm) to the height dimension for height with hinge covers.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




# UNDER COUNTER BEVERAGE CENTER

## DETAILED PLANNING DIMENSIONS GUIDE


JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFL242HX, JUBFR242HX  
 23<sup>7</sup>/<sub>8</sub>" (W) x 34<sup>3</sup>/<sub>8</sub>" (H) x 23<sup>1</sup>/<sub>2</sub>" (Depth without door panels/handles)

| DIMENSION | DESCRIPTION                                                        | RISE™ Model                                  | NOIR™ Model                                         | Panel ready models<br>(with 3/4" panel)           |
|-----------|--------------------------------------------------------------------|----------------------------------------------|-----------------------------------------------------|---------------------------------------------------|
| A         | Width of door                                                      | 23 <sup>1</sup> / <sub>2</sub> " (60.3 cm)   |                                                     |                                                   |
| B         | Width of the grille                                                | 23 <sup>13</sup> / <sub>16</sub> " (60.5 cm) | <del>23<sup>13</sup>/<sub>16</sub>" (60.5 cm)</del> | <del>23<sup>1</sup>/<sub>2</sub>" (60.5 cm)</del> |
| C         | Height to top of handle                                            | 28 <sup>1</sup> / <sub>16</sub> " (71.3 cm)  | <del>28<sup>1</sup>/<sub>16</sub>" (71.3 cm)</del>  | <del>**</del>                                     |
| D         | Width from side of<br>beverage center to handle<br>- door open 90° | 2 <sup>7</sup> / <sub>16</sub> " (6.2 cm)    | <del>1<sup>15</sup>/<sub>16</sub>" (8 cm)</del>     | <del>**</del>                                     |
| E         | Depth without door                                                 | 21 <sup>1</sup> / <sub>2</sub> " (55.1 cm)   |                                                     |                                                   |
| F         | Depth with door                                                    | 23 <sup>1</sup> / <sub>2</sub> " (60.4 cm)   | <del>23<sup>15</sup>/<sub>16</sub>" (60.8 cm)</del> | <del>23<sup>1</sup>/<sub>2</sub>" (60.2 cm)</del> |
| G         | Depth with handle                                                  | 26 <sup>3</sup> / <sub>16</sub> " (67.5 cm)  | <del>26<sup>1</sup>/<sub>8</sub>" (66.3 cm)</del>   | <del>**</del>                                     |
| H         | Depth with door open 90°                                           | 48" (121.9 cm)                               |                                                     |                                                   |


\*\*For custom panel models, this will vary.

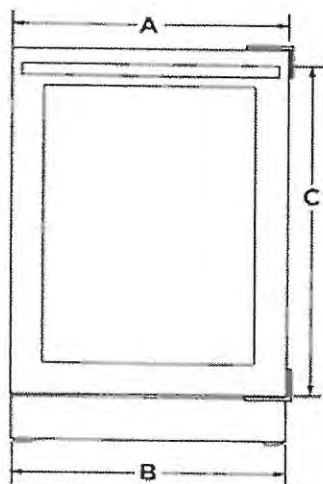

FRONT VIEW

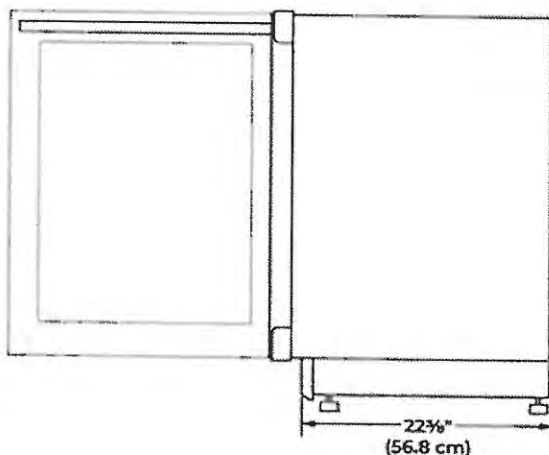

SIDE VIEW

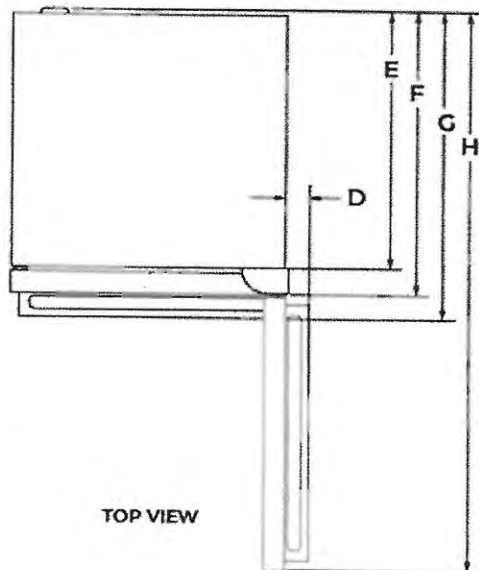

TOP VIEW

Lot 53  
 June 1, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



# UNDER COUNTER BEVERAGE CENTER DETAILED PLANNING DIMENSIONS GUIDE

JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFL242HX, JUBFR242HX  
23<sup>7</sup>/<sub>8</sub>" (W) x 34<sup>3</sup>/<sub>8</sub>" (H) x 23<sup>1</sup>/<sub>2</sub>" (Depth without door panels/handles)


## OPENING DIMENSIONS

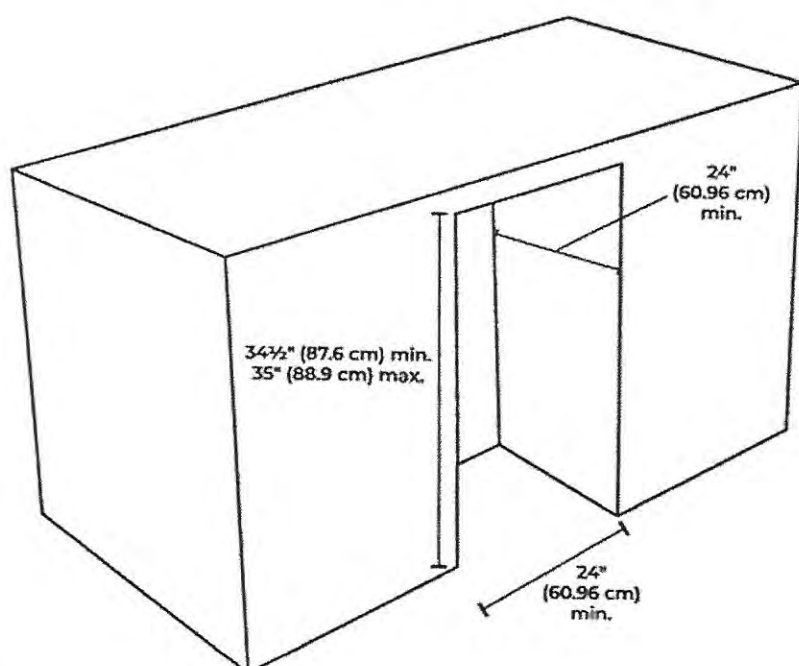

**NOTE:** Make sure there is 3" (7.6 cm) space between beverage center and adjacent appliance/wall for door swing.

## ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates recommended recessed power outlet (located behind the beverage center).
- Power cord length is 5 ft (152.4 cm).
- For flush installation, the power outlet can be installed in adjacent cabinetry with a cutout on the power cord side for routing of the power cord.

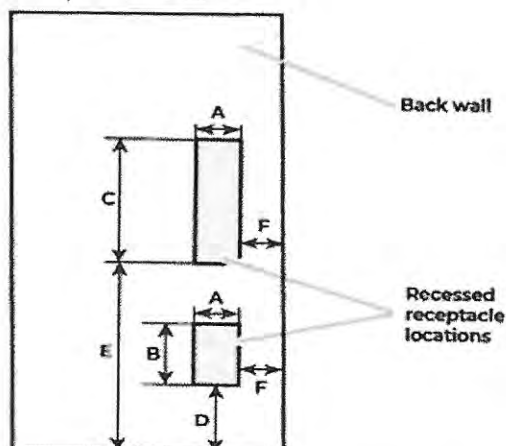

|               |                                              |
|---------------|----------------------------------------------|
| Dimension - A | 3" (7.55 cm)                                 |
| Dimension - B | 4 <sup>1</sup> / <sub>2</sub> " (11.37 cm)   |
| Dimension - C | 9 <sup>1</sup> / <sub>4</sub> " (23.47 cm)   |
| Dimension - D | 12 <sup>1</sup> / <sub>16</sub> " (30.64 cm) |
| Dimension - E | 21 <sup>3</sup> / <sub>4</sub> " (55.16 cm)  |
| Dimension - F | 1 <sup>3</sup> / <sub>4</sub> " (4.44 cm)    |

lot 53  
June 1 12021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



# UNDER COUNTER BEVERAGE CENTER

## DETAILED PLANNING DIMENSIONS GUIDE

JUBFR242HL, JUBFL242HL, JUBFR242HM, JUBFL242HM, JUBFL242HX, JUBFR242HX  
23<sup>3</sup>/<sub>8</sub>" (W) x 34<sup>3</sup>/<sub>8</sub>" (H) x 23<sup>3</sup>/<sub>8</sub>" (Depth without door panels/handles)

### WOOD PANEL GUIDE

#### CAUTION


##### Pinch Hazard

Installation of door panels with less than a <sup>3</sup>/<sub>8</sub>" (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

#### IMPORTANT:


- The graphics in following sections show a custom panel for a door with the hinges installed on the right-hand side. If your beverage center has the hinges installed on the left-hand side, rotate the custom frame 180° so the hinge markings will be on the left.
- Panel dimensions shown are the minimum size to cover the appliance door. Panels can be made taller/wider to match surrounding cabinetry.
- The recommended thickness of the overlay panel is 3/4" (19 mm).
- Custom solid door overlay panel must not weigh more than 20 lbs (9.07 kg).
- Custom glass door overlay panel must not weigh more than 10 lbs (4.54 kg).
- Overlay panels weighing more than recommended may cause damage to your appliance.

### GLASS DOOR OVERLAY PANEL

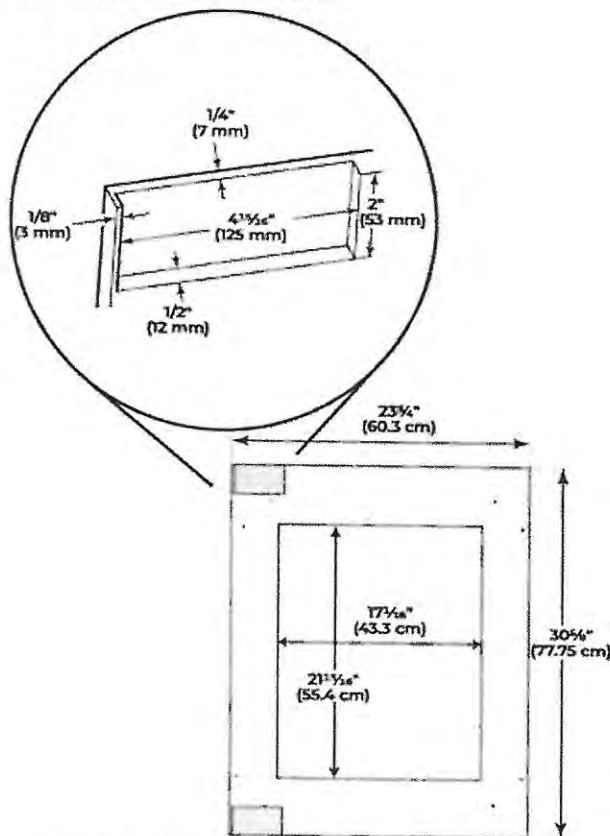

Glass door overlay panel and hinge routing dimensions

Lot 53  
June 1, 2021

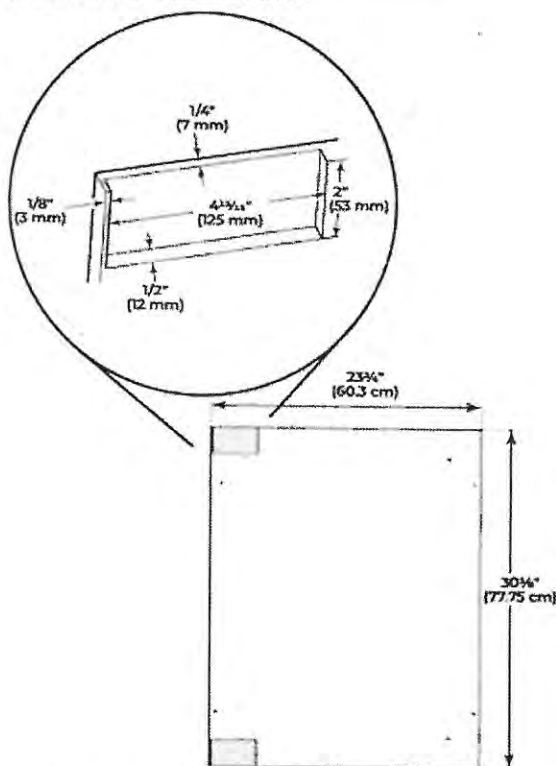

Solid door overlay panel and hinge routing dimensions

## 42" MODELS




**Euro-Style Design**  
Features stainless steel wrapped doors with towel bar handles.  
JS42SSDUDE



**Pro-Style® Design**  
Features stainless steel wrapped doors and Pro-Style® handles with diamond-etched grip.  
JS42PPDUDE

Lot 53  
June 1, 2022  


## 48" MODELS

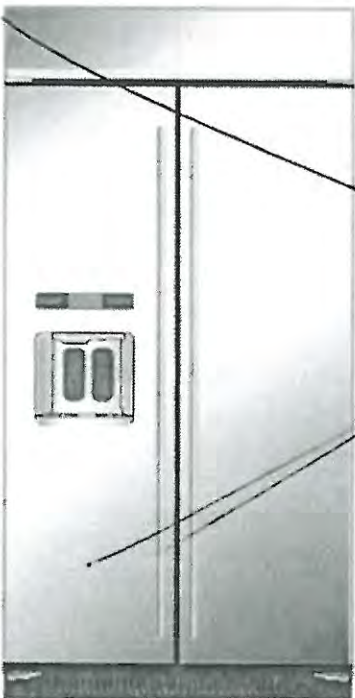


**Euro-Style Design**  
Features stainless steel wrapped doors with towel bar handles.  
JS48SSDUDE



**Pro-Style® Design**  
Features stainless steel wrapped doors and Pro-Style® handles with diamond-etched grip.  
JS48PPDUDE

- The water shutoff should be located in the base cabinet on either side of the refrigerator or some other easily accessible area. If the water shutoff valve is not in the cabinets, the plumbing for the water line can come through the floor or the back wall. See "Water Supply Requirements" for more information.

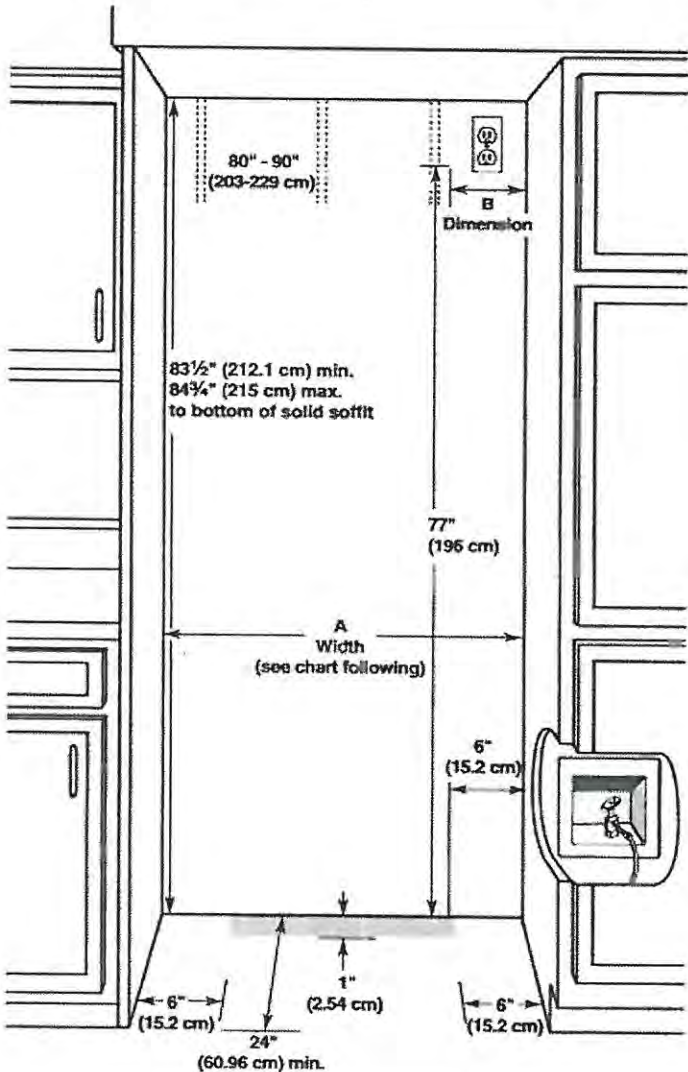

| Model | Width A<br>(as shown above)            | Dimension B<br>(as shown above) |
|-------|----------------------------------------|---------------------------------|
| 42    | 41½" to 41¾"<br>(105.4 cm to 106.1 cm) | 7½"<br>(19.1 cm)                |
| 48    | 47¼" to 47¾"<br>(120.7 cm to 121.3 cm) | 13½"<br>(34.3 cm)               |

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.

Lot 53  
June 1, 2021

*(Handwritten signatures)*

## Electrical Requirements

### ⚠ WARNING



#### Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.
- Do not remove ground prong.
- Do not use an adapter.
- Do not use an extension cord.
- Failure to follow these instructions can result in death, fire, or electrical shock.

Before you move your refrigerator into its final location, it is important to make sure you have the proper electrical connection.

#### Recommended Grounding Method

A 115 volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**IMPORTANT:** If this product is connected to a GFCI (Ground Fault Circuit Interrupter) protected outlet, nuisance tripping of the power supply may occur, resulting in loss of cooling. Food quality and flavor may be affected. If nuisance tripping has occurred, and if the condition of the food appears poor, dispose of it.


**NOTE:** Before performing any type of installation or cleaning, remove the top grille and turn the master power switch to OFF or disconnect power at the circuit breaker box.

When you are finished, turn ON the master power switch or reconnect power at the circuit breaker box. Then reset the control to the desired setting.

## Water Supply Requirements

- All installations must meet local plumbing code requirements.
- The water shutoff should be located in the base cabinet on either side of the refrigerator or some other easily accessible area. The right-hand side is recommended. The access hole through the cabinet must be within ½" (1.3 cm) of the rear wall.

**NOTE:** If the water shutoff valve is in the back wall behind the refrigerator, it must be at an angle so that the tube is not kinked when the refrigerator is pushed into its final location.

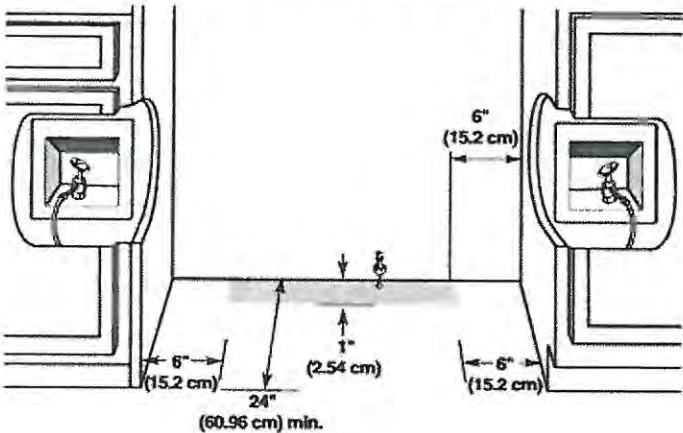

- If the water shutoff valve is not in the cabinets, the plumbing for the water line can come through the floor. A ½" (12.7 mm) hole for plumbing should be drilled at least 6" (15.2 cm) from the right-hand or left-hand side cabinet or panel. On the floor, the hole should be no more than 1" (2.54 cm) away from the back wall. See "Connect the Water Supply."
- If additional tubing is needed, use copper tubing and check for leaks. Install the copper tubing only in areas where the household temperatures will remain above freezing.
- Do not use a piercing-type or ¾" (4.76 mm) saddle valve which reduces water flow and clogs more easily.

**NOTE:** Your refrigerator dealer has a kit available with a ¼" (6.35 mm) saddle-type shutoff valve, a union, and copper tubing. Before purchasing, make sure a saddle-type valve complies with your local plumbing codes.

### Water Pressure

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

### Reverse Osmosis Water Supply

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

If the water pressure to the reverse osmosis system is less than 40 to 60 psi (276 to 414 kPa):

- Check to see whether the sediment filter in the reverse osmosis system is blocked. Replace the filter if necessary.
- Allow the storage tank on the reverse osmosis system to refill after heavy usage.
- If your refrigerator has a water filter cartridge, it may further reduce the water pressure when used in conjunction with a reverse osmosis system. Remove the water filter cartridge.

If you have questions about your water pressure, call a licensed, qualified plumber.

### Tipping Radius

Be sure there is adequate ceiling height to stand the refrigerator upright when it is moved into place.


- The dolly wheel height must be added to the tipping radius when a dolly is used.
- If needed, the tipping radius can be reduced. See "Reduce Tipping Radius."

Lot 53  
June 1, 2021  


### Side Tipping Radius

The side tipping radius varies depending upon the width of the model. Use the chart provided to determine the side tipping radius.

**NOTE:** Tip on side only.

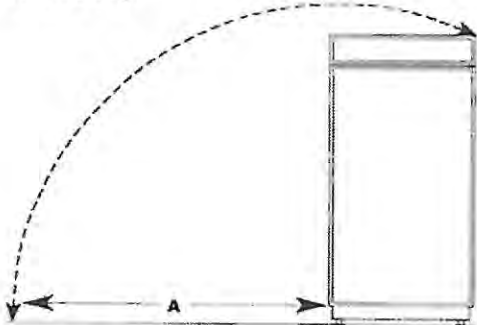


| Model | Tipping Radius A |
|-------|------------------|
| 42    | 93" (236.2 cm)   |
| 48    | 96" (243.8 cm)   |

### Product Dimensions


#### Side View

- The depth from the front of the top grille to the back of the refrigerator cabinet is 25⅞" (64.5 cm).
- The power cord is 84" (213 cm) long.
- The water line attached to the back of the refrigerator is 5 ft (1.5 m) long.
- Height dimensions are shown with leveling legs extended ⅛" (3 mm) below the rollers.

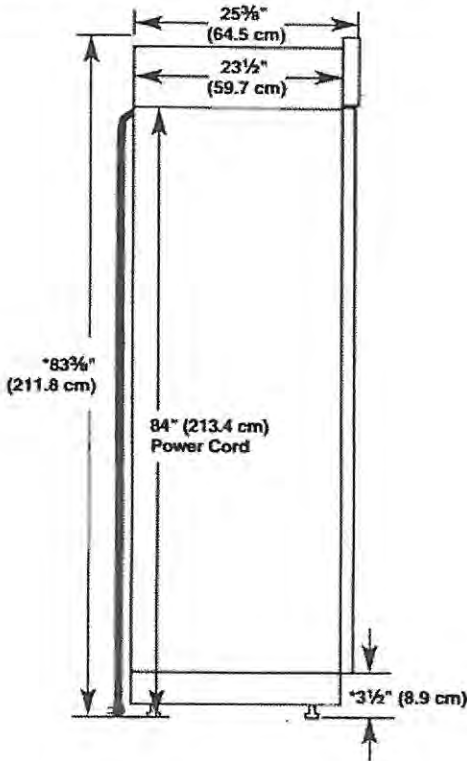

\*When leveling legs are fully extended to 1¼" (3.2 cm) below rollers, add 1⅞" (2.9 cm) to the height dimensions.


## Top View

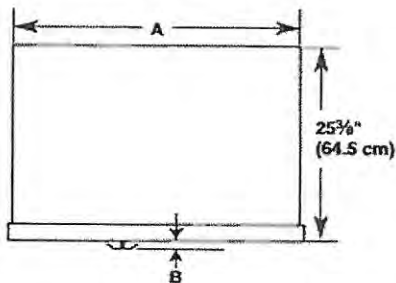

| Model         | A               | B                 |
|---------------|-----------------|-------------------|
| 42 Euro-Style | 41\" (104.1 cm) | 2 1/8\" (5.3 cm)  |
| 48 Euro-Style | 47\" (119.4 cm) | 2 1/4\" (5.3 cm)  |
| 42 Pro-Style* | 41\" (104.1 cm) | 2 5/8\" (6.67 cm) |
| 48 Pro-Style* | 47\" (119.4 cm) | 2 5/8\" (6.67 cm) |

## Front View

- Width dimensions were measured from trim edge to trim edge.
- Height dimensions are shown with leveling legs extended 1/8\" (3 mm) below the rollers.

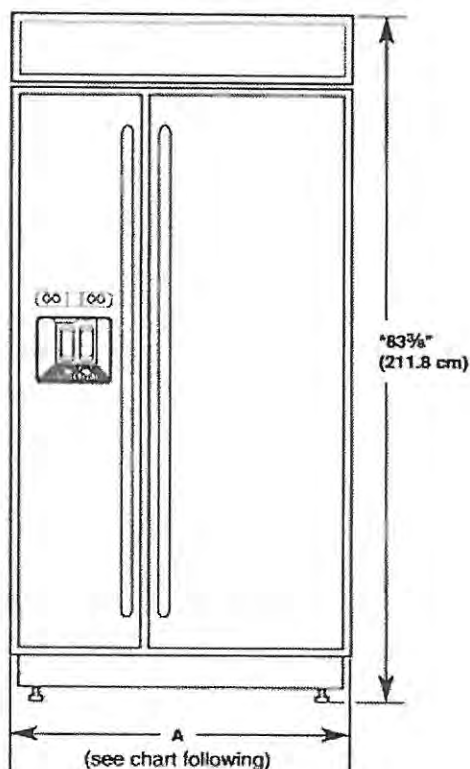

| Model | Width A (Trim edge to trim edge) |
|-------|----------------------------------|
| 42    | 42 1/32\" (107.5 cm)             |
| 48    | 48 1/32\" (122.8 cm)             |


\*When leveling legs are fully extended to 1 1/4\" (3.2 cm) below rollers, add 1 1/8\" (2.9 cm) to the height dimensions.

## Door Swing Dimensions

The location must permit both doors to open to a minimum of 90°. Allow 4 1/2\" (11.4 cm) minimum space between the side of the refrigerator and a corner wall.


**NOTE:** More clearance may be required if you are using overlay panels, custom handles, or extended handles.  
To adjust the door swing, see "Adjust Doors."

## 42" (106.7 cm) Models

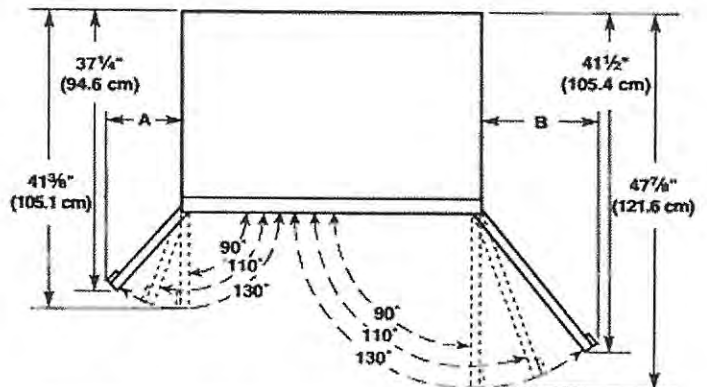

| Model      | A                   | B                   |
|------------|---------------------|---------------------|
| Pro-Style* | 10 3/4\" (27.11 cm) | 14 1/4\" (36.11 cm) |
| Euro       | 10 1/4\" (25.87 cm) | 13 3/4\" (34.88 cm) |

## 48" (121.9 cm) Models

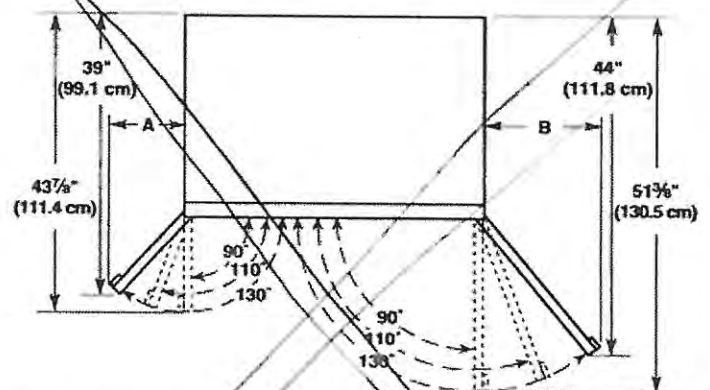

| Model      | A                    | B                     |
|------------|----------------------|-----------------------|
| Pro-Style* | 12 3/16\" (30.84 cm) | 16 7/8\" (41.16 cm)   |
| Euro       | 11 5/8\" (29.43 cm)  | 15 11/16\" (39.75 cm) |

## Custom Side Panels

Custom side panels may be needed when not enough space is available to have cabinets on both sides of the refrigerator or when the refrigerator is placed at the end of a cabinet run.

## Refrigerator and Side Trim Dimensions

The width and height of a side panel are determined by the type of installation you are planning.


### NOTES:

- The dimensions shown are actual product dimensions and may not reflect the needed panel installation dimensions.
- The side panel should be a minimum of 1/2\" (1.27 cm) thick to avoid warping.
- If the opening depth is 25\" (63.5 cm) or more, you may want to install a support board on rear wall.

8 Lot 53 June 9, 2021


2 X

## Side Trim

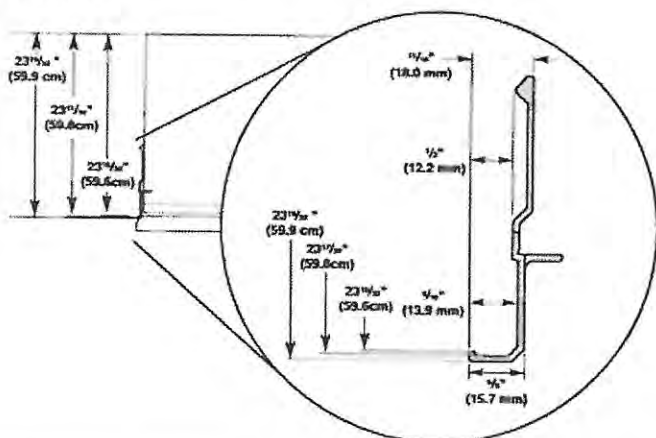


### Installation Dimensions (Option 1)

1. Measure the distance from point A (as shown) to the back wall. Add  $\frac{1}{16}$ " (1.6 mm) to this measurement to allow the side panel to fit into the trim.
2. If the panel is more than  $\frac{1}{32}$ " (8.7 mm) thick, route the front edge to allow the side panel to fit into the trim.



### Installation Dimensions (Option 2)

1. Measure the distance from point A (as shown) to back wall.
2. Route the front edge of the support board or attach a  $\frac{3}{8}$ " (9.5 mm) board to hold the panel in the cabinet side trim.

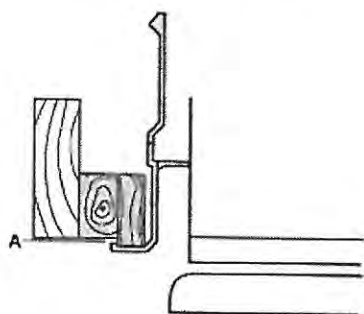

## INSTALLATION INSTRUCTIONS

### Unpack the Refrigerator

#### ⚠ WARNING



#### Tip Over Hazard

Refrigerator is top heavy and tips easily when not completely installed.

Keep doors taped closed until refrigerator is completely installed.

Use two or more people to move and install refrigerator.

Failure to do so can result in death or serious injury.

#### IMPORTANT:

- Do not remove the film covering until the refrigerator is in its operating location.
  - All four leveling legs must contact the floor to support and stabilize the full weight of the refrigerator.
  - Keep the cardboard shipping piece or plywood under the refrigerator until it is installed in the operating location.
1. Remove and save the literature package bag taped to the side of the refrigerator and the parts bag behind the grille. Remove the four brackets (two on each side) that attach the shipping base to the refrigerator bottom.  
**NOTE:** Do not remove tape and door bracing until the refrigerator is in its final location.
  2. If necessary, reduce the tipping radius. See "Tipping Radius" for ceiling height requirements or "Reduce Tipping Radius" for step-by-step instructions. If you do not need to reduce the tipping radius, proceed to "Move the Refrigerator into House."

Lot 53

June 3, 2021


 

DIMENSIONS

JENNAIR® RANGETOPS

PRODUCT

|                                       | 30" RANGETOP<br>JGCP430H | 36" RANGETOP<br>JGCP436H | 48" RANGETOP<br>JGCP548H |
|---------------------------------------|--------------------------|--------------------------|--------------------------|
| Overall Width (A)                     | 29-3/4" (75.6 cm)        | 35-3/4" (90.8 cm)        | 47-7/8" (121.6 cm)       |
| Grate Depth (B)                       | 22" (55.9 cm)            | 22" (55.9 cm)            | 22" (55.9 cm)            |
| Depth without Control Panel (C)       | 23-1/4" (59.1 cm)        | 23-1/4" (59.1 cm)        | 23-1/4" (59.1 cm)        |
| Depth with Control Panel Overhang (D) | 27-1/2" (69.9 cm)        | 27-1/2" (69.9 cm)        | 27-1/2" (69.9 cm)        |
| Depth with Knobs: RISE™ (E)           | 29-1/8" (74 cm)          | 29-1/8" (74 cm)          | 29-1/8" (74 cm)          |
| Depth with Knobs: NOIR™ (E)           | 29" (73.7 cm)            | 29" (73.7 cm)            | 29" (73.7 cm)            |

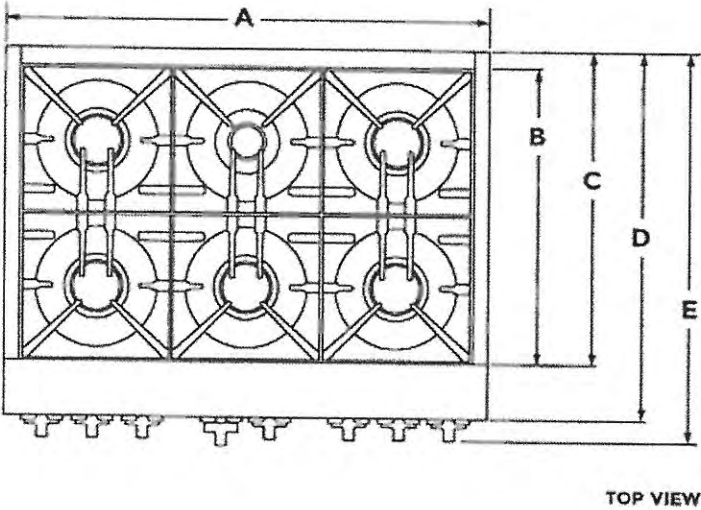

TOP VIEW

Lot 53  
June 1, 2021  
Angelica C  
Alberto R  
48"



**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.



DIMENSIONS

JENNAIR® RANGETOPS

PRODUCT

|                             | 30" RANGETOP<br>JGCP430H | 36" RANGETOP<br>JGCP436H | 48" RANGETOP<br>JGCP548H |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| Grate Width (F)*            | 27-7/16" (69.7 cm)       | 33" (83.8 cm)            | 44-3/8" (112.7 cm)       |
| Gas Inlet to Surface (G)    | 10-3/4" (27.3 cm)        | 10-3/4" (27.3 cm)        | 10-3/4" (27.3 cm)        |
| Center to Gas Inlet (H)     | 11" (27.9 cm)            | 14-1/8" (35.9 cm)        | 19-5/8" (49.8 cm)        |
| Recessed Rangetop Width (I) | 29-7/8" (74 cm)          | 36" (88.9 cm)            | 47-1/4" (120 cm)         |

\*Includes width of grates and griddle.

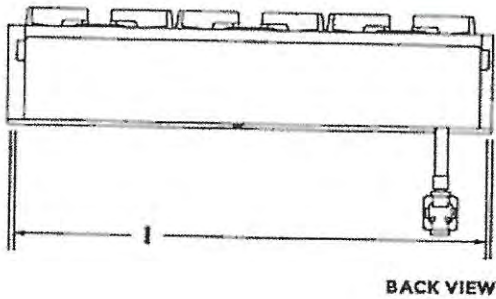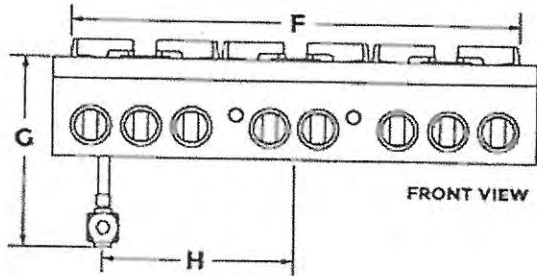

Lot 53

June 1, 2021


# DIMENSIONS

## JENNAIR® RANGETOPS

### PRODUCT

|                              | 30" RANGETOP<br>JGCP430H      | 36" RANGETOP<br>JGCP436H      | 48" RANGETOP<br>JGCP548H |
|------------------------------|-------------------------------|-------------------------------|--------------------------|
| Height with Grates (J)       | <del>9" (22.9 cm)</del>       | <del>9" (22.9 cm)</del>       | 9" (22.9 cm)             |
| Control Panel Height (K)     | <del>7-13/16" (19.8 cm)</del> | <del>7-13/16" (19.8 cm)</del> | 7-13/16" (19.8 cm)       |
| Recessed Rangetop Height (L) | <del>7" (17.8 cm)</del>       | <del>7" (17.8 cm)</del>       | 7" (17.8 cm)             |
| Cooking Surface Height (M)   | <del>7-7/16" (18.9 cm)</del>  | <del>7-7/16" (18.9 cm)</del>  | 7-7/16" (18.9 cm)        |
| Recessed Rangetop Depth (N)  | <del>21-7/8" (55.6 cm)</del>  | <del>21-7/8" (55.6 cm)</del>  | 21-7/8" (55.6 cm)        |
| Depth with Control Panel (O) | <del>25-1/2" (64.8 cm)</del>  | <del>25-1/2" (64.8 cm)</del>  | 25-1/2" (64.8 cm)        |

Lot 53  
June 1, 2024

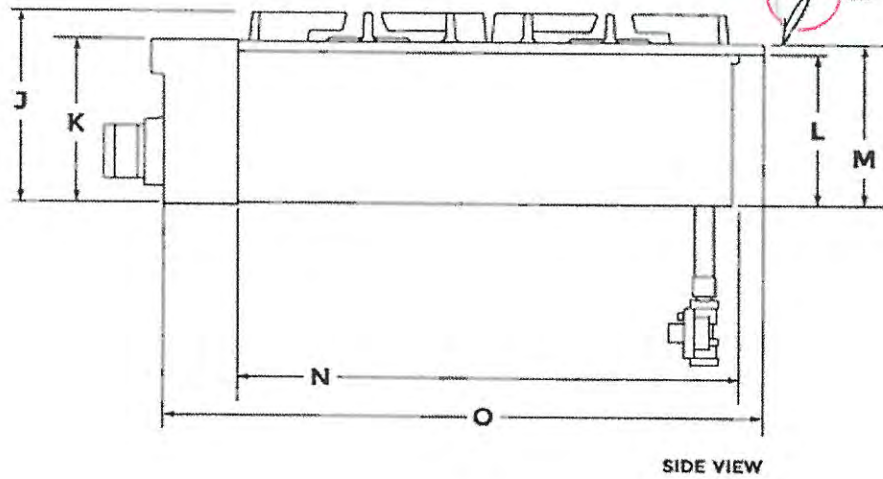

★ IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.


# DIMENSIONS

## JENNAIR® RANGETOPS

### OPENING AND CLEARANCE

|                                                     | 30" RANGETOP<br>JGCP430H       | 36" RANGETOP<br>JGCP436H       | 48" RANGETOP<br>JGCP548H |
|-----------------------------------------------------|--------------------------------|--------------------------------|--------------------------|
| Combustible Area Above Cooking Surface Width (A)    | <del>30" (76.2 cm) min.</del>  | <del>36" (91.4 cm) min.</del>  | 48" (121.9 cm) min.      |
| Bottom of Cabinet Height Above Cooking Surface (B)* | <del>42" (106.7 cm) min.</del> | <del>58" (147.3 cm) min.</del> | 58" (147.3 cm) min.      |
| Bottom of Cabinet Height Above Countertop (C)       | <del>18" (45.7 cm) min.</del>  | <del>18" (45.7 cm) min.</del>  | 18" (45.7 cm) min.       |
| Distance to Fixed Wall or Combustible Material (D)  | <del>12" (30.5 cm) min.</del>  | <del>12" (30.5 cm) min.</del>  | 12" (30.5 cm) min.       |

\*Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

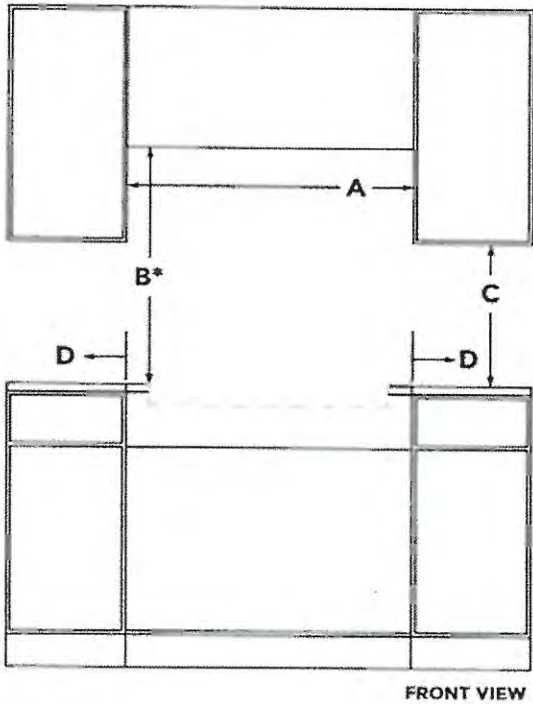

Lot 53  
June 1, 2021

# DIMENSIONS

## JENNAIR® RANGETOPS


### OPENING AND CLEARANCE

|                                     | 30" RANGETOP<br>JGCP430H    | 36" RANGETOP<br>JGCP436H    | 48" RANGETOP<br>JGCP548H |
|-------------------------------------|-----------------------------|-----------------------------|--------------------------|
| Recommended Upper Cabinet Depth (E) | <del>13" (33 cm)</del>      | <del>13" (33 cm)</del>      | 13" (33 cm)              |
| Cutout to Wall Depth (F)*           | 1-1/2" (3.8 cm) min.        | 1-1/2" (3.8 cm) min.        | 1-1/2" (3.8 cm) min.     |
| Cabinet to Countertop Height (G)    | <del>7-1/4" (18.4 cm)</del> | <del>7-1/4" (18.4 cm)</del> | 7-1/4" (18.4 cm)         |
| Cabinet Depth (H)                   | <del>24" (61 cm)</del>      | <del>24" (61 cm)</del>      | 24" (61 cm)              |

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

*[Handwritten signature]*

Lot 53  
June 1, 2021

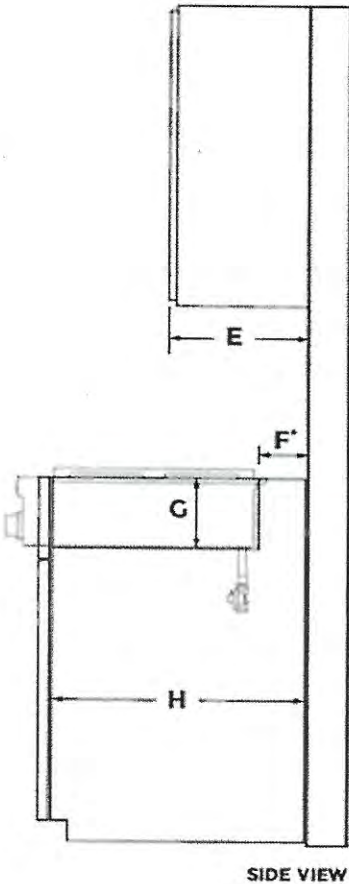


# DIMENSIONS

## JENNAIR® RANGETOPS

### OPENING AND CLEARANCE

|                                            | 30" RANGETOP<br>JGCP430H     | 36" RANGETOP<br>JGCP436H     | 48" RANGETOP<br>JGCP548H |
|--------------------------------------------|------------------------------|------------------------------|--------------------------|
| Countertop and Cabinet<br>Cutout Width (I) | <del>29-1/4" (74.3 cm)</del> | <del>35-1/4" (89.5 cm)</del> | 47-3/8" (120.3 cm)       |
| Countertop and Cutout Depth (J)            | <del>22-1/4" (56.5 cm)</del> | <del>22-1/4" (56.5 cm)</del> | 22-1/4" (56.5 cm)        |
| Notch Width (K)                            | <del>5/16" (0.8 cm)</del>    | <del>5/16" (0.8 cm)</del>    | 5/16" (0.8 cm)           |
| Cutout Width (L)                           | <del>29-7/8" (75.9 cm)</del> | <del>35-3/4" (90.8 cm)</del> | 47-7/8" (121.6 cm)       |

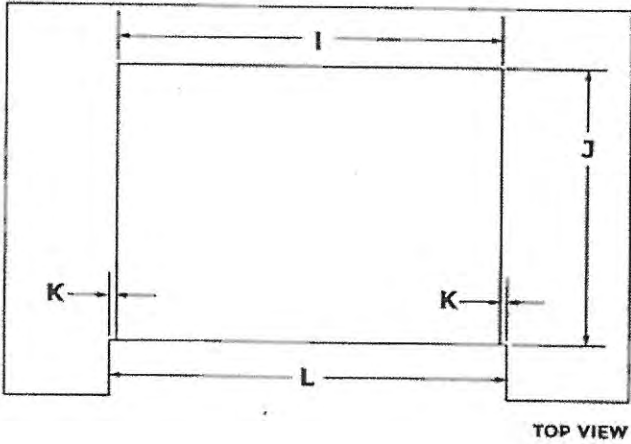


  
 Lot 53  
 June 1, 2021

**DIMENSIONS**  
**JENNAIR® RANGETOPS**  
ELECTRICAL REQUIREMENTS


**ELECTRIC REQUIREMENTS CHECKLIST**

☐

A 120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

☐

A dedicated circuit is recommended.

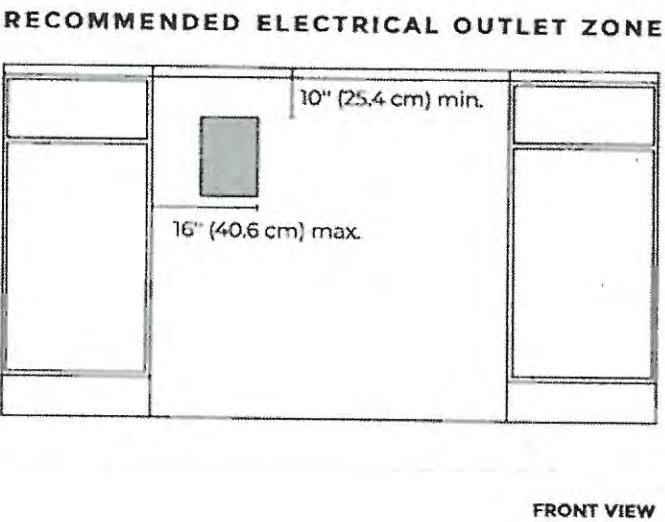


Lot 53  
June 1, 2021  




IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY,  
CALL A LICENSED, QUALIFIED ELECTRICIAN.

**DIMENSIONS**  
**JENNAIR® RANGETOPS**  
**GAS REQUIREMENTS**


**RECOMMENDED GAS SUPPLY LOCATION**

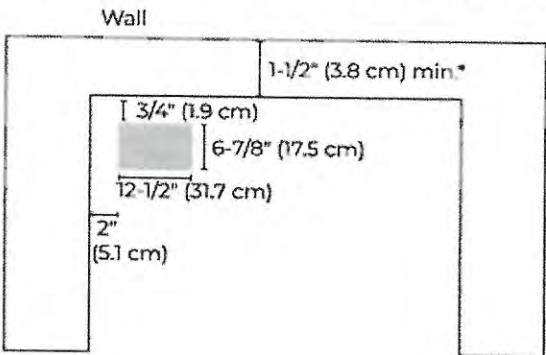

**TOP VIEW**

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

**GAS SUPPLY ZONE**

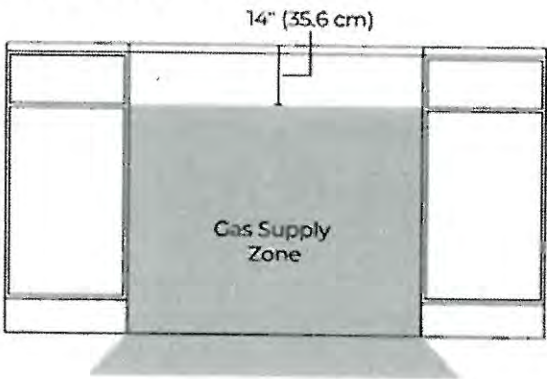


**FRONT VIEW**


Lot 53  
June 1, 2021

**? IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.**


# ELICA PRO SERIES AREZZO

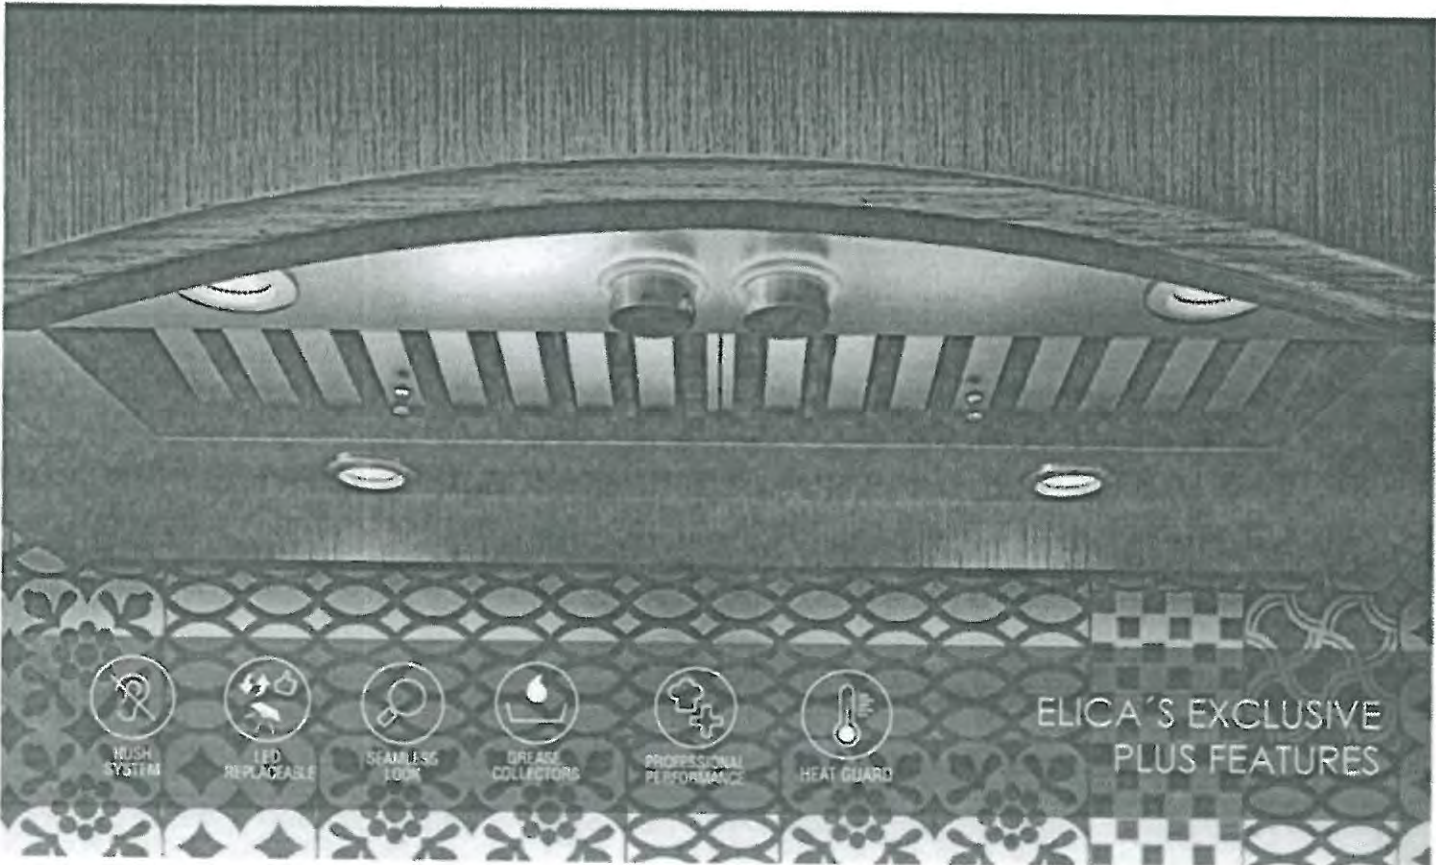

Arezzo provides professional grade performance, while being discreetly mounted inside the cabinetry. Available in 28 1/2" width with a 600 CFM blower, and equipped with a 1200 CFM blower for widths of 34 1/2", 40 1/2" and 46 1/2" for extraordinary ventilating power. The extra depth (22") is ideal for supporting powerful professional ranges. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting.

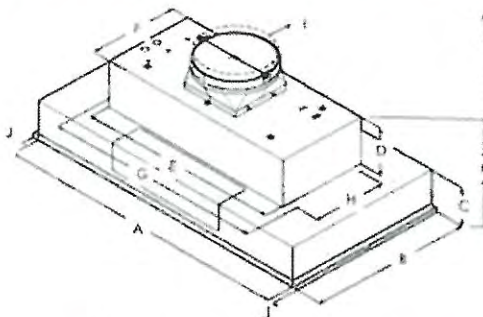

Lot 53  
June 1,  
2021

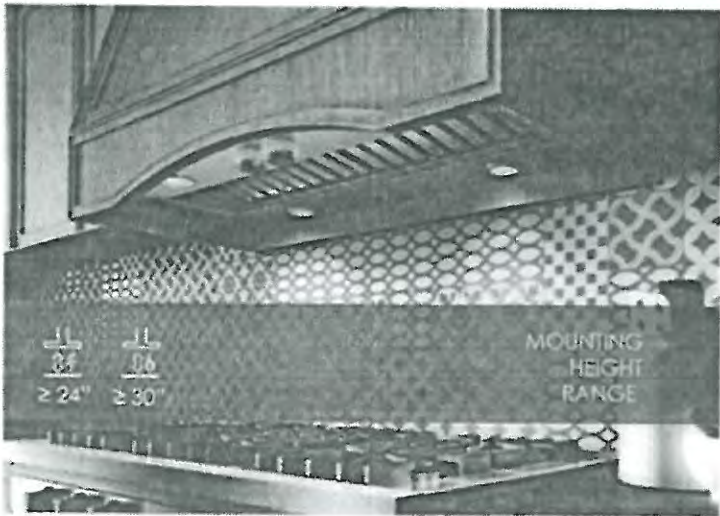

|   | <del>EAR628S3<br/>EAR628S4</del> | <del>EAR134S3<br/>EAR134S4</del> | <del>EAR140S3<br/>EAR140S4</del> | <del>EAR146S3<br/>EAR146S4</del> |
|---|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| A | <del>28 1/2" (72.4 cm)</del>     | <del>34 1/2" (87.6 cm)</del>     | <del>40 1/2" (103 cm)</del>      | 46 1/2" (118 cm)                 |
| B | <del>22" (55.9 cm)</del>         | <del>22" (55.9 cm)</del>         |                                  | 22" (55.9 cm)                    |
| C |                                  |                                  | 5 7/8" (13.8 cm)                 |                                  |
| D |                                  |                                  | 6 1/2" (16.4 cm)                 |                                  |
| E |                                  |                                  | 27 9/16" (70 cm)                 |                                  |
| F |                                  |                                  | 12 1/16" (31.6 cm)               |                                  |
| G |                                  |                                  | 29 13/16" (75.7 cm)              |                                  |
| H |                                  |                                  | 10 1/8" (25.7 cm)                |                                  |
| I |                                  |                                  | 10" (25.4 cm)                    |                                  |
| J |                                  |                                  | 3/4" (1.9 cm)                    |                                  |
| K |                                  |                                  | 12" (30.4 cm)                    |                                  |

# ELICA PRO SERIES AREZZO



## SPECIFICATIONS

|                                 | 28" Unit                                                | 34" Unit                                   | 40" Unit                                   | 46" Unit                      |
|---------------------------------|---------------------------------------------------------|--------------------------------------------|--------------------------------------------|-------------------------------|
| Model:                          | <del>EAR628S3</del><br><del>EAR628S4</del>              | <del>EAR134S3</del><br><del>EAR134S4</del> | <del>EAR140S3</del><br><del>EAR140S4</del> | EAR146S3<br>EAR146S4          |
| Dimensions:                     | <del>28 1/2" W x 22" D x 11 1/2" H</del>                | <del>34 1/2" W x 22" D x 11 1/2" H</del>   | <del>40 1/2" W x 22" D x 11 1/2" H</del>   | 46 1/2" W x 22" D x 11 1/2" H |
| Blower Type(internal):          | <del>600 CFM (4-speed)</del>                            | <del>1200 CFM (4-speed)</del>              | <del>1200 CFM (4-speed)</del>              | 1200 CFM (4-speed)            |
| Blower Performance:             |                                                         |                                            |                                            |                               |
| Speed 1                         | <del>90 CFM</del>                                       | <del>380 CFM</del>                         | <del>380 CFM</del>                         | 380 CFM                       |
| Speed 2                         | <del>380 CFM</del>                                      | <del>660 CFM</del>                         | <del>660 CFM</del>                         | 660 CFM                       |
| Speed 3                         | <del>490 CFM</del>                                      | <del>950 CFM</del>                         | <del>950 CFM</del>                         | 950 CFM                       |
| Speed 4                         | <del>600 CFM</del>                                      | <del>1200 CFM</del>                        | <del>1200 CFM</del>                        | 1200 CFM                      |
| Noise (sones):                  | <del>Min:2, Max:9.6</del>                               | <del>Min:2.05, Max:7.5</del>               | <del>Min:2.05, Max:7.5</del>               | Min:2.05, Max:7.5             |
| Working Speed                   |                                                         |                                            |                                            |                               |
| Finish:                         | Stainless Steel                                         |                                            |                                            |                               |
| Controls:                       | Fully retractable rotating knobs with blue backlighting |                                            |                                            |                               |
| Illumination:                   | <del>2 LED, 7.5 Watts</del>                             | <del>2 LED, 7.5 Watts</del>                | <del>4 LED, 7.5 Watts</del>                | 4 LED, 7.5 Watts              |
| (replaceable lamps 1 intensity) |                                                         |                                            |                                            |                               |
| Filter Type:                    | Dishwasher-Safe, Professional Stainless Steel           |                                            |                                            |                               |
| Angled Baffle Filters:          |                                                         |                                            |                                            |                               |
| Duct Transition:                | 10" Round with BackDraft Damper (top only)              |                                            |                                            |                               |
| Installation Type:              | Ducted Installation Only                                |                                            |                                            |                               |
| Electrical:                     | 120V - 60 Hz                                            |                                            |                                            |                               |
| CONSUMABLE PARTS:               |                                                         |                                            |                                            |                               |
| Replacement Grease Filter (1):  | <del>GF09EA</del>                                       | <del>GF09GA</del>                          | <del>GF09FA</del>                          | GF09EA                        |

\*Consumable parts are sold in units of one (1). Order accordingly

## PLUS FEATURES

- HUSH SYSTEM** - An exclusive sound deadening technology that effectively reduces sound levels by over 35%
- LED CONSUMER REPLACEABLE BULB** - High quality LED lighting usually requires a skilled technician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds
- SEAMLESS CRAFTSMANSHIP** - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance.
- STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS** - Designed for high airflow cooking, the "S" shape design traps high volumes of grease
- PROFESSIONAL PERFORMANCE** - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's
- HEAT GUARD** - Senses extreme temperatures (>158 degrees) and automatically adjusts the blower speed to HIGH

Lot 53  
June 1, 2021





## INSTALLATION INSTRUCTIONS

27" (68.6 CM), ~~AND 30" (76.2 CM)~~ INDOOR/OUTDOOR  
ELECTRIC WARMING DRAWER

## INSTRUCTIONS D'INSTALLATION

TIROIR-RÉCHAUD ÉLECTRIQUE POUR USAGE INTÉRIEUR/  
EXTÉRIEUR DE 27" (68,6 CM), ET 30" (76,2 CM)

### Table of Contents/Table des matières

|                                                      |          |                                                                  |           |
|------------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>WARMING DRAWER SAFETY.....</b>                    | <b>2</b> | <b>SÉCURITÉ DU TIROIR-RÉCHAUD.....</b>                           | <b>9</b>  |
| <b>INSTALLATION REQUIREMENTS.....</b>                | <b>3</b> | <b>EXIGENCES D'INSTALLATION.....</b>                             | <b>10</b> |
| Tools and Parts.....                                 | 3        | Outils et pièces.....                                            | 10        |
| Location Requirements.....                           | 3        | Exigences d'emplacement.....                                     | 10        |
| Electrical Requirements.....                         | 6        | Electrical Requirements.....                                     | 13        |
| <b>INSTALLATION INSTRUCTIONS.....</b>                | <b>6</b> | <b>INSTRUCTIONS D'INSTALLATION.....</b>                          | <b>13</b> |
| Install Warming Drawer.....                          | 6        | Installation du tiroir-réchaud.....                              | 13        |
| Complete Installation.....                           | 7        | Achever l'installation.....                                      | 14        |
| <b>CUSTOM DRAWER FRONT INSTALLATION INSTRUCTIONS</b> |          | <b>INSTRUCTIONS D'INSTALLATION DE LA FAÇADE DU TIROIR</b>        |           |
| <b>FOR WARMING DRAWERS.....</b>                      | <b>7</b> | <b>PERSONNALISÉ POUR TIROIR-RÉCHAUD.....</b>                     | <b>14</b> |
| Tools and Parts.....                                 | 7        | Outils et pièces.....                                            | 14        |
| Install Custom Drawer Front Panel.....               | 7        | Installation du panneau de la façade du tiroir personnalisé..... | 14        |

Lot 53

June 1, 2021

Angelica C. 

Alberto R. 

27"

#### IMPORTANT:

Save for local electrical inspector's use.

#### IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

W11295554A

# INSTALLATION REQUIREMENTS

## Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

### Tools Needed

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level
- Drill
- 1<sup>3</sup>/<sub>8</sub>" (3.5 cm) hole saw

### Parts Supplied

- Two #8-18 x 1/2" (1.3 cm) screws
- Lens (for panel ready models)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

## Location Requirements


**IMPORTANT:** Observe all governing codes and ordinances.

- Cutout dimensions that are shown must be used. Given dimensions provide minimum clearance with warming drawer.
- Recessed installation area must provide complete enclosure around the recessed portion of the warming drawer.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply outlet should be located in the rear wall on the upper right-hand side of the cutout or in an adjacent cabinet. The outlet must be recessed. If the electrical outlet is located in an adjacent cabinet, a 1<sup>3</sup>/<sub>8</sub>" (3.5 cm) minimum diameter hole should have been drilled in the back of the cutout or support surface to pass the power supply cord through to the outlet.
- Warming drawer support surface must be solid, level, and flush with bottom of cabinet cutout.
- Warming drawers with oiled bronze, black glass, and white glass panels are approved for indoor use only.
- Support surface must be solid, level, and flush with the bottom of the cabinet cutout.
- 24" (61.0 cm) minimum cabinet depth.

For best performance results make sure the warming drawer is leveled before completing installation. There is no way to level the warming drawer after it has been installed. If the installation is not level, the door may slide open or not seal tightly, allowing heat to escape.

**NOTE:** If installing the warming drawer below another product, refer to that product's literature for any installation requirements.

## Product Dimensions

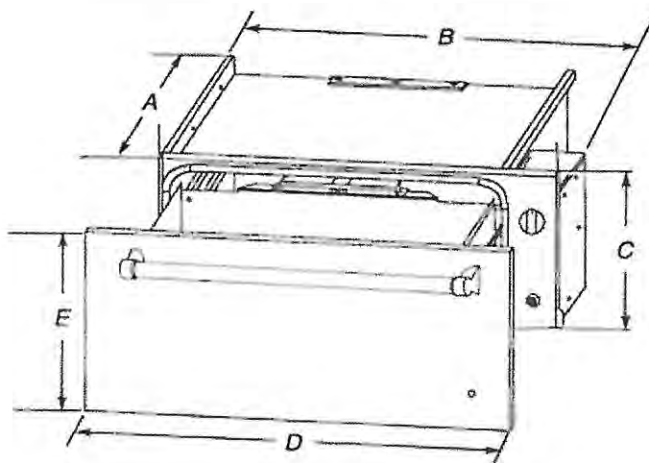


| WARMING<br>DRAWER SIZE | OVEN DEPTH<br>(A)                          | RECESSED<br>WIDTH (B)                      | RECESSED<br>HEIGHT (C) | OVERALL<br>WIDTH (D)                       | DRAWER<br>FRONT HEIGHT<br>(E)              |
|------------------------|--------------------------------------------|--------------------------------------------|------------------------|--------------------------------------------|--------------------------------------------|
| 27" (68.6 cm)          | 23 <sup>1</sup> / <sub>8</sub> " (58.7 cm) | 25 <sup>1</sup> / <sub>4</sub> " (64.1 cm) | 9" (22.9 cm)           | 26 <sup>3</sup> / <sub>4</sub> " (67.9 cm) | 10 <sup>1</sup> / <sub>4</sub> " (26.1 cm) |
| 30" (76.2 cm)          | 23 <sup>1</sup> / <sub>8</sub> " (58.7 cm) | 28 <sup>1</sup> / <sub>4</sub> " (71.8 cm) | 9" (22.9 cm)           | 29 <sup>3</sup> / <sub>4</sub> " (75.6 cm) | 10 <sup>1</sup> / <sub>4</sub> " (26.1 cm) |

Lot 53

June 1, 2021

Clearance Dimensions

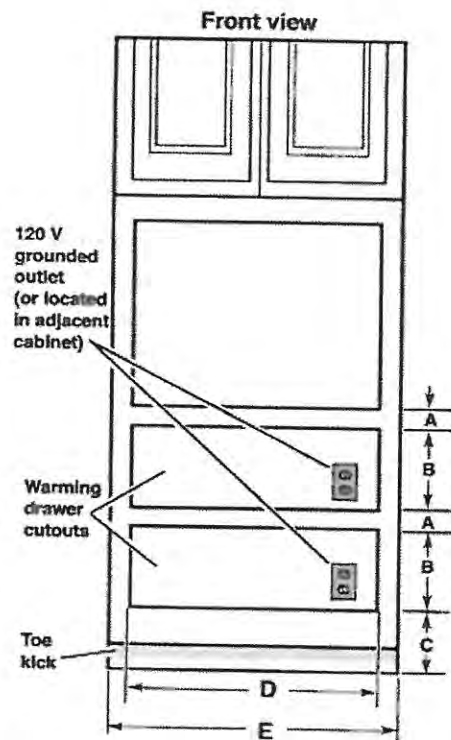

| WARMING DRAWER SIZE      | MINIMUM BETWEEN CUTOUTS (A) | CUTOUT HEIGHT (B)        | MINIMUM/RECOMMENDED (C)                   | CUTOUT WIDTH (D)          | MINIMUM CABINET WIDTH (E) |
|--------------------------|-----------------------------|--------------------------|-------------------------------------------|---------------------------|---------------------------|
| 27" (68.6 cm)            | 2½" (6.4 cm)                | 9⅞" (23.2 cm)            | 1" (2.5 cm)/<br>4¼" (10.8 cm)             | 25½" (64.8 cm)            | 27" (68.6 cm)             |
| <del>30" (76.2 cm)</del> | <del>2½" (6.4 cm)</del>     | <del>9⅞" (23.2 cm)</del> | <del>1" (2.5 cm)/<br/>4¼" (10.8 cm)</del> | <del>28½" (72.4 cm)</del> | <del>30" (76.2 cm)</del>  |

Warming drawer can be installed as an indoor single or double installation or installed under a single oven. Two warming drawers under a single oven are shown.

**NOTE:** The warming drawer cannot be leveled after being installed.


For outdoor installation, follow the cutout dimensions above. Install the outdoor warming drawer in a permanent fixture.

**Custom Wood Drawer Front**

If you plan to install a custom wood panel to match your cabinets, we recommend consulting a qualified cabinetmaker or carpenter. The back of the wood panel must be sealed to avoid moisture damage.

lot 53  
June 1, 2021

Clearance Dimensions - Flush Installation

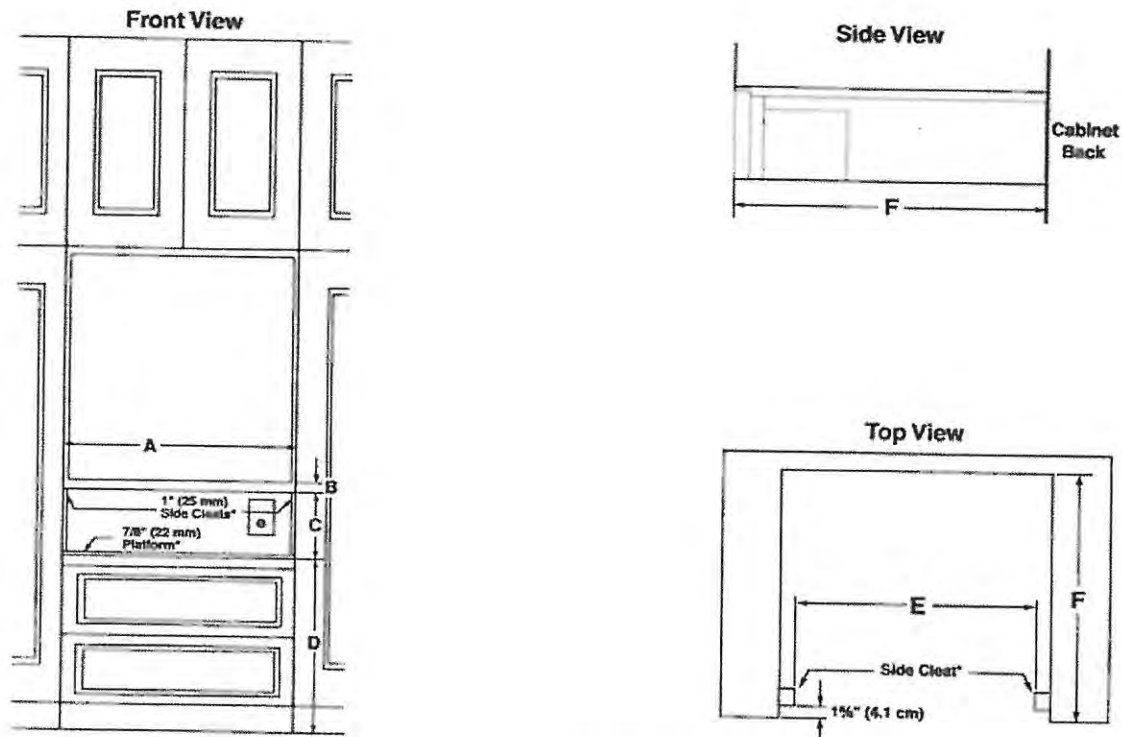


|                                           | 27" (68.6 cm)<br>Models | <del>30" (76.2 cm)<br/>Models</del> |
|-------------------------------------------|-------------------------|-------------------------------------|
| A Width of flush inset cutout (minimum)   | 27 1/4" (69.2 cm)       | <del>30 1/4" (76.8 cm)</del>        |
| B Height between cutouts (minimum)        | 2 1/2" (6.4 cm)         | <del>2 1/2" (6.4 cm)</del>          |
| C Height of flush inset cutout (minimum)  | 10 3/4" (27.3 cm)       | <del>10 3/4" (27.3 cm)</del>        |
| D Bottom of cutout to floor (recommended) | 8 1/4" (21.0 cm)        | <del>8 1/4" (21.0 cm)</del>         |
| Bottom of cutout to floor (minimum)       | 5" (12.7 cm)            | <del>5" (12.7 cm)</del>             |
| E Width of opening (minimum)              | 25 1/4" (64.1 cm)       | <del>28 1/4" (71.8 cm)</del>        |
| F Depth of cutout (minimum)               | 25" (63.5 cm)           | <del>25" (63.5 cm)</del>            |
| e Recommended outlet location             |                         |                                     |

Flush Installation Requirements

A 25" (63.5 cm) minimum cutout depth is required.  
These dimensions will result in a 1/4" (6 mm) reveal on all sides of the warming drawer.  
\* The front face of the cleats and platforms will be visible and should be treated as a finished surface.

Lot 53  
June 1, 2021  
[Signature]

- Use the two #8-18 x 1/2" (1.3 cm) screws provided to secure the warming drawer frame to the cabinet.

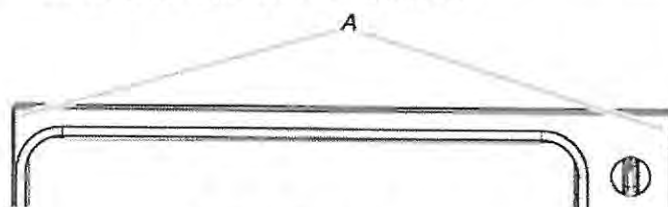

A. Two #8-18 x 1/2" (1.3 cm) screws

## Complete Installation

- Check that all parts are now installed. If there is an extra part, go back through the steps to see which step was skipped.
- Check that you have all of your tools.
- Dispose of/recycle all packaging materials.
- For warming drawer use and cleaning, read the Use and Care Guide.
- Push in and turn the control knob to HI, and the light should illuminate.

### If warming drawer(s) does not operate, check the following:

- Household fuse is intact and tight, or circuit breaker has not tripped.
- Warming drawer is plugged in, and electrical supply is connected.

### If you need Assistance or Service:

Please reference the "Warranty".

# CUSTOM DRAWER FRONT INSTALLATION INSTRUCTIONS FOR WARMING DRAWERS

## Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

### Tools Needed

- Phillips screwdriver
- Drill and appropriate bits

### Parts Supplied

- #8-18 x 1/2" (1.3 cm) screws (6)
- Indicator light lens


### Parts Needed

- Custom drawer front
- Custom handle (optional)
- Adhesive recommended for plastic to wood

## Install Custom Drawer Front Panel

The warming drawer has an interface that will allow a modest range of panel sizes. The actual panel size should be selected by the customer and the contractor to suit the desired effect. It is recommended that a qualified carpenter make and install the custom drawer front and handle(s) to match surrounding cabinetry.

- Install warming drawer unit as instructed by the Installation Instructions provided with the warming drawer.
- Create the custom drawer front. Below are the minimum and maximum dimensions for the custom drawer front. The size of the custom drawer front for the warming drawer will vary according to the specific installation. The depth of the panel will vary in order to have the custom warming drawer flush with the surrounding cabinets.

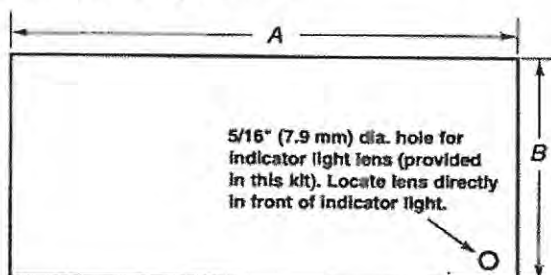


| Model                                   | A - MAX                                           | B - MAX                                            | A - MIN                  | B - MIN                                           |
|-----------------------------------------|---------------------------------------------------|----------------------------------------------------|--------------------------|---------------------------------------------------|
| 27" (68.6 cm) Warming Drawer            | 26 <sup>3</sup> / <sub>4</sub> " (67.9 cm)        | 10 <sup>5</sup> / <sub>16</sub> " (26.2 cm)        | 26" (66.1 cm)            | 9 <sup>1</sup> / <sub>16</sub> " (23.0 cm)        |
| <del>30" (76.2 cm) Warming Drawer</del> | <del>29<sup>3</sup>/<sub>4</sub>" (75.6 cm)</del> | <del>10<sup>5</sup>/<sub>16</sub>" (26.2 cm)</del> | <del>29" (73.7 cm)</del> | <del>9<sup>1</sup>/<sub>16</sub>" (23.0 cm)</del> |

Lot 53  
June 1, 2021

3. It is recommended that if a wood or porous custom drawer front is installed, a high-quality spray polyurethane finish be applied to the inner wood surface.
4. For the lens, drill a 5/16" (7.9 mm) diameter hole through the appearance side of the custom drawer front. This hole will allow the "ON" Indicator Light to be visible through the custom drawer front. To secure the lens, use an adhesive specified for plastic-to-wood application.
5. Install custom handle (not supplied) through custom drawer front.

6. The custom drawer front is fastened to the stainless steel drawer by driving 6 screws through clearance holes in the drawer front into the wooden or other custom made panel.

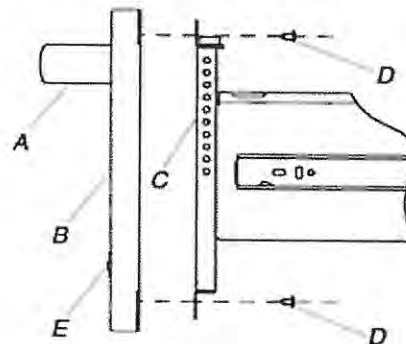

- A. Optional handle
- B. Custom door panel
- C. Warming drawer front
- D. #8-18 x 3/4" (1.9 cm) screws (6)
- E. Lens

Lot 53

June 1, 2021





# INSTALLATION INSTRUCTIONS

## 27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC BUILT-IN CONVECTION MICROWAVE OVEN

# INSTRUCTIONS D'INSTALLATION

## FOUR À MICRO-ONDES ENCASTRÉ ÉLECTRIQUE À CONVECTION DE 27" (68,6 CM) ET 30" (76,2 CM)

### Table of Contents/Table des matières

|                                 |   |
|---------------------------------|---|
| BUILT-IN MICROWAVE OVEN SAFETY  | 2 |
| INSTALLATION REQUIREMENTS       | 3 |
| Tools and Parts                 | 3 |
| Location Requirements           | 3 |
| Electrical Requirements         | 4 |
| INSTALLATION INSTRUCTIONS       | 5 |
| Spacer Kit Installation         | 5 |
| Prepare Built-In Microwave Oven | 5 |
| Make Electrical Connection      | 6 |
| Install Microwave Oven          | 6 |
| Complete Installation           | 7 |

|                                            |    |
|--------------------------------------------|----|
| SÉCURITÉ DU FOUR À MICRO-ONDES ENCASTRÉ    | 8  |
| EXIGENCES D'INSTALLATION                   | 8  |
| Outils et pièces                           | 8  |
| Exigences d'emplacement                    | 8  |
| Spécifications électriques                 | 10 |
| INSTRUCTIONS D'INSTALLATION                | 11 |
| Installation de la trousse d'entretoise    | 11 |
| Préparation du four à micro-ondes encastré | 11 |
| Raccordement électrique                    | 11 |
| Installation du four à micro-ondes         | 12 |
| Achever l'installation                     | 13 |

Lot 53

June 1, 2021

Angelica C.

Albarto D.

27"

IMPORTANT:

For local electrical inspector's use.

IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

# INSTALLATION REQUIREMENTS

## Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

### Tools Needed

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level
- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- 1" (2.5 cm) drill bit (for wall cabinet installations)

### Parts Needed


- UL listed or CSA approved conduit connector
- UL listed wire connectors

### Parts Needed – Flush Installation

- W10801485 Stainless steel flush installation kit for 27" (68.6 cm) models
- W10801486 Stainless steel flush installation kit for 30" (76.2 cm) models
- W10801487 Black flush installation kit for 30" (76.2 cm) models

To order, see the "Assistance or Service" section of the Use and Care Guide.

### Parts Supplied

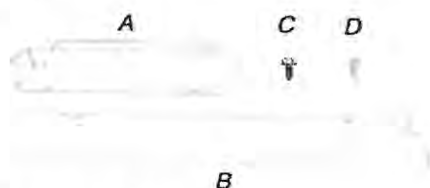

- A. Spacer bars (2)
- B. Bottom vent (1)
- C. 3/8" (9.5 mm) hex-head washer screws (4)
- D. 3/4" (1.9 cm) pan-head screws (4)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

## Location Requirements

**IMPORTANT:** Observe all governing codes and ordinances.


- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with microwave oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the microwave oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- For installation above single built-in oven, the junction box must be located inside upper cabinet.
- If you are installing the junction box on rear wall behind the microwave oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the microwave oven will not fit into the cabinet opening.
- Microwave oven support surface must be solid, level, and flush with bottom of cabinet cutout. Floor must be able to support a weight of 108 lbs (49.0 kg).

**IMPORTANT:** To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

### Product Dimensions

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

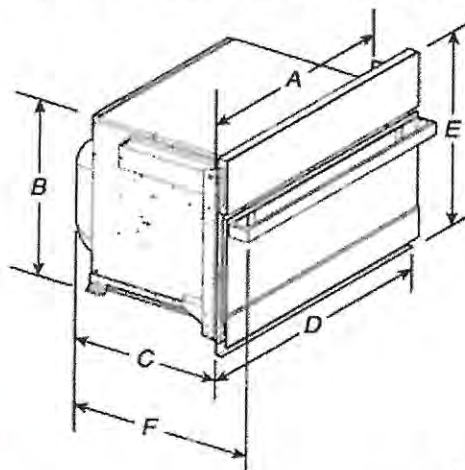


#### 27" (68.6 cm) models

- A. 25 1/8" (64.5 cm)
- B. 17 1/8" (44.1 cm)
- C. 22 1/16" (57.7 cm)
- D. 26 3/4" (68.0 cm) overall width
- E. 19 1/8" (50.3 cm) overall height
- F. JMC2427IM: 25 1/8" (64.9 cm)
- JMC2427IL: 24 3/4" (62.9 cm)

#### 30" (76.2 cm) models

- A. 28 3/8" (72.1 cm)
- B. 17 1/8" (44.1 cm)
- C. 22 1/16" (57.7 cm)
- D. 29 1/4" (75.6 cm) overall width
- E. 19 1/8" (50.3 cm) overall height
- F. JMC2430IM: 25 1/8" (64.9 cm)
- JMC2430IL: 24 3/4" (62.9 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit

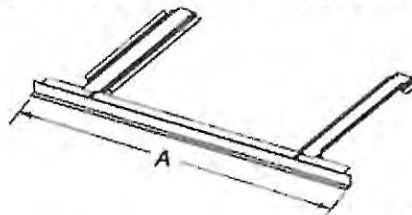

#### 27" (68.6 cm) models

- A. 26 3/4" (67.9 cm) overall width

#### 30" (76.2 cm) models

- A. 29 1/4" (75.6 cm) overall width

**NOTE:** The microwave oven spacer kit will allow the microwave oven to be installed in a 17 3/8" to 17 3/4" (44.1 to 45.1 cm) maximum cutout height.

Lot 53  
S-N 112021


A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" to 19 13/16" (48.3 to 50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel – Model W10469901
- 30" (76.2 cm) Stainless Steel – Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

### Cabinet Dimensions

#### 27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

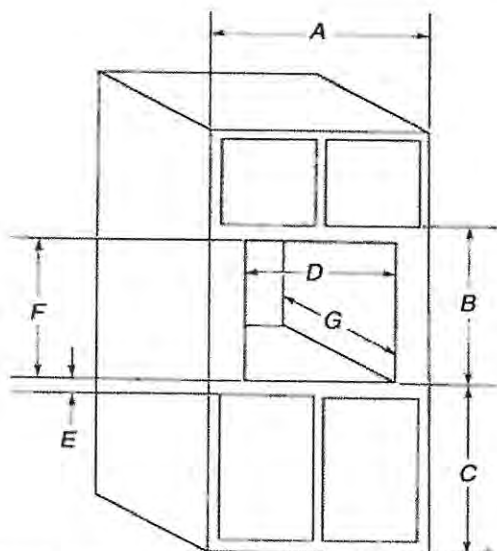

#### 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 19 7/8" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 25 1/2" (64.8 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 3/8" (44.7 cm) recommended cutout height (will fit cutout height from 17 1/8" [44.1 cm] to 17 3/4" [45.1 cm])
- G. 21 1/8" (55.5 cm) min. cutout depth


#### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 19 7/8" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 28 1/2" (72.4 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 3/8" (44.7 cm) recommended cutout height (will fit cutout height from 17 1/8" [44.1 cm] to 17 3/4" [45.1 cm])
- G. 21 1/8" (55.5 cm) min. cutout depth

### Minimum Installation Clearances

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

### Installation Above Single Built-In Oven

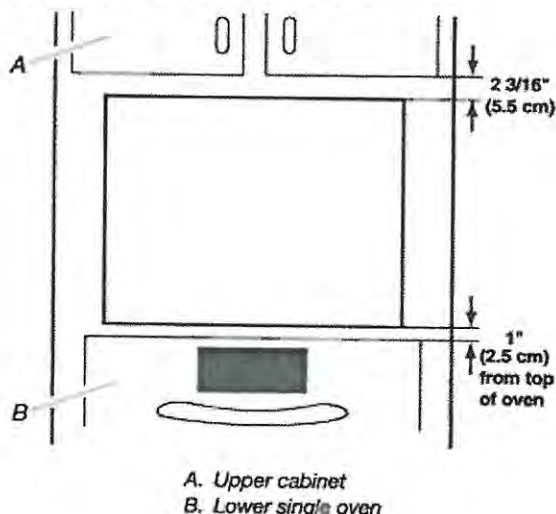

A. Upper cabinet  
B. Lower single oven

### Electrical Requirements

#### GROUNDING INSTRUCTIONS

##### For a permanently connected microwave oven:

The microwave oven must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the microwave oven.

#### SAVE THESE INSTRUCTIONS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 – latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91 – latest edition, and all local codes and ordinances.


A copy of the above code standards can be obtained from:

National Fire Protection Association  
1 Batterymarch Park  
Quincy, MA 02169-7471  
CSA International  
8501 East Pleasant Valley Road  
Cleveland, OH 44131-5575

#### Electrical Connection

To properly install your microwave oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located underneath the control panel along the oven vent.



A. Model/serial/rating plate

- The microwave oven rated 120/240 V, 20 A, has 4 wires (L1, L2, N, and G) in the flex conduit, and should be connected to a 20 A maximum-rated circuit, overcurrent protected on both the L1 and L2 circuits.
- A time-delay fuse or circuit breaker is recommended.
- Flexible cable from the microwave oven should be connected directly to the junction box.

- Do not cut the conduit. The length of conduit provided is for serviceability of the microwave oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:  
Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.  
Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table:

| Voltage     | Microwave With Convection Oven |
|-------------|--------------------------------|
| 120/240 VAC | 15 A                           |
| 120/208 VAC | 15 A                           |

## INSTALLATION INSTRUCTIONS

### Spacer Kit Installation


#### NOTES:

- The microwave oven spacer kit allows the microwave oven to be installed in an 17<sup>7</sup>/<sub>16</sub>" to 17<sup>1</sup>/<sub>8</sub>" (44.1 cm to 45.3 cm) maximum cutout height.
- If your cabinet cutout height is more than 17<sup>7</sup>/<sub>16</sub>" (44.1 cm), you must install the spacer kit. Proceed to "Assemble Spacer Kit."
- If your cabinet cutout height is less than 17<sup>7</sup>/<sub>16</sub>" (44.1 cm), you do not have to install the spacer kit. Proceed to "Prepare Built-In Microwave Oven."

#### Assemble Spacer Kit

1. Attach the bottom vent to spacer bars using four 3/8" (9.5 mm) hex-head washer screws.

**NOTE:** Spacer bar flanges should be facing out.

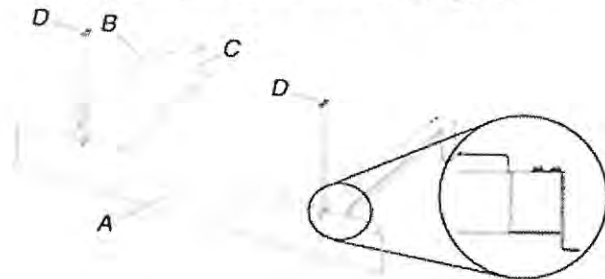


- A. Bottom vent
- B. Spacer bar flange
- C. Spacer bars
- D. 3/8" (9.5 mm) hex-head washer screws

#### Install Spacer Kit

1. Center assembled microwave oven spacer kit against lower front edge of the cabinet cutout.
2. Using an 1/8" (3.2 mm) drill bit, drill through the mounting holes in the spacer bars to create pilot holes.

LO# 53  
June 1, 2021

3. Attach the assembled spacer kit to the cabinet using four 3/4" (1.9 cm) (flat-head screws. Do not overtighten screws.



- A. 3/4" (1.9 cm) flat-head screws
- B. Spacer kit assembly

### Prepare Built-In Microwave Oven

1. Locate existing wiring to avoid drilling into or severing wiring during installation.

#### ⚠ WARNING

##### Excessive Weight Hazard

Use two or more people to move and install microwave oven.

Failure to do so can result in back or other injury.

2. To avoid floor damage, set the microwave oven onto cardboard prior to installation. Do not use handle or any portion of the front frame for lifting.
3. Remove the shipping materials and tape from the microwave oven.
4. Remove and set aside racks and other items from inside the microwave oven.
5. Remove the hardware package from inside the bag containing literature.
6. Move the microwave oven and cardboard close to the microwave oven's final location.

## Make Electrical Connection

### ⚠ WARNING



#### Electrical Shock Hazard

Disconnect power before servicing.

Use 12 gauge copper wire.

Electrically ground oven.

Failure to follow these instructions can result in death, fire, or electrical shock.

The microwave oven is manufactured with a neutral (white) power supply wire and a cabinet-connected green (or bare) ground wire.


1. Disconnect power.
2. Feed the flexible conduit from the microwave oven through the opening in the cabinet.
3. Remove junction box cover if it is present.
4. Install a UL listed or CSA approved conduit connector to the junction box.



A. UL listed or CSA approved conduit connector

5. Route the flexible conduit from the microwave oven to the junction box through a UL listed or CSA approved conduit connector.
6. Tighten screws on conduit connector.
7. Complete electrical connection.

## 3-Wire Cable with Ground from Home Power Supply to Microwave Oven Cable with 4 Wires

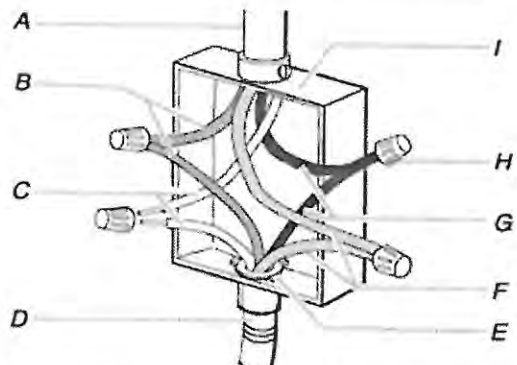


- |                                     |                                                |
|-------------------------------------|------------------------------------------------|
| A. Cable from home power supply     | E. UL listed or CSA approved conduit connector |
| B. Green (or bare) wires            | F. Red wires                                   |
| C. White wires                      | G. Black wires                                 |
| D. 4-wire cable from microwave oven | H. UL listed wire connector                    |
|                                     | I. Junction box                                |

1. Connect the 2 black wires (G) together using a UL listed wire connector.
2. Connect the 2 white wires (C) using a UL listed wire connector.
3. Connect the 2 red wires (F) together using a UL listed wire connector.
4. Connect the 2 green (or bare) wires (B) together using a UL listed wire connector.
5. Install junction box cover.

## Install Microwave Oven

1. Using 2 or more people, lift the microwave oven partially into the cabinet cutout. If a spacer kit has been installed, lift the microwave oven over it and position the microwave oven between the guide strips.

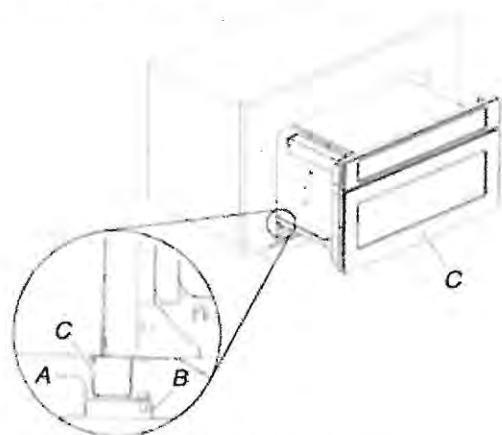

- A. Spacer bar flange  
B. Spacer bar  
C. Microwave oven


Lot 53

June 1, 2021


*[Handwritten signature]*

2. Push against the front frame of the microwave oven to insert oven into cabinet. Push microwave oven completely into cabinet and center in cabinet cutout.

**NOTE:** Open microwave oven door and push against seal area of microwave oven front frame when pushing microwave oven into cabinet. Do not push against outside edges.



3. Using an 1/8" (3.2 mm) drill bit, predrill pilot holes through the mounting rails on each side of the microwave oven.
4. Securely fasten microwave oven to cabinet using two 3/4" (1.9 cm) flat-head screws provided. Insert the screws through holes in mounting rails. Do not overtighten screws.

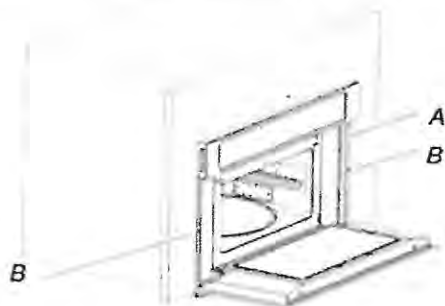

A. Mounting rail  
B. Flat-head screws

5. Replace convection grid, turntable, and support hub.
6. Reconnect power.
7. Display panel will light briefly and the clock should appear in the display.
8. If display panel does not light, please reference the "Assistance or Service" section of the Use and Care Guide or contact the dealer from whom you purchased your microwave oven.

## Complete Installation

1. Check that all parts are now installed. If there is an extra part, go back through the steps to see which step was skipped.
2. Check that you have all of your tools.
3. Dispose of/recycle all packaging materials.
4. For microwave oven use and cleaning, read the Use and Care Guide.

### Check Operation of Microwave Oven

1. Fill a microwave-safe container with 1 cup (250 mL) of water and place container on the turntable inside the microwave oven. Close door firmly.
2. Touch COOK.
3. Set power level, temperature, and cook time to "2:00" minutes.
4. Press START.

If microwave oven does not operate, check the following:

- Household fuse is intact and tight or circuit breaker has not tripped.
- Electrical supply is connected.
- See "Troubleshooting" section in the Use and Care Guide.

When the display reads "1:00" minute, open the microwave oven door. The microwave oven should stop cooking. Close door firmly. The interior microwave oven light should turn off.

5. Touch START to resume a preset cycle. The microwave oven should begin cooking and the microwave oven interior light should be ON.

Let microwave oven complete cooking time. Tones will sound at the end of the cooking time and the microwave oven will shut off.

6. Open microwave oven door and slowly remove container. Water in container should be hot.
7. To set the clock and other microwave oven functions, refer to the Use and Care Guide.

### If you need Assistance or Service:

Please reference the "Assistance or Service" section of the Use and Care Guide or contact the dealer from whom you purchased your built-in microwave oven.

Lot 53

June 1, 2021

*(Handwritten initials)*



## INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND  
DOUBLE BUILT-IN OVEN

## INSTRUCTIONS D'INSTALLATION

FOUR ÉLECTRIQUE ENCASTRÉ  
27" (68,6 CM) ET 30" (76,2 CM) - SIMPLE ET DOUBLE

### Table of Contents/Table des matières

|                                                                                            |    |                                                                                                                                     |    |
|--------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------------------------------------------------------|----|
| <b>BUILT-IN OVEN SAFETY</b> .....                                                          | 2  | <b>SÉCURITÉ DE LA TABLE DE CUISSON</b> .....                                                                                        | 17 |
| <b>INSTALLATION REQUIREMENTS</b> .....                                                     | 3  | <b>EXIGENCES D'INSTALLATION</b> .....                                                                                               | 17 |
| Tools and Parts.....                                                                       | 3  | Outillage et pièces.....                                                                                                            | 17 |
| Location Requirements.....                                                                 | 3  | Exigences d'emplacement.....                                                                                                        | 17 |
| Electrical Requirements.....                                                               | 6  | Spécifications électriques.....                                                                                                     | 20 |
| <b>INSTALLATION INSTRUCTIONS</b> .....                                                     | 7  | <b>INSTRUCTIONS D'INSTALLATION</b> .....                                                                                            | 21 |
| Prepare Built-In Oven.....                                                                 | 7  | Préparation du four encastré.....                                                                                                   | 21 |
| Remove Oven Door(s).....                                                                   | 7  | Dépose de la/des porte(s) du four.....                                                                                              | 21 |
| Replace Oven Door(s).....                                                                  | 7  | Réinstallation de la/des porte(s) du four.....                                                                                      | 22 |
| Positioning Oven Feet for Multiple Cabinet Cutout Heights.....                             | 8  | Positionnement des pieds du four pour des ouvertures d'encastrement de hauteur différente.....                                      | 23 |
| Make Electrical Connection.....                                                            | 13 | Raccordement électrique.....                                                                                                        | 27 |
| Install Oven.....                                                                          | 14 | Installation du four.....                                                                                                           | 28 |
| Install Warming Drawer Deflector Kit (Only for Ovens Installed above Warming Drawers)..... | 15 | Installation de l'ensemble de déflecteur du tiroir-réchaud (uniquement pour les fours installés au-dessus d'un tiroir-réchaud)..... | 30 |
| Complete Installation.....                                                                 | 16 | Achever l'installation.....                                                                                                         | 30 |

Lot 53

June 1, 2021

Angelica C. 

Alberto R.

27" single


#### IMPORTANT:

Save for local electrical inspector's use.

#### IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

## Product Dimensions - Single Ovens

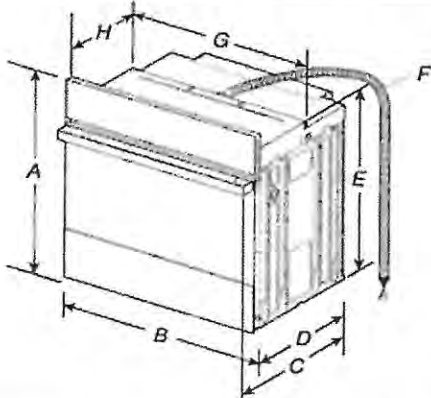


### 27" (68.6 cm) models

- A. 29<sup>11</sup>/<sub>16</sub>" (75.8 cm) max. overall height
- B. 27" (68.6 cm) overall width
- C. JJW24271M - 26<sup>3</sup>/<sub>16</sub>" (67 cm)  
JJW24271L - 27<sup>3</sup>/<sub>16</sub>" (69 cm)
- D. 23<sup>1</sup>/<sub>4</sub>" (59.1 cm) max. recessed depth
- E. 26<sup>3</sup>/<sub>4</sub>" (67.9 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 25<sup>1</sup>/<sub>16</sub>" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

### 30" (76.2 cm) models

- A. 29<sup>11</sup>/<sub>16</sub>" (75.8 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JJW24301M - 26<sup>3</sup>/<sub>16</sub>" (67 cm)  
JJW24301L - 27<sup>3</sup>/<sub>16</sub>" (69 cm)
- D. 23<sup>1</sup>/<sub>4</sub>" (59.1 cm) max. recessed depth
- E. 26<sup>3</sup>/<sub>4</sub>" (67.9 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 26<sup>7</sup>/<sub>16</sub>" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

## Cabinet Dimensions - Single Ovens

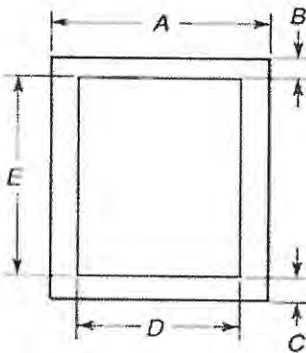


### 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1<sup>1</sup>/<sub>2</sub>" (3.8 cm) min. top of cutout to underside of countertop
- C. 5<sup>1</sup>/<sub>4</sub>" (13.3 cm) bottom of cutout to floor
- D. 25<sup>1</sup>/<sub>2</sub>" (64.8 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1<sup>1</sup>/<sub>2</sub>" (3.8 cm) min. top of cutout to underside of countertop
- C. 5<sup>1</sup>/<sub>4</sub>" (13.3 cm) bottom of cutout to floor
- D. 28<sup>1</sup>/<sub>2</sub>" (72.4 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

## Single Ovens Installed in Cabinet

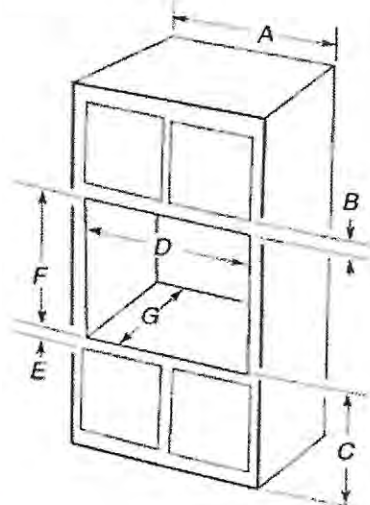

### 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 2<sup>1</sup>/<sub>16</sub>" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 25<sup>1</sup>/<sub>2</sub>" (64.8 cm) cutout width
- E. 1<sup>1</sup>/<sub>2</sub>" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 2<sup>1</sup>/<sub>16</sub>" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 28<sup>1</sup>/<sub>2</sub>" (72.4 cm) cutout width
- E. 1<sup>1</sup>/<sub>2</sub>" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

\*NOTE: The cutout height can be between 26<sup>15</sup>/<sub>16</sub>" and 29<sup>7</sup>/<sub>16</sub>" (68.4 cm and 74.8 cm) for single ovens.

lot 53  
June 1, 2021