



CONSTRUCTION SUMMARY

Lot: 38
Model: 40.03 B BROOKSIDE
Project/Phase: Pine Valley Forevergreen / 1

APPLIANCES

Invoice	Qty.	Description
2606 05Mar21 NoCat	1	APPLIANCE SPECIFICATIONS ATTACHED - SIGNED FINALS

CERAMIC

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
2606 37 05Mar21	1	MASTER ENSUITE: TILE, FLOOR , LEVEL 5 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2606 48 05Mar21	1	MASTER ENSUITE: TILE, WALL, LEVEL 2 - 4X12"
2606 25 05Mar21	1	MASTER ENSUITE: TILE INSTALLATION UPGRADE, WALL, HERRINGBONE PATTERN Note: Changed from Floor to Wall - Purchaser Approved - June 28, 21, Submitted Sept 23
2606 05Mar21 NoCat	1	DO NOT SUPPLY / INSTALL CERAMIC TILES IN KITCHEN/BREAKFAST AREA FYI - KITCHEN/BREAKFAST: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, WIREBRUSH TEXTURE, UV OIL FINISH - LEVEL 3

DRYWALL

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
2467 06Oct20 NoCat	1	BREAKFAST: UPGRADE EXTERIOR FRENCH DOOR ASSEMBLY TO 96" (both doors operable)

ELECTRICAL

Invoice	Qty.	Description
2467 72,289 06Oct20	6	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDES 1 SWITCH SEE PLAN FOR LOCATION INCLUDED IN APS
2467 72,307 06Oct20	1	KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO ABOVE ISLAND - SEE PLAN FOR APPROX LOCATION



CONSTRUCTION SUMMARY

Lot: 38
Model: 40.03 B BROOKSIDE
Project/Phase: Pine Valley Forevergreen / 1

FRAMING

Invoice	Qty.	Description
2467 72,631 06Oct20	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION

GLASS AND MIRROR

Invoice	Qty.	Description
2606 05Mar21 NoCat	2	MASTER ENSUITE + SHARED ENSUITE: UPGRADE SHOWER DOOR HANDLE TO MT6X6 - CHROME

GRANITE MARBLE QUARTZ

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
2606 101,930 05Mar21	1	KITCHEN: UPGRADE QUARTZ COUNTER TOP - LEVEL 6
2606 05Mar21 NoCat	1	MASTER ENSUITE: UPGRADE 5 QUARTZ COUNTER

HARDWOOD

Invoice	Qty.	Description
2606 101,930 05Mar21	1	THRU OUT STANDARD AREAS: MAIN HALL, GREAT ROOM, DINING ROOM, STUDY, UPPER HALL, MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4, LOWER MEDIA ROOM - VINTAGE SERIES, NSS ENG. 5" x 3/4", WHITE OAK, WIREBRUSH, UV OIL - LEVEL 3
2606 4 05Mar21	1	KITCHEN/BREAKFAST: VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, WIREBRUSH TEXTURE, UV OIL FINISH - LEVEL 3

HVAC

Invoice	Qty.	Description
2606 05Mar21 NoCat	1	*note* gas line for range was NOT purchased from builder - home owner to install own after closing

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	BREAKFAST: UPGRADE EXTERIOR FRENCH DOOR ASSEMBLY TO 96" (both doors operable)



CONSTRUCTION SUMMARY

Lot: 38
Model: 40.03 B BROOKSIDE
Project/Phase: Pine Valley Forevergreen / 1

KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2606 101,930 05Mar21	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE

NETWORK AND WIRING

Invoice	Qty.	Description
2467 72,260 06Oct20	1	CONDUIT PIPE - FROM ATTIC TO BASEMENT - NEAR ELECTRICAL PANEL IN BASEMENT TO APPROX CENTER OF ATTIC

PAINT

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	BREAKFAST: UPGRADE EXTERIOR FRENCH DOOR ASSEMBLY TO 96" (both doors operable)

PLUMBING

Invoice	Qty.	Description
2467 72,347 06Oct20	1	MASTER ENSUITE: 3/4" WATER SUPPLY LINE TO ENSUITE SHOWER IN LIEU OF STANDARD
2606 05Mar21 NoCat	1	KITCHEN: BLANCO QUATRUS U SUPER SINGLE SINK

STAIR AND RAILINGS

Invoice	Qty.	Description
2606 93,782 05Mar21	2	MAIN STAIRS - 2ND FLOOR TO BASEMENT: UPGRADE - EURONLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE A-2

WINDOWS AND DOORS

Invoice	Qty.	Description
2467 06Oct20 NoCat	1	BREAKFAST: UPGRADE EXTERIOR FRENCH DOOR ASSEMBLY TO 96" (both doors operable)
2467 06Oct20 NoCat	1	BREAKFAST: UPGRADE EXTERIOR FRENCH DOOR ASSEMBLY TO 96" (both doors operable)

*** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date:

Purchasers: MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan - ~~REVISION~~
Telephone Res. / Bus: / (416) 704-5450 Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Yolande Somerville Model and Elevation: 40.03 B BROOKSIDE

Layout Changes: ☐ Yes ☒ No Sketch Attached: ☒ Yes ☐ No Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Counter	Hardware
Kitchen / Breakfast	2-tone	Quartz: Eternal Noir	attachd
Laundry Room	Alban 'Storm Grey Oak'	P-Lam White	attachd
Powder Room	Windermere 'Winter Green'	Quartz: Ice Snow	attachd
Master Ensuite Bathroom	Medio 6 'Midnight Blue'	Quartz: Eternal Serena	attachd
Second Ensuite Bathroom (If Applicable)	Modena 'Classic White'	Quartz: Ice Snow	attachd
Shared Ensuite	Monterey 'Slate Grey Maple'	Quartz: Nordic Loft	attachd

Comment

Kitchen Uppers: Medio 6 "FOG" // Kitchen Bases: Medio 6 Anthracite

2. Floor Tile

	Selection
Entrance Vestibule	*13x13" New Byzantine 'Pentellic Grey'
Main Hall	see hdwd
Kitchen / Breakfast	see hdwd
Laundry Room	13x13" Costa 'White'
Powder Room	13x13" New Byzantine 'Pentellic Grey'
Master Ensuite Bathroom	*12x24" Piesentina 'Light Grey Matte'
Second Ensuite Bathroom (If Applicable)	13x13" New Byzantine 'Azzuro Blue'
Lower Landing (If Applicable)	13x13" Costa 'White' (basement foyer)
Shared Ensuite	13x13" New Reeds 'Brown'

Comment

Shower Floors Thru-Out: 2x2 std white

3. Wall Tile

	Selection	Listello/Inserts	Describe
		☐ Yes ☒ No	
Master Ensuite Bathroom			
Tub Deck		☐ Yes ☒ No	
Shower Stall	*4x12" Picadilly Avorio	☐ Yes ☒ No	
Bathroom Walls		☐ Yes ☒ No	
Second Ensuite Bathroom (If Applicable)	8x10" Weave 'White'	☐ Yes ☒ No	
Shared Ensuite	8x10" Weave 'Tender Grey'	☐ Yes ☒ No	
Kitchen Backsplash	☐ Yes ☒ No	Backsplash Behind Fridge	

Comment



Purchasers: MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan -

~~*REVISION*~~

Telephone Res. / Bus: / (416) 704-5450

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor: Yolande Somerville

Model and Elevation: 40.03 B BROOKSIDE

4. Plumbing Fixtures

☐	Second Ensuite	☐	Powder Room	☐
Master Ensuite Bathroom	☐	Other Room - Specify	☐	Other Washroom
☐				

Comment

standard except kitchen sink

5. Hardwood Flooring

	Type and Stain		Type and Stain
Main Hall		Upper Landing	
Kitchen / Breakfast	3/4x5" wht oak wirebrush 'Atlantis'	Upper Hall	
Living Room		Master Bedroom	
Dining Room		Bedroom #2	
Family Room		Bedroom #3	
Den/Library		Bedroom #4	
Entrance Vestibule		Bedroom #5	
Lower Landing (If Applicable)		Other Room - Specify	
		thru out std areas	3/4x5" wht oak wirebrush 'Atlantis'

Comment

6. Carpeting

	Upgrade	Description
Ground Floor	☐	
Second Floor	☐	
	☐	

Upgrade Underpad	Type	Area
Carpet on Stairs	Capped	Runner - *Upgrade

Comment

7. Fireplace

	Living Room			Family Room			Other Room - Specify		
	Purchased	As Per Plan	N/A	Purchased	As Per Plan	N/A	Purchased	As Per Plan	N/A
Fireplace Type	☐	☐	☒	☐	☒	☐	☐	☐	☒
Mantle Type				Standard Gas					
Colour / Stain				Mediterranean					
Surround				Arctic White					
Hearth				n/a					
				none					

Comment

Scheduled Closing Date:

Purchasers:

MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan -

~~*REVISED*~~

Telephone Res. / Bus: / (416) 704-5450

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor: Yolande Somerville

Model and Elevation: 40.03 B BROOKSIDE

8. Trim Carpentry

Interior Doors Std Carrara

Front Door Glass Inserts Std

Door Handles Std

Interior Trim Std package

Comment

9. Plaster Mouldings and Medallions

Standard Throughout ☐ Yes ☐ No ☒ N/A

Entrance Vestibule

Main Hall

Living Room

Dining Room

Family Room

Kitchen/Breakfast

Den/Library

Lower Landing

Other Room - Specify

Comment

10. Railings and Spindles

Railing Package *Package A-2

Railing Colour ***Natural Clear Coat

Stringer / Riser ***Natural Clear Coat

Spindle Colour *Black

Treads ***Natural Clear Coat

Comment

Oak Stairs ☒ Yes ☐ No ☐ N/A

***Stairs and railing to be red oak with standard clear coat - stairs and landings will NOT match hardwood floors in colour/texture/species

11. Wall Paint / Ceilings

Throughout Finished Areas Warm Grey

Trim Paint White

Smooth Ceilings

Ground Floor



Second Floor



Note

Comment

Scheduled Closing Date:

Purchasers: MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan - ~~*REUSEN*~~
Telephone Res. / Bus: / (416) 704-5450 Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Yolande Somerville Model and Elevation: 40.03 B BROOKSIDE

12. Electrical

Hood Fan ☐ White ☐ Stainless ☒ N/A

Above Kitchen Cabinet Light ☐ Yes ☒ No

Below Kitchen Cabinet Light ☐ Yes ☒ No

Standard Appliances ☐

Over The Range Microwave ☐

Chimney Style Fan ☐

Comment

13. Heating and Air Conditioning

Air Conditioning

Gas Provisions Stove

Gas Provisions Dryer

Gas Provisions Barbecue

Comment

14. Additional Comments

15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. _____ Purchaser's Initials
- 4) The Purchaser acknowledges reading and accepting the "Gold Park Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:

Signature:  _____ Date: _____

PV-38 Cabinetry Schedule

Revised February 24, 2021

ROOM	DESCRIPTION	PRICE	QTY	TOTAL
KITCHEN	UPGRADE FROM SERIES 2 TO SERIES 6 > UPPER CABINETS: <i>MEDIO 6 FOG</i> > BASE CABINETS: <i>MEDIO 6 ANTHRACITE</i> RETURN TRIP FOR HARDWOOD CONVERT STD. BASE CABINETS INTO BASE POTS AND PANS DRAWERS ADJUST BASE CABINETRY FOR 36" RANGE (N/C) LEAVE 42" SPACE IN UPPER CABINETS ABOVE RANGE FOR FUTURE HOOD FAN (N/C)			
POWDER ROOM	UPGRADE FROM SERIES 2 TO SERIES 5 - <i>WINDERMERE WINTER GREEN</i>			
MASTER ENSUITE	UPGRADE FROM SERIES 2 TO SERIES 6 - <i>MEDIO 6 MIDNIGHT BLUE</i>			
CABINETRY TOTAL:				

HANDLE PLACEMENT: AT INSTALLERS DISCRETION

LOT #: PV-38

DATE: Feb. 24, 2021

SIGNATURE:

SIGNATURE:

*** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date:

Purchasers:

MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan - ~~*REUSE*~~

Telephone Res. / Bus: / (416) 704-5450

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor:

Yolande Somerville

Model and Elevation: 40.03 B BROOKSIDE

Layout Changes: ☐ Yes ☒ NoSketch Attached: ☒ Yes ☐ No

Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Counter	Hardware
Kitchen / Breakfast	2-tone	Quartz: Eternal Noir	attachd
Laundry Room	Alban 'Storm Grey Oak'	P-Lam White	attachd
Powder Room	Windermere 'Winter Green'	Quartz: Ice Snow	attachd
Master Ensuite Bathroom	Medio 6 'Midnight Blue'	Quartz: Eternal Serena	attachd
Second Ensuite Bathroom (If Applicable)	Modena 'Classic White'	Quartz: Ice Snow	attachd
Shared Ensuite	Monterey 'Slate Grey Maple'	Quartz: Nordic Loft	attachd

Comment

Kitchen Uppers: Medio 6 "FOG" // Kitchen Bases: Medio 6 Anthracite

2. Floor Tile

	Selection
Entrance Vestibule	*13x13" New Byzantine 'Pentellic Grey'
Main Hall	see hdwd
Kitchen / Breakfast	see hdwd
Laundry Room	13x13" Costa 'White'
Powder Room	13x13" New Byzantine 'Pentellic Grey'
Master Ensuite Bathroom	*12x24" Piesentina 'Light Grey Matte'
Second Ensuite Bathroom (If Applicable)	13x13" New Byzantine 'Azzuro Blue'
Lower Landing (If Applicable)	13x13" Costa 'White' (basement foyer)
Shared Ensuite	13x13" New Reeds 'Brown'

Comment

Shower Floors Thru-Out: 2x2 std white

3. Wall Tile

	Selection	Listello/Inserts	Describe
Master Ensuite Bathroom		☐ Yes ☒ No	
Tub Deck		☐ Yes ☒ No	
Shower Stall	*4x12" Picadilly Avorio	☐ Yes ☒ No	
Bathroom Walls		☐ Yes ☒ No	
Second Ensuite Bathroom (If Applicable)	8x10" Weave 'White'	☐ Yes ☒ No	
Shared Ensuite	8x10" Weave 'Tender Grey'	☐ Yes ☒ No	
Kitchen Backsplash	☐ Yes ☒ No	Backsplash Behind Fridge	

Comment

45-11-27

Scheduled Closing Date:

Purchasers:

MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan -

~~*REVISION*~~

Telephone Res. / Bus: / (416) 704-5450

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor:

Yolande Somerville

Model and Elevation: 40.03 B BROOKSIDE

4. Plumbing Fixtures

Master Ensuite Bathroom

Second Ensuite

Powder Room

Other Room - Specify

Other Washroom

Comment

standard except kitchen sink

5. Hardwood Flooring

Main Hall

Type and Stain

Kitchen / Breakfast 3/4x5" wht oak wirebrush 'Atlantis'

Living Room

Dining Room

Family Room

Den/Library

Entrance Vestibule

Lower Landing
(If Applicable)

Comment

Upper Landing

Type and Stain

Upper Hall

Master Bedroom

Bedroom #2

Bedroom #3

Bedroom #4

Bedroom #5

Other Room - Specify
thru out std areas

3/4x5" wht oak wirebrush 'Atlantis'

6. Carpeting

Ground Floor

Upgrade

Description

Second Floor

Upgrade Underpad

Type

Area

Carpet on Stairs

Capped

Runner - *Upgrade

Comment

7. Fireplace

Living Room

Purchased

As Per Plan

N/A

Family Room

Purchased

As Per Plan

N/A

Other Room - Specify

Purchased

As Per Plan

N/A

Fireplace Type

Mantle Type

Colour / Stain

Surround

Hearth

Comment

Standard Gas

Mediterranean

Arctic White

n/a

none

2.8.11

WORTH MORE *** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date:

Purchasers: MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan - ~~*REVISED*~~
Telephone Res. / Bus: / (416) 704-5450 Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Yolande Somerville Model and Elevation: 40.03 B BROOKSIDE

8. Trim Carpentry

Interior Doors	Std Carrara	Front Door Glass Inserts	Std	Door Handles	Std
Interior Trim	Std package				
Comment					

9. Plaster Mouldings and Medallions

Standard Throughout ☐ Yes ☐ No ☒ N/A

Entrance Vestibule		Kitchen/Breakfast	
Main Hall		Den/Library	
Living Room		Lower Landing	
Dining Room		Other Room - Specify	
Family Room			
Comment			

10. Railings and Spindles

Railing Package	*Package A-2	Spindle Colour	*Black
Railing Colour	***Natural Clear Coat	Treads	***Natural Clear Coat
Stringer / Riser	***Natural Clear Coat	Oak Stairs	☒ Yes ☐ No ☐ N/A
Comment			

***Stairs and railing to be red oak with standard clear coat - stairs and landings will NOT match hardwood floors in colour/texture/species

11. Wall Paint / Ceilings

Throughout Finished Areas Warm Grey

Trim Paint White

Smooth Ceilings

Ground Floor	☒
Second Floor	☒
Note	

Comment

LD-M.M

WORTH MORE *** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date:

Purchasers: MANUELA MANCINI & LENY DI GIANDOMENIK Property: 38 of Plan - *REUSEN*
Telephone Res. / Bus: / (416) 704-5450 Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Yolande Somerville Model and Elevation: 40.03 B BROOKSIDE

12. Electrical

Hood Fan ☐ White ☐ Stainless ☒ N/A

Standard Appliances ☐

Over The Range Microwave ☐

Chimney Style Fan ☐

Above Kitchen Cabinet Light ☐ Yes ☒ No

Below Kitchen Cabinet Light ☐ Yes ☒ No

Comment

13. Heating and Air Conditioning

Air Conditioning no

Gas Provisions Stove no

Gas Provisions Dryer no

Gas Provisions Barbecue std

Comment

14. Additional Comments

15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. _____ Purchaser's Initials
- 4) The Purchaser acknowledges reading and accepting the "Gold Park Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:

Signature: Manuela Mancini Date: Mar 01 2021



Revised February 24, 2021

ROOM	DESCRIPTION	PRICE	QTY	TOTAL
KITCHEN	UPGRADE FROM SERIES 2 TO SERIES 6	11,046.50	1	\$ 11,046.50
	> UPPER CABINETS: <i>MEDIO 6 FOG</i>			
	> BASE CABINETS: <i>MEDIO 6 ANTHRACITE</i>			
	RETURN TRIP FOR HARDWOOD	320.00	1	\$ 320.00
	CONVERT STD. BASE CABINETS INTO BASE POTS AND PANS DRAWERS	990.00	1	\$ 990.00
	ADJUST BASE CABINETRY FOR 36" RANGE (N/C)	-	1	\$ -
	LEAVE 42" SPACE IN UPPER CABINETS ABOVE RANGE FOR FUTURE HOOD FAN (N/C)	-	1	\$ -
				<u>\$ 12,356.50</u>
POWDER ROOM	UPGRADE FROM SERIES 2 TO SERIES 5 - <i>WINDERMERE WINTER GREEN</i>	210.10	1	\$ 210.10
				<u>\$ 210.10</u>
MASTER ENSUITE	UPGRADE FROM SERIES 2 TO SERIES 6 - <i>MEDIO 6 MIDNIGHT BLUE</i>	953.70	1	\$ 953.70
				<u>\$ 953.70</u>
	CABINETRY TOTAL:			\$ 13,520.30

HANDLE PLACEMENT: AT INSTALLERS DISCRETION

LOT #: PV-38 DATE: Feb. 24, 2021

SIGNATURE: *[Signature]*

SIGNATURE: *[Signature]*

GOLD

REVISED:
2021-02-24



SCHEDULE 'F'

PV-38 ~~see attached to~~
~~SEPT 30 2020~~
PV-38 ~~inst.~~
Feb. 24, 2021


The Brookside

40' SERIES

Elevation A • 3,380 sq.ft.

→ Elevation B • 3,350 sq.ft.

HARDWOOD
IN
KITCHEN

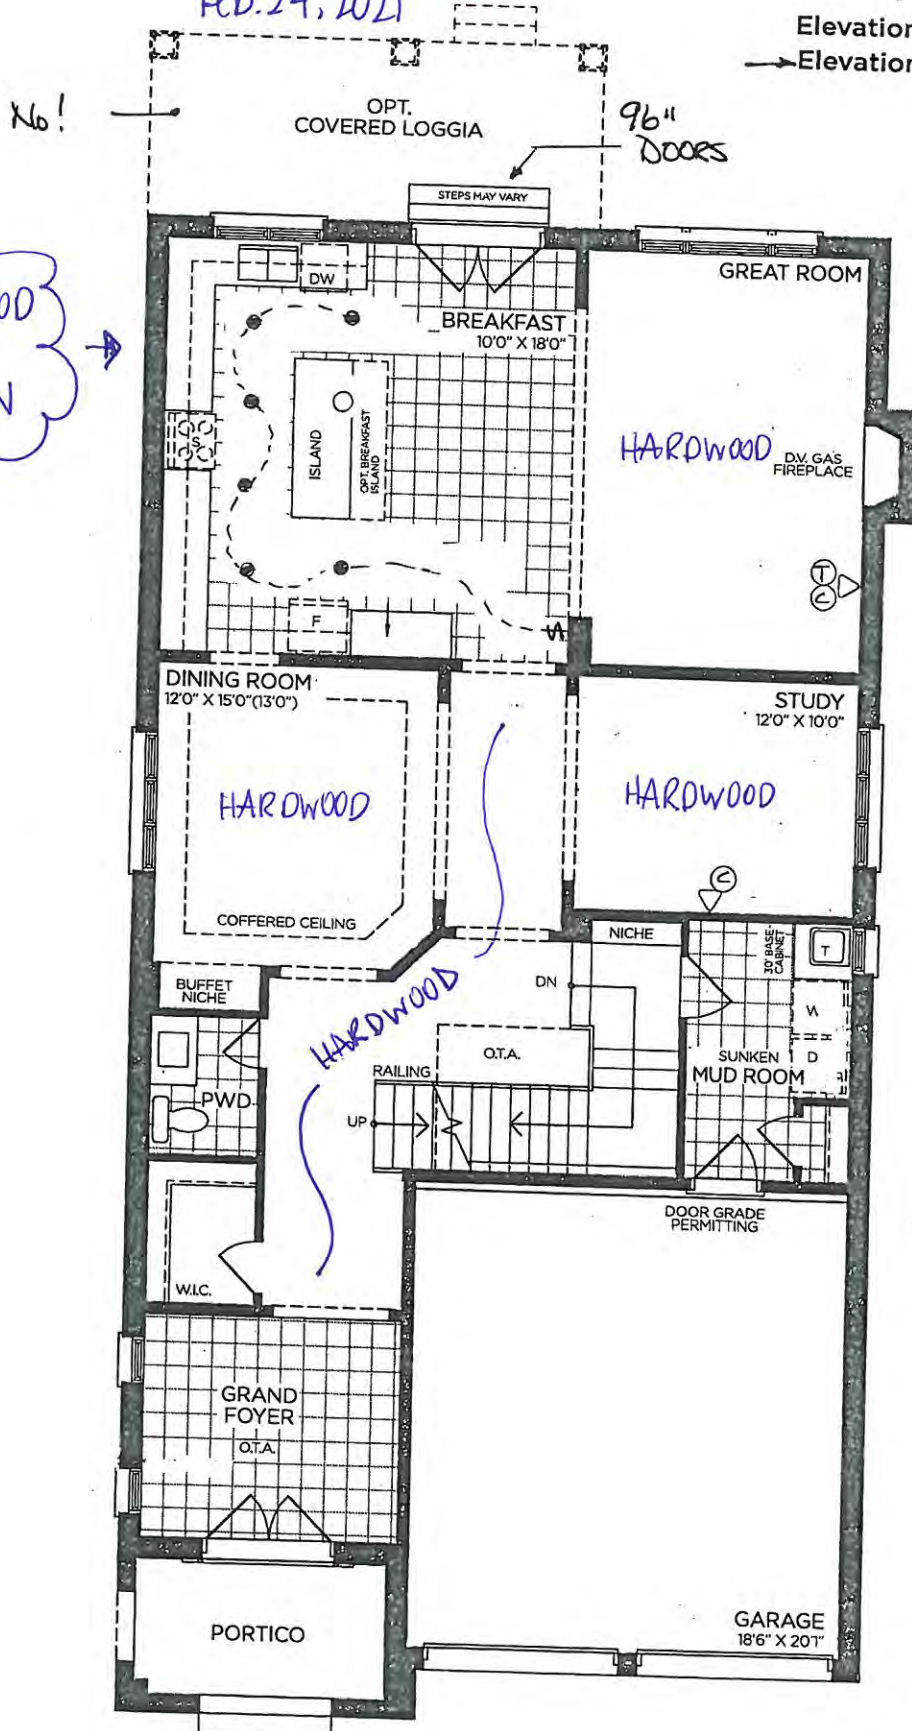

GROUND FLOOR | ELEV. A

VENDOR

PURCHASER

PURCHASER

GOLDPARK
WORTH MORE™


Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4003

PINE VALLEY
FOREVERGREEN

PV-38 ~~to~~ sep attached to
Sept. 30, 2020

PV-38 *MM* 
Feb. 24, 2021

→ Elevation B • 3,350 sq.ft.

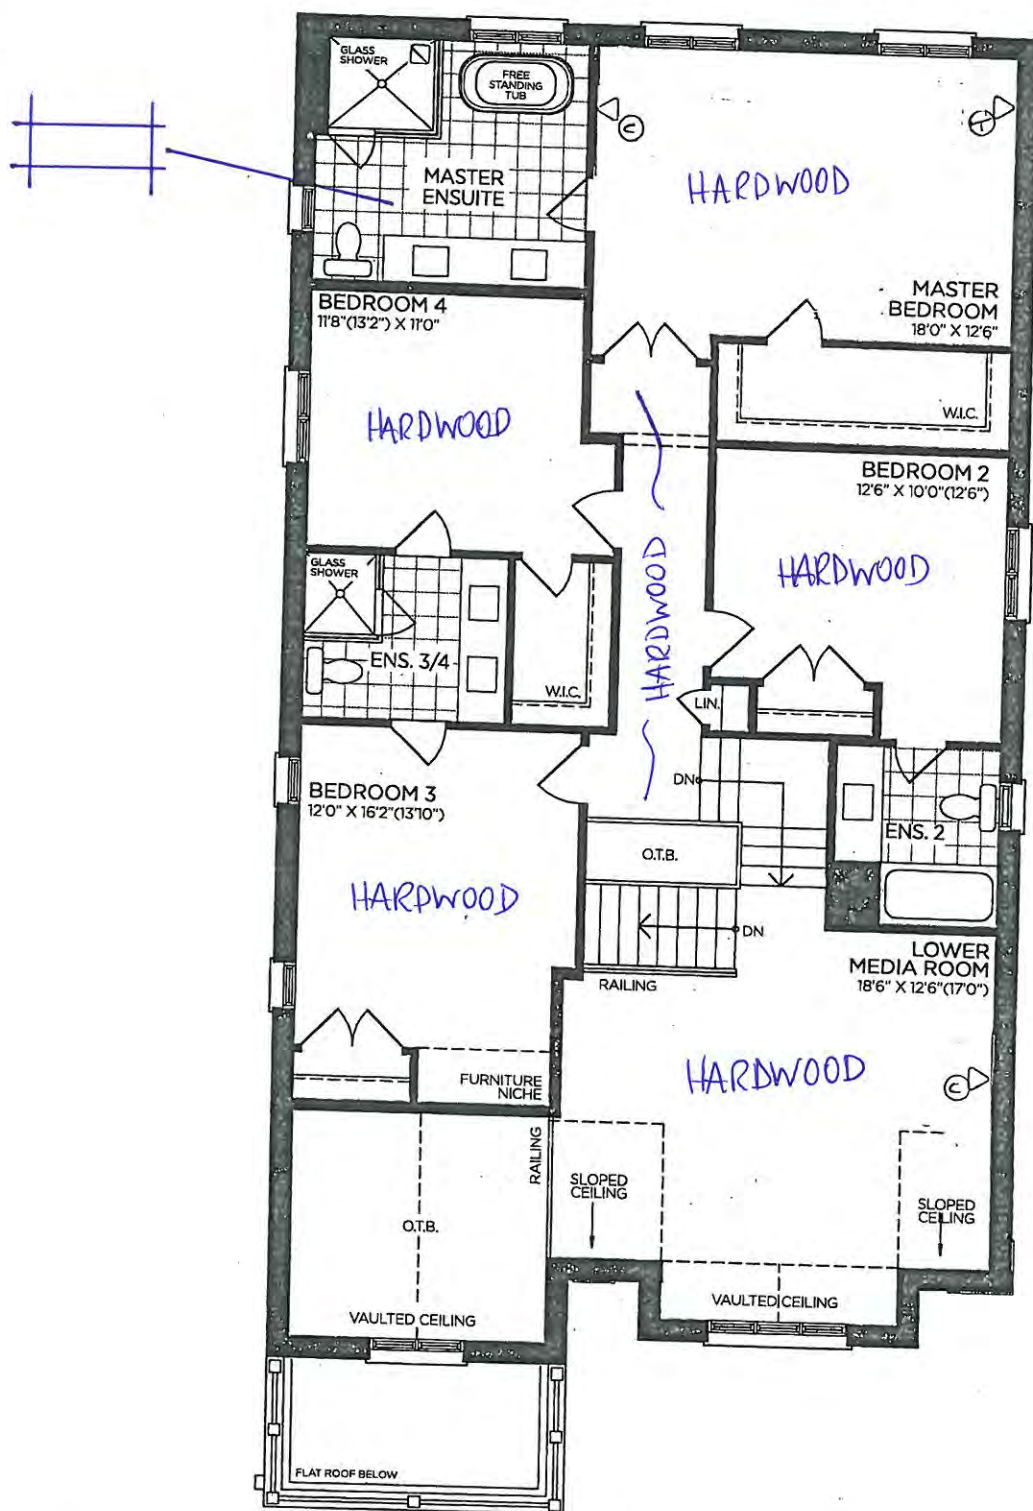

No phone
in ~~BDEMS~~
2/3/4.

SECOND FLOOR | ELEV. A

VENDOR _____

PURCHASER _____

PURCHASER _____

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4003



SCHEDULE 'F'

PV-38 ~~*see attached*~~
Sept. 30, 2020


PV-38 ~~mm~~
Feb. 24, 2021

The Brookside


40' SERIES

Elevation A • 3,380 sq.ft.


→ Elevation B • 3,350 sq.ft.

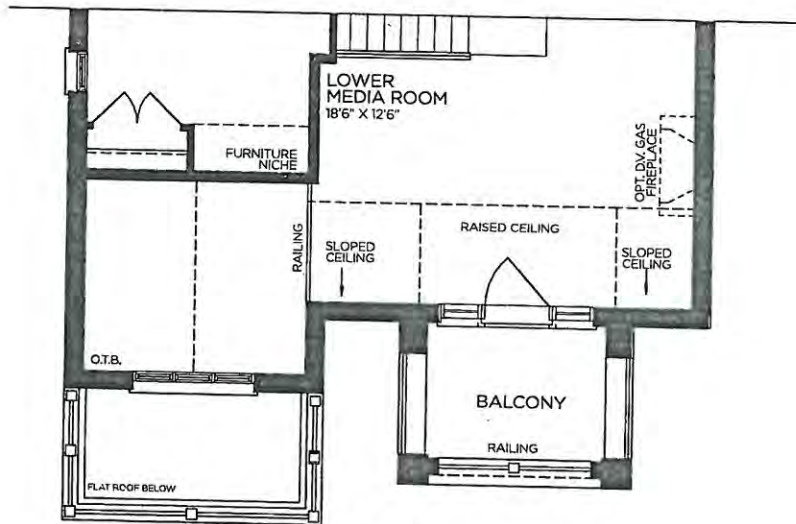


→ PART. SECOND FLOOR | ELEV. B

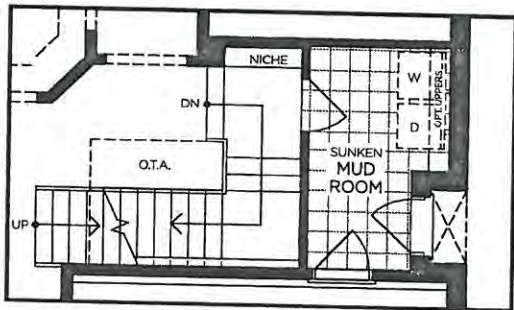

PART. OPT. GROUND FLOOR
W/ OPT. SIDE ENTRANCE | ELEV. A
(ELEV. B SIMILAR)

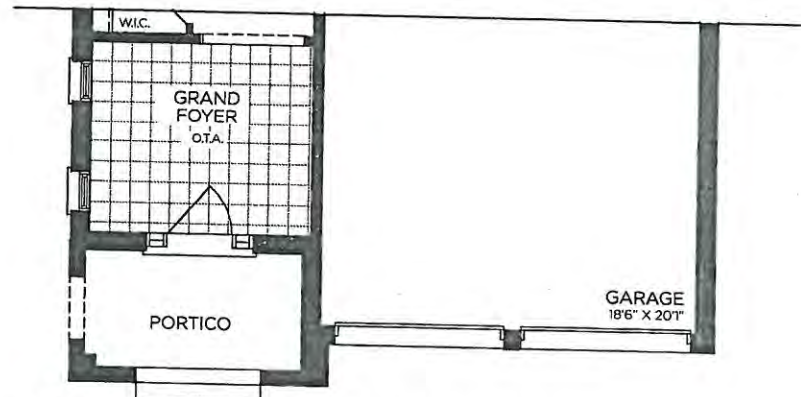

→ PART. GROUND FLOOR | ELEV. B

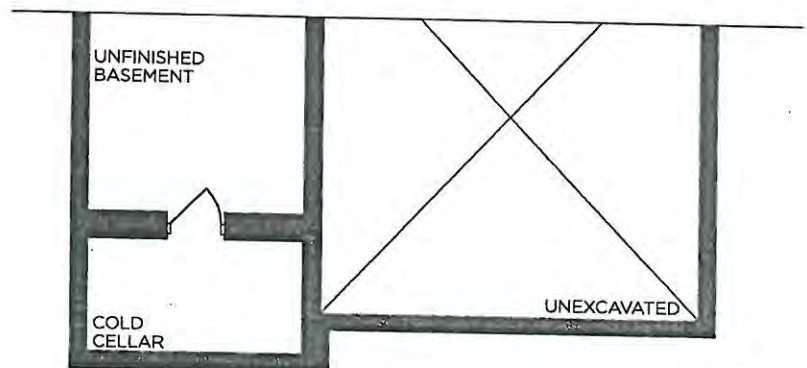

→ PART. BASEMENT | ELEV. B

VENDOR
PURCHASER
PURCHASER

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4003



SCHEDULE 'F'

PV-38*84 attached*
Sept. 30, 2020


PV-38 M.M.
Feb. 24, 2021

WOB/LOB.

The Brookside
40' SERIES

Elevation A • 3,380 sq.ft.
→ Elevation B • 3,350 sq.ft.

16x30"

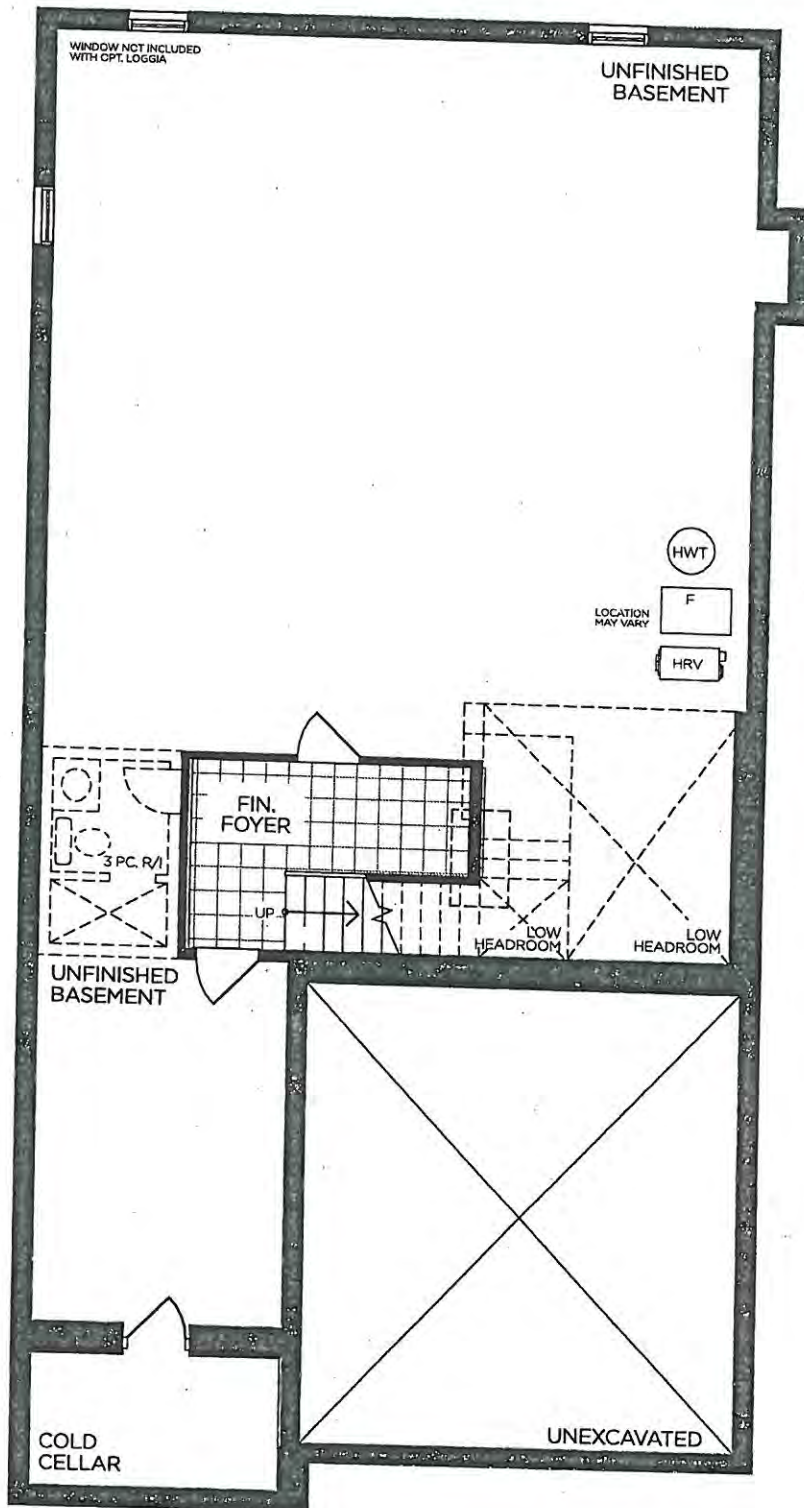

BASEMENT | ELEV. A

VENDOR


PURCHASER

PURCHASER

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4003

Am. M.
TV-38
FEB 24 2021

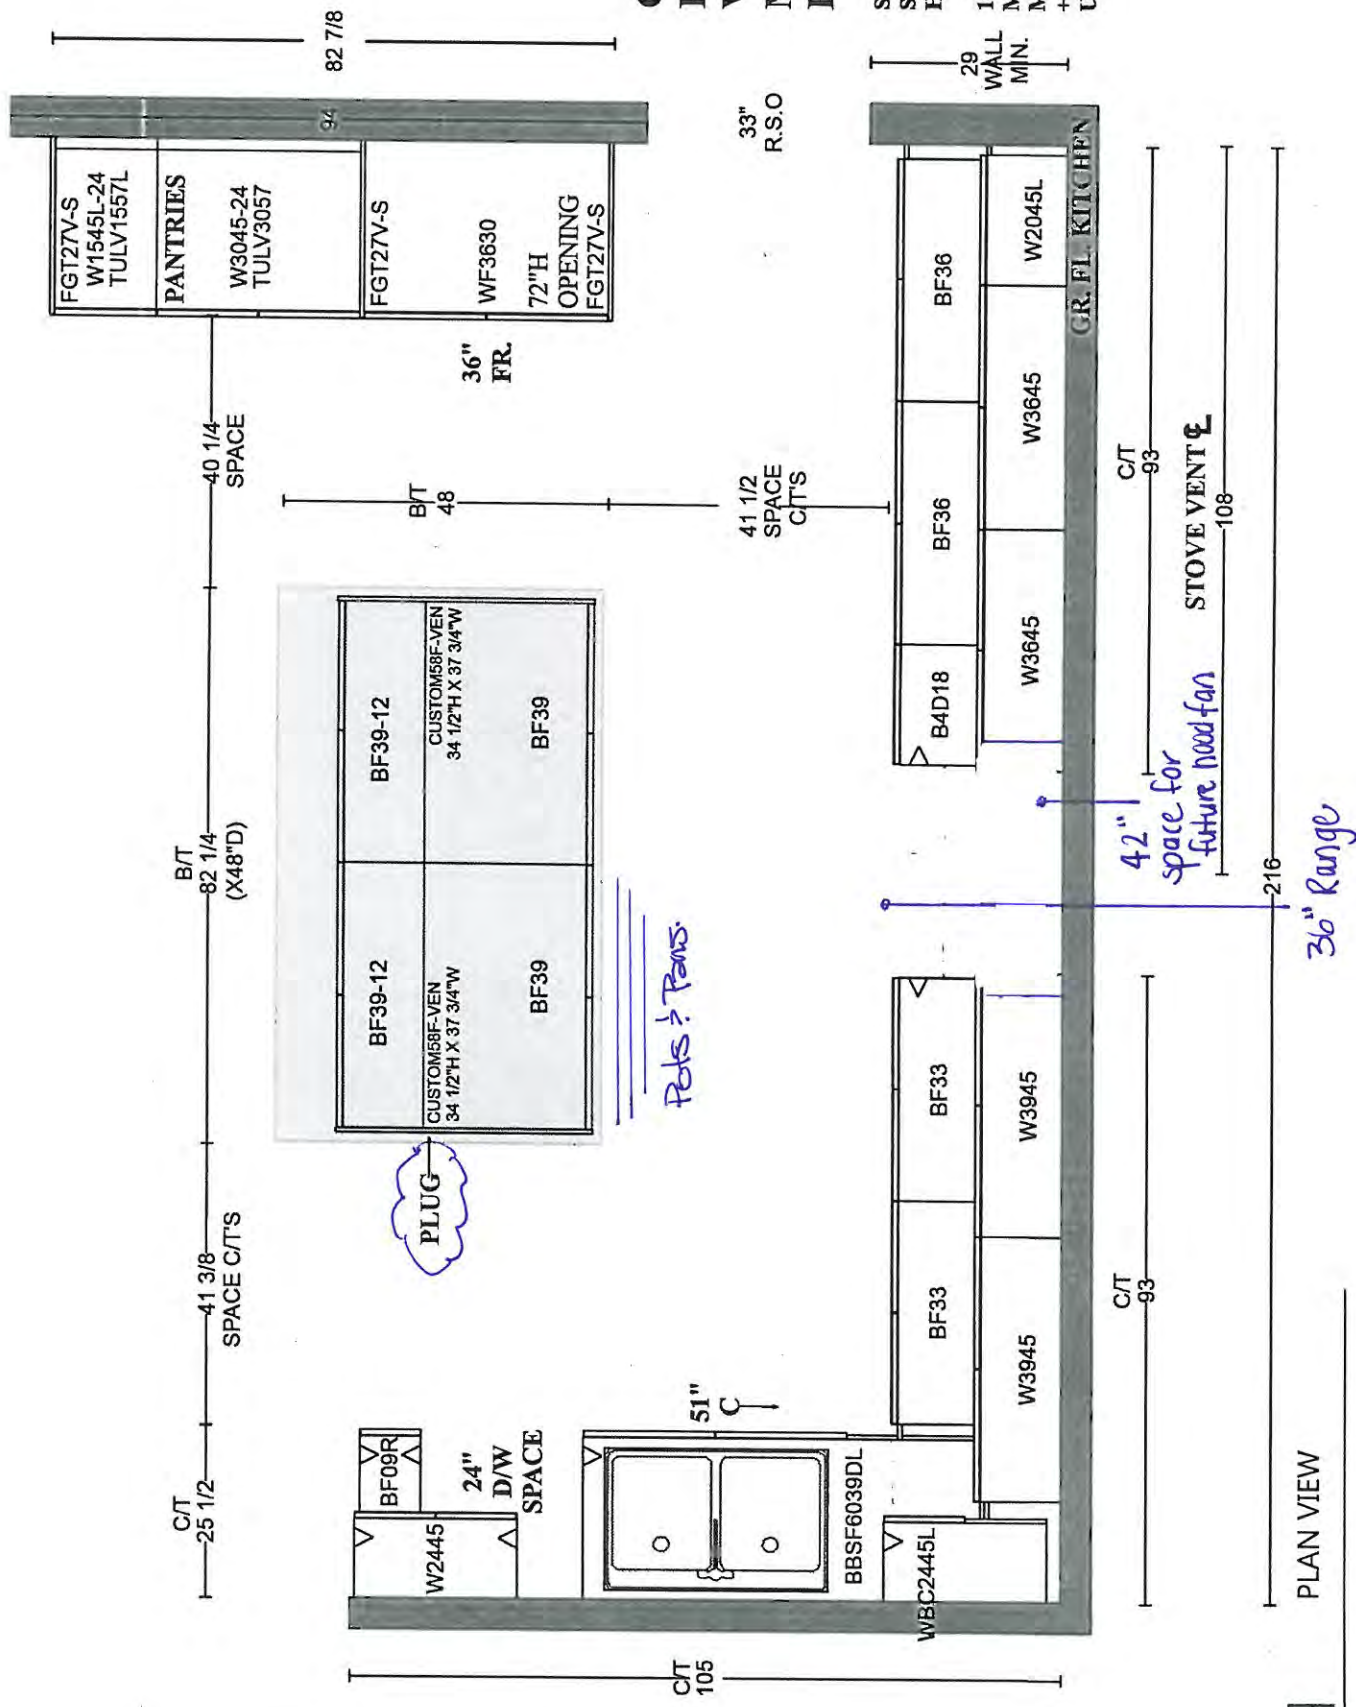

GOLDPARK HOMES
PINE VALLEY
VAUGHAN, ONTARIO
MODEL: (4003)
BROOKSIDE

SITE STANDARD: WHITE 3/4" EXTENSION
SOFT-CLOSE DRAWERS & SOFT-CLOSE
HINGES TO KITCHEN AREA


10' CEILING - 12"H COFFERED CEILING -
M.H. = 102" + 3/4"H CONTEMPORARY
MOLDING + 5 1/4"H FURRING RAIL
+ LARGE CORNICE MOLDING TO
UNDERSIDE OF BOX

PV-38
Feb. 24, 2021

GOLDPARK HOMES
PINE VALLEY
VAUGHAN, ONTARIO
MODEL: (4003) BROOKSIDE

SITE STANDARD: WHITE 3/4" EXTENSION
SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES
TO VANITIES

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH
VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE
THROUGHOUT EACH MASTER ENSUITE VANITY

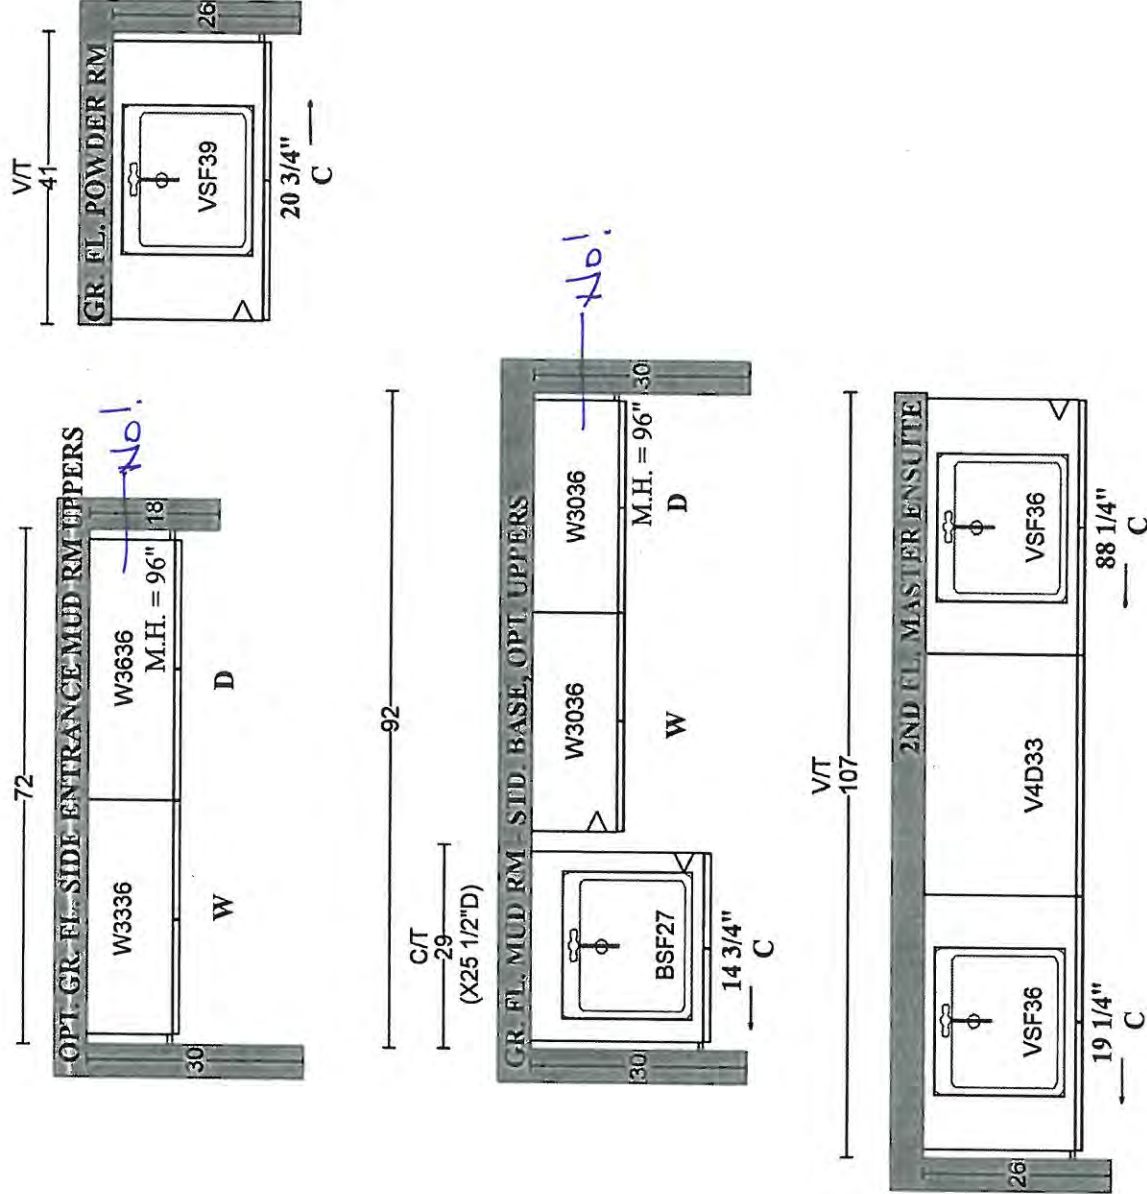

PLAN VIEW



PINE VALLEY

FOREVERGREEN

STONE COUNTERTOP EDGE PROFILES




STANDARD 2CM EASED EDGE



LOCATION:

THRU OUT




UPGRADE 3CM EASED EDGE


LOCATION:



UPGRADE 4CM MITRED EDGE



LOCATION:



UPGRADE 2CM OGEE EDGE

LOCATION:

LOT #: PV-38

DATE: Feb. 24, 2021

SIGNATURE:

SIGNATURE:

STANDARD HARDWARE / HANDLES



☒ H001-02
Kitchen



☐ H001-03



☐ H001-04



☒ H009-03
MASTER



☐ H009-09



☐ H011-03



☐ H011-05



☐ H011-06



☐ H033-01



☐ H039-03

☐ *NO HARDWARE

LOT # *PV-38*

DATE: *Feb. 24, 2021*

SIGNATURE:

M.M.

SIGNATURE:

(Red circle)

STANDARD HARDWARE / KNOBS



K002-02

Mud Room
Powder Room



K002-03

CHANGED



K002-04



K002-06



K002-05

ENS 2



K002-14



K024-03



*NO HARDWARE

LOT # PV-38

DATE: Feb. 24, 2021

SIGNATURE:



SIGNATURE:







PINE VALLEY
FOREVERGREEN

UPGRADE KITCHEN SINK

BLANCO - QUATRUS R15 U SUPER SINGLE
Stainless Steel - Undermount
32" x 18" x 9"

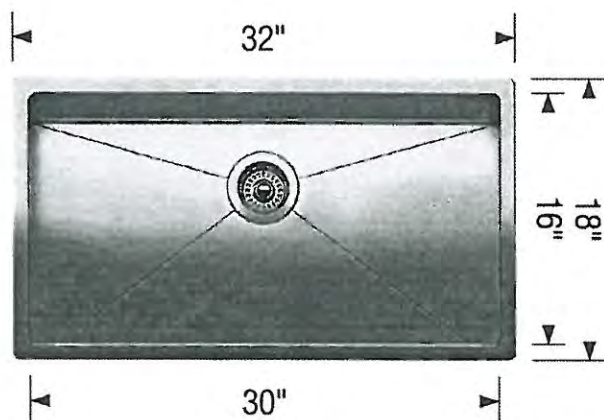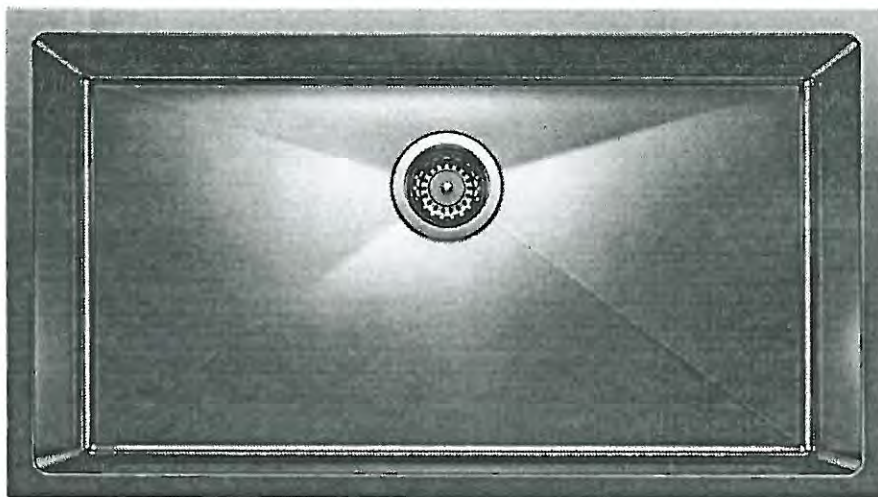

Stainless Steel

☐ GRID *— No*

MODEL 401518 Stainless Steel / ~~406347 Grid~~

Lot# *38*

Room: *KITCHEN*

Signature: *Manuela Manzi*

Date: *FEB 24 2021*

Signature:

GOLDPARK
WORTH MORE




PINE VALLEY
FOREVERGREEN

UPGRADE SHOWER HARDWARE

MT6X6

Shower Door Handle

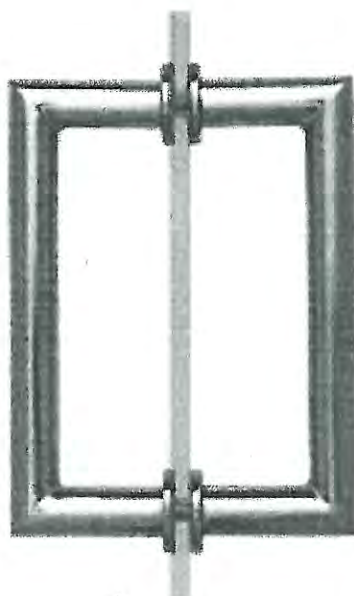

MT6X6
Shower Door Handle

6" x 6" back-to-back
3/4" dia. tube
Cut and mitred corners with
washers
(Also available single sided)

- ☒ CHROME
☐ MATTE BLACK
☐ BRUSHED GOLD

Lot#

38

Date:

FEB 24 2021

Room:


MASTER + STAGE

Signature:


Manuelle Mancini

Signature:

BATHROOM ACCESSORIES

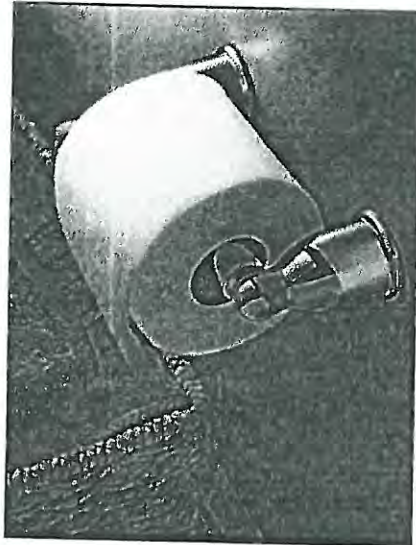

Tissue Holder
Mason - Chrome

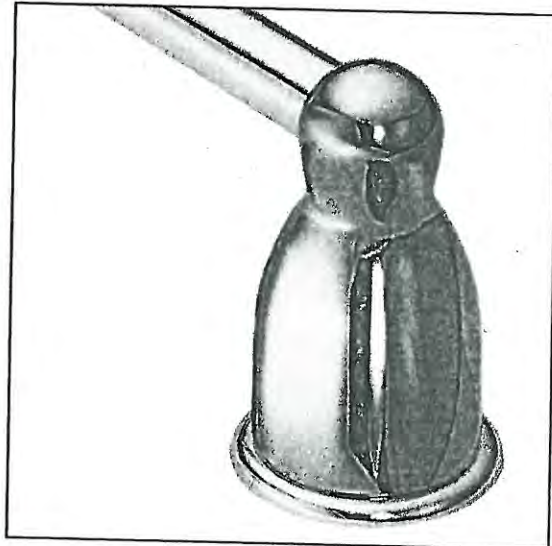

Towel Bar
Mason - Chrome

Please select one of the following:

☒ INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT
(tissue holder + towel bar) **location as per vendors discretion**

☐ ***DO NOT*** INSTALL STANDARD BATHROOM ACCESSORIES
THRU OUT **tissue holder + towel bar will not be provided**

LOT # py-38

DATE: Feb. 24, 2021

SIGNATURE: Manuela Mancini

SIGNATURE:



Project: Pine Valley

Lot: 38

Purchaser(s): Manuela Mancini & Leny Di Giandomenico

Standard Hood Fan Deletion

We acknowledge that the builder's standard hood fan will not be installed.
Do not supply, install and/or credit. We will install our own hood fan after closing.

Signature: _____

Manuela Mancini

Signature: _____

Date: Feb. 24, 2021

GOLDPARK

WORTH MORE™

TO: Gold Park Homes

DATE: Feb. 24, 2021

SITE: Pine Valley

LOT: 38

I/We the undersigned, hereby authorize Manuela Mancini
to act on my/our behalf in all matters relating to colour selection and the selection of upgrades
and extras for the above mentioned Lot, including, without limitation, signing of all documents
relating to these matters. Any and all acts carried out by Manuela Mancini
on my/our behalf shall have the same effect as acts of my/our own and are irrevocable.
The authorization is valid under further written notice from the undersigned.

Manuela Mancini

WITNESS

Name: Manuela Mancini

WITNESS

Name:

Lenny Di Giandomenico

PURCHASER

Name: Lenny Di Giandomenico

PURCHASER

Name:

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


PRODUCT

PV-38
Feb. 24, 2021

Attached



	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Overall Width (A)	29-7/8" (75.9 cm)	35-7/8" (91.1 cm)
Bull nose Height (B)	2-1/8" (5.4 cm)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)	7-1/2" (19.1 cm)
Door Height (D)	20-11/16" (52.6 cm)	20-11/16" (52.6 cm)
Door Bottom to Handle Top: RISE™ (E)	20" (50.8 cm)	20" (50.8 cm)
Door Bottom to Handle Top: NOIR™ (E)	20-5/8" (52.4 cm)	20-5/8" (52.4 cm)
Toe-Kick Height (F)	6-11/16" (17 cm)	6-11/16" (17 cm)

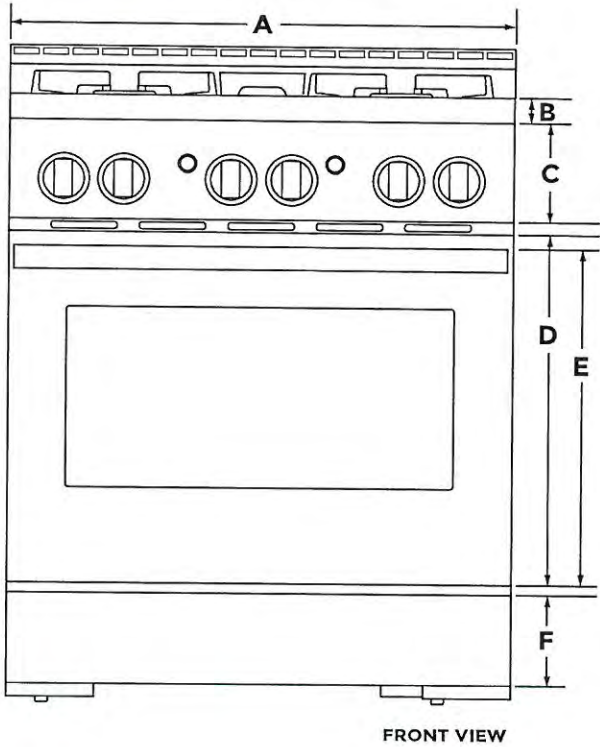

FRONT VIEW

★ **IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

Gas line not purchased from boulder


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

PV-38
Feb. 24, 2021
attached

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Depth with Control Panel Overhang (G)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth with Handle: RISE™ (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with Handle: NOIR™ (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Door Fully Open (I)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)

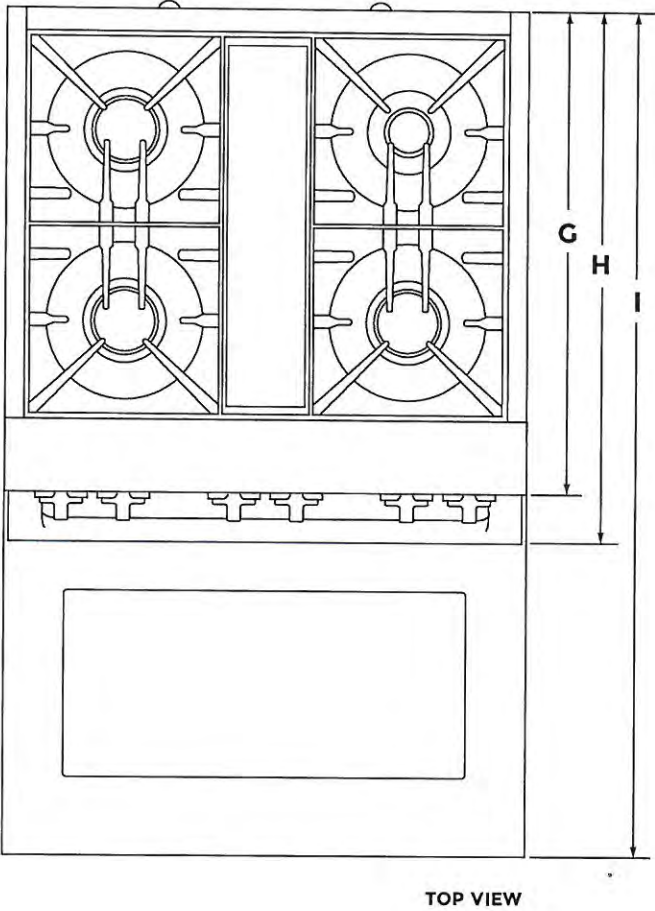

TOP VIEW

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

PV-38
Feb. 24, 2021
attached

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (38.1 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.
Opening Width (E)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

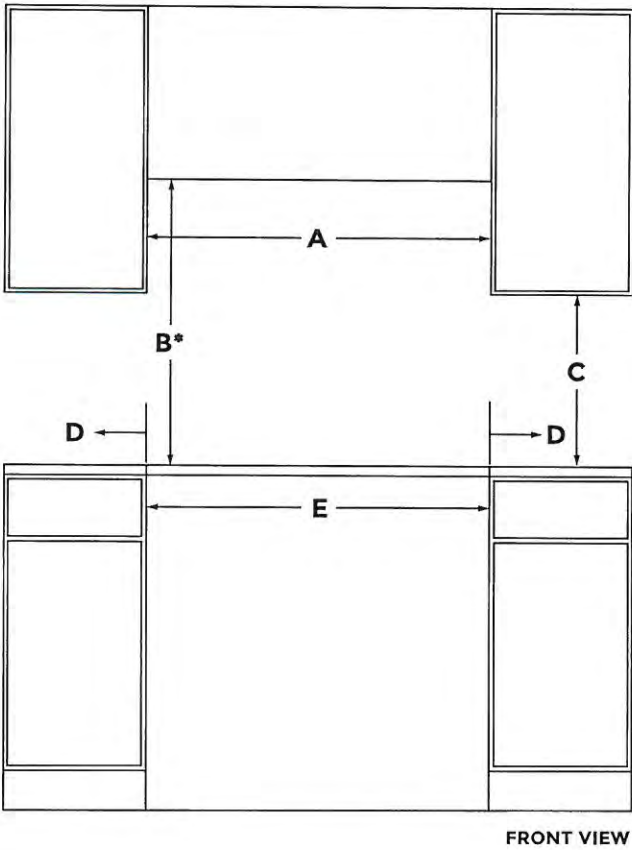

PV-38

Feb. 24, 2021

attached


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Upper Cabinet Depth (F)	13" (33 cm) max.	13" (33 cm) max.	13" (33 cm) max.
Depth to Wall (C)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required.

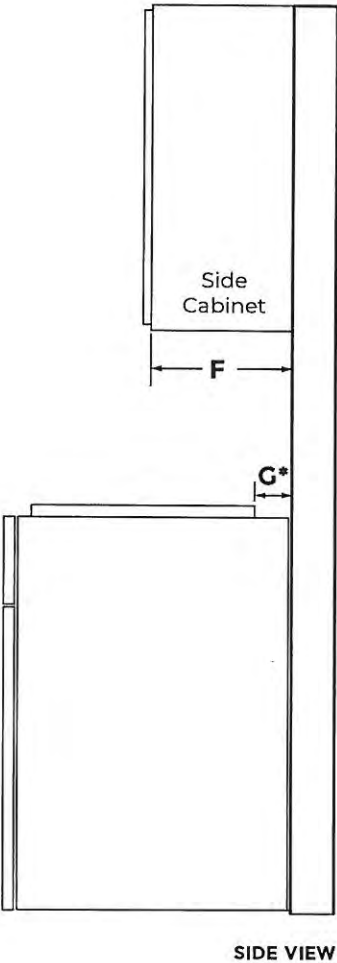

SIDE VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

PV-38
Feb. 24, 2021
attached

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Grates Top Height (A)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)
Cooking Surface Top Height (B)	36" (91.4 cm)	36" (91.4 cm)	36" (91.4 cm)
Door Top Height (C)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)
Handle Top Height: RISE™ (D)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Handle Top Height: NOIR™ (D)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)
Toe-Kick Height (E)	6-11/16" (17 cm)	6-11/16" (17 cm)	6-11/16" (17 cm)
	OPTIONAL ACCESSORIES		
Height to Top of 9" Stainless Steel Backsplash (F)	45" (114.3) min.	45" (114.3) min.	45" (114.3) min.

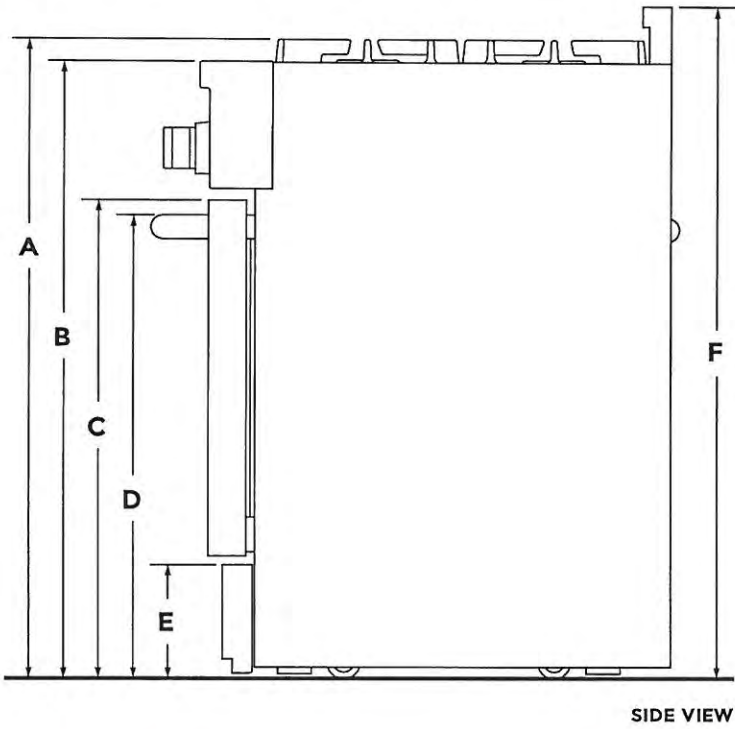

★

IMPORTANT: Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES
ELECTRICAL REQUIREMENTS

PV-38
Feb. 24, 2021


attached

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Electrical Zone Width (A)	22" (55.9 cm)	28" (71.1 cm)	40" (101.6 cm)
Electrical Zone Height (B)	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Electrical Zone Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)


ELECTRIC REQUIREMENTS
CHECKLIST

- ☐ A 240 volt, 60 Hz, fused, grounded circuit is required.
- ☐ For 30" and 36" ranges, use a 40-amp circuit.
- ☐ For 48" ranges, use a 50-amp circuit.
- ☐ A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

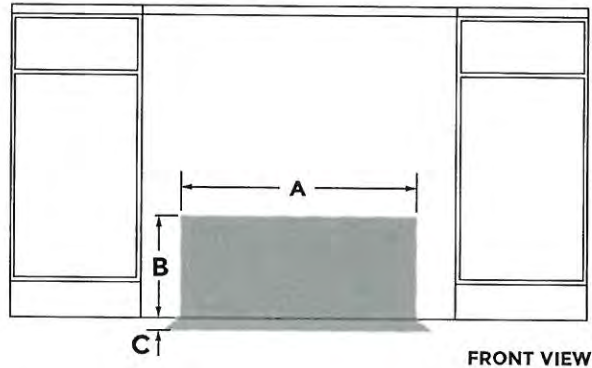

WIDTH TO ELECTRICAL CONDUIT

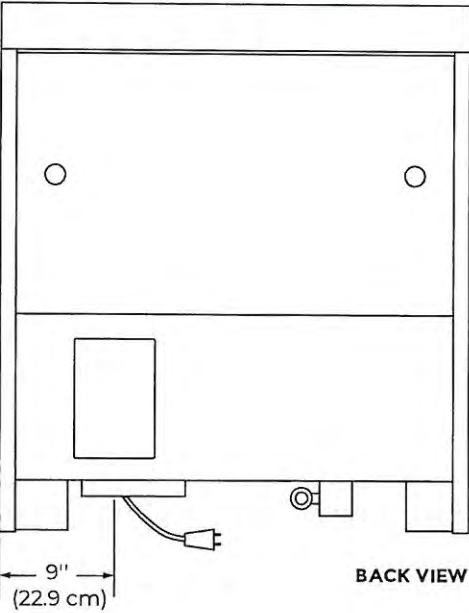

? IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY,
CALL A LICENSED, QUALIFIED ELECTRICIAN.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


GAS REQUIREMENTS

TV-38
Feb. 24, 2021


Added

	30" CONNECTED DUAL-FUEL RANGE	36" CONNECTED DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Gas Opening Width (A)	6" (15.2 cm)	14" (35.6 cm)	24" (61 cm)
Gas Opening Height (B)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Gas Opening Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)
Distance from Side Cabinet to Gas Opening (D)	6" (15.2 cm)	6" (15.2 cm)	6" (15.2 cm)
Width to Gas Inlet (E)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)

RECOMMENDED GAS ZONE

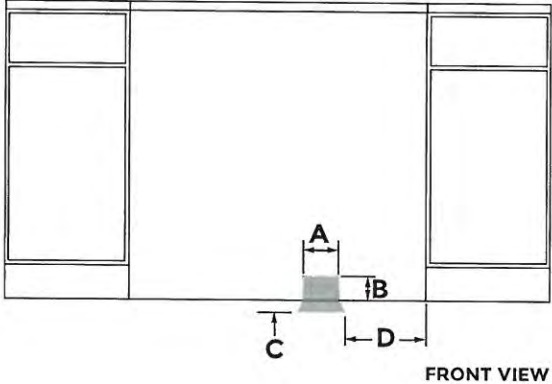

WIDTH TO GAS INLET

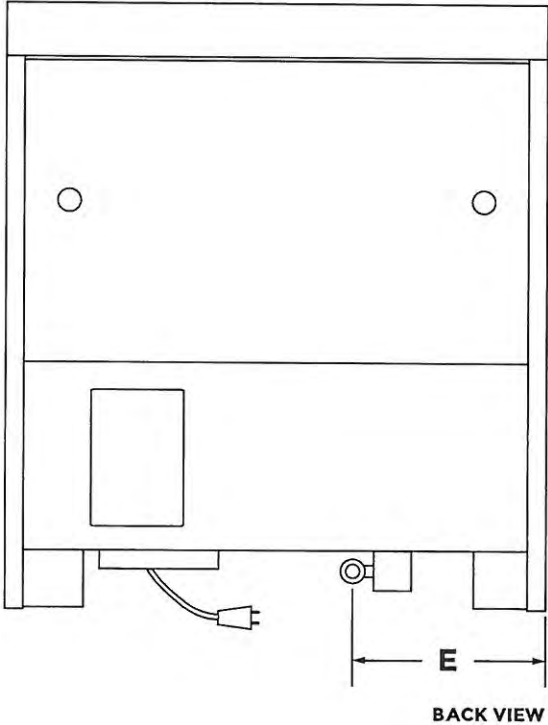

? IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

PV-38
Feb. 24, 2021
attached

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Depth with Door Fully Open (G)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)
Depth with RISE™ Handle (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with NOIR™ Handle (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth to Toe-Kick with Door (J)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Depth with RISE™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)
Depth with NOIR™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)

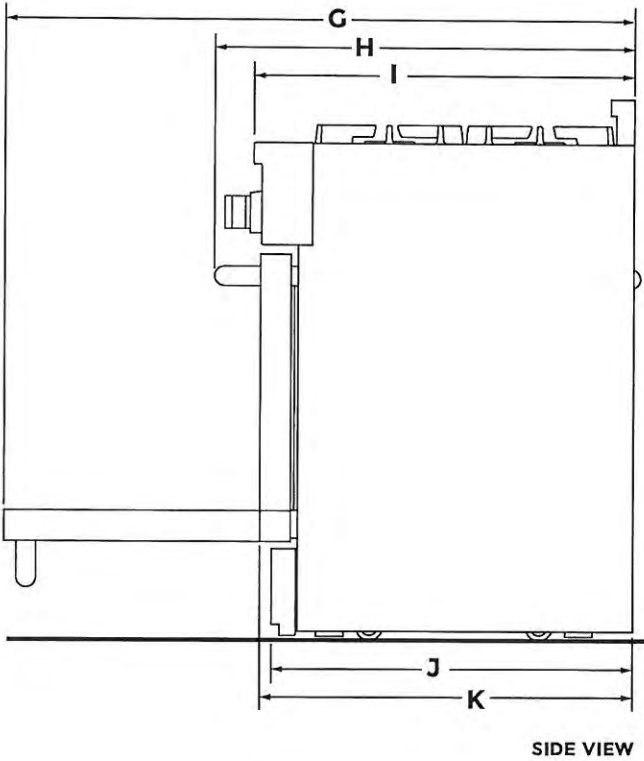




72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER


DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL – 35⁵/₈" (W) x 71⁷/₈" (H) x 30¹/₂" (depth with handles)

PRODUCT DIMENSIONS

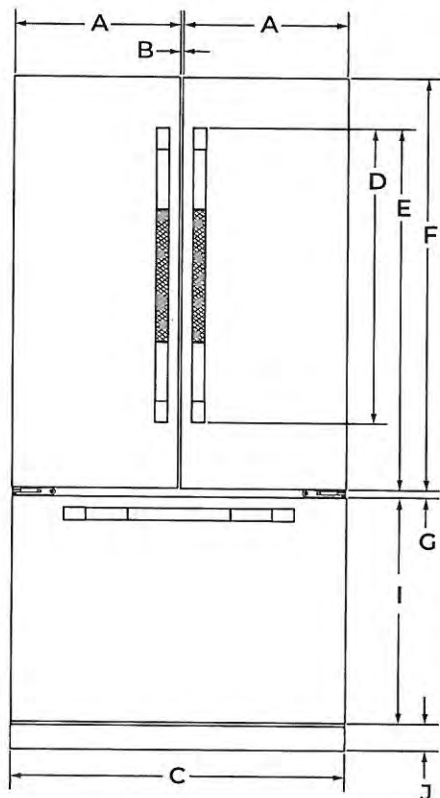

FRONT VIEW

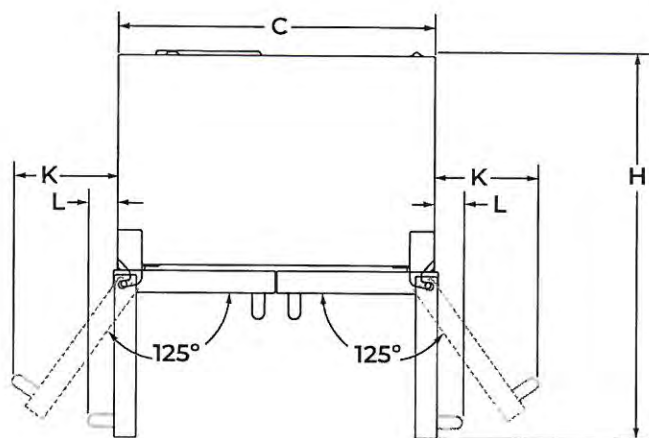

TOP VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A	Width of each door	17 ⁵ / ₈ " (44.8 cm)
B	Space between doors	3/8" (9 mm)
C	Overall width	35 ⁵ / ₈ " (90.5 cm)
D	Height of door handles (RISE™)	32 ³ / ₄ " (83.2 cm)
E	Height to top of door handles (RISE™)	38" (96.5 cm)
F	Height of doors	44 ¹ / ₈ " (112.1 cm)
G	Space between doors and drawer	1" (2.5 cm)
H	Depth with doors open 90°	44" (111.8 cm)
I	Height of drawer	23 ⁷ / ₈ " (60.6 cm)
J	Height of grille	2 ⁷ / ₈ " (7.3 cm)
K	Width from side of refrigerator to handle – door fully open 125° (RISE™)	11" (28 cm)
L	Width from side of refrigerator to handle – door open 90° (RISE™)	3 ³ / ₈ " (8.6 cm)

PV-38
Feb. 24, 2021
Attached

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

WT1423361A

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.




72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL – 35⁵/₈" (W) x 71⁷/₈" (H) x 30¹/₂" (depth with handles)

PRODUCT DIMENSIONS (CONT.)

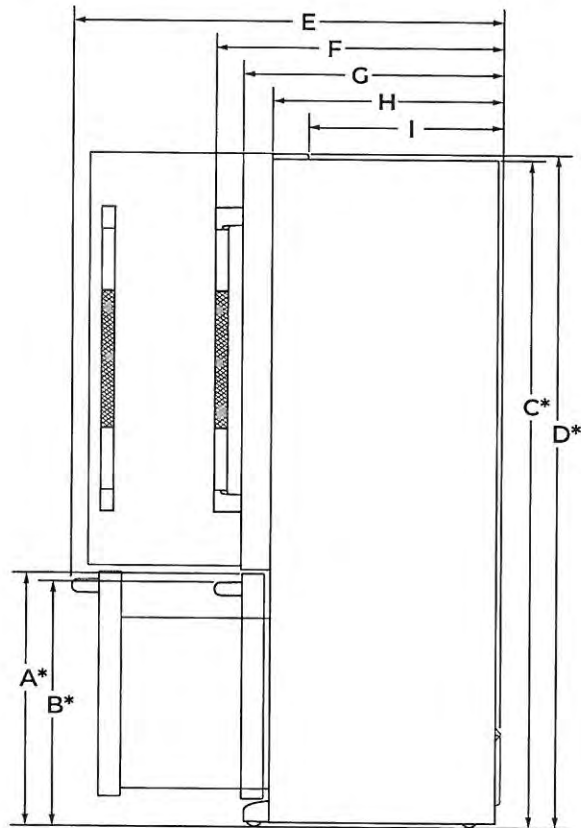

SIDE VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A*	Height to top of drawer (min.)	26 ³ / ₄ " (67.9 cm)
B*	Height to top of drawer handle (min.)	25 ³ / ₄ " (65.4 cm)
C*	Height of recessed refrigerator (min.)	71 ¹ / ₄ " (181 cm)
D*	Height to top of hinges (min.)	71 ⁷ / ₈ " (182.6 cm)
E	Depth with drawer fully open including drawer handle (min.)	44 ⁵ / ₁₆ " (112.5 cm)
F	Depth with handles (min.)	30 ¹ / ₂ " (77.5 cm)
G	Depth with doors (min.)	27 ⁵ / ₈ " (70.2 cm)
H	Depth without doors (min.)	24 ¹ / ₂ " (62.2 cm)
I	Depth to back of hinges (min.)	20 ⁵ / ₈ " (52.4 cm)

*Add 3/4" (1.9 cm) to the height dimension when leveling legs are fully extended.

PI-38
Feb. 24, 2021

attached

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

JENNAIR®

DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL – 35⅞" (W) x 71⅞" (H) x 30½" (depth with handles)

OPENING/CLEARANCE DIMENSIONS

FRONT VIEW

BACK VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A	Width (min.)	36⅞" (93 cm)
B	Minimum width from side of refrigerator to fixed wall – door open 90°	3⅜" (8.6 cm)
	Minimum width from side of refrigerator to fixed wall – door open approx. 125°	11" (28 cm)
C	Width of recommended electrical/water installation area	34" (86.4 cm)
D	Height (min.)	71⅞" (182.6 cm)
E	Height of recommended electrical installation area	10" (25.4 cm) Min. 24" (61 cm) Max.
F	Height of recommended water installation area	10" (25.4 cm)
G	Depth of recommended water installation area	1" (2.5 cm)
H	Water line location – distance from side	24⅝" (62.5 cm)
I	Water line location – distance from bottom	9⅜" (23.8 cm)
e	Recommended electrical connection location	
w	Recommended water connection location	

TV-38

Feb. 24, 2021

attached

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




24" DISHWASHER

DETAILED PLANNING DIMENSIONS GUIDE

JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
23" (W) x 33" (H) x 24" (Depth without door panel/handles)

PRODUCT DIMENSIONS

PV-38
Feb. 24, 2021
attached

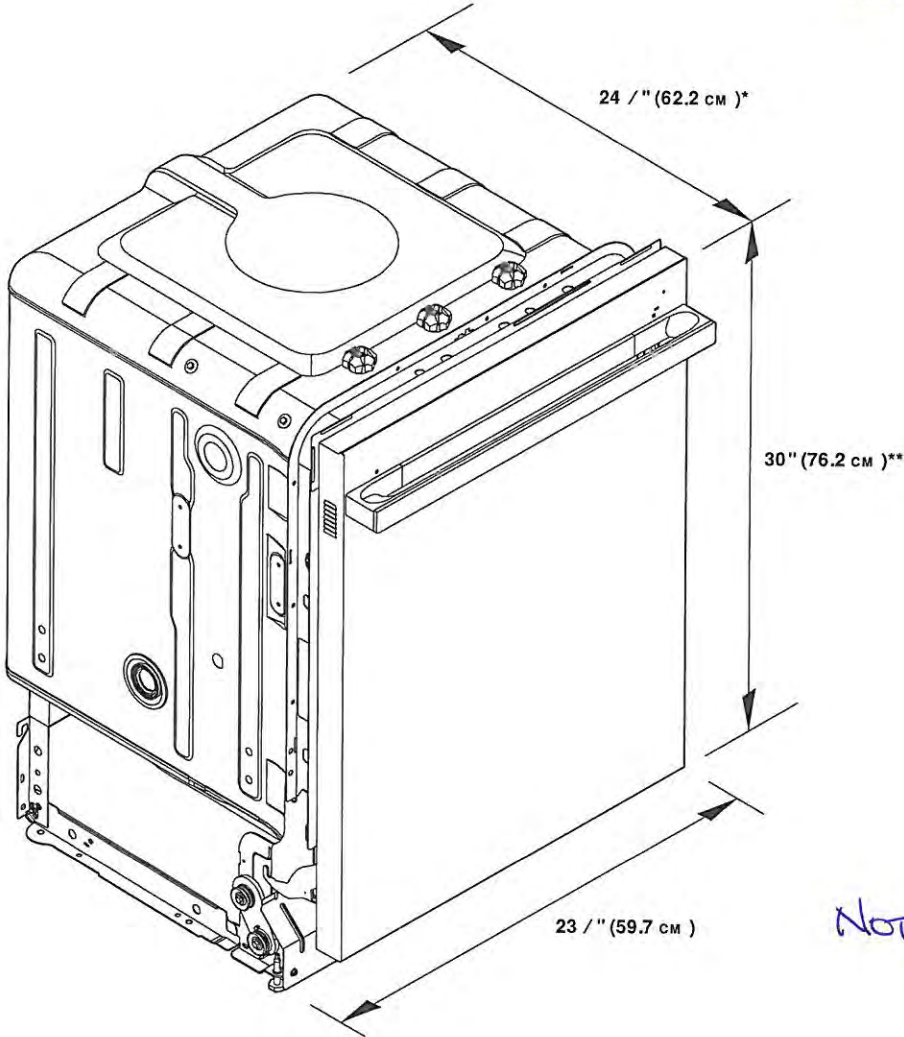

Not Panel ready

*For custom panel models, this value may change.
**With wheels removed. Add up to 1" (2.5 cm) to height with wheels and leg levelers fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.
Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



24" DISHWASHER


DETAILED PLANNING DIMENSIONS GUIDE

JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
23 /" (W) x 33 /" (H) x 24" (Depth without door panel/handles)


PRODUCT DIMENSIONS CONTD.

PJ-38
Feb. 24, 2021


attached

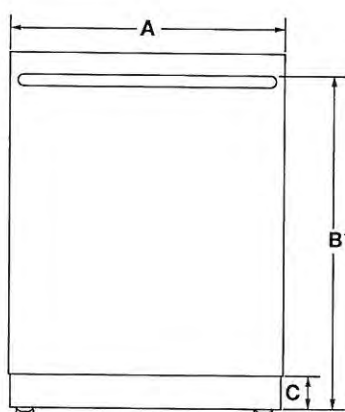

FRONT VIEW

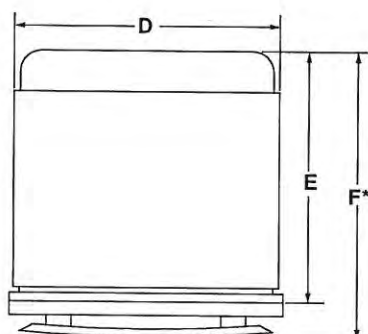

TOP VIEW

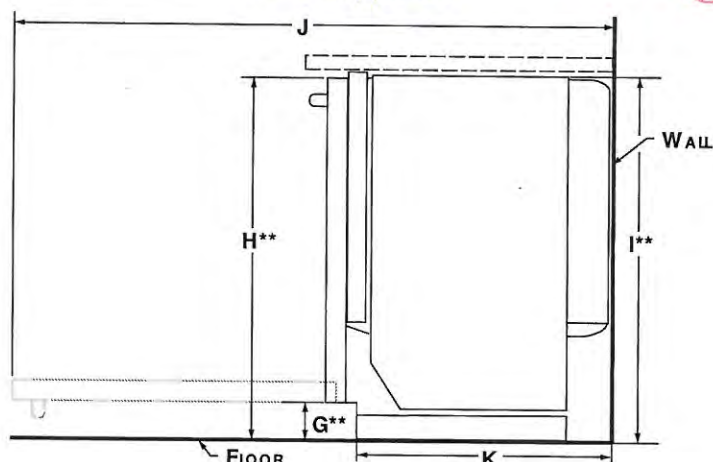

SIDE VIEW

	DESCRIPTION	JDTSS246G, JDTSS244G	JDTSS245G, JDTSS243G	JDTSS247HS
A	Width of door	23 /" (60.6 cm)	23 /" (60.6 cm)	23 /" (60.6 cm)
B*	Height to top of handle	31 /" (80.1 cm)	-	-
C	Height of adjustable toe kick	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.
D	Width of recessed dishwasher	23 /" (60.6 cm)	23 /" (60.6 cm)	23 /" (60.6 cm)
E*	Depth without handle	22 /" (57.4 cm)	22 /" (57.4 cm)	22 /" (57.4 cm)
F*	Depth with handle			
	Pro-Style® Stainless	29 /" (73.9 cm)	-	-
	Euro-Style Stainless	28 /" (72.6 cm)	-	-
	RISE™ Stainless	28 /" (72.7 cm)	-	-
	NOIR™ Stainless	28 /" (72.6 cm)	-	-
G**	Height to bottom of door	3 /" (9.4 cm)	3 /" (9.4 cm)	3 /" (9.4 cm)
H**	Height to top of door (min.)	33 /" (85.7 cm)	33 /" (85.7 cm)	33 /" (85.1 cm)
I**	Height of recessed dishwasher (min.)	33 /" (85.5 cm)	33 /" (85.5 cm)	-
J	Depth with door fully open (min.)	49 /" (125.7 cm)	49 /" (125.7 cm)	-
K	Depth with toe kick (min.)	20 /" (52.9 cm)	20 /" (52.9 cm)	21" (533 mm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



24" DISHWASHER


DETAILED PLANNING DIMENSIONS GUIDE

JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
23 7/8" (W) x 33 1/2" (H) x 24" (Depth without door panel/handles)


PN-38
Feb. 24, 2021

attached


OPENING CLEARANCE DIMENSIONS

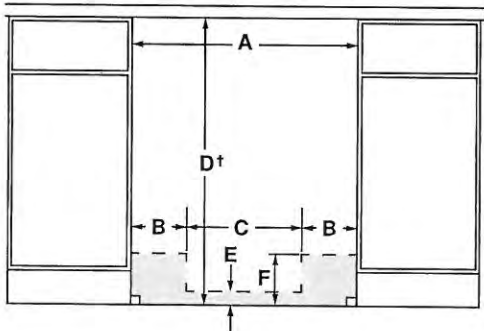

FRONT VIEW

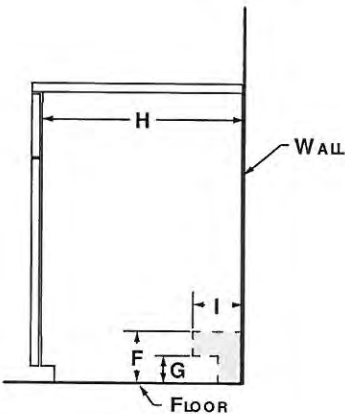

SIDE VIEW



BACK VIEW

	DESCRIPTION	JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
A	Width (min.)	24" (61cm)
B	Width of possible utility installation area (back wall)	6 7/8" (17.2 cm)
C	Width of clear area (back wall)	10 1/8" (26.7 cm)
D†	Height with wheels removed (min.)	34" (86.4 cm)
E	Height of possible utility installation area (back wall)	2 1/8" (6.4 cm)
F	Height of possible utility installation area (back/side wall)	6 1/8" (15.9 cm)
G	Height of clear area (side wall)	3" (7.6 cm)
H	Depth (min.)	24" (61cm)
I	Depth of utility location (side wall)	4" (10.2 cm)
Recommended drain connection location – closest to sink		1 1/8" (3.8 cm) dia.
Recommended electrical connection location – right-hand side or back wall		1 1/8" (3.8 cm) dia.
Recommended water connection location – left-hand side or back wall		1/2" (1.3 cm) dia.

†Measured from the lowest point on the underside of countertop.

NOTE: Shaded areas indicate recommended locations of electrical, water and drain connections.

LOCATION REQUIREMENTS

Corner locations require a 2" (5.1cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 A power supply cord, rated 120/240 V minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 A circuit for a gas dryer or 30 A circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

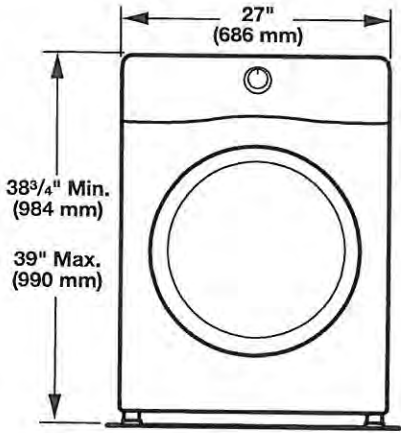


Side view:

Whirlpool® Models

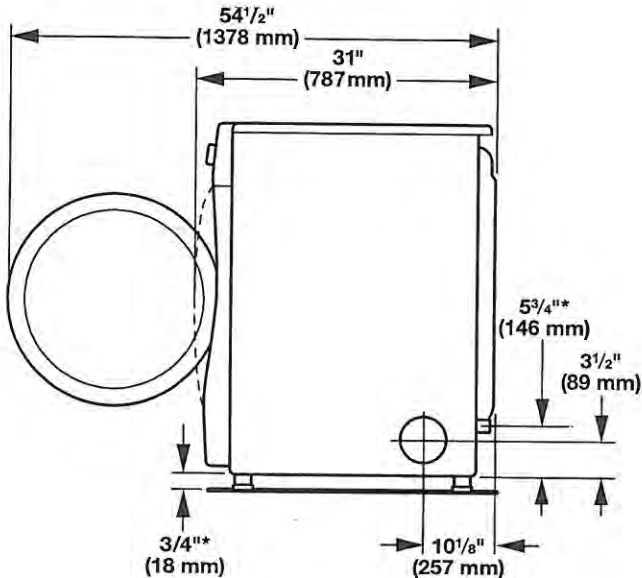

*Approx. measurement


Maytag® Models

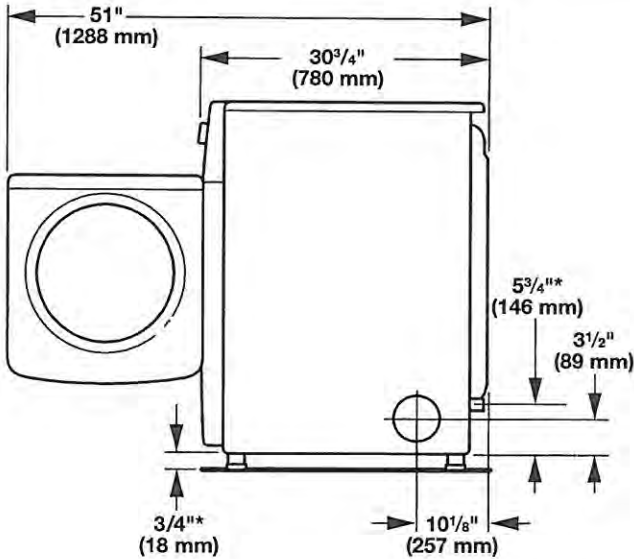


*Approx. measurement

PV-38 *attached*
Feb. 14, 2021


Custom under-counter installation:

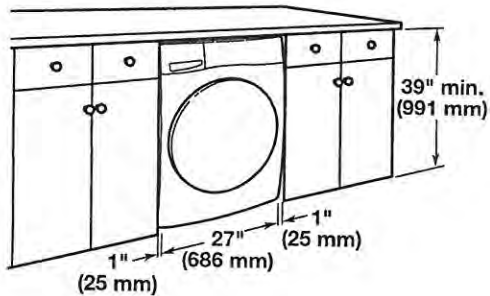

Recessed area or closet installation:

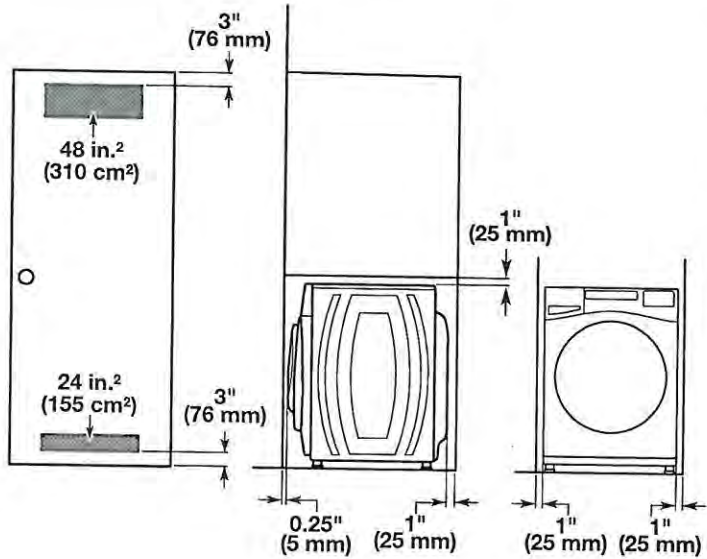

Custom cabinet installation:

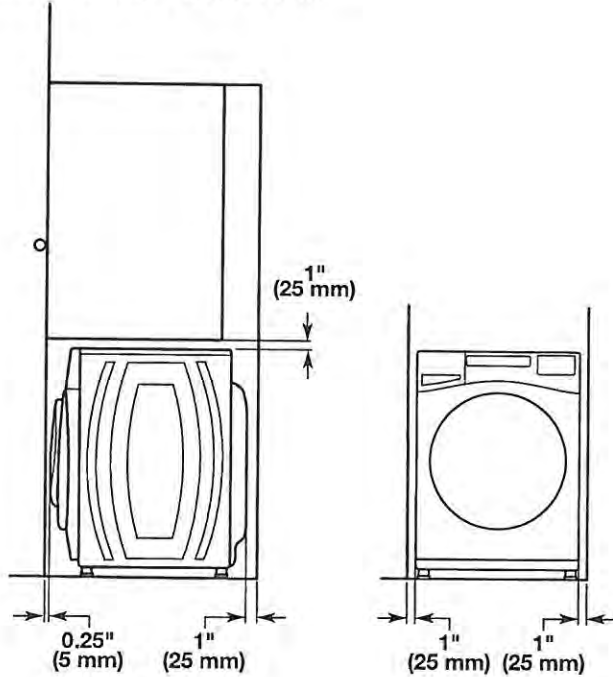


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

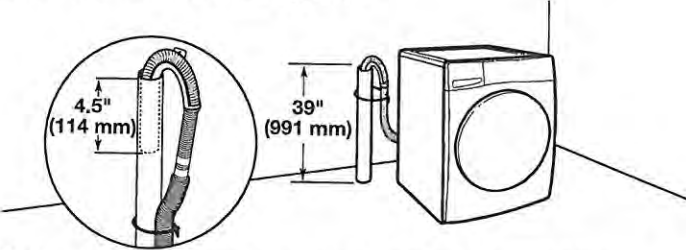


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 39" (991 mm) from the floor; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

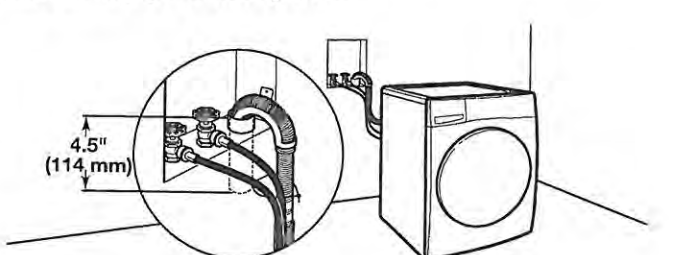


See requirements for floor standpipe drain system.

Laundry tub drain system

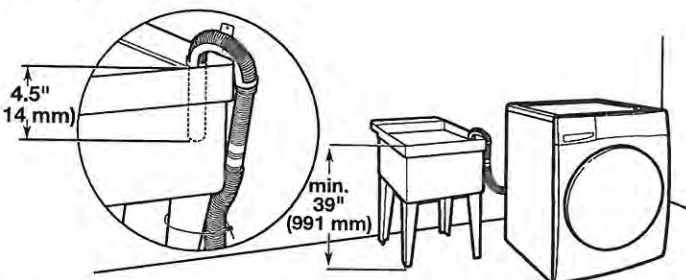

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.44 m) from bottom of washer.

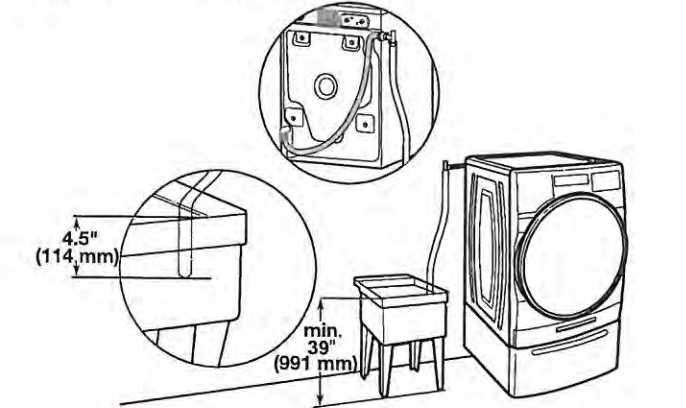

PV-38 attached
Feb, 24, 2021

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft. (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft. (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).



IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool® Models*

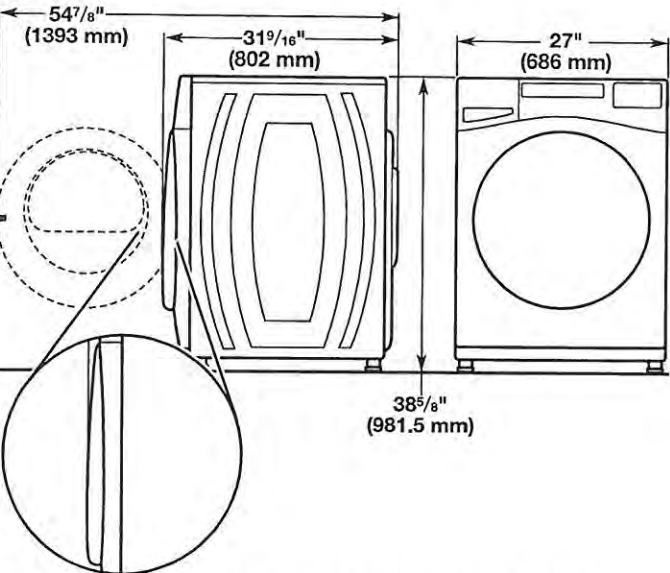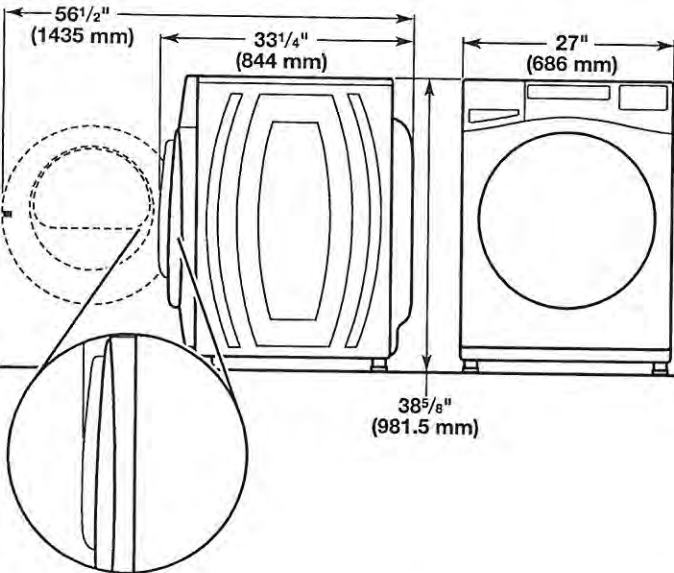


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag® Models

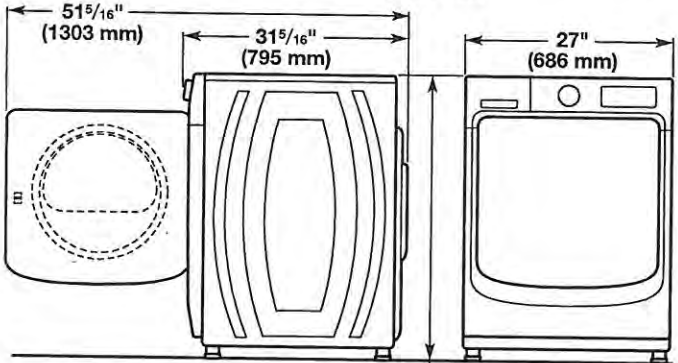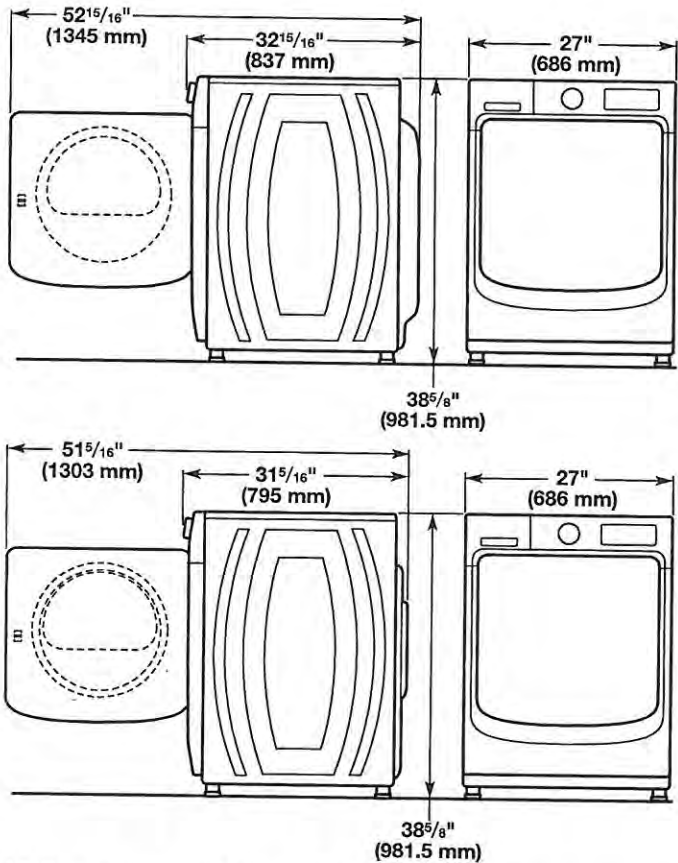


All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

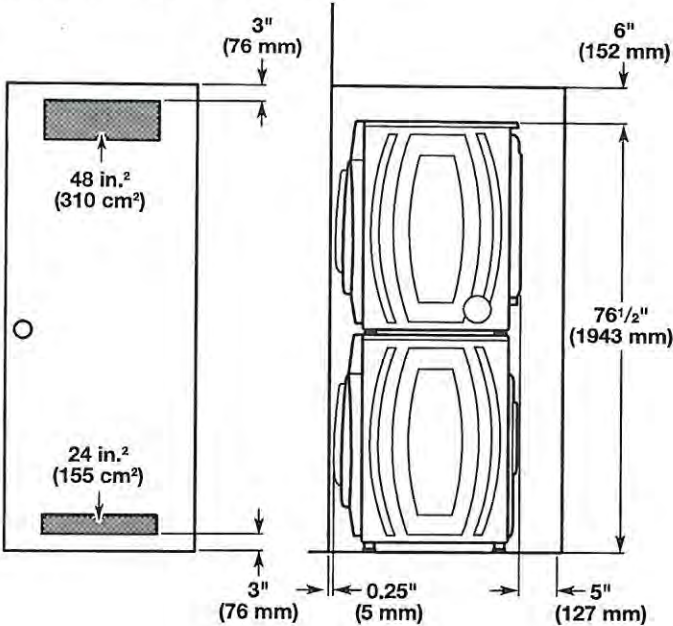

PV-38. *attached*
Feb. 24, 2021

Back view:

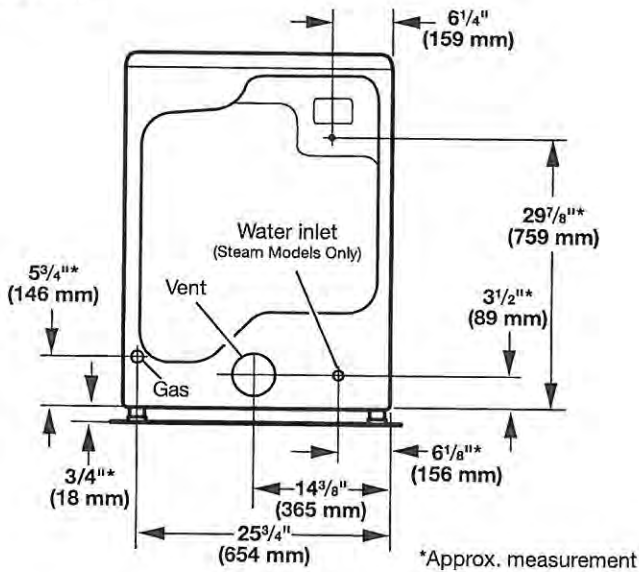

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required. Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

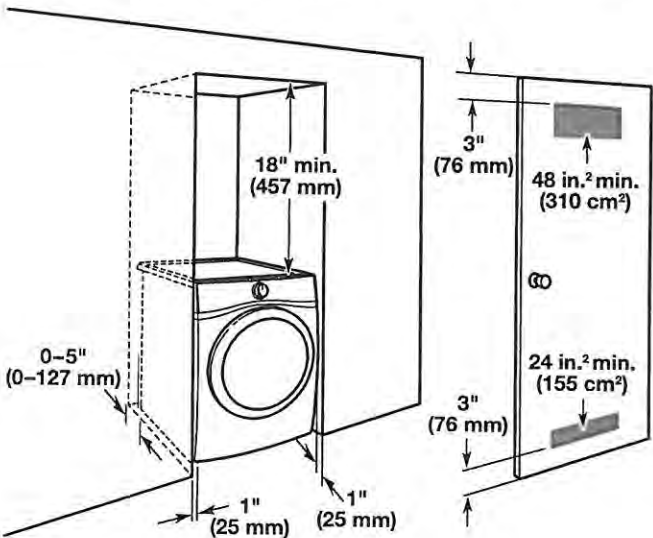

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

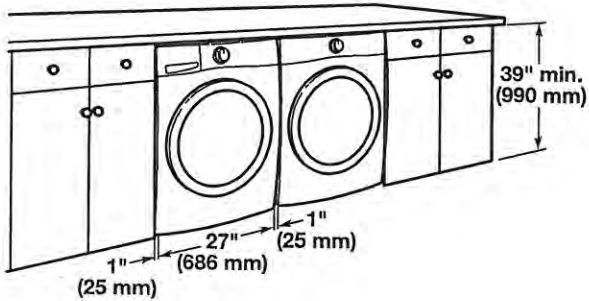

Mobile home – Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

PV-38 *attached*
Feb. 24, 2021

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES
PRODUCT

PV-38
Feb. 24, 2021

LD M.M.



	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Overall Width (A)	29-7/8" (75.9 cm)	35-7/8" (91.1 cm)
Bullnose Height (B)	2-1/8" (5.4 cm)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)	7-1/2" (19.1 cm)
Door Height (D)	20-11/16" (52.6 cm)	20-11/16" (52.6 cm)
Door Bottom to Handle Top, RISE* (E)	20" (50.8 cm)	20" (50.8 cm)
Door Bottom to Handle Top, NOIR* (E)	20-5/8" (52.4 cm)	20-5/8" (52.4 cm)
Toe-Kick Height (F)	6-11/16" (17 cm)	6-11/16" (17 cm)

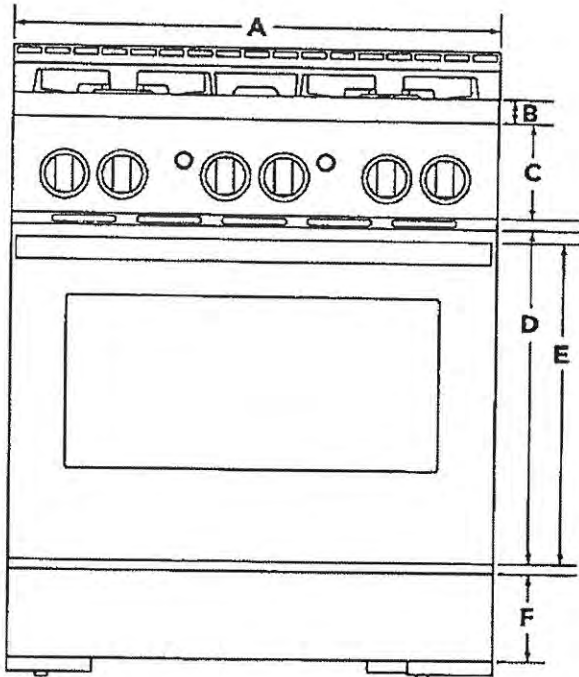

FRONT VIEW



IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts, or beginning installation. All Jennair® appliances are appropriately UL, CUL or ESA approved.

Gas line not purchased from haulder

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

PRODUCT

PV-38
Feb. 24, 2021

YD M/M

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE
Depth with Control Panel Overhang (G)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth with Handle: RISE™ (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with Handle: NOIR™ (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Door Fully Open (I)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)

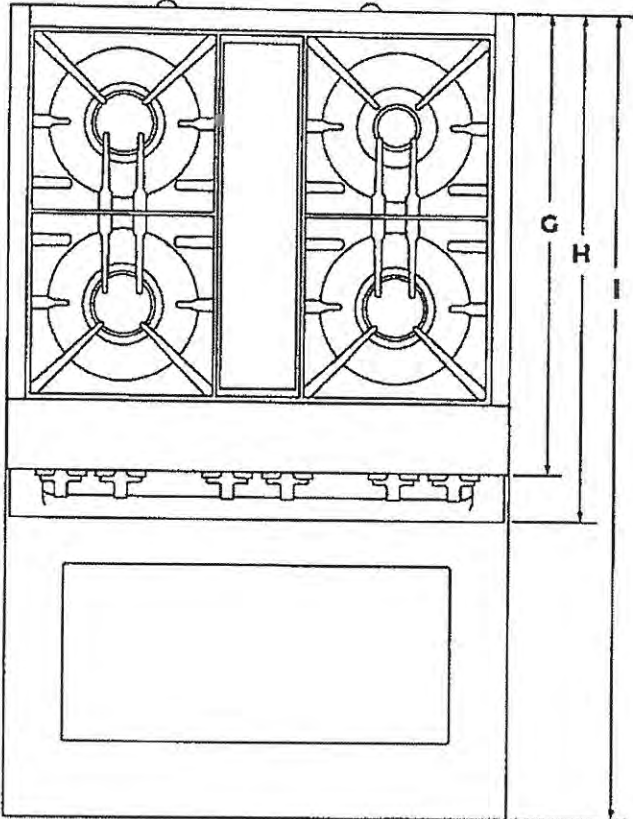

TOP VIEW

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES
OPENING AND CLEARANCE

PV-38
Feb. 24, 2021



	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.
Opening Width (E)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

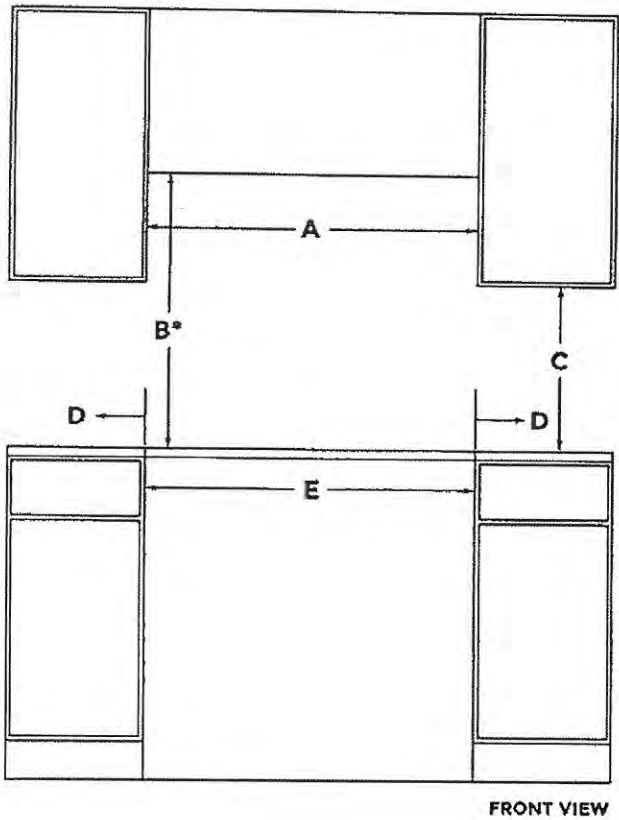

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

PV-38
Feb. 24, 2021


	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Upper Cabinet Depth (F)	13" (33 cm) max.	13" (33 cm) max.	13" (33 cm) max.
Depth to Wall (G)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 1-1/2" (3.8 cm) minimum clearance is required

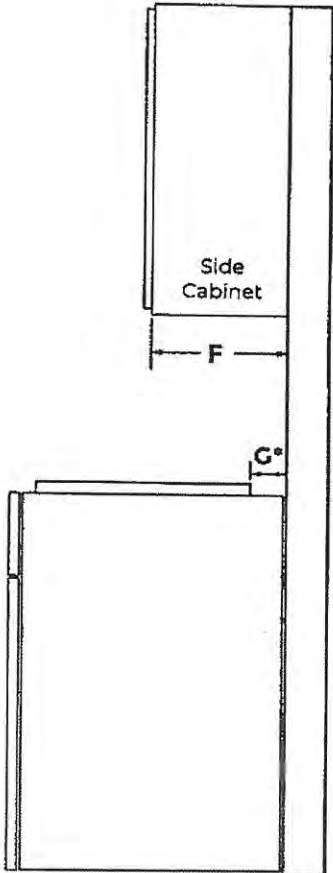

SIDE VIEW

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

PRODUCT

FN-38
Feb. 24, 2021



	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Grates Top Height (A)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)
Cooking Surface Top Height (B)	36" (91.4 cm)	36" (91.4 cm)	36" (91.4 cm)
Door Top Height (C)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)
Handle Top Height: RISE™ (D)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Handle Top Height: NOIR™ (D)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)
Toe-Kick Height (E)	6-11/16" (17 cm)	6-11/16" (17 cm)	6-11/16" (17 cm)
	OPTIONAL ACCESSORIES		
Height to Top of 9" Stainless Steel Backsplash (F)	45" (114.3) min.	45" (114.3) min.	45" (114.3) min.

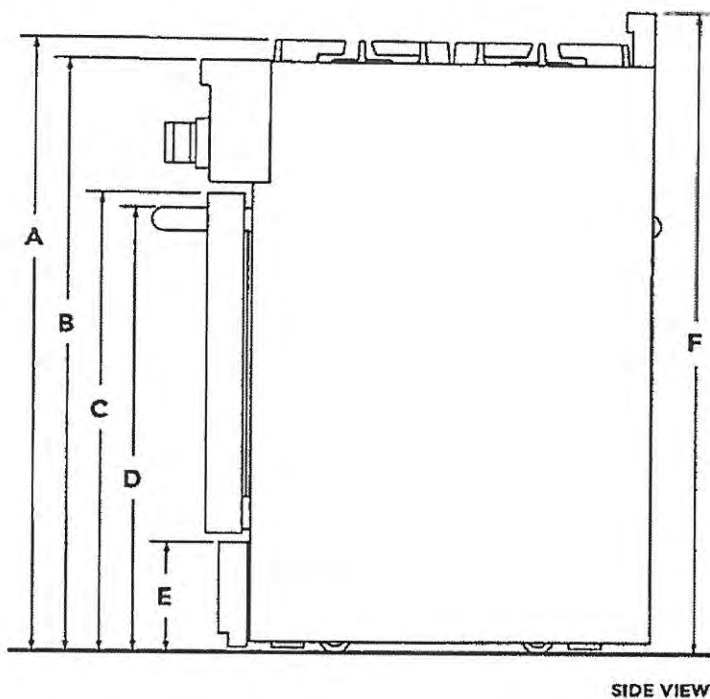

SIDE VIEW

★ **IMPORTANT:** Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/8" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

ELECTRICAL REQUIREMENTS


PV-38 ~~22~~ ~~mm~~
 Feb. 24, 2021

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Electrical Zone Width (A)	22" (55.9 cm)	28" (71.1 cm)	40" (101.6 cm)
Electrical Zone Height (B)	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Electrical Zone Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)


ELECTRIC REQUIREMENTS CHECKLIST

- ☐ A 240 volt, 60 Hz, fused, grounded circuit is required.
- ☐ For 30" and 36" ranges, use a 40-amp circuit.
- ☐ For 48" ranges, use a 50-amp circuit.
- ☐ A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

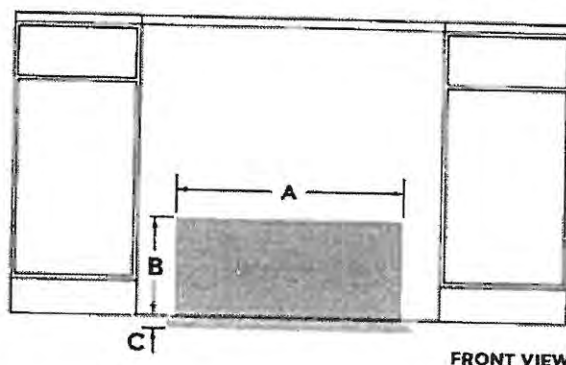

WIDTH TO ELECTRICAL CONDUIT

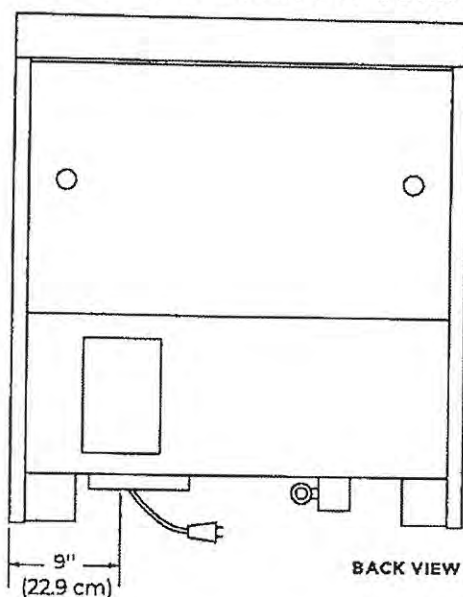

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY,
 CALL A LICENSED, QUALIFIED ELECTRICIAN.

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

GAS REQUIREMENTS


TV-38
Feb. 24, 2021

	30" CONNECTED DUAL-FUEL RANGE	36" CONNECTED DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Gas Opening Width (A)	6" (15.2 cm)	14" (35.6 cm)	24" (61 cm)
Gas Opening Height (B)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Gas Opening Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)
Distance from Side Cabinet to Gas Opening (D)	6" (15.2 cm)	6" (15.2 cm)	6" (15.2 cm)
Width to Gas Inlet (E)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)

RECOMMENDED GAS ZONE

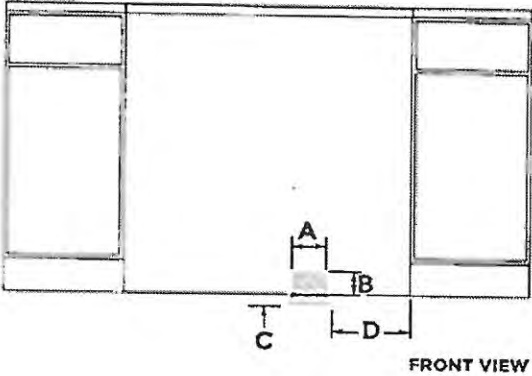

WIDTH TO GAS INLET

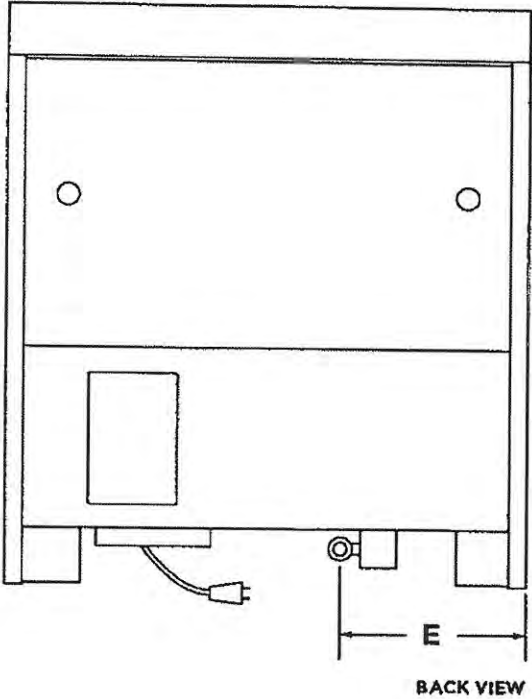

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY,
CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.

DIMENSIONS


JENNAIR® DUAL-FUEL RANGES

PRODUCT

PV-38
Feb. 24, 2021

22 M.M.

	30" DUAL-FUEL RANGE	36" DUAL-FUEL RANGE	48" DUAL-FUEL RANGE
Depth with Door Fully Open (G)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)
Depth with RISE™ Handle (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with NOIR™ Handle (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth to Toe-Kick with Door (J)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Depth with RISE™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)
Depth with NOIR™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)

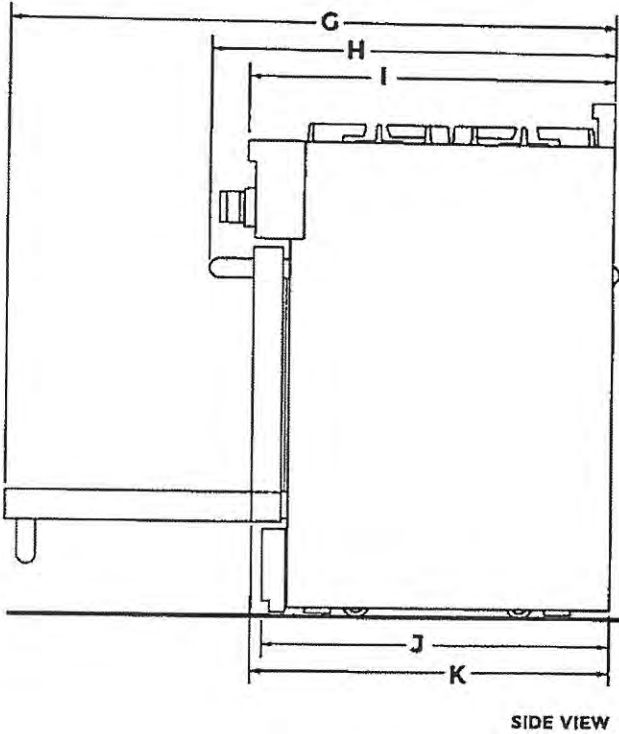




72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER


DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL - 35 $\frac{5}{8}$ " (W) x 71 $\frac{1}{2}$ " (H) x 30 $\frac{1}{2}$ " (depth with handles)

PRODUCT DIMENSIONS

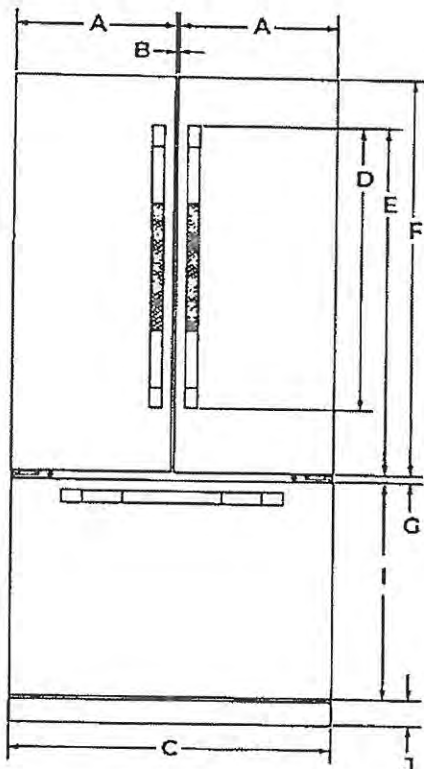

FRONT VIEW

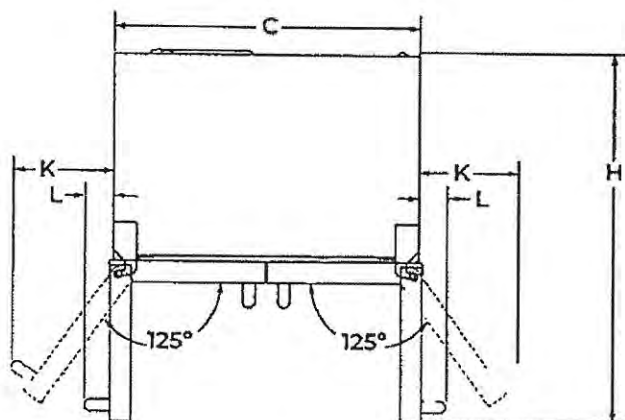

TOP VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A	Width of each door	17 $\frac{5}{8}$ " (44.8 cm)
B	Space between doors	3/8" (9 mm)
C	Overall width	35 $\frac{5}{8}$ " (90.5 cm)
D	Height of door handles (RISE™)	32 $\frac{3}{4}$ " (83.2 cm)
E	Height to top of door handles (RISE™)	38" (96.5 cm)
F	Height of doors	44 $\frac{1}{8}$ " (112.1 cm)
G	Space between doors and drawer	1" (2.5 cm)
H	Depth with doors open 90°	44" (111.8 cm)
I	Height of drawer	23 $\frac{7}{8}$ " (60.6 cm)
J	Height of grille	2 $\frac{1}{8}$ " (7.3 cm)
K	Width from side of refrigerator to handle – door fully open 125° (RISE™)	11" (28 cm)
L	Width from side of refrigerator to handle – door open 90° (RISE™)	3 $\frac{3}{8}$ " (8.6 cm)

PV-38
Feb. 24, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

W11423361A

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.




72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER

DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL - 35⁵/₈" (W) x 71⁷/₈" (H) x 30¹/₂" (depth with handles)

PRODUCT DIMENSIONS (CONT.)

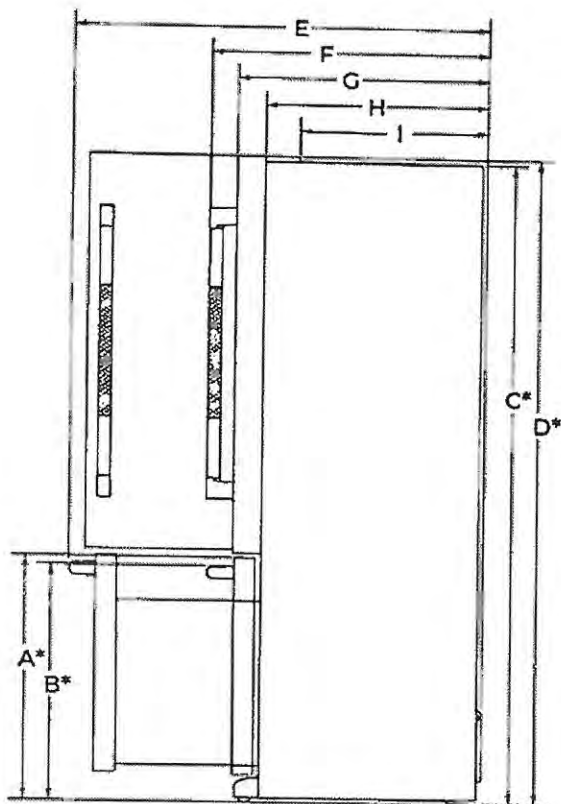

SIDE VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A*	Height to top of drawer (min.)	26 ³ / ₄ " (67.9 cm)
B*	Height to top of drawer handle (min.)	25 ³ / ₄ " (65.4 cm)
C*	Height of recessed refrigerator (min.)	71 ¹ / ₄ " (181 cm)
D*	Height to top of hinges (min.)	71 ⁵ / ₈ " (182.6 cm)
E	Depth with drawer fully open including drawer handle (min.)	44 ⁵ / ₁₆ " (112.5 cm)
F	Depth with handles (min.)	30 ¹ / ₂ " (77.5 cm)
G	Depth with doors (min.)	27 ⁵ / ₈ " (70.2 cm)
H	Depth without doors (min.)	24 ¹ / ₂ " (62.2 cm)
I	Depth to back of hinges (min.)	20 ⁵ / ₈ " (52.4 cm)

*Add 3/4" (1.9 cm) to the height dimension when leveling legs are fully extended.

PN-38

Feb. 14, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




72" COUNTER-DEPTH FRENCH DOOR REFRIGERATOR WITH INTERNAL DISPENSER


DETAILED PLANNING DIMENSIONS GUIDE

JFFCF72DKL – 35 $\frac{5}{8}$ " (W) x 71 $\frac{7}{8}$ " (H) x 30 $\frac{1}{2}$ " (depth with handles)

OPENING/CLEARANCE DIMENSIONS

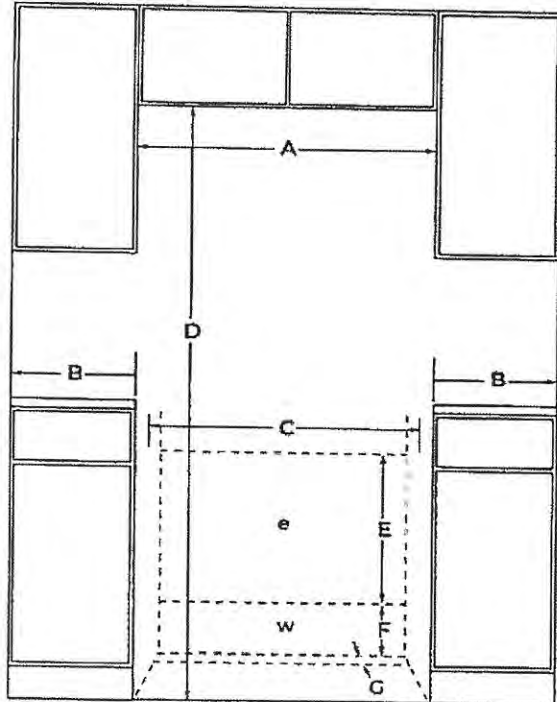

FRONT VIEW

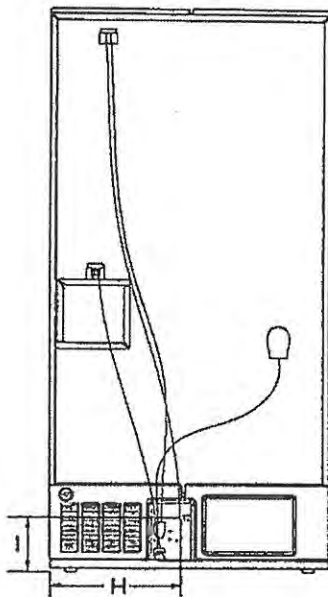

BACK VIEW

DIMENSION	DESCRIPTION	JFFCF72DKL
A	Width (min.)	36 $\frac{5}{8}$ " (93 cm)
B	Minimum width from side of refrigerator to fixed wall – door open 90°	3 $\frac{3}{8}$ " (8.6 cm)
	Minimum width from side of refrigerator to fixed wall – door open approx. 125°	11" (28 cm)
C	Width of recommended electrical/water installation area	34" (86.4 cm)
D	Height (min.)	71 $\frac{7}{8}$ " (182.6 cm)
E	Height of recommended electrical installation area	10" (25.4 cm) Min. 24" (61 cm) Max.
F	Height of recommended water installation area	10" (25.4 cm)
G	Depth of recommended water installation area	1" (2.5 cm)
H	Water line location – distance from side	24 $\frac{3}{8}$ " (62.5 cm)
I	Water line location – distance from bottom	9 $\frac{1}{8}$ " (23.8 cm)
e	Recommended electrical connection location	
w	Recommended water connection location	

TV-28
Feb. 24, 2021

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.




24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JD TSS246G, JD TSS244G, JD TSS245G, JD TSS243G, JD TSS247HS
23" (W) x 33" (H) x 24" (Depth without door panel/handles)

PRODUCT DIMENSIONS

FV-38
Feb. 24, 2021

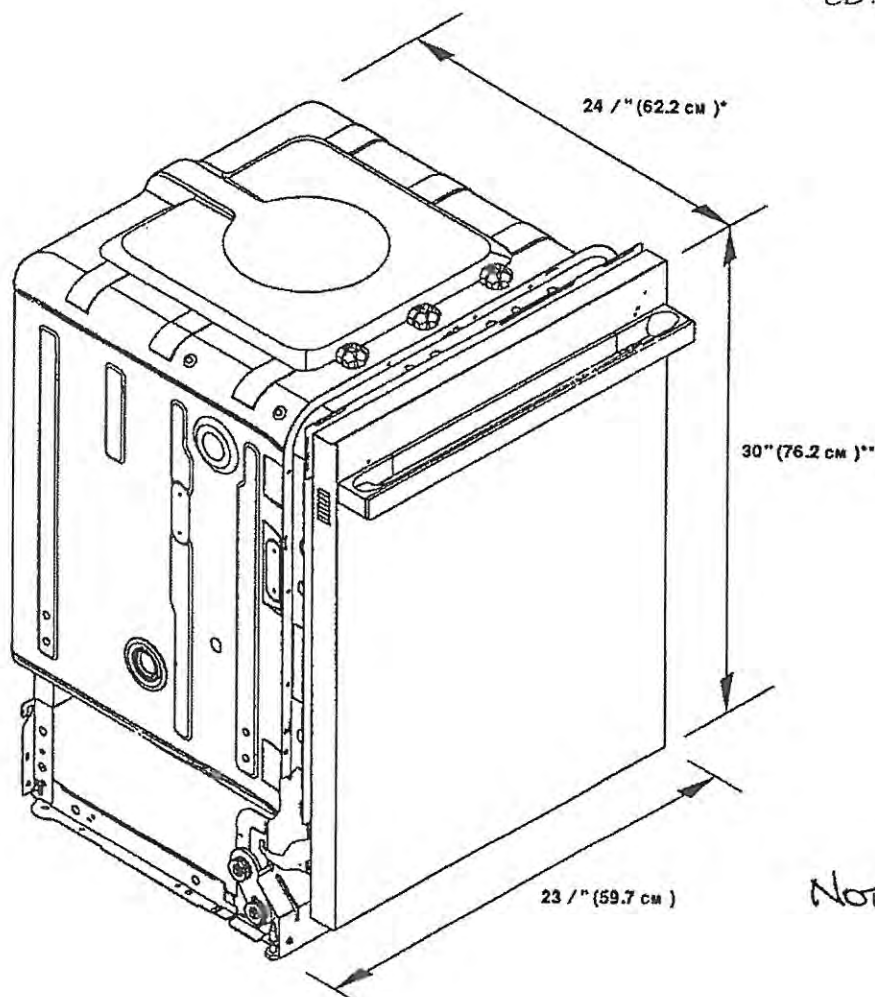

*For custom panel models, this value may change.

**With wheels removed. Add up to 1" (2.5 cm) to height with wheels and leg levelers fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE


JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
23 /" (W) x 33 /" (H) x 24" (Depth without door panel/handles)

PRODUCT DIMENSIONS CONTD.


PJ-38
Feb. 24, 2021

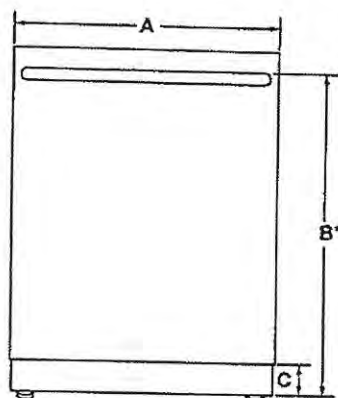

FRONT VIEW

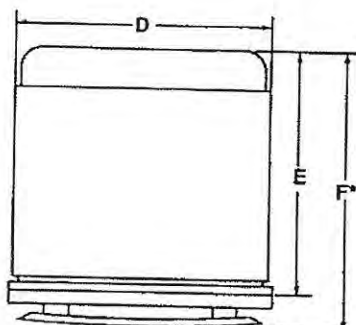

TOP VIEW

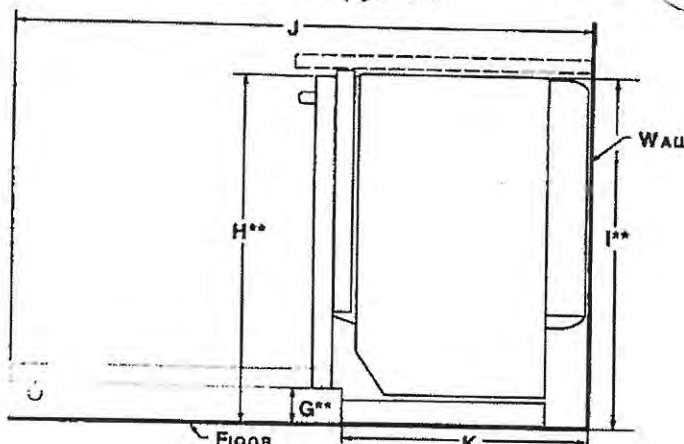

SIDE VIEW

	DESCRIPTION	JDTSS246G, JDTSS244G	JDTSS245G, JDTSS243G	JDTSS247HS
A	Width of door	23 /" (60.6 cm)	23 /" (60.6 cm)	23 /" (60.6 cm)
B*	Height to top of handle	31 /" (80.1cm)	-	-
C	Height of adjustable toe kick	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.	3 /" (8.8 cm) - min. 4 /" (10.6 cm) - max.
D	Width of recessed dishwasher	23 /" (60.6 cm)	23 /" (60.6 cm)	23 /" (60.6 cm)
E	Depth without handle	22 /" (57.4 cm)	22 /" (57.4 cm)	22 /" (57.4 cm)
F*	Depth with handle			
	Pro-Style® Stainless	29 /" (73.9 cm)	-	-
	Euro-Style Stainless	28 /" (72.6 cm)	-	-
	RISE™ Stainless	28 /" (72.7 cm)	-	-
	NOIR™ Stainless	28 /" (72.6 cm)	-	-
G**	Height to bottom of door	3 /" (9.4 cm)	3 /" (9.4 cm)	3 /" (9.4 cm)
H**	Height to top of door (min.)	33 /" (85.7 cm)	33 /" (85.7 cm)	33 /" (85.1 cm)
I**	Height of recessed dishwasher (min.)	33 /" (85.5 cm)	33 /" (85.5 cm)	-
J	Depth with door fully open (min.)	49 /" (125.7 cm)	49 /" (125.7 cm)	-
K	Depth with toe kick (min.)	20 /" (52.9 cm)	20 /" (52.9 cm)	21" (533 mm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




24" DISHWASHER DETAILED PLANNING DIMENSIONS GUIDE

JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
23 7/8" (W) x 33 7/8" (H) x 24" (Depth without door panel/handles)


OPENING CLEARANCE DIMENSIONS

PV-38
Feb. 24, 2021


(2) (M)

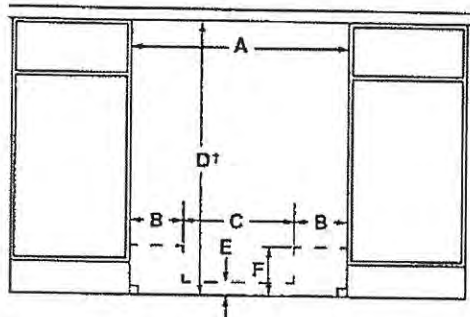

FRONT VIEW

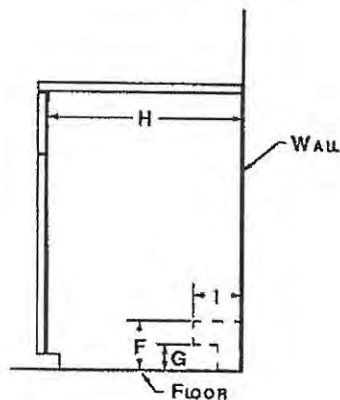

SIDE VIEW



BACK VIEW

	DESCRIPTION	JDTSS246G, JDTSS244G, JDTSS245G, JDTSS243G, JDTSS247HS
A	Width (min.)	24" (61cm)
B	Width of possible utility installation area (back wall)	6 7/8" (17.2 cm)
C	Width of clear area (back wall)	10 7/8" (26.7 cm)
D†	Height with wheels removed (min.)	34" (86.4 cm)
E	Height of possible utility installation area (back wall)	2 7/8" (6.4 cm)
F	Height of possible utility installation area (back/side wall)	6 7/8" (15.9 cm)
G	Height of clear area (side wall)	3" (7.6 cm)
H	Depth (min.)	24" (61 cm)
I	Depth of utility location (side wall)	4" (10.2 cm)
	Recommended drain connection location – closest to sink	1 7/8" (3.8 cm) dia.
	Recommended electrical connection location – right-hand side or back wall	1 7/8" (3.8 cm) dia.
	Recommended water connection location – left-hand side or back wall	1/2" (1.3 cm) dia.

†Measured from the lowest point on the underside of countertop.

NOTE: Shaded areas indicate recommended locations of electrical, water and drain connections.

LOCATION REQUIREMENTS

Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 A power supply cord, rated 120/240 V minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 A circuit for a gas dryer or 30 A circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

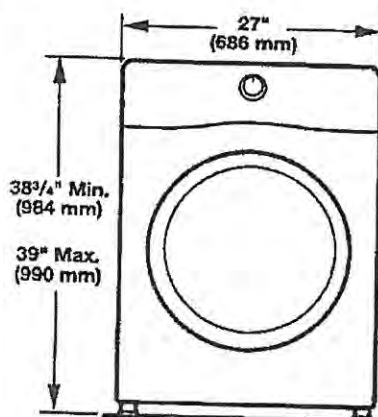


Side view:

Whirlpool® Models

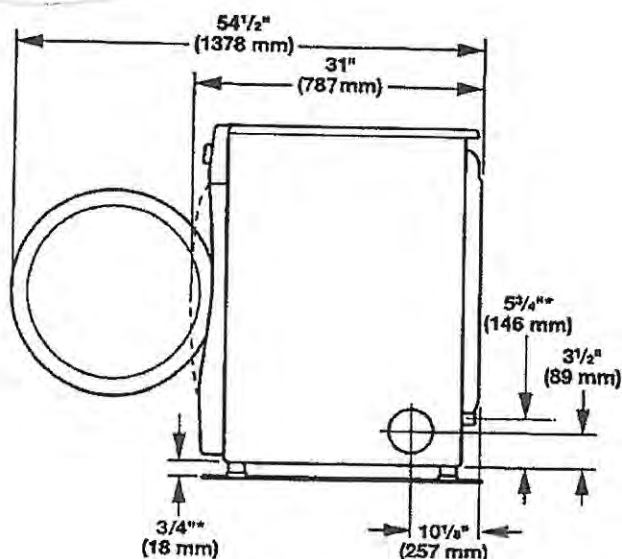

*Approx. measurement


Maytag® Models

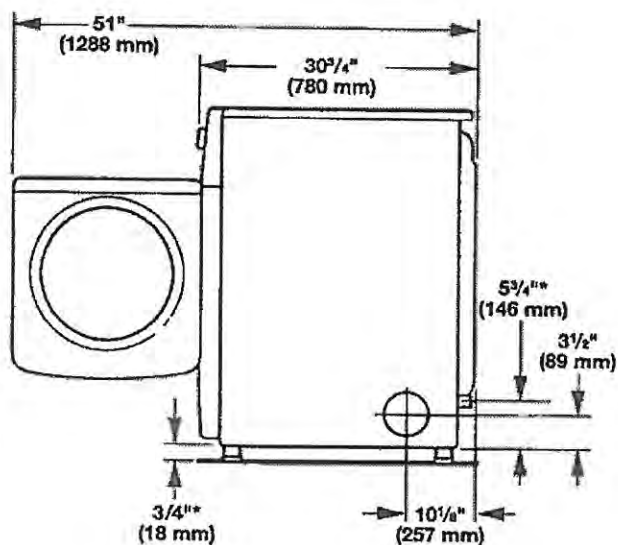


*Approx. measurement

RV-38
Feb. 24, 2021


Custom under-counter installation:

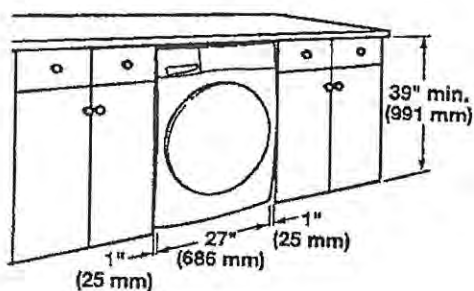

Recessed area or closet installation:

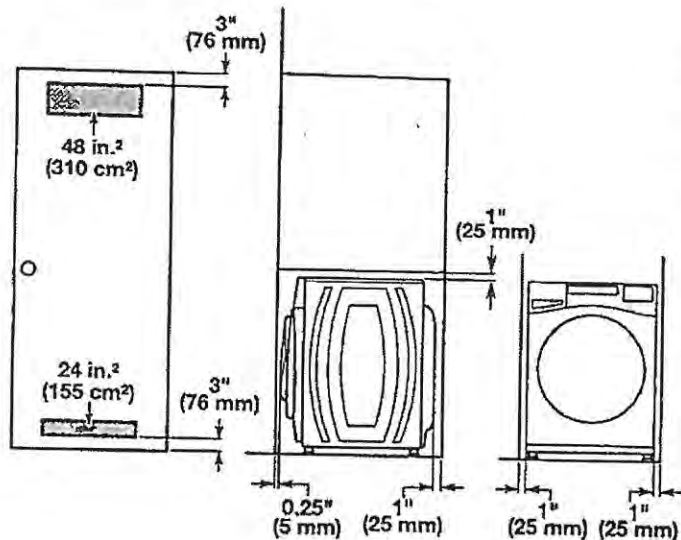

Custom cabinet installation:

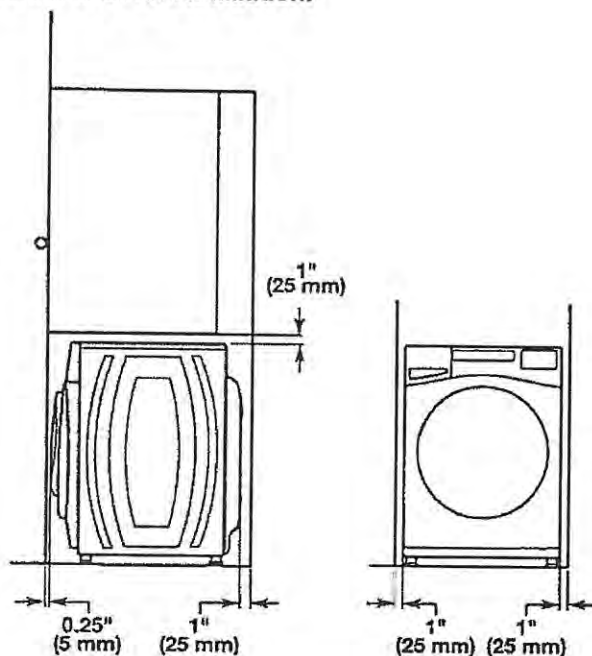


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

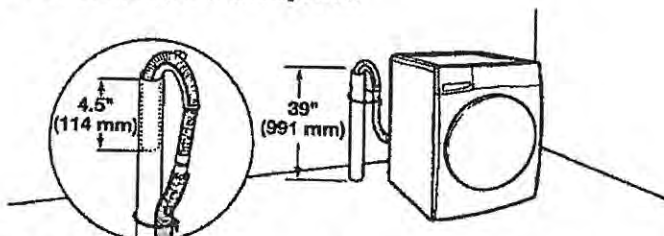


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 39" (991 mm) from the floor; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

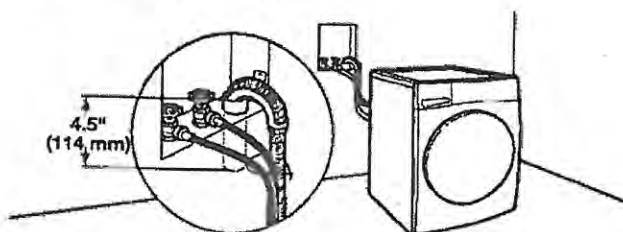


See requirements for floor standpipe drain system.

Laundry tub drain system

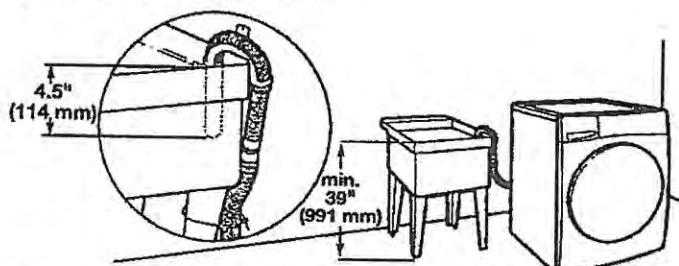

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.44 m) from bottom of washer.

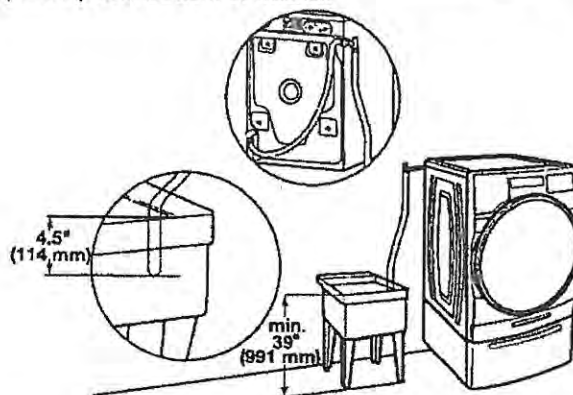

PV-38 20
Feb. 24, 2021

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft. (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft. (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).



IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool® Models*

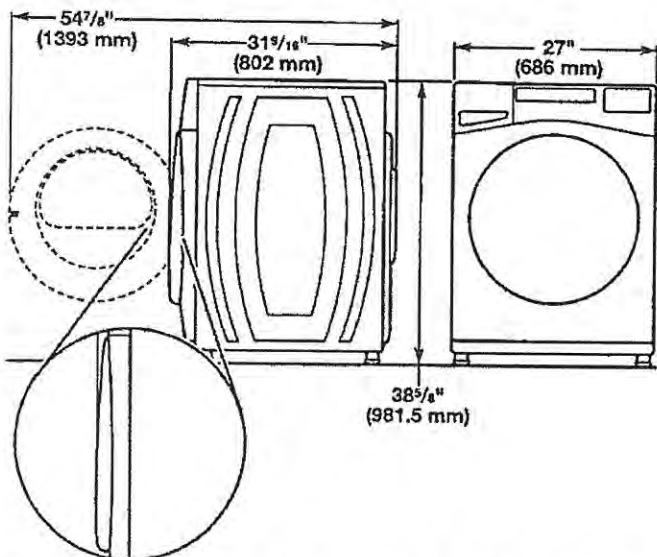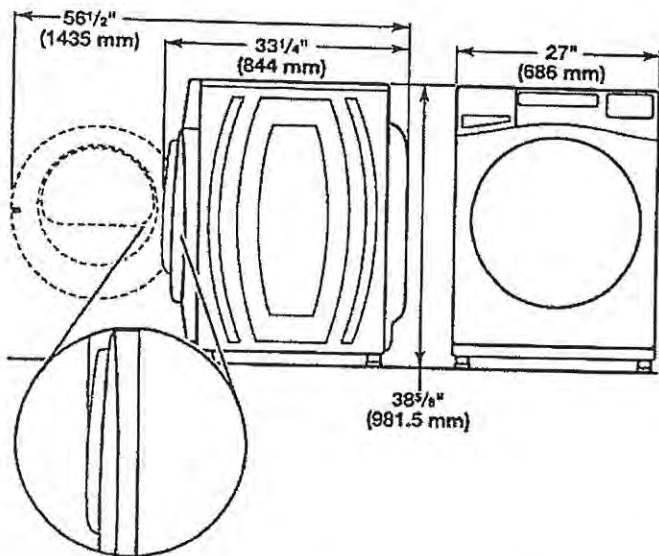

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


Maytag® Models

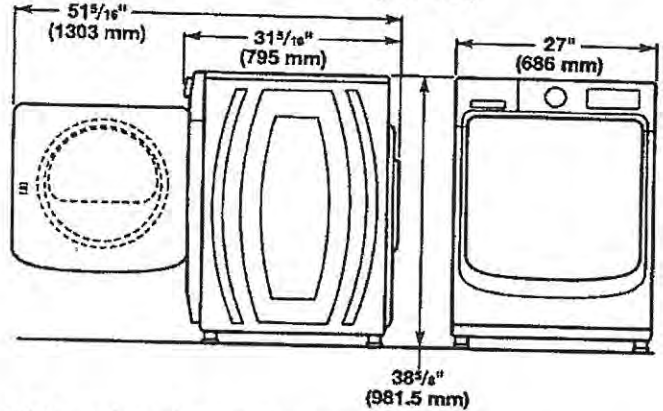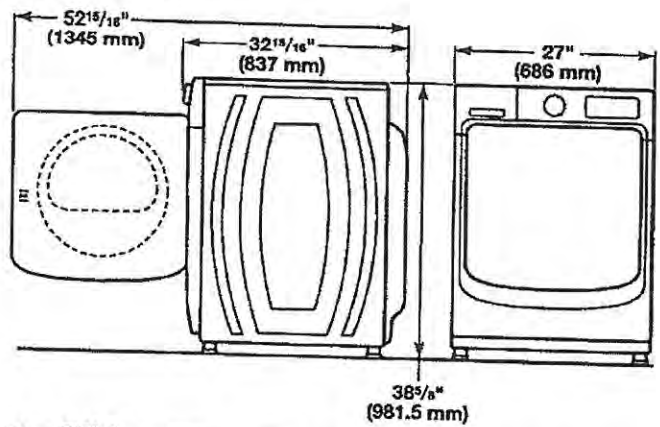

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.


Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

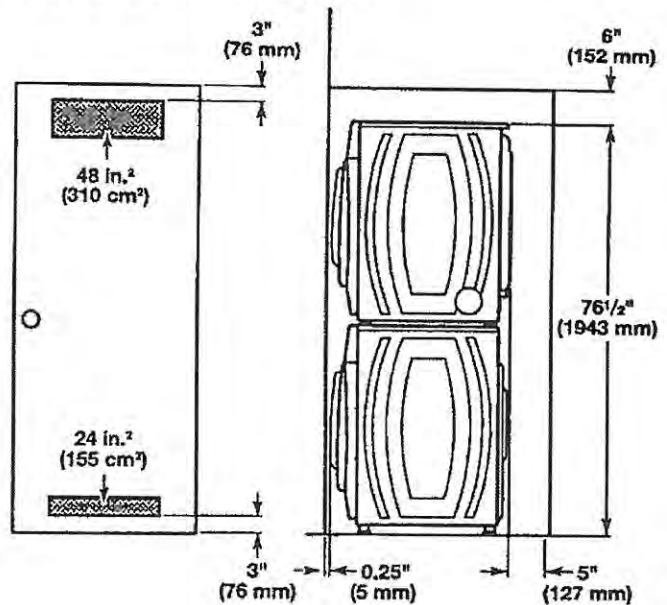

PV-38. 46 M.M.
Feb. 24, 2021

Back view:

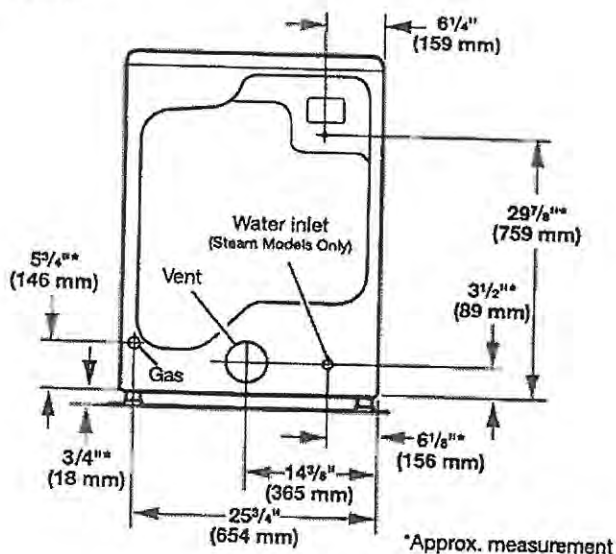

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

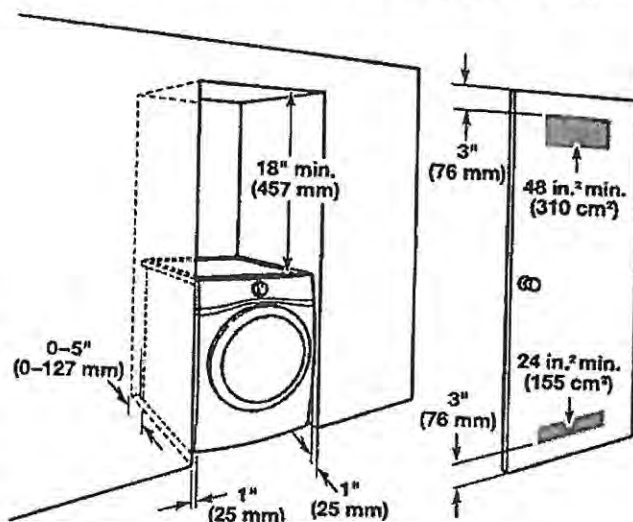

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

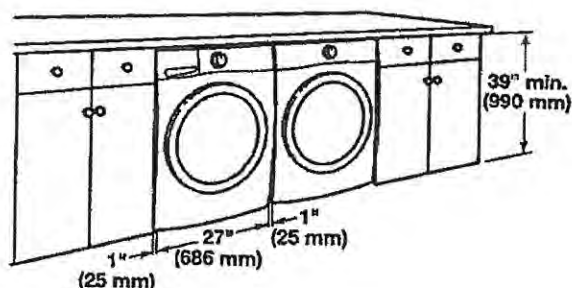

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

PV-38

Feb. 24, 2021