

2658 72,438 25Mar21

CONSTRUCTION SUMMARY

Lot: 27

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

·				
APPLIANCES				
Invoice	Qty.	Description		
2767	1	APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY		
21May21 NoCat				
BASEM Invoice		E WINDOWS Description		
	Q.,,.			
2638 72,351	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME		
17Mar21				
CERAM	ПС			
Invoice		Description		
2721 49	1	MASTER ENSUITE: TILE, SHOWER WALL - LEVEL 3 - 12x24" LAID IN HORIZONTAL STACKED PATTERN		
23Apr21				
2721	1	MASTER ENSUITE: TILE, FLOOR - LEVEL 3 - 12x24" LAID IN STRAIGHT STACKED PATTERN - SEE PLAN FOR DIRECTION		
45 23Apr21		DIALE HOLV		
2721	1	MASTER ENSUITE: TILE, SHOWER FLOOR - LEVEL 4 - HERRINGBONE MOSAIC		
45	1	WASTER ENSUITE. TILE, SHOWER FLOOR - LEVEL 4 - HERRINGBONE WOSAIC		
23Apr21				
2721 36	1	ENSUITE 2: TILE, FLOOR - LEVEL 4 - 12x24" LAID IN STRAIGHT STACKED PATTERN - SEE PLAN FOR DIRECTION		
23Apr21				
CONCD	FTI	E AND DRAIN		
Invoice		Description		
2638 101,930	1	BACK FLOW PREVENTER VALVE		
17Mar21				
DRYWA	1.1			
Invoice		Description		
2638	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME		
72,351 17Mar21 **				

DisciplineMS.rpt 23feb21 Page 1 of 5

GREAT ROOM: MODEL OPTIONS 40.06 - GREAT ROOM - OPT. COFFERED CEIILING AS PER PLAN



Lot: 27

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

ELECTRICAL

Invoice	Qty.	Description
2638 72,351 17Mar21 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2658 72,281 25Mar21	1	GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - APPROX 64" A.F.F. ABOVE FIREPLACE
2658 72,273 25Mar21	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG
2658 72,307 25Mar21	1	KITCHEN: RELOCATE STANDARD CEILING MOUNT FIXTURE TO CENTRE ON CEILING ABOVE ISLAND
2658	6	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR
72,289 25Mar21		INCLUDED IN APS
2721 72,282 23Apr21	1	KITCHEN: ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING FOR WALL OVENS
2721	1	FYI - KITCHEN: FULL HEIGHT SLAB BACKSPLASH - LEVEL 4 QUARTZ
23Apr21 NoCat		

FORMING

Invoice	Qty.	Description
2638 72,208 17Mar21	_	PINE VALLEY MODEL 42.03 FORESTCREST ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.

FRAMING

Invoice	Qty.	Description
2658	1	GREAT ROOM: MODEL OPTIONS 40.06 - GREAT ROOM - OPT. COFFERED CEIILING AS PER PLAN
25Mar21 NoCat		
2721	1	***REVISED LAYOUT*** CHANGED TO 5 BEDROOM OPTION + ENSUITE 2 WITH TUB (INCLUDES STANDARD FINISHES)
23Apr21 NoCat		APS AMENDMENT - 5 BEDROOM PLAN, INCLUDES REDUCED SIZED MASTER W.I.C. WITH ENSUITE 2 BATH (SAME LAYOUT AS 4 BED PLAN)

DisciplineMS.rpt 23feb21 Page 2 of 5



Lot: 27

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

GLASS AND MIRROR

Invoice	Qty.	Description
2721	4	MASTER ENSUITE / ENSUITE 3 / ENSUITE 4 / ENSUITE 5: UPGRADE SHOWER DOOR HARDWARE - CHROME
23Apr21		
NoCat		

GRANITE MARBLE QUARTZ

Invoice	Qty.	Description
2721	1	ENSUITE 2: UPGRADE QUARTZ COUNTERTOP - LEVEL 2
23Apr21 NoCat		
2721	1	ENSUITE 4: UPGRADE QUARTZ COUNTERTOP - LEVEL 5
23Apr21 NoCat		
2721	1	ENSUITE 5: UPGRADE QUARTZ COUNTERTOP - LEVEL 2
23Apr21 NoCat		
2721	1	KITCHEN: COOKTOP CUT OUT
23Apr21 NoCat		

HARDWOOD

	O	000	
Invoice	Qty.	Description	
2721 7 23Apr21	_	THRU OUT STANDARD AREAS: MAIN HALL/LIVING ROOM, GREAT ROOM, DINING ROOM, STUDY, UPPER HALL, MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4, BEDROOM 5 - VINTAGE SERIES, 5" WHITE OAK,NSS ENGINEERED HARDWOOD, 3/4" THK,SCULPTED TEXTURE, UVF FINISH- LEVEL 4	

HVAC

Invoice	Qty.	Description
2658	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN
72,224		
25Mar21		

INTERIOR TRIM / MOULDINGS

			11111/1/10 0 22 11 (0 0	
]	Invoice	Qty.	Description	
	2638 72,351	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME	
	17Mar21 **			

DisciplineMS.rpt 23feb21 Page 3 of 5



Lot: 27

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

KITCHEN	AND BA	ATH CA	ABINETRY

Invoice	Qty.	Description	
2721 101,930 23Apr21	1	KITCHEN: UPGRADE QUARTZ COUNTERTOP - LEVEL 4	
2721	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE	
23Apr21 NoCat			
2721	1	KITCHEN: FULL HEIGHT SLAB BACKSPLASH - LEVEL 4 QUARTZ	
23Apr21 NoCat			

PAINT

1 1 1 1 1 1		
Invoice	Qty.	Description
2658	1	GREAT ROOM: MODEL OPTIONS 40.06 - GREAT ROOM - OPT. COFFERED CEIILING AS PER PLAN
25Mar21 NoCat		

STAIR AND RAILINGS

~	,	Territoria de la companya della companya della companya de la companya della comp
Invoice	Qty.	Description
2721 100,238	2	MAIN STAIRS: 2ND FLOOR TO BASEMENT - STAIN STAIRS AND LANDINGS
23Apr21		WILL NOT MATCH HARDWOOD IN COLOUR, SPECIES, OR TEXTURE
2721 93,800 23Apr21	2	MAIN STAIRS - 2ND FLOOR TO BASEMENT: UPGRADE - EURONLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE A-2

DisciplineMS.rpt 23feb21 Page 4 of 5



Lot: 27

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

WINDOWS - BASEMENT

WINDO	* * 5	DASEMENT
Invoice	Qty.	Description
2638 72,351 17Mar21 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

DisciplineMS.rpt 23feb21 Page 5 of 5

GOLDPARK	11	NTERIOR COLOUR SCHEME	
WORTH MORE	*** NOTE: This is not a	n approved document. Document mus	st he locked **
Purchasers: NAR	50	neduled Closing Date: Thursday August 26, 21	021
	SINDER, KAUR DULAY & GUR	MEL, SINGH Property: 27 of Plan -	
Telephone Res. / Bus: /		Project: Pine Valley Forevergree	n - Phase 1
	ela Phim	Model and Elevation: 42.03 A FORESTCRES	
Layout Changes: Yes	No Sketch Attached:	Yes No Exterior Colour Scheme:	
1. Cabinetry	Style and Colour	Counter	
Kitchen / Breakfast	Alban 'Storm Grey Oak'	*Quartz: 'Pearl Jasmine'	Hardware
Laundry Room	Bowery 'Ello'	P-Lam 'White'	attach
Powder Room	Alban 'Storm Grey Oak'	Quartz: 'Nordic Loft'	attach
Mud Room	Alban 'Storm Grey Oak'	P-Lam: 'White'	attach
Master Ensuite	All 101		attach
Bathroom	Alban'Storm Grey Oak'	Quartz: 'Nordic Loft'	attach
Second Ensuite Bathroom (If Applicable)	Tribecca 'Bianca'	*Ouranta ID	
Datinooni (ii Applicable)	Tribecoa Biarica	*Quartz: 'Raven'	attach
Ensuite 3	Alban 'Storm Grey Oak'	Quartz: 'Nordic Loft'	attach
Comment	2		allach
Ensuite 4 Cab: *Wexford 'Classic'	White' + *Quartz: 'Empira Black' / Ensi	uite 5 Cab: Alban 'Storm Grey Oak' + *Quartz: 'Raven'	
*		* REVISED *	
		July 16,2021	
2. Floor Tile		attoched	
10.	Selection		
Entrance Vestibule	13x13" Costa 'White'		
Main Hall	n/a		
Kitchen / Breakfast	-*see-hardwood- 3x 3"	Costa "White"	
Laundry Room	13x13" Costa 'White'		
Powder Room	13x13" Costa 'White'		1
Mud Room	13x13" Costa 'White'		
Master Ensuite Bathroom	*12x24" Eterna 'Imperial Gre	ey' polished	
Second Ensuite Bathroom (If Applicable)	*12x24" Reve 'Nuit'		
Lower Landing			
(If Applicable)	13x13" Costa 'White' (basem	nent foyer)	
Ensuite 3	13x13" Costa 'White'		
Comment			
Ensuite 4: 13x13" Camebridge 'Whi	ite' / Ensuite 5: 13x13" New Reeds / M	Aaster Ensuite Shower Floor: *Eterna 'Imperial Grey' Herringt	oone / Thru out
Standard White	¹ Tau	upe' * REVISED*	,one / mu-out
		June 4, 2021	
3. Wall Tile		Scermail	
	Selection	Listello/Inserts Describe	
Ensuite 4	8x10" Weave 'White'	Yes M No	
Master Ensuite Bathroom	-1.		
Tub De Shower St		Yes No	
Bathroom Wa			
Second Ensuite		Yes No .	
Bathroom (If Applicable)	8x10" Uniwall 'White'	○ Yes No	
Ensuite 3	8x10" Weave 'White'	○ Yes No	
Kitchen Backsplash	Yes No	Backsplash Behind Fridge	
Comment	same as Counter		
Ensuite 5: 8x10" Weave 'Tender Gre			
		Ω_{ν}	
		H	90

GOLDPA	RK			INTERIOR (COLOUR S	CHEME	
	TH MORE"	*** NOTE	: This is no	ot an approve	d docume	ent. Document must be loc	skar
				Scrieduled Cit	osing Date:	Dursday August 26, 2024	, Kec
Purchasers:	NARI	NDER, KAI	JR DULAY & G	SURMEL, SINGH	Property:	27 of Plan -	
Telephone Res. / Bus	s: /					Pine Valley Forevergreen - Phase	
Decor Advisor:	Angel	a Phim		Model and	Elevation:	42.03 A FORESTCREST	
4. Plumbing Fix	ctures-						
			Second E	nsuite		Powder Room]
Master Ensuite Ba	athroom		Other Ro	om - Specify			1
Comment						Other Washroom	
*see attached plumbing	upgrades		ODUCEN	L-			
*		7	REVISED	K			
			July 16,2021				
5. Hardwood Flo	ooring-		astache d	(
Main Hall	Type and	d Stain				Type and Stain	
				Upper La	anding	Type and otali	
Kitchen / Breakfas	t-*5x3/4	WhtOak,S	culpted, Apollo	- Upper Ha	all		
Living Room 4	* dele-	te - see t	ilex	Master B	edroom		
Dining Room				Bedroom	N 1.325113392 14		
Family Room			-				
Den/Library				Bedroom			
Entrance Vestibule				Bedroom			
Lower Landing	′			Bedroom	#5		
(If Applicable)					om - Specify		
Comment				thru-out s	tandard area	*5x3/4" WhtOak,Sculpted,Apollo)
. Carpeting		Hanna I					
Ground Floor		Upgrade	Description				
Second Floor							
			L	(4)			
Upgrade Underpad		Туре			Area	4	
		Capped			J		
Carpet on Stairs					Runner - *U	pgrade	
Comment			-	-	J L		
119			э				
Fireplace							
Liv	ving Room		ı	Family Room		Other Room - Specify Great F	
	Purchased	As Per Plan	N/A	Purchased As P	er Plan N/A	Purchased As Per Plan N/A	
Firenless Town	0 ,	0	0)
Fireplace Type						Standard Gas	
Mantle Type						Mediterranean	
Colour / Stain						Arctic White	
Surround						n/a	
Hearth						n/a	
Comment							
	3	= 25			. 11	1004.2001	_
					Ú,	ine 4, 2021 O 85	D
					9	at phonis	

GOLDPA	ARK		NTERIOR COLOUR SC	HEME		
	ORTH MORE" *** NO	ΓE: This is not a	n approved documen	nt. Docum	ent must	be locked **
Purchasers:		30	meduled Closing Date: 1	hursday Aug	just 26, 202	1
Telephone Res. / B	Bus: /	AON DOLAT & GUR	MEL, SINGH Property: 2			
Decor Advisor:	Angela Phim		Project: P	ine Valley Fo	revergreen	- Phase 1
<u> </u>			Model and Elevation: 4	2.03 A FORE	STCREST	
8. Trim Carpe	, m 4 m .				(4.)	•
						<u> </u>
	Carrara	Front Door Glass	Inserts std	Door Hand	dles	
Interior Trim Comment						
Comment						
	e	*				
						*
	8					
			20			
−9. Plaster Mou	Idings and Med	allions		*		
Standard Through	ghout O Yes	No N/A	¥			
Entrance Vestib						
Main Hall	all e		Kitchen/Breakfast			
Living Room			Den/Library			
Dining Room	+===		Lower Landing			
Family Room			Other Room - Specify	1		
Comment						
	*					
	*					
						8.
	d Spindles——					
Railing Package	*A2 package					
Railing Colour	*Mirage 'Hopscotch		Spindle Colour	*Black		
Stringer / Riser	*Mirage 'Hopscotch	ı'	Treads	*Mirage 'H	lopscotch'	
Comment			Oak Stairs	Yes	O No	○ N/A
			•			
						·
	*1					
11. Wall Paint /	Ceilings ———					
	hed Areas Warm G	erev				
Trim Paint	White					
Smooth Ceilings		s	7			
Ground Flo	oor 🗸			•		
Second Flo						
Note		•			_	
Comment						
		Wy 16, 2021	111 A 1001			
	-		June 4, 2021			
		(attached)	sce (ma)			
	200 15		ou final		850	

Page 3 of 4

GOLDPARK	INTERIOR COLOUR SCHEME
WORTH MORE" *** NOTE: This	s is not an approved document. Document must be locked *
Purchasers: NARINDER, KAUR DU	Scheduled Closing Date: Thursday, August 26, 2021 LAY & GURMEL, SINGH Property: 27 of Plan -
relephone Res. / Bus: /	Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Angela Phim	Model and Elevation: 42.03 A FORESTCREST
┌12. Electrical	
Hood Fan White Stainless 1	N/A
	Above Ritchen Cabinet Light () Yes 🔞 No
Standard Appliances	Below Kitchen Cabinet Light O Yes No
Over The Range Microwave	a .
Chimney Style Fan ✓	
Comment	
□13 Heating and Air Condition:	
13. Heating and Air Conditioning Air Conditioning	
Gas Provisions Dryer no	Gas Provisions Stove yes
Comment	Gas Provisions Barbecue std
-14. Additional Comments	
, radicional comments	
* *	
a a	
15. Disclaimers and Notes	
	er's selection, but not necessarily identical due to variances in manufacturing.
2) Any extras listed above are null and void unless accompa	anied by a separate invoice/amendment. Said invoice must be paid in full
The Purchaser acknowledges that after Interior Colour Set than re-selection due to unavailability.	
	- Interest of Interest
	"Gold Park Homes Decor Centre Disclaimers" form. This document contains
This Interior Colour Selection is final and approved by:	
Signature: Date:	
J' see chrait J	une 4, 2021 Page 4 of 4
Printed 4/21/2021 14:31:29 attached	uly 16,2021

GOLDPARK	" NOTE: This is not an	ERIOR COLO	ocument. Document	must be locked		
Purchasers: NAR	INDER, KAUR DULAY & GURMI	duled Closing	Date: Thursday, August 2	16, 2021		
Telephone Res. / Bus: /	STOCK TOTOK DUDY & GURM					
	ela Phím a	P:	reject: Pine Willey Forever	rgreen - Phase 1		
Layout Changes: () Yes		Charles of the Control of the Control	Exterior Colour Schem			
1. Cabinetry	Style and Colour		····			
Kitchen / Breakfast	Aban Storm Grey Oak	Counter		Hardware		
Laundry Room	Bowery Eilo	"Quart" Pe		attach		
Powder Room	Alban Storm Grey Oak	P-Lam Whi	A STATE OF THE PARTY OF THE PAR	intinch		
Nud Room	The second secon	Quartz Nor	- A	nttach		
Master Ensuite	Alban 'Storm Grey Onk'	P-Lam: Wh	lie'	allach		
Bathroom	Alban'Slorm Grey Oak' .	Quartz; 'Nor	dic Loli	Sattach		
Second Ensulte Bathroom (If Applicable)	Tribecca 'Bianca'					
	Personal Delina	"Charte Ra	von'	atlacis		
Ensula 3	Alban Storm Grey Onk	Dua tz 'Nor	de Lati			
Comment				attech		
Ensute 4 Call World Consc	White - Quarte Errpre Black / Columb	5 Cab Athin	on Oction and Table			
		fruirb-c	- Control of the cont			
Ì	į.	им 1				
		A.				
2. Floor Tile	Selection	17.				
Entrance Vestibule	fi3x13" Costa "White"					
Main Hall	and the second s			Collegement Care Science		
Kitchen / Breakfast	n/a		TO THE PERSON NAMED IN			
Laundry Room	son hardwood Tarin	Dyd_Nhi	€			
Pawder Room	13x13* Costs White			,		
Mud Room	[13x13" Costo Vyhito					
Master Ensulte	13x13* Cesia While					
Bathroom	12x24" Eterns Imperial Grey	polished				
Socond Ensuite Bathroom (If Applicable)	12x24 Reve Nua					
Lower Landing (If Applicable)	"3x13" Costa White (basemen	nt fayor)				
Ensula 3	13x13' Costa White			-		
Comment	Contraction of the contraction o					
Comment	District and Topic to the con-					
allower floors. Zx2" stee land White	o / Ensolu S. 13x13" leave Flores / Nation	ter Ersute Steine C	* KEVISED	*		
L-			June 4, 20			
3. Wall Tile	Salaction		= (Set) (m)	AL)		
Ensulte 4	8x10" Weave 'While'	Listellor	O CALLINE			
Master Ensuite Bathroom	AACHAO AAINIO	() Yes	₩ No L	-		
Tub De	ck		A No. 1			
	all [12x24"E ornm Imper a Grey	ool C Yes	O No	St. or St		
Bathroom Wal	lis .	C Yes				
Second Ensuite Dathroom (If Applicable)	8x10" Univali White	O Yes	And the second			
Ensuite 3	8x10" Weave White	O Yas	d) No			
Kitchen Backsplash	Yes No					
Comment	The state of the s	- J	ksplash Bohind Fridge	L		
	same as Counter					
Ensure t extor Vience Tensor Cire						

Printed 4/21/2021 14.31:29

, W	ARK.	" NOTE	: This is no	INTERIOR	ved docum	CHEME ont. Document m	
							ust be locked '
Purchasers:	NARIN	DER, KAL	R DULAY &	SURMEL, SING	3H Property	27 of Plan	2021
Tolephone Res. / B					Project:	Pine Valley Forevergi	reen - Dhaen 1
Decor Advisor:	Angela	Phim		Model at	nd Elevation:	42.03 A FORESTOR	- FI DMM 1
4. Plumbing F	lyturne						
, , , , , , , , , , , , , , , , , , ,	IXIUI VS	r		***********			
Master Ensuite	Date		Second 8			Powder Roam	
	Daintoom	11.18.0000000	Other Ro	om - Specify		Other Washroom	,
Commont cises attached plants		***			1	Other Washingom	نـــــــــــن
)	ing optiones	+	TEVEN	,			
1			(1ig 14, 30)				
			5- A	-	-	***********	1
5. Hardwood F	Flooring	***	10 B			Trease Au	
	Type and :	Stain				Andrew Charles - 17 de vive sp	
Main Hall	-		***	Upper	Lanuing	Type and fliain	W.F.
Kitchen / Breakf	ast-15x3/4"	VntO S	culpted Apollo	Upper	100000000000000000000000000000000000000		
Living Room	It carries	W I			Bedroom	-	
Dining Room	1						
Family Room	7			Bodroo		1	
Don/Library	-		N	Bedroo			
Entrance Vestibu	da .	-		Bedroo		1000	
Lower Landing	110	****		Dedroo	m #5	L	
(If Applicable)				Other F	loom - Specif	5x3/4" Whiloak So	
Comment				- Ihntout	standard area	5x3/4 V.htOak Se	ulpted Applia
			And the second second		eranding a 48		t and a summer
6. Carpeting Ground Floor Second Floor	Ī	Upgrade	Description		oranging drea		
6. Carpeting	Ī	· Congression of the Congression	Description		aradara area		
6. Carpeting	Ī	.]	Description	2	70		
G. Carpoting Ground Floor Sacond Floor		.]	De Fearption		Area .		
6. Carpeting		Type.	De scarption		Aria .		
G. Carpoting Ground Floor Sacond Floor		3	Description		Fria .	Prode	
G. Carpeting Ground Floor Second Floor Upgrade Underpa		Type.	Description		Fria .		
Ground Floor Sacond Floor Upgrade Underpa		Type.	Descapillor		Fria .		
G. Carpeting Ground Floor Second Floor Upgrade Underpa		Type.	Description		Fria .		
G. Carpeting Ground Floor Second Floor Upgrade Underpa		Type.	Description		Fria .		
Ground Floor Sacond Floor Upgrade Undorpa Carpet on Stairs Comment		Type.	Discipilar		Fria .		
Ground Floor Second Floor Upprade Underpa Corpet on Slairs Comment		Type.			Fria .	p [*] rada	
Ground Floor Second Floor Upprade Underpa Corpet on Slairs Comment	dd LLVing Roam	Type.		Family Room	Aras [psad4 Other Rooms a g	retify Great Room
Ground Floor Sacond Floor Upgrade Undorpa Carpet on Stairs Comment	dd LLVing Roam	Type			Runser-Tu	Other Room - Sp. Pichad &	retty Signal Room
G. Carpoting Ground Floor Sacond Floor Upgrade Underpa Corpet on Stairs Comment Fireplace	ud Uving Roam	Type	KA.	Family Room	Aras [Other Room - Sp. Pirtual &	retify Great Room
Ground Floor Sacond Floor Upprade Undorpa Carpet on Stairs Comment Fireplace	ud Uving Roam	Type	KA.	Family Room	Runser-Tu	Other Room . sp. Pres well	retify Spage Pacon Par Ran Bal CD ()
Ground Floor Sacond Floor Sacond Floor Upgrade Undorpa Carpet on Stairs Comment Fireplace Fireplace Type Mantle Type Colour / Stain	ud Uving Roam	Type	KA.	Family Room	Runser-Tu	Other Room - Sp. Provid & Standard Gas McGiterranear	retify Spage Pacon Par Ran Bal CD ()
G. Carpeting Ground Floor Sacond Floor Upgrade Undorpa Corpet on Siairs Comment Fireplace Fireplace Type Mantis Type Colour / Stain Surround	ud Uving Roam	Type	KA.	Family Room	Runser-Tu	Other Room - Sp. Frender & Standard Cas Nodisterrance Arctic White	retify Spage Pacon Par Ran Bal CD ()
Ground Floor Sacond Floor Sacond Floor Upgrade Undorpa Carpet on Stairs Comment Fireplace Fireplace Type Mantle Type Colour / Stain	ud Uving Roam	Type	KA.	Family Room	Runser-Tu	Other Room - sp. Premad & Standard Gas McGaeranear Arctic While prin	retify Storal Pacon Parkan Ind CO ()
G. Carpeting Ground Floor Sacond Floor Upgrade Undorpa Corpet on Siairs Comment Fireplace Fireplace Type Mantis Type Colour / Stain Surround	ud Uving Roam	Type	KA.	Family Room	Runser-Tu	Other Room - Sp. Frender & Slandard Gas Nodikerranes Arcter White	retify Storal Pacon Parkan Ind CO ()

Printed 4/21/2021 14:31:29

Page 2 of 4


, можи	RK NOTE	: This is not an :	ERIOR COLOUR SCH	t. Document must be	locked *
Ourchasers:	NARINDER, KAL	JR DUIL AV & GURNE	duled Closing Date: Th L. SINGH Property: 27	birsday, August 26, 2021	
Telephone Res. / Bus:	1	STOOD TI A GORALD	L. SINGH Property: 27	of Plan -	
Decor Advisor:	Angela Pnim	M	odel and Elevation: 42	ne Valley Forevergreen - Pho	150 1
			and and Chantout 4X	UJAFUKESTCREST	
8. Trim Carpentry					
	many.	-			
Interior Doors Car	fera	Front Door Glass Inc	serts std	Door Handles	
Comment					
- Contraction					


					-
0 01					
9. Plaster Mouldle	ngs and Medal	lions		·	
Standard Througho	rut () Yes ()	NO ONA			
Entrance Vestibule	f				
Main Hall			Kitchen/Breakfast		-
Living Room		and the second second	Den/Library		
Dining Room		A STATE OF THE PARTY OF THE PAR	Lower Landing		
Family Room			Other Poom - Specify		
Comment	71 THE 11 TOWN			The state of the state of	
Railing Package (A)	urkaçe Irage 'Hopscolch'	LATE	Spindle Colour	Веси	
Railing Package (A) Railing Colour (A) Stringer / Riser (M)	surlage		Treads	Marage Hoose en	en e service de la company
Railing Colour 14	urkaçe Irage 'Hopscolch'	- NT		Marage Hoose en	N/A
Railing Package (A) Railing Colour (A) Stringer / Riser (M)	urkaçe Irage 'Hopscolch'		Treads	Marage Hoose en	N/A
Railing Package (A) Railing Colour (A) Stringer / Riser (M)	urkaçe Irage 'Hopscolch'		Treads	Marage Hoose en	N/A
Railing Package (A) Railing Colour (A) Stringer / Riser (M)	urkaçe Irage 'Hopscolch'		Treads	Marage Hoose en	NA.
Railing Packago Railing Colour MStringer / Riser MCComment	oritice trage Hopscolch Il age Hopscolch	-An	Treads	Marage Hoose en	NA
Railing Package [A7 Railing Colour 18 Stringer / Riser M Gomment	prize trage Hopscoich liage Hopscoich	A.	Treads	Marage Hoose en	N/A
Railing Package [A7 Railing Colour 18 Stringer / Riser M Gomment	prize trage Hopscoich liage Hopscoich	V.	Treads	Marage Hoose en	N/A
Railing Package (A) Railing Colour (A) Stringer / Riser (M)	prize trage Hopscoich liage Hopscoich	7	Treads	Marage Hoose ch	N/A
Railing Package [A7] Railing Colour M Stringer / Riser M Gomment 1. Wall Paint / Cel Throughout Finished	prize trage Hopscoich liage Hopscoich		Treads	Marage Hoose ch	NA
Railing Package [A] Railing Colour M Stringer / Riser M Gomment 1. Wall Paint / Cel Throughout Finished Trim Paint Viti	printe Ir age Hopscotch Ir age Hopscotch Il age Hopscotch Il age Hopscotch Il age Hopscotch Il age Hopscotch	7.	Treads	Marage Hoose ch	NA
Railing Package [A] Railing Colour M Stringer / Riser M Gomment I. Wall Paint / Cel Throughout Finished Trim Paint Viti	printe Ir age Hopscotch Ir age Hopscotch Il age Hopscotch Il age Hopscotch Il age Hopscotch Il age Hopscotch	7.	Treads	Marage Hoose ch	N/A
Railing Package [A] Railing Colour Stringer / Riser M Comment L. Wall Paint / Cel Throughout Finished Trim Paint Vita Smooth Cellings	wase trapscorch rage Hopscorch lange Hopscorch lings Hopscorch Areas tvarm Cre	7.	Treads	Marage Hoose ch	N/A
Railing Package [A7] Railing Colour Stringer / Riser M Comment I. Wall Paint / Cel Throughout Finished Trim Paint Smooth Cellings Ground Floor	ings Hopscuch llings Areas Ivam Cr	7.	Treads	Marage Hoose ch	N/A
Railing Package [A] Railing Colour Stringer / Riser M Comment L. Wall Paint / Cel Throughout Finished Trim Paint Smooth Callings Ground Floor Second Floor Note	ings Hopscuch lings Areas Ivam Cr	7.	Treads	Marage Hoose ch	N/A
Railing Package [A7] Railing Colour M Stringer / Riser M Gomment 1. Wall Paint / Cel Throughout Finland Trim Paint Wt Smooth Cellings Ground Floor Second Floor	ings Hopscuch lings Areas Ivam Cr	y	Treads	Marage Hoose ch	N/A
Railing Package [A] Railing Colour Stringer / Riser M Comment L. Wall Paint / Cel Throughout Finished Trim Paint Smooth Callings Ground Floor Second Floor Note	ings Hopscuch lings Areas Ivam Cr	7. 	Treads Oak Stairs	Marage Hoose ch	N/A
Railing Package [A] Railing Colour Stringer / Riser M Comment L. Wall Paint / Cel Throughout Finished Trim Paint Smooth Callings Ground Floor Second Floor Note	ings Hopscuch lings Areas Ivam Cr	7. 3.	Treads	Marage Hoose ch	NA
Railing Package [A] Railing Colour Stringer / Riser M Comment L. Wall Paint / Cel Throughout Finished Trim Paint Smooth Callings Ground Floor Second Floor Note	ings Hopscuch lings Areas Ivam Cr	7.	Treads Oak Stairs	Marage Hoose ch	N/A

Printed 4/21/2021 14:31:29

GOLDPAR		INTERIOR COLOUR SCHEME
, WPETH	MOIE This is no	of an approved document. Document must be locked
Purchasors:		
Telephone Res. / Bus:	/	SURMEL, SINGH Property: 27 of Plan -
Decor Advisor:	Angela Phim	Project: Pine Valley Forevergreen - Phase 1
	- Angold Flate	Model and Elevation: 42.03 A FORESTCREST
12. Electrical-		
Hood Fan O Wh	ile O Stainless & N/A	Above Kitchen Cabinet Light O Yos @ No
Standard Appliance	• 🔲	Balaw Kitchen Cabinel Light O Yos & No.
Over The Range Mic	rowave []	
Chimney Style Fan	\boxtimes	
Comment		
13. Heating and A	Ir Conditioning	
Air Conditioning	ho	Gas Provisions Stova
Gas Provisions Drye Comment	70	Gas Provisions Stove you
14. Additional Con	nments —	
14. Additional Con	mments —	
4. Additional Con	nments	
4. Additional Con	nments	
4. Additional Con	nments —	
4. Additional Con	nments —	
4. Additional Con	nments —	
4. Additional Con	nments —	
5. Disclaimers an	d Notes—	
5. Disclaimers and	d Notas—	ition, but not necessarily kfonskot oue to verlances in manufacturios.
5. Disclaimers an 1) Colours of all metodals as 2) Any adras listed elbore as 2) Any adras listed elbore as	d Notes — a se doos as possible to buildon's select a cul and yold unless economovided by	ision, but not necessarily idensical Que to verlances in manufacturing, a separate involce/amendment. Sald involce must be paid in but
5. Disclaimers am 1) Colours of all metodals ar 2) Any adras Stated above ar 2) The Phurbase admonster disconding to	d Notas— a se dose as possible to buildor's selec- a null and void unless seconaponhed by ges that after linknot Culous Selection I	a separato involonizmendment. Sald involce must be peld in fud. form is signed and dated, no further changes will be permitted other if a initials:
5. Disclaimers am 1) Colours of all metodals as 2) Any adras based shore ar 2) The Purchaser action days to 4) The Purchaser action days to 4) The Purchaser action days for other miscontineous dated	d Notas— a as doos as passible to buildon's select a nul and void unless economonised by ges that share foliate Colour Selection investigation. Pruthase (Cris reading and ecosping the "Gold Pe orders.	5 SCGMato Implementment Sale to the sale would be seen as
5. Disclaimers and 10 Colours of all metodate as 12 Any adress have above as 23 Any adress about 60 colours and 10 Colours adress all metodates of the metodate action of the total of the metodate and the metodate of the me	d Notes— a se dose as possible to buildor's relect in call and yold unless economicated by green het after funder Calcus Selection in navailabile. Purchase for moding and according the "Cold Pal alicuses. in is first and approved by:	a separato involonizmendment. Sald involce must be peld in fud. form is signed and dated, no further changes will be permitted other if a initials:
The Purchaser acknowled than re-selection due to u	d Notes— as close as possible to builder's select and and yold unless economicated by goes hat after before Coloror Selection Purchase (post section) and accepting the "Color Pul- drama, a la first and approved by: Date:	a separate involonizmendment. Said involce must be peld in fud. form is signed and dated, no further changes will be permitted other is initials:

NEW 30' ELECTRIC COOKTOP CHOSEN. PLEASE SEE NEW SPECS SIGNED MARCH 9, 2022



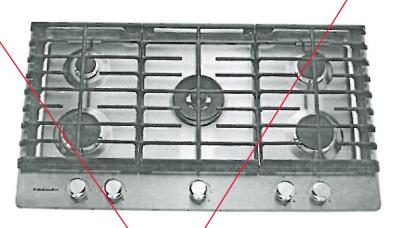

KITCHENAID 36" 5- BURNER GAS COOKTOP - STAINLESS STEEL

\$1,649.00

SKU: KCGS556ES VSN: KCGS556ESS Dimensions


Width: 36" (91.4 cm) Height: 3.62" (9.2 cm) Depth: 21" (53.3 cm)

Experience the convenient technology this cooktop from KitchenAid offers. Even-Heat™ technology uses a diffuser plate to allow for more control of the cooktop, making it ideal for malting chocolate or simmering sauce. With a professional dual-ring burner and electronic ignition, this cooktop makes it simple to whip up countless masterpieces. What's more, its CookShield finish helps protect against spills and stains while making the cooktop easy to wipe clean without the use of harsh chemicals.



Key Features:


- Even-Heat Technology
- Professional Dual-Ring Burner
- CookShield Finish
- Electronic Ignition



NEW 30' ELECTRIC COOKTOP CHOSEN. PLEASE SEE NEW SPECS SIGNED MARCH 9, 2022


Product Dimensions

KCGS550ESS and KCGS950ESS Models




- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 19%" (49.2 cm)
- D. 283/8" (72.1 cm)
- E. 35/8" (9.2 cm)
- F. 49/16" (11.6 cm) G. 13/8" (3.4 cm)

All Other 30" (76.2 cm) Models




- A. 21" (53.3 cm)
- B. 30 (76.2 cm)
- C. 187/8" (48.0 cm)
- D. 283/8" (72.1 cm)
- E. 33/8" (8.6 cm)
- F. 41/8" (10.5 cm)
- G. 11/2" (3.8 cm)

KCGS556ESS and KCGS956ESS Models

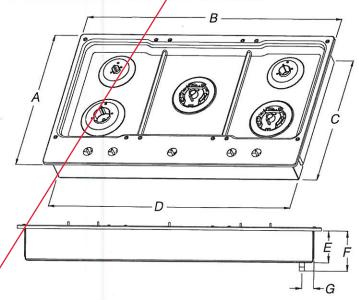


- A. 21" (53.3 cm)
- B. 361/4" (92.0 cm)
- C. 193/8" (49.2 cm)
- D. 343/8" (88.1 cm)
- E. 35% " (9.2 cm) F. 49/16" (11.6 cm)
- G. 17/16" (3.6 cm)

All Other 36" (91.4 cm) Models

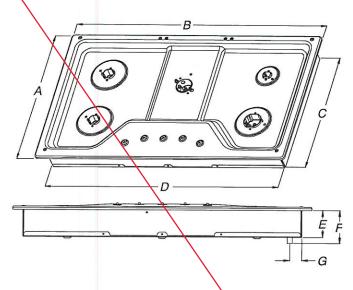


- A. 21" (53.3 cm)
- B. 36" (91.4 cm)
- C. 181/8" (48.0 cm)
- D. 33¾" (85.7 cm)
- E. 3\%" (8.6 cm) F. 41/8" (10.5 cm)
- G. 1½" (3.8 cm)



NEW 30' ELECTRIC COOKTOP CHOSEN. PLEASE SEE NEW SPECS SIGNED MARCH 9, 2022



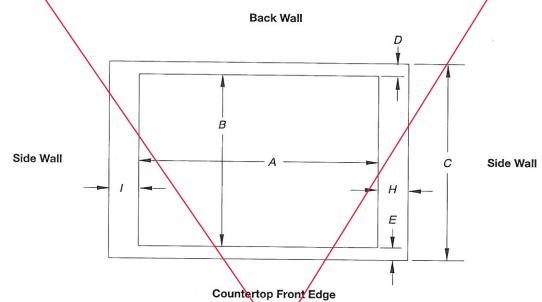

		Cutout (Pro	guct Opening) Dim	ensions		
		30	(76.2 cm) Models			
Models		Α /			В	
····	Min	Recommended	Max	Min	Recommended	Max
KCGS550 and KCGS950 All Other 30" (76.2 cm) Models	28½" (72.4 cm) 28½" (72.4 cm)	28½" (73,4 cm) 28½" (73.4 cm)	29 ⁵ /16" (74.3 cm) 29 ⁵ /16" (74.3 cm)	19½" (49.5 cm) 19" (48.3 cm)	19 ¹³ / ₁₆ " (50.2 cm) 19½" (49.5 cm)	20" (50.8 cm) 20" (50.8 cm)
		36" (91.4 cm) Models			
KCGS556 and KCGS956 All Other 36" (91.4 cm) Models	34%" (88.4 cm) 33%" (86.0 cm)	35 ³ /16" (89.4 cm) 34 ⁵ /16" (87.0 cm)	35%" (90.3 cm) 35¼" (89.5 cm)	19½" (49.5 cm) 19" (48.3 cm)	19 ¹³ / ₁₆ " (50.2 cm) 19 ¹ / ₂ " (49.5 cm)	20" (50.8 cm) 20" (50.8 cm)

Side V	Valls (Combustible Surfaces)		
Models	H and I		
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).		
KCGS350, KCGS356, MGC9536, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).		
All Other Models Both have to be 8" (20.3 cm) or more.			

	Back Wall and Count	ertop Front Dimensions	
Models	С	D	E
KCGS550 and KCGS950		07/ /7 0)	2¾" (6.9 cm)
All Other Models	25" (63.5 cm)	2 ⁷ / ₈ " (7.3 cm)	31/4" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet. If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.

#REVISION LOT #27 Mar 09/2022

ELECTRIC COOKTOP INSTALLATION INSTRUCTIONS

INSTRUCTIONS D'INSTALLATION DE LA TABLE DE CUISSON ÉLECTRIQUE

INSTRUCCIONES DE INSTALACIÓN DE LA PARRILLA ELÉCTRICA

Table of Contents/Table des matières/Tabla de contenidos

COOKTOP SAFETY	2	SÉCURITÉ DE LA TABLE DE CUISSON	10
INSTALLATION REQUIREMENTS		EXIGENCES D'INSTALLATION	10
Tools and Parts	2	Outils et pièces	
Location Requirements		Exigences d'emplacement	10
Electrical Requirements	4	Spécifications électriques	12
INSTALLATION INSTRUCTIONS		INSTRUCTIONS D'INSTALLATION	13
Prepare Cooktop for Installation.	5	Préparation de la table de cuisson pour l'installation	13
Install Cooktop		Installation de la table de cuisson	
Make Electrical Connection	7	Raccordement électrique	15
Attach Cooktop to Countertop	9	Fixation de la table de cuisson au plan de travail	17
Complete Installation		Achever l'installation	17
	REQUISITOS DE INSTALACIÓ Herramientas y piezas	A ELÉCTRICA	
		I mostrador25 25	
	Completal la li Stalación	······································	

IMPORTANT:

Save for local electrical inspector's use.

IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

IMPORTANT:

Ahorre para el uso del inspector eléctrico local.

Quay 08

W11206696D

COOKTOP SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol.

This symbol alerts you to potential hazards that can kill or hurt you and others.

All safety messages will follow the safety alert symbol and either the word "DANGER" or "WARNING." These words mean:

ADANGER

You can be killed or seriously injured if you don't immediately follow instructions.

AWARNING

You can be killed or seriously injured if you don't follow instructions.

All safety messages will tell you what the potential hazard is, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools needed

- Tape measure
- 1/4" (6.35 mm) nut driver
- Marker or pencil
- Pliers
- Flat-blade screwdriver

Parts supplied

- Foam strip roll
- 2½" (6.4 cm) clamping
- Clamping brackets (2)
- Screws (2)

Parts needed

- A UL listed or CSA approved connector for 1/2" (1.3 cm) diameter conduit
- UL listed wire connectors

Check local codes. Check existing electrical supply. See the "Electrical Requirements" section.

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances. When installing cooktop, use minimum dimensions given.

- To eliminate the risk of burns or fire by reaching over the heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- The cooktop must be a specified cooktop that is approved to be installed either alone or over an undercounter built-in oven. Check the cooktop base for an approved installation label. If you do not find this label, contact your dealer to confirm that your cooktop is approved.
- The cooktop must be installed in a level countertop.
- Ovens approved for this type of installation will have an approval label located on the top of the oven. If you do not find this label, contact your dealer to confirm that your oven is approved. Refer to oven manufacturer's Installation Instructions for approval for built-in undercounter use and proper cutout dimensions.
- The cooktop should be installed away from strong draft areas, such as windows, doors, fans or strong heating vents. The cooktop should be located for convenient use in the kitchen.








KCES556 HSS

- Use the countertop opening dimensions that are given with these Installation Instructions. Given dimensions are minimum clearances and provide 0" (0 cm) clearance.
- Grounded electrical supply is required. See "Electrical Requirements" section.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage.

Product Dimensions



- A. Glass depth black and white models 213/4" (55.2 cm) Glass depth - Whirlpool and Maytag stainless steel models 227/8" (58.0 cm)
- Glass depth KitchenAid stainless steel models 215/6" (54.9 cm) B. Glass width - 24" (60.9 cm) models - 2313/1e" (60.5 cm) Glass width - 30" black and white (76.2 cm) models -

30¹³/_{1e}" (78.4 cm) Glass width - Whirlpool and Maytag 30" stainless steel (76.2 cm) models - 30¹³/₁₆" (78.4 cm)

Glass width - KitchenAid 30" stainless steel (76.2 cm) models -303/8" (77.1 cm)

Glass width - 36" black and white (91.4 cm) models -365/16" (92.3 cm)


Glass width - Whirlpool 36" stainless steel (91.4 cm) models -365/16" (92.3 cm)

Glass width - Maytag 36" stainless steel (91.4 cm) models -361/16" (91.5 cm)


Glass width - KitchenAid 36" stainless steel (91.4 cm) models - 35⁷/₈" (91.0 cm)

- C. Frame depth 205/16" (51.6 cm)
- D. Frame width 24" (60.9 cm) models 21⁵⁹/64" (55.7 cm) Frame width 30" (76.2 cm) models 29" (73.7 cm) Frame width 36" (91.4 cm) models 34⁷/16" (87.5 cm)
- Cooktop height with bottom heat shield 37/8" (9.8 cm) Cooktop height lighted knobs - 415/16" (12.55 cm)
- Cooktop height including conduit (located at rear of cooktop, right side) - 5" (12.7 cm)

Cooktop height lighted knobs, including conduit (located at rear of cooktop, right side) - 61/1e* (15.4 cm)




A. Location of Power Cord (length of power cord is 48" (121.9 cm), including the conduit)



Cabinet Dimensions

IMPORTANT: If installing a range hood or microwave hood combination above cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.



- A. 24" (60.9 cm) on 24" models; 30" (76.2 cm) on 30" models; 36" (91.4 cm) on 36" models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 114" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 20½" (52.0 cm) recommended cutout.
 Will fit in cutout from 20¾"-20½" (51.8-52.2 cm).
- 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 7" (17.8 cm) minimum from top of
- Junction box or outlet: 9" (23.0 cm) maximum from right side of cabinet
- 291/2" (74.9 cm) recommended cutout on 30" (76.2 cm) models. Will fit in cutout from 291/16"-299/16" (73.8-75.1 cm) on 30" (76.2 cm) models.

35½" (90.2 cm) recommended cutout on 36" (91.4 cm) models. Will fit in cutout from 34% 16"-35% 16" (87.8-90.3 cm) on 36" (91.4 cm)

22°/16" (56.67 cm) recommended cutout on 24" (61.0 cm) Will fit in cutout from 22'/4"- 22°/7" (56.4 - 57.0 cm) on 24" (61.0 cm) models.

- K. 21/2" (6.35 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 11/2" (3.81 cm) minimum clearance between back wall and countertop

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 51/2" (14.0 cm) depth clearance from the top of the countertop to the top of the drawer (or other obstruction) in base cabinet is required.





Electrical Requirements

AWARNING



Electrical Shock Hazard

Disconnect power before servicing.

Use 8 gauge copper wire.

Electrically ground cooktop.

Failure to follow these instructions can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the cooktop is properly grounded.

Make sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.


A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

Before You Make the Electrical Connection:

To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Use a 3-wire or 4-wire, single phase, 120/208 V or 120/240 V, 60 Hz, AC only. The model/serial number rating plate is located on the metal cabinet underneath the cooktop. See the following illustration.



A. Model/serial number plate

According to the NEC, NFPA 70 - 2017 Table 220.55 the demand load for products rated 8.75 kW or less is 80% of the rated value.

Products rated 8.75 to 12 kW have a demand load of 8 kW.

The cooktop is rated for 120/208 V or 120/240 V. Some models have a neutral (white) wire.

For power requirements, refer to the following table:

Family Model	Electrical Rat	ings at 60 Hz
Number	208 V~	240 V~
WCE55US0H	5.0 kW	6.7 kW
WCE55US4H	5.0 kW	6.7 kW
WCE55US6H	6.0 kW	8.0 kW
WCE77US0H	6.4 kW	8.5 kW
VCE77US6H	6.4 kW	8.5 kW
WCE97US0H	6.8 kW	9.1 kW
WCE97US6H	6.8 kW	9.1 kW
MEC8830H	6.5 kW	8.6 kW
MEC8836H	7.4 kW	9.9 kW
KCES550H	7.9 kW	10.5 kW
CES556H	7.9 kW	10.5 kW
KCES950H	7.2 kW	9.6 kW
KCES956H	7.2 kW	9.6 kW
JEC3430H	6.4 kW	8.5 kW
JEC3536H	7.9 kW	10.5 kW
EC4424H	5.5 kW	7.3 kW
JEC4430H	7.2 kW	9.6 kW
JEC4536H	7.2 kW	9.6 kW

- The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.
- Locate the junction box to allow as much slack as possible between the junction box and the cooktop so that the cooktop can be moved if servicing becomes necessary in the future.
- Do not cut the conduit. Use the length of conduit provided. A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.
- If the house has aluminum wiring follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.



INSTALLATION INSTRUCTIONS

Prepare Cooktop for Installation

AWARNING


Excessive Weight Hazard

Use two or more people to move and install cooktop. Failure to do so can result in back or other injury.

Decide on the final location for the cooktop. Avoid drilling into or severing existing wiring during installation.


- Using 2 or more people, place the cooktop upside down on a covered surface using the foam end posts from the packaging. Make sure that the knobs are not resting on the foam.
- Remove foam strip roll from the package containing literature. The roll contains four 1/4" (6.4 mm) strips of foam. Remove one strip at a time. Apply the foam strip adhesive around bottom of the four edges of the cooktop glass, following the edges of the glass.

NOTE: The foam strip helps avoid damage to the underside of the cooktop glass from debris and helps the cooktop sit flat on uneven counters.



- A. Cooktop base
- B. 1/4" (6.4 mm) Foam strip
- C. Cooktop

NOTE: For some models with trim on the front glass edge, apply the foam strip side down around bottom of the cooktop glass only on LEFT, RIGHT and BACK SIDE.



Install Cooktop

Style 1: Cooktop over undercounter built-in oven IMPORTANT: Clamping brackets should not be used.


 Using 2 or more people, place cooktop right side up into the cutout.

NOTE: Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.

Style 2: Cooktop over cabinets

 Determine whether your cabinet construction provides clearance for installing clamping brackets at cooktop base ends


24" (60.9 cm), 30" (76.2 cm) and 36" (91.4 cm) traditional models



- A. Cooktop base bottom
- B. Attachment screw
- C. Clamping bracket
- The clamping brackets can be installed before or after the cooktop is placed into the cutout. Complete the following steps for the option you choose.


Deay

B
B



Installing Brackets Before Placing Cooktop in Cutout

- Using 2 or more people, place the cooktop upside down on a covered surface using the foam end posts from the packaging. Make sure that the knobs are not resting on the foam.
- Remove the attachment screws for the bracket locations from the bottom of the cooktop base.
- 3. Select bracket mounting holes that will allow the bracket to extend far enough out from the cooktop for the installation of 2½" (6.4 cm) clamping screws. See the "Attach Cooktop to Countertop" section for illustration of clamping screw installation



- A. Edge of cooktop base bottom
- B. Clamping bracket
- C. Bracket mounting holes
- D. Bracket clamping hole
- E. Attachment screw
- Attach brackets to cooktop base bottom with bracket attachment screws using the bracket mounting holes selected in Step 3.
- Rotate brackets so they do not extend beyond edge of cooktop base.
- Tighten attachment screws enough to hold brackets in place when cooktop is placed in cutout.
- Using 2 or more people, turn the cooktop right side up and place in cutout.

NOTE: Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.


 Loosen the screws and rotate the brackets so that they are perpendicular to the edge of the cooktop base and extend beyond its edge. Securely tighten screws.

Installing Brackets After Placing Cooktop in Cutout

 Using 2 or more people, place cooktop right side up into the cutout.

NOTE: Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.

- Remove the attachment screws for the selected bracket locations from the bottom of the cooktop base.
- Select bracket mounting holes that will allow the bracket to extend far enough out from the cooktop for the installation of 2½" (6.4 cm) clamping screws.



- A. Cooktop
- B. Cooktop base
- C. Attachment screw
- D. Clamping bracket (extends far enough beyond cooktop base to allow installation of clamping screws)
- E. 2½" (6.4 cm) clamping screw (to be installed in "Attach Cooktop to Countertop")
- F. Countertop
- Attach brackets to cooktop base bottom with bracket attachment screws using the bracket mounting holes selected in Step 3. Securely tighten screws.

Delay





Make Electrical Connection

AWARNING



Electrical Shock Hazard

Disconnect power before servicing.

Use 8 gauge copper wire.

Electrically ground cooktop.

Failure to follow these instructions can result in death, fire, or electrical shock.

This cooktop is manufactured with a frame connected, green or bare ground wire. Connect the cooktop cable to the junction box through the UL listed or CSA approved conduit connector.


Electrical Connection Options

For cooktops with	a 4-wire cable	
If your home has:	And you will be connecting to:	Go to Section:
4-wire direct	A fused disconnect or circuit breaker box	4-Wire Cable from Power Supply to 4-Wire Cable from Cooktop
3-wire direct	A fused disconnect or circuit breaker box	3-Wire Cable from Power Supply to 4-Wire Cable from Cooktop

If your home has:	And you will be connecting to:	Go to Section:
4-wire direct	A fused disconnect or circuit breaker box	4-Wire Cable from Power Supply to 3-Wire Cable from Cooktop
3-wire direct	A fused disconnect or circuit breaker box	3-Wire Cable from Power Supply to 3-Wire Cable from Cooktop

4-Wire Cable from Power Supply to 4-Wire Cable from Cooktop

IMPORTANT: Use the 4-wire cable from power supply where local codes do not permit connecting the frame-ground conductor to the neutral (white) junction box wire.



- A. 4-wire cable from power supply
- B. Black wires
- C. Bare or green wires
- D. 4-wire cable from cooktop
- E. Junction box
- F. White wires
- G. UL listed wire connector
- H. Red wires
- UL listed or CSA approved conduit connector
- 1. Disconnect power.
- 2. Remove junction box cover, if present.
- Connect the flexible cable conduit from the cooktop to the junction box using a UL listed or CSA approved connector for 1/2" (1.3 cm) conduit.
- 4. Tighten screws on conduit connector if present.
- Connect the two black wires together using the UL listed wire connectors.
- Connect the two red wires together using the UL listed wire connectors.
- Connect the two white wires together using the UL listed wire connectors.
- Connect the green or bare ground wire from the cooktop cable to the green or bare ground wire (in the junction box) using the UL listed wire connectors.
- 9. Install junction box cover.
- 10. Reconnect power.








Lot # 27 Maroapo22

3-Wire Cable from Power Supply to 4-Wire Cable from Cooktop

IMPORTANT: Use the 3-wire cable from power supply where local codes permit connecting the frame-ground conductor to the neutral (white) junction box wire:



F. White wire (from power supply)

UL listed or CSA approved

G. UL listed wire connector


conduit connector

H. Black wires

- A. 3-wire cable from power supply
- B. Red wires
- C. White and green or bare ground wires (from cooktop)
- D. 4-wire cable from cooktop
- E. Junction box
- 1. Disconnect power.
- 2. Remove junction box cover, if present.
- Connect the flexible, cable conduit from the cooktop to the junction box using UL listed or CSA approved conduit connector.
- 4. Tighten screws on conduit connector if present.
- Connect the two black wires together using the UL listed wire connectors.
- Connect the two red wires together using the UL listed wire connectors.
- Connect the green or bare and white cooktop cable wires to the white (neutral) wire in the junction box using the UL listed wire connectors.
- Connect the green or bare ground wire from the cooktop cable to the green or bare ground wire (in the junction box) using the UL listed wire connectors.
- 9. Install junction box cover.
- 10. Reconnect power.

4-Wire Cable from Power Supply to 3-Wire Cable from Cooktop

IMPORTANT: Use the 4-wire cable from power supply where local codes do not permit connecting the frame-ground conductor to the neutral (white) junction box wire:



- A. 4-wire cable from power supply
- B. Red wires
- C. Green or bare ground wire (from cooktop)
- D. 3-wire cable from cooktop
- E. Junction box
- F. White wire (from power supply)
- G. UL listed wire connector
- H. Black wires
- UL listed or CSA approved conduit connector
- 1. Disconnect power.
- 2. Remove junction box cover, if present.
- Connect the flexible cable conduit from the cooktop to the junction box using a UL listed or CSA approved conduit connector.
- 4. Tighten screws on conduit connector if present.
- Connect the two black wires together using the UL listed wire connectors.
- Connect the two red wires together using the UL listed wire connectors.
- Connect the green or bare ground wire from the cooktop cable to the green or bare ground wire (in the junction box) using the UL listed wire connectors.
- 8. Put a UL listed wire connector on the end of the white wire.


NOTE: Do not connect the bare ground wire to the neutral (white) wire in the junction box.

- 9. Install junction box cover.
- 10. Reconnect power.










3-Wire Cable from Power Supply to 3-Wire Cable from Cooktop


IMPORTANT: Use the 3-wire cable from power supply where local codes permit connecting the frame-ground conductor to the neutral (white) junction box wire:



- A. 3-wire cable from power supply
- B. Red wires
- C. Green or bare ground wire (from cooktop)
- D. 3-wire cable from cooktop
- E. Junction box
- F. White wire (from power supply)
- G. UL listed wire connector
- H. Black wires
- UL listed or CSA approved conduit connector
- 1. Disconnect power.
- 2. Remove junction box cover, if present.
- Connect the flexible cable conduit from the cooktop to the junction box using a UL listed or CSA approved conduit connector.
- 4. Tighten screws on conduit connector if present.
- Connect the two black wires together using the UL listed wire connectors.
- Connect the two red wires together using the UL listed wire connectors.
- Connect the green or bare cooktop cable wires to the white (neutral) wire in the junction box using the UL listed wire connectors.
- 8. Install junction box cover.
- 9. Reconnect power.

Attach Cooktop to Countertop

NOTE: This section applies only if you are using clamping brackets.



- A. Glass cooktop
- B. Cooktop base
- C. Attachment screw
- D. Clamping bracket (extends far enough beyond cooktop base to allow installation of clamping screws)
- E. 21/2" (6.4 cm) clamping screw
- F. Countertop
- G. Foam seal
- Place the 2½" (6.4 cm) clamping screws into the outermost hole in the clamping bracket.
- Use a screwdriver to tighten the screws against the countertop. Do not overtighten.

Complete Installation

- Check that all parts are now installed. If there is an extra part, go back through the steps to see which step was skipped.
- 2. Check that you have all your tools.
- 3. Dispose of/recycle all packaging materials.
- 4. Use a mild solution of liquid household cleaner and warm water to clean cooktop before use. Dry thoroughly with a soft cloth. For more information, see the "Cooktop Care" section of the Use and Care Guide.
- Read the "Cooktop Use" section in the cooktop Use and Care Guide.
- 6. Reconnect power.
- For further information about the product, read the User Instructions.

NOTE: If the cooktop does not work after turning on the power, check that a circuit breaker has not tripped or a household fuse has not blown. See "Troubleshooting" section in the Use and Care Guide for further information.

If You Need Assistance or Service:


Please reference the "Assistance or Service" section of the Use and Care Guide or contact the dealer from whom you purchased your cooktop.

Deey

- The cooktop should be installed away from strong draft areas, such as windows, doors, fans or strong heating vents. The cooktop should be located for convenient use in the
- Use the countertop opening dimensions that are given with these Installation Instructions. Given dimensions are minimum clearances and provide 0" (0 cm) clearance.
- Grounded electrical supply is required. See "Electrical Requirements" section.


IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage.

Product Dimensions



- A. Glass depth black and white models 21 3/4" (55.2 cm) Glass depth - stainless steel models - 22 1/8" (56.4 cm)
- Glass width 24" (60.9 cm) models 23 ¹³/₁₆" (60.5 cm) Glass width 30" (76.2 cm) models 30 ¹³/₁₆" (78.4 cm) Glass width 36" (91.4 cm) models 36 ⁵/₁₆" (92.3 cm)
- C. Frame depth 20 5/10" (51.6 cm)
- D. Frame width 24" (60.9 cm) models 21 ⁵⁰/64" (55.7 cm) Frame width 30" (76.2 cm) models 29" (73.7 cm) Frame width 36" (91.4 cm) models 34 ⁷/16" (87.5 cm)
- E. Cooktop height with bottom heat shield 3 7/4" (9.8 cm) Cooktop height lighted knobs - 4 15/16 (12,55 cm)
- Cooktop height including conduit (located at rear of cooktop, right side) - 5" (12.7 cm)

Cooktop height lighted knobs, including conduit (located at rear of cooktop, right side) - 6 1/16" (15.4 cm)




A. Location of Power Cord (length of power cord is 48" (121.9 cm), including the conduit)

Cabinet Dimensions



IMPORTANT: If installing a range hood or microwave hood combination above cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.



- A. 24" (60.9 cm) on 24" models; 30" (76.2 cm) on 30" models; 36" (91.4 cm) on 36" models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than ½"[0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- 201/2" (52.0 cm) recommended cutout. Will fit in cutout from 201/2"-201/6" (51.8-52.2 cm).
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 7" (17.8 cm) minimum from top of countertop
- Junction box or outlet: 9" (23.0 cm) maximum from right side of cabinet
- 291/2" (74.9 cm) recommended cutout on 30" (76.2 cm) models. Will fit in cutout from 29 1/10"-29 1/16" (73.8-75.1 cm) on 30" (76,2 cm) models. 35½" (90.2 cm) recommended cutout on 36" (91.4 cm) models. Will fit in cutout from 34 ½","-35 ½"," (87.8-90.3 cm) on

36"(91.4 cm) models. 22 ³/₁₀" (56.67 cm) recommended cutout on 24" (61.0 cm)

- Will fit in cutout from 22 1/4 22 3/7 (56.4 57.0 cm) on 24 (61.0 cm) models.
- K. 2 1/2" (6.35 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1 1/2" (3.81 cm) minimum clearance between back wall and countertop

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 51/2" (14.0 cm) depth clearance from the top of the countertop to the top of the drawer (or other obstruction) in base cabinet is required.



Cabinet Clearances

Side View Front View C C E

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum nonzontal clearances to cooktop.

 D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet.


 24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper.
- E. Gas line opening Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.
- Oven support surface must be solid, level and flush with bottom of cabinet cutout. Floor must be able to support a total weight (microwave and built-in oven) of 208 lbs (95 kg) for 27" (68.6 cm) models or 249 lbs (113 kg) for 30" (76.2 cm) models.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Product Dimensions

27" and 30")(68.6 cm and 76.2 cm) Ovens

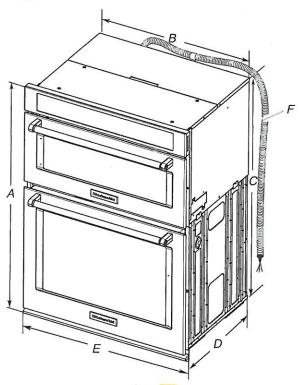

27" (68.6 cm) models


- A. 42% (108.0 cm) overall height B. 25 7/16" (64.6 cm) recessed width C. 41" (104.1 cm) recessed height D. 23 1/4" (59.1 cm) max. recessed depth
- E. 27" (68.6 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

30" (76.2 cm) models

- A. 42% (108.0 cm) overall height B. 28 7/16" (72.2 cm) recessed width
- C. 41" (104.1 cm) recessed height D. 23 1/4" (59.1 cm) max. recessed
- depth
- E. 30" (76.2 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

27" and 30")(68.6 cm and 76.2 cm) Ovens



27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door C. 191/4" (48.9 cm) bottom of
- cutout to floor is recommended. 4"-191/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 25 1/2" (64.8 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 41 5/6" (105 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 191/4" (48.9 cm) bottom of cutout to floor is recommended. 4"-191/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 28 1/2" (72.4 cm) cutout width
- 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 41 5/16" (105 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 41" and 411/2" (104.1 cm and 105.6 cm) for microwave/oven combination.

Electrical Requirements

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/ NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471

CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575





KITCHENAID 36" 5- BURNER GAS COOKTOP - STAINLESS STEEL

\$ 1,649.00

VSN: ACDS-556E 55
Dimensions
Width: 36" (91.4 cm) Height: 3.62" (9.2 cm) Copth: 21" (53.3 cm)

Experience the convenient technology this controp from Kirchundid offers, then Mast^{an} technology was a diffuser plate to adher for more control of the controp, making it ideal for moring those are or someoning sales. With a profession of load and species of electronic control, this control makes it imports to also proceed electronic control, this control makes it imports to also proceed electronic control. This control makes it imports to also proceed electronic control to the control makes it is not stated to the control makes the control of the contro


KitchenAid

- Even Heat Technology
 Professional Dual-Ring Burner
 Courship of Finals
 Electronic Ignation

Kitchaid: 364 5-Burner Gas Cooktop


PV-12 000 May 4 , 2021

Widh: 364 (91.40m) Height: 3.624 (9.20m) Depth: 214 (53.3 cm)

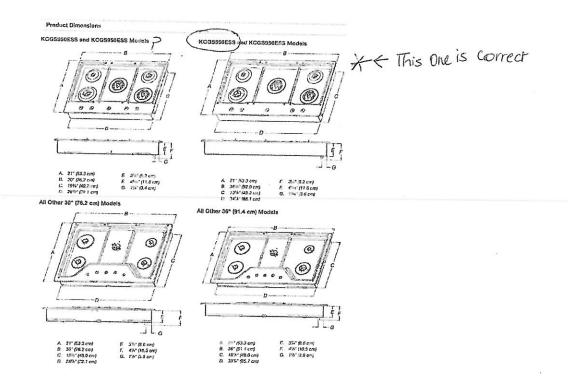

Kirchenaid: 36" 5-Burner Gas Cooktop

PV-1+ 00 87 Nay 4, 1071 Wilh 36" (91. 4 cm) Height: 3,62" (9.2 cm) Depth: 2/4 (53.3 cm)




Countertop Front Edge

		Cutout (Pro	duct Opening) Din	nenalans		
		30	* (76.2 cm) Madels			
Models		A		T	8	
	Min	Recommended	Max	Min	Recommended	Mass
KCGS550 and KCGS950 At Other 30" [76,2 cm] Models	28%* (72.4 cm) 24% * (72.4 cm)	28%* (73.4 cm) 28%* (73.4 cm)	25%* (74.3 cm) 25%* (74.3 cm)	19" (48.3 cm)	19 %" [50 2 cm)	20° 60.8 est
		30*(31.4 pm) Models	1		
All Other 36" (91.4 cm)	34%* (86.0 cm)	35%* 169.4 cm; 34 = 07.0 cm;	35'A' (50.3 cm)	190° (49.5 cm)	19" (10 7 cm)	20° 50 8 cm

Side Walls (Combustible Surfaces)				
Models	H and t			
KCGSS and KCGS9	Hand should rock to man the et less 48" (122.3 cm), with each side individually being at lasts 6" 40 3 cm).			
KCO9350, KCG9358, MGC9530, WCG97US0, WCG97US6	It end in the learning the street of 1922 or the least seem out by long of section 2005 mg			
All Other Models	Both was to be 8" and 3 cm; er maye.			

	Back Wall and Count	lertop Front Denemalons	
Models	С	D	E
KCGS550 and KCGS950	25" (63.5 cm)		297 (8.9 6%)
All Other Models	so tears and	The Davel	214* (7.9 am)

NOTES: After making the countertop current performs in any require mything driven the base cabnet side walks to clear the control base. To award the modification, use a base cabinet with advances wider than the custout. Performs cannot be advanced as for a discount performs the control performs control to the drawer for other obstructions in the performance of the drawer for other obstructions in pure cash not a required. The drawer depth may need to be shortened to avoid materians with the registation. Here for the drawer depth may need to be shortened to avoid materians with the registation. Here for the material performs the shortened to avoid materians above the cooking surface, follow the range head or increasive head continuation and also on encurrent as for demandation above the cooking surface, follow the range head or increasive head continuation and also on encurrent as for demandation alcharances above the cooking surface, follow the range head or materials and account cannot make an advanced to the carriers and the statement of the cooking surface, follow the range head or materials and the surface and the carriers as the cooking surface.



KITCHENAID 30" COMBINATION WALL OVEN WITH EVEN-HEATTM TRUE CONVECTION - KOCE500ESS

\$ 4,899.00

SKU; KOCE500S VSN; KOCE500ESS


Dimensions

Width: 30" (76.2 cm) Height: 42.5" (108.0 cm) Depth: 26.88" (68.3 cm)

Serve chef-quality meals to your family and friends thanks to this KitchenAid 30° combination wall oven. With an extra-large conventional oven and microwave, you'll have all the room you need to create a frue feast. The Even-HeatTM true convection system ensures your oven is heated to, and remains at, the perfect temperature. Use the EasyConvectTM conversion feature to be certain your food is heated through just right

Kitchen Aid 30" Combination wall oven SKY: KOCE 5005 VSN: KOCE 500ESS

Width: 30"(76.2 cm) Height: 42.5" (108 cm) Depth: 26.88"(68.3 cm)



PV-27 (18) (19) Hay 4,2621



Kitchenaid 30" Combination wall oven SKU: KOCE 500S VSN: KOCE 500ESS

Width: 30" (TG.2Cm) Height: 42.5" (108.UCm) Depth: 26.88"(18.3Cm) e Certical supply junction box situated he located 31 (7.6 cm) maximum below for support europe when he per list institute when he per list instituted in a wait cabinat, A 17 (3.5 cm) min man cample hotels bloud have been critical in the left near corner of the junction territore to pace the appliance cable through to the

27" and 30" (68.6 cm and 76.2 cm) Ovens


Cabinet Dimensions

Oven support surface must be sold, laws and flush with boulding of suspend study. For must be subport a forsi weight (monwers and bash-novem) of 128 last (94 bit of 77" (62.6 cm) models as 22.9 last (13.8) for 27" (62.6 cm) models as 2.9 last (13.8) for 27" (62.6 cm)

IMPORTANT: To avoid damago to your cath nuts, check with your budden or challout support to make sure that me materials used will not decolor, desiminate no startain other camago. This over has been der gnod in accondance with the creditioners of Ut, and CSA International and compass with the maximum allowable wood cabinot temperatures of 1947 (30°C).

Product Dimensions

27" and 30" (68.6 cm and 76.2 cm) Ovens



277 (68 6 m) models
A 274 (106 0 m) excell from A 1044 (108 0 m) excell height
B 158 H 46 cm freezand model B 28 H 122 cm recessor with
C 24 (104 1 m) threesand model C 41 (104 1 m) recessor height
D 29 T (59 1 cm) may recessor M 234 F (59 1 cm) most recessor

NOTE: The cutout height can be between 41° and 4115 (104.1 cm and 105.5 cm) for mizrowave/nyen combination

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical tristillar determine I the ground path and wire gauge are in accordance with foca codes. **Bechlool Requirements**

Check with a qualified electrical installer if you are not sure the oven is properly grounded. This oven must be connected to a grounded metal, permane

Be sure that the electhical compaction and wive size are adequate and it nordismance with the National Electrical Code, ANSY META Volution edition or CSA Standards CS21-64, Connation Electrical Code, Part 1 and CS22 No. O-M81 intest edition, and all local cactes and ordinances.

A copy of the above code standards can be obtained from: waring system,

National Fire Protoci on Association 1 Batterymerch Park Ouingy, MA 02169-7471



PV - 27 Cabinetry Schedule

ROOM	DESCRIPTION	PRICE	QTY	TOTAL
KITCHEN	ADD POTS AND PANS DRAWER BELOW COOKTOP		1	
	CONVERT STANDARD CABINETRY TO TALL DEEP BUILT IN OVEN UNIT WITH DRAWER			
	BELOW		1	
	RELOCATE STD BANK OF 4 DRAWERS TO ISLAND (N/C)		1	
	ADJUST CABINETRY FOR 36" COOKTOF (N/C)		1	
	LEAVE 42" SPACE IN UPPER CABINETS ABOVE COOKTOP (N/C)		1	
	CABINETR	Y TOTAL:		

HANDLE PLACEMENT: AT INSTALLERS DISCRETION

LOT#:27	DATE: APRIL 21 2021	
SIGNATURE:		
SIGNATURE:		

GOLDPARK WORTH MORE

Yolande Somerville

From:

Narinder Dulay <ndulay21@yahoo.com>

Sent:

June 3, 2021 6:29 PM


To:

Yolande Somerville

Subject:

Re: PV-27 Ensuite 5 Floor Tile - Urgent Response Required

Taupe looks fine.

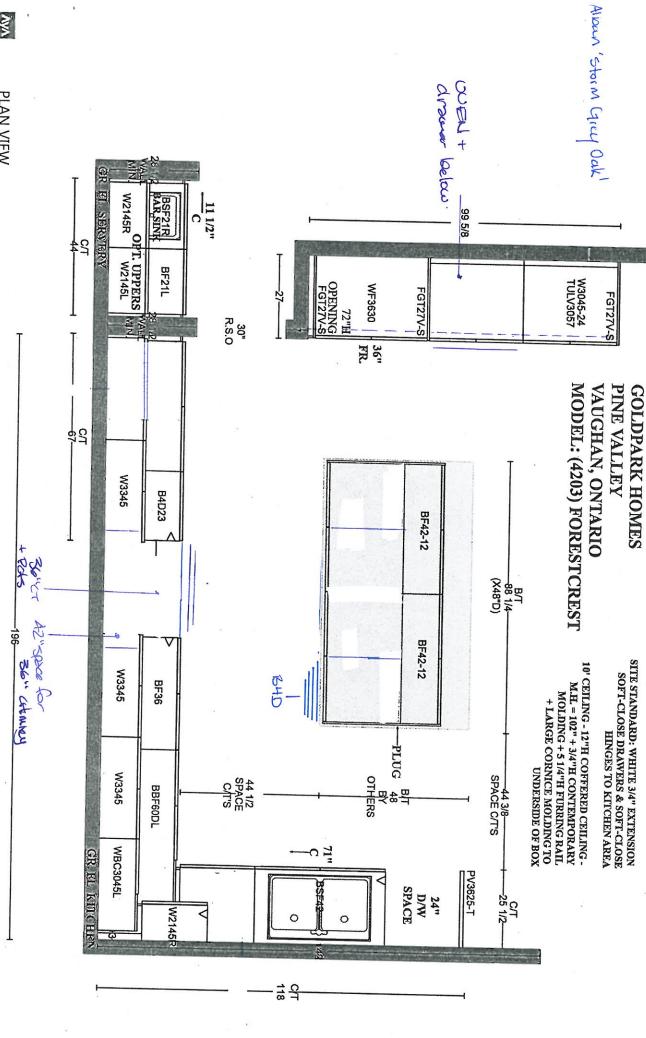

PV-27 April 21, 2021 (P)




April 21, 2021 (B) (B)





MODEL: (4203 OPT.) FORESTCREST GOLDPARK HOMES VAUGHAN, ONTARIO PINE VALLEY


SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES SITE STANDARD: WHITE 3/4" EXTENSION TO VANITIES


VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH THROUGHOUT EACH MASTER ENSUITE VANITY



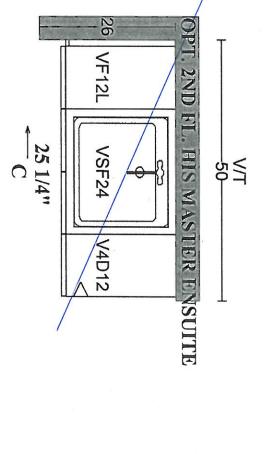

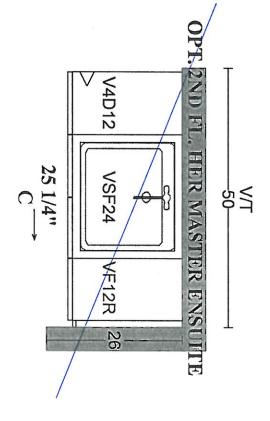

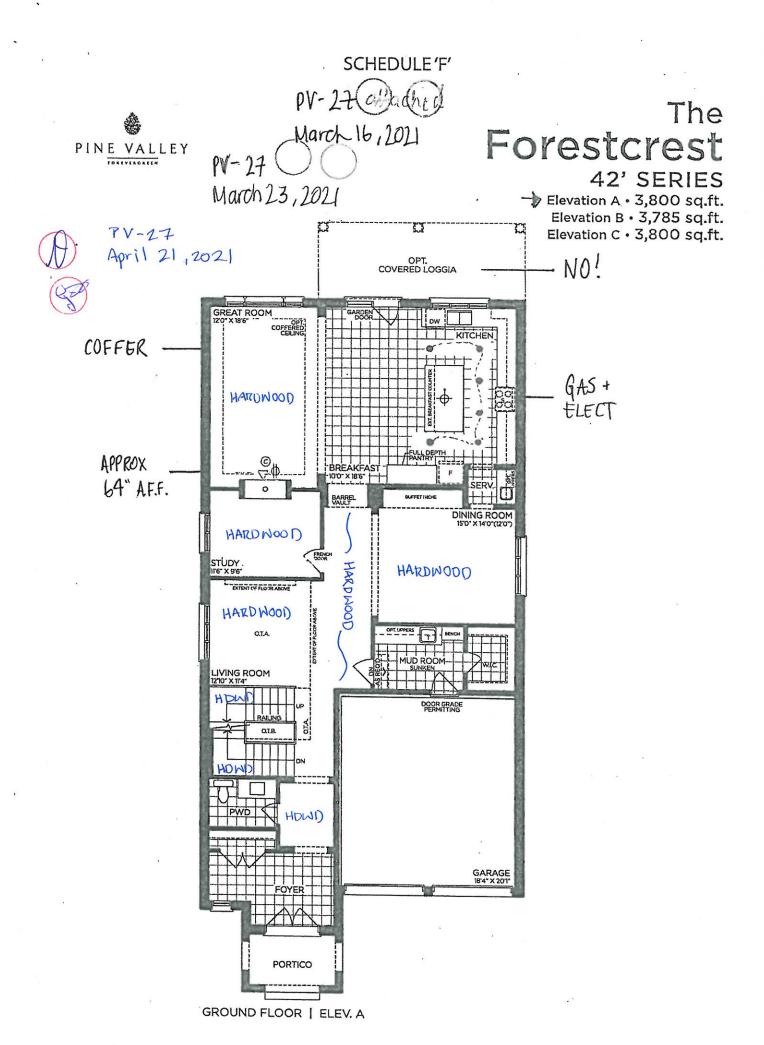



GOLDPARK

WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203

SCHEDULE'F'



PV-27 aby (1) March 16, 2021


PV-27 () March 23, 2021


PV-27 April 21, 2021

The Forestcrest

42' SERIES

Elevation A • 3,800 sq.ft. Elevation B • 3,785 sq.ft. Elevation C • 3,800 sq.ft.

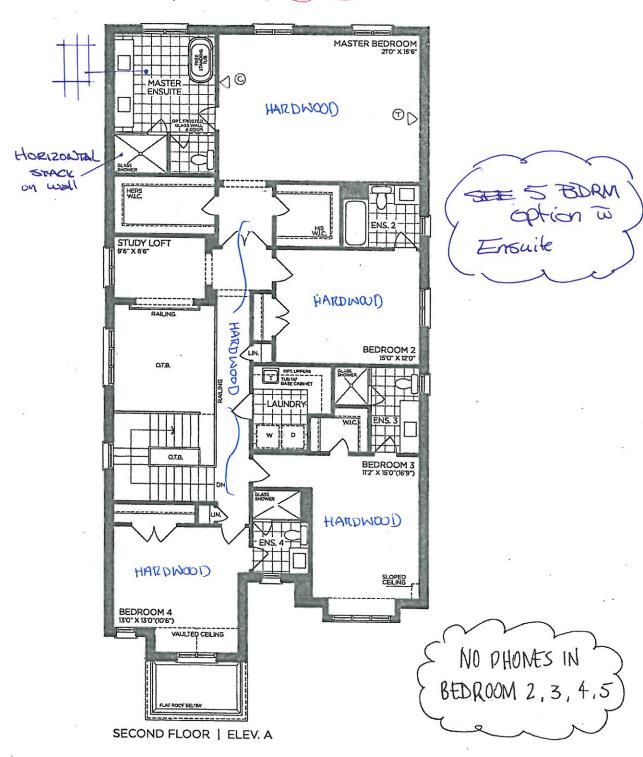




GOLDPARK

WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203




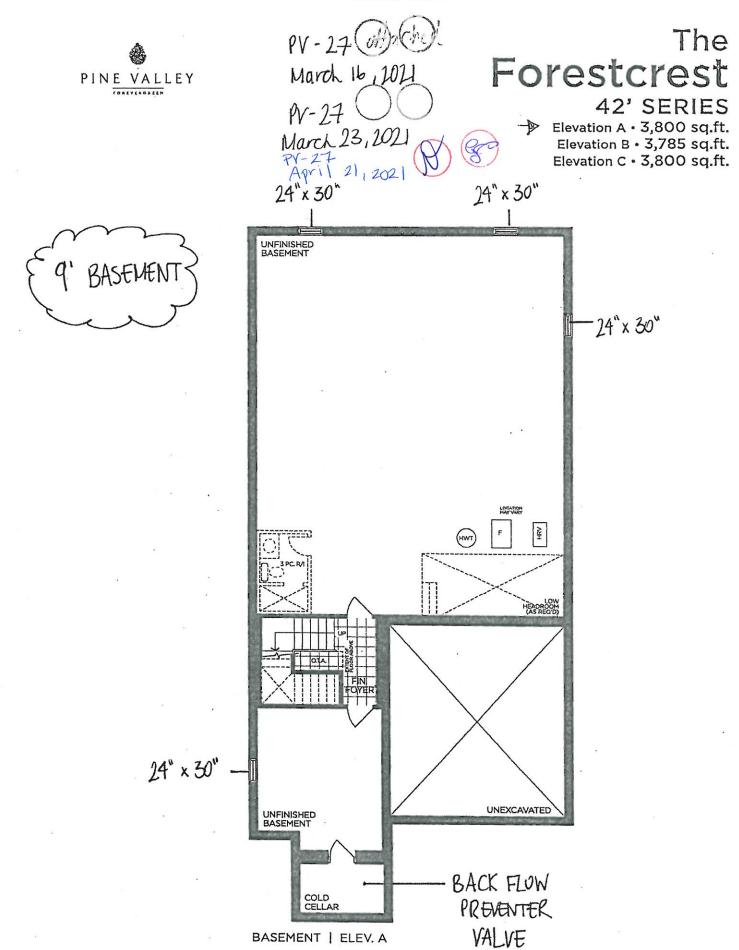

VENDOR	
PURCHASER	
PURCHASER	

GOLDPARK

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203

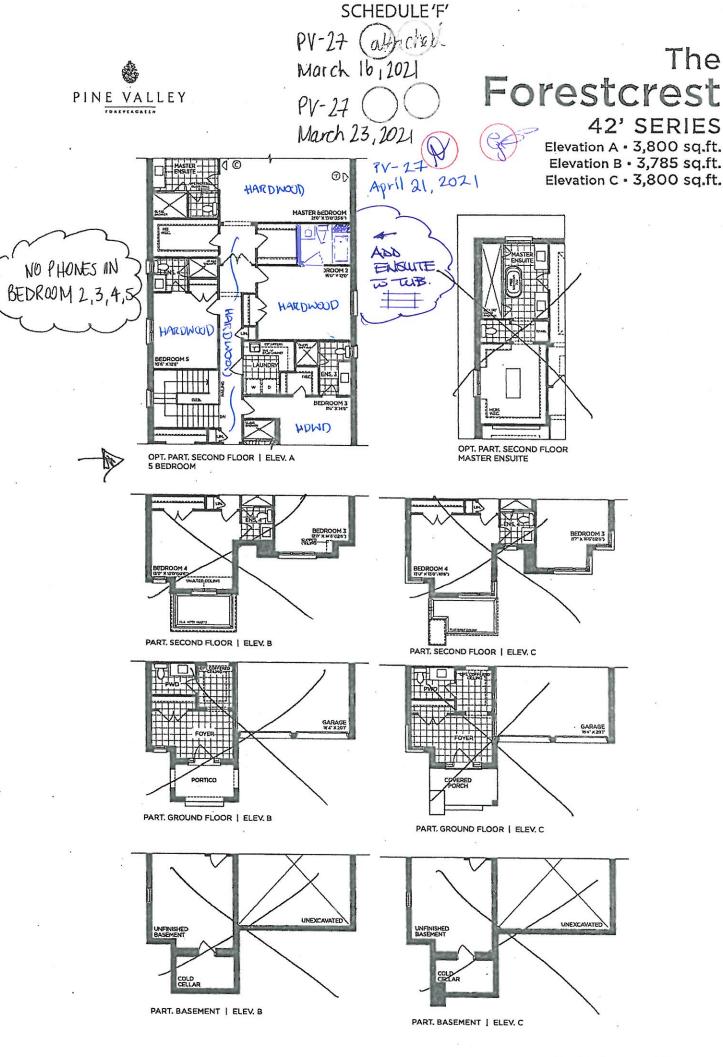


VENDOR

PURCHASER

PURCHASER

GOLDPARK


notices, rigures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203

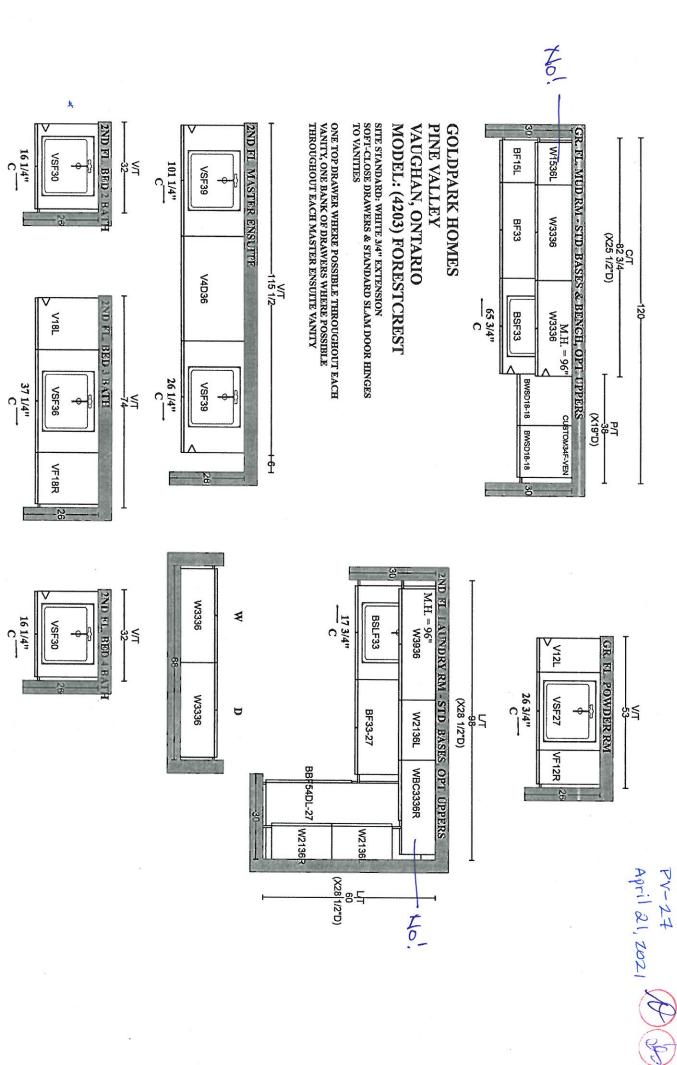



MT6X6

Shower Door Handle



MT6X6	
Shower Door Handle	
6" x 6" back-to-back 3/4" dia. tube Cut and mitred corners with washers (Also available single sided)	CHROME MATTE BLACK BRUSHED GOLD

Lot# 27	Date: APRIL 21 2021	Room: MASTER/ENS 3/4/5.
Signature:		
Signature:		



STONE COUNTERTOP EDGE PROFILES

	STANDARD 2CM EASED EDGE	LOCATION: THRU OUT
	UPGRADE 3CM EASED EDGE	LOCATION:
	UPGRADE 4CM MITRED EDGE	LOCATION:
	UPGRADE 2CM OGEE EDGE	LOCATION:
LOT #: 2 7 SIGNATURE: SIGNATURE:	DATE: April 2	1,2021



H001-02	H001-03	H001-04
H009-03	H009-09	
H011-03	H011-05	H011-06
H033-01	H039-03	*NO HARDWARE
LOT # 2	mpn 21, 2021	
SIGNATURE:		
SIGNATURE:		



Project:		Lot:			
il de la constant de					
Purchaser(s): <u>Marindar</u> , <u>and</u>	Gurne	Dulay			
		0			
Standard Hood Fan Deletion					
We acknowledge that the builder's standard hood fan will not be installed. Do not supply, install and/or credit. We will install our own hood fan after closing.					
Signature:					
Signature:					
Date: April 21, 2021					