


SPECIFICATIONS
For
ELSHAN MIRZAOVA
3 ARBODALE DRIVE
VAUGHAN

Prepared By :
Harpal Bhatia
LUXURY APPLIANCE CONSULTANT .
Best Brand Appliance
647 987 4321

July 25, 2024 / PV2-170





REVEAL™



My Reveal Project

contact:

ELSHAN MIRZAOVA
3 ARBORDALE DRIVE
VAUGHAN ON

For help with questions about the specifications provided for your configuration, call us toll-free between 8am-5pm CST at [\(866\) 689-9653](tel:8666899653).

Disclaimer: We strongly recommend saving all Reveal configurations to "My Sub-Zero Account" to ensure the most up-to-date specification information is reflected on your shared documents as product specifications are subject to change without notice. Otherwise, we suggest that this configuration be recreated prior to finalizing your cabinetry enclosures. The reveal listed in this configuration is the minimum reveal suggested by the manufacturer. After extensive research, Sub-Zero simplified the naming of our refrigeration product lines to be more descriptive and distinct for our consumers. Built-In is now referred to as Classic, and Integrated is now referred to as Designer. Model numbers currently remain unchanged.

July 25, 2024 / PV2-I70



Group 1: Opening and Panel Specs, Custom Panels

Specifications:

Specifications Summary

Planning Notes

Front View

Side View

Top View

Top View Detail

DEC2450FI Panel Specifications

DEC3050R Panel Specifications

Panel Planning Notes

DEC2450FI Additional Requirements

DEC3050R Additional Requirements



DEC2450FI

24" Designer Column Freezer with Ice Maker - Panel Ready, Left Hinge



DEC3050R

30" Designer Column Refrigerator - Panel Ready, Right Hinge



7023628

Designer Handle-to-Handle Dual Installation Kit










Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

July 25, 2024 / PV2-I70



Specifications Summary

Group 1

MODEL	OVERALL DIMENSIONS	WEIGHT	OPENING DIMENSIONS
DEC2450FI - Model Detail	24" 	365 lbs	54" 
CAD Libraries: 3D Studio Max (3DS) En-Ca	84" 		84" 
2D AutoCad (DWG) ca 3D AutoCad (DWG) ca	24" 		25" 
AutoCad (DXF) ca ArchiCad (GSM) 3D Studio Max (MAX)			
Wavefront 3D (OBJ) Revit Files (RFA) SketchUp (SKP)			
User Guides: QR SHEET Subzero Design Guide			
DEC3050R - Model Detail	30" 	425 lbs	
CAD Libraries: 3D Studio Max (3DS) En-Ca	84" 		
2D AutoCad (DWG) ca 3D AutoCad (DWG) ca	24" 		
AutoCad (DXF) ca ArchiCad (GSM) 3D Studio Max (MAX)			
Wavefront 3D (OBJ) Revit Files (RFA) SketchUp (SKP)			
User Guides: QR SHEET Subzero Design Guide			

July 25, 2024 / PV2-I70



Planning Notes


Group 1

Designer Series Refrigeration

The depth of each designer model is 24" (610). Allow for panel thickness when planning the finished opening depth. A minimum 3 1/2" (89) finished return is required on all sides of the opening. Framed cabinets will require additional finished filler material behind the face frame for a proper installation.

Front View


Group 1

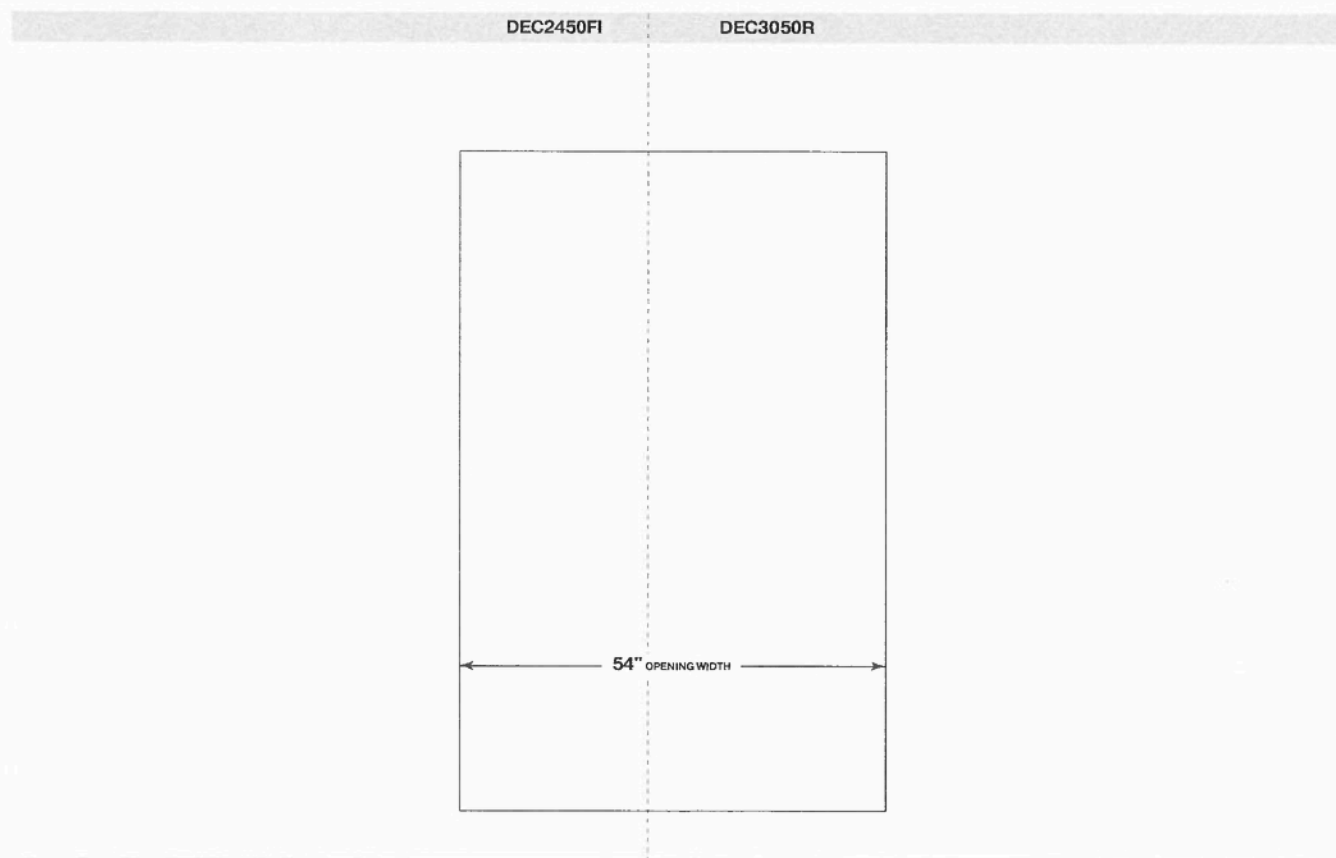

July 25, 2024 / PV2-I70


Top View

Group 1

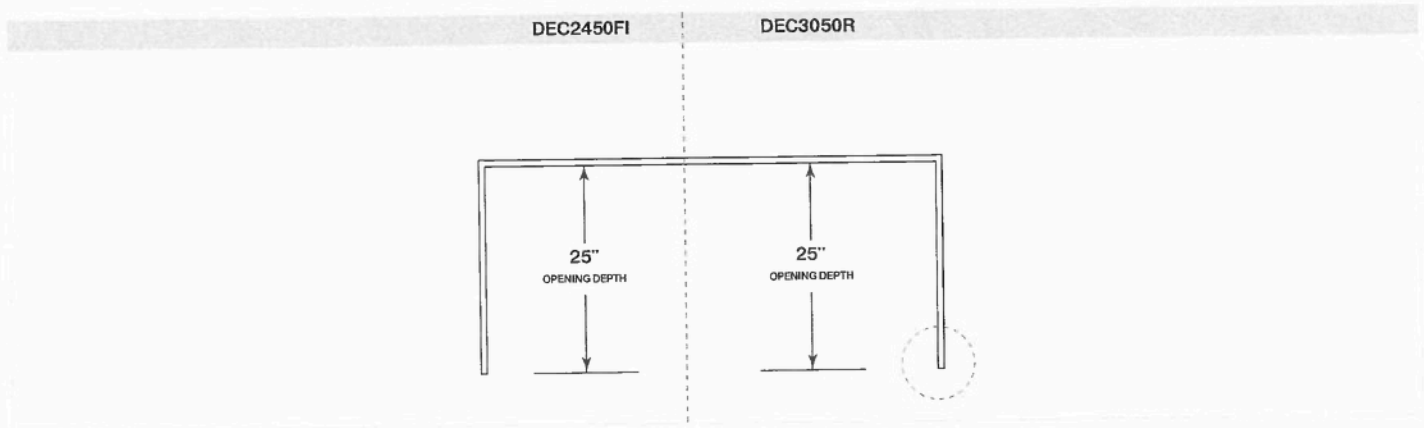

Top View Detail

Group 1

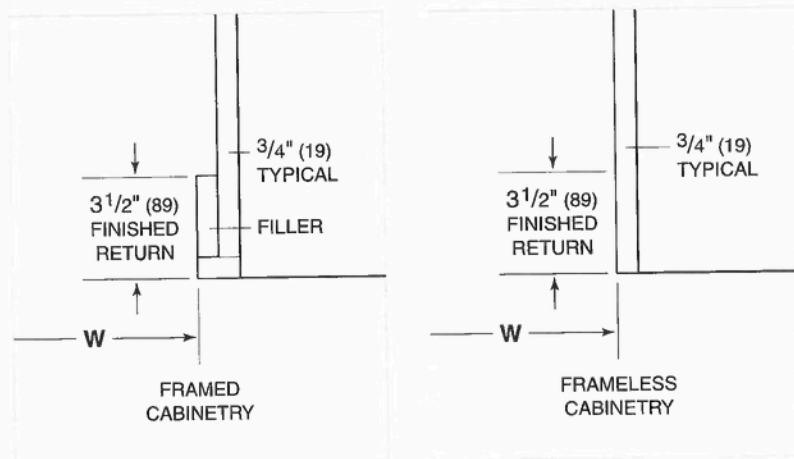


The depth of each designer model is 24" (610). Allow for panel thickness when planning the finished opening depth. A minimum 3 1/2" (89) finished return is required on all sides of the opening. Framed cabinets will require additional finished filler material behind the face frame for a proper installation.

July 25, 2024 / PV2-I70

Side View

Group 1

All Models

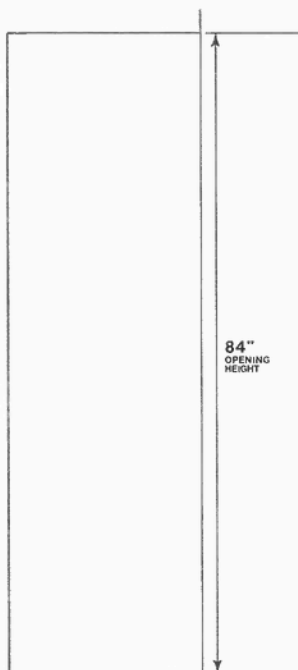


July 25, 2024 / PV2-I70



DEC2450FI Panel Specifications

Group 1

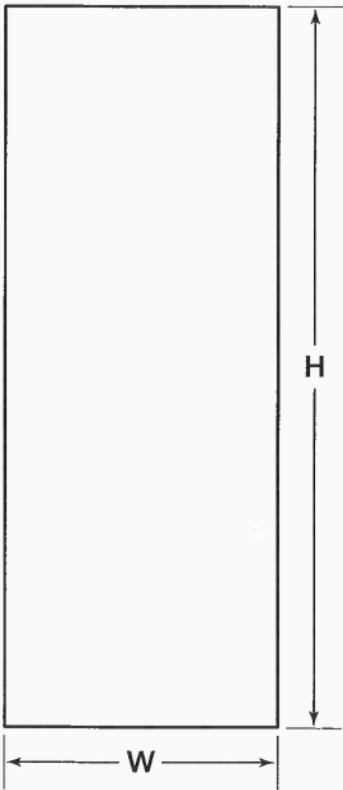


PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Door	23 13/16"	79 7/8"	5/8"	60 lbs

July 25, 2024 / PV2-I70

A red circle containing a handwritten signature in black ink. The signature appears to be 'Jm' or similar initials.

DEC3050R Panel Specifications

Group 1

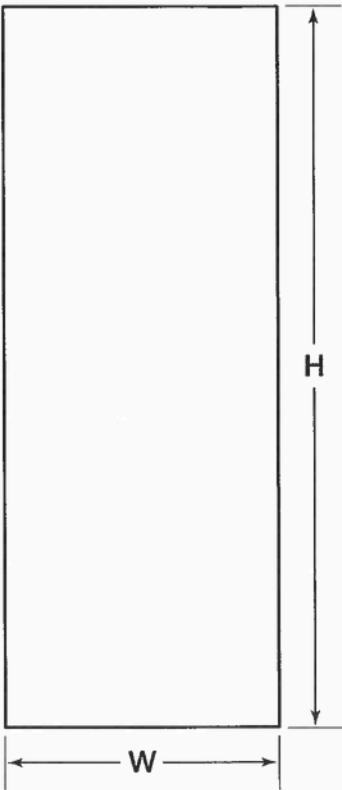

PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Door	29 ¹³ / ₁₆ "	79 ⁷ / ₈ "	⁵ / ₈ "	75 lbs

July 25, 2024 / PV2-170

A red circular stamp containing a handwritten signature in black ink.

Panel Planning Notes

Group 1

For designer models, custom door panels and handle hardware must be provided.

The thickness of the custom panel can vary. A minimum 5/8" (16) thick panel is required, but the thickness can be increased provided it does not exceed the weight limit.

The depth of each designer model is 24" (610). Allow for panel thickness when planning the finished opening depth.

D-style handles are recommended. Door handles must be located near the edge of the panel opposite the hinge and should be centered top to bottom.

Typical panel dimensions are based on an 84" (2134) finished height for column and tall models and 1/8" (3) reveals. Panel dimensions must be adjusted accordingly for all other installations. Finish all sides of custom panels. They will be visible when the door/drawer is open.

Stainless steel tubular and pro handles are available through an authorized Sub-Zero dealer.

Minimum Panel Thickness

5/8"


Standard Handle Lengths (Optional)

HANDLE	TUBULAR	PRO
DEC2450FI Door	50 1/8"	48 3/8"
DEC3050R Door	50 1/8"	48 3/8"

Door Panel Height

Typical panel dimensions are based on an 84" (2134) finished height for column and tall models and 34 1/2" (876) for drawer models, with a 4" (102) toe kick and 1/8" (3) reveals. Panel dimensions must be adjusted accordingly for all other installations.

The height of the custom door panel can extend beyond the typical panel height, provided it does not exceed the weight limit.

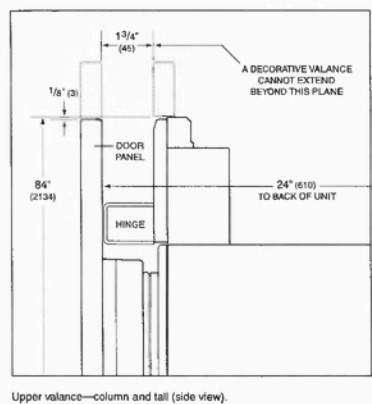


July 25, 2024 / PV2-I70



Toe Kick Clearance


The height of the toe kick area can extend beyond the typical toe kick height, provided it does not exceed the dimensions in the illustration below. Toe kick heights from 2" (51) to 3 7/8" (98) require a reduced toe kick accessory available through an authorized Sub-Zero dealer.

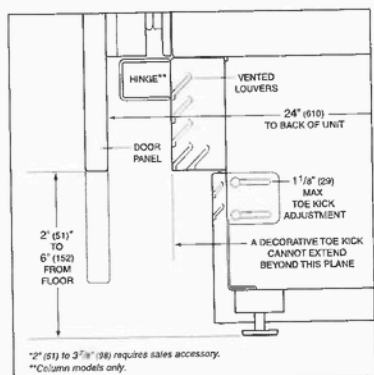

Toe kick (side view).


DEC2450FI Overall Dimensions

Group 1

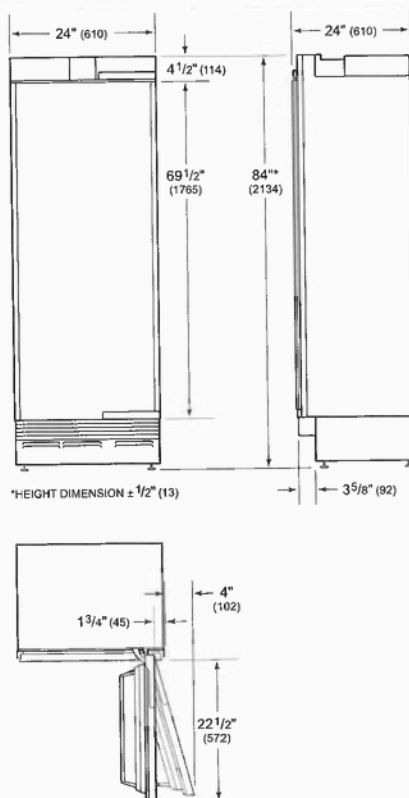

DEC2450FI Electrical

Group 1

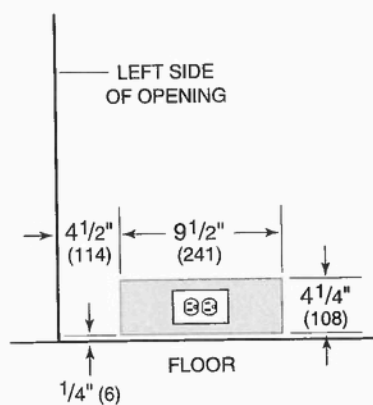

Electrical Supply

grounded, 115 VAC, 60 Hz

Electrical Service


15 amp dedicated circuit

	WARNING
Installation must comply with all applicable electrical codes.	

A separate circuit, servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation. Installation must comply with all applicable electrical codes.

DEC2450FI Plumbing

Group 1

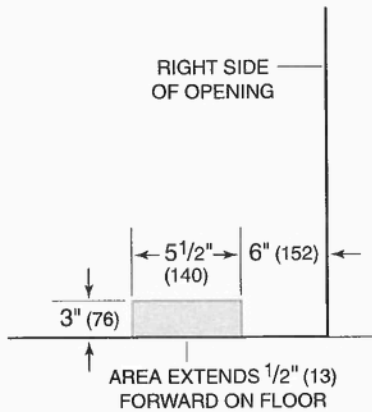

Water Supply	1/4" OD copper, braided stainless steel or PEX tubing
Pressure	35–120 psi
Excess Line For Connection	36"


The water supply line should be connected to the house supply with an easily accessible shut-off valve. Do not use self-piercing valves. The water supply line must not interfere with installation of the anti-tip brackets. A reverse osmosis system can be used provided there is constant water pressure of 35–120 psi (2.4–8.3 bar) supplied to the unit at all times. A copper line is not recommended for this application. Installation must comply with all applicable plumbing codes.

July 25, 2024 / PV2-I70




DEC3050R Overall Dimensions

Group 1

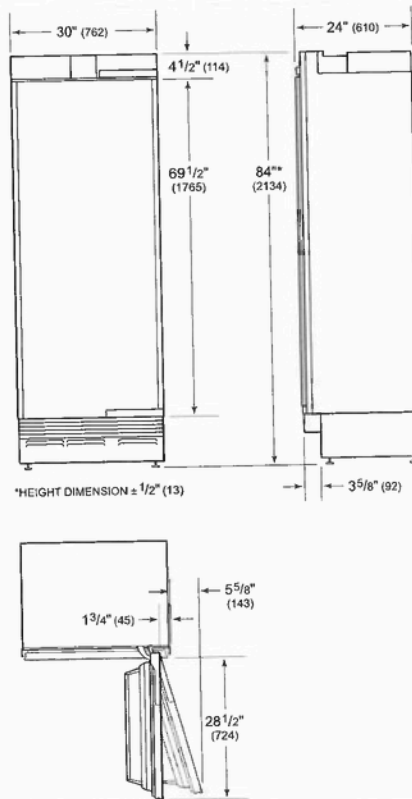

DEC3050R Electrical

Group 1

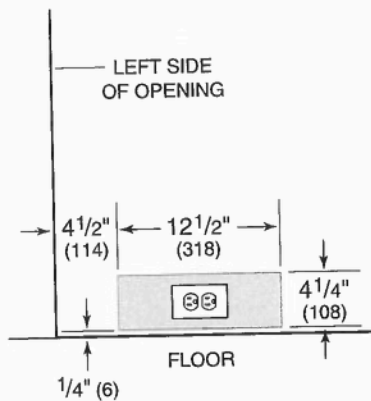

Electrical Supply

grounded, 115 VAC, 60 Hz

Electrical Service

15 amp dedicated circuit



WARNING

Installation must comply with all applicable electrical codes.

A separate circuit, servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation. Installation must comply with all applicable electrical codes.

Group 2: Flush Inset Installation

Specifications:

Specifications Summary

Planning Notes

Front View

Side View

Top View

SO3050TM/S/T Additional
Requirements

SPO30TM/S/TH Additional
Requirements

WWD30 Additional Requirements



SPO30TM/S/TH
30" M Series Transitional Speed Oven



SO3050TM/S/T
30" M Series Transitional Built-In Single Oven



WWD30
30" Warming Drawer



823278
30" Transitional Warming Drawer Front Panel - M Series

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.



















July 25, 2024 / PV2-I70



Specifications Summary

Group 2

SECTION A

MODEL	OVERALL DIMENSIONS	OPENING DIMENSIONS	CLEAT DEPTH	TRIM OVERLAP	BASE SUPPORT
SPO30TM/S/TH - Model	29 $\frac{7}{8}$ " 	30 $\frac{1}{8}$ " 	$\frac{7}{8}$ "	$\frac{3}{16}$ " Top	125 lbs
<u>Detail</u>	17 $\frac{7}{8}$ " 	18 $\frac{1}{8}$ " 		0" Bottom	
CAD Libraries: <u>3D Studio</u>	21 $\frac{1}{2}$ " 	24" 		3 $\frac{7}{8}$ " Sides	
<u>Max (3DS) En-Ca</u>					
<u>2D AutoCad (DWG) ca</u>					
<u>3D AutoCad (DWG) ca</u>					
<u>AutoCad (DXF) ca</u>					
<u>ArchiCad (GSM)</u>					
<u>3D Studio Max (MAX)</u>					
<u>Wavefront 3D (OBJ)</u>					
<u>Revit Files (RFA)</u>					
<u>SketchUp (SKP)</u>					
User Guides: <u>QR SHEET</u>					
<u>Wolf Design Guide</u>					
SO3050TM/S/T - Model	29 $\frac{7}{8}$ " 	30 $\frac{1}{8}$ " 	$\frac{7}{8}$ "	1" Top	250 lbs
<u>Detail</u>	28 $\frac{1}{2}$ " 	28 $\frac{3}{4}$ " 		0" Bottom	
CAD Libraries: <u>3D Studio</u>	23" 	24" 		1 $\frac{1}{16}$ " Sides	
<u>Max (3DS) En-Ca</u>					
<u>3D AutoCad (DWG) ca</u>					
<u>2D AutoCad (DWG) ca</u>					
<u>AutoCad (DXF) ca</u>					
<u>ArchiCad (GSM)</u>					
<u>3D Studio Max (MAX)</u>					
<u>Wavefront 3D (OBJ)</u>					
<u>Revit Files (RFA)</u>					
<u>SketchUp (SKP)</u>					
User Guides: <u>QR SHEET</u>					
<u>Wolf Design Guide</u>					
WWD30 - Model Detail	29 $\frac{7}{8}$ " 	30 $\frac{1}{8}$ " 	0"	$\frac{5}{8}$ " Top	200 lbs
CAD Libraries: <u>3D Studio</u>	9 $\frac{1}{8}$ " 	10 $\frac{5}{8}$ " 		$\frac{5}{8}$ " Bottom	
<u>Max (3DS) En-Ca</u>	22 $\frac{3}{4}$ " 	24" 		$\frac{5}{8}$ " Sides	
<u>3D AutoCad (DWG) ca</u>					
<u>2D AutoCad (DWG) ca</u>					
<u>AutoCad (DXF) ca</u>					
<u>ArchiCad (GSM)</u>					

July 25, 2024 / PV2-I70

[3D Studio Max \(MAX\)](#)

[Wavefront 3D \(OBJ\)](#)

[Revit Files \(RFA\)](#)

[SketchUp \(SKP\)](#)

User Guides: [QR SHEET](#)

[Wolf Design Guide](#)

w/ Trim Kit

30" Transitional Warming

Drawer Front Panel - M

Series (823278)

Planning Notes

Group 2

Cleats will be visible and should be finished to match the cabinetry.

If two products with different reveals are specified, the larger reveal must be used.

Dimensions provided assume minimum allowable reveals.

Speed Ovens

A minimum 1/8" (3) reveal is required on all sides.

M Series Built-In Ovens

If a cooktop is being installed above an oven, a minimum of 1/4" (6) is required between units.

A minimum 1/8" (3) reveal is required on all sides.

Warming Drawers

The warming drawer must be installed with a Wolf drawer front. A panel mounting kit is required when installing a custom panel. The panel mounting kit is available through an authorized Wolf dealer.

For a standard installation, the drawer collar and front panel sit proud of the cabinet face frame. A recessed installation requires the cabinetry be recessed by 3/16" (5) so the collar is flush with the cabinet face frame but the drawer front will sit proud. A flush inset installation requires the drawer collar and front panel be recessed to be flush with surrounding cabinetry.

Custom front panel flush inset depth is dependent on the panel thickness. Add 1/4" (6) to the panel thickness to determine the flush inset cleat depth.

A minimum 1/8" (3) reveal is required on all sides.


July 25, 2024 / PV2-I70



Front View

Group 2


SECTION A

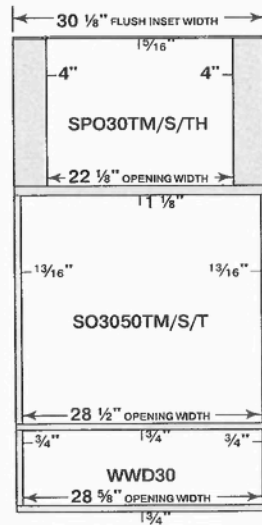

Top View

Group 2

SECTION A




July 25, 2024 / PV2-I70

Side View

Group 2

SECTION A

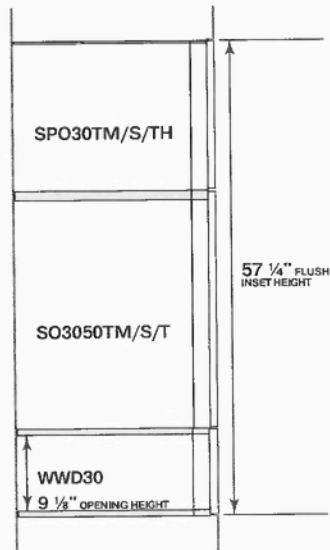


July 25, 2024 / PV2-I70




SO3050TM/S/T Overall Dimensions

Group 2

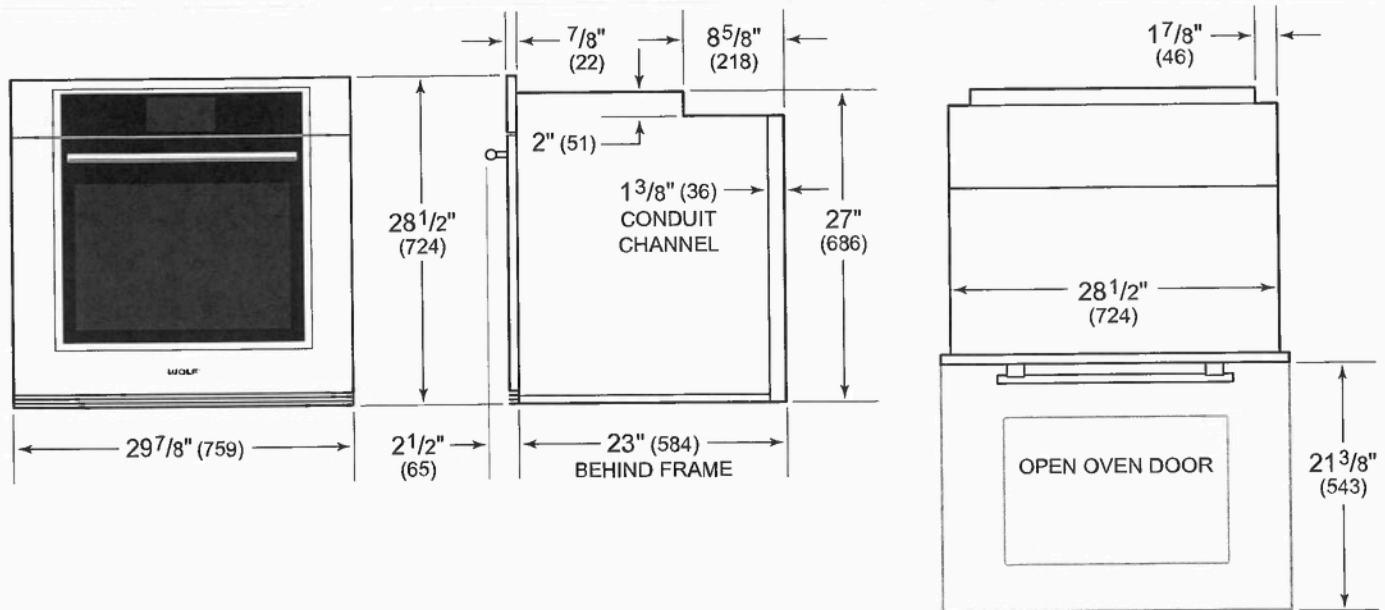

SO3050TM/S/T Electrical

Group 2

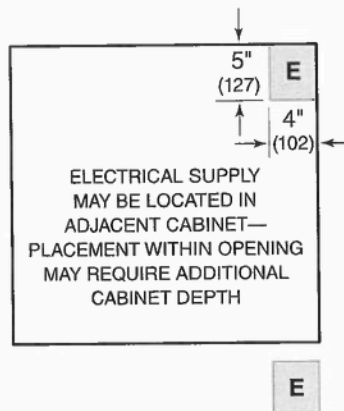

Electrical Supply grounded, 240/208 VAC, 60 Hz

Electrical Service 30 amp dedicated circuit

Conduit Length 4 Feet

WARNING

Installation must comply with all applicable electrical codes.


Performance may be compromised if the electrical supply is less than 240 volts.

The oven is supplied with a conduit consisting of two insulated hot lead conductors and a bare ground conductor. The wiring diagram covering the control circuit is provided with the oven.

July 25, 2024 / PV2-I70


SPO30TM/S/TH Overall Dimensions

Group 2

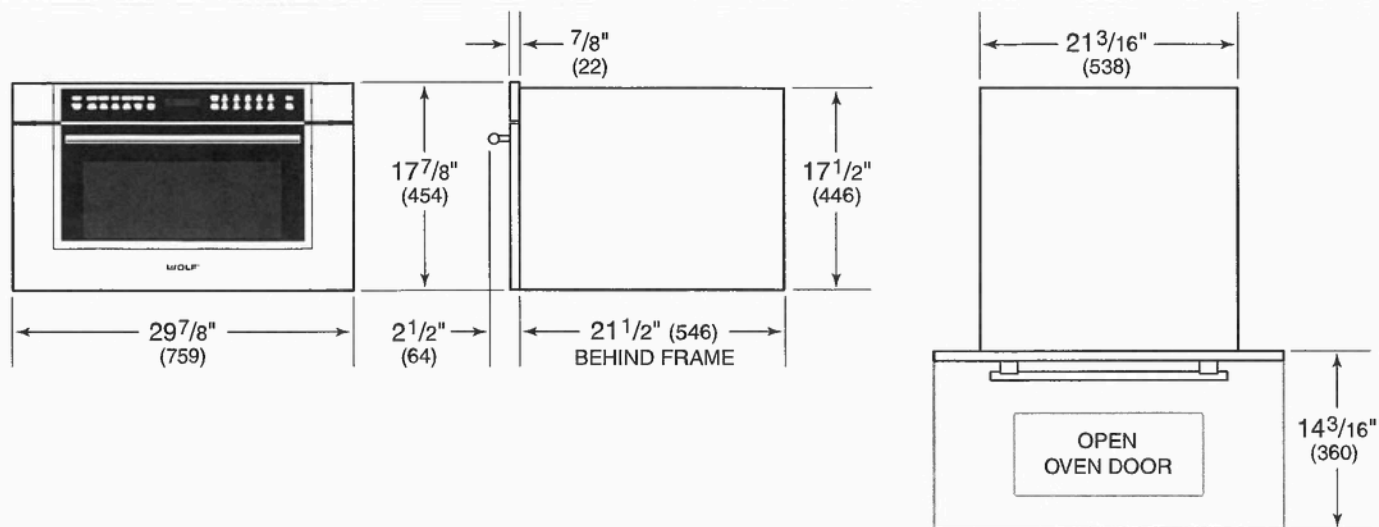

SPO30TM/S/TH Electrical

Group 2




Electrical Supply	grounded, grounded, 240/208 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	6 Feet
Receptacle	NEMA 6-20R grounding type



WWD30 Overall Dimensions


Group 2

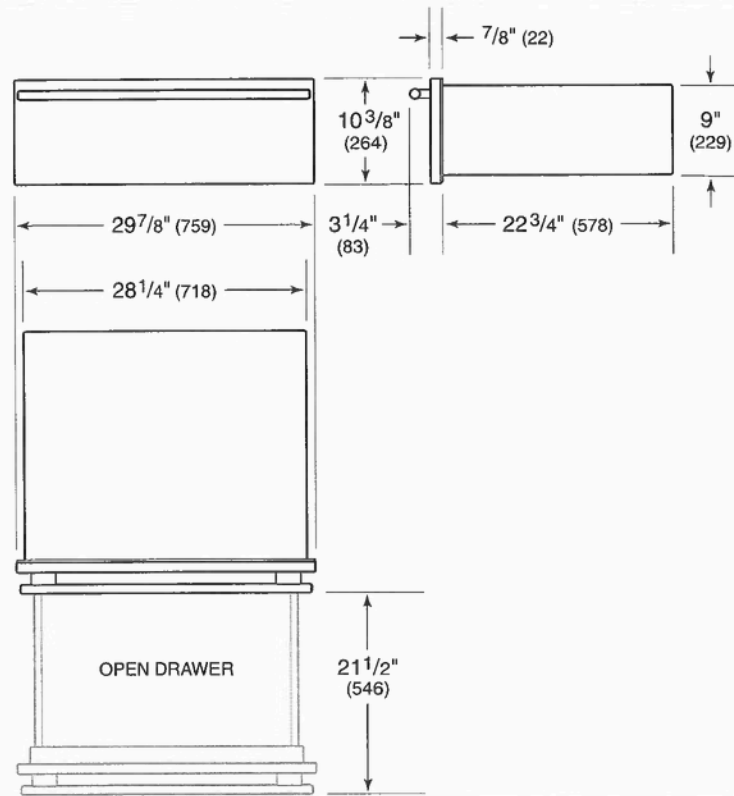

July 25, 2024 / PV2-170

WWD30 Electrical

Group 2



ELECTRICAL SUPPLY WITHIN
OPENING OR IN ADJACENT
CABINET WITHIN REACH OF
POWER CORD

Electrical Supply	grounded, 120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	3 Feet
Receptacle	3-prong grounding-type

**WARNING**

Installation must comply with all applicable electrical codes.

For ease of installation, the electrical supply can be placed in an adjacent cabinet within reach of the power cord. A ground fault circuit interrupter (GFCI) is required for model WWD300 to reduce the risk of electrical shock. Installation must comply with all applicable electrical codes.

July 25, 2024 / PV2-I70

SRT486G

Specifications:

Specifications Summary

Planning Notes

Views

Additional Requirements



SRT486G

48" Sealed Burner Rangetop - 6 Burners and Infrared Griddle

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

July 25, 2024 / PV2-I70



Specifications Summary

Single Model: SRT486G




MODEL

OVERALL DIMENSIONS

SRT486G - [Model Detail](#)

CAD Libraries: [3D Studio Max \(3DS\) En-Ca](#)
[2D AutoCad \(DWG\) ca](#) [3D AutoCad \(DWG\) ca](#)
[AutoCad \(DXF\) ca](#) [ArchiCad \(GSM\)](#)
[3D Studio Max \(MAX\)](#) [Wavefront 3D \(OBJ\)](#)
[Revit Files \(RFA\)](#) [SketchUp \(SKP\)](#)

User Guides: [QR SHEET](#) [Wolf Design Guide](#)

47 ⁷/₈" 8 ¹/₂" 28 ¹/₂" 

Planning Notes

Single Model: SRT486G

Rangetops


When installing against a combustible surface, a minimum 5" (127) riser is required for model SRT366, and a minimum 10" (254) riser is required for 36" and 48" sealed burner rangetops with a charbroiler or griddle. Models SRT362W and SRT484W cannot be installed against a combustible surface.

July 25, 2024 / PV2-170



Views

Single Model: SRT486G

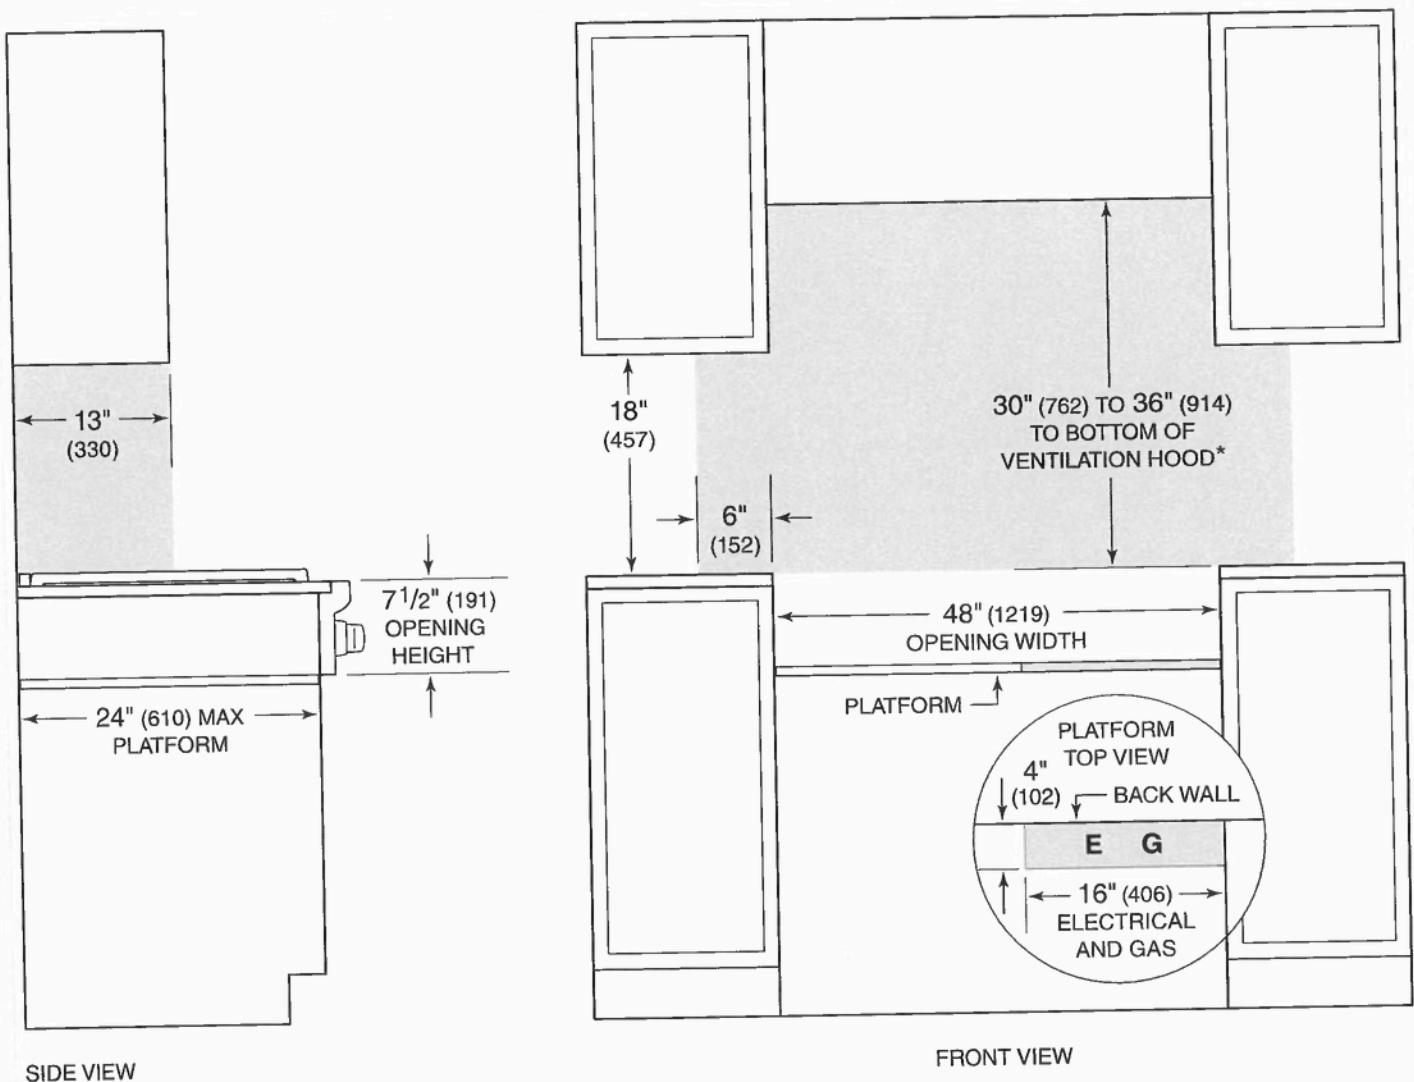

SIDE VIEW

FRONT VIEW

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.


Electrical and gas supply located through bottom of platform.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

July 25, 2024 / PV2-I70


Overall Dimensions

Single Model: SRT486G

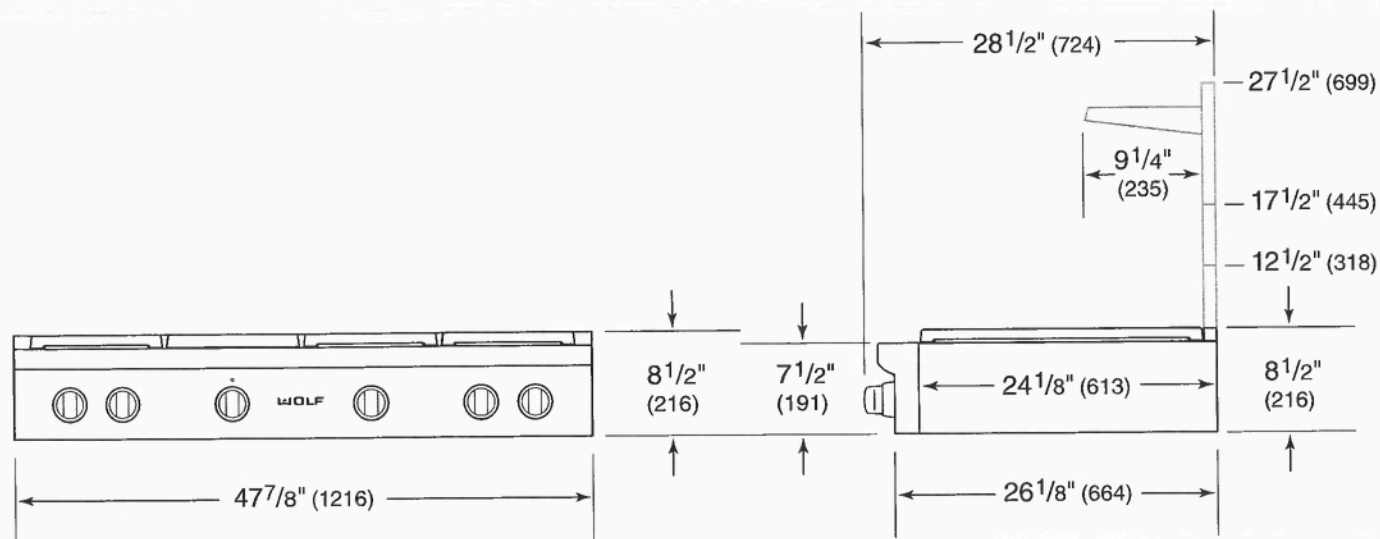

Electrical

Single Model: SRT486G

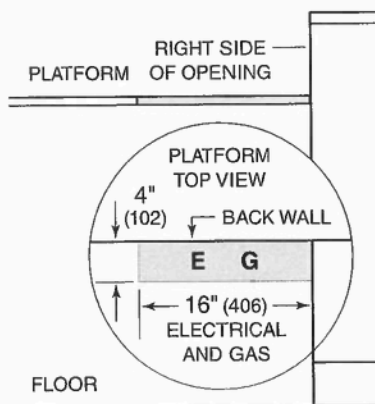

Electrical Supply	grounded, 120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type


**WARNING**

Installation must comply with all applicable electrical codes.

July 25, 2024 / PV2-I70

Gas

Single Model: SRT486G

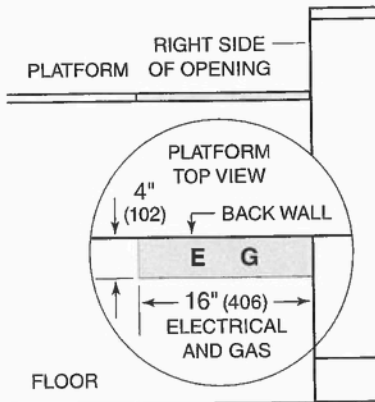

Gas Supply 3/4" ID line

Gas Inlet 1/2" NPT female

A gas supply line of 3/4" (19) rigid pipe must be provided to the rangetop. If local codes permit, a certified, 3' (.9 m) long, 1/2" (13) or 3/4" (19) ID flexible metal appliance connector is recommended to connect the units 1/2" NPT female inlet to the gas supply line.

Wolf natural gas rangetops will function up to 10,250' (3124 m) in altitude without adjustment and LP gas rangetops up to 8,600' (2621 m).

July 25, 2024 / PV2-I70

DW2450: Opening and Panel Specs, Custom Panel, 24" Install

Specifications:

Specifications Summary

Front View

Side View

Top View

Top View Detail

Panel Specifications

Panel Planning Notes

Additional Requirements



DW2450

24" Dishwasher - Panel Ready

July 25, 2024 / PV2-I70

Specifications Summary

Single Model: DW2450

MODEL

DW2450 - [Model Detail](#)

CAD Libraries: [3D Studio Max \(3DS\) En-Ca](#)
[2D AutoCad \(DWG\) ca](#) [3D AutoCad \(DWG\) ca](#)
[AutoCad \(DXF\) ca](#) [ArchiCad \(GSM\)](#)
[3D Studio Max \(MAX\)](#) [Wavefront 3D \(OBJ\)](#)
[Revit Files \(RFA\)](#) [SketchUp \(SKP\)](#)


User Guides: [QR SHEET](#)

OVERALL DIMENSIONS

23 ⁵/₈" W34 ¹/₂" H23 ¹/₄" D

Front View

Single Model: DW2450

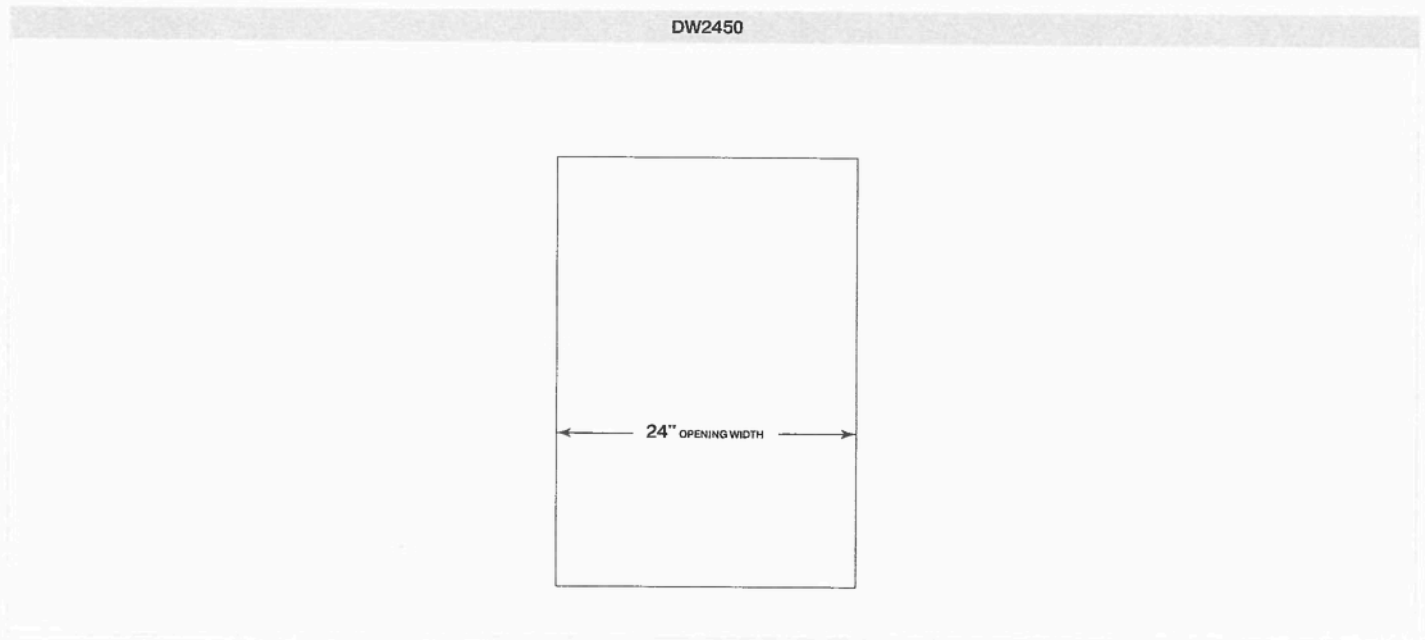


July 25, 2024 / PV2-I70




Top View

Single Model: DW2450

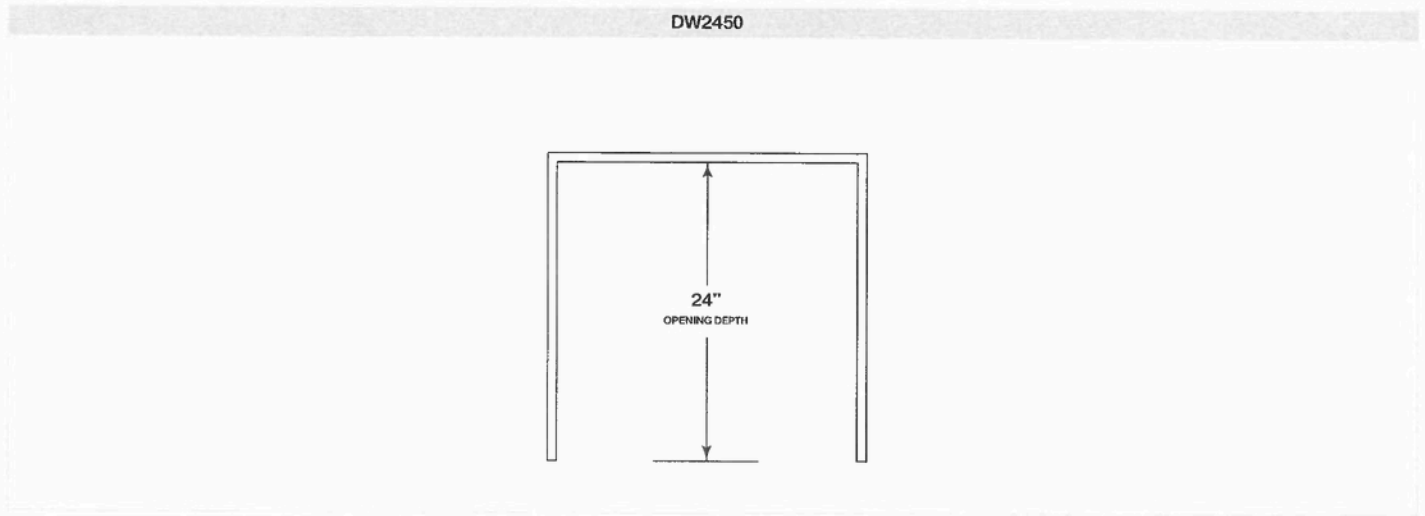

Top View Detail


Single Model: DW2450

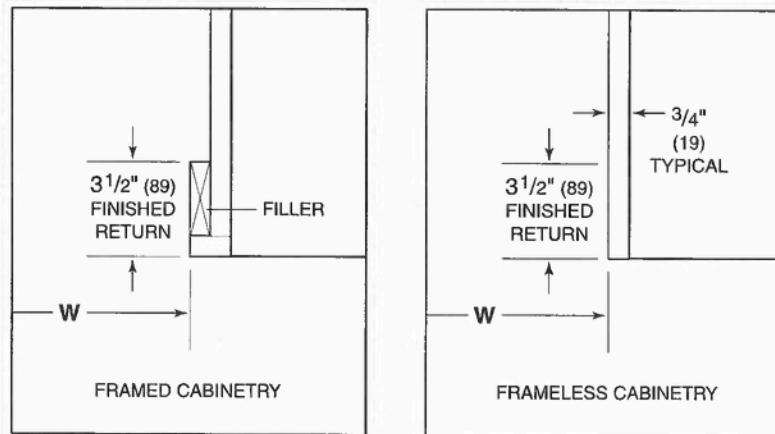

The depth of each dishwasher model is 23 1/4" (591). Allow for panel thickness when planning the finished opening depth. A minimum 3 1/2" (89) finished return is required on all sides of the opening. Framed cabinets will require additional finished filler material behind the face frame for a proper installation.

Side View

Single Model: DW2450

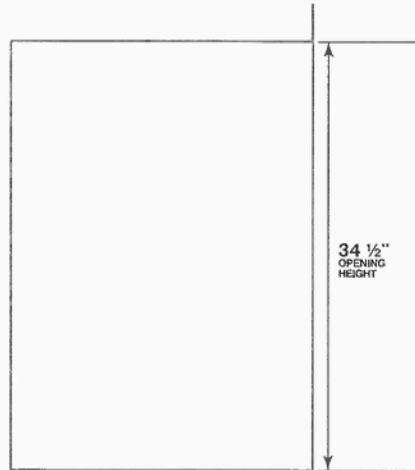


July 25, 2024 / PV2-170



Panel Specifications

Single Model: DW2450

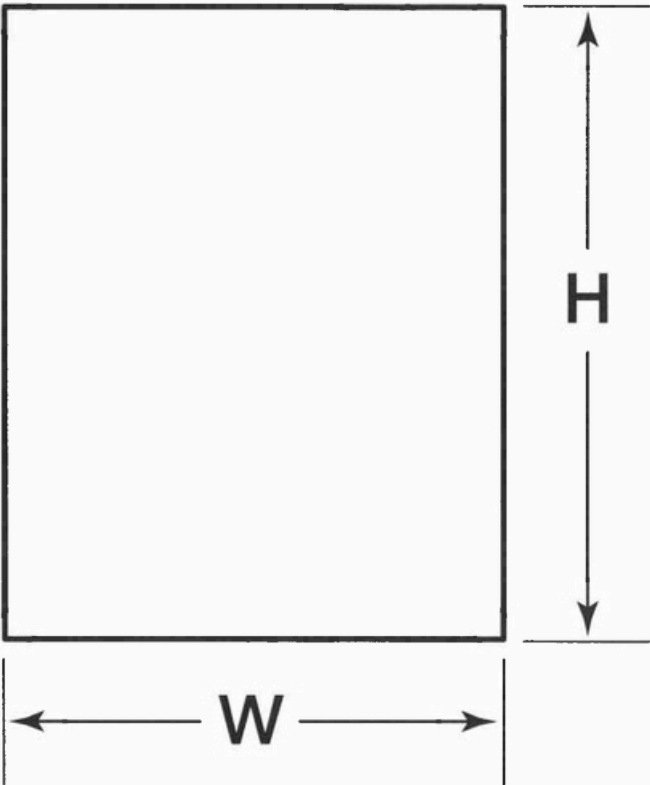

PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Door	23 ³ / ₄ "	30 ³ / ₈ "	1/2 "	16 lbs

July 25, 2024 / PV2-I70



Panel Planning Notes

Single Model: DW2450

The thickness of the custom panel can vary. A minimum 1/2" (13) thick panel is required, but the thickness can be increased provided it does not exceed the 20 lb weight limit (less than 16 lb is optimal).

The depth of each dishwasher is 23 1/4" (591). Allow for panel thickness when planning the finished opening depth.

Finish all sides of custom panels. They will be visible when the door is open.


The panel dimensions are based on a 34 1/2" (876) opening height and 1/8" (3) top reveal. For all other opening heights, adjust the panel accordingly. The minimum panel height is 28" (711). The minimum toe kick height is 4" (102).

Stainless steel tubular and pro handles are available through an authorized Sub-Zero dealer.

Minimum Panel Thickness



1/2"

Toe Kick Clearance

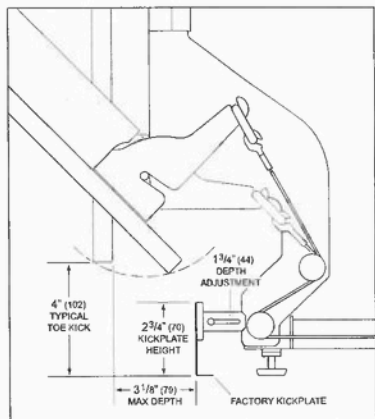


Overall Dimensions

Single Model: DW2450

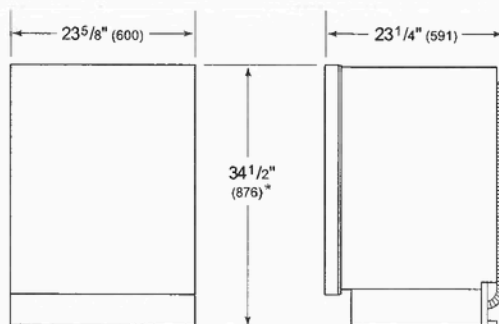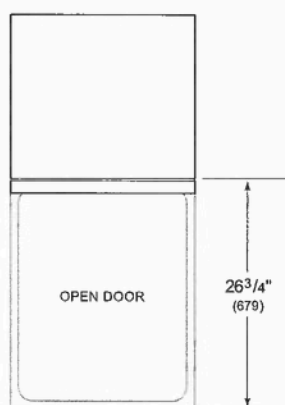* $34"$ (864) MIN TO $34\frac{5}{8}"$ (880) MAX

Electrical

Single Model: DW2450

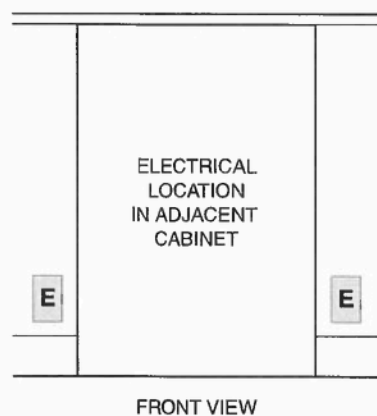


Electrical Supply	grounded, 115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
output-field-label-cord-length	6'

	WARNING
Installation must comply with all applicable electrical codes.	

July 25, 2024 / PV2-I70

Plumbing

Single Model: DW2450


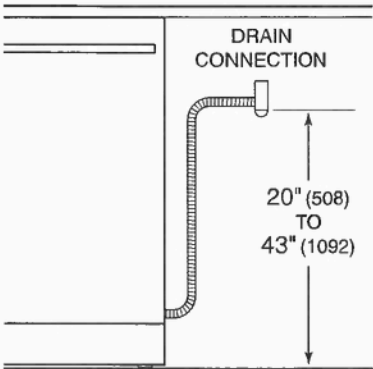


Water Connection	5' braided tubing with 3/8" female compression fitting
Drain Connection	5' (1.5 m) corrugated tubing
Pressure	30–140 psi




Special Notes: LED lights. This model is not available with heat lamps.

WIDTH:	46 3/8"
DEPTH:	19 1/4"
HEIGHT:	12"
CFM:	600
SONES:	6.5
AMPS:	4.0
# LIGHTS:	3

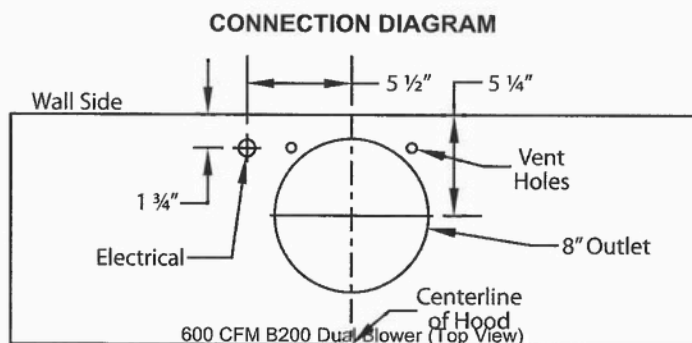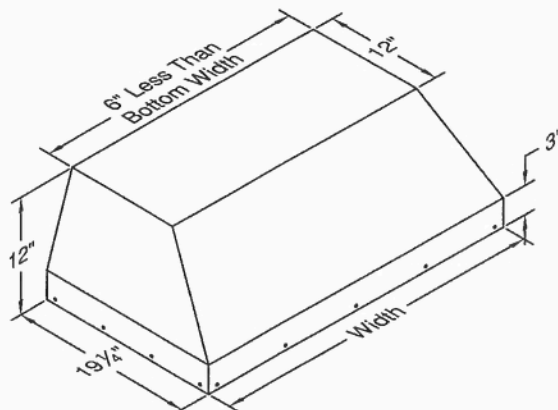

REC. MOUNTING HEIGHT*

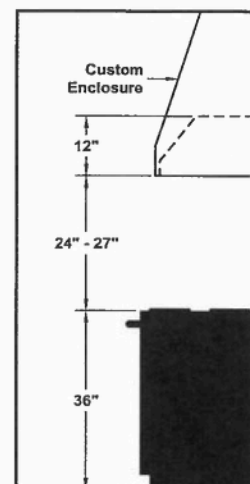

* Exceeding recommended mounting height may compromise performance.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

MODEL	VOLTS	AMPS+	HZ	RPM	CFM SP@0.0"	EQUIV CFM\$	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	MIN. ROUND DUCT SIZE	SONES#
B200 Dual	115	4.0	60	1550	600	900	531	480	430	8" (50 sq. in.)	6.5

+ This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").

\$ Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.

July 25, 2024 / PV2-170

LG LAUNDRY

WM6700HBA

5.8 cu. ft. Mega Capacity Smart Front Load Washer with
TurboWash™ 360° and AI Built-in intelligence

5.8 cu. ft. Mega Capacity
LCD Display and Dial-A Cycle™ Knob with Touch Buttons
ezDispense™ Automatic Dispenser
TurboWash™ 360° Technology
AI Fabric & Soil Level Sensors & Smart Pairing™
LG ThinQ® Technology with ThinQ Care
AAFA Certified with Allergiene™ Cycle
ColdWash™ Technology
NeveRust™ Stainless Steel Drum
ENERGY STAR® Certified
Direct Drive Motor 10-Year Limited Warranty

AVAILABLE COLORS

 BLACK STEEL

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



SUMMARY

Type	Front Load Washer
Capacity (cu. ft.)	5.8 cu. ft.
Matching Electric Dryer	DLEX6700B
Matching Gas Dryer	DLGX6701B
Color	Black Steel (B)
APPEARANCE	
LCD Display	Yes
Touch Buttons	Yes
Dial-A-Cycle™	Yes
ENERGY	
ENERGY STAR® Most Efficient	Yes
ENERGY STAR® Certified	Yes
CEE Tier	Advanced
IMEF	3.1
IWF	2.9
WASH PROGRAMS	
No. of Programs	25
Wash Programs	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene™, Perm. Press, Tub Clean, Bright Whites™, Sanitary, Rinse + Spin, Spin Only, Hand/Wool, Active Wear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, X Large Load
WASH OPTIONS	
No. of Options	19
Options	TurboWash™, Steam, Fresh Care, Pre-Wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, ColdWash, Spin Only, Detergent Level, Softener Level, Signal, Cycle List Edit, Cycle Optimization, Softener Tank Use

WASH DETAILS

No. of Wash/Rinse Temps	5
Wash/Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold
No. of Spin Speeds	5
Spin Speeds	Extra High, High, Medium, Low, No Spin
Max RPM	1300
Water Levels	Load Sensing
No. of Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	Yes
TurboWash™ 360 Technology	Yes
Steam Technology	Yes
Allergiene™ Cycle	Yes
Sanitary Cycle	Yes
ColdWash™ Option	Yes
Soil Level Sensor	Yes

CONVENIENCE FEATURES

Vibration sensing (Cabinet Vibration Sensor)	Yes
TrueBalance™ Anti-Vibration System	Yes
4 Tray Dispenser	Yes
End of Cycle Signal	Yes
LoadSense	Yes
Control Lock	Yes
Auto Suds Removal	Yes
Leveling Legs	4 Adjustable Legs
Drumlight	Yes

ThinQ® TECHNOLOGY

ThinQ Care	Yes
SmartDiagnosis™ (v3.0)	Yes
Wi-Fi	Yes
Energy Monitoring	Yes
Tub Clean Coach	Yes

MOTOR AND AGITATOR

Motor Type	Inverter Direct Drive Motor
Axis	Horizontal

MATERIALS AND FINISHES

NeveRust™ Stainless Steel Drum	Yes
Cabinet	Painted Steel
Control Panel	Painted Steel
Top Plate	Painted Steel
Door / Rim	Glass / Chrome
Door Cover	Tempered Glass Door
All Available Colors	Black Steel (B)

CERTIFICATION

AAFA	Yes
------	-----

POWER SOURCE

Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric

OPTIONS/ACCESSORIES

Pedestal	WDP6B
Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
LG Sidekick™ Pedestal Washer	WD300CB
LG Sidekick™ Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2" D with drawer open)
Stacking Kit	KSTK1

DIMENSIONS

Product (WxHxD)	27" x 39" x 33 1/4"
Depth with Door Open	(55" D with door open)
Carton (WxHxD)	29 3/4" x 43 1/8" x 33 7/8"
Weight (Product/Carton)	209.5 / 222.7 lbs.

LIMITED WARRANTY

Parts and Labor	1 Year
Direct Drive Motor	10 Years
Drum	3 Years

UPC CODES

WM6700HBA (Black Steel)	195174037058
-------------------------	--------------

LG LAUNDRY

WD300CB

27" LG SideKick™ Pedestal Washer

1.0 cu. ft. Capacity

Compatible with select 27" Front Load Washers


Perfect for Intimates and Hand Wash

Electronic Control Panel with Dual LED Display

NeveRust® Stainless Steel Tub

SmartDiagnosis™

Direct Drive Motor with 10-Year Limited Warranty

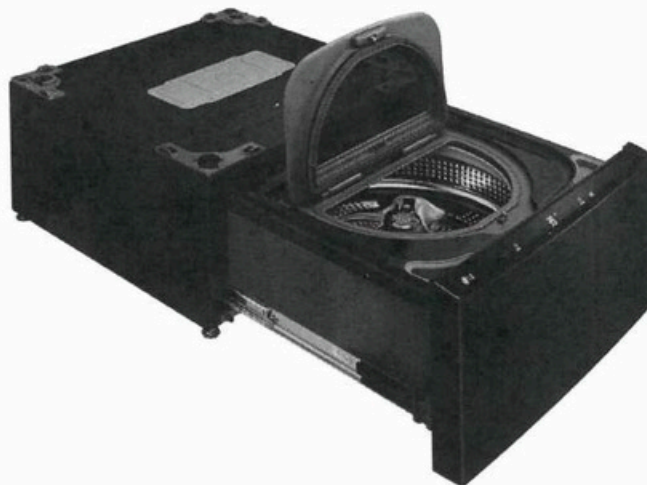

AVAILABLE COLORS



BLACK STEEL



CAPACITY

Capacity 1.0 cu. ft.

APPEARANCE

Electronic Control Panel with LED Display Yes

Touch Buttons Yes

WASH PROGRAMS

No. of Programs 6
Normal, Intimates, Hand Wash, Rinse + Spin,
Tub Clean, Downloaded

WASH OPTIONS

No. of Options 5
Warm Water, Rinse, Control Lock, Wi-Fi,
Remote Start

WASH DETAILS

No. of Wash / Rinse Temps 2 (Warm, Cold)

TwinWash™ Compatible Yes

CONVENIENCE FEATURES

End of Cycle Signal Yes

Child Lock Yes

Auto Suds Removal Yes

Forced Drain System Yes

Leveling Legs 4 Adjustable Legs

SmartDiagnosis™ Yes

MOTOR AND AGITATOR

Motor Type Direct Drive Motor

Motor Speed Variable

Max RPM 700

MATERIALS AND FINISHES

NeveRust® Stainless Steel Drum Yes

Cabinet Painted Steel

Control Panel Plastic

Door Rim Glass / Black

Door Cover Transparent Tinted Glass

Available Colors Black Steel (B)

POWER SOURCE

Ratings UL Listed

Electrical Requirements 120V, 5 Amps

Type Electric

DIMENSIONS

Product (WxHxD) 27" x 14 1/8" x 30 3/4"
(50 1/2" with drawer open)

Carton (WxHxD) 29 3/4" x 16 3/8" x 31 3/32"

Weight (Product/Carton) 105 / 115 lbs.

LIMITED WARRANTY

Parts and Labor 1 Year

Direct Drive Motor 10 Years

Drum Limited Lifetime

UPC CODES

WD300CB (Black Steel) 195174038291

July 25, 2024 / PV2-I70



LG LAUNDRY

DLEX6700B / DLGX6701B

7.4 cu. ft. Ultra Large Capacity Smart Front Load
Dryer with TurboSteam™ and AI Sensor Dry™

7.4 cu. ft. Ultra Large Capacity
LCD Display and Dial-A Cycle™ Knob with Touch Buttons
TurboSteam™ Technology
AI Fabric Sensor & Smart Pairing™
LG ThinQ® Technology with ThinQ Care
Wrinkle Care Option
Reversible Door
Sensor Dry System
FlowSense™ Duct Clogging Indicator
NeveRust™ Stainless Steel Drum
Tempered Glass Door
ENERGY STAR® Certified

AVAILABLE COLORS



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Front Load Dryer	AI Sensor Dry™	Yes	Ratings	CSA Listed
Vent Type	Vented	Sensor Dry	Yes	Electrical Requirements	Electric: 240V, 30 Amps / Gas: 120V, 15 Amps
Dryer Type	Electric : DLEX6700B Gas: DLGX6701B	Precise Temperature Control with Variable Heater	Yes	Type	Electric, Gas
Capacity	7.4 cu. ft.	Steam	TurboSteam™	BTU Rating	Gas: 20,000
Matching Washer	WM6700HBA	CONVENIENCE FEATURES		OPTIONS	
Sensor Dry	Yes	3 Minute Installation Check	Yes	LP Conversion Kit	383EEL3002D
Steam	Yes	End of Cycle Signal	Yes	Side Venting Kit	3911EZ9131X
Color	Black Steel (B)	Drum Light (Door Open)	Yes	Drying Rack	3750EL1001A
APPEARANCE		Reversible Door	Yes	Pedestal	WDP6B
LCD Display	Yes	FlowSense™ Duct Clogging Indicator	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Touch Buttons	Yes	Wrinkle Care Option	Yes	DIMENSIONS	
Dial-A-Cycle™	Yes	Control Lock	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
DRYER PROGRAMS		Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Depth with Door Open	51 3/8"
No. of Programs	23	4 Adjustable Legs	Yes	Carton (WxHxD)	29 5/8" x 43 5/16" x 31 9/16"
Programs (Sensor Dry)	Normal, AI Dry, Bedding, Delicates, Towels, Quick Dry, Timed Dry, Antibacterial, Perm. Press, SteamFresh™, Heavy Duty, Air Dry, Steam Sanitary™, Super Dry, Active Wear, Jeans, Blanket Refresh, Low Temp Dry, Overnight Dry, Easy Ironing, Small Load, Large Load Dry, X Large Load Dry	Remaining Time Display / Status Indicator(s)	Yes	Product Weight (lbs.)	Electric: 123.7 lbs. / Gas: 134 lbs.
		ThinQ™ TECHNOLOGY		Carton Weight (lbs.)	Electric: 135.1 lbs. / Gas: 145.7 lbs.
No. of Options	11	ThinQ Care	Yes	LIMITED WARRANTY	
Options	Cycle Optimization, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal	SmartDiagnosis™ (v3.0)	Yes	Parts & Labor	1 Year
Temperature Settings	High, Med. High, Medium, Low, Ultra Low	Wi-Fi	Yes	Drum	3 Years
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	Remote Start and Cycle Monitor	Yes	UPC CODES	
Manual Dry Times	10 min - 100 min (Every 10 min)	Energy Monitoring	Yes	DLEX6700B (Black Steel)	195174036976
		ENERGY		DLGX6701B (Black Steel)	195174036983
		ENERGY STAR® Certified	Yes		
		CEF	Electric: 3.94 / Gas: 3.49		
		MATERIALS AND FINISHES			
		NeveRust® Stainless Steel Drum	Yes		
		Cabinet	Painted Steel		
		Door	Tempered Glass Door		
		All Available Colors	Black Steel (B)		

July 25, 2024 / PV2-I70




LG LAUNDRY

WDP6B
LG Laundry Pedestal Storage Drawer

KEY FEATURES

- Elevates Appliance for Comfortable Loading and Unloading
- Extra Storage Space
- Internal Divider and Basket for Organization

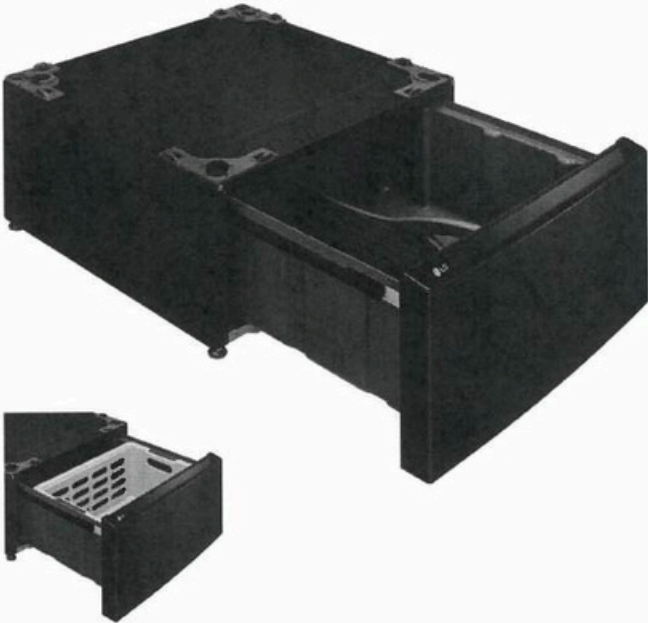

AVAILABLE COLORS

-  BLACK STEEL

PRODUCT FEATURES

DIMENSIONS	
Product (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Carton (WxHxD)	29 3/4" x 17 1/8" x 31 1/8"
Weight (Product/Carton)	53 / 63 lbs.
UPC CODES	
WDP6B (Black Steel)	195174037003


July 25, 2024 / PV2-I70



- Never install the washer on a platform or weakly supported structure.

Floor Installation


To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least **1 inch (2.5 cm)** at the sides and **4 inches (10 cm)** behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

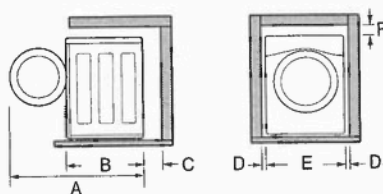

Dimensions and Clearances	
A	57 3/4" (146.6 cm)
B	33 1/8" (84 cm)
C	4" (10 cm)
D	1" (2.5 cm)
E	27" (70 cm)
F	1/4" (0.5 cm)

Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.

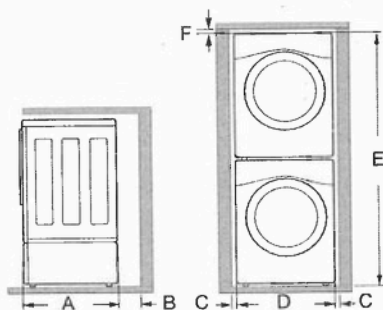

Dimensions and Clearances	
A	33 1/8" (84 cm)
B	4" (10 cm)

July 25, 2024 / PV2-I70

