


GOEMANS APPLIANCES

Expect More. Get More.

APPLIANCE SPECIFICATIONS

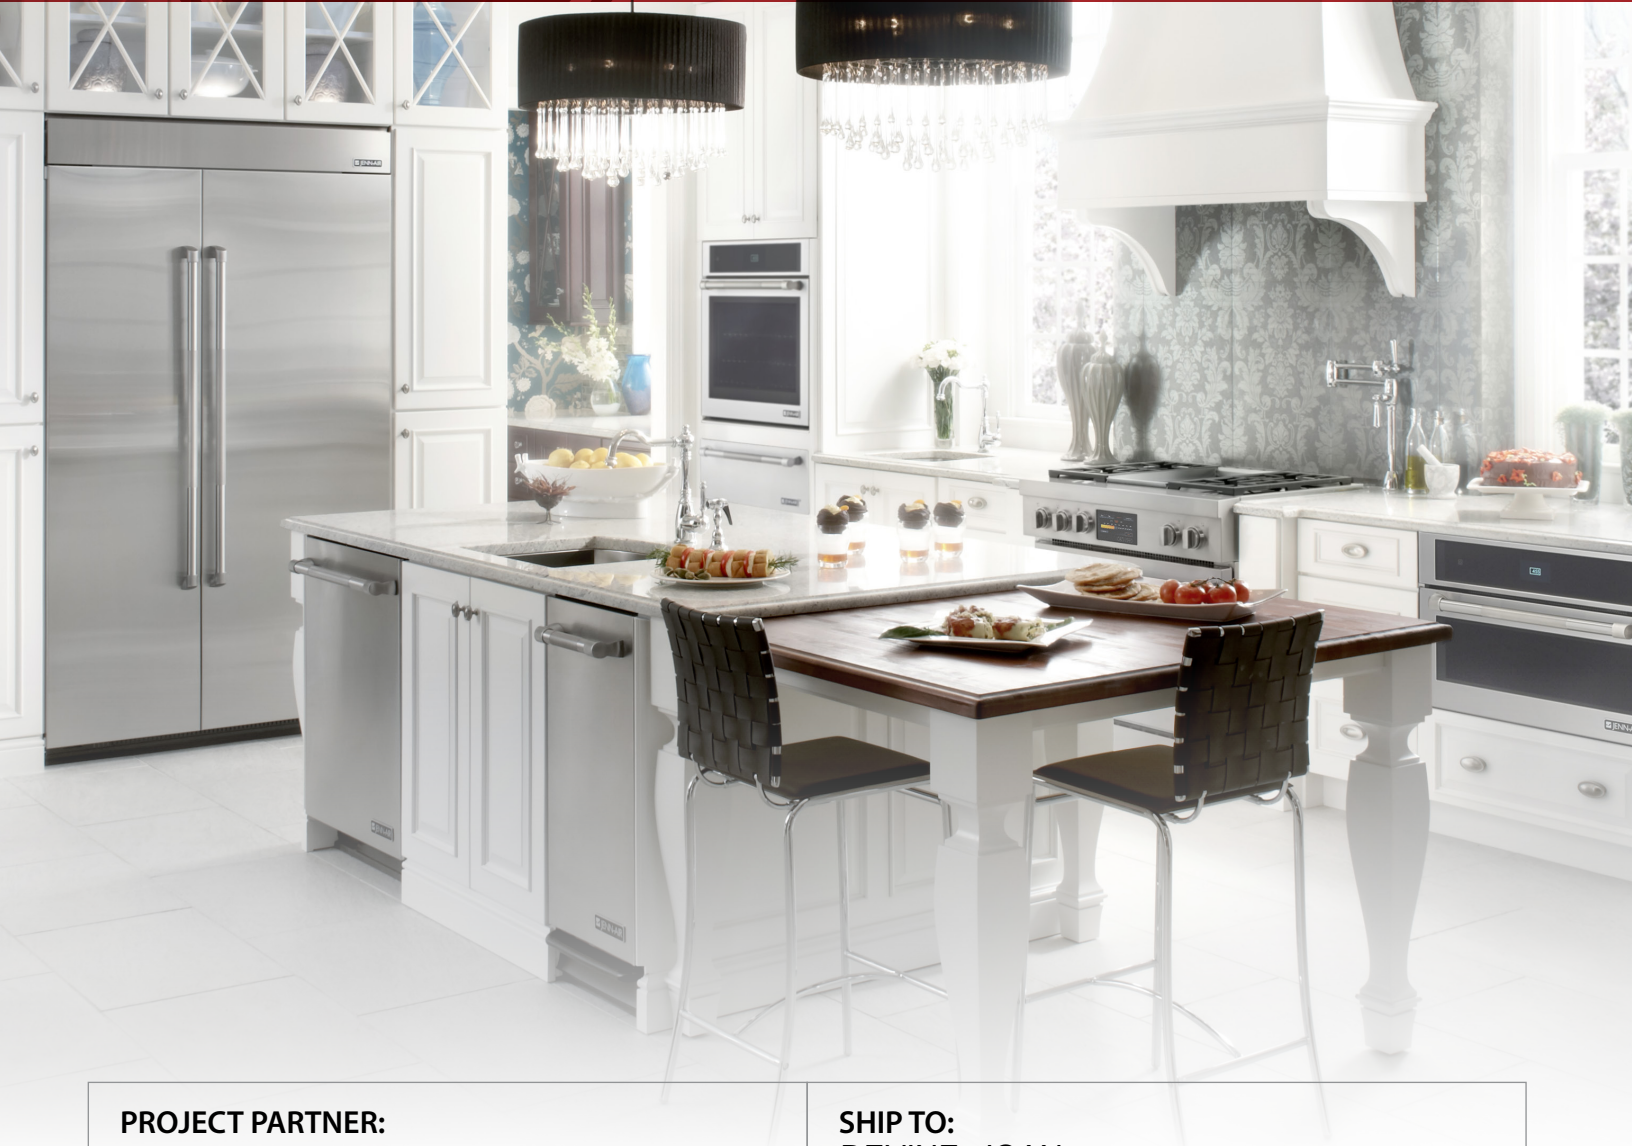

PROJECT PARTNER:
DEVINE, JOAN

SHIP TO:
DEVINE, JOAN

69 SOUTHSEA CRES
WOODBIDGE, ON

REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Goemans Appliances assumes no liability for product specifications.

ALL ELECTRICAL, PLUMBING, GAS MUST BE AS PER SPECS SO THAT INSTALLATION CAN BE DONE .

HANDLES MUST BE INSTALLED ON WOOD PANELS BY THE CABINET MAKER PRIOR TO INSTALLATION DATE.

Full Spec Package

69 SOUTHSEA CRES

DEVINE, JOAN

69 SOUTHSEA CRES

WOODBIDGE, ON

GOEMANS
APPLIANCES

Contents

Page no.

DRF365300AP

4-6

Dacor Refrigeration

36" Built-In French Door, Panel Ready

DTG30P875NS

7-8

Dacor Cooktop

Transitional 30" Gas Cooktop, Silver Stainless Steel, Natural Gas/Liquid Propane

DOB30T977SS

9-10

Dacor Wall Oven

30-Inch Single Wall Oven with Steam

DMW2420S

11-12

Dacor Microwave

24" Microwave, Silver Stainless Steel

ADMWTK301S

13

Dacor Trim Kit

P195P1M70SB6

14-16

Goemans Appliances

goemans.com

EMAD ABI-HABIB

9058202600

Invoice **M000119424**

Version 1.1

Sun, Oct 27, 2024

9:00 PM EDT



enterprise.steelcod.com/sp/goem/HJCCQ7U
N

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

BEST Ventilation

28-5/16" Built-In Range Hood, Internal 650
Max Blower Cfm, Stainless Steel

SPRBC047D1SS	17-19
---------------------	-------

Silhouette Refrigeration

FFTR1835VS	20-21
-------------------	-------

Frigidaire Refrigeration

Frigidaire 18.3 Cu. Ft. Top Freezer
Refrigerator

ELFW7637AT	22-28
-------------------	-------

Electrolux Washer

Front Load Perfect Steam™ Washer with
LuxCare® Plus Wash and SmartBoost® - 5.2
Cu. Ft. I.E.C

ELFE763CAT	29-36
-------------------	-------

Electrolux Dryer

Front Load Perfect Steam™ Electric Dryer with
Balanced Dry™ and Instant Refresh – 8.0 Cu.
Ft.

P500NSS3	37-38
-----------------	-------

Napoleon Outdoor

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

36-Inch French Door Refrigerator



DRF365300AP/DA - Panel Ready

Features & Benefits

- Metal Cooling™ stainless steel back interior
- LED 3D Lighting
- FreshZone™ drawer
- Icemaker with crescent ice
- 15-year warranty on digital inverter compressor
- Hidden touch control panels with SmartThings Wi-Fi control
- Internal water dispenser
- R600a refrigerant
- Panel ready

Controls

CONTROL TYPE	Easy Reach Hidden Glass Touch
WI-FI + SMARTTHINGS	Yes
SABBATH MODE	Yes

Features

TOTAL CAPACITY (CU. FT.)	21.3
PUSH-TO-OPEN	No
WATER DISPENSER	Internal Water Dispenser
ICEMAKER	Standard Ice
IQ REMOTEVIEW™ CAMERA	No
DEODORIZING FILTER	Yes
LED LIGHTING	3D Lighting
INTERIOR MATERIAL	Metal Cooling™ (Stainless Steel Back Wall)
DIGITAL INVERTER COMPRESSOR	Yes

Features

REFRIGERANT	R600a
CRISPER DRAWERS	2
FREEZER DRAWERS	2
DOOR BINS	6
SHELVES	2 x Full Width, 2 x Adjustable
DOOR ALARM	Yes

Refrigerator

REFRIGERATOR CAPACITY (CU. FT.)	14.5
REFRIGERATOR TEMPERATURE	34°F to 44°F
FRESHZONE™ DRAWER TEMPERATURE	29°F, 33°F, 37°F
POWER COOL	Yes
FRESHZONE™ DRAWER	Yes

Freezer

FREEZER CAPACITY (CU. FT.)	6.8
FREEZER TEMPERATURE	-8°F to 5°F
POWER FREEZE	Yes

Weights & Dimensions

NET WEIGHT (LBS.)	518
SHIPPING WEIGHT (LBS.)	601
PRODUCT DIMENSIONS (W X H X D IN INCHES)	35 ¾ x 83 ¾ x 25
FLUSH CUTOUT REQUIRED (W X H X D IN INCHES)	36 x 84 x 25

Technical Details

ELECTRICAL REQUIREMENT	115V, 60 Hz, 15A
------------------------	------------------

Warranty

FULL COVERAGE	2 Years
SEALED SYSTEM, PARTS AND LABOR	6 Years
SEALED SYSTEM, PARTS ONLY	12 Years
COMPRESSOR, PARTS ONLY	15 Years



Accessories (Optional)

Please see page 16 of Reference Guide for a full list of accessories.		
RAF36AMAASR/DA	36" 3-Door Built-In French Door Refrigerator Panel Kit, Silver Stainless	
RAF36AMAAMS/DA	36" 3-Door Built-In French Door Refrigerator Panel Kit, Graphite Stainless	
RAC00WFAAAA/DA	Water Filter for Refrigeration	
RAC00DFAAAA/DA	Air Filter for Refrigeration DRF/DRR/DRW, Set of 6	


36-Inch French Door Refrigerator

dacor


Product Dimensions	
A - WIDTH (IN/MM)	35 ¾ (908 MM)
B - WITH PANEL (IN/MM)	25 (635 MM)
C - HEIGHT (IN/MM)	83 ¾ (2118 MM)
D - (IN/MM)	35 ⅝ (905 MM)
D1 - WITH PANEL (IN/MM)	38 ⅞ (967 MM)
D2 - WITH MODERNIST HANDLE (IN/MM)	43 ⅞ (1107 MM)
E - (IN/MM)	44 ⅞ (1140 MM)
F - (IN/MM)	20 ⅞ (496 MM)
G - (IN/MM)	44 (1118 MM)

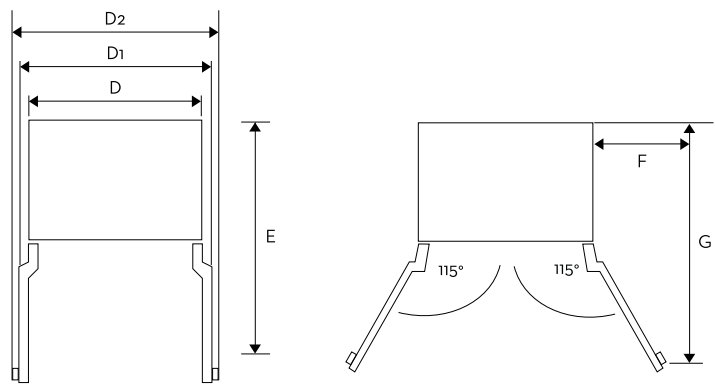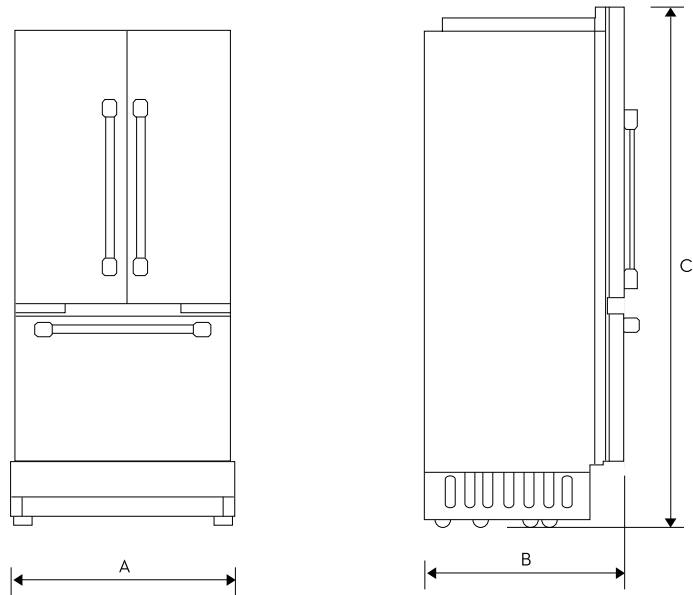

Installation Cutout Dimensions	
A - WIDTH (IN/MM)	36 (914 MM)
B - DEPTH (IN/MM)	25 (635 MM)
C - HEIGHT (IN/MM)	84 (2134 MM)
D - (IN/MM)	26 (660 MM)
E - (IN/MM)	80 (2032 MM)

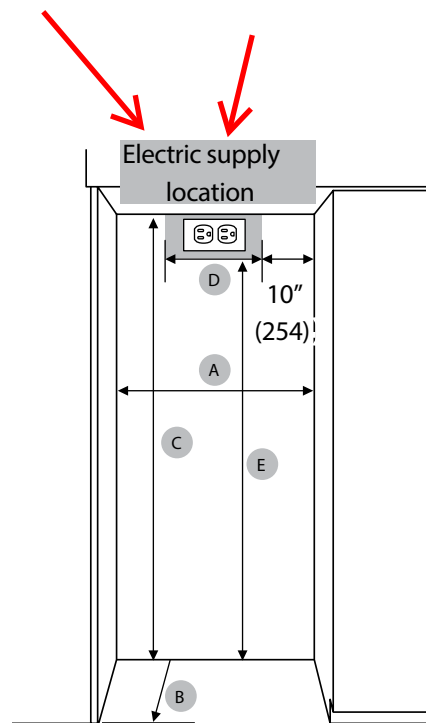

Custom Panel Specifications

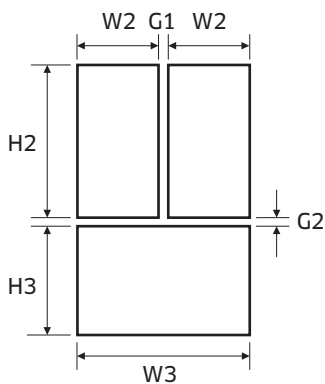

Callout	36"
W1	-
W2	17 3/4" (450 mm)
W3	35 3/4" (908 mm)
H1	-
H2	49 3/16" (1249 mm)
H3	30 9/16" (776 mm)
G1	3/16" (5 mm)
G2	5/32" (4 mm)
Panel Thickness	3/4" (19 mm)
Max Weight	Fridge : 55.0 lb (25 kg) Freezer : 22.0 lb (10 kg)

Do not exceed the max load that the custom panel can endure. Before crafting the panel, check the strength of the panel's material and the load of attachments to the panel.

	36"
Custom Panel Maximum Weight	Fridge : 55.0 lb (25 kg), Freezer : 22.0 lb (10 kg)

NOTE

- Standard Custom panel thickness is 3/4" (19 mm).

30-Inch Gas Cooktop

TRANSITIONAL



DTG30P875NS/DA - Silver Stainless, Natural Gas

Features & Benefits

- SimmerSear™ burners
- Illumina™ Knobs
- SmartThings Wi-Fi connectivity
- Auto Connect to compatible ventilation through Bluetooth
- LP conversion kit

Controls

CONTROL TYPE	Knobs
ILLUMINA™ KNOBS	White
WI-FI + SMARTTHINGS	Yes
SABBATH MODE	Yes



Cooktop	
NUMBER OF BURNERS	5 Aluminum
PERMA-FLAME™ (AUTO RE-IGNITION)	No
LEFT FRONT (BTU)	9,500
LEFT REAR (BTU)	9,500
CENTER (BTU)	19,000
RIGHT FRONT (BTU)	13,000
RIGHT REAR (BTU)	9,500
BRASS BURNER CAPS	No
GRIDDLE	Yes
WOK RING	Yes

Weights & Dimensions	
NET WEIGHT (LBS.)	76
SHIPPING WEIGHT (LBS.)	84
PRODUCT DIMENSIONS (W x H x D IN INCHES)	30 x 3 ⅝ x 21
CUTOUT REQUIRED (W x D IN INCHES)	28 ½ x 19 ⅝

Technical Details	
ELECTRICAL REQUIREMENTS	120V, 60 Hz, 20A
AVAILABLE FUEL TYPES	Natural Gas, Liquid Propane
LP CONVERSION KIT (INCLUDED)	Yes


Warranty	
FULL COVERAGE	2 Years

30-Inch Gas Cooktop


TRANSITIONAL



Product Dimensions	
A - WIDTH (IN/MM)	30 / 762
B - CHASSIS WIDTH (IN/MM)	28 1/8 / 715
C - CHASSIS DEPTH (IN/MM)	19 3/8 / 492

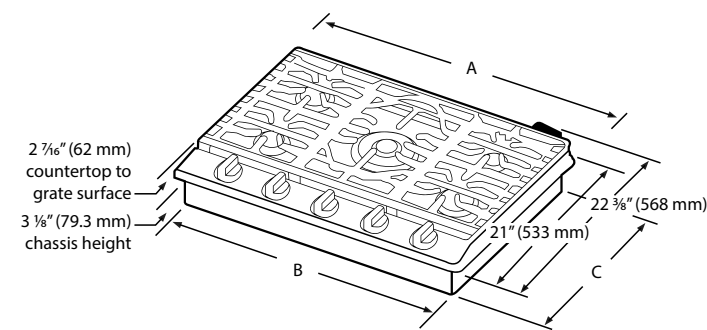

Installation Cutout Dimensions	
E - MIN (IN/MM)	2 7/8 / 73
F - MIN (IN/MM)	19 5/8 / 498.5
G - MIN (IN/MM)	28 1/2 / 723.9
H - MIN (IN/MM)	12 / 304.8

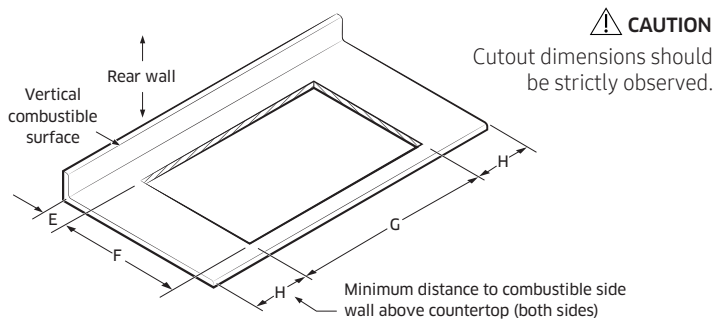

30-Inch Single Wall Oven with Steam

TRANSITIONAL



DOB30T977SS/DA - Silver Stainless

Features & Benefits
<ul style="list-style-type: none">• Steam-Assist oven• Dual Four-Part Pure Convection system• BrightVue™ LED & halogen lighting• 7-inch LCD control panel with SmartThings Wi-Fi connectivity• Chef Mode guided cooking• Digital temperature probe• Self-clean oven• SoftShut™ hinges


Controls	
CONTROL TYPE	7" Motorized LCD Touchscreen & Knobs
CHEF MODE GUIDED COOKING	Yes
NUMBER OF KNOBS	2
ILLUMINA™ KNOBS	White
WI-FI + SMARTTHINGS	Yes
CLOCK	Yes
DELAY START	Yes
KITCHEN TIMER	Yes
CHILD LOCK	Yes
SABBATH MODE	Yes
Steam Oven	
OVEN CAPACITY (CU. FT.)	4.8
CONVECTION	Dual Four-Part Pure
STEAM	Steam-Assist
BAKE ELEMENT	3,000W - 8 Pass
BROIL ELEMENT	4,400W - 10 Pass
CONVECTION ELEMENT	2 x 1,300W
INSTANTHEAT™ (NO PREHEAT)	Yes
TEMPERATURE PROBE	Yes
LIGHTING	BrightVue™ - LED & Halogen
SELF-CLEAN	Self-Clean, GreenClean™
SOFTSHUT™	Yes
Weights & Dimensions	
NET WEIGHT (LBS.)	84
SHIPPING WEIGHT (LBS.)	96
PRODUCT DIMENSIONS (W X H X D IN INCHES)	29 ¾ x 28 ⅞ x 24 ½
STANDARD CUTOUT REQUIRED (W X H X D IN INCHES)	28 ½ x 27 ¼ x 23 ½
FLUSH CUTOUT REQUIRED (W X H X D IN INCHES)	30 ¼ x 29 x 24 ⅞
Technical Details	
ELECTRICAL REQUIREMENT	240/208V, 60 Hz, 30A
Warranty	
FULL COVERAGE	2 Years

30-Inch Single Wall Oven with Steam

TRANSITIONAL


dacor

Product Dimensions



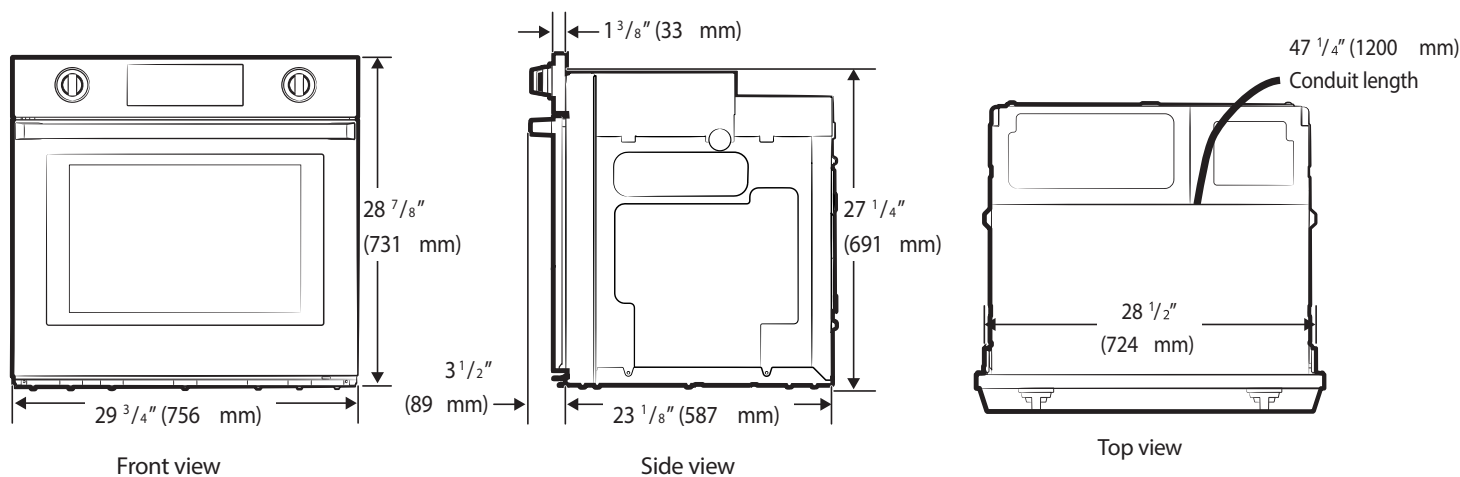


Installation Cutout Dimensions (Flush)

Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open.

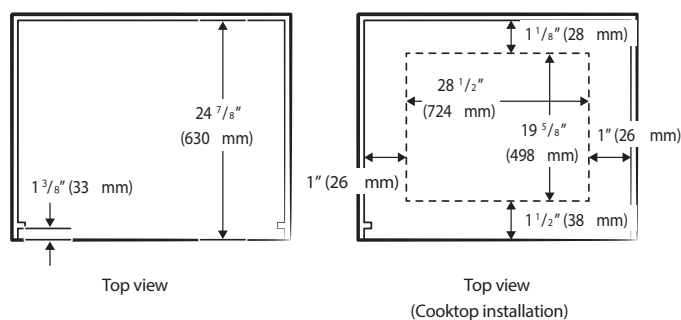

Installation Cutout Dimensions (Standard)

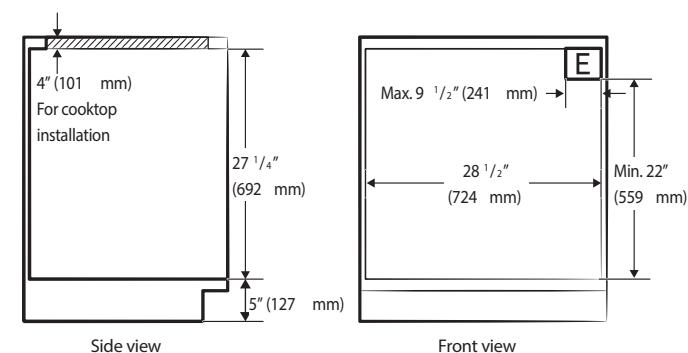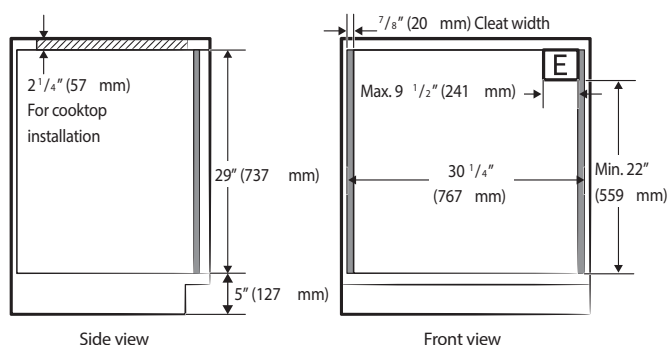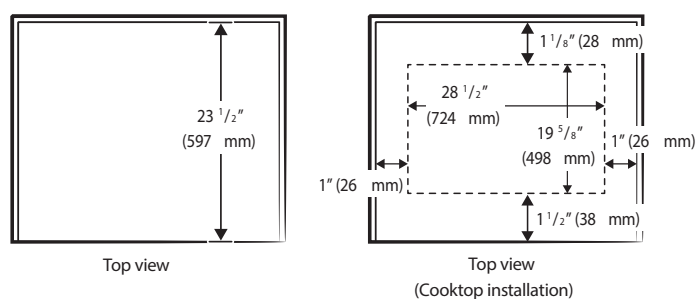

24-Inch Microwave



DMW2420S – Silver Stainless

Features & Benefits

- 6 menu options
- Sensor technology
- 3 defrost options
- Automatic start
- Keep warm
- Countertop or built-in installation

Controls

CONTROL TYPE	Membrane Touch
CLOCK	Yes
CHILD LOCK	Yes

Microwave Oven

MICROWAVE CAPACITY (CU. FT.)	2
MICROWAVE POWER	1,100W
SENSOR COOK	Yes
CONVECTION	No
LIGHTING	Halogen

Weights & Dimensions

SHIPPING WEIGHT (LBS.)	46
PRODUCT DIMENSIONS (W X H X D IN INCH)	24 x 13 3/8 x 19 1/8

Technical Details

ELECTRICAL REQUIREMENTS	120V, 60 Hz, 15A
-------------------------	------------------

Warranty

FULL COVERAGE	2 Years
---------------	---------



Accessories (Optional)

ADMWTK301S	30" Trim Kit	
------------	--------------	--

24-Inch Microwave



Product Dimensions

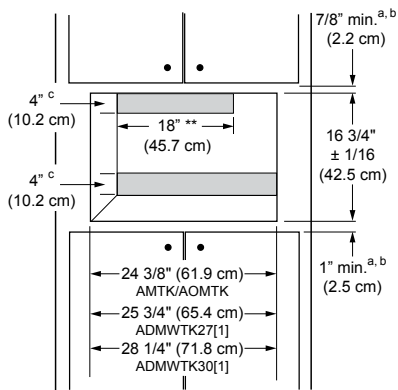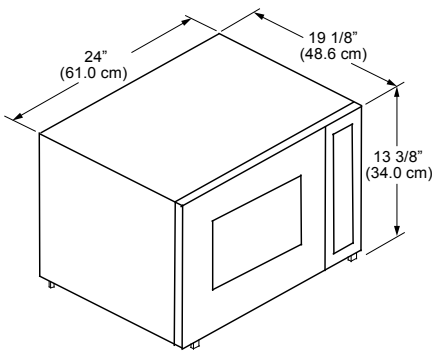

INSTALLATION WITH BUILT-IN TRIM KIT

DMW2420S, ADMWTK, AMTK, AOMTK

Document # PG12-007


Revised 09/12/14 Page 1/1



Distinctive® Microwave Oven and Built-In Trim Kits

PLANNING GUIDE

All tolerances: $\pm 1/16"$ (± 1.6 mm), unless otherwise stated

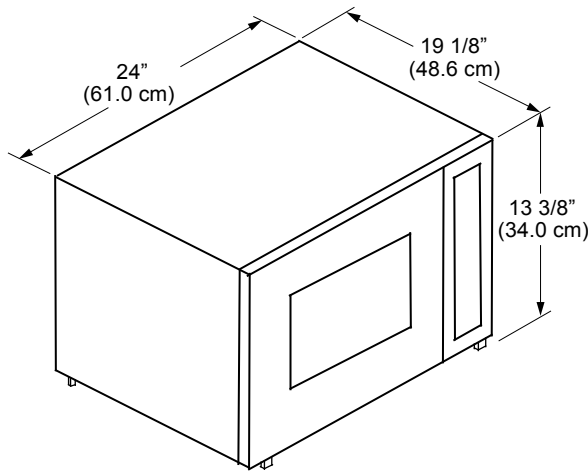


Shipping weight: 46 lbs.

Circuit required: 120 Vac, 15 Amp. dedicated, grounded, 3-prong electrical outlet

Total connected load: 13.0 Amp. @ 120 Vac, 60 Hz.

Interior dimensions: 10 1/2" H x 17 3/8" W x 18 5/8" D, interior walls are recessed

DMW2420 MICROWAVE SPECIFICATIONS

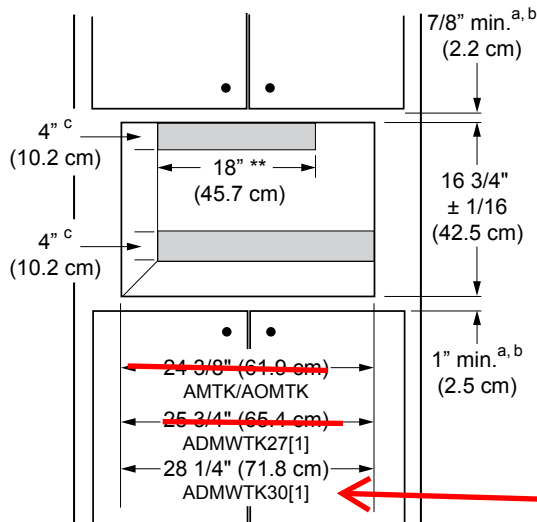

MICROWAVE INSTALLATION WITH BUILT-IN TRIM KIT

^a Minimum spacing: Includes additional space to avoid scraping/vibration.

^b 5/8" (1.6 cm) for ADMWTK series trim kit.

^c 120 Vac 15 Amp. 3-prong electrical outlet must be located in one of shaded areas shown unless interior cabinet depth is 21" (53.3 cm) or more.




NOTE:


- Power cord length: 42" (106.7 cm) with three prong plug.
- 3/4" (1.9 cm) platform (flush with cutout) required.
- 20" (50.8 cm) minimum interior cabinet depth required for built-in trim kits.
- See the Combination Installation (CI) section if installing with a wall oven or warming oven.

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.

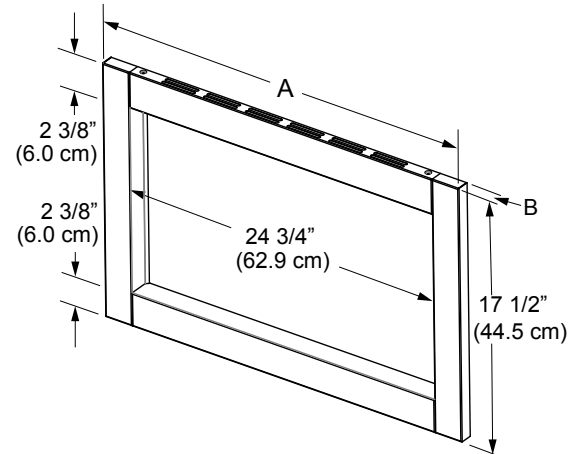

ADMWTK TRIM KIT DIMENSIONS

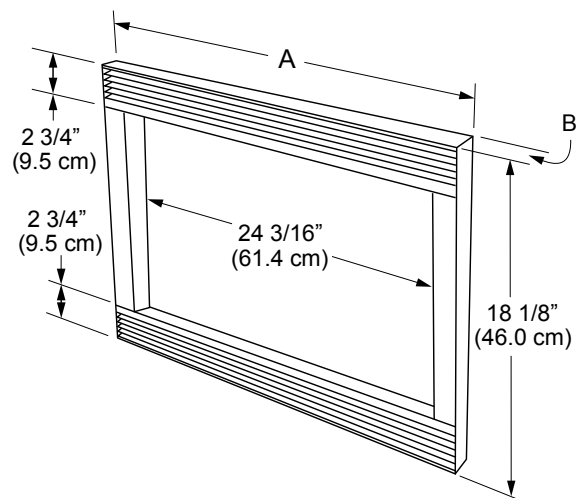

AMTK/AOMTK TRIM KIT DIMENSIONS

Trim Kit Model #	(A) Overall Width	(B) Trim Depth	Trim Kit Overlays
ADMWTK27	26 7/8" (68.3 cm)	3/4" (1.9 cm)	Top: 3/8" (1.0 cm) Bottom: 3/8" (1.0 cm)
ADMWTK30	29 7/8" (75.9 cm)		
ADMWTK271	26 7/8" (68.3 cm)	1" (2.5 cm)	Top: 5/8" (1.6 cm) Bottom: 3/4" (1.9 cm)
ADMWTK301	29 7/8" (75.9 cm)		
AMTK27	26 7/8" (68.3 cm)	1" (2.5 cm)	Top: 5/8" (1.6 cm) Bottom: 3/4" (1.9 cm)
AMTK30	29 7/8" (75.9 cm)		
AMTK36	35 7/8" (91.1 cm)	1 1/4" (3.2 cm)	
AOMTK27	27" (68.6 cm)		
AOMTK30	30" (76.2 cm)		




Shown with custom fabricated side panels, not supplied by BEST

P195P Series

This powerpack insert brings leading-edge modern style into your kitchen with a clean, sleek look to beautifully complement today's kitchen design trends.


- Powered by internal blower system with either 650 or 1300 MAX blower CFM. Very quiet 1.0 sone at normal setting.
- 4-speed electronic controls with a 10-minute delay-off feature keeps hood running after cooking to ensure smoke and odors have cleared the environment, and the filter clean reminder helps ensure optimal performance.
- Two-level halogen cooktop lighting. (Bulbs included.)
- Perimeter aspiration provides superior ventilation, backed up by mesh filters.
- Optional recirculation kit for non-ducted capability.
- Optional Remote Control allows the busy cook to stay in control from anywhere in the kitchen.

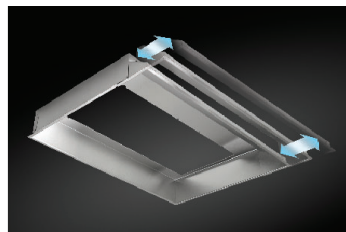

best[®]
PERFORMANCE THAT INSPIRES

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

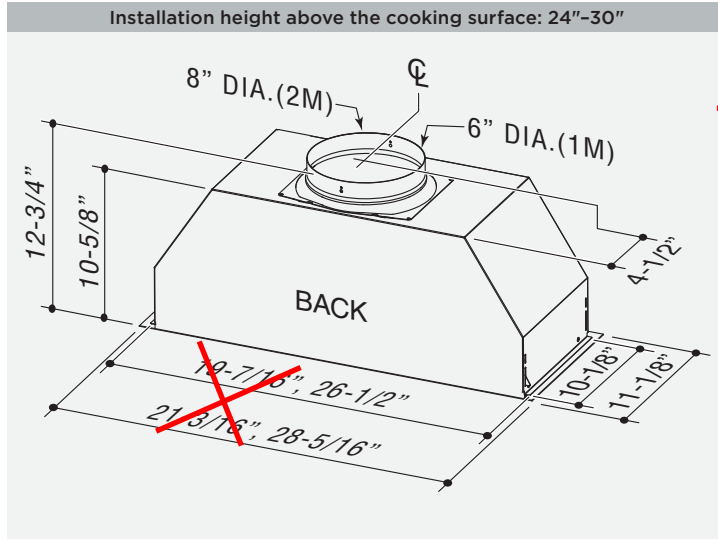

HOOD SIZES*

Internal Blower, Single - Depth 11-1/8"

21" P195P1M52SB6

30" **P195P1M70SB6**

Internal Blower, Dual - Depth 11-1/8"

30" P195P2M70SB6

* For exact dimensions, please refer to the technical drawing of each model.

FEATURES

Finish	Brushed Stainless Steel (Grade 430)
Lighting Type	Halogen 20W, G-4
Number of Lamps	2
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	4-speed Electronic Pushbutton, Digital Display
Control Features	Heat Sentry™, Delay Off, Filter Clean Reminder
Remote Control	Optional ACR3
Filter Type	Mesh Grease with Perimeter Aspiration
Non-ducted Capability	Yes (P195P1 only)

HOOD BLOWER INCLUDED	P195P1	P195P2
Internal		
Max Blower CFM*	650	1300

ACCESSORIES

Non-Duct Filters	AFCP195P52, AFCP195P70
Make-Up Air Dampers	MD6T, MD8T, MD10TU
Fresh Air Inlets	641FA (6"), 643FA (8"), 610FA (10")

INSTALLATION REQUIREMENTS

Amps @ 120V	5.4 Max
Electrical Connection	Direct Wire
Duct Size: Internal Blower	6" for P195P1 8" for P195P2
Duct Direction	Vertical
Backdraft Damper	Included

* MAX Blower CFM indicates the performance of the hood blower in open air and is not HVI certified.

HVI PERFORMANCE


INTERNAL BLOWER - P195P1

SONES		
Normal Speed 1.0		High Speed 8.5
CFM		
Normal Speed 190	High Speed 0.25 in. w.g. 470	High Speed 0.1 in. w.g. 490

INTERNAL BLOWERS - P195P2

SONES		
Normal Speed 2.0		High Speed 12
CFM		
Normal Speed 310	High Speed 0.25 in. w.g. 774	High Speed 0.1 in. w.g. 800

AIRFLOW PERFORMANCE

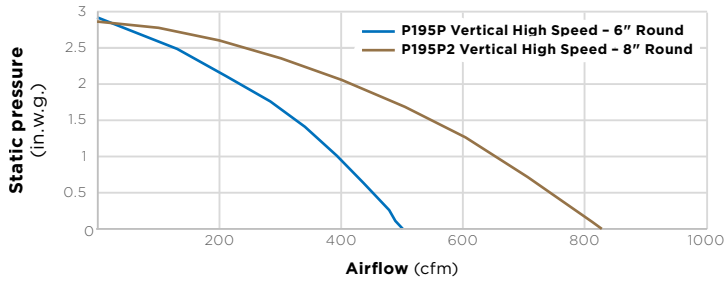

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

LORRAINE

SPRBC047D1SS

Silhouette
PROFESSIONAL™

www.silhouetteappliances.com



Dual Temperature Zone



LED Perimetrical Lighting

PRODUCT FEATURES



Pro-vection Cooling

Our fan forced cooling system incorporates AO (always on) fans to continually circulate the air. Multiple sensors are used to continually adjust and provide a stable internal temperature.



Pro Luminosity

Perimetrical lighting down the sides casts a warm glow and includes 3 different light settings



Pro Security

Integrated door lock secures the contents

37dB

Quiet operation

LORRAINE

SPRBC047D1SS

Silhouette

PROFESSIONAL™

www.silhouetteappliances.com

BENEFITS

Model #	SPRBC047D1SS
Capacity-Wine	21 bottles of wine
Capacity-Beverage	Up to 61 beverage cans
Volume	4.7 cu. ft.
Temp Range - Wine	41°F-64°F(5°C-18°C)
Temp Range - Beverage	34°F-50°F(1°C-10°C)
Noise	37.1 dB
Door Frame	Durable 304 grade stainless steel
Cabinet	Matte black textured steel
Interior Finish	Matte black
Door Style	French door design
Door Hinge	Hidden for flush fit installation
Door Glass	Low E, dual pane argon filled
Door Handle	Pro-style, 20% longer than previous model
Door Lock	Yes
Shelving	Pro-glide, anti-vibration 100% extension for wine compartment
Shelving-Wine	Plastic coated wire
Shelving-Beverage	Clear Glass
Wave Wine Storage	Yes
Lighting Option 1	On/Off with door opening
Lighting Option 2	On 100% illumination for 2 hours
Lighting Option 3	On 50% illumination for 2 hours
Light Colours	Choose between Arctic white or Azure blue
Controls	Digital seamless capacitive touch
Temperature Recall	Yes reverts to last set temperature after power outage
Alarm	Yes, temperature and door ajar
Sabbath Mode	Yes



*based on standard 750ml bordeaux style bottle

PRODUCT SPECIFICATIONS

UPC 067638024440

Unit Dimensions

Width	23.8" in.
Min. Height	34.1" in.
Max. Height	34.3" in.
Depth	23.7" in.

(DOES NOT INCLUDE HANDLE)

Installation


Gross Weight: 150 lbs.
Built-in under counter or free standing
Refrigerant: R600a
Size: Min 24" wide opening required

AC Power

115V, 60Hz at MAX 1.5A
Power cord length: 6.5 ft.

Platinum Warranty

2 year parts and labor coverage:
In home service

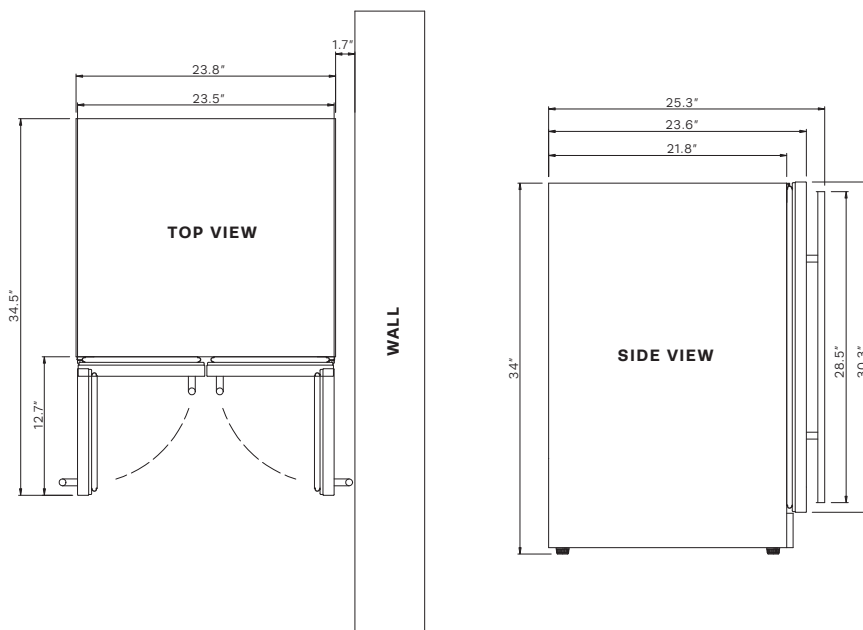

INSTALLATION INSTRUCTIONS

PREPARING THE ENCLOSURE

Gloves and safety goggles should be worn during installation.

It is not recommended to install the appliance into a corner or directly beside a wall. The door will need to be opened more than 90° to allow full extension of the shelves. If it is necessary to place the unit next to a wall or in a corner, leave at least 2-4 inches (5-10 cm) of space between the wall and the appliance to allow for the door opening.



The cabinet opening must be at least 24 inches (61 cm) wide by 35 inches (88.9 cm) high by 25 inches (63.5 cm) deep.

Note: The listed depth requirement is assuming that the electrical outlet is located in the adjacent cabinetry or flush mounted in the rear wall, not surface mounted inside the enclosure.

If the electrical outlet is located inside adjacent cabinetry, cut a 1.5 inch (3.8 cm) diameter hole to admit the power cord. If the cabinet wall is metal, the hole edge must be covered with a bushing or grommet.

REQUIRED TOOLS

- Safety goggles
- Gloves
- Tape measure
- Carpenter square
- Level
- Flashlight
- Electric drill with hole bit

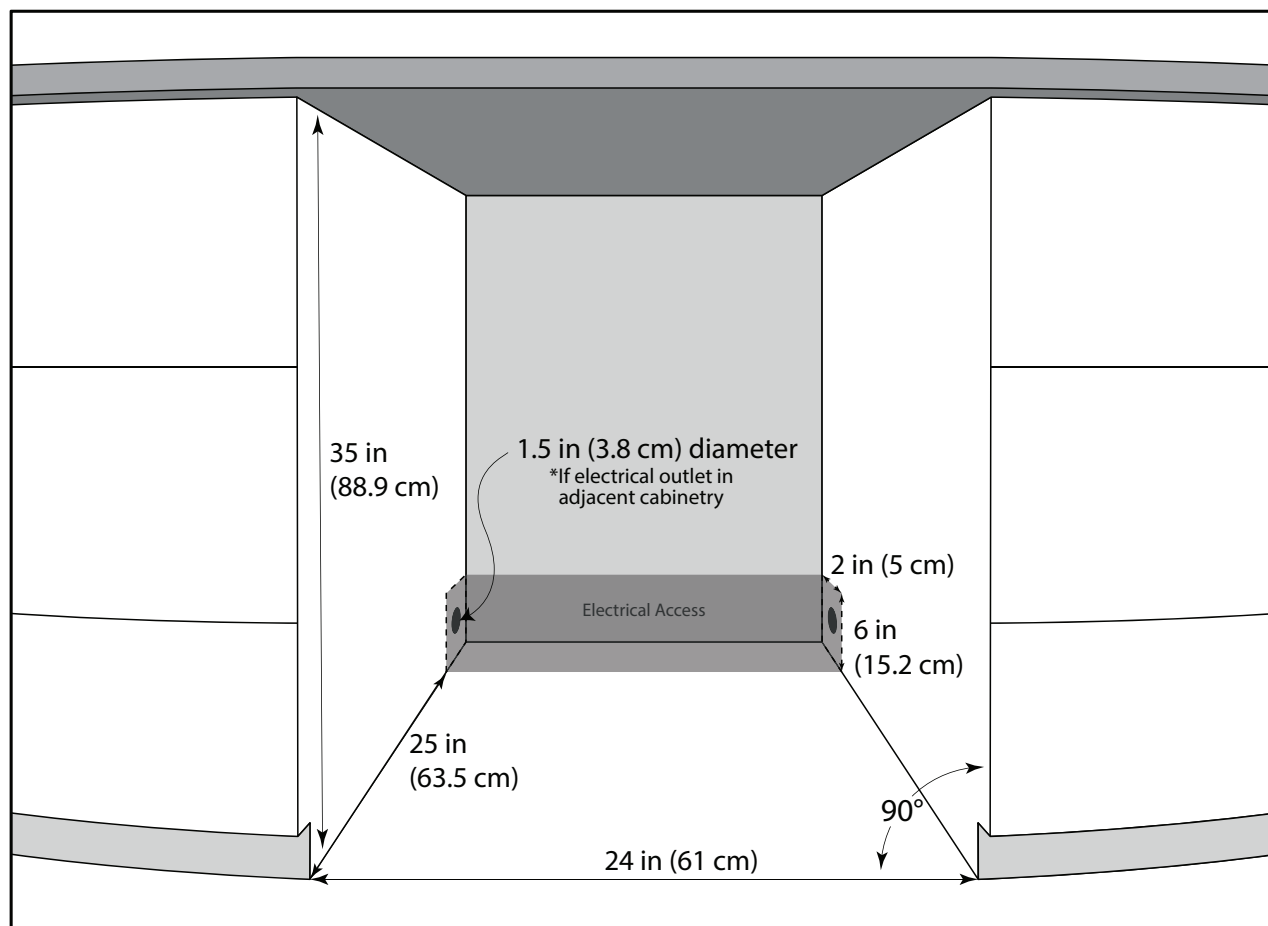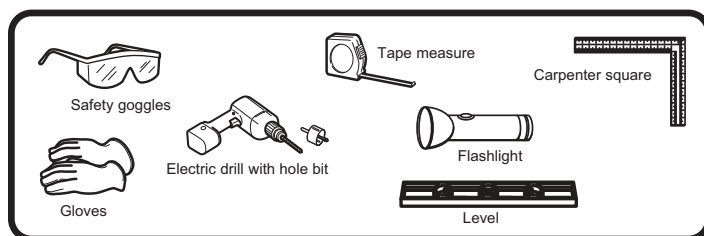



18.3 Cu. Ft. Top Freezer Refrigerator

Top Freezer Refrigerator

Available Products: FFTR1835VB, FFTR1835VS, FFTR1835VW

Available Colors: Black, Stainless Steel, White

Version: 09/23

Product Specifications

Refrigerator

Air Filter Ready	Yes
Crisper Color	Clear
Deli Drawer	Yes
Door Bin Color	White
Humidity Controls	Automatic
Interior Lighting	LED
Shelf Material	Glass
Number of Fixed Gallon Door Bins	2
Number of Adjustable Shelves	2
Number of Crispers	2

Ice Maker

Ice Maker	No
Ice Maker Ready	Yes

Exterior

Door Swing	Reversible
------------	------------

Electrical Specifications

Minimum Circuit Required	15 Amps
--------------------------	---------

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Freezer

Automatic Defrost	Yes
Baskets / Bins Color	White
Shelf Material	Glass
Number of Fixed Door Bins	2
Number of Adjustable Shelves	1

Controls

Digital Display	No
-----------------	----

Dimensions and Volume

Height With Hinge	66 3/8"
Height Without Hinge	65 7/8"
Width	30"
Width of Cabinet	30"
Depth of Cabinet	26 5/8"
Depth With Door	30 3/8"
Depth With Door 90° Open	57"
Depth With Door and Handle	30 3/8"
Freezer Capacity	4.9 Cu. Ft.
Fresh Food Capacity	13.4 Cu. Ft.
Total Capacity	18.3 Cu. Ft.

General Specifications

Annual Energy	410 kWh
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and Approvals


ENERGY STAR Certified	No
-----------------------	----

Available Products: FFTR1835VB, FFTR1835VS,
FFTR1835VW


Available Colors: Black, Stainless Steel, White

Version: 09/23

Installation Diagram

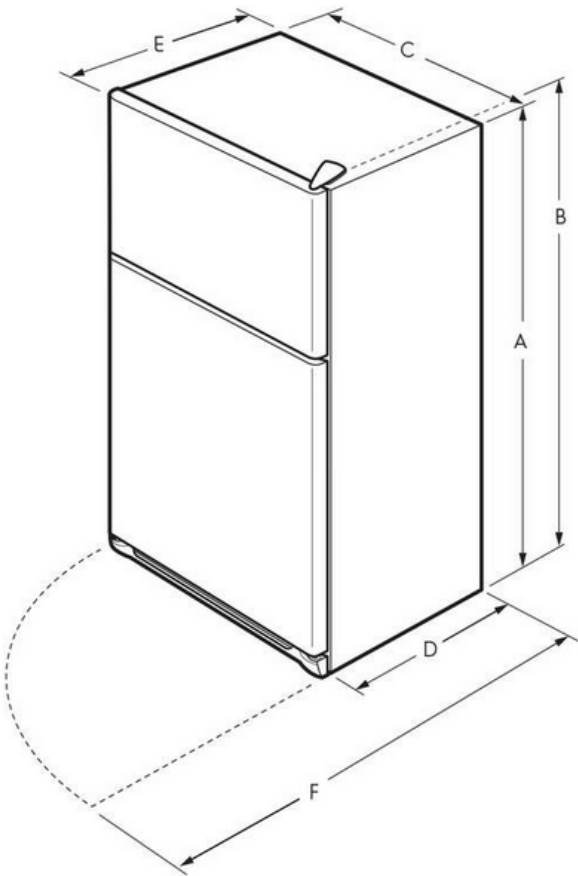

A	65 7/8"
B	66 3/8"
C	30"
D	26 5/8"
E	30 3/8"
F	57"

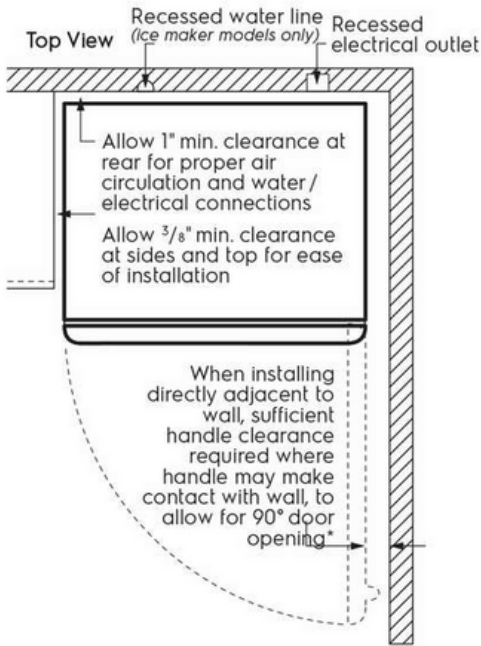

* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)



Front Load Perfect Steam™ Washer with LuxCare® Plus Wash and SmartBoost® - 5.2 Cu. Ft. I.E.C

Front Load Washer

Available Products: ELFW7637AT, ELFW7637AW

Available Colors: Titanium, White

Version: 04/24

Product Specifications

Washer

Drum Light	Yes
Drum Material	Stainless Steel
Maximum Spin Speed	1300 RPM
Water Heater	Yes
Water Level Adjustment	Yes

Washer Options

Allergen	Yes
Delay Start Time	1-12 Hours
Extended Refresh	Yes
Extra Rinse	Yes
Perfect Steam	Yes
Pure Rinse	Yes
Stain Soak	Yes
Steam	Yes

Washer Spin Speeds

Spin Speed Selections	5
Max	Yes
High	Yes
Medium	Yes
Low	Yes
No Spin	Yes

Temperature Settings

Eco Cold	Yes
Cool	Yes
Warm	Yes
Hot	Yes
Sanitize	Yes

Dispenser

Bleach Dispenser	Yes
Detergent Dispenser	Yes
Fabric Softener Dispenser	Yes
Prewash Detergent Dispenser	Yes
PODs Dispenser	Yes

Exterior

Door Latch	Yes
Reversible Door	Yes

Washer Cycles

Cycle Count	11
Activewear	Yes
Clean Washer	Yes
Colors	Yes
Delicates	Yes
Fast Wash	Yes
Hand Wash	Yes
Heavy Duty	Yes
Normal	Yes
Optic Whites	Yes
Rinse and Spin	Yes
Towels	Yes

Soil Levels

Extra Light	Yes
Light	Yes
Normal	Yes
Heavy	Yes
Solid Soil	Yes

Controls

Cancel	Yes
Cycle Status Lights	Yes
Delay Start	Yes
Control Lock	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes

Dimensions and Volume

Height	38"
Width	27"
Depth	32"
Washer Drum Capacity I.E.C.	5.2 Cu. Ft.
Dry Linen Capacity Tested Amount	11.5 kg

Energy Data

Integrated Water Factor	3.2
kWh/cycle	0.29 kWh
kWh/year	85 kWh
Modified Energy Factor	2.92
Water Usage/Year	4248 Gallons

Front Load Perfect Steam™ Washer with LuxCare® Plus	Front Load Washer
Wash and SmartBoost® - 4.5 Cu. Ft.	
Available Products: ELFW7637AT, ELFW7637AW	Available Colors: Titanium, White
Version: 04/24	

Electrical Specifications

Minimum Circuit Required	15 Amps
Voltage Rating	120 V

Installation

Optional Pedestal	Yes
Power Cord Included	Yes
Stackable	Yes

Performance Certifications and Approvals

CEE Tier	Tier 2
ENERGY STAR Certified	Yes
ENERGY STAR Most Efficient	Yes
High Efficiency	Yes

General Specifications


Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Motor	10 Years
Warranty - Parts	1 Year
Warranty - Tub	Lifetime

Safety Certifications and Approvals

NSF Certified	Yes
Sanitization and Allergy Reduction	Yes
UL Listed	Yes

Installation Diagram

Washer dimensions

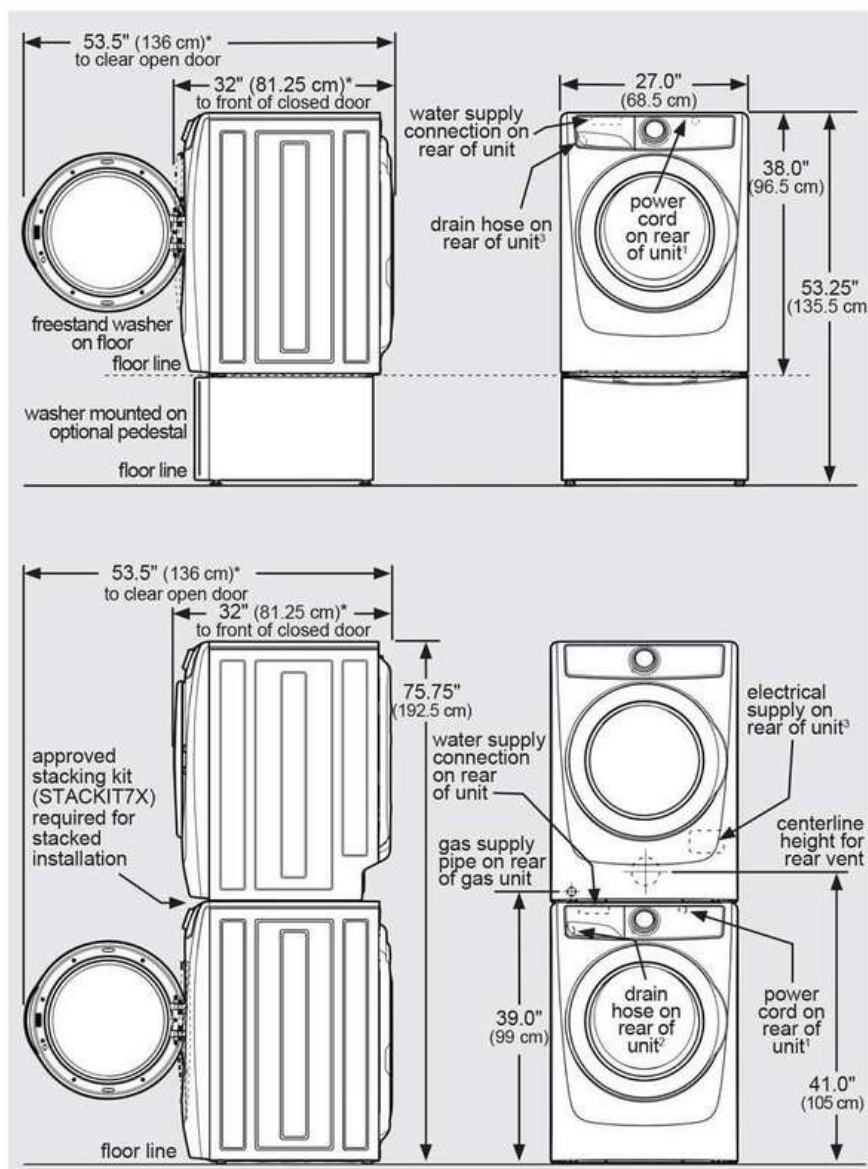

*Connection of water inlet hose on steam dryer adds 3/4 in. (2 cm) to installation depth.

¹Power supply cord length on washer approximately 60 inches (152.5 cm).

²Drain hose length on washer approximately 59 inches (150 cm).

³Power supply cord length on gas dryer or electric Canadian dryer approximately 60 inches (152.5 cm).

NOTE

Because of potentially inconsistent voltage capabilities, the use of this washer with power created by gas powered generators, solar powered generators, wind powered generators or any other generator other than the local utility company is not recommended.

**WARNING****ELECTRIC SHOCK HAZARD**

Certain internal parts are intentionally not grounded and may present a risk of electrical shock if contacted during installation. Do not contact the following parts while the appliance is energized

- Pump
- Drive motor
- Electrical control boards
- Water valves


**WARNING****ELECTRICAL SHOCK HAZARD**

Improper connection of the equipment grounding conductor can result in a risk of electrical shock. Check with a licensed electrician if you are in doubt as to whether the appliance is properly grounded.

Grounding type wall receptacle



Do not, under any circumstances, cut, remove, or bypass the grounding prong.



Power cord with 3-prong grounded plug

Grounding requirements


1. The washer **MUST** be grounded. In the event of malfunction or breakdown, grounding will reduce the risk of electrical shock by a path of least resistance for electrical current.
2. Since your washer is equipped with a power supply cord having an equipment-grounding conductor and a grounding plug, the plug **MUST** be plugged into an appropriate, copper wired receptacle that is properly installed and grounded in accordance with all local codes and ordinances or in the absence of local codes, with the National Electrical Codes, ANSI/NFPA 70 (latest edition), or in Canada, the Canadian electrical code C22.1 part 1. If in doubt, call a licensed electrician. **DO NOT** cut off or alter the grounding prong on the power supply cord. In situations where a two-slot receptacle is present, it is the owner's responsibility to have a licensed electrician replace it with a properly grounded three prong grounding type receptacle.

Water supply requirements

Hot and cold water faucets **MUST** be installed within hose length of your washer's water inlet. The faucets **MUST** be 3/4 inch (1.9 cm) with threading for laundry hose connection. Water pressure **MUST** be between 20 and 120 psi. Pressure difference between hot and cold cannot be more than 10 psi. Your water department can advise you of your water pressure.

Drain system requirements

1. Drain capable of eliminating 17 gals (64.3 L) per minute.
2. A standpipe diameter of 1-1/4 in. (3.18 cm) minimum.
3. The standpipe height above the floor :
Minimum height: 24 in. (61 cm)
Maximum height: 96 in. (244 cm).

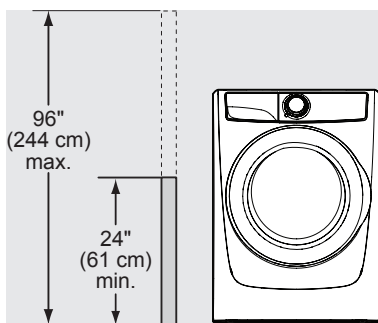

NOTE

Drain hose length is 59 in. (150 cm). For installations requiring a longer drain hose, use hose P/N 137098000, available from an authorized parts distributor.


Clearance requirements




IMPORTANT

DO NOT INSTALL YOUR WASHER:

1. In an area exposed to dripping water or outside weather conditions.
2. In an area where gasoline or other flammables are kept or stored.
3. On carpet. Floor **MUST** be solid with a maximum slope of 1 inch (2.5 cm). To minimize vibration or movement, reinforcement of the floor may be necessary.
4. On top of another washer or on top of a dryer. Do not stack a dryer on top of washer already installed on pedestal.

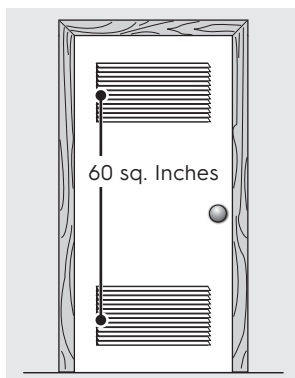

120 sq. Inches Equally Divided Split Vent Door

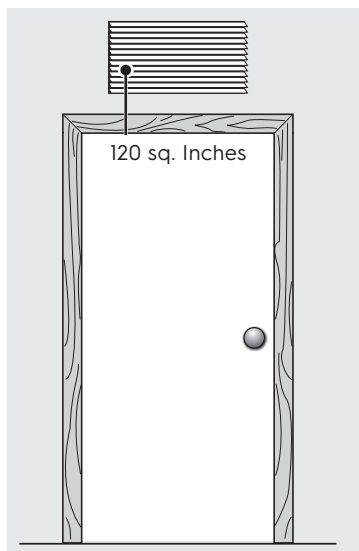

Solid Door with Wall Ventilation


Installation in a recess or closet

If washer and dryer are installed in the same closet, door ventilation is required: A minimum of 120 square inches (774.2 cm²) of opening, equally divided at the top and bottom of the door, is required. Louvered openings should be located 3 inches (7.6 cm) from bottom and top of door. Air openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.


10

PRE-INSTALLATION REQUIREMENTS

120 sq. Inches min.
Louvered Opening

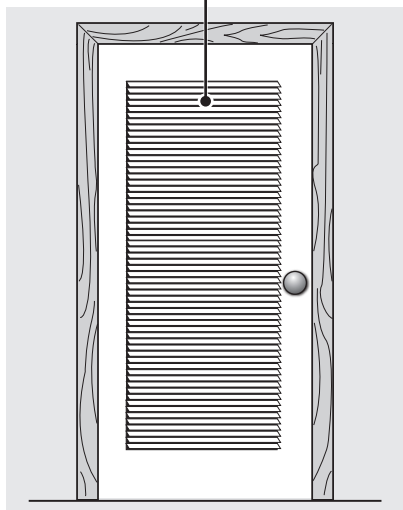


Louvered Door

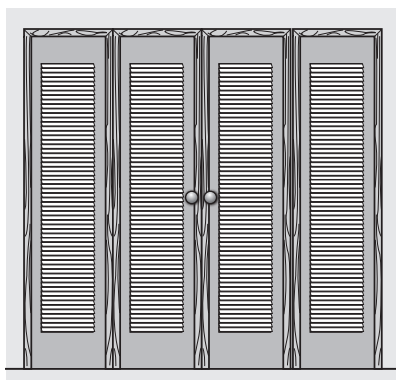

Bi-Fold louvered doors with
120 sq. in of ventilation

120 sq. Inches of
wall venting

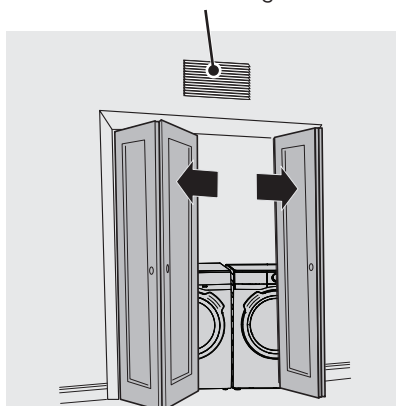


Solid Bi-Fold doors with no
ventilation

**MIN. INSTALLATION CLEARANCES -
Inches (cm)**

	Sides	Rear	Top	Front
Alcove/ recess	0" (0 cm)	0" (0 cm)	0" (0 cm)	Open
Closet with door vent	0" (0 cm)	0" (0 cm)	0" (0 cm)	1" (2.5 cm)
Closet with wall vent	1" (2.5 cm)	1" (2.5 cm)	1" (2.5 cm)	1" (2.5 cm)

Washer dimensions

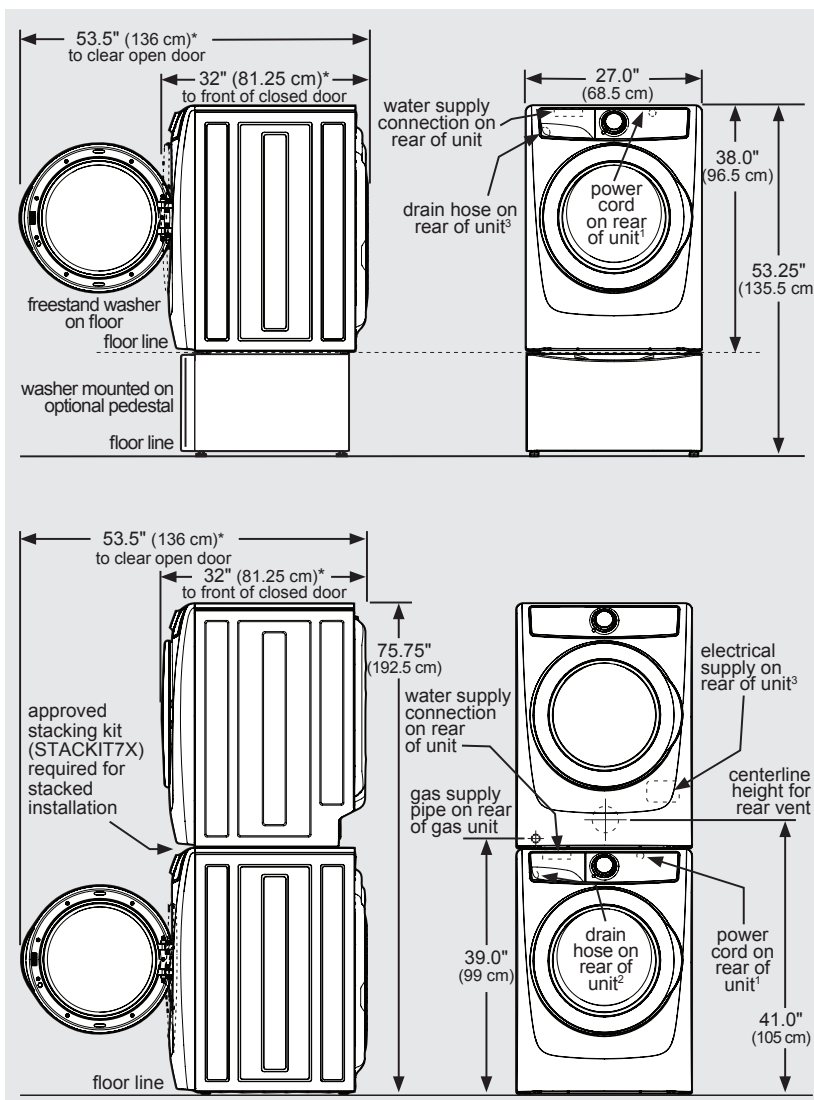

*Connection of water inlet hose on steam dryer adds 3/4 in. (2 cm) to installation depth.

¹Power supply cord length on washer approximately 60 inches (152.5 cm).

²Drain hose length on washer approximately 59 inches (150 cm).

³Power supply cord length on gas dryer or electric Canadian dryer approximately 60 inches (152.5 cm).



Front Load Perfect Steam™ Electric Dryer with Balanced Dry™ and Instant Refresh – 8.0 Cu. Ft.

Dryer

Available Products: ELFE763CAT, ELFE763CAW

Available Colors: Titanium, White

Version: 02/23

Product Specifications

Dryer

Air Flow	200 CFM
Balanced Dry	Yes
Drum Back Type	Painted Steel
Drum Material	Stainless Steel
Dryness Level Selections	Yes
Lint Filter	Yes
Predictive Dry	Yes

Dryer Options

Anti Static	Yes
Delay Start Time	1-12 Hours
Drum Light	Yes
Dry Boost	Yes
Extended Tumble	Yes
Perfect Steam	Yes
Wrinkle Release	Yes

Dryness Level

Max	Yes
High	Yes
Normal	Yes
Low	Yes
Damp	Yes

Exterior

Door Latch	Yes
Reversible Door	Yes

Electrical Specifications

Minimum Circuit Required	30 Amps
Voltage Rating	208/240v

Installation

Optional Pedestal	Yes
-------------------	-----

Performance Certifications and Approvals

ENERGY STAR Certified	Yes
-----------------------	-----

Dryer Cycles

Cycle Count	11
Activewear	Yes
Air Dry	Yes
Allergen	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Instant Refresh	Yes
Mixed Load	Yes
Normal	Yes
Timed Dry Time	Yes
Towels	Yes

Drying Temperatures

Low	Yes
Normal	Yes
High	Yes
Sanitize	Yes
Eco Dry	Yes

Controls

Cancel	Yes
Cycle Status Lights	Yes
Delay Start	Yes
Estimated Time Remaining	Yes
Control Lock	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes

Dimensions and Volume

Height	38"
Width	27"
Depth	32"
Dryer Drum Capacity	8 Cu. Ft.

Energy Data

Combined Energy Factor (CEF)	3.48
kWh/cycle	2.5 kWh
kWh/year	620 kWh

Front Load Perfect Steam™ Electric Dryer with Balanced	Dryer
Dry™ and Instant Refresh – 8.0 Cu. Ft.	
Available Products: ELFE763CAT, ELFE763CAW	Available Colors: Titanium, White
Version: 02/23	


General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year


Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Installation Diagram

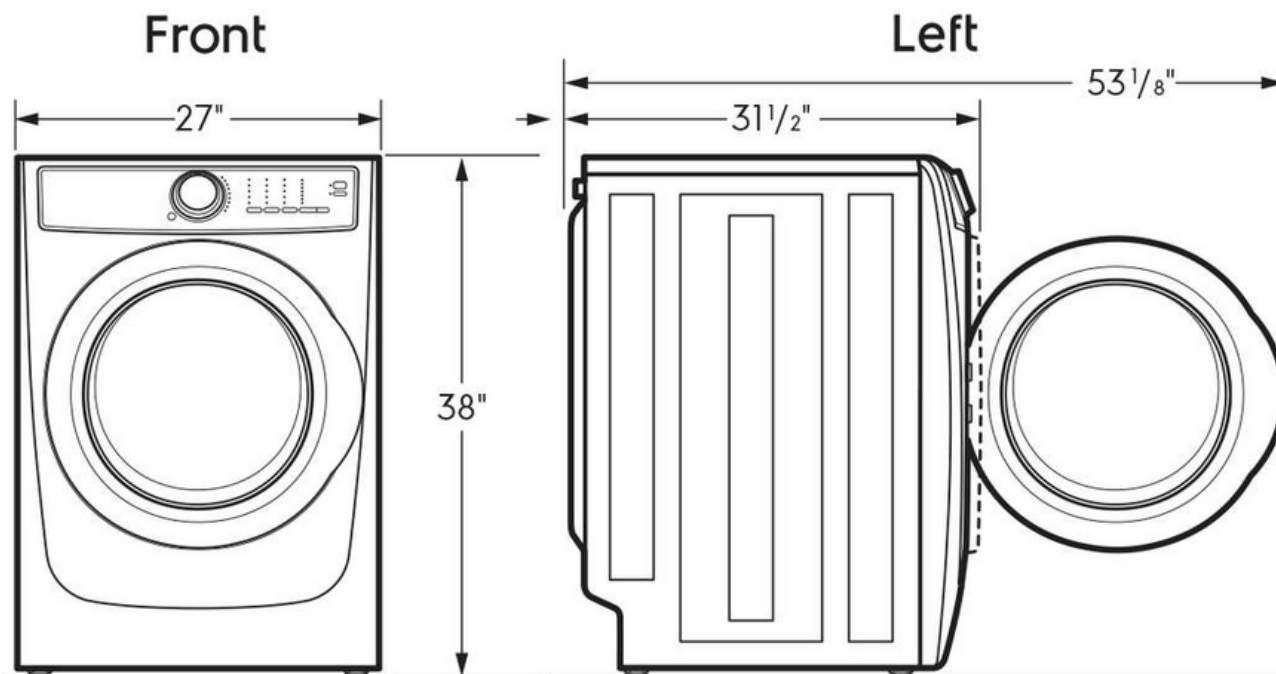

Optional 15" Pedestal Drawer

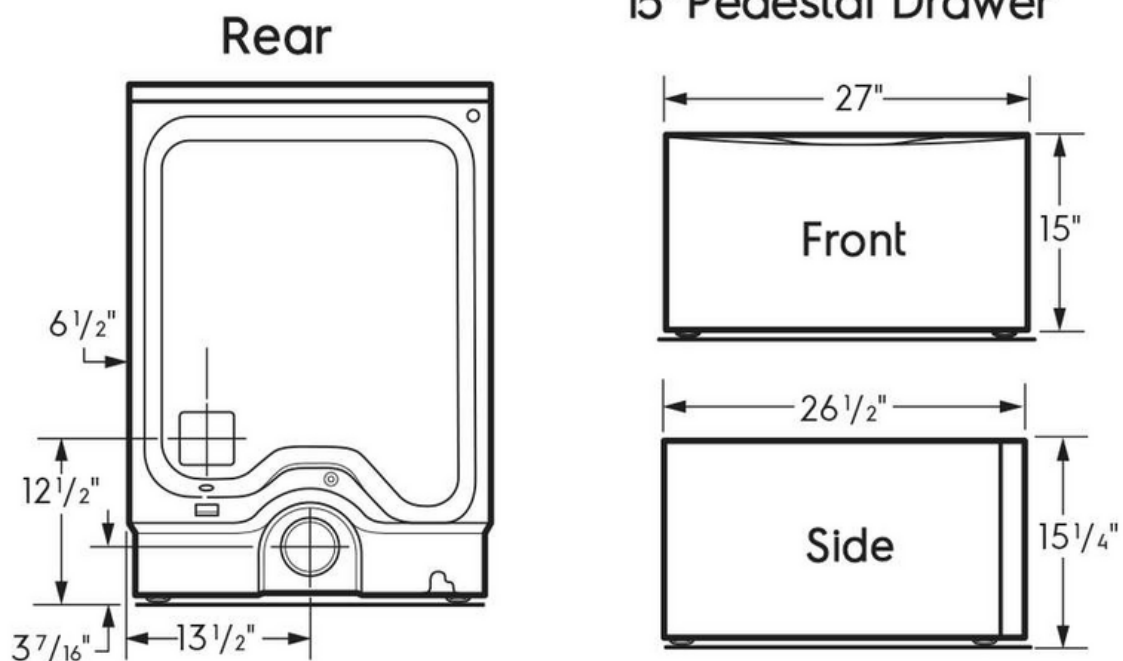



WARNING

FIRE HAZARD

- A clothes dryer must be exhausted outdoors.
- DO NOT** exhaust dryer into a chimney, a wall, a ceiling, an attic, a crawl space or any concealed space of a building.
- A clothes dryer produces combustible lint. If the dryer is not exhausted outdoors, some fine lint will be expelled into the laundry area. An accumulation of lint in any area of the home can create a health and fire hazard.
- The dryer must be connected to an exhaust outdoors.
- Regularly inspect the outdoor exhaust opening and remove any accumulation of lint around the outdoor exhaust opening and in the surrounding area.



WARNING

FIRE HAZARD



- DO NOT** allow combustible materials (for example: clothing, draperies/curtains, paper) to come in contact with exhaust system. The dryer **MUST NOT** be exhausted into any gas vent a chimney, a wall, a ceiling, or any concealed space of a building which can accumulate lint, resulting in a fire hazard.
- DO NOT** screen the exhaust ends of the vent system, or use any screws, rivets or other fasteners that extend into the duct to assemble the exhaust system. **No screen, grate, or guard of any mesh size is allowed to cover the exhaust opening. Lint can become caught in the screen, grate, guard, or on the screws or rivets, clogging the duct work and creating a fire hazard as well as increasing drying times.** Use an approved vent hood to terminate the duct outdoors, and seal all joints with metal foil tape. All male duct pipe fittings **MUST** be installed downstream with the flow of air.



WARNING

FIRE HAZARD

Never exceed more than 4-90° elbows in the exhaust duct system. Exceeding the length of duct pipe or number of elbows allowed in the "MAXIMUM LENGTH" charts can cause an accumulation of lint in the exhaust system. Plugging the system could create a fire hazard, as well as increase drying times.

Max. Number of 90° turns	MAXIMUM LENGTH of 4" (102 mm) Rigid Metal Duct	
	VENT HOOD TYPE	
	(Preferred)	
	 4" (10.2 cm)	 louvered
0	125 ft. (38 m)	110 ft. (33.5 m)
1	115 ft. (35 m)	100 ft. (30.5 m)
2	105 ft. (32 m)	90 ft. (27.5 m)
3	95 ft. (29 m)	80 ft. (24.5 m)
4	85 ft. (26 m)	70 ft. (21.5 m)




WARNING

FIRE HAZARD

- DO NOT** install flexible plastic or flexible foil venting material.
- DO NOT** exceed 8 ft. (2.4 m) duct length if installing semi-rigid venting.
- DO NOT** use screws, rivets or other fasteners that extend into the duct to assemble the exhaust system.

Exhaust direction

Directional exhausting can be accomplished by installing a quick-turn 90° dryer vent elbow directly to exhaust outlet of dryer. Dryer vent elbows are available through your local parts distributor or hardware store.

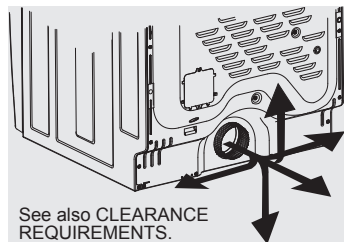

See also CLEARANCE REQUIREMENTS.

NOTE

Use of 90° quick-turn elbow required to meet minimum installation depth.



- Running the exhaust system through an uninsulated area may cause condensation and faster accumulation of lint.
- Compression or crimping of the exhaust system will cause an increase in vent restriction.


**WARNING****FIRE HAZARD**

DO NOT install the dryer where gasoline or other flammables are kept or stored. If the dryer is installed in a garage, it must be a minimum of 18 inches (45.7 cm) above the floor. Failure to do so can result in death, explosion, fire or burns.

In installations where the exhaust system is not described in the charts, the following method must be used to determine if the exhaust system is acceptable:

1. Connect an inclined or digital manometer between the dryer and the point the exhaust connects to the dryer.
2. Set the dryer timer and temperature to **air fluff** (cool down) and start the dryer.
3. Read the measurement on the manometer.
4. The system back pressure **MUST NOT** be higher than 1.0 inch of water column. If the system back pressure is less than 1.0 inch of water column, the system is acceptable. If the manometer reading is higher than 1.0 inch of water column, the system is too restrictive and the installation is unacceptable.

Install male fittings in correct direction:

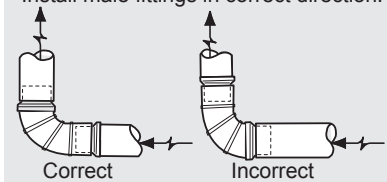

Although vertical orientation of the exhaust system is acceptable, certain extenuating circumstances could affect the performance of the dryer:

- Only the rigid metal duct work should be used.
- Venting vertically through a roof may expose the exhaust system to down drafts causing an increase in vent restriction.

- **The exhaust system should be inspected and cleaned a minimum of every 18 months with normal usage.** The more the dryer is used, the more often you should check the exhaust system and vent hood for proper operation and that it is free of obstructions.

Manufactured or mobile home installation

1. Installation **MUST** conform to current Manufactured Home Construction & Safety Standard, Title 24 CFR, Part 32-80 (formerly the Federal Standard for Mobile Home Construction and Safety for Mobile Homes, Title 24, HUD Part 280) or Standard CAN/CSAZ240 MH.
2. Dryer **MUST** be exhausted outside (outdoors, not beneath the mobile home) using metal ducting that will not support combustion. Metal ducting must be 4 inches (10.16 cm) in diameter with no obstructions. Rigid metal duct is preferred.
3. If dryer is exhausted through the floor and area beneath the mobile home is enclosed, the exhaust system **MUST** terminate outside the enclosure with the termination securely fastened to a non-combustible portion of the mobile home structure.
4. Refer to previous sections in this manual for other important exhaust venting system requirements.
5. When installing a gas dryer into a mobile home, a provision must be made for outside make up air. This provision is to be not less than twice the area of the dryer exhaust outlet.
6. Installer **MUST** anchor this (1) dryer or (2) dryer mounted on pedestal to the floor with approved Mobile Home Installation Kit - P/N 137067200.

Clearance requirements



IMPORTANT

DO NOT INSTALL YOUR DRYER:

1. In an area exposed to standing water, dripping water, or outside weather conditions.
2. In an area where it will come in contact with curtains, drapes, or anything that will obstruct the flow of combustion and ventilation air.
3. On carpet. Floor **MUST** be solid with a maximum slope of 1 inch (2.5 cm)

Installation in a recess or closet

1. A dryer installed in a recess or closet, **MUST** be exhausted outdoors.
2. No other fuel burning appliance shall be installed in the same recess or closet as a gas dryer.
3. Your dryer needs space around it for proper ventilation. See "Clearance Requirements" chart
4. A minimum of 120 square inches of inlet ventilation opening to the recess or closet is required for proper air flow to the dryer.
5. Inlet air ventilation to the recess or closet can be satisfied by adding 120 square inches of opening, equally divided at the top and bottom of the door and located 3 inches from the bottom and top of the door.

or, adding 120 square inches of ventilation openings to the top, sides or rear wall of the closet wall, if the wall is adjacent to an open room, hallway, or exterior.

or, a louvered door with equivalent air openings equaling 120 sq. inches of ventilation for the full length of the door is acceptable.

It is **NOT** approved to derive the 120 sq. inches of ventilation from the space between the door edges and the casing or the floor.


** The presence of forced heating and air-conditioning vent openings in the closet does **NOT** satisfy the 120 square inch ventilation requirement to the closet




NOTE

To achieve an installation with 0" (0 cm) clearance for the back of the dryer (for other than straight back venting), a quick-turn 90° dryer vent elbow must be installed as described previously in this manual.

For other than straight back venting, a quick-turn 90° dryer vent elbow must be installed to achieve 0" (0 cm) installation.

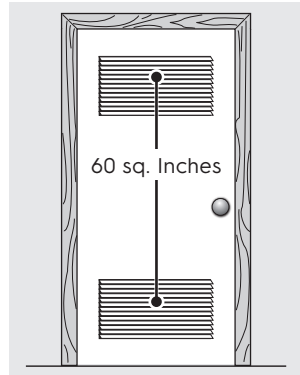


120 sq. Inches Equally Divided Split Vent Door

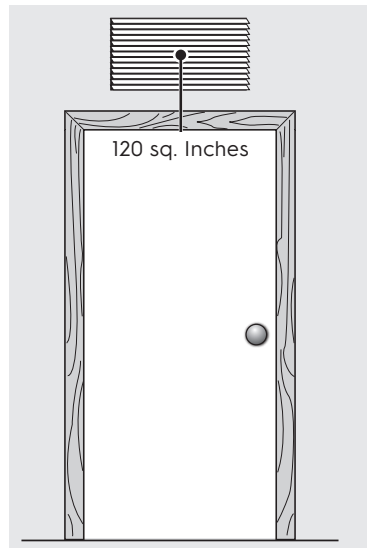


Solid Door with Wall Ventilation

120 sq. Inches min.
Louvered Opening

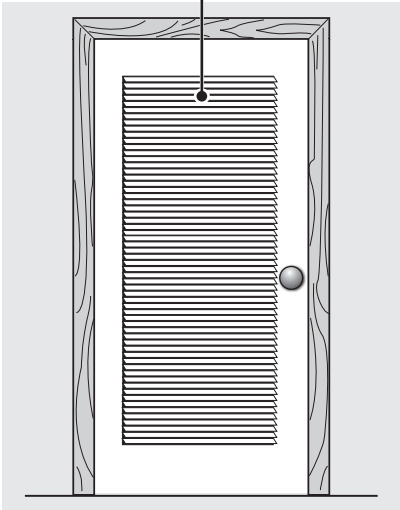


Louvered Door

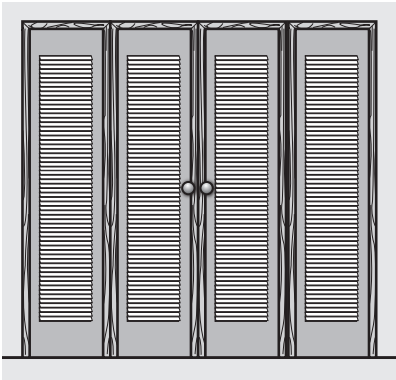

Bi-Fold louvered doors with
120 sq. in of ventilation

120 sq. Inches of
wall venting

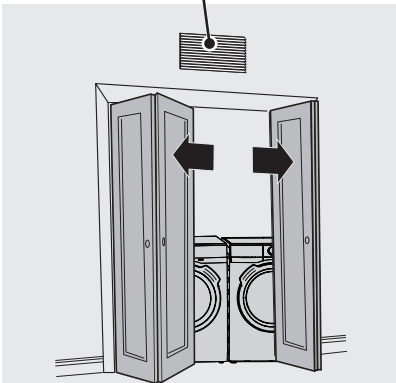


Solid Bi-Fold doors with no
ventilation

MIN INSTALLATION CLEARANCES -
Inches (cm)

	Sides	Rear	Top	Front
Alcove/ recess	0" (0 cm)	0" (0 cm)	0" (0 cm)	Open
Closet with door vent	0" (0 cm)	0" (0 cm)	0" (0 cm)	1" (2.5 cm)
Closet with wall vent	1" (2.5 cm)	1" (2.5 cm)	1" (2.5 cm)	1" (2.5 cm)

Dryer dimensions

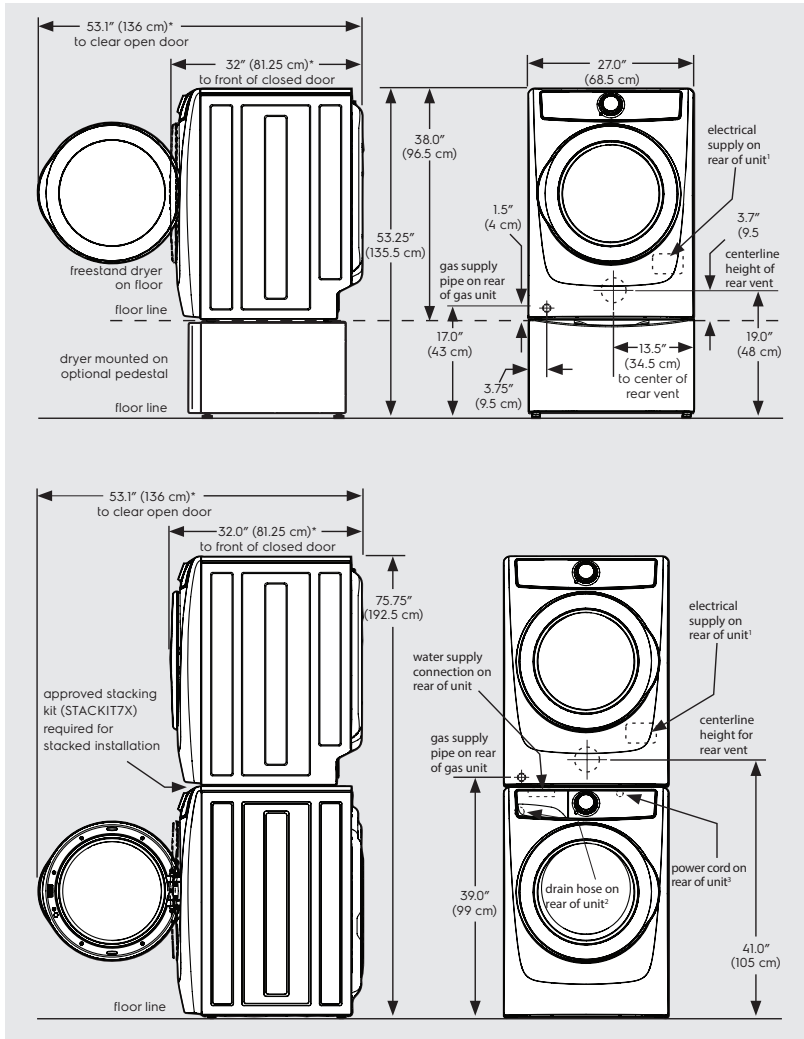

* Connection of water inlet hose on steam dryer adds 3/4 in. (2 cm) to installation depth.

¹ Power supply cord length on gas dryer or electric Canadian dryer approximately 60 inches (152.5 cm).

² Drain hose length on washer approximately 59 inches (150 cm).

³ Power supply cord length on washer approximately 60 inches (152.5 cm).

PRESTIGE® 500

P500-3 STAINLESS STEEL



 Proudly Made in Canada



FEATURES

- » 48,000 BTU'S
- » 4 BURNERS
- » 760 IN² TOTAL COOKING AREA



LIFT EASE™ Center-Gravity Lid



7.5 mm Stainless Steel **Iconic WAVE™** Cooking Grids



Dual-Level **Stainless Steel Sear Plates**



NIGHT LIGHT™ Control Knobs with SafetyGlow



EASY ROLL Locking Casters



Folding Side Shelves



Instant **JETFIRE™** Ignition

OPTIONS / ACCESSORIES




PREMIUM FITTED COVER #61500



PRO STAINLESS STEEL 3 PIECE TOOLSET #70034

DIMENSIONS

EN

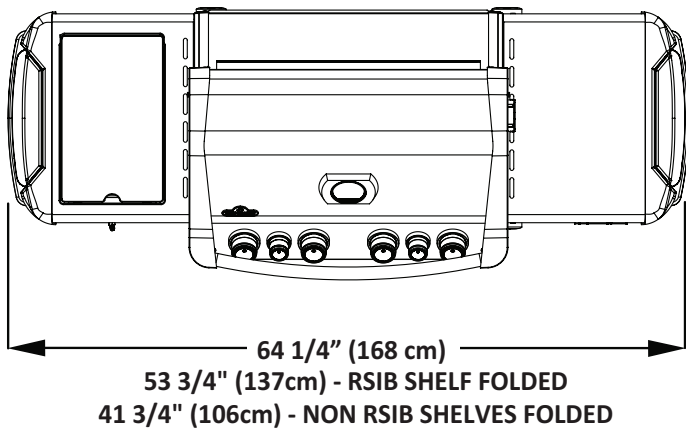

P500-3 GRILL

GRILL SIZE: 500 SQ.IN (3200 sq.cm)

WARMING RACK SIZE: 260 SQ.IN (1680 sq. cm)

ALL DIMENSIONS ARE APPROXIMATE

