



Specifications for Project

26 HEMPHILL

AMEE PATEL

Salesperson

Ali Shojaei

ali.shojaei@caplans.ca



REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

26 HEMPHILL

AMEE PATEL

WOODBIDGE, ON L3L 0B9

Home: 734 834-7377

ameedevo@gmail.com



<i>Contents</i>	<i>Page no.</i>
RS36A72J1 N Fisher & Paykel Refrigeration 36" Series 7 Integrated French Door Refrigerator Freezer with Ice	4-12
CDV3-365H-N Fisher & Paykel Cooktop 36" Series 9 Gas Cooktop (NG)	13-18
OB30SD17PLX1 Fisher & Paykel Wall Oven 30" Series 7 Contemporary Self-Cleaning Oven	19-24
OM30NDLX1 Fisher & Paykel Wall Oven 30" Series 7 Contemporary Compact Convection-Speed Oven	25-29
DW24UT2I2 Fisher & Paykel Dishwasher Series 7 Integrated Tall Dishwasher	30-37
WM3850HVA	38-43

Caplan's Appliances

caplans.ca

Ali Shojaei

Senior Account Manager

(647)444-1900

Sales Order **269718**

Version 2.2

Wed, May 14, 2025

5:41 PM EDT



enterprise.steelcod.com/sp/cpln/QOQ1FA27

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

LG Washer

5.2 cu.ft. Ultra Large Capacity Front Load Washer with AI DD

DLEX3850V 44-47

LG Dryer

7.4 cu.ft. Ultra Large Capacity Front Load Electric Dryer

ETR134S1 48-49

Elica Ventilation

TRENTO 34" SS (1200 CFMs)

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

Integrated French Door Refrigerator Freezer, 36", Ice


Series 7 | Integrated
Panel Ready | French hinge



- This large capacity refrigerator with bottom freezer seamlessly integrates into your kitchen, fitting flush into your cabinetry.
- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
 - Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory
 - Internal ice maker with boost for busy times
 - Spacious bottom freezer with full extension drawer gives easy access to frozen goods

DIMENSIONS

Height	71 13/16"
Width	35 1/16"
Depth	23 3/4"

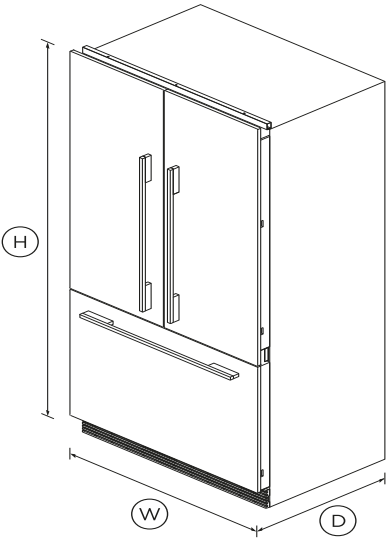

FEATURES & BENEFITS

ACTIVESMART™ FOODCARE

ActiveSmart™ Foodcare learns how you live. It's the technology that understands how you use your fridge and adjusts the temperature, airflow and humidity inside to help keep food fresher for longer.

Clever energy

Your refrigerator adapts to daily use by cooling and defrosting only when needed. This means your refrigerator uses the energy it needs without compromising on food care.

Ice maker

Fresh ice is always available for you in a dedicated freezer bin. Simply turn it off to free up freezer space or during busy times, you can boost ice production by up to 30%.

Design quality

Our refrigerators are designed and built using quality materials. We use real stainless steel on our refrigerators and solid glass for shelving.

EASY INSTALLATION

Our integrated products are easy to install, whether you are renovating your kitchen or designing a new one. Our refrigerators are designed for minimal gaps with adjustable front and rear feet to allow for uneven floors alongside adjustable door panels that can be customized to match your kitchen.

Easy cleaning

No more permanent dirty marks with our EZKleen feature for stainless steel refrigerators. Anti-fingerprint coating means you simply wipe clean any marks. Spill-safe secure glass shelves easily capture any drips or leaks.

Simple storage

This refrigerator is designed to make it simple for you to store, access and remove food. Storage bins give you full access inside when they're pulled open and can be easily removed to clean. Our flexible shelving also gives you more storage options.

SPECIFICATIONS

Accessories (sold separately)

Door panel stainless steel	RD3672A
Handle kit Contemporary	AHS-ASBI-A
Handle kit Contemporary	AHD5RD36A
Handle kit Contemporary	AHD5RD36AB
Handle kit Contemporary	RS36A
Handle kit Professional round	AHCRS36A

Handle kit Professional round	AHP3RD36A
Handle kit Professional square	AHV2RS36A
Water filter replacement	847200 - FWC3

Capacity

Total gross capacity	16.8cu ft
Volume	16.8cu ft
Volume freezer	5.1cu ft
Volume refrigerator	11.7cu ft

Consumption

Energy rating	Energy star
Energy usage	561kWh/year
In-use energy carbon	205.6kgCO2e/year

Features

Adjustable door shelves	6
Adjustable glass cantilevered	•
Covered door shelves	2
Deli storage bins	1
Door alarm	•
Fruit and vegetable bins	2
LED lighting	•
SmartTouch control panel	•
Soft close doors	•
Stackable bottle holders	4
Wi-Fi connectivity	•

Freezer Features

Automatic ice maker	•
---------------------	---

Bottle chill	•
Door alarm	•
Fast freeze	•
Freezer bins	1
Ice Boost	•
LED lighting	•
Slide Out Pastry Tray	•

Performance

ActiveSmart™ Foodcare	•
Adaptive defrost	•
Automatic defrost	•
Frost free freezer	•
Humidity control system	•
Inverter controlled compressor	•
Sabbath mode	•

Power requirements

Supply frequency	60Hz
Supply voltage	115V

Product dimensions

Depth	23 3/4"
Height	71 13/16"
Width	35 1/16"

Warranty

Parts and labor	2 years
Sealed system parts only	5 years

SKU	26313
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. Fisher & Paykel Appliances Ltd 2020

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.

Other product downloads available at fisherpaykel.com



User Guide



Energy Label



Service & Warranty



Installation Guide



Water Filter Replacement Instructions & Installation Guide
EN



Guide d'installation - Instructions de Remplacement du
Filtre à Eau FR



Data Sheet Integrated French Door Fridge Freezer



Planning Guide Integrated French Door Fridge Freezer




A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support


T 1.888.936.7872 W www.fisherpaykel.com

4 APPLIANCE AND CAVITY DIMENSIONS

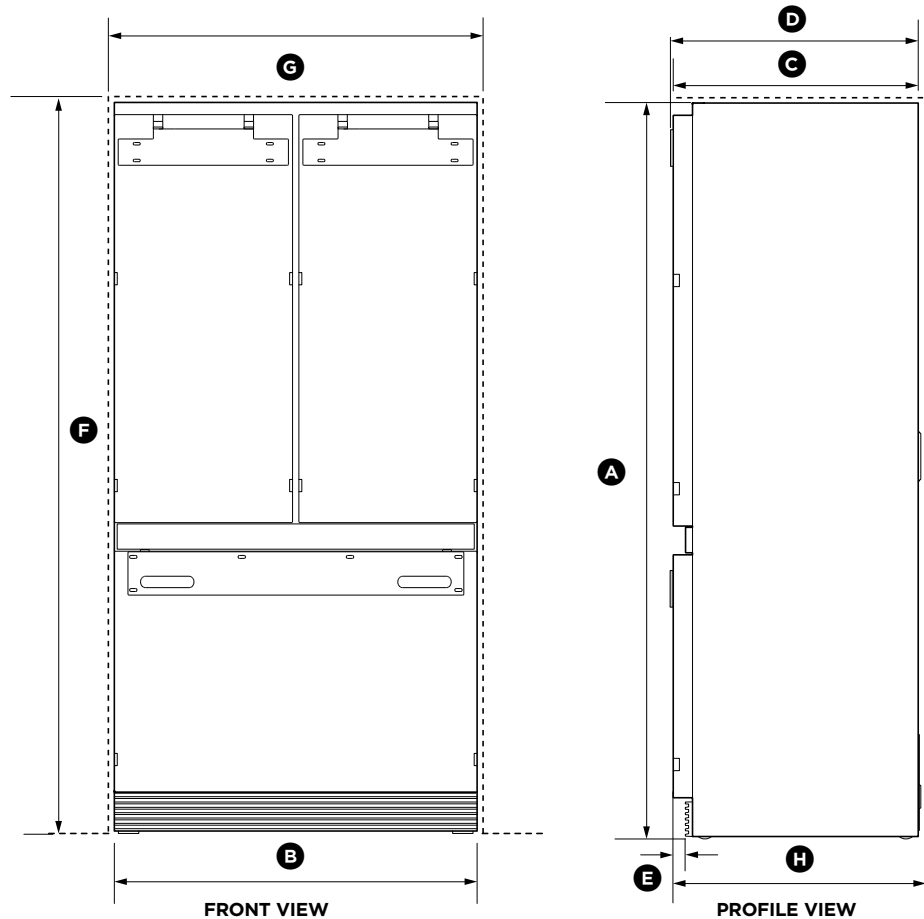

IMPORTANT!

For ease of installation, ensure cavity width is consistent top to bottom and height is consistent left to right.

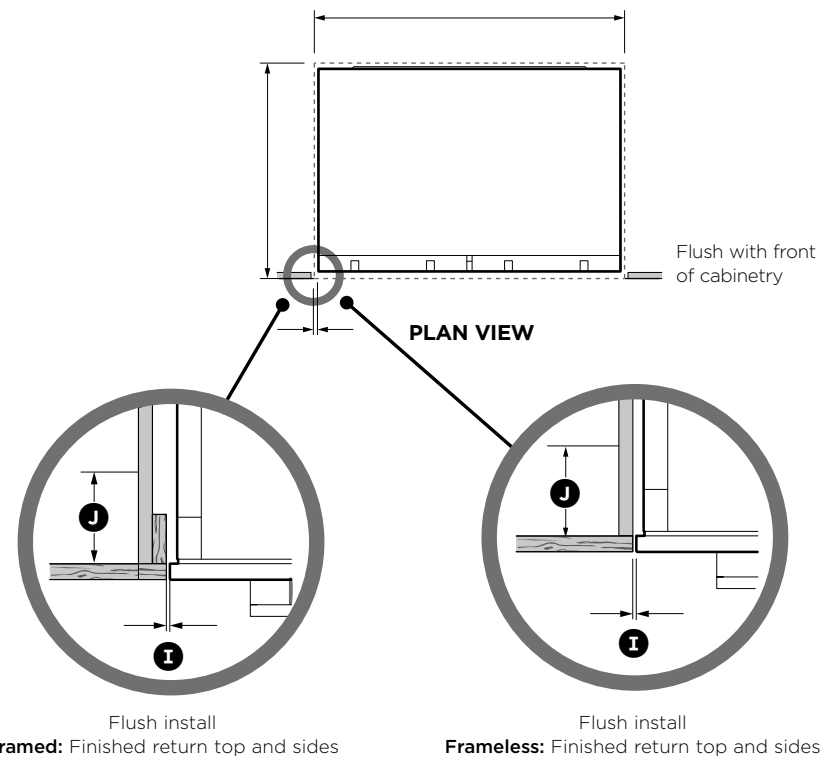

APPLIANCE DIMENSIONS	
(A)	Overall height of appliance*
(B)	Overall width of appliance
(C)	Overall depth of appliance (without door panels and hanging brackets)
(D)	Overall depth of appliance (with hanging brackets only)
(E)	Depth of toe kick (excluding front of door panel)

* Includes mounted rollers (20mm adjustment upwards)


RS36A	
in	mm
71 7/8"	1825**
35 1/16"	890
23 11/16"	602
23 3/4"	604
2"	50

CAVITY DIMENSIONS	
(F)	Overall height of cavity
(G)	Overall width of cavity
(H)	Overall depth of cavity
(I)	Minimum cabinetry gap clearance from edge of appliance
(J)	Minimum required finished return


RS36A	
in	mm
72	1829
36	914
25	635
3/16	4
min 3 1/2	min 89

⑤ CABINETRY OPTIONS

FRAMELESS CABINETRY (Aligns the appliance with the cabinetry)

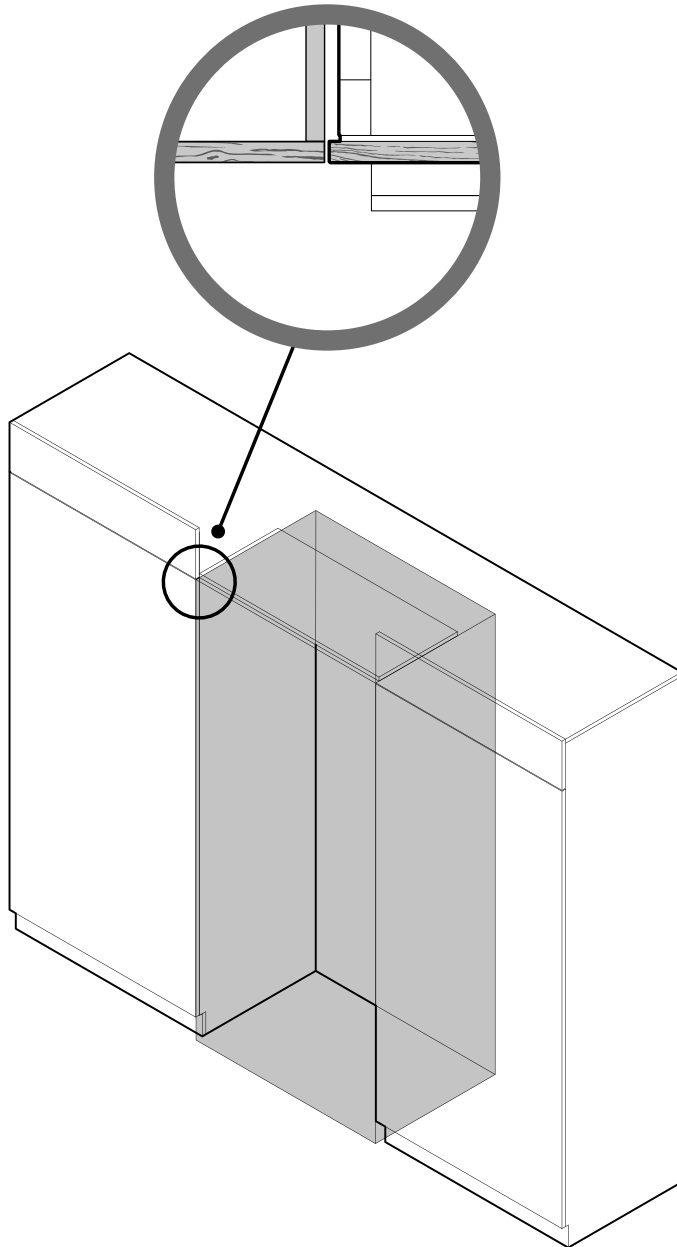

FRAMED CABINETRY (Aligns the appliance with the frame of the cabinetry)

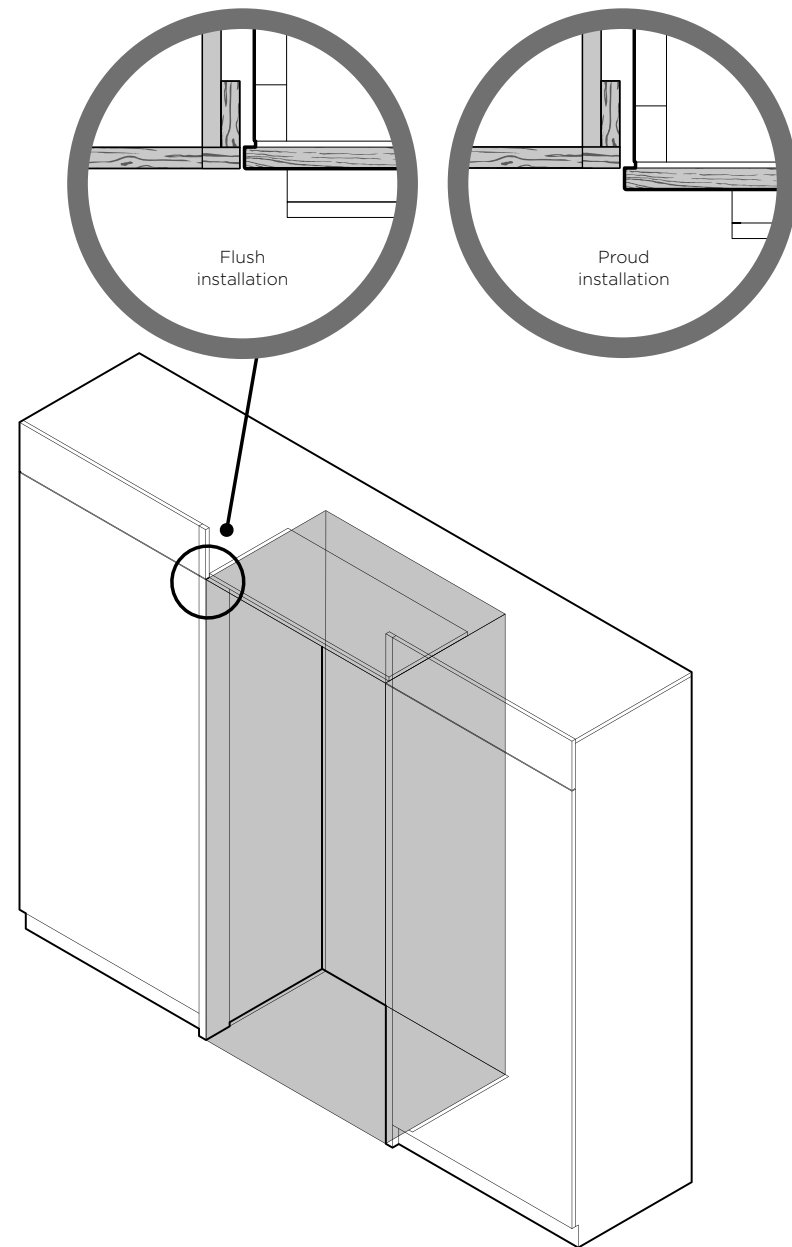


Note: Drawings are only for reference and not the actual cavity width of the cabinetry.

6 DOOR PANEL DIMENSIONS

IMPORTANT!

- Custom door panels can only be used for non-Water dispensing models.
- Custom door panels to be manufactured and fitted by cabinetmaker.
- Door handle kit must be purchased separately.

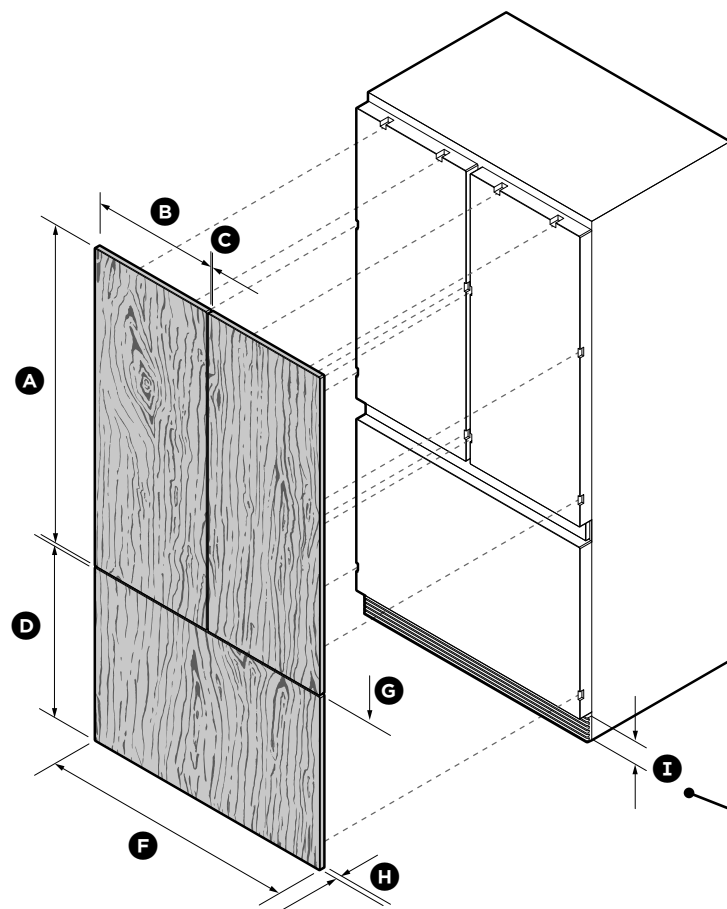

ISO VIEW

STAINLESS STEEL/CUSTOM DOOR PANELS

DIMENSIONS

(A)	Height of each top door panel
(B)	Width of each top door panel
(C)	Gap between top door panels
(D)	Height of bottom drawer panel
(E)	Height from bottom of product to top of drawer panel
(F)	Width of bottom drawer panel
(G)	Gap between top door panels and bottom drawer panel
(H)	Depth of door and drawer panels (excluding handle)

Stainless steel
Custom


(I)	Height of toe kick (from bottom of drawer to floor)
-----	---

DOOR PANEL WEIGHT




Maximum weight of each top door panel (with handle)
Maximum weight of bottom drawer panel (with handle)

RS36A72

in	mm
44 3/16"	1123
17 3/4"	451
3/16"	4
23 7/16"	596
27 1/2"	698
35 11/16"	906
3/16"	4
3/4"	19
5/8"-3/4"	16-19
4"	102
lbs	kg
22	10
24 1/4	11

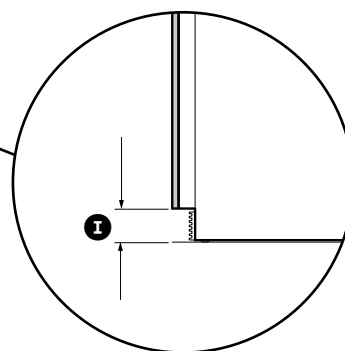

9 DOOR CLEARANCE

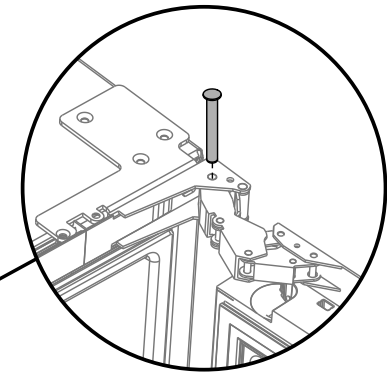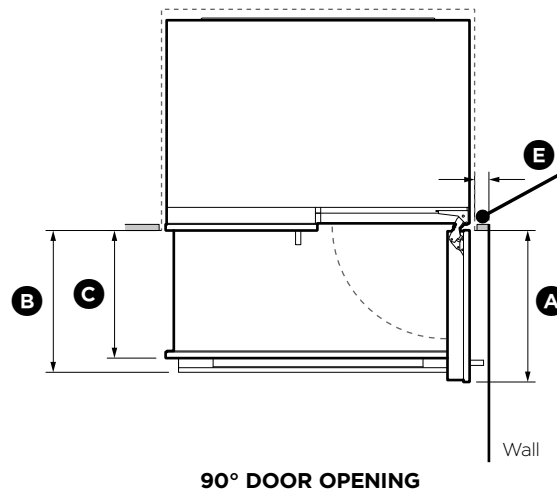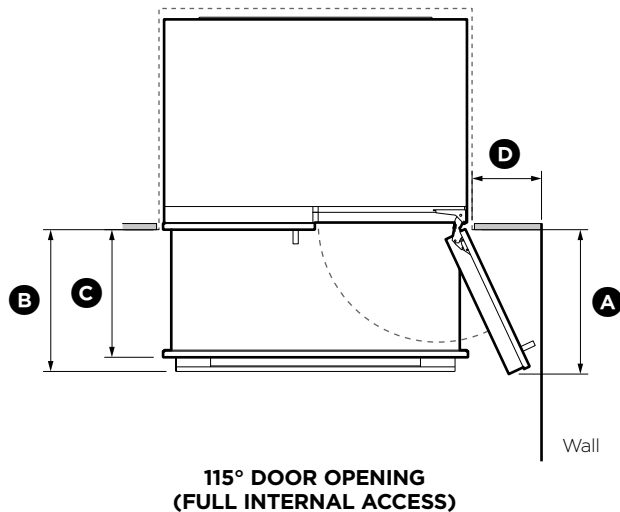

Insert hinge limiting pin

WARNING!

- Before opening the doors, ensure that the appliance is stable.
- Follow these steps to avoid risks that can cause serious injury or death.

For 90° door swing, a hinge limiting pin is supplied with your appliance. This pin fits in the boreholes of the top hinge (B).

- ① Open door to 90°.
- ② Insert the hinge limiting pin vertically into the bore hole.
 - Apply a gentle tap to the pin if it does not slide smoothly.

DIMENSIONS

- | | |
|-----|--|
| (A) | Depth of door (widest opening) measured from front of door |
| (B) | Depth of drawer (open) measured from front of drawer, including handle |
| (C) | Depth of drawer (open) measured from front of drawer, excluding handle |
| (D) | Minimum door clearance* to adjacent wall (115° — full internal access) |
| (E) | Minimum door clearance* to adjacent wall (90° — reduced internal access) |

* Measured from front cabinetry edge, includes 2mm cabinetry gap.


RS36A72

in	mm
17 1/2"	445
15 3/4"	400
14 3/16"	360
11 13/16"	300
3 13/16"	100

10 ELECTRICAL AND PLUMBING

IMPORTANT!

- Electrical connection should be located in an adjacent cabinet to either side of the appliance or above the appliance cavity.
- We recommend to use an isolating switch that is easily accessible to the user after the appliance is installed.

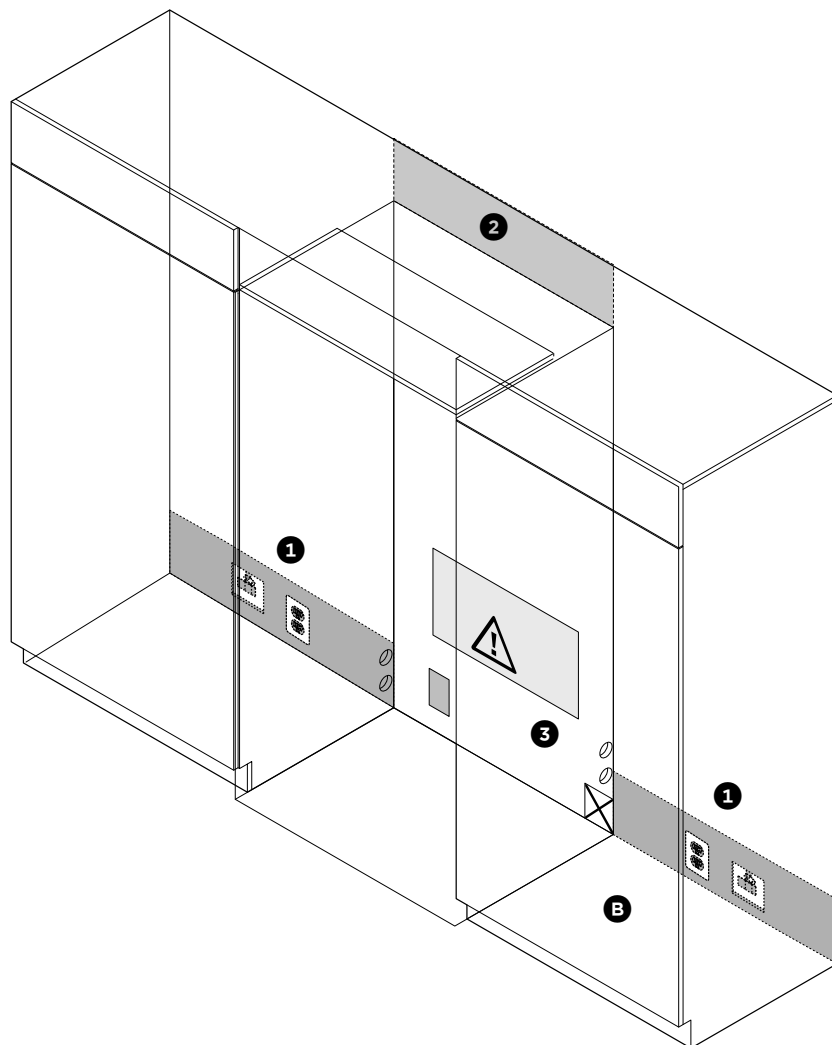


WARNING!

- Electrical shock hazard. Assume all parts are live.
- Disconnect supply before servicing and installation.

ELECTRICAL AND PLUMBING CONNECTIONS

- ① Recommended location for connections in adjacent area or unit
- ② Alternative location for connections above the cavity
- ③ Alternative location for connections at rear of cavity

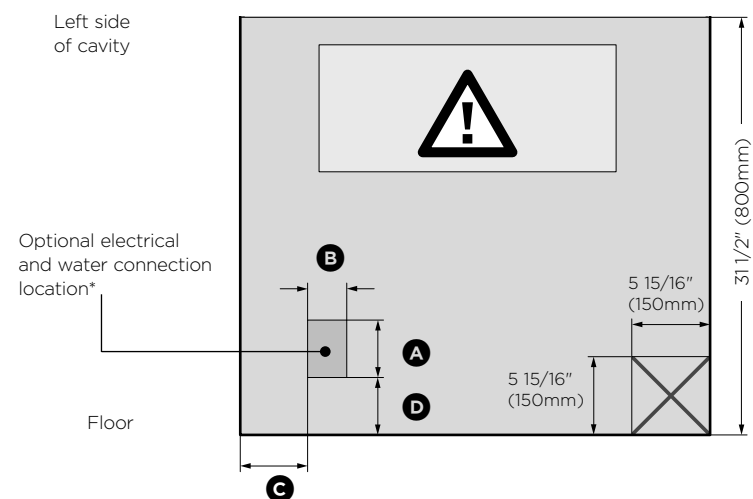

Electrical and water connections must be within this space if located behind the appliance and must not protrude from the back wall.

ELECTRICAL AND PLUMBING DIMENSIONS

- (A) Overall height of supply area
- (B) Overall width of supply area
- (C) Distance from left side of cavity
- (D) Distance from the floor

RS36A72

(A)	4 5/16"	110
(B)	2 15/16"	75
(C)	5 1/6"	129
(D)	4 5/16"	110

Note: Dimensions are based on minimum depth of cavity.

✗ Do not locate water or electricity in this area, keep clear of connections.

⚠ CAUTION: Central area can only fit water outlet and electrical plug if they are placed within a recessed cavity.

* In this location the water tap needs to be recessed into the wall, the recess must allow for an 80mm bend radius for the water tube.

Maximum distance of hose and power cord


Checking your appliance

- ① Detach accessories box taped to back panel of appliance.

Refer to 'Components' (page 5).

IMPORTANT!

Be aware when removing the carton that the accessories box may have dislodged from the rear of the appliance during transit.

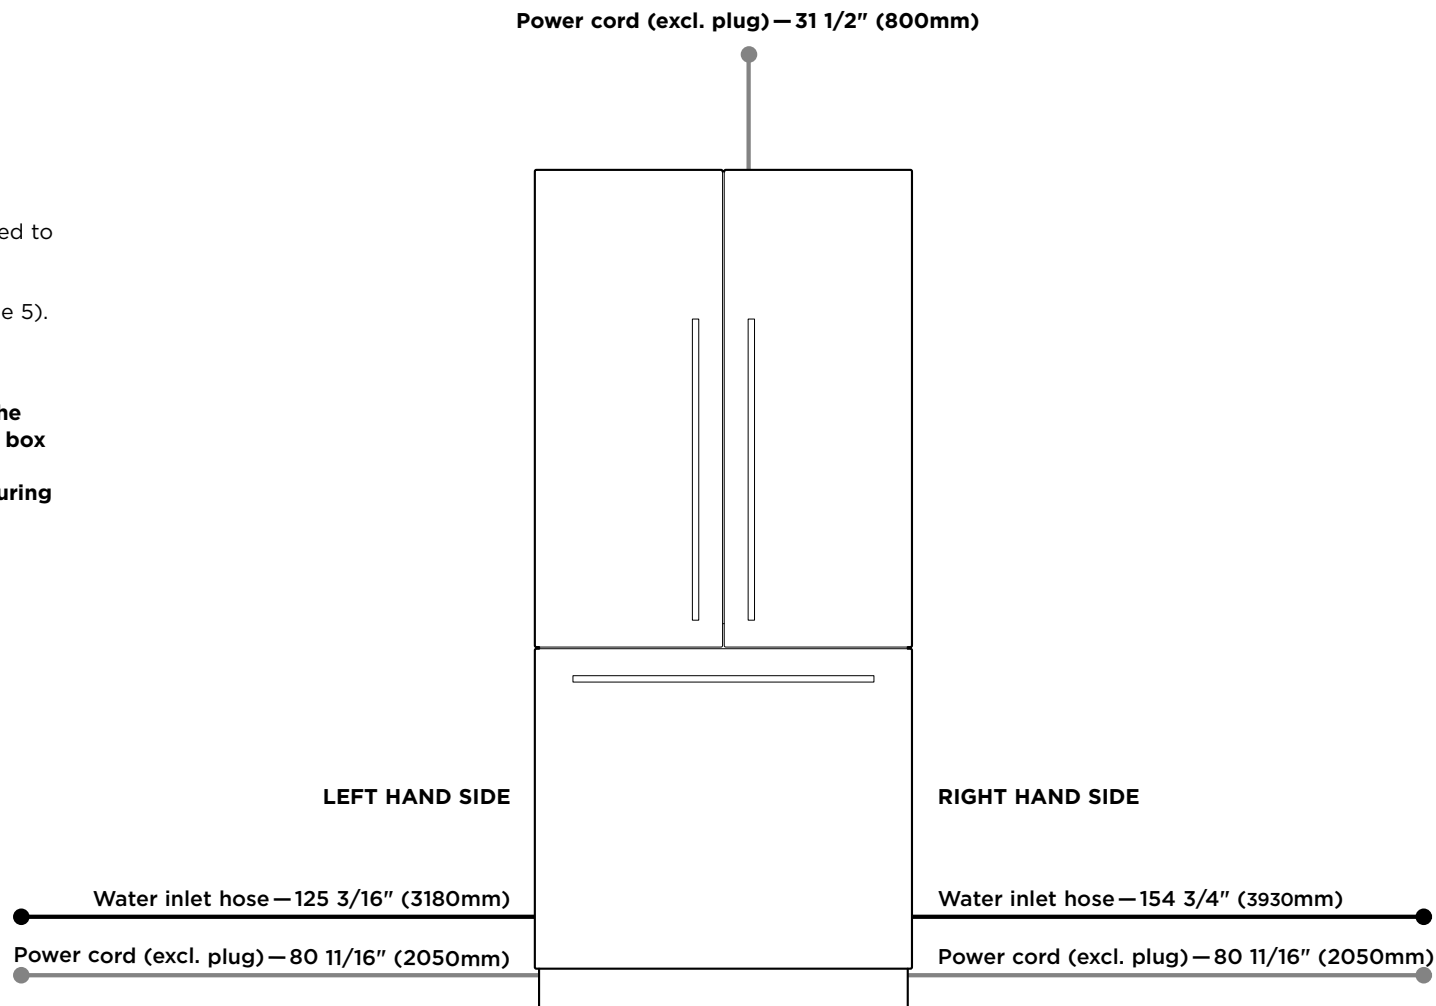

ELECTRICAL SPECIFICATIONS

Supply	115VAC, 60Hz
Service	10 amp circuit


PLUMBING SPECIFICATIONS

Supply	1/4" (6mm) comp. Stainless steel braided hose
Pressure	min. 22psi (150kPa) max. 120psi (827kPa) @ 68°F (20°C)

36" Series 9 5 Burner Gas Cooktop, Natural Gas

Series 9 | Professional

Stainless Steel | Natural Gas

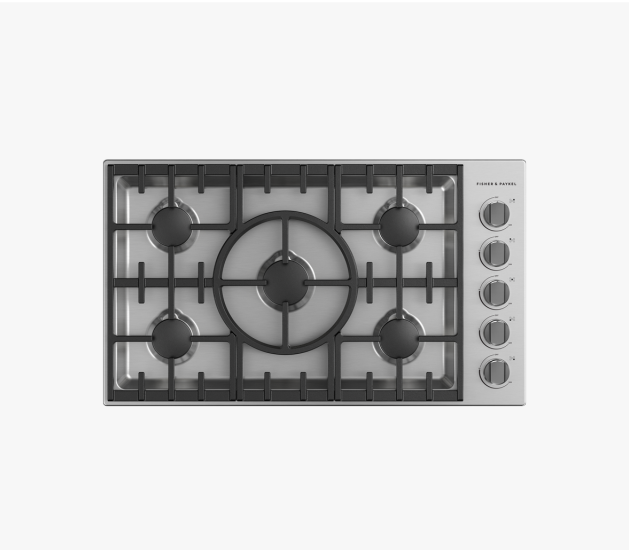

- A powerful high-heat five burner with precision control and performance. Pair with any other appliance in our Professional range.
- Your burners can deliver anything from a high 20,000 BTU heat per burner for fast boiling, to a gentle flame for simmering
 - Continuous surface grates designed for pots and pans to move safely across the cooktop
 - Designed to match Professional style appliances

- Made from quality materials and real stainless steel

DIMENSIONS

Height	5 1/2 "
Width	36 "
Depth	21 "

FEATURES & BENEFITS

Cooktop Power
Sealed Dual Flow Burners™ deliver cooktop power up to 20,000 BTU for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

Precise Control
From the highest to the lowest temperatures you get total control with halo-illuminated cooktop dials. A precise full surface simmer is delivered across all burners.

Cooking Flexibility
The self-locating grates focus the flame on the base of each pan, where it is most required. They are designed for easy and safe sliding of pans across the cooktop surface. For cooking variety, a wok ring accessory is also available.

Easy To Clean
These cooktops are easy to clean with a commercial-style stainless steel finish, sealed burners and a single sheet cooking surface.

Information At A Glance
LED halo control dials provide information at a glance and assist in alerting you if any burners are accidentally left on.

Complementary Design

Built to last with distinctive, bold styling, this cooktop is designed to match the Fisher & Paykel Professional style family of appliances.

SPECIFICATIONS

Burner ratings	
Maximum burner power	Yes
Power back left	15,000 BTU
Power back right	15,000 BTU
Power front centre	20,000 BTU
Power front left	15,000 BTU
Power front right	15,000 BTU
Total cooktop power	80,000 BTU

Controls	
Metal illuminated dials	•
Titanium coated, illuminated metal dials	•

Gas Requirements	
Fitting and pipe	½ NPT, min. ⅝" flex line
Supply Pressure (natural gas)	6" to 9" W.C

Performance	
Sealed cooking surface	•
Sealed Dual Flow Burners™	5
Simmer on all burners	140 °F

Power Requirements

Amperage	15 A
Supply frequency	60 Hz
Supply voltage	120 V

Product Dimensions

Depth	21 "
Height	5 1/2 "
Width	36 "

Recommended Back Guards Ventilation

Downdraft	HD36
Minimum CFM	600 BTU
Pro hood	HCB36-12 N / HCB36-6 N
Traditional hood	ES36

Safety

ADA compliant	•
---------------	---

SKU	82375
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) 2D-DWG Gas Cooktop
- [↓](#) 2D-DXF Gas Cooktop
- [↓](#) Installation Guide
- [↓](#) Revit Gas Cooktop
- [↓](#) Rhino Gas Cooktop
- [↓](#) Sketchup Gas Cooktop
- [↓](#) User Guide

Where applicable:


All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.




A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com


PRODUCT DIMENSIONS 36" MODELS

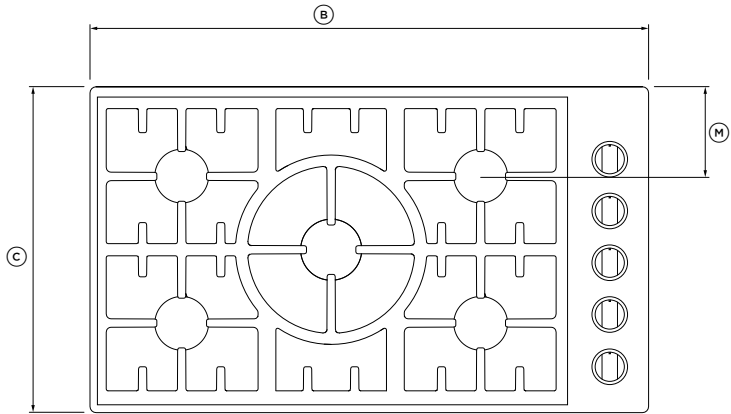


PLAN

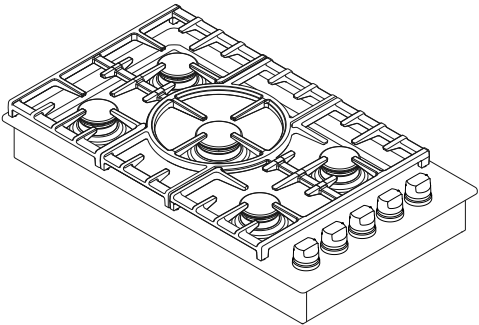

ISOMETRIC

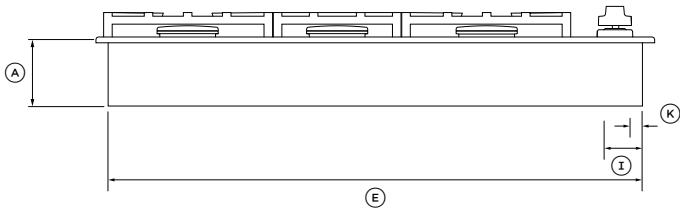

FRONT

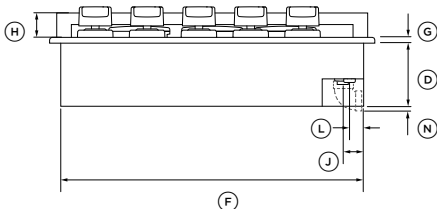


PROFILE

PRODUCT DIMENSIONS	36" MODELS	
	IN	MM
(A) Overall height*	4 5/16	110
(B) Overall width	36	915
(C) Overall depth	21	533
(D) Height of chassis	4	102
(E) Width of chassis	34 7/16	874
(F) Depth of chassis	19 3/8	492
(G) Height above countertop	3/8	10
(H) Height above countertop to top of grates	1 9/16	40
(I) Distance from right edge of chassis to centre of gas inlet	2 3/4	70
(J) Distance from rear edge of chassis to centre of gas inlet	15/16	33
(K) Distance from right edge of chassis to centre of power cord	7/8	23
(L) Distance from rear edge of chassis to centre of power cord	13/16	22
(M) Distance from centre of rear burner to rear of cooktop	5 3/4	146
(N) Distance from base of chassis to base of elbow**	3/8	10
*Excluding grates		
**When fitted.		
PRODUCT WEIGHT	36" MODELS	
	LB	KG
Weight of product (excluding packaging)	90	41

CDV3 365 model illustrated
Dimensions may vary by ± 2mm

CABINETY DIMENSIONS


30" CUTOUT

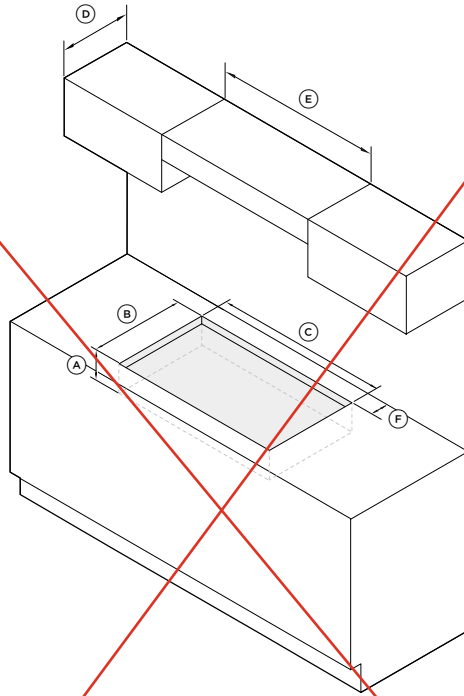

CABINETY DIMENSIONS	30" MODELS	
	IN	MM
(A) Min. height allowance*	4 7/16	112
(B) Depth	19 3/4	502
(C) Width	28 5/8	727
(D) Max. depth of overhead cabinetry	13	330
(E) Min. width of ventilation hood required	30	762
(F) Min. distance from rear edge of cutout to nearest combustible surface	2	51

top of counter*

36" CUTOUT

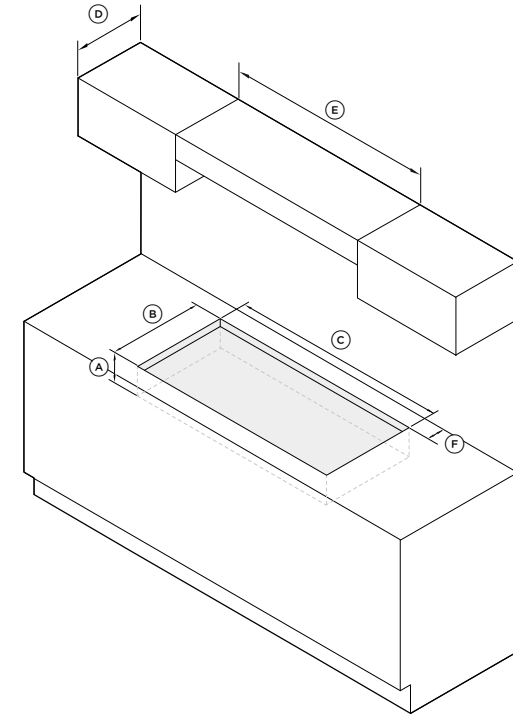


CABINETY DIMENSIONS	36" MODELS	
	IN	MM
(A) Min. height allowance*	4 7/16	112
(B) Depth	19 3/4	502
(C) Width	34 3/4	883
(D) Max. depth of overhead cabinetry	13	330
(E) Min. width of ventilation hood required	36	914
(F) Min. distance from rear edge of cutout to nearest combustible surface	2	51

CABINTRY DIMENSIONS

CLEARANCES

The below clearances apply to both wall and island installations for all models.

Ensure the cook surface sits flush or above the adjacent countertop and any openings behind or under the cooktop are sealed. Flow of combustion and ventilation air must not be obstructed.

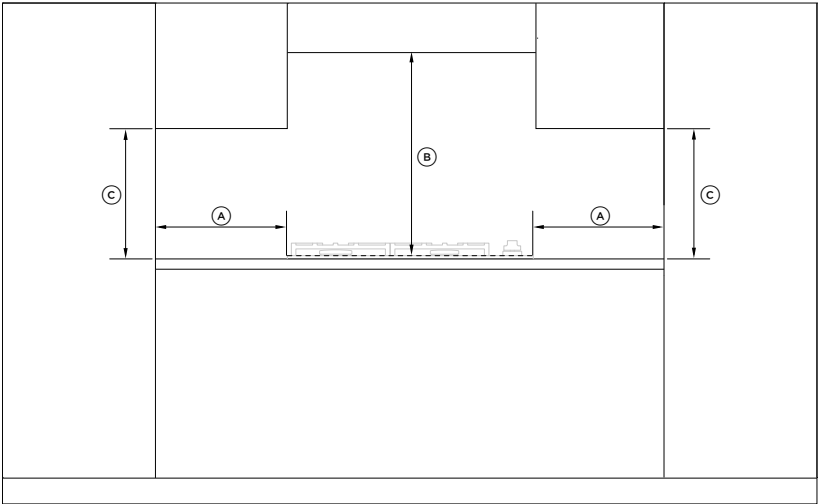


CLEARANCE DIMENSIONS	ALL MODELS	
	IN	MM
Ⓐ Min. distance from side of cooktop to nearest: <ul style="list-style-type: none">vertical combustible surface	12	305
Ⓑ Min. distance from cook surface to overhead: <ul style="list-style-type: none">combustible surfacenon-combustible surface	36 30	914 762
Ⓒ Min. distance between countertop and cabinet	18	457

Non-combustible surfaces: as defined in 'National Fuel Gas Code' (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by UL. Clearances of less than 6" (152mm) must be approved by the local codes and/or by the local authority having jurisdiction.

COOKTOP OVER OVEN

- Ensure the regulator position is clear of installation combination. Refer to 'Gas Connection Considerations for regulator dimensions.
- OB30SPPTX1 models require a sealed cavity. When installing under a CDV3 cooktop, the cooktop will act as a part of the overall oven cavity.

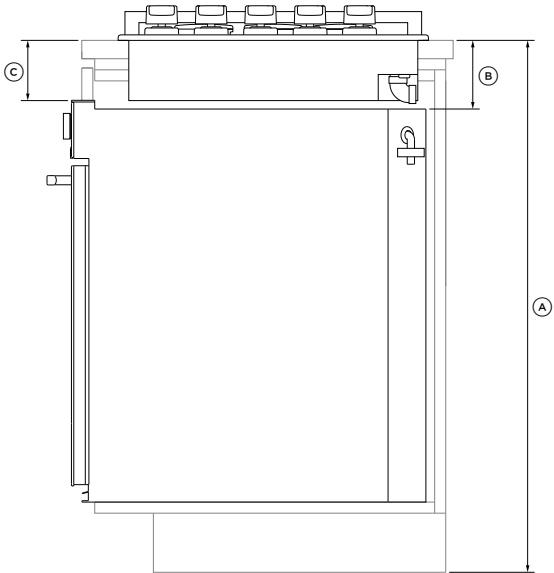

CLEARANCE DIMENSIONS	ALL MODELS	
	IN	MM
Ⓐ Min. clearance under countertop	4 7/16	112
Ⓑ Height of counter	36	914
Ⓒ Min. height from countertop to oven front	4 1/16	103


OB30SPPTX1 illustrated. For all other install combinations refer to the technical information provided for chosen oven.

VENTILATION REQUIREMENTS


- Ventilation hoods and blowers are designed for use with single wall ducting, however some local building codes or inspectors may require double wall ducting and/or a damper. Consult local building codes and/or agencies, before installing to ensure local requirements are met. Semi-rigid ducting is recommended for maximum effectiveness.
- Hood blower speeds should be variable to reduce noise and loss of household air.
- Due to a high volume of ventilation air, a source of make-up air (outside replacement air) is recommended. This is particularly important for tightly sealed and insulated homes. A reputable heating and ventilating contractor should be consulted.

WALL INSTALLATION

Non-combustible

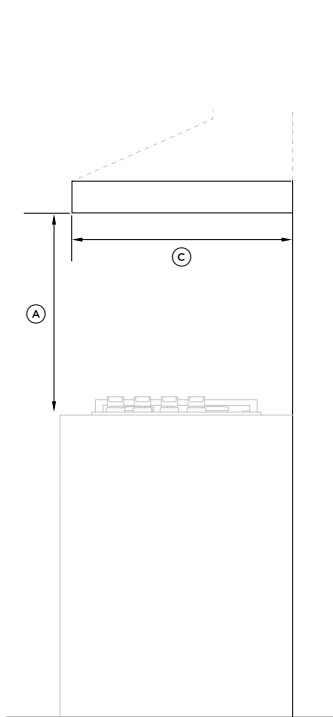


Combustible

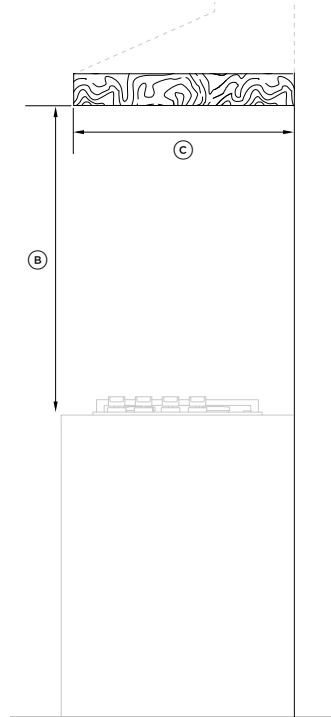


VENTILATION UNIT		WALL INSTALLATION RECOMMENDATIONS	
Hood		(A) min. 30" (762mm)	max. 42 (762mm)
		(B) min. 36" (914mm)	max. 42 (762mm)
		(C) min. 19" (480mm)	
Blower	30" Cooktop	min. 550 CFM	
	36" Cooktop	min. 550 CFM	

ISLAND INSTALLATION

Non-combustible

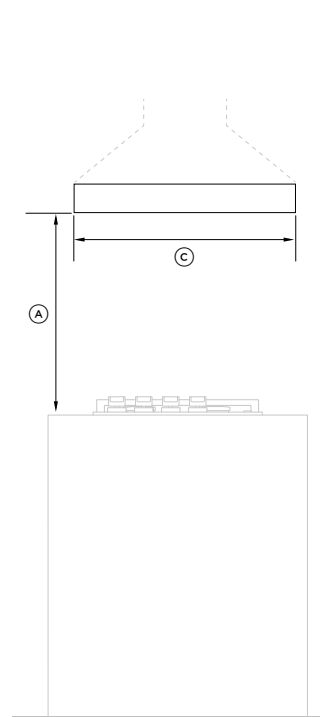

Combustible

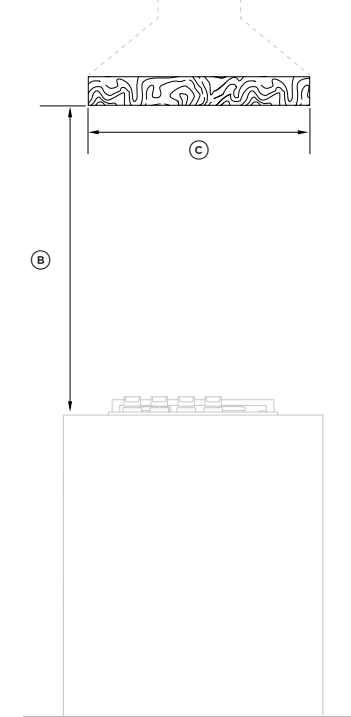

VENTILATION UNIT		ISLAND INSTALLATION RECOMMENDATIONS	
Hood		(A) min. 30" (762mm)	max. 42 (762mm)
		(B) min. 36" (914mm)	max. 42 (762mm)
		(C) min. 19" (480mm)	
Blower	30" Cooktop	min. 550 CFM	
	36" Cooktop	min. 550 CFM	

30" Series 7 Contemporary Self-Cleaning Oven, 17 Function

Series 7 | Contemporary

Stainless Steel




With beautiful Contemporary styling and a generous 4.1 cu ft total capacity, this built-in oven helps to ensure that every dish you create is cooked to perfection.

- 4.1 cu ft total capacity with 17 oven functions including Air Fry and Dehydrate
- Even heat circulation with AeroTech™, ideal for multi-shelf cooking

- Pyrolytic self-cleaning function breaks down food residue for an easy clean
- Guided cooking capability offers helpful tips for different food types

DIMENSIONS

Height	27 3/16 "
Width	29 15/16 "
Depth	23 15/16 "

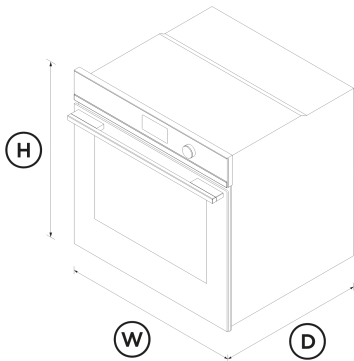

FEATURES & BENEFITS

Multi-Function Flexibility

Each function has been perfected to ensure that no matter what you're cooking, you've got the right heat to match. This built-in oven has 17 functions including Pastry Bake, Roast, Fan Grill, Dehydrate and Rapid Proof, allowing you to use a variety of cooking styles.

Generous Capacity

With an incredible 4.1 cu ft total capacity in each oven, you can create several perfectly cooked dishes at once using multiple shelves.

Cook With Confidence

The intuitive 2.4" screen provides an intuitive guided cooking experience that helps to deliver perfect results, whether you've been cooking all your life or are just starting out. Cook by food type and allow your oven to guide you through steps, or change temperature and heat type automatically, depending on your selection.

Exceptional Performance

AeroTech™ circulates heat evenly for a consistent temperature throughout the cavity, helping you ensure perfect results even when cooking on multiple shelves.

Self-Cleaning

Pyrolytic self-clean breaks down food residue at a very high temperature, leaving a light ash that's easily removed with a damp cloth. The enamel coated side racks don't need to be removed when using this function.

Design Freedom

Designed to fit seamlessly into your kitchen, this built-in oven features premium materials and detailing to support a cohesive, considered kitchen design.

Safe And Sound

The CoolTouch door features triple glazing and a cooling system that ensures it's safe to touch from the outside – protecting both your hands and the surrounding cabinetry.

SPECIFICATIONS

Accessories (included)

Broil grid	1
Broil pan	1
Broil rack	1
Full extension sliding shelves	2
Pyrolytic proof shelf runners	•
Wired temperature sensor	1

Capacity

Total capacity	4.1 cu ft
----------------	-----------

Cleaning

Acid resistant graphite enamel	•
Pyrolytic proof shelf runners	•
Pyrolytic self-clean	•
Removable oven door	•
Removable shelf runners	•

Controls

Adjustable audio and display settings	•
Audio feedback	•
Automatic cooking/minute timer	•
Automatic pre-set temperatures	•
Celsius/Fahrenheit temperature	•
Delay start	•
Electronic clock	•

Electronic oven control	•
Food probe	•
Internal Light	•
Intuitive touchscreen display	•
Multi-language display	UK English, US English, Simplified Chinese, Français, Español
Sabbath mode with Star K certification	•
Smart appliance	•
Soft close doors	•
True convection oven	•
Turned stainless steel dials with illuminated halos	•

Functions

Aero Broil	•
Aero™ Bake	•
Air fry	•
Bake	•
Broil	•
Classic bake	•
Dehydrate	•
Maxi Broil	•
Number of functions	17
Pastry Bake	•
Pizza bake	•
Pyrolytic self-clean	•
Rapid proof	•
Roast	•
Slow cook	•

True Aero	•
Vent bake	•
Warm	•

Performance

ActiveVent™ system	•
AeroTech™ technology	•
Automatic rapid pre-heat	•
Broil power	4400 W
Temperature range	95 °F - 540 °F

Power Requirements

Amperage	16.6 - 19.4 A
Supply frequency	60 Hz
Supply voltage	208 - 240 V

Product Dimensions

Depth	23 15/16 "
Height	27 3/16 "
Width	29 15/16 "

Safety

ADA compliant	•
Balanced oven door	•
Catalytic venting system	•
Control panel key lock	•
CoolTouch door	•

- Non-tip shelves
- Safety thermostat

SKU 82578

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- ↓ 2D - DWG Oven
- ↓ 2D - DXF Oven
- ↓ ArchiCAD Oven
- ↓ Installation Guide EN & FR
- ↓ Planning Guide EN - Contemporary 30" Built-in Ovens and Companions
- ↓ Planning Guide FR - Contemporary 30" Built-in Ovens and Companions
- ↓ Planning Guide SP - Contemporary 30" Built-in Ovens and Companions
- ↓ Revit Oven
- ↓ Rhino Oven
- ↓ SketchUp Oven
- ↓ User Guide Oven EN
- ↓ Guide d'utilisation FR
- ↓ Guía del usuario ES

Where applicable:



All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.






A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com

5 PRODUCT DIMENSIONS - SINGLE OVENS

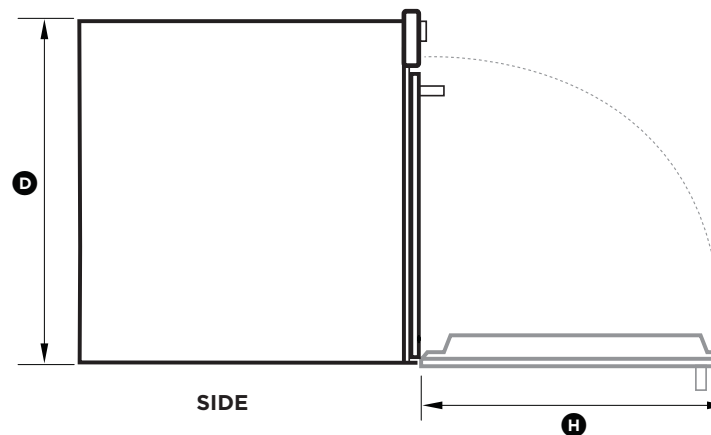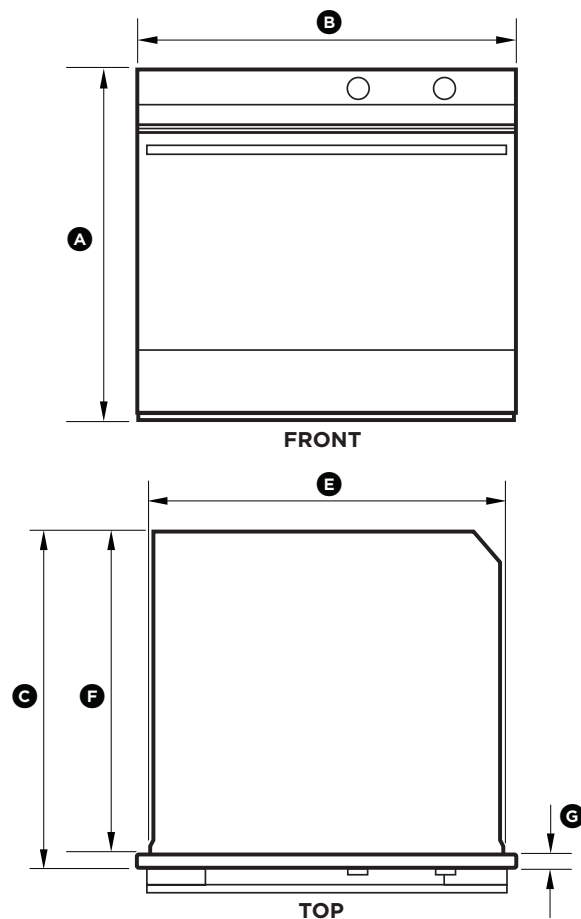

PRODUCT DIMENSIONS	OB30S MODELS
	INCHES (MM)
(A) Overall height of product	27 1/8" (689)
(B) Overall width of product	29 15/16" (760)
(C) Overall depth of product (excluding handle and dials)	23 15/16" (608)
(D) Height of chassis	26 9/16" (675)
(E) Width of chassis	28 5/16" (720)
(F) Depth of chassis	22 3/8" (569)
(G) Depth of oven frame and control panel (=distance between front of chassis and front of oven door, excl. knobs)	1 1/2" (39)
(H) Depth of oven door when fully open (measured from front of control panel)	20 7/8" (530)

5 CABINETRY DIMENSIONS - SINGLE OVENS

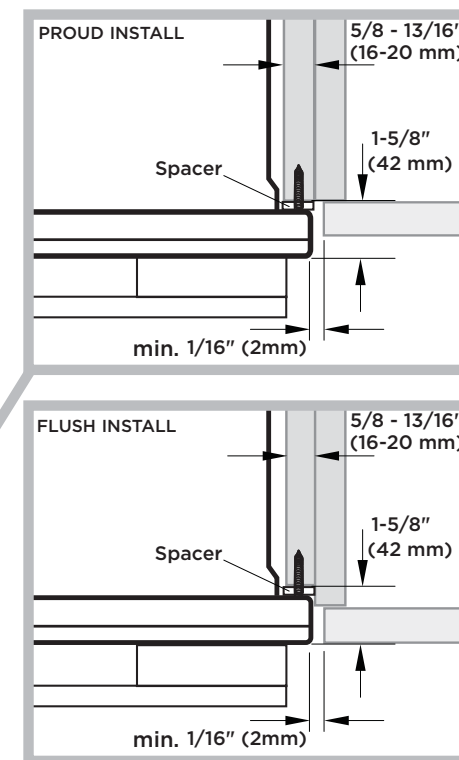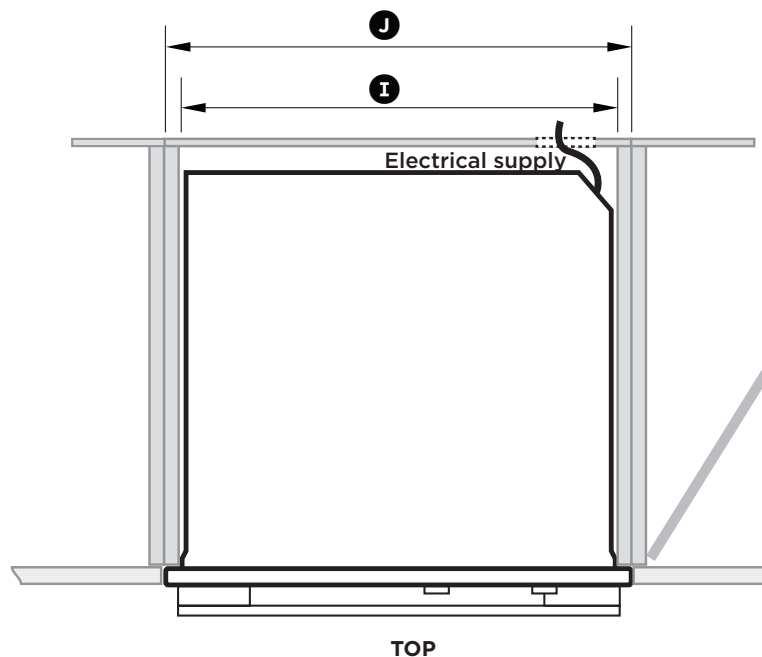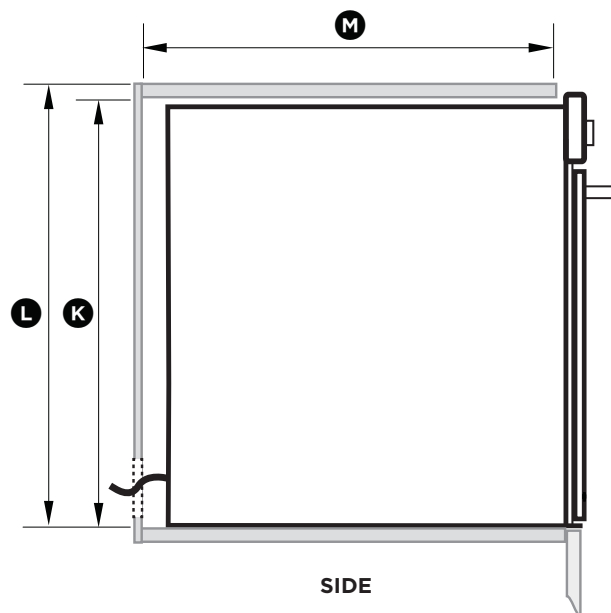

CABINETRY DIMENSIONS	OB30S MODELS
	INCHES (MM)
Ⓘ Minimum inside width of cavity	28 1/2" (724)
⓵ Overall width of cabinetry	30 1/8" (764)
Ⓚ Minimum inside height of cavity	26 13/16" (681)
Ⓛ Overall height of cabinetry	27 3/8" (693)
Ⓜ Minimum inside depth of cavity	
	22 5/8" (575)
Flush install	24 3/16" (614)

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

IMPORTANT!

FLUSH INSTALLATION


The depth of the control panel (G) with the fitted spacer is larger than conventional ovens. Ensure you have created a $1-5/8"$ (42mm) recess in cabinetry.

If flush installing, you need to replace the lower trim with the supplied long trim at the base of the oven. Refer to Step 11 for instructions.

IMPORTANT!

Make sure the cavity is completely sealed with no gaps. This is to ensure the oven cooling system functions correctly.

8 ELECTRICAL CONNECTION TO JUNCTION BOX

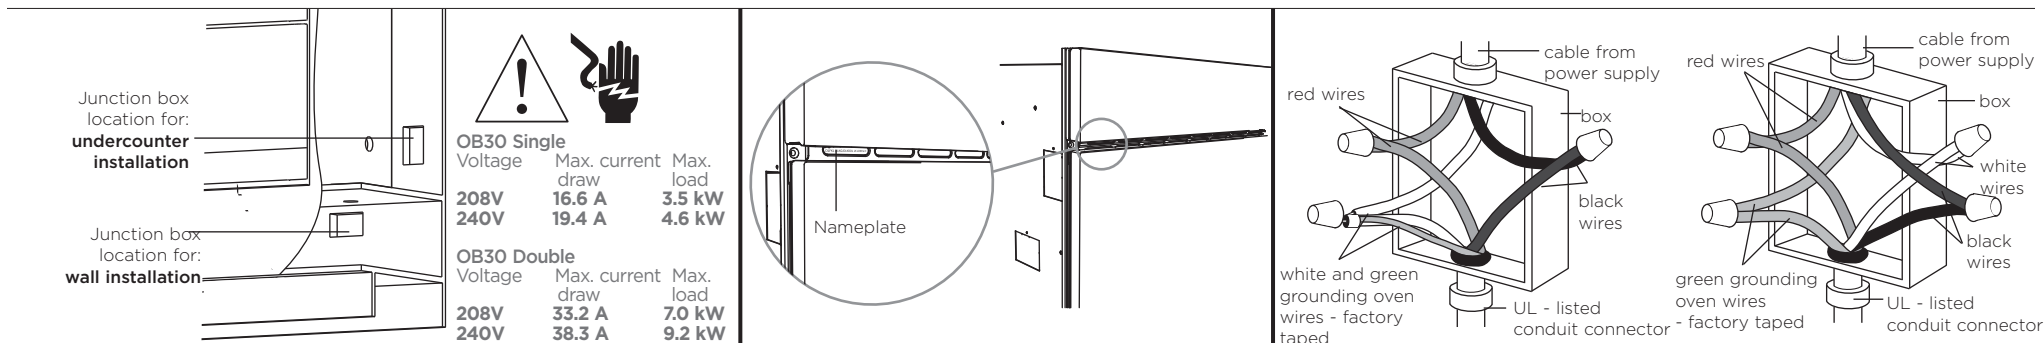

- ① Disconnect the power supply.
- ② Remove the junction box cover.
- ③ Connect the oven cable to the junction box through the U.L.-listed conduit connector.
- ④ Connect the two black wires together with twist-on connectors.
- ⑤ Connect the two red wires together with twist-on connectors.
- ⑥ Connect electrical connection according to local codes and ordinances.

If local codes permit connecting the cabinet-grounding conductor to the neutral white wire in the junction box:

- ⑦(A) Connect the factory-taped green and white oven cable wires to the neutral (white) wire in the junction box.
- ⑧(A) Replace the junction box cover.

OR If local codes DO NOT PERMIT connecting the cabinet-grounding conductor to the neutral (white) wire in junction box:

- ⑦(B) Separate the factory-taped green and white oven cable wires.
- ⑧(B) Connect the white oven cable wire to the neutral (white) wire in junction box.
- ⑨(B) Connect the green grounding oven cable wire to a grounded wire in the junction box.
- ⑩(B) Replace the junction box cover.

OR If connecting to a four-wire electrical system:

- ⑦(C) Separate the green and white oven cable wires.
- ⑧(C) Connect the white oven cable wire to the neutral (white) wire in junction box.
- ⑨(C) Connect the green grounding oven cable wire to the (green) grounding wire in the junction box.
- Do not connect the green grounding wire to the neutral (white) wire in junction box.
- ⑩(C) Replace the junction box cover.

9 SECURE THE OVEN TO THE CABINETRY

- ① Position the oven in the prepared cavity.

IMPORTANT!

Do not lift the oven by the door handle.


- ② Use the supplied screws and spacers to secure the oven to the cabinetry.

Double oven models only:

There are 4 screws and spacers provided (two per side).

IMPORTANT!

- Do not over-tighten the screws.
- Take care not to damage the lower trim of the oven.
- Do not seal the oven into the cabinetry with silicone or glue. This makes future servicing difficult. Fisher & Paykel will not cover the costs of removing the oven, or of damage caused by this removal.

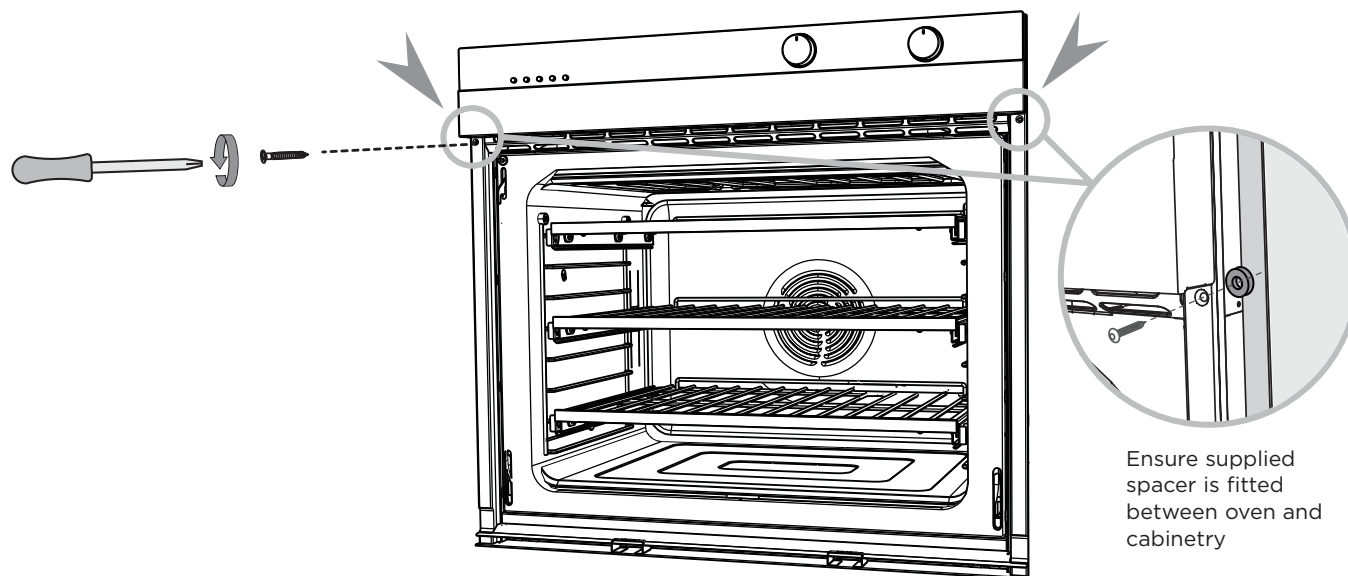

30" Series 7 Contemporary Compact Convection-Speed Oven

Series 7 | Contemporary

Stainless Steel




The speed of microwave cooking with the versatility of convection oven technology, designed for perfect pairing with other companion products such as a steam oven or warming drawer.

- Generous 1.7 cu ft capacity, with four shelf positions
- With four microwave-only functions, 14 traditional oven functions, and four combination functions
- Guided cooking makes it simple to navigate cooking processes

- Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications

DIMENSIONS

Height	18 "
Width	29 15/16 "
Depth	22 1/4 "



FEATURES & BENEFITS

Cooking flexibility

Choose from 19 cooking modes including True Convection and Broil. With both microwave and convection oven technology in the same oven, you have more flexibility for your culinary creations.

Cook with confidence

The screen provides an intuitive guided cooking experience that helps to deliver perfect results, whether you've been cooking all your life or are just starting out.

Sized to suit

As a companion product this microwave oven is designed to be placed almost anywhere – fitting perfectly with a steam oven or other companion products to create a suite of kitchen appliances at your fingertips, and for your convenience.

Easy to use

The intuitive display shows you all the information you need, allowing you to easily program in your desired cooking mode and duration.

Multi-function flexibility

Each function has been tailored and tested to ensure perfect defrosting, heating and cooking. Use the included Wired Temperature Sensor to precisely monitor cooking in real time.

Safe and sound

The CoolTouch door is safe to touch from the outside, protecting your hands and the surrounding cabinetry.

SPECIFICATIONS

Accessories (included)

Chromed shelf runners	•
Glass tray	1
Grill rack	1 set
Step down wire shelf	1
Wire shelf	1
Wired temperature sensor	1

Capacity

Shelf positions	4	Soft close doors	•	Automatic sensor cooking	•
Total capacity	1.73 L	True convection oven	•		
Usable capacity	1.34 cu ft	Turned stainless steel dials with illuminated halos	•		
Cleaning		Functions		Power Requirements	
Acid resistant graphite enamel	•	Aero Broil	•	Amperage	20 A
Drying cycle	•	Aero Broil + Microwave	•	Supply frequency	60 Hz
Easy to clean interior	•	Aero™ Bake	•	Supply voltage	208 / 240 V
Removable shelf runners	•	Air fry	•		
Controls		Bake	•	Product Dimensions	
Adjustable audio and display settings	•	Defrost	•	Depth	22 1/4 "
Audio feedback	•	Maxi Broil	•	Height	18 "
Automatic cooking/minute timer	•	Maxi Broil + Microwave	•	Width	29 15/16 "
Automatic pre-set temperatures	•	Microwave cooking	•		
Celsius/Fahrenheit temperature	•	Pastry Bake	•	SKU	82707
Delay start	•	Pizza bake	•		
Dial with illuminated halo	•	Popcorn	•	<p>The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020</p>	
Electronic capacitive touch controls	•	Quick start	•		
Electronic clock	•	Roast	•		
Electronic oven control	•	Roast + Microwave	•		
Guided cooking by food type and recipes	•	Slow cook	•	<p>Other product downloads available at fisherpaykel.com</p>	
Internal Light	•	True Aero	•		
LED display	•	True Aero + Microwave	•	↓	2D-DWG Combination Microwave Oven
Microwave timer	•	Vent bake	•	↓	2D-DXF Combination Microwave Oven
Multi-language display	true	Performance		↓	Installation Guide EN
Push-to-open drawer	•	ActiveVent™ system	•	↓	Installation Guide FR
Sabbath mode with Star K certification	•	AeroTech™ technology	•	↓	Installation Guide SP
Smart appliance	•	Automatic rapid pre-heat	•		

- [↓](#) Planning Guide EN - Contemporary 30" Built-in Ovens and Companions
- [↓](#) Planning Guide FR - Contemporary 30" Built-in Ovens and Companions
- [↓](#) Planning Guide SP - Contemporary 30" Built-in Ovens and Companions
- [↓](#) Revit
- [↓](#) Rhino
- [↓](#) SketchUp
- [↓](#) User Guide EN
- [↓](#) User Guide FR
- [↓](#) User Guide SP


Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.




A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com

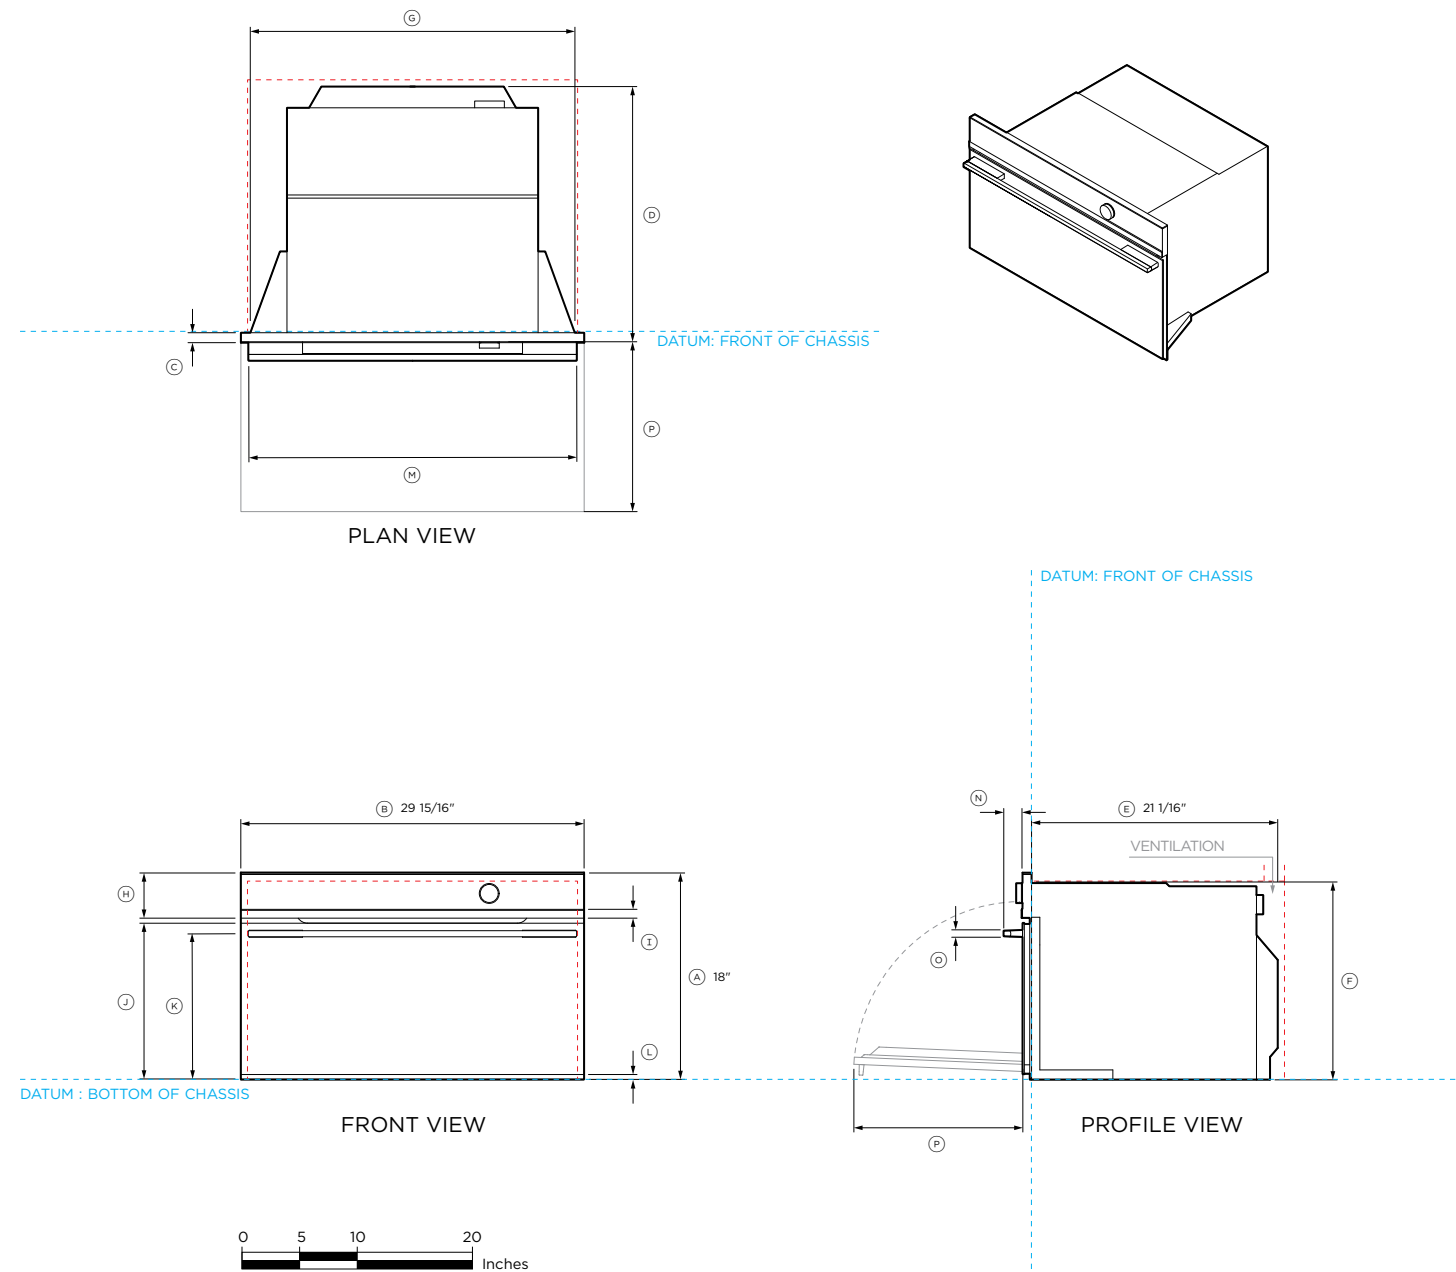


Model no:		
Convection Speed Oven, 30" - OM30NDTDX1, OM30NDLX1		
Product Dimensions	in	mm
A Overall height of product	18	458
B Overall width of product	29 15/16	760
C Depth of control panel (excludes handle, front black aluminum trim and dial)	13/16	20
D Depth of chassis and control panel (excludes handle, front black aluminum trim and dial)	22 1/4	565
E Depth of chassis	21 1/16	545
F Height of chassis	17 1/8	435
G Width of chassis	28 3/8	720
H Height of control panel	3 15/16	100
I Height of black aluminum trim on control panel	13/16	20
J Height from bottom datum to top of oven door	13 11/16	347
K Height from bottom datum to centerline of handle	12 3/4	324
L Height from bottom datum to bottom of door	1/2	12
M Width of handle	28 5/8	727
N Depth of handle	1 5/8	42
O Thickness of handle	5/8	16
P Depth of door when open (measured from front of door)	12 5/8	320
Minimum Clearances - Flush Installation	in	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 7/16	570
Rear ventilation depth**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above oven control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between bottom of oven chassis to lower cabinetry front panel or appliance	1/16	2
*Measured from front of control panel		
**Rear ventilation totalling 43.4in2 (280cm2) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.		
IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.		
INDICATES PRODUCT DATUM		
INDICATES CABINETRY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com		

VENTILATION


Ventilation of 2" x 22 1/16" (50mm x 560mm) or totalling 43.4in2 (280cm²) is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, top, sides, or back.





CLEARANCE ABOVE
PROFILE VIEW



CLEARANCE BOTTOM
PROFILE VIEW



ADJACENT CABINET
PLAN VIEW

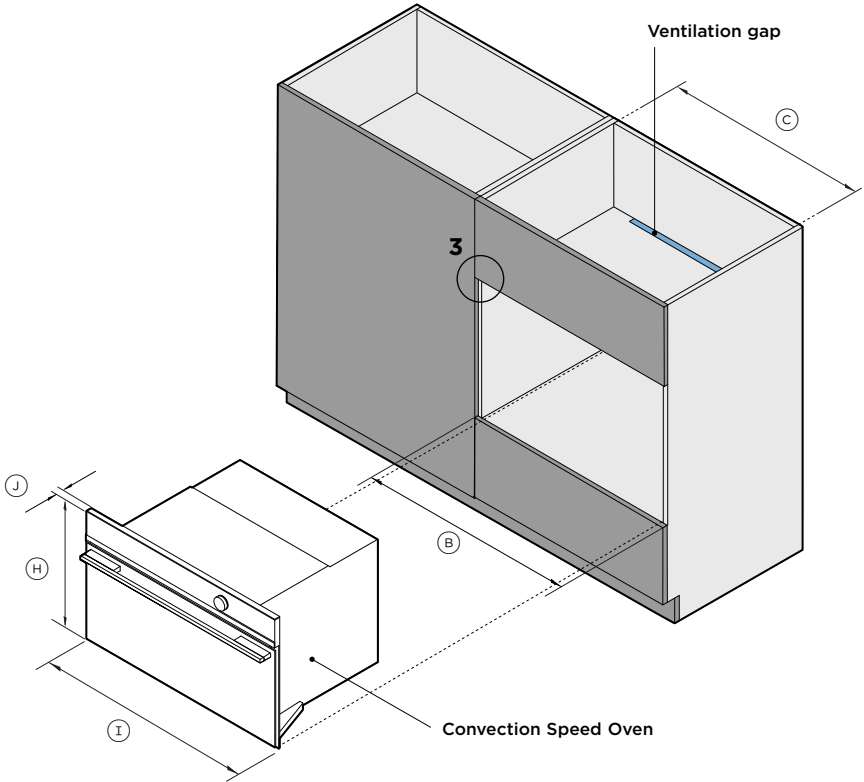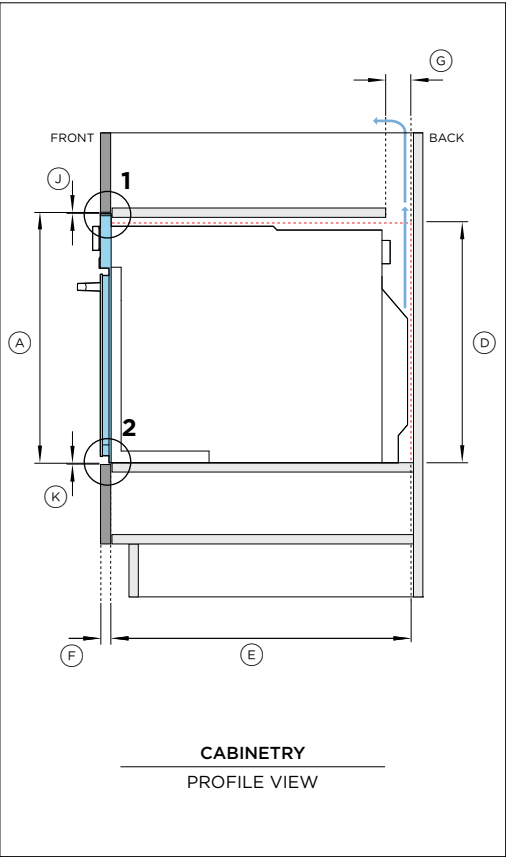

Model no:
Convection Speed Oven, 30" - OM30NDTDX1, OM30NDLX1

Cabinetry Dimensions - Flush Installation	inch	mm
A Overall cabinet height*	18 1/8	460
B Overall cabinet width - single installation	30 1/16	764
C Minimum inside width of cavity	28 1/2	724
D Minimum inside height of cavity	17 5/16	440
E Minimum inside depth of cavity	21 5/8	550
F Thickness of cabinetry front panel**	5/8-13/16	16-20
G Ventilation gap***	2	50

*Overall cabinet height is overall product height with minimum clearance above oven control panel to upper cabinetry front panel
**Cabinetry shown in drawings 3/4" (19mm) panels.
***A rear ventilation air vent totalling 43.4in² (280cm²) is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

Note: Consider placement of shelf above minimum inside height of cavity.

Product Dimensions	inch	mm
H Overall height of product	18	458
I Overall width of product	29 15/16	760
J Thickness of oven front panel	13/16	20

Cabinetry Clearances	inch	mm
K Minimum clearance above oven control panel to upper cabinetry front panel	1/16	2
L Minimum clearance between bottom of oven chassis to lower cabinetry front panel	1/16	2
M Minimum clearance between adjacent front panel or appliance	1/16	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Series 7, Integrated Tall Dishwasher

Series 7 | Integrated

Panel Ready




Designed to be integrated seamlessly into your cabinetry, this dishwasher delivers extra wash options and Auto Door Open Dry.

- Customize with your own front panel and handle to match your kitchen cabinetry
- Seven wash programs from Heavy to Light, including Auto and 60min
- Dry+, Sanitize and Half Load modifiers provide extra wash options

- Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications

DIMENSIONS

Height	33 3/4 - 36 1/8 "
Width	23 1/2 "
Depth	21 13/16 "

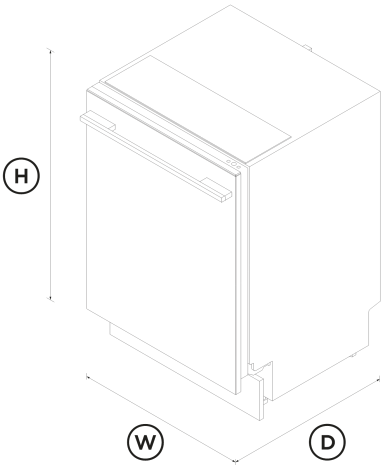

FEATURES & BENEFITS

Seamless Integration

Customize your dishwasher with a panel and handle matching your cabinetry, for a seamless finish in your kitchen.

Effortless Drying

For beautifully dry dishes every time, this dishwasher features the Auto Door Open Dry function. This function automatically releases excess steam at the end of the cycle, ensuring dishes are immediately ready for use or storage. An innovative air curtain channels the steam away from the adjacent benchtop, protecting your cabinetry.

A Reliable Clean

This dishwasher offers seven wash programs including Auto, which automatically senses the optimal wash settings for your dishes. The three-stage filtration system delivers a superior clean, while the rinse aid indicator reminds you to top up for beautifully clean dishes.

Customize Your Wash

The Half Load modifier is perfect for washing a partial load, for faster turnaround of dishes. Sanitize provides extra protection, killing 99.9% of bacteria* in the final rinse, while the Dry+ modifier is great for plastic dishes.

*Certified to NSF/ANSI Standard 184

Efficient Performance

With an Energy Star Most Efficient rating, this dishwasher is recognised as among the most energy efficient models on the market. Use the Eco wash program for optimal water and energy consumption, or choose when the cycle begins with Delay Start.

Flexible Loading

Designed to fit 15 place settings with ease, adjustable racks help you to load and care for various items – including a height-adjustable upper basket, and foldable cup holders and tines.

SPECIFICATIONS

Accessories (included)

Kickstrip	true
-----------	------

Accessories (sold separately)	
Door panel stainless steel	ADDW24TPX
Handle kit Classic	AHCL-DDDW-24X
Handle kit Contemporary round, aluminium	AHS-OBDD-60S
Handle kit Contemporary square fine, aluminium	AHD5-OBDD-60SX
Handle kit Contemporary square fine, black	AHD5-OBDD-60SB
Handle kit Contemporary square, aluminium	AHD3-OBDD-60S
Handle kit Professional round flush	AHP3-DWDD-SX
Handle kit Professional round flush, Brass off-stands	AHP3DDDDW24BA
Handle kit Professional round flush, Dark Copper off-stands	AHP3DDDDW24DC
Capacity and loading	
Accommodates round plates up to (lower basket)	12 9/16"
Accommodates round plates up to (top basket)	9 13/16"
Adjustable height, foldable cupracks	•
Easy lift adjustable upper basket	•
Fold down tines	•
Fold down wine racks	•
Place settings	15
Place settings	15
Consumption	
Energy rating	Energy star Most efficient
Energy usage	224kWh/year
In-use energy carbon emissions estimate	79.0kgCO2e/year

Water usage (per wash cycle)	3.2 gal
Controls	
Energy saving delay start option of up to 12 hours	•
Internal wash selector	•
Keylock	•
Rinse aid indicator light	•
Smart appliance	•
Features	
Air curtain for bench protection	•
Auto Door Open Dry	•
Flood protection	•
Half load option	•
Internal tub material	Stainless Steel
Motor type	Asynchronous
ThermoDry system	•
Three-stage filtration system	•
Performance	
Noise emissions	46 dBA
Power Requirements	
Amperage	10A
Supply frequency	60Hz
Supply voltage	100 - 120V

Product Dimensions	
Depth	21 13/16 "
Height	33 3/4 - 36 1/8 "
Width	23 1/2 "
Wash Program Modifiers	
Dry +	•
Half load	•
Sanitise	•
Wash modifiers	3
Wash Programs	
60 min	•
Auto	•
Eco	•
Heavy	•
Light	•
Medium	•
Rinse	•
Wash programs	7
Water connection	
Water pressure	30kPa - 1000 kPa
SKU	82443

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com

Other product downloads available at fisherpaykel.com


- [↓](#) 2D-DWG Integrated Dishwasher
- [↓](#) 2D-DXF Integrated Dishwasher
- [↓](#) Data Sheet Integrated Dishwasher
- [↓](#) Energy Label Dishwasher
- [↓](#) Installation Guide EN
- [↓](#) Guide d'installation FR
- [↓](#) Planning Guide Professional Style Dial/Handle Accessories
- [↓](#) User Guide EN & FR

Where applicable:


All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.


PRODUCT DIMENSIONS

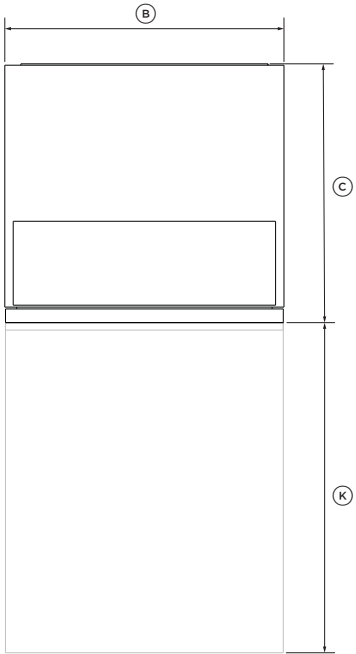


PLAN

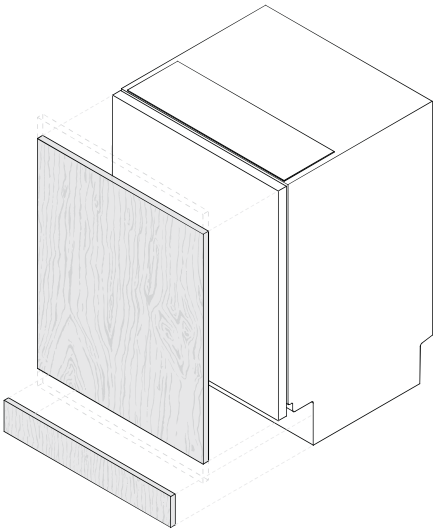

ISO

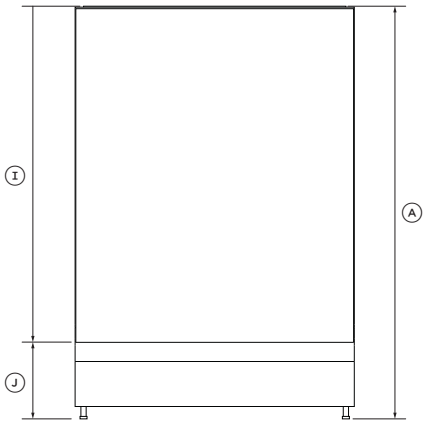

FRONT

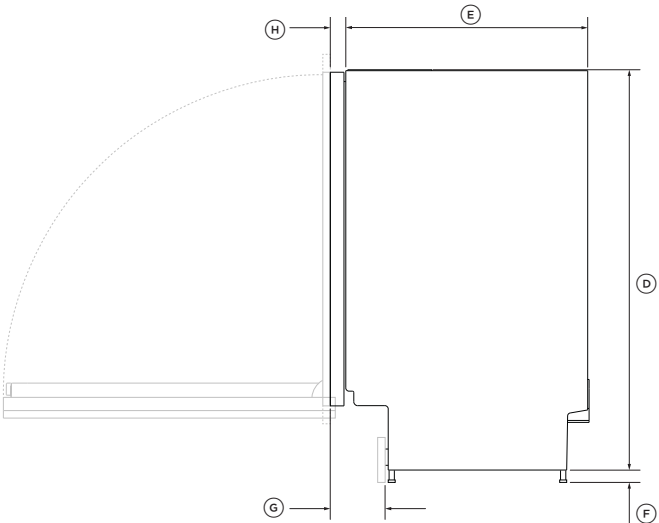

PROFILE

PRODUCT DIMENSIONS	INCH	MM
Ⓐ Overall height*	33 3/4 -36 1/8	857-917
Ⓑ Overall width**	23 7/16	597
Ⓒ Overall depth**	21 13/16	554
Ⓓ Height of chassis	33 3/4	857
Ⓔ Depth of chassis	20 1/2	521
Ⓕ Height of feet*	0-2 3/8	0-60
Ⓖ Depth of toe kick recess	4 9/16	116
Ⓗ Depth of inner door**	1 5/16	33
Ⓘ Height from top of chassis to bottom of inner door	28 5/16	719
⓵ Height from to bottom of inner door to floor*	5 7/16 -7 13/16	138-198
Ⓚ Minimum depth of door opening**	26 5/8	676

*depending on adjustment of levelling feet

**excluding custom panel and handle

Actual product dimensions may vary by 1/16" (2mm)


CUSTOM PANEL DIMENSIONS

Material specifications


- Maximum weight of door panels must not exceed 22lb (including handle)
- The panel should be adequately sealed to withstand moisture (122°F (50°C) 80% RH). The back and sides of the panel should be completely sealed with a waterproof vapour barrier, such as polyurethane, to prevent damage.
- Installation outside these specifications may result in condensation on cabinetry surfaces.

Toe kick considerations

- Depending on the desired toe kick recess depth and door panel extension, the toe kick panel height may need to be adjusted to allow adequate door swing.

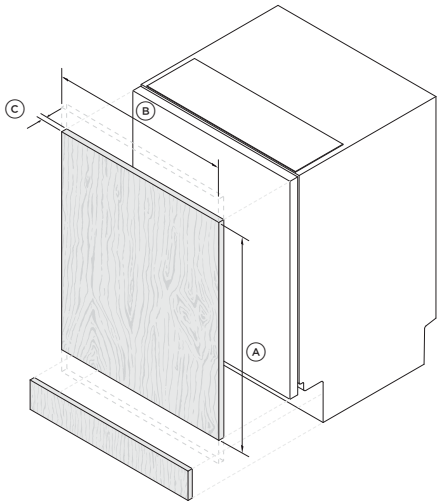


ISO

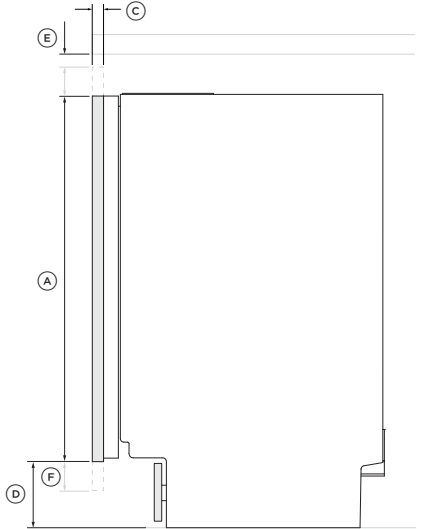

PROFILE

CUSTOM PANEL CONSIDERATIONS	INCH	MM
(A) Minimum height of custom door panel for full coverage of the inner door	28 1/8	714
(B) Minimum door panel width	23 7/16	596
(C) Door panel depth	5/8-1	16-25
(D) Distance from base of door panel to floor	2 3/4-7 7/8	70-200
(E) Minimum clearance between top of door panel and benchtop	1/16	2
(F) Maximum overhang of Custom Panel to bottom of inner door	2 3/4	70
Weight of door panel (including handle)	9-20lb	4-9kg

DIMENSIONS

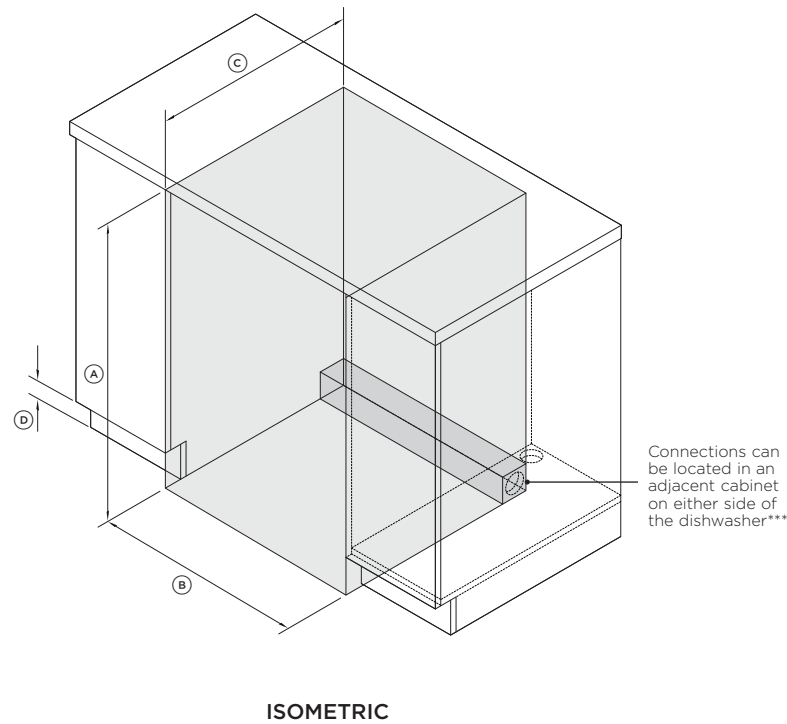

CABINETRY DIMENSIONS


INCH

MM

Ⓐ	Minimum inside height*	33 3/4	857
Ⓑ	Minimum inside width	23 5/8	600
Ⓒ	Minimum overall depth**	22 13/16	580
Ⓓ	Height of toe kick area	2 3/4 - 7 7/8	70 - 200

*depending on adjustment of levelling feet
**including 3/4" (19mm) door panels on adjacent cabinetry
***For more information on service requirements, refer to 'Plumbing & electrical considerations' and 'Cabinetry preparation'.

CLEARANCES

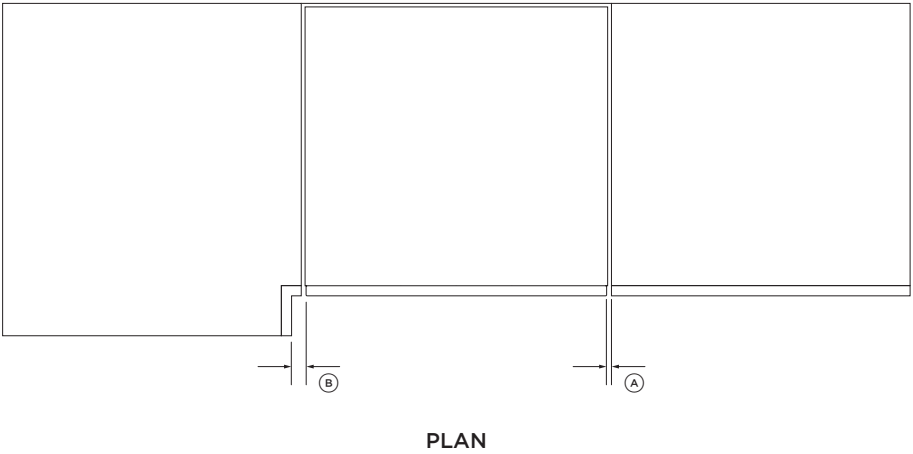

CABINETRY CLEARANCES

INCH

MM

Ⓐ	Minimum clearance to adjacent cupboard door	1/16	2
Ⓑ	Minimum clearance to corner cupboard	1/2	13

PLUMBING & ELECTRICAL CONSIDERATIONS

Hose and cord lengths

- Your services can be installed to **either** the left-hand or right-hand side of the product in an adjacent cabinet. Refer to 'Cabinetry preparation' for service access requirements.
- The drain hose should not extend more than 13ft (4m). A longer drain hose will cause reduced performance.

Water connection

- The dishwasher should not be connected to a water system where there is no temperature control, unless the system is fitted with a suitable tempering valve.
- The dishwasher must not be connected to an undersink high-pressure push-through hot water system, as damage to the system will result.
- Maximum water temperature: 140°F (60°C).
- 3/4" BSP connection to product inlet valve.
- Ensure water connection complies with local plumbing regulations.

Water pressure


- 0.03-1MPa

Electrical requirements

- 120V, 60Hz, Maximum current 8.9A

Anti-flood protection

- This dishwasher has anti-flood protection, which will stop the water flowing in the event of a leak within the machine.

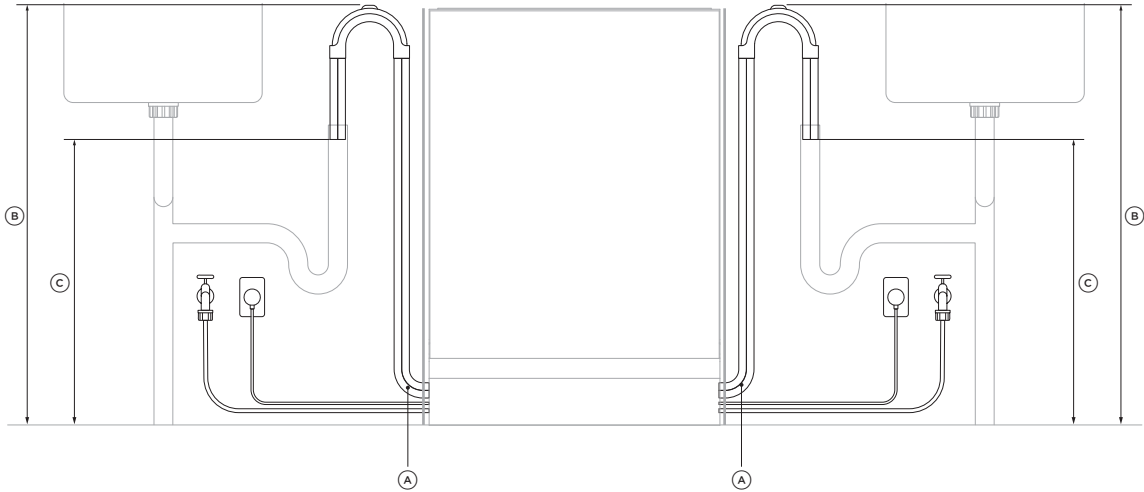


SERVICE DIMENSION	LEFT SIDE		RIGHT SIDE	
	INCH	MM	INCH	MM
Ⓐ Length of drain hose	64 15/16	1650	51 3/16	1300
Ⓑ Distance from floor to top of hose support	29 1/2 - 34 3/4	750-883	29 1/2 - 34 3/4	750-883
Ⓒ Minimum distance from floor to end of drain hoses*	19 11/16	500	19 11/16	500

*standpipe install illustrated. Distance is the same for all plumbing installs.

SERVICE ACCESS

- We recommend locating the service holes on **either** side of the dishwasher as shown.
- If the holes are created through wood, ensure the edges are smooth and rounded.
- If the holes are created through metal, ensure an edge protector is fitted.

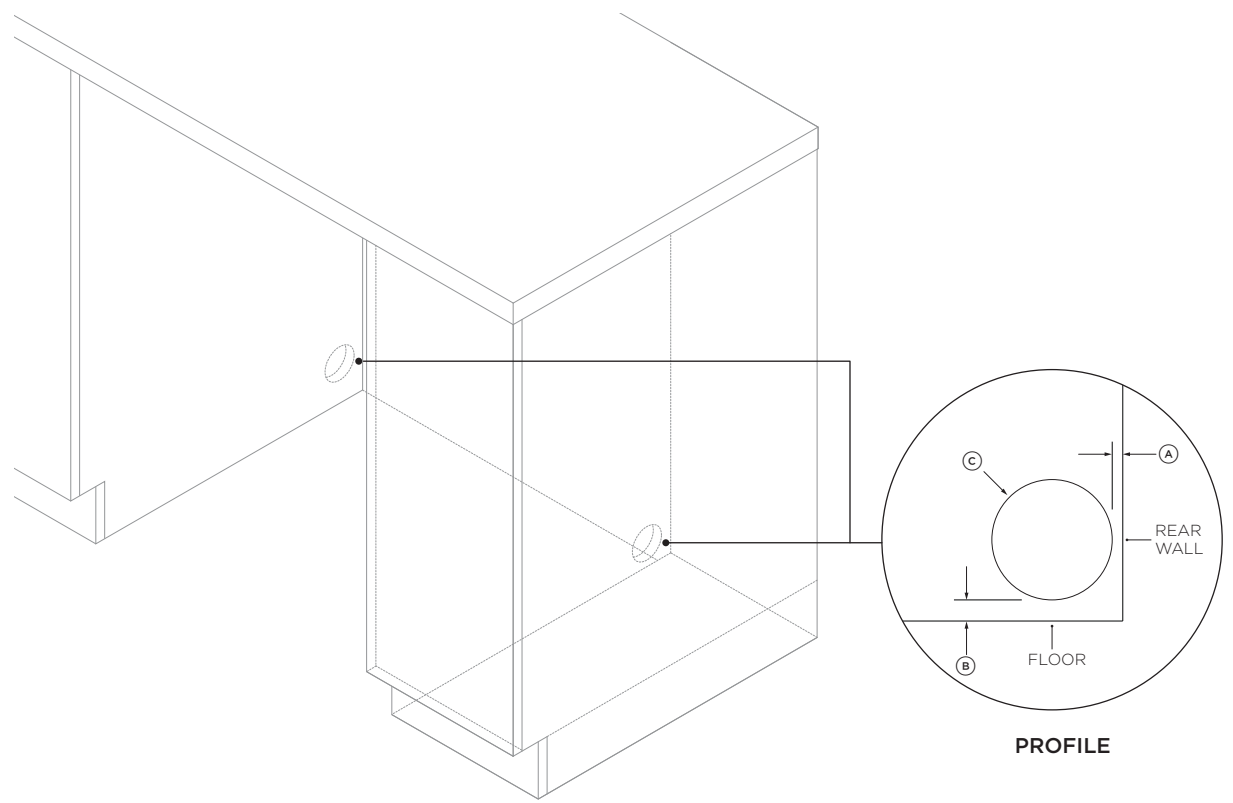

SERVICE HOLE DIMENSIONS	INCH	MM
Ⓐ Maximum distance between rear of cavity and service hole*	9/16	15
Ⓑ Maximum distance between floor and service hole**	0-2	0-50
Ⓒ Minimum diameter of service hole	1 1/2	38

*based on a cabinetry depth of 22 13/16" (580mm)

**depending on adjustment of levelling feet

LG LAUNDRY

WM3850HVA

5.2 cu. ft. Capacity Front Load Washer

AI DD™

Steam Technology

ENERGY STAR® Qualified

SmartDiagnosis™

Touch Control Panel

ThinQ™ Technology (Wi-Fi Enabled)

Enjoy new ways to control your home with LG smart appliances

LG ThinQ™

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app




CAPACITY	
Capacity (cu.ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
ENERGY STAR® Qualified	•
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 12	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™, Downloaded
No. of Options - 13	Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	5 Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5 Extra High, High, Medium, Low, No Spin
Water Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	•
Steam Technology	•
Allergiene™ Cycle	•
Sanitary Cycle	•
ColdWash™ Option	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
Load Sense	•
Control Lock	•
Auto Suds Removal	•
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	•

Wi-Fi	•
Remote Start and Cycle Monitor	•
Energy Monitoring	•
Tub Clean Coach	•
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Cover	Tempered Glass Door
Door / Rim	Glass / Shiny Rose Gold
All Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4V 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CV 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4" 55" (With door open)
Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
Weight (Product/Carton)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
	1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor
UPC CODES	
WM3850HVA	772454073625
DLEX3850V	772454073304
WD100CV	772454052866
WDP4V	048231015165
KSTK1	772454059896


Accessories

Included Accessories

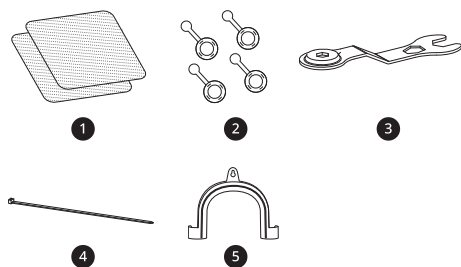


- 1 Non-skid Pads
- 2 Hole Caps
- 3 Wrench
- 4 Tie Strap
- 5 Elbow Bracket (for securing drain hose)

Required Accessories



- 1 Hot and Cold Water Hoses

Optional Accessories

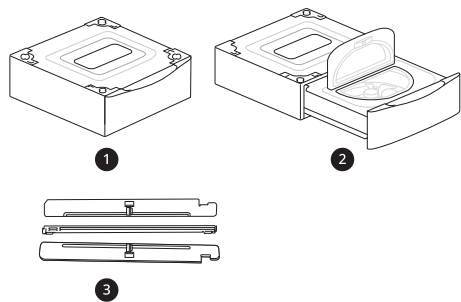

- 1 Pedestal
- 2 Pedestal Washer
- 3 Stacking Kit

Product Specifications

Model	WM3850H*A
Electrical Requirements	120 V~, 60 Hz
Min. / Max. Water Pressure	20 - 120 psi (138 - 827 kPa)
Dimensions (Width X Height X Depth)	27" X 39" X 30 1/4" (70 cm X 99 cm X 77 cm)
Maximum Depth with Door Open	55" (139.6 cm)
Net Weight	198.4 lb (90 kg)
Max. Spin Speed	1300 RPM

⚠ WARNING

- Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

Tools Needed



- ❶ Pliers
- ❷ Flat-Blade Screwdriver
- ❸ Level

Choosing the Proper Location

Check the following requirements for the install location before installing the washer.

- Allow for sufficient space between the walls and the washer for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the washer may result in increased vibration and noise during operation.

Power Outlet

- The power outlet must be within **60 inches (1.5 m)** of either side of the washer.
- Position the washer so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- Use a time-delay fuse or circuit breaker.


- It is the personal responsibility and obligation of the washer owner to have a proper outlet installed by a qualified electrician.

Flooring

- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the washer without flexing or bouncing.
- The washer must be installed on firm flooring to minimize vibration during the spin cycle. Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the washer must not slope more than 1 inch (2.5 cm) from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least **1 inch (2.5 cm)** at the sides and **4 inches (10 cm)** behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

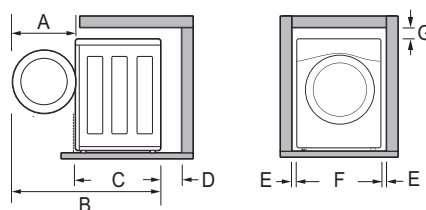


Dimensions and Clearances	
A	24 3/4" (62.6 cm)
B	55" (139.6 cm)
C	30 1/4" (77 cm)
D	4" (10 cm)
E	1" (2.5 cm)

Dimensions and Clearances	
F	27" (70 cm)
G	1/4" (0.5 cm)

Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.

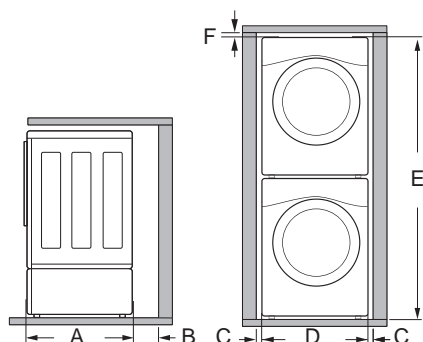

Dimensions and Clearances	
A	30 1/4" (77 cm)
B	4" (10 cm)
C	1" (0.5 cm)
D	27" (70 cm)
E	77 1/2" (196.8 cm)
F	1/4" (0.5 cm)

NOTE

- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

Unpacking and Removing Shipping Material

Remove all shipping materials from the washer for proper operation and inspect it for shipping damage.

CAUTION


- Failure to remove shipping materials can cause excessive noise and vibration.

Unpacking Shipping Material

* This feature is only available on some models.


Lift the washer off the foam base.

- After removing the carton and shipping material, lift the washer off the foam base.
- Make sure the plastic drum support **1*** comes off with the base and is not stuck to the bottom of the washer.
- If you must lay the washer down to remove the carton base **2**, always protect the side of the washer and lay it carefully on its side. Do not lay the washer on its front or back.

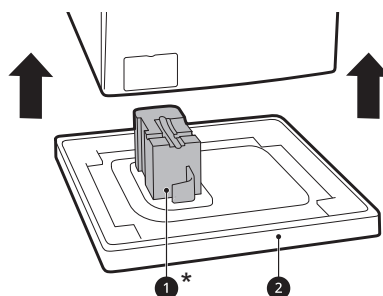

Removing Shipping Material

- 1 Remove the bolt assemblies.
 - Starting with the bottom two shipping bolts **3**, use the included wrench to fully loosen all 4 shipping bolts by turning them counterclockwise.
 - Remove the bolt assemblies (bolts and retainers) by wiggling them slightly while pulling them out.

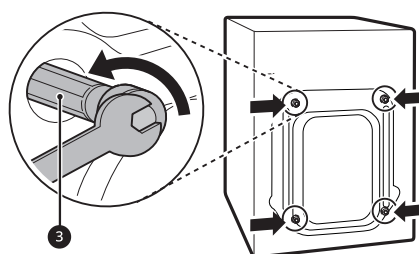

- 2 Install the hole caps.
 - Locate the hole caps **4** included in the accessory pack or attached to the back of


- Let the water drain into a bucket, and check the water temperature to make sure you've connected the hoses to the correct faucets.




- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the drum resulting in poor wash/rinse performance or clothing damage.

Using a Standpipe to Drain


- 1 Clip the end of the hose into the elbow bracket.
 - Connect the elbow bracket ① within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



- 2 Insert the end of the drain hose into the standpipe.




- 3 Use the provided tie strap ② to secure the drain hose in place.



- 4 If the water valves and drain are built into the wall, fasten the drain hose to one of the water hoses with the provided tie strap ③ (ribbed side on inside).

- 4 Attach the inlet hoses to the back of the washer.
 - Attach the hot water inlet hose to the hot water inlet on the back of the washer. Attach the cold water inlet hose to the cold water inlet on the back of the washer.
 - Tighten the fittings securely. Turn on both faucets all the way and check for leaks at both ends of the hoses.

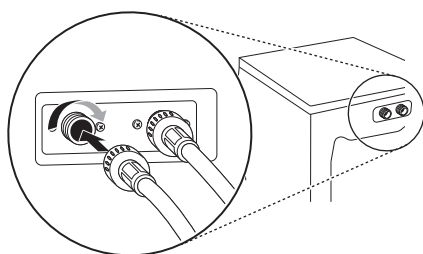

Connecting the Drain Hose


Connect the drain hose to either a standpipe or laundry tub.

⚠ WARNING

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.


NOTE

- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Do not install the drain hose with the end lower than **29.5 inches (75 cm)** or higher than **96 inches (244 cm)** above the bottom of the washer or more than **60 inches (152 cm)** away from the washer.

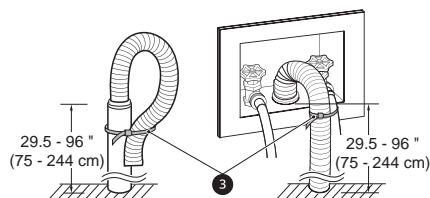


Using the Laundry Tub to Drain


- 1 Clip the end of the hose into the elbow bracket.
 - Connect the elbow bracket ① within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



- 2 Hang the end of the drain hose over the side of the laundry tub.



- 3 Use the provided tie strap to secure the drain hose in place.



Leveling the Washer

The drum of the washer spins at very high speeds. To minimize vibration, noise, and unwanted movement, the floor must be a solid, level surface.

CAUTION


- Using the washer without leveling it may cause excess vibration and noise, leading to a washer malfunction.
- Adjust the leveling feet only as far as necessary to level the washer. Extending the leveling feet more than necessary can cause the washer to vibrate.

NOTE

- Before installing the washer, make sure that the floor is clean, dry and free of dust, dirt, water and oil so the washer feet cannot slide easily. Feet that move or slide on the floor can contribute to excessive vibration and noise.

How to Level the Washer

- 1 Position the washer in its final location.
 - Take special care not to pinch, strain, or crush the water and drain hoses. If you have a carpenter's level ①, you can use it to check that the washer is level. The slope beneath the washer should not exceed **1 inch**, and all 4 leveling feet must rest firmly on the floor.

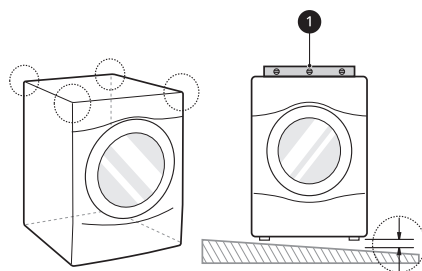

LG LAUNDRY

DLEX3850V

7.4 cu.ft. Capacity Electric Dryer

TurboSteam™ Technology

AI Sensor Dry™

Aluminized Alloy Steel Drum

Touch Control Panel

ENERGY STAR® Qualified

ThinQ Technology (Wi-Fi Enabled)

FlowSense™ Duct Clogging Indicator


LG ThinQ™

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app




CAPACITY	
Capacity (cu.ft.)	7.4
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
ENERGY STAR® Qualified	•
DRYING PROGRAMS	
No. of Programs - 12	Normal, Heavy Duty, Bedding, Anti Bacterial, SteamSanitary™, SteamFresh™, Perm Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded
No. of Options - 12	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal
Temperature Settings	5 High, Mid High, Medium, Low, Ultra Low
Drying Levels	5 Very, More, Normal, Less, Damp
Manual Dry Times	60 min, 50 min, 40 min, 30 min, 20 min, More Time/Less Time
FABRIC CARE FEATURES	
AI Sensor Dry™	•
TurboSteam™	•
Precise Temperature Control and Variable Heater	•
CONVENIENCE FEATURES	
3 Minute Installation Check	•
LoDecibel™ Quiet Operation	•
End of Cycle Signal	•
Drum Light	•
Reversible Door	•
FlowSense™ Duct Clogging Indicator	•
Wrinkle Care Option	•
Control Lock	•
Venting Option	Electric: 4 Way Venting
Leveling Legs	4 Adjustable Legs
Remaining Time Display/Status Indicator(s)	•

ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	•
Wi-Fi	•
Remote Start and Cycle Monitor	•
Energy Monitoring	•
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum	•
Cabinet	Painted Steel
Control Panel	Plastic
Door	Tempered Glass
All Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	Electric: 240V, 30 Amps
Type	Electric
BTU Rating	10,000 ft.
OPTIONS	
Pedestal	WDP4V
Pedestal (WxHxD)	27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/8" 51 3/8" (With door open)
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product/Carton)	126.2 lbs / 139.4 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 3 Years on Drum	
UPC CODES	
WM3850HVA	772454073625
DLEX3850V	772454073304
WD100CV	772454052866
WDP4V	048231015165
KSTK1	772454059896

INSTALLATION

Installation Overview

Please read the following installation instructions first after purchasing this product or transporting it to another location.

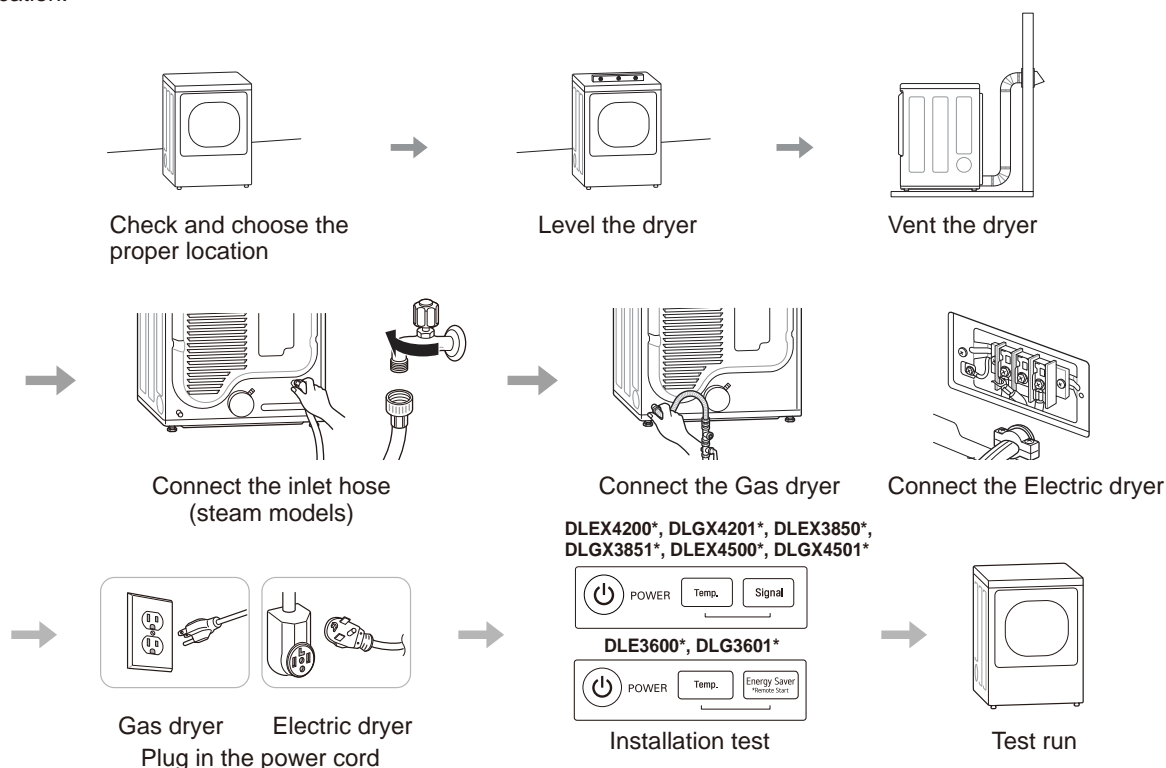

Product Specifications


The appearance and specifications listed in this manual may vary due to constant product improvements.

Dryer Models		DLE3600*, DLG3601*	DLEX3850*, DLGX3851*	DLEX4200*, DLGX4201*	DLEX4500*, DLGX4501*
Description		Non-steam Dryer	Steam Dryer	Steam Dryer	
Electrical requirements		Please refer to the rating label for detailed information.			
Gas requirements		NG: 4 - 10.5-inch (10.2 - 26.7 cm) WC LP: 8 - 13-inch (20.4 - 33.1 cm) WC			
Dimensions		27" (W) X 30 1/8" (D) X 39" (H), 51 3/8" (D with door open) 68.6 cm (W) X 76.5 cm (D) X 99 cm (H), 130.5 cm (D with door open)			27" (W) X 30" (D) X 39" (H), 51" (D with door open) 68.6 cm (W) X 76.1 cm (D) X 99 cm (H), 129.7 cm (D with door open)
Net weight		Gas : 136.03 lb (61.7kg) - 139.34 lb (63.2kg) Electric : 124.1 lb (56.3kg) - 127.4 lb (57.8kg)			Gas : 140.4 lb (63.7 kg) - 145.3 lb (65.9 kg) Electric : 133.4 lb (60.5 kg) -138.2 lb (62.7 kg)
Drying capacity	Steam Cycle	-	IEC 7.4 cu.ft. (8 lb/3.6 kg)		
	Normal Cycle	IEC 7.4 cu.ft. (22.5 lb/10.2 kg)			

NOTE

- Model numbers can be found on the cabinet inside the door.
- The images in this manual may be different from the actual components and accessories which are subject to change by the manufacturer without prior notice for product improvement purposes.

Clearances

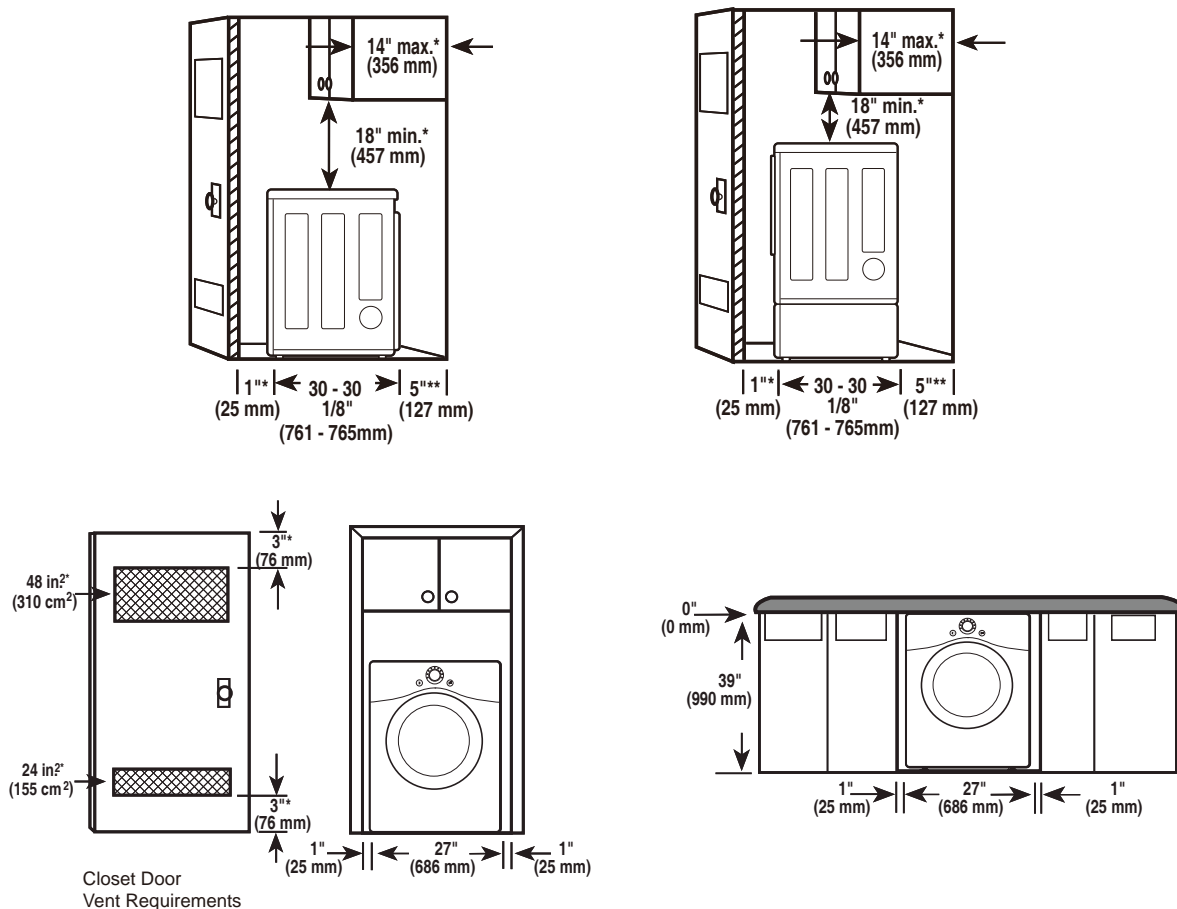

Installation Spacing for Recessed Area or Closet Installation

The following clearances are recommended for this dryer. This dryer has been tested for clearances of 1 inch (2.5 cm) on the sides and rear. Recommended clearances should be considered for the following reasons:

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer. For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.


Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

NOTE

- There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.
- The images in this manual may be different from the actual components and accessories which are subject to change by the manufacturer without prior notice for product improvement purposes.

Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

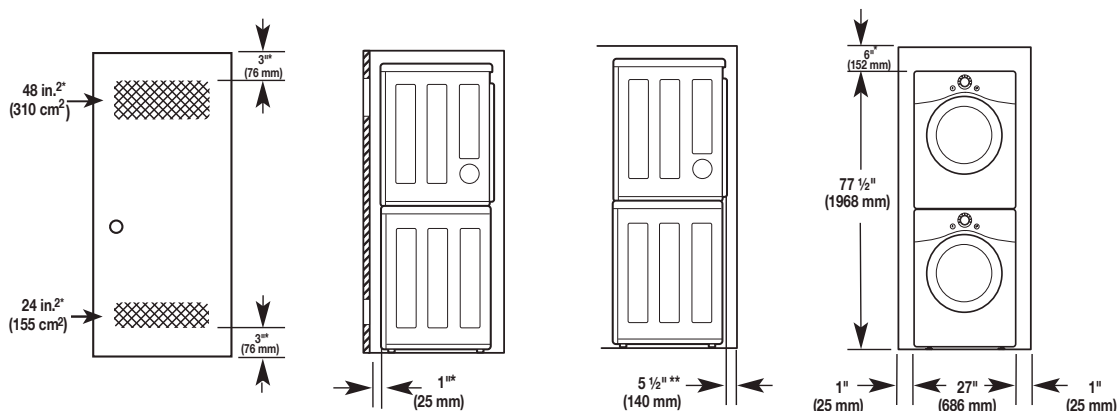


* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

Installation Spacing for Cabinet

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

* Required spacing

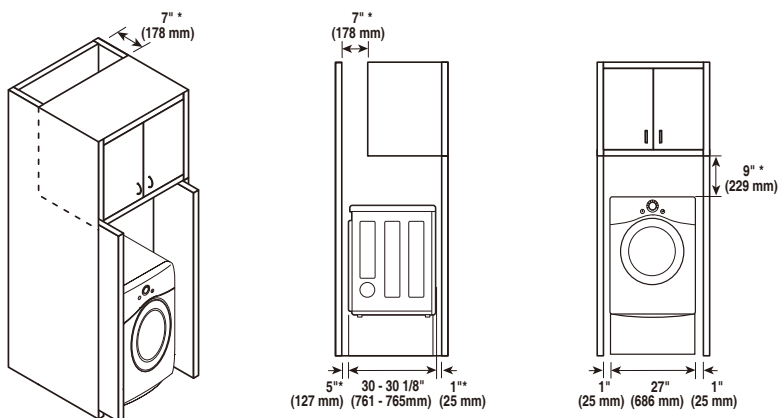

NOTE

- The images in this manual may be different from the actual components and accessories which are subject to change by the manufacturer without prior notice for product improvement purposes

Trento


Insert hood

Specification sheet



Learn
more

MEASUREMENTS

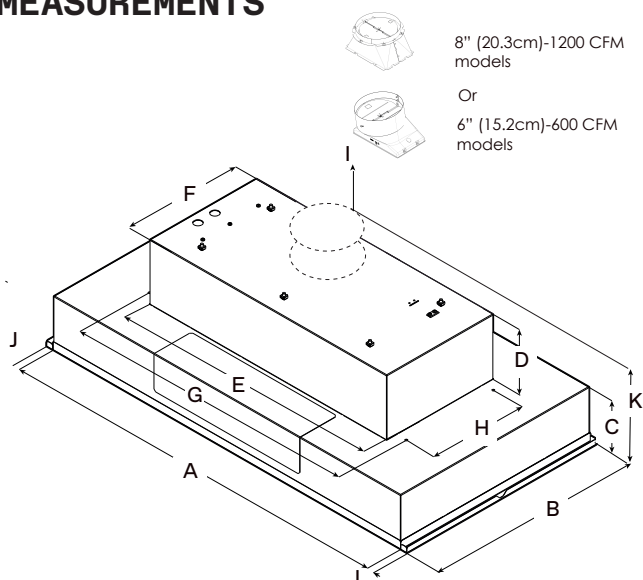

	ETR628SS	ETR634SS* ETR134S1**	ETR146SS
A	28 1/2" (71.9 cm)	34 1/2" (87.6 cm)	46 1/2" (118 cm)
B	18" (45.7 cm)		
C	5 7/16" (13.8 cm)		
D	6 1/2" (16.4 cm)		
E	22" (56 cm)	27 9/16" (70 cm)	
F	12 7/16" (31.6cm)		
G	24 5/16" (61.8 cm)	29 13/16" (75.7 cm)	
H	10 1/8" (25.7cm)		
I	6" (15.2 cm)	6" (15.2 cm)* 8" (20.3 cm)**	8" (20.3 cm)
J	3/4" (1.9 cm)		
K	16 15/16" (43 cm)	16 15/16" (43 cm)* 17 1/16" (43.4 cm)**	17 1/16" (43.4 cm)

DESCRIPTION

Trento provides professional grade performance, while being discreetly mounted inside the cabinetry. It is available with a 600 CFM or 1200 CFM blower for extraordinary ventilating power. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting.


A cleaner kitchen is ensured by Elica's patented angled baffle filters, which capture a higher percentage of contaminants and hold larger volumes of grease than traditional baffle filters.

*Damp-location approved



FEATURES

- Hush system
- Heat guard
- Professional performance
- Grease collectors
- Seamless look

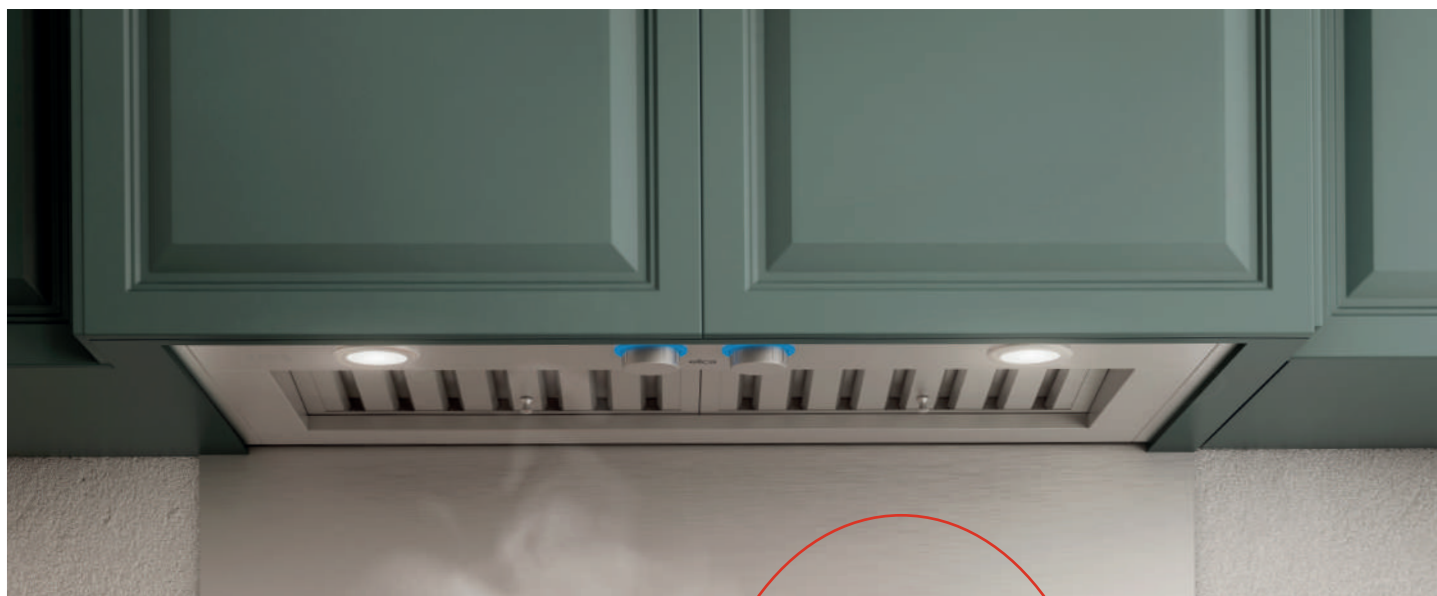

GENERAL PROPERTIES

Width	28"	34"	46"
Model	ETR628SS	ETR134S1**	ETR146SS
Dimensions	28 1/2"Wx18"Dx11 7/8"H	34 1/2"Wx18"Dx11 7/8"H	46 1/2"Wx18"Dx11 7/8"H
Blower Type ¹ (Internal)	600 CFM (4-speed)	1200 CFM (4-speed)**	1200 CFM (4-speed)
Noise (Min-max sones) ¹	1.7-7.0 Sones	1.7-8.5 Sones**	1.7-8.5 Sones
Electrical	120V-60Hz, 490W	120V-60Hz, 913W**	120V-60Hz, 926W
Illumination	2 LED, 6.5W, 3000K, 540 Lumen/Lamp		
Finish	Stainless Steel		
Controls	Fully Retractable Rotating Knobs with Blue backlighting		
Grease filters	Dishwasher-Safe, Professional Stainless Steel Angled Baffle Filters (2 for 28", 34" & 3 for 46")		
Installation type	Ducted or recirculating with kit		
Duct Transition	6" Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)

KITS

External Blower	KIT0153054 (1200 CFM blower, 8" or 10" compatible)
Inline Blower	KIT0154387 (1200 CFM blower, 8" or 10" compatible)
Inline Blower Shell (1200 CFM)	KIT0179549 (for use with 1200 CFM blower, 8" or 10" compatible)
Inline Blower Shell (600 CFM)	KIT0205342 (for use with 600 CFM blower, 6" compatible)
External Blower Shell	KIT0179547 (for use with 1200 CFM blower)
Recirculation (600 CFM)	KIT0192765 (4 round carbon filters)+ KIT0195736 (6" round deflector)
Recirculation (1200 CFM)	KIT0192765 (4 round carbon filters) + KIT0192763 (8" round deflector)
Electronic CFM Reduction Bypass	KIT0185752 (Achieves <300 CFM for 600 CFM Blower) KIT0185099 (Achieves <400 CFM for 1200 CFM Blower)
Transition Reducer Kit	KIT0185271 (10" round down to 8" round - attaches to 10" round transition)

WARRANTY:²

Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.