

FROM PLAN DATED:

BUILDER: GREEN PARK HOMES

SITE: RUSSELL GARDENS PH 3

MODEL: MOUNTAINASH 6

ELEVATION: 2

LOT: 154

CITY: WATERDOWN

SALESMAN: MARIO DICIANO

DESIGNER: AJ

REVISION:

NOTES:

REFER TO THE **NORDIC INSTALLATION GUIDE** FOR PROPER STORAGE AND INSTALLATION.

SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2 S.P.F REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING **CANT' OVER BRICK** RE I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 7, TABLES 1 & 2. **CERAMIC TIL** APPLICATION AS PER O.B.C 9.30.6.

LOADING:

DESIGN LOADS: L/480.000

LIVE LOAD: 40.0 lb/ft²


DEAD LOAD: 20.0 lb/ft²

SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 2020-04-16

1st FLOOR

DECK CONDITION

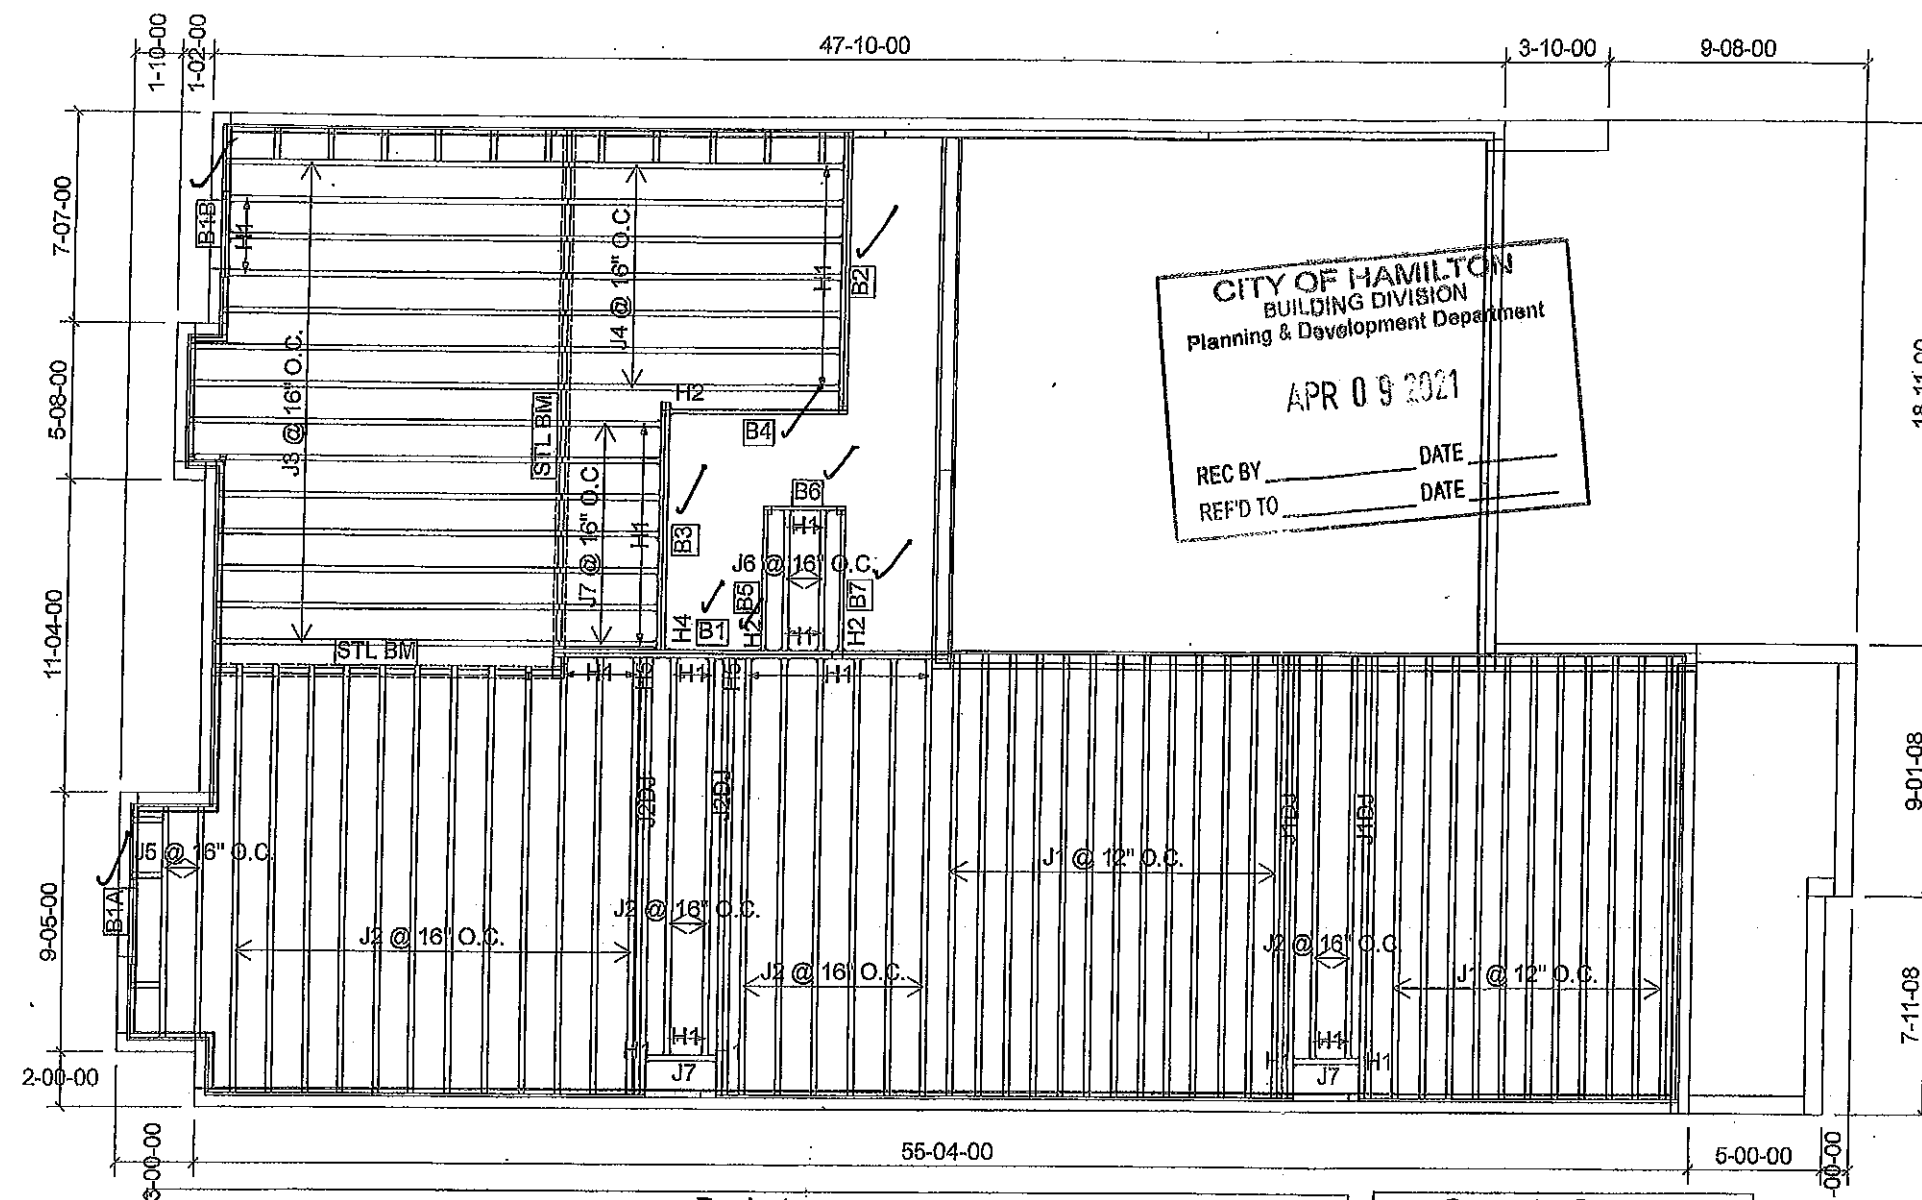

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1 ✓	18-00-00	9 1/2" NI-40x	1	24	MFD
J1DJ	18-00-00	9 1/2" NI-40x	2	4	MFD
J2	16-00-00	9 1/2" NI-40x	1	22	MFD
J2DJ	16-00-00	9 1/2" NI-40x	2	4	MFD
J3	14-00-00	9 1/2" NI-40x	1	14	MFD
J4	12-00-00	9 1/2" NI-40x	1	7	MFD
J5	10-00-00	9 1/2" NI-40x	1	2	MFD
J6	6-00-00	9 1/2" NI-40x	1	2	MFD
J7	4-00-00	9 1/2" NI-40x	1	9	MFD
B1	16-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B2	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B3	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B4	8-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B5	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B7	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B6	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B1A	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B1B	4-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD


Connector Summary		
Qty	Manuf	Product
2	H1	IUS2.56/9.5
30	H1	IUS2.56/9.5
4	H1	IUS2.56/9.5
4	H1	IUS2.56/9.5
3	H2	HUS1.81/10
1	H4	HGUS410
2	H5	HU312-2

CITY OF HAMILTON
Building Division

Permit No. 21-105991

THESE STAMPED DRAWINGS SHALL BE AVAILABLE ON SITE
THE OWNER AND/OR CONTRACTOR SHALL COMPLY WITH
THE ONTARIO BUILDING CODE AND ALL OTHER APPLICABLE LAW


These drawings and/or specifications have been reviewed by
JDC
FOR CHIEF BUILDING OFFICIAL
DATE: Apr 20/21

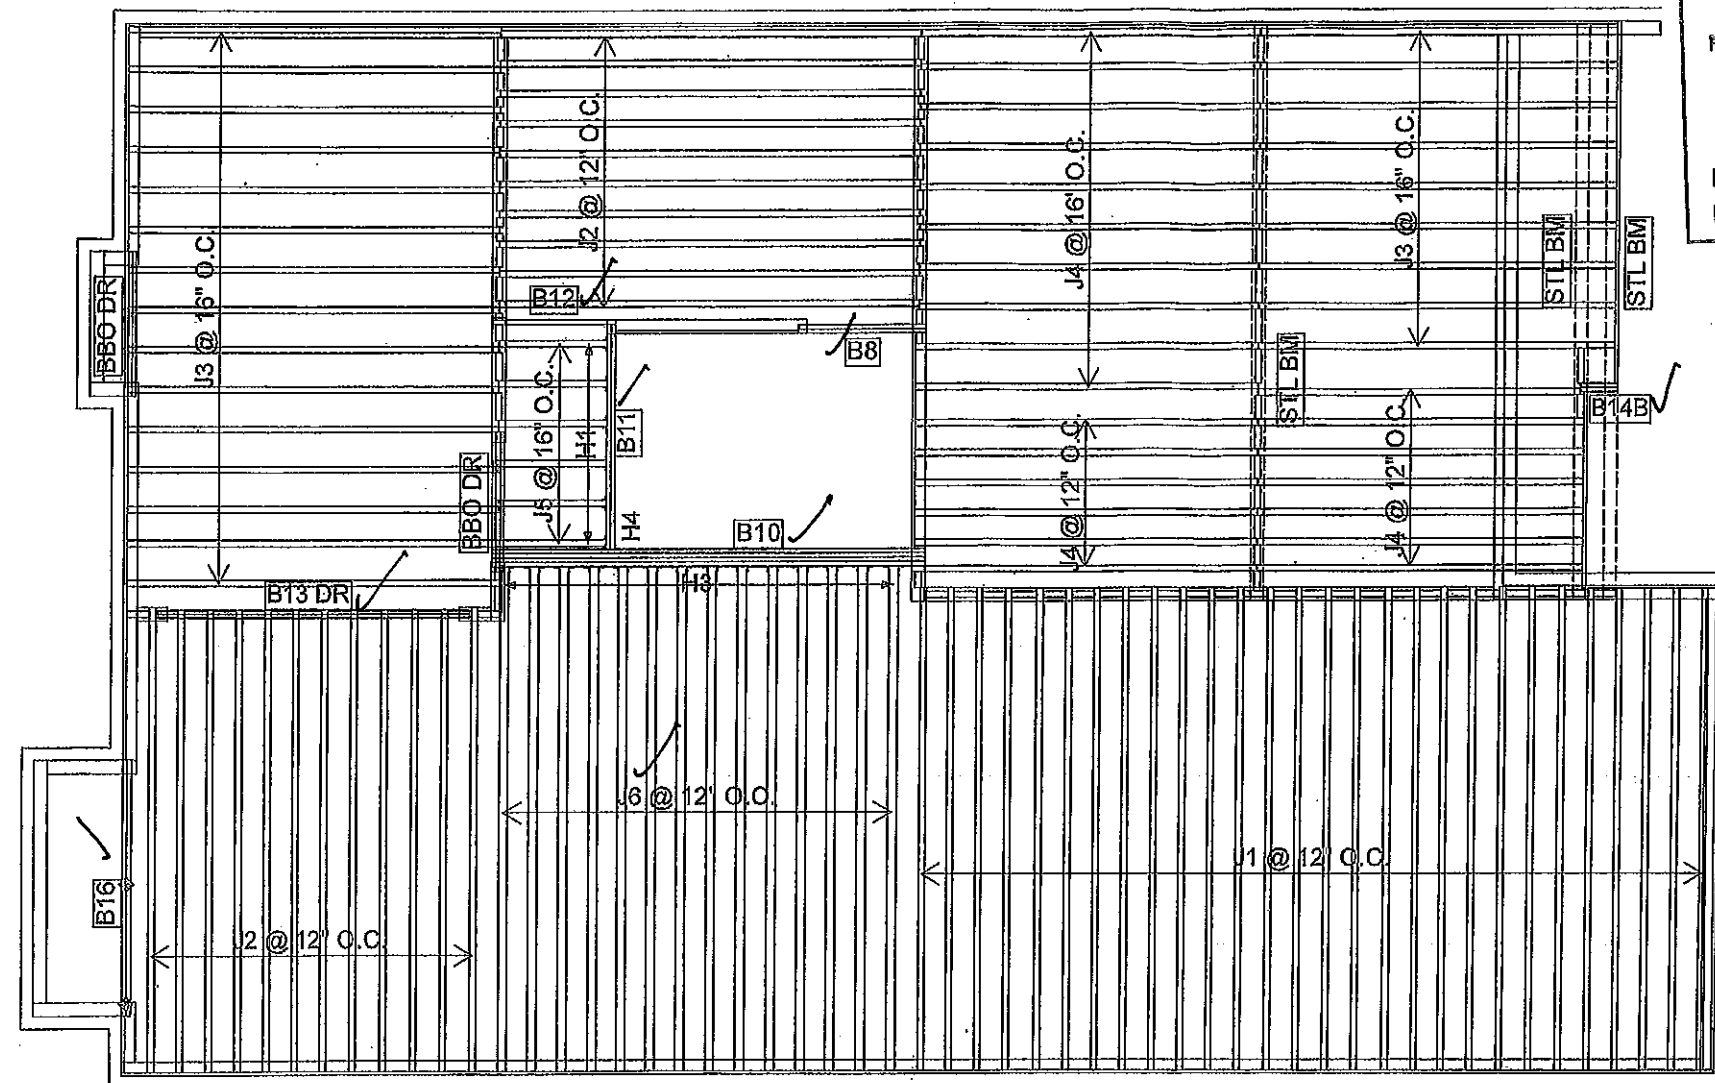

CITY OF HAMILTON
BUILDING DIVISION
Planning & Development Department

APR 09 2021

REC BY _____ DATE _____
REF'D TO _____ DATE _____

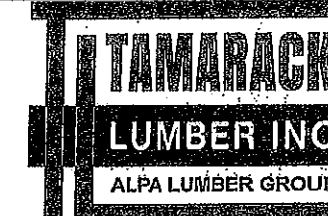

FROM PLAN DATED:

BUILDER: GREEN PARK HOMES

SITE: RUSSELL GARDENS PH 3

MODEL: MOUNTAINASH 6

ELEVATION: 2

LOT: 154

CITY: WATERDOWN

SALESMAN: MARIO DICIANO

DESIGNER: AJ

REVISION:

NOTES:

REFER TO THE NORDIC **INSTALLATION GUIDE** FOR PROPER STORAGE AND INSTALLATION. **SQUASH BLOCKS** OF 2x4, 2x6, 2x8 #2 S.P.F. REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING **CANT' OVER BRICK** REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURE 7 TABLES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 7 TABLES 1 & 2 OF THE INSTALLATION GUIDE. **CERAMIC TILE** APPLICATION AS PER O.B.C. 9.30.6

LOADING:

DESIGN LOADS: L/480.000

LIVE LOAD: 40.0 lb/ft²

DEAD LOAD: 20.0 lb/ft²

SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 2020-02-10

2nd FLOOR

OPT 5 BEDROOM

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	18-00-00	9 1/2" NI-40x	1	28	MFD
J2	16-00-00	9 1/2" NI-40x	1	22	MFD
J3	14-00-00	9 1/2" NI-40x	1	24	MFD
J4	12-00-00	9 1/2" NI-40x	1	23	MFD
J5	4-00-00	9 1/2" NI-40x	1	6	MFD
J6	18-00-00	9 1/2" NI-80	1	14	MFD
B10	16-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	4	4	MFD
B13 DR	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B16	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B11	8-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B12	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B8	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B14B	2-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2	MFD

Connector Summary		
Qty	Manuf	Product
6	H1	IUS2.56/9.5
14	H3	IUS3.56/9.5
1	H4	HGUS410

CITY OF HAMILTON
Building Division


Permit No. 21-105991

THESE STAMPED DRAWINGS SHALL BE AVAILABLE ON SITE

THE OWNER AND/OR CONTRACTOR SHALL COMPLY WITH
THE ONTARIO BUILDING CODE AND ALL OTHER APPLICABLE LAW

These drawings and/or specifications have been reviewed by

SDC Apr 20/21
FOR CHIEF BUILDING OFFICIAL DATE

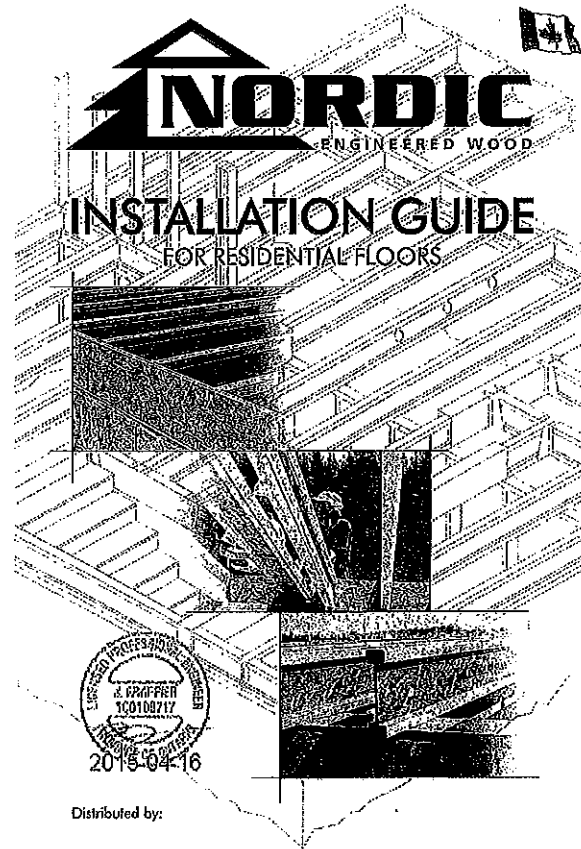

INSTALLATION GUIDE FOR RESIDENTIAL FLOORS



Distributed by:



SAFETY AND CONSTRUCTION PRECAUTIONS



Do not walk on I-joists until fully fastened and braced, or serious injuries can result.




Never stack building materials over unfastened I-joists. Once sheathed, do not over-stress I-joist with concentrated loads from building materials.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

STORAGE AND HANDLING GUIDELINES

1. Durable wrap can be slippery when wet. Avoid walking on wrapped bundles.
2. Store, stack, and handle I-joists vertically and level only.
3. Always stack and handle I-joists in the upright position only.
4. Do not store I-joists in direct contact with the ground and/or flatwires.
5. Protect I-joists from weather, and use spacers to separate bundles.
6. Bundled units should be kept tied until time of installation.
7. When handling I-joists with a crane on the job site, take a few simple precautions to prevent damage to the I-joists and injury to your work crew.
 - Pick I-joists in bundles as shipped by the supplier.
 - Orient the bundles so that the webs of the I-joists are vertical.
 - Pick the bundles at the 5th point, using a spreader bar if necessary.
8. Do not handle I-joists in a horizontal orientation.
9. NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.

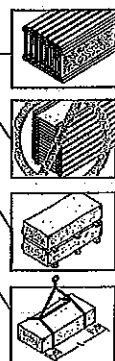

MAXIMUM FLOOR SPANS

1. Maximum clear spans applicable to single-span or multiple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration and a live load deflection limit of L/480. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
2. Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less, or 3/4 inch for joist spacing of 24 inches. Adhesive shall meet the requirements given in CGOS-71.2.6 Standard. No concrete topping or bridging element was assumed. Increased spans may be achieved with the use of gypsum and/or a row of blocking at mid-span.
3. Minimum bearing length shall be 1-3/4 inches for the end bearings, and 2-1/2 inches for the intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
5. This span chart is based on uniform loads. For applications with other than uniform loads, an engineering analysis may be required based on the use of the design properties.
6. Tables are based on Limit States Design per CAN/CSA O86-09 Standard, and NBC 21010.
7. SI units conversion: 1 inch = 25.4 mm
1 foot = 0.305 m

MAXIMUM FLOOR SPANS FOR NORDIC I-JOISTS SIMPLE AND MULTIPLE SPANS

Joist Depth	Joist Spacing	Simple spans				Multiple spans			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
2-1/2"	18'-0"	13'-1"	14'-2"	13'-9"	13'-5"	16'-3"	15'-4"	14'-10"	14'-7"
	18'-6"	16'-1"	15'-2"	14'-8"	14'-9"	17'-5"	16'-6"	15'-10"	15'-5"
	19'-0"	16'-3"	15'-4"	14'-10"	14'-11"	17'-7"	16'-8"	15'-11"	15'-7"
3-1/2"	18'-0"	17'-1"	16'-1"	15'-6"	15'-2"	18'-0"	17'-4"	16'-9"	16'-10"
	18'-6"	17'-3"	16'-3"	15'-8"	15'-4"	18'-1"	17'-6"	16'-11"	16'-7"
	19'-0"	17'-5"	16'-5"	15'-9"	15'-5"	18'-3"	17'-7"	17'-0"	16'-9"
4-1/2"	18'-0"	18'-1"	17'-0"	16'-5"	16'-6"	20'-0"	18'-6"	17'-9"	17'-7"
	18'-6"	18'-4"	17'-3"	16'-7"	16'-9"	20'-3"	18'-9"	18'-0"	18'-1"
	19'-0"	18'-7"	17'-6"	17'-0"	17'-1"	20'-6"	19'-2"	18'-3"	18'-4"
6"	18'-0"	20'-2"	18'-7"	17'-10"	17'-11"	22'-3"	20'-7"	19'-8"	19'-9"
	18'-6"	20'-4"	18'-9"	17'-11"	18'-0"	22'-5"	20'-9"	19'-10"	19'-11"
	19'-0"	20'-6"	19'-1"	17'-12"	18'-1"	22'-7"	21'-1"	20'-11"	20'-12"
8"	18'-0"	22'-3"	20'-8"	19'-1"	19'-1"	24'-3"	22'-9"	21'-11"	21'-10"
	18'-6"	22'-5"	20'-10"	19'-2"	19'-2"	24'-5"	23'-1"	22'-0"	21'-9"
	19'-0"	22'-7"	20'-11"	19'-3"	19'-3"	24'-7"	23'-3"	22'-2"	22'-0"
10"	18'-0"	24'-3"	22'-8"	21'-5"	21'-6"	26'-3"	24'-9"	23'-11"	23'-10"
	18'-6"	24'-5"	22'-10"	21'-6"	21'-6"	26'-5"	25'-1"	24'-0"	23'-9"
	19'-0"	24'-7"	22'-11"	21'-7"	21'-7"	26'-7"	25'-3"	24'-2"	24'-1"


CCMC EVALUATION REPORT 13022-R

WEB STIFFENERS


RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the I-joist properties table found in the I-joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and the flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.

FIGURE 2
WEB STIFFENER INSTALLATION DETAILS

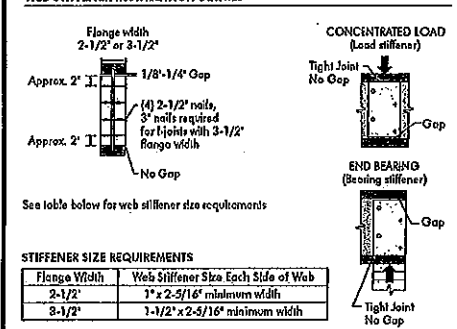

NORDIC I-JOIST SERIES

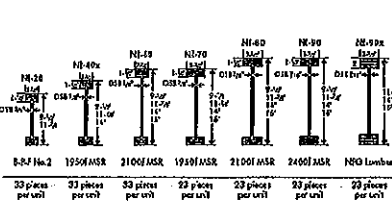











Chenier Chibougamau Ltd. harvests its own trees, which enables Nordic products to adhere to strict quality control procedures throughout the manufacturing process. Every phase of the operation, from the selection of the finished product, reflects our commitment to quality.

Nordic Engineered Wood I-joists use only finger-jointed lumber in their flanges, ensuring consistent quality, superior strength, and longer span carrying capacity.

INSTALLING NORDIC I-JOISTS

1. Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, supplier.
2. Except for cutting to length, I-joist flanges should never be cut, drilled, or notched.
3. Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
4. I-joists must be anchored securely to supports before floor sheathing is attached, and supports for I-joists must be level.
5. Minimum bearing lengths: 1-3/4 inches for end bearings and 2-1/2 inches for intermediate bearings.
6. When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
7. Leave a 1/16-inch gap between the I-joist and a header.
8. Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unusual or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
9. Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
10. Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
11. For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squish blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
12. Due to shrinkage, common framing lumber set on edge may never be used as blocking or rim boards. I-joist blocking panels or other engineered wood products – such as rim board – must be cut to fit between the I-joists, and I-joist-compatible depth selected.
13. Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
14. If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
15. Nail spacings: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.

FIGURE 1
TYPICAL NORDIC I-JOIST FLOOR FRAMING AND CONSTRUCTION DETAILS

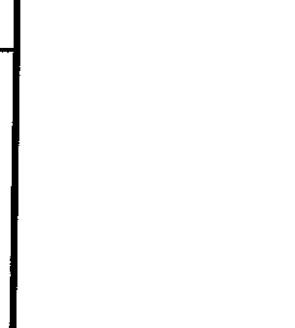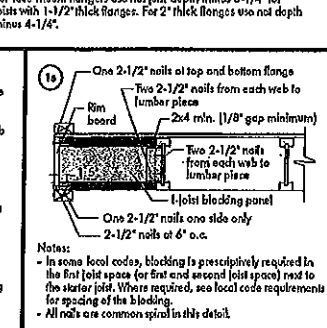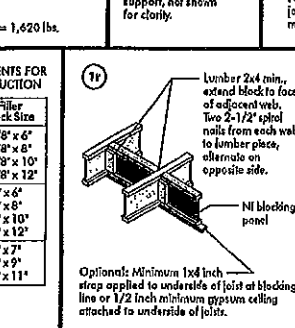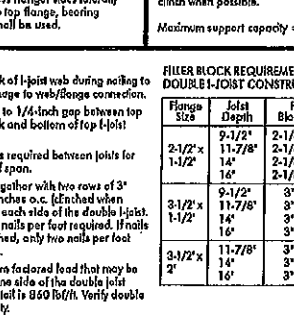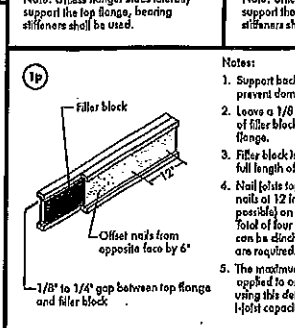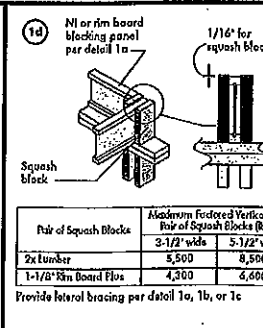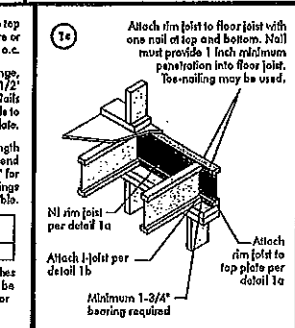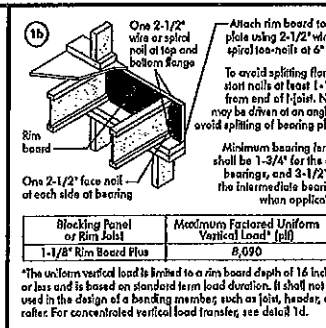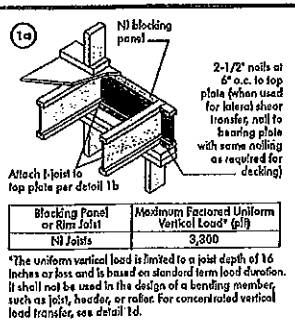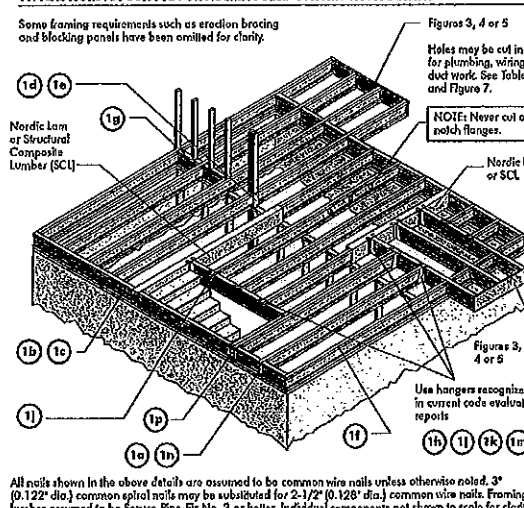

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

3a 1-JOIST CANTILEVER DETAIL FOR BALCONIES (No Wall Load)

Cantilever extension supporting uniform floor loads only

Rim board or wood structural panel closure; attach per detail 1b

Attach 1-joists to plots of all supports per detail 1b

1-joist, or rim board

3-1/2" min. bearing required

CAUTION: Cantilevers formed this way must be carefully detailed to prevent moisture intrusion into the structure and potential decay of cantilevered 1-joist extensions.

Note: This detail is applicable to cantilevers supporting a medium specified uniform live load of 60 psf.

J. & P. APPER
10010017
THE ASSOCIATED BUILDERS

Full depth backer block with 1/8" gap between block and top flange of I-joint. See detail 1b. Nail with 2 rows of 3" nails at 6" o.c. and clinch.

2x8 min. Nail to backer block and joint with 2 rows of 3" nails at 6" o.c. and clinch. (Cantilever nails may be used to attach backer block if length of nail is sufficient to allow clinching.)

Attach I-joints to plate at all support per detail 1b.

Cantilever extension supporting uniform floor loads only

Lumber or wood structural panel closure

3-1/2" min. bearing required

I-joint, or rim board

1/2" x 4" min. (1/2" x 4" min. bearing)

Note: This detail is applicable to cantilevers supporting a maximum specified uniform live load of 60 psi.

(1a) Method 1 — SHEATHING REINFORCEMENT ONE SIDE

Rim board or wood structural panel (see 31A' tolerance thickness); attach per detail 1b)

No blocking or rim board blocker attach per detail 1c)

Attach L-joint to p per detail 1d)

3'-0" maximum

2'-0" minimum

8"

2-1/2" nails

3-1/2" min. bearing required

Method 2 — SHEATHING REINFORCEMENT TWO SIDES

- Use same installation as Method 1 but reinforce both sides of joist with sheathing.
- Use nailing pattern shown for Method 1 with opposite face

[illegible]

See table below for NI reinforcement requirements at cantilever.

Roof trusses

Roof truss span

2'-0" maximum cantilever

Girder truss

1/4" maximum

trusses running parallel to the cantilevered floor joists. The NI reinforcement requirements for a span of 26 ft. shall be permitted to be used.

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft)	ROOF LOADING (UNFACTORED)															
		$W = 30 \text{ psf}, D_L = 15 \text{ psf}$								$W = 40 \text{ psf}, D_L = 15 \text{ psf}$							
		JOIST SPACING (in.)								JOIST SPACING (in.)							
		12	16	19.2	24	12	16	19.2	24	12	16	19.2	24	12	16	19.2	24
2 1/2"	26	N	N	1	2	N	1	2	X	N	2	X	X	N	2	X	X
	28	N	N	1	X	N	1	2	X	N	2	X	X	N	2	X	X
	30	N	N	1	1	X	X	2	X	N	1	2	X	X	2	X	X
	32	N	N	1	2	X	X	2	X	N	2	X	X	N	2	X	X
	34	N	N	1	2	X	X	2	X	N	2	X	X	N	2	X	X
	36	N	N	1	2	X	1	2	X	N	1	2	X	X	N	2	X
11 7/8"	26	N	N	N	1	N	1	2	X	N	N	1	1	N	1	1	2
	28	N	N	N	1	N	1	2	X	N	N	1	1	N	1	1	2
	30	N	N	N	N	1	1	2	X	N	N	1	1	N	1	1	2
	32	N	N	N	N	1	1	N	N	N	1	2	X	N	1	2	X
	34	N	N	N	N	1	2	N	1	1	X	N	1	2	X	N	2
	36	N	N	N	1	2	N	1	2	X	N	1	2	X	N	2	X
14"	26	N	N	N	N	N	N	N	N	N	N	1	1	N	N	N	N
	28	N	N	N	N	N	N	N	N	N	N	1	1	N	N	N	N
	30	N	N	N	N	N	N	N	N	N	N	1	1	N	N	N	2
	32	N	N	N	N	1	1	N	N	N	N	1	1	N	N	1	2
	34	N	N	N	N	1	1	N	N	N	N	1	1	N	N	1	2
	36	N	N	N	N	1	1	N	N	N	N	1	1	N	N	1	2
16"	26	N	N	N	N	1	N	N	1	2	N	1	1	N	N	1	2
	28	N	N	N	N	N	N	N	1	2	N	N	1	N	N	N	N
	30	N	N	N	N	N	N	N	N	1	N	N	N	N	N	1	1
	32	N	N	N	N	N	N	N	N	1	1	N	N	N	N	1	1
	34	N	N	N	N	N	N	N	N	1	1	N	N	N	N	1	2
	36	N	N	N	N	N	N	N	N	1	1	N	N	N	N	1	2

1. $n = N$ reinforced with 3/4" wood structural steel on one side only.
2. $n = N$ reinforced with 3/4" wood structural steel on both sides and 1/2" steel joist.
3. $n = 2$ or a deeper joist or closer spacing.

2. Maximum design load shall be: 15 psf roof dead load, 55 psf roof total load, and 80 psf wall load. Wall load is based on 30" maximum width window or door opening.

3. Springs shall be less than 60° or n , additional joist beneath the opening's cripple stud may be required.

4. Joist depth is joists 12" to 24" or n , the metal floor spanning members for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of 1/480, US 12" or n requirements for heavy spanning.

5. Connected joist spanning deeper gables or roof beams may require additional joists.

Bearing walls

Joist

Girder

Blocking

Notes:

- Provide full depth blocking between joists over support (not shown for clarity)
- Attach joists to plates or sill supports per detail 1b.
- 3-1/2" minimum joist bearing required.

5" max.

Attach joists to girder (not per detail 5c)

Vertical solid sawn blocks (2x5 S-P-F No. 2 or better) milled through joint web and web of glider using 2 1/2" nails. Alternate for opposite side.

nail, toe-nail at top over bottom flanges.

Hanger may be used in lieu of solid sawn block.

Notes:

- Verify glider joint capacity if the back span exceeds the joint spacing.
- Block hangers (not rated) to, if required.

JOIST DEPTH (in.)	ROOF TRUSS SPAN (ft)	ROOF LOADING (UNFACTORED)														
		LL = 20 psf, DL = 15 psf						LL = 40 psf, DL = 15 psf								
		JOIST SPACING (in.)						JOIST SPACING (in.)								
		12	16	18	24	26	12	16	18	24	26	12	16	18	24	26
9 1/2"	26	1	X	X	X	X	2	X	X	X	X	2	X	X	X	X
	28	1	1	X	X	X	2	2	X	X	X	2	X	X	X	X
	30	1	1	X	X	X	2	2	X	X	X	2	X	X	X	X
	32	1	2	X	X	X	2	2	X	X	X	2	X	X	X	X
	34	1	2	X	X	X	2	2	X	X	X	2	X	X	X	X
11 7/8"	26	N	X	X	X	X	X	X	X	X	X	1	X	X	X	X
	28	N	2	X	X	X	1	1	X	X	X	1	2	X	X	X
	30	1	2	2	X	X	1	1	X	X	X	2	2	X	X	X
	32	1	1	2	X	X	1	1	X	X	X	2	2	X	X	X
	34	1	1	2	X	X	2	2	X	X	X	2	2	X	X	X
14"	26	1	X	X	X	X	2	X	X	X	X	2	X	X	X	X
	28	N	1	2	X	X	N	1	2	X	X	1	1	X	X	X
	30	N	N	2	X	X	N	1	1	X	X	1	1	X	X	X
	32	N	N	2	X	X	N	1	1	X	X	2	2	X	X	X
	34	N	N	2	X	X	N	1	1	X	X	2	2	X	X	X
16"	26	1	2	X	X	X	1	1	X	X	X	2	2	X	X	X
	28	N	1	2	X	X	2	X	X	X	X	2	2	X	X	X
	30	N	N	2	2	X	N	2	2	X	X	1	1	2	X	X
	32	N	N	2	X	X	N	1	1	X	X	1	1	X	X	X
	34	N	N	2	2	X	N	1	1	X	X	1	1	X	X	X
16"	26	N	N	2	X	X	N	1	1	X	X	1	1	X	X	X
	28	N	N	2	X	X	N	2	2	X	X	1	1	2	X	X
	30	N	N	2	2	X	N	1	1	X	X	1	1	X	X	X
	32	N	N	2	X	X	N	1	1	X	X	2	2	X	X	X
	34	N	N	2	X	X	N	1	1	X	X	2	2	X	X	X

1. $\frac{1}{2}$ " N reinforced with 3/4" wood structural panel on one side only.
2. $\frac{1}{2}$ " N reinforced with 3/4" wood structural panel on both sides, or double 1/2".
3. $\frac{1}{2}$ " N reinforced with 1/2" steel plate or design equivalent.
4. Reinforced with 1/2" steel plate and 80 psi dry lead, 55 psi floor load, and 80 psi wall load. Wall lead is based on 3" maximum width window or door opening.
5. Reinforced with 1/2" steel plate, if the opening spans less than 6' 0".
6. Additional plates beneath the opening's sills also may be required.
7. Table applies to joists 12" to 24" in that meet the floor joist requirements for a design live load of 40 psf and dead load of 10 psf.
8. A live load reduction limit of 1/400, U.S. 12" or more requirements for floor spacing.
9. Ridge board, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge board.
10. When the roof is framed using a ridge board, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.
11. Conventional joists supporting gable doors or roof beams may require additional reinforcing.

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:

1. The distance between the inside edge of the support and the centreline of each hole or duct chase opening shall be in compliance with the requirements of Tables 1 and 2, respectively.
2. 1/2-in. top and bottom flanges must NEVER be cut, notched, or otherwise modified.
3. Whenever possible, field-cut holes should be centered on the middle of the web.
4. The maximum size hole or the maximum depth of a duct chase opening that is cut into an I-beam web shall equal the clear distance between the flanges above and below the hole. A minimum of 1/8 inch shall always be maintained between the top or bottom of the hole or opening and the adjacent I-beam flange.
5. The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the minimum round hole permitted at that location.
6. Where more than one hole is necessary, the distance between adjacent holes shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole or twice the length of the longest side of the largest rectangular hole or duct chase opening, and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
7. A knockout is not considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
8. Holes measuring 1-1/2 inches or smaller shall be permitted anywhere in a nonstressed section of a joist. Holes of greater size may be permitted adjacent to a web.
9. 1-1/2 inch holes or smaller can be placed anywhere in the web provided the joist meets the requirements of rule number 6 above.
10. All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
11. Only three maximum size holes per span, of which one may be a duct chase opening.
12. A group of round holes of approximately the same location shall be permitted if they meet the requirements for a single round hole discussed around them.

Joint Depth	Joint Scarce	Minimum distance from back face of any upper rib to centre of hole (in.)												Span allowance	Factor	
		Round hole diameter, [in.]														
		2	3	4	5	6	6 1/4	7	8	8 5/8	9	10	10 3/4	11	12	17
11/2"	N-20	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-40	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-60	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-80	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-100	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-120	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
11/3"	N-20	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-40	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-60	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-80	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-100	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-120	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
1"	N-20	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-40	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-60	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-80	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-100	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-120	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
3/4"	N-20	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-40	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-60	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-80	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-100	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
	N-120	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0
1/2"	N-20	0.7	1.													

The above table is based on the 10 points used at their maximum span. If the 10 points are placed at less than their full maximum span (see Method 1), the minimum distances from the outside of the hole to the face of any support (D) as given above may be reduced as follows:

Reduced $D = \frac{\text{actual span}}{D} \times D$

Where:

- Reduced D = Distance from the inside face of any support to centre of hole, reduced for less than maximum span application.
- actual span = Distance shall not be less than 4 inches from the face of the support to edge of the hole.
- D = The actual measured span distance from the inside face of supports (D).
- SF = Span Adjustment Factor given in this table.
- D = The minimum distance from the inside face of any support to centre of hole from this table.

If D is greater than 1, use 1 in the above calculation for D .

See Table 1 for minimum distance from bearing

2x diameter of larger hole

2x duct chase length or hole diameter, whichever is larger

Duct chase opening (see Table 2 for minimum distance from bearing)

1 3/4" corrugator

Knockouts

See rule 12

Maintain minimum 1/8" space between top and bottom flange -- all duct chase openings and holes

1. Wipe any mud, dirt, snot, or ice from I-joints before gluing.
2. Snap a chalk line across the I-joints four feet in from the wall for panel edge alignment and as a backup for spreading glue.
3. Spread only enough glue to lay one or two panels at a time, or follow specific recommendations from the glue manufacturer.
4. Lay the first panel with tongue side to the wall, and split in place. This protects the tongue of the next panel from damage when lapped into place, with a clean, clean break.
5. Apply a continuous line of glue (about 1/4 inch diameter) to the top flange of a single I-joint. Apply glue in a winding pattern on wide areas, such as with double I-joints.
6. Apply two lines of glue on I-joints where panel ends, but to ensure proper gluing of each end.
7. After the first row of panels is in place, spread glue in the groove of one or two panels at a time when laying the next row. Glue laid in the groove or spaced, but avoid spreading by applying a thinner line (1/8 inch) then used on I-joint flanges.
8. Tap the second row of panels into place, using a block to protect groove edges.
9. Snag and joint in each succeeding row of panels. A 1/8-inch space between all end joints and 1/8-inch at all edges, including T&B edges, is recommended. (Use a spacer tool on our 2-1/2" corner nail to assure accurate and consistent spacing.)
10. Complete all nailing of each panel before glue sets. Check the manufacturer's recommendation for cure time. (Warm weather accelerates glue setting.) Use 2" ring- or screw-shank nails for panels 3/4-inch thick or less, and 2-1/2" ring- or screw-shank nails for thicker panels. Space nails per the table below. Closer nail spacing may be required by some codes, or for diaphragm construction. The finished board can be walked on right away and will carry construction loads without damage to the glue band.

(8a) ATTACHMENT DETAILS WHERE RIM BOARDS ABUT.

Rim board joint between floor joists: 2-1/2" nails at 6" o.c. (typical)

(1) 2-1/2" nail top and bottom (typical)

2-1/2" toe-nails at 6" o.c. (typical)

Rim board joint

Rim board joint at corner: 1-1/2" nails at 6" o.c. (typical)

Rim board joint

Technical drawing illustrating the installation of a rim board on an existing foundation wall. The drawing includes a cross-section view on the left and a detailed view of the joint on the right.

Labels and Dimensions:

- Existing stud wall**
- Rim board**
- Floor sheathing**
- l-joint**
- 2" min.** (dimension for l-joint overlap)
- 1-5/8" min.** (dimension for l-joint overlap)
- 7" min.** (dimension for l-joint overlap)
- Continuous flashing extending at least 3' per joint**
- Staggered 1/2" diameter lag screw or thru-bolt with washer**
- Deck joist**
- Joist hanger**
- Existing foundation wall**
- 2x ledger board (pressure-treated); must be greater than or equal to the depth of the deck joist**
- Remove siding of ledger prior to installation**
- Exterior sheathing**
- 30°** (angle of rim board)
- 4/3** (ratio of rim board)
- Top or sole plate**

Stamp:

U.S. PATENT OFFICE
J. CRAPPIER
100109717
NEW YORK, N.Y.

*Quoniam Chrysomus presertim illis, in notione vel
specificatione, Verbi proferri esse fecit manifestum
fieri de material et verbalis verbi.*

Furthermore, Chambers Chiropractors warrant that our products, as utilized in accordance with our handling and manipulation instructions

will meet or exceed the requirements for the life span of the structure.

IMPORTANT NOTE:
Floor sheathing must be field glued to the I-joist flanges in order to achieve the maximum spans shown in this document. If sheathing is nailed only, I-joist spans must be verified with your local distributor.

Ref.: NBC-CNRC, National Building Code of Canada 2010, Table 8.23.3.5



Refer to the Installation Guide for Residential Floors for additional information.
CCMC EVALUATION REPORT 13032-R

WEB HOLE SPECIFICATIONS

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:

- The distance between the inside edge of the support and the centerline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
- I-joint top and bottom flanges must NEVER be cut, notched, or otherwise modified.
- Whenever possible, field-cut holes should be centered on the middle of the web.
- The maximum size hole or the maximum depth of a duct chase opening that can be cut into an I-joint web shall equal the clear distance between the flanges of the I-joint minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole or opening and the adjacent I-joint flange.

- The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
- Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the longest side of the largest rectangular hole or duct chase opening) and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
- A knockout is not considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
- Holes measuring 1-1/2 inches or smaller are permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.

- A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
- All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
- Limit three maximum size holes per span, of which one may be a duct chase opening.
- A group of round holes of approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

TABLE 1
LOCATION OF CIRCULAR HOLES IN JOIST WEBS

Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum Distance from Inside Face of Any Support to Centre of Hole (d - in.)											
		Round Hole Diameter (in.)											
		2	3	4	5	6	6-1/4	7	8	8-3/8	9	10	10-3/4
9-1/2"	NI-20	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-40x	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-60	1-3"	2-6"	4-0"	5-4"	7-0"	8-4"	10-0"	11-4"	13-0"	14-4"	16-0"	17-4"
	NI-70	2-0"	3-4"	4-8"	6-2"	8-0"	9-4"	11-0"	12-4"	14-0"	15-4"	17-0"	18-4"
11-7/8"	NI-20	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-40x	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-60	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-70	1-3"	2-6"	4-0"	5-4"	7-0"	8-4"	10-0"	11-4"	13-0"	14-4"	16-0"	17-4"
14"	NI-20	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-40x	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-60	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-70	1-3"	2-6"	4-0"	5-4"	7-0"	8-4"	10-0"	11-4"	13-0"	14-4"	16-0"	17-4"
16"	NI-20	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-40x	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-60	0-7"	1-6"	2-10"	3-3"	4-4"	5-1"	6-0"	7-0"	8-0"	9-0"	10-0"	11-0"
	NI-70	1-3"	2-6"	4-0"	5-4"	7-0"	8-4"	10-0"	11-4"	13-0"	14-4"	16-0"	17-4"

- Above table may be used for I-joint spacing of 24 inches on center or less.
- Hole location distance is measured from inside face of supports to centre of hole.
- Distances in this chart are based on uniformly loaded joists.
- The above table is based on the I-joints being used at their maximum spans. The minimum distance as given above may be reduced for shorter spans; contact your local distributor.



TABLE 2
DUCT CHASE OPENING SIZES AND LOCATIONS

Simple Span Only

Joist Depth	Joist Series	Minimum Distance from Inside Face of Supports to Centre of Opening (d - in.)											
		Duct Chase Length (in.)											
		8	10	12	14	16	18	20	22	24	26	28	30
9-1/2"	NI-20	4-1"	4-5"	4-10"	5-4"	5-8"	6-1"	6-6"	7-1"	7-5"	8-0"	8-4"	8-9"
	NI-40x	5-3"	5-8"	6-0"	6-10"	7-3"	7-8"	8-3"	8-8"	9-3"	9-8"	10-3"	10-8"
	NI-60	6-4"	6-9"	6-2"	6-7"	7-1"	7-5"	8-0"	8-5"	9-0"	9-5"	10-0"	10-5"
	NI-70	7-1"	7-6"	7-9"	8-3"	8-7"	9-1"	9-6"	10-1"	10-6"	11-1"	11-6"	12-1"
11-7/8"	NI-20	5-9"	6-2"	6-6"	7-1"	7-5"	7-9"	8-3"	8-7"	9-1"	9-5"	9-9"	10-3"
	NI-40x	6-8"	7-2"	7-6"	8-1"	8-5"	8-9"	9-3"	9-7"	10-1"	10-5"	10-9"	11-3"
	NI-60	7-3"	7-8"	8-0"	8-6"	9-0"	9-4"	9-8"	10-2"	10-6"	11-0"	11-4"	11-8"
	NI-70	7-1"	7-6"	7-9"	8-3"	8-7"	9-1"	9-6"	10-1"	10-6"	11-1"	11-6"	12-1"
14"	NI-20	7-2"	7-7"	8-0"	8-5"	8-10"	8-5"	9-0"	9-5"	10-0"	10-5"	11-0"	11-5"
	NI-40x	8-1"	8-6"	8-9"	9-4"	9-9"	10-4"	10-9"	11-4"	11-9"	12-4"	12-9"	13-4"
	NI-60	8-9"	9-4"	9-8"	10-1"	10-6"	11-1"	11-6"	12-1"	12-6"	13-1"	13-6"	14-1"
	NI-70	8-7"	9-2"	9-5"	9-10"	10-4"	10-9"	11-4"	11-9"	12-4"	12-9"	13-4"	13-9"
16"	NI-20	9-2"	9-8"	10-0"	10-6"	10-11"	11-5"	11-9"	12-4"	12-9"	13-4"	13-9"	14-4"
	NI-40x	9-4"	9-9"	10-3"	10-7"	11-1"	11-5"	11-9"	12-4"	12-9"	13-4"	13-9"	14-4"
	NI-60	10-3"	10-8"	11-2"	11-6"	12-1"	12-6"	13-1"	13-6"	14-1"	14-6"	15-1"	15-6"
	NI-70	10-1"	10-5"	11-0"	11-4"	11-9"	12-4"	12-9"	13-4"	13-9"	14-4"	14-9"	15-4"

- Above table may be used for I-joint spacing of 24 inches on center or less.
- Duct chase opening location distance is measured from inside face of supports to centre of opening.
- The above table is based on simple-span joists only. For other applications, contact your local distributor.
- Distances are based on uniformly loaded floor joists that meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of 1/400.
- The above table is based on the I-joints being used at their maximum spans. The minimum distance as given above may be reduced for shorter spans; contact your local distributor.

FIGURE 7
FIELD-CUT HOLE LOCATOR

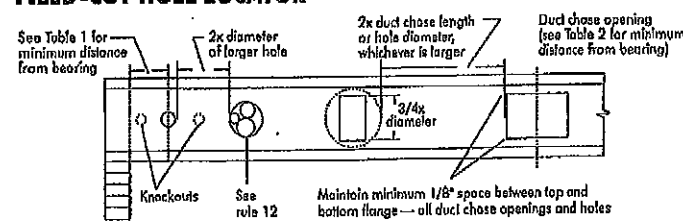

Knockouts are pre-cored holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on center along the length of the I-joint. Where possible, it is preferable to use knockouts instead of field-cut holes.

Never drill, cut or notch the flange, or over-cut the web.

Holes in webs should be cut with a sharp saw.

For rectangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joint.



SAFETY AND CONSTRUCTION PRECAUTIONS

- WARNING:** I-joints are not stable until completely installed, and will not carry any load until fully braced and sheathed.
- AVOID ACCIDENTS BY FOLLOWING THESE IMPORTANT GUIDELINES:**
- Brace and nail each I-joint as it is installed, using hangers, blocking panels, rim board, and/or cross-bracing at joist ends. When I-joints are applied continuously over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
 - When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joints. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joint rollover or buckling.
 - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on center, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each I-joint. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joints.
 - Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of I-joints at the end of the bay.
 - For cantilevered I-joints, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bracing.
 - Install and fully nail permanent sheathing to each I-joint before placing loads on the floor system. Then, stock building materials over beams or walls only.
 - Never install a damaged I-joint.
- Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joints, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.



PRODUCT WARRANTY

Chautauque Chibougamau guarantees that, in accordance with our specifications, Nordic products are free from manufacturing defects in materials and workmanship.

Furthermore, Chautauque Chibougamau warrants that our products, when utilized in accordance with our handling and installation instructions, will meet or exceed our specifications for the lifetime of the structure.

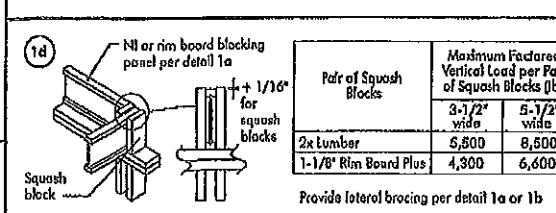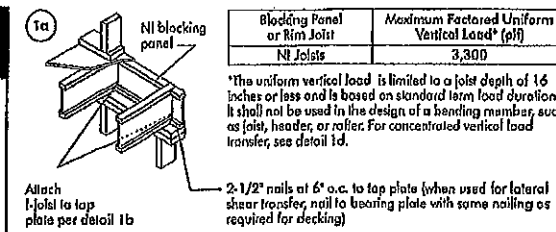

Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

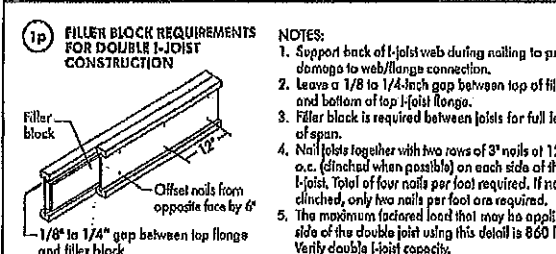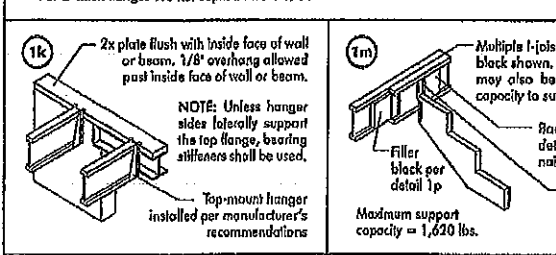


WEB STIFFENERS


RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the I-joint properties table found in the Joist Construction Guide [C10]. The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the I-joint is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of cantilevers, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.


FIGURE 2
WEB STIFFENER INSTALLATION DETAILS

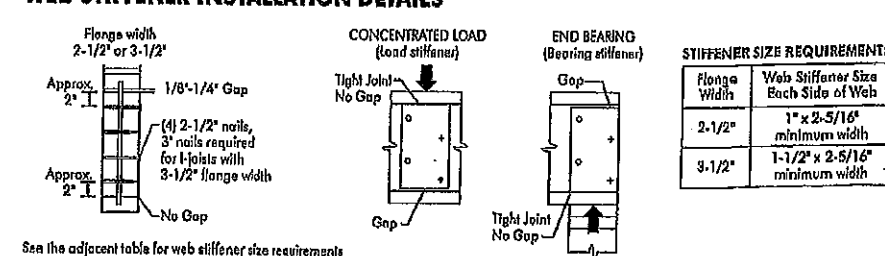

CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET

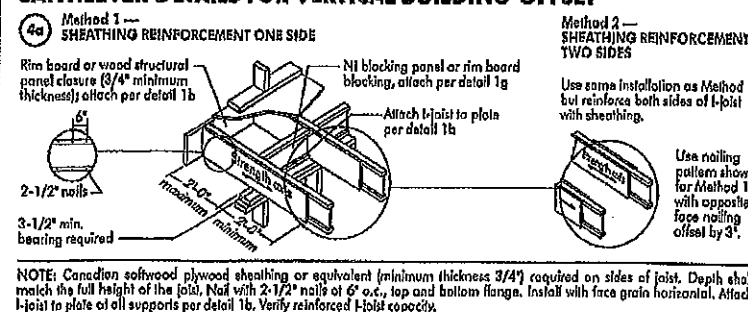

RIM BOARD INSTALLATION DETAILS

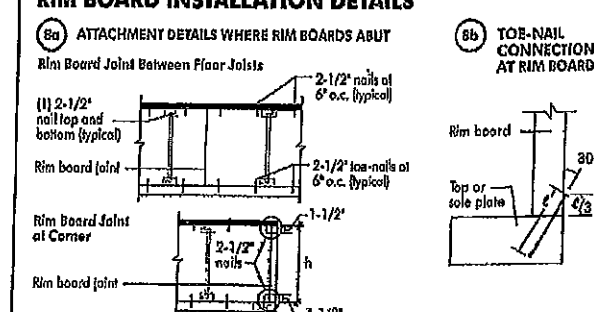

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 09:59


PROJECT
J1 2ND FLOOR.wvb

Design Check Calculation Sheet Nordic Sizer - Canada 7.2

Loads:

Load	Type	Distribution	Pat- tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

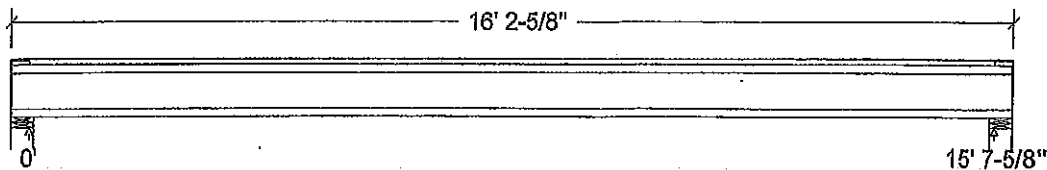

Unfactored:			
Dead	156		156
Live	313		313
Factored:			
Total	.664		.664
Bearing:			
Capacity			
Joist	1893		1893
Support	7744		7744
Des ratio			
Joist	0.35		0.35
Support	0.09		0.09
Load case	#2		#2
Length	4-3/8		4-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	-		-
fcp sup	769		769
Kzcp sup	-		-

Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

Nordic 9-1/2" NI-40x Floor joist @ 12" o.c.


Supports: All - Lumber Wall, No.1/No.2

Total length: 16' 2-5/8"; Clear span: 15' 5-7/8"; 5/8" nailed and glued OSB sheathing with 1/2" gypsum ceiling

This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 664	Vr = 1895	lbs	Vf/Vr = 0.35
Moment (+)	Mf = 2597	Mr = 4824	lbs-ft	Mf/Mr = 0.54
Perm. Defl'n	0.12 = < L/999	0.52 = L/360	in	0.22
Live Defl'n	0.23 = L/808	0.39 = L/480	in	0.59
Total Defl'n	0.35 = L/539	0.78 = L/240	in	0.45
Bare Defl'n	0.27 = L/694	0.52 = L/360	in	0.52
Vibration	Lmax = 15'-7.6	Lv = 16'-8.5	ft	0.94
Defl'n	= 0.034	= 0.041	in	0.81

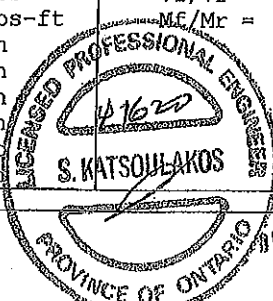

NO. TAN 6079 -20
STRUCTURAL
AMENDMENT ONLY

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	1895	1.00	1.00	-	-	-	-	-	#2
Mr+	4824	1.00	1.00	-	1.000	-	-	-	#2
EI	218.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth, groundwater E=earthquake

L=live (use, occupancy) Ls=live (storage, equipment) f=fire

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:E_{ieff} = 258.29 lb-in² K = 4.94e06 lbs


"Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO OBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.

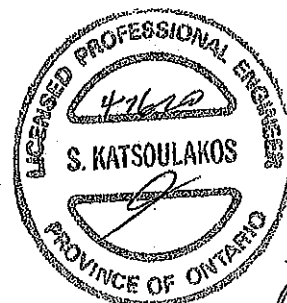

OWN NO. YAW 6079-28
STRUCTURAL
COMPONENT ONLY

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 10:02


PROJECT
J6 2ND FLOOR.vvvb

Design Check Calculation Sheet Nordic Sizer - Canada 7.2

Loads:

Load	Type	Distribution	Pat- tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

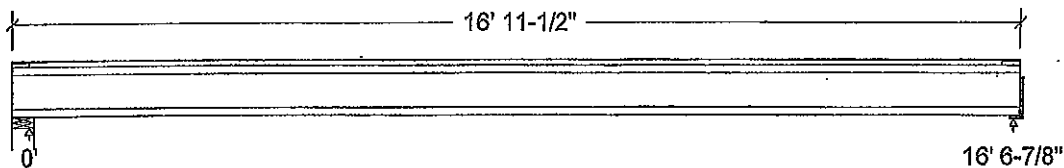

Unfactored:			
Dead	166		166
Live	331		331
Factored:			
Total	704		704
Bearing:			
Capacity			
Joist	1893		1893
Support	10841		-
Des ratio			
Joist	0.37		0.37
Support	0.06		-
Load case	#2		#2
Length	4-3/8		2
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	-		-
fcp sup	769		-
Kzcp sup	-		-

Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

Nordic 9-1/2" NI-80 Floor Joist @ 12" o.c.


Supports: 1 - Lumber Wall, No.1/No.2; 2 - Hanger;

Total length: 16' 11-1/2"; Clear span: 16' 5-1/8"; 5/8" nailed and glued OSB sheathing with 1/2" gypsum ceiling

This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 704	Vr = 1895	lbs	Vf/Vr = 0.37
Moment (+)	Mf = 2918	Mr = 8958	lbs-ft	Mf/Mr = 0.33
Perm. Defl'n	0.11 = < L/999	0.55 = L/360	in	0.19
Live Defl'n	0.21 = L/940	0.41 = L/480	in	0.51
Total Defl'n	0.32 = L/626	0.83 = L/240	in	0.38
Bare Defl'n	0.24 = L/841	0.55 = L/360	in	0.43
Vibration	Lmax = 16'-6.9	Lv = 17'-9.5	ft	0.93
Defl'n	= 0.031	= 0.038	in	0.80

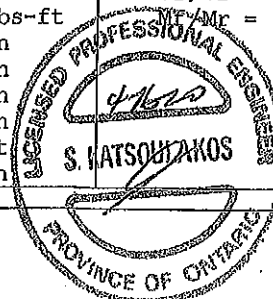

OWN NO. 74W 6000-20
STRUCTURAL
COMPONENT ONLY

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	1895	1.00	1.00	-	-	-	-	-	#2
Mr+	8958	1.00	1.00	-	1.000	-	-	-	#2
EI	324.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth,groundwater E=earthquake
L=live(use,occupancy) Ls=live(storage,equipment) f=fire

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:E_{Ieff} = 367.27 lb-in² K= 4.94e06 lbs


"Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO OBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.

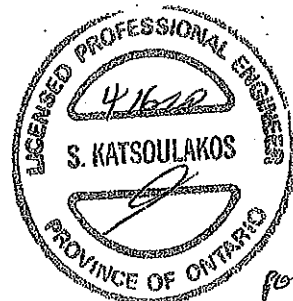

DWG NO. YAW 6080-20
STRUCTURAL
COMPONENT ONLY



Boise Cascade



✓ Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Dropped Beams\B13 DR(1726) (Dropped Beam)

Dry | 1 span | No cant.

February 10, 2020 11:38:52

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Dropped Beams\B13 DR(1726)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

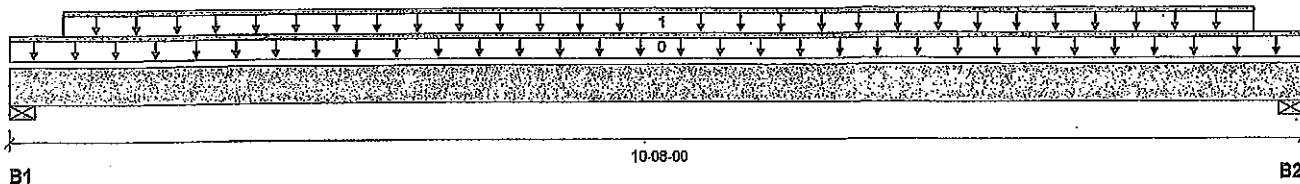

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4"	1619 / 0	861 / 0		
B2, 4"	1618 / 0	861 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-08-00	Top	1.00	0.85	1.00	1.15	00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	00-05-04	10-02-12	Top	313	156			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	8926 ft-lbs	23220 ft-lbs	38.4%	1	05-08-12
End Shear	3236 lbs	11571 lbs	28.0%	1	01-01-08
Total Load Deflection	L/523 (0.232")	n/a	45.9%	4	04-11-04
Live Load Deflection	L/800 (0.152")	n/a	45.0%	5	04-11-04
Max Defl.	0.232"	n/a	n/a	4	04-11-04
Span / Depth	12.8				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4" x 3-1/2"	3504 lbs	18.8%	20.5%	Spruce-Pine-Fir
B2	Wall/Plate 4" x 3-1/2"	3503 lbs	18.8%	20.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 00-02-08, Bottom: 00-02-08.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020

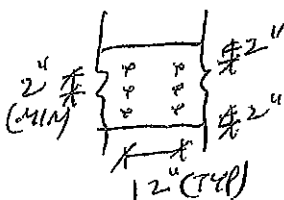

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



ONE NO. TAM 6001-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,



✓ **Quadruple 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP**

PASSED

2ND FLR FRAMING\Flush Beams\B10(I2111) (Flush Beam)

Dry | 1 span | No cant.

February 10, 2020 11:38:52

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B10(I2111)

Specifier:

Designer:

Company:

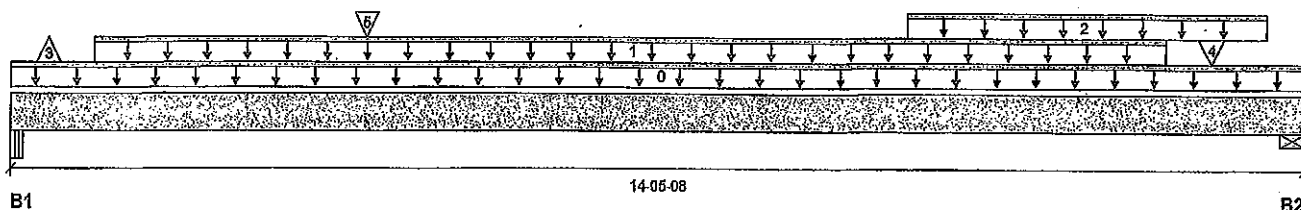

Total Horizontal Product Length = 14-05-08

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B1, 4-1/2"	2574 / 597	1313 / 0		
B2, 5-1/2"	2883 / 0	1649 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	14-05-08	Top		19			00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	00-11-00	12-11-00	Top	353	176			n/a
2	STAIR	Unf. Lin. (lb/ft)	L	10-00-00	14-00-00	Top	120	60			n/a
3	J6(I1586)	Conc. Pt. (lbs)	L	00-05-00	00-05-00	Top	-597	-282			n/a
4	J6(I2121)	Conc. Pt. (lbs)	L	13-05-00	13-05-00	Top	338	169			n/a
5	B11(I2153)	Conc. Pt. (lbs)	L	03-11-10	03-11-10	Top	305	408			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	21228 ft-lbs	48297 ft-lbs	44.0%	1	07-05-00
End Shear	5935 lbs	23142 lbs	25.6%	1	13-02-08
Total Load Deflection	L/317 (0.52")	n/a	75.6%	6	07-02-00
Live Load Deflection	L/508 (0.325")	n/a	70.9%	8	07-02-00
Max Defl.	0.52"	n/a	n/a	6	07-02-00
Span / Depth	17.4				

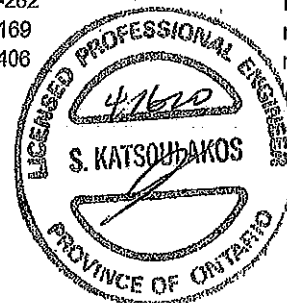

UWG NO. TAM 6082-20

STRUCTURAL

COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Beam 4-1/2" x 7"	5502 lbs	28.4%	14.3%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 7"	6387 lbs	27.0%	13.6%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86. **AMENDED 2020**

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

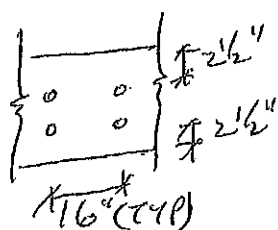

BOLT MULTI-PLY MEMBERS USING
2 ROWS 1/2" Ø A307 BOLTS
C/W WASHERS / NUTS @ 16" O/C

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report
Build 7239

Dry | 1 span | No cant.

February 10, 2020 11:38:52

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B11(i2153)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

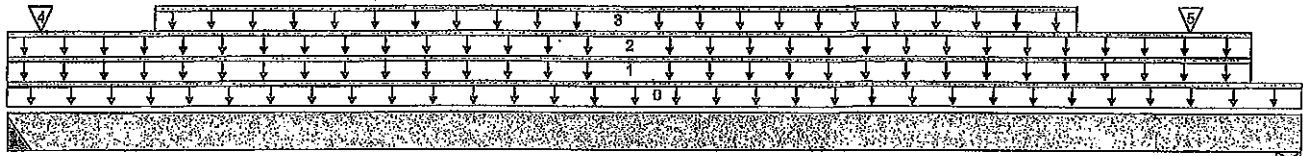

B1

07-06-02

B2

Total Horizontal Product Length = 07-06-02

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	307 / 0	409 / 0		
B2, 3-3/4"	290 / 0	393 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-06-02	Top		10			00-00-00
1	WALL	Unf. Lin. (lb/ft)	L	00-00-00	07-02-06	Top		60			n/a
2	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	07-02-06	Top	6	3			n/a
3	Smoothed Load	Unf. Lin. (lb/ft)	L	00-10-06	06-02-06	Top	76	38			n/a
4	J5(i1619)	Conc. Pt. (lbs)	L	00-02-06	00-02-06	Top	70	35			n/a
5	J5(i1506)	Conc. Pt. (lbs)	L	06-10-06	06-10-06	Top	77	39			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1645 ft-lbs	23220 ft-lbs	7.1%	1	03-11-06
End Shear	744 lbs	11571 lbs	6.4%	1	06-04-14
Total Load Deflection	L/999 (0.022")	n/a	n/a	4	03-08-06
Live Load Deflection	L/999 (0.009")	n/a	n/a	5	03-08-06
Max Defl.	0.022"	n/a	n/a	4	03-08-06
Span / Depth	9.0				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Hanger 2" x 3-1/2"	972 lbs	n/a	11.4%	Hanger
B2	Wall/Plate 3-3/4" x 3-1/2"	926 lbs	11.5%	5.8%	Spruce-Pine-Fir

Cautions

Hanger model Hanger was not found. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.



Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

AMENDED 2020

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING, MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS

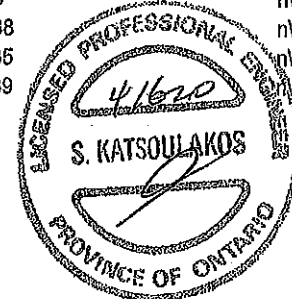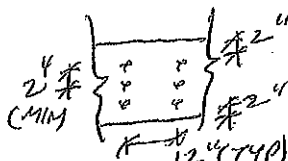

ENG NO. TAM 6083-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B12(I1651)

Specifier:

Designer:

Company:

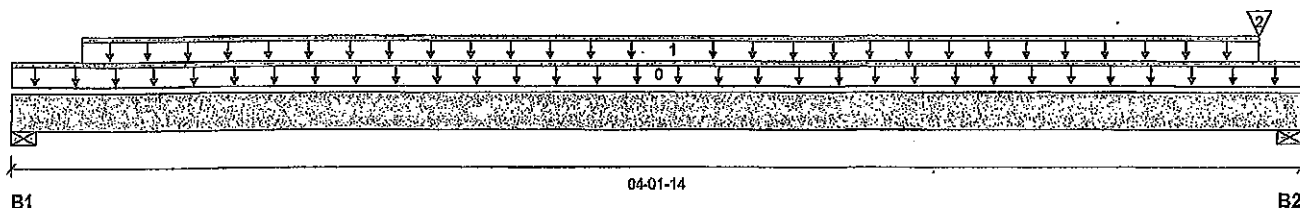

Total Horizontal Product Length = 04-01-14

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/2"	52 / 0	36 / 0		
B2, 3-1/2"	51 / 0	35 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-01-14	Top		5			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-12	04-00-02	Top	27	13			n/a
2	FC2 Floor Material	Conc. Pt. (lbs)	L	04-00-02	04-00-02	Top	2	1			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	98 ft-lbs	11610 ft-lbs	0.8%	1	02-01-15
End Shear	57 lbs	5785 lbs	1.0%	1	01-03-00
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	02-01-15
Live Load Deflection	L/999 (0")	n/a	n/a	5	02-01-15
Max Defl.	0.001"	n/a	n/a	4	02-01-15
Span / Depth	4.5				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 5-1/2" x 1-3/4"	123 lbs	2.1%	1.0%	Spruce-Pine-Fir
B2	Wall/Plate 3-1/2" x 1-3/4"	121 lbs	3.2%	1.6%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO UBC 2012

AMENDED 2020

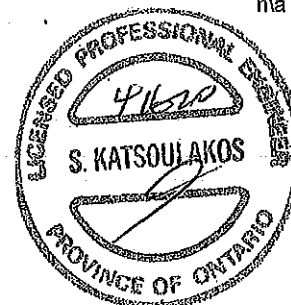
 DWG NO. TAM 6004-20
**STRUCTURAL
 COMPONENT ONLY**
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,



✓ Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Flush Beams\B14(I2151) (Flush Beam)

Dry | 1 span | No cant.

February 10, 2020 11:38:52

BC CALC® Member Report
Build 7239

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B14(I2151)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

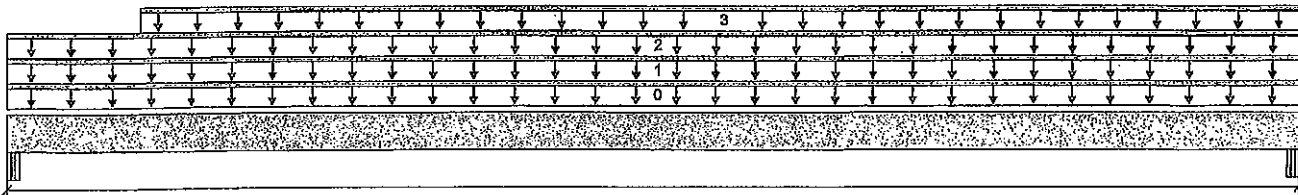

B1

02-01-08

B2

Total Horizontal Product Length = 02-01-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2-5/8"	43 / 0	120 / 0	42 / 0	
B2, 4-1/8"	55 / 0	138 / 0	47 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	02-01-08	Top		10			00-00-00
1	SNOW	Unf. Lin. (lb/ft)	L	00-00-00	02-01-08	Top	22	20	42		n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	02-01-08	Top		80			n/a
3	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	02-01-08	Top	27	13			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/ Resistance	Case	Location
Pos. Moment	96 ft-lbs	23220 ft-lbs	0.4%	1	01-00-02
End Shear	2 lbs	7521 lbs	n/a	0	01-00-02
Total Load Deflection	L/999 (0")	n/a	n/a	35	01-00-02
Max Defl.	0"	n/a	n/a	35	01-00-02
Span / Depth	2.1				

Bearing Supports

	Dim. (LxW)	Demand	Demand/ Resistance Support	Demand/ Resistance Member	Material
B1	Beam 2-5/8" x 3-1/2"	168 lbs	5.3%	2.3%	Unspecified
B2	Beam 4-1/8" x 3-1/2"	302 lbs	3.9%	1.7%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA Q86. AMENDED 2020


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA Q86.

Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012

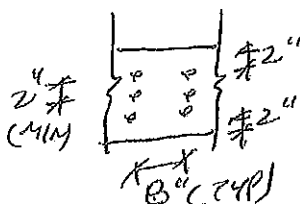

PROVIDE 3 ROWS OF 3/8" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING, MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



DWG NO. TAW 6085-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B16(I2154)

Specifier:

Designer:

Company:

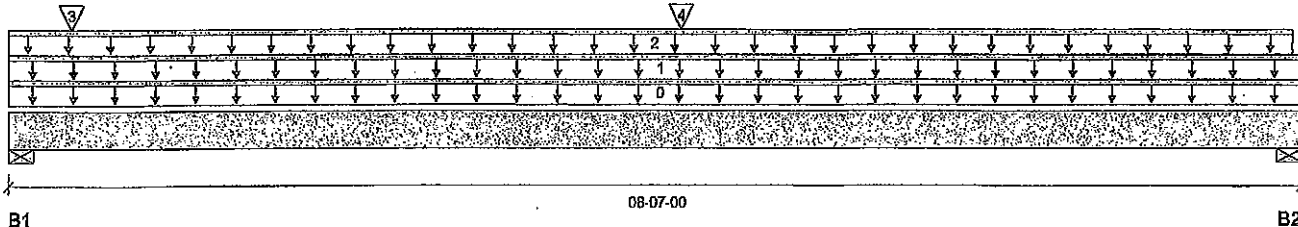

Total Horizontal Product Length = 08-07-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 6-1/2"	184 / 0	517 / 0	187 / 0	
B2, 5-1/2"	120 / 0	452 / 0	65 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	08-07-00	Top	10	10			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	08-07-00	Top	20	10			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	08-06-01	Top	80				n/a
3	WINDOW	Conc. Pt. (lbs)	L	00-05-00	00-05-00	Top	66	60	126		n/a
4	WINDOW	Conc. Pt. (lbs)	L	04-05-00	04-05-00	Top	66	60	126		n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1221 ft-lbs	15093 ft-lbs	8.1%	0	04-05-00
End Shear	468 lbs	7521 lbs	6.2%	0	07-04-00
Total Load Deflection	L/999 (0.028")	n/a	n/a	35	04-03-13
Live Load Deflection	L/999 (0.01")	n/a	n/a	51	04-03-13
Max Defl.	0.028"	n/a	n/a	35	04-03-13
Span / Depth	9.8				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 5-1/2" x 3-1/2"	723 lbs	9.4%	4.7%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	633 lbs	8.2%	4.1%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020

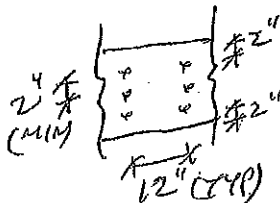

PROVIDE 3 ROWS OF 3 1/2" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

DWG NO. TAM 6086-20

STRUCTURAL

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B8(i2152)

Specifier:

Designer:

Company:

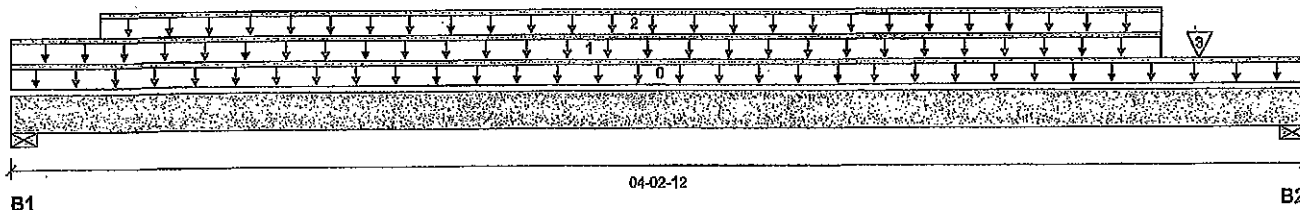

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	41 / 0	144 / 0		
B2, 5-1/2"	36 / 0	143 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-02-12	Top	10	10			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-09-04	Top	20	10			n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-03-08	03-09-04	Top		60			n/a
3	FC2 Floor Material	Conc. Pt. (lbs)	L	03-10-10	03-10-10	Top	1				n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	181 ft-lbs	15093 ft-lbs	1.2%	0	02-00-06
End Shear	106 lbs	7521 lbs	1.4%	0	01-01-00
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	02-00-06
Live Load Deflection	L/999 (0")	n/a	n/a	5	02-00-06
Max Defl.	0.001"	n/a	n/a	4	02-00-06
Span / Depth	4.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3-1/2" x 3-1/2"	202 lbs	4.1%	2.1%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	201 lbs	2.6%	1.3%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

CONFIRMS TO OBC 2012

AMENDED 2020

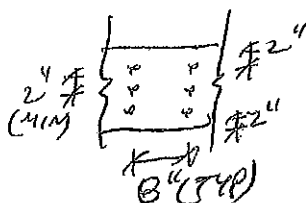

PROVIDE 3 ROWS OF 3/8" ARBOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS

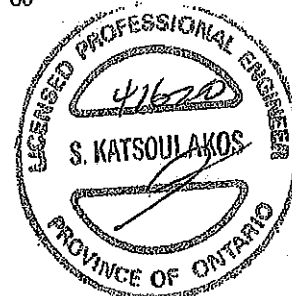

ONE NO. YAW 6087-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC1®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 6 EL 2.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B14B(i2247)

Specifier:

Designer: AJ

Company:

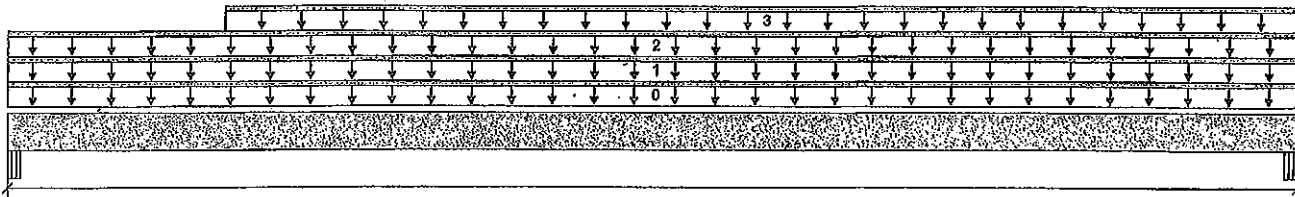

B1

01-03-08

B2

Total Horizontal Product Length = 01-03-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2-5/8"	12 / 0	59 / 0	23 / 0	
B2, 5-1/4"	17 / 0	83 / 0	32 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	01-03-08	Top	1.00	0.65	1.00	1.15	00-00-00
1	SNOW	Unf. Lin. (lb/ft)	L	00-00-00	01-03-08	Top	22	20	42		n/a
2	WALL	Unf. Lin. (lb/ft)	L	00-00-00	01-03-08	Top		80			n/a
3	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	01-03-08	Top	1				n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	11 ft-lbs	15093 ft-lbs	n/a	0	00-06-07
End Shear	49 lbs	7521 lbs	0.6%	0	00-02-10
Span / Depth	1.0				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Beam 2-5/8" x 3-1/2"	82 lbs	2.6%	1.1%	Unspecified
B2	Beam 5-1/4" x 3-1/2"	116 lbs	1.8%	0.8%	Unspecified

Notes

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020

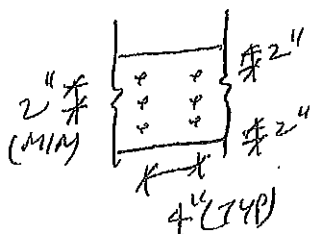

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 4" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



OWN NO. TAM6095 -20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 10:01


PROJECT
J1 1ST FLOOR.wwb

Design Check Calculation Sheet Nordic Sizer - Canada 7.2

Loads:

Load	Type	Distribution	Pat- tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

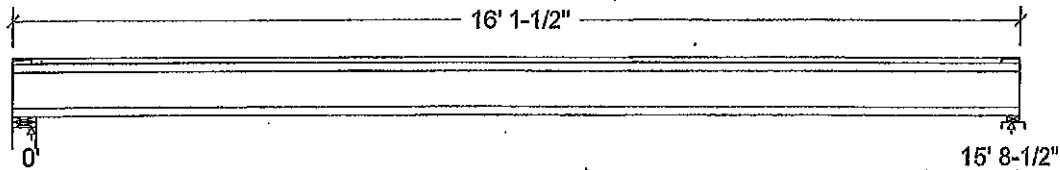

Unfactored:			
Dead	157		157
Live	314		314
Factored:			
Total	668		668
Bearing:			
Capacity			
Joist	1893		1865
Support	7744		3971
Des ratio			
Joist	0.35		0.36
Support	0.09		0.17
Load case	#2		#2
Length	4-3/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	-		1.00
fcp sup	769		769
Kzcp sup	-		1.09

Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

Nordic 9-1/2" NI-40x Floor joist @ 12" o.c.

Supports: 1 - Lumber Wall, No.1/No.2; 2 - Lumber Sill plate, No.1/No.2;
Total length: 16' 1-1/2"; Clear span: 15' 6-3/4"; 3/4" nailed and glued OSB sheathing
This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 668	Vr = 1895	lbs	Vf/Vr = 0.35
Moment (+)	Mf = 2622	Mr = 4824	lbs-ft	Mf/Mr = 0.54
Perm. Defl'n	0.12 = < L/999	0.52 = L/360	in	0.22
Live Defl'n	0.23 = L/817	0.39 = L/480	in	0.59
Total Defl'n	0.35 = L/545	0.79 = L/240	in	0.44
Bare Defl'n	0.28 = L/684	0.52 = L/360	in	0.53
Vibration	Lmax = 15'-8.5	Lv = 17'-1.8	ft	0.92
Defl'n	= 0.031	= 0.041	in	0.76



OWN NO. 74M6078-20
STRUCTURAL
COMPLIMENT ONLY

Additional Data:

FACTORS:	F/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	1895	1.00	1.00	-	-	-	-	-	#2
Mr+	4824	1.00	1.00	-	1.000	-	-	-	#2
EI	218.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth,groundwater E=earthquake

L=live(use,occupancy) Ls=live(storage,equipment) f=fire

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:E_{ieff} = 265.29 lb-in² K= 4.94e06 lbs

"Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO OBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.



OWB NO. 74M6078-20
STRUCTURAL
COMPONENT ONLY

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B1(1955)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

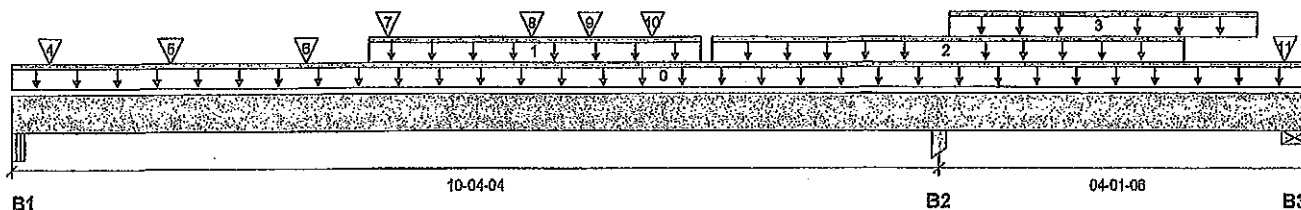

Total Horizontal Product Length = 14-05-10

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1 5-1/4"	3149 / 27	1723 / 0		
B2 4-1/2"	5407 / 0	2876 / 0		
B3 5-1/2"	4368 / 1288	3245 / 0		

Load Summary


Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	14-05-10	Top	1.00	0.65	1.00	1.15	00-00-00
1	STAIR	Unf. Lin. (lb/ft)	L	03-11-10	07-07-10	Top	240	120			n/a
2	Smoothed Load	Unf. Lin. (lb/ft)	L	07-09-02	13-01-02	Top	323	161			n/a
3	STAIR	Unf. Lin. (lb/ft)	L	10-05-06	13-10-10	Top	240	120			n/a
4	J2(i2040)	Conc. Pt. (lbs)	L	00-05-02	00-05-02	Top	1454	789			n/a
5	J2(i2099)	Conc. Pt. (lbs)	L	01-09-02	01-09-02	Top	431	215			n/a
6	-	Conc. Pt. (lbs)	L	03-03-04	03-03-04	Top	522	261			n/a
7	-	Conc. Pt. (lbs)	L	04-02-02	04-02-02	Top	710	417			n/a
8	J2(i2016)	Conc. Pt. (lbs)	L	05-09-02	05-09-02	Top	295	147			n/a
9	J2DJ(i2081)	Conc. Pt. (lbs)	L	06-04-10	06-04-10	Top	255	127			n/a
10	J2(i1959)	Conc. Pt. (lbs)	L	07-01-02	07-01-02	Top	332	166			n/a
11	-	Conc. Pt. (lbs)	L	14-02-06	14-02-06	Top	3733	3598			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	9867 ft-lbs	23220 ft-lbs	42.5%	2	04-05-02
Neg. Moment	-10975 ft-lbs	-23220 ft-lbs	47.3%	1	10-04-04
End Shear	3496 lbs	11571 lbs	30.2%	2	01-02-12
Cont. Shear	5922 lbs	11571 lbs	51.2%	1	09-04-08
Total Load Deflection	L/584 (0.205")	n/a	41.1%	9	04-11-02
Live Load Deflection	L/886 (0.135")	n/a	40.7%	12	04-11-02
Total Neg. Defl.	L/999 (-0.021")	n/a	n/a	9	11-10-09
Max Defl.	0.205"	n/a	n/a	9	04-11-02
Span / Depth	12.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Beam 5-1/4" x 3-1/2"	6878 lbs	70.1%	30.7%	Unspecified
B2	Column 4-1/2" x 3-1/2"	11705 lbs	91.5%	60.9%	Unspecified
B3	Wall/Plate 5-1/2" x 3-1/2"	10607 lbs	89.6%	45.2%	Spruce-Pine-Fir

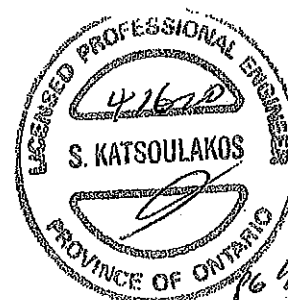

UWG NO. 7AM 6088-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLR FRAMING\Flush Beams\B1(i1955) (Flush Beam)

Dry | 2 spans | No cant.

February 10, 2020 11:38:52

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 6 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B1(i1955)

Specifier:

Designer:

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDED 3 ROWS OF 3/4" ARDOR
SPIRAL NAILS @ 8" O/C FOR
MULTI-PLY NAILING. MAINTAIN
A MIN. 2" LUMBER EDGE/END
DISTANCE. DO NOT USE AIR NAILS

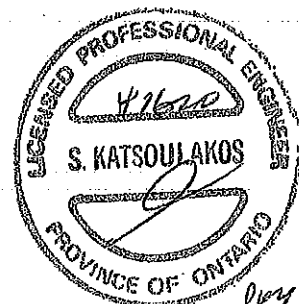

DWG NO. TAM 6008-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™,
ALLJOIST®, BC RIM BOARD™, BCI®,
BOISE GLULAM™, BC FloorValue®,
VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B2(I1994)

Specifier:

Designer:

Company:

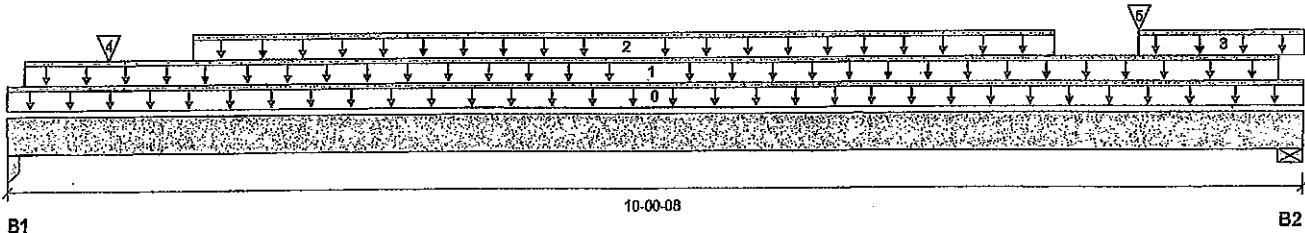

Total Horizontal Product Length = 10-00-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 1-3/4"	985 / 0	834 / 0		
B2, 1-7/8"	942 / 0	810 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-00-08	Top	1.00	0.65	1.00	1.15	00-00-00
1	WALL	Unf. Lin. (lb/ft)	L	00-01-12	09-10-02	Top		60			n/a
2	Smoothed Load	Unf. Lin. (lb/ft)	L	01-05-10	08-01-10	Top	210	104			n/a
3	FC1 Floor Material	Unf. Lin. (lb/ft)	L	08-09-10	10-00-08	Top	22				n/a
4	J4(I1985)	Conc. Pt. (lbs)	L	00-09-10	00-09-10	Top	244	122			n/a
5	J4(I1973)	Conc. Pt. (lbs)	L	08-09-10	08-09-10	Top	262	131			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	6498 ft-lbs	23220 ft-lbs	28.0%	1	04-09-10
End Shear	2370 lbs	11571 lbs	20.5%	1	09-01-02
Total Load Deflection	L/728 (0.163")	n/a	33.0%	4	05-00-10
Live Load Deflection	L/999 (0.089")	n/a	n/a	5	05-00-10
Max Defl.	0.163"	n/a	n/a	4	05-00-10
Span / Depth	12.5				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 1-3/4" x 3-1/2"	2520 lbs	50.7%	33.7%	Unspecified
B2	Wall/Plate 1-7/8" x 3-1/2"	2426 lbs	60.1%	30.3%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020

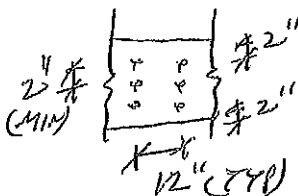

PROVIDE 3 ROWS OF 3/4" ARDXX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS

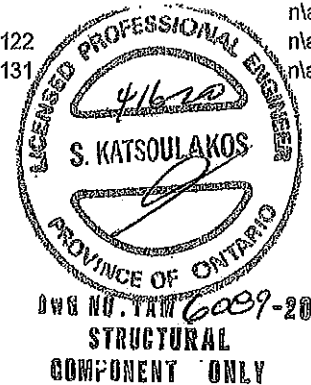

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B3(i1931)

Specifier:

Designer:

Company:

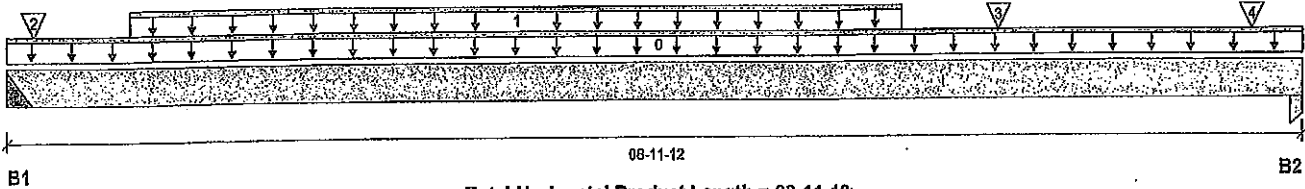

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	358 / 0	222 / 0		
B2, 3-1/2"	810 / 0	999 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	08-11-12	Top	100	0.65	1.00	1.15	00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	00-10-04	06-02-04	Top	80	40			n/a
2	J7(i2069)	Conc. Pt. (lbs)	L	00-02-04	00-02-04	Top	67	34			n/a
3	J7(i2079)	Conc. Pt. (lbs)	L	06-10-04	06-10-04	Top	108	54			n/a
4	-	Conc. Pt. (lbs)	L	08-07-07	08-07-07	Top	559	830			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1714 ft-lbs	23220 ft-lbs	7.4%	1	04-02-04
End Shear	706 lbs	11571 lbs	6.1%	1	07-10-12
Total Load Deflection	L/999 (0.032")	n/a	n/a	4	04-04-04
Live Load Deflection	L/999 (0.02")	n/a	n/a	5	04-04-04
Max Defl.	0.032"	n/a	n/a	4	04-04-04
Span / Depth	10.9				

Bearing Supports


	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Hanger 2" x 3-1/2"	813 lbs	n/a	9.5%	Hanger
B2	Column 3-1/2" x 3-1/2"	2463 lbs	24.8%	16.5%	Unspecified

Cautions

Hanger model Hanger was not found. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Calculations assume unbraced length of Top: 00-00-00, Bottom: 00-00-00. **CONFORMS TO OBC 2012**
 Hanger Manufacturer: Unassigned
 Resistance Factor phi has been applied to all presented results per CSA O86. **AMENDED 2020**
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 9

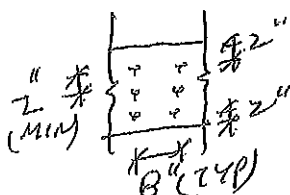

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



OWB NO. YAW 6090-20
STRUCTURAL COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).
 Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods.
 Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code:

Customer:

Code reports:

CCMC 12472-R


File name: MOUNTAINASH 6 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B4(i2084)

Specifier:

Designer:

Company:

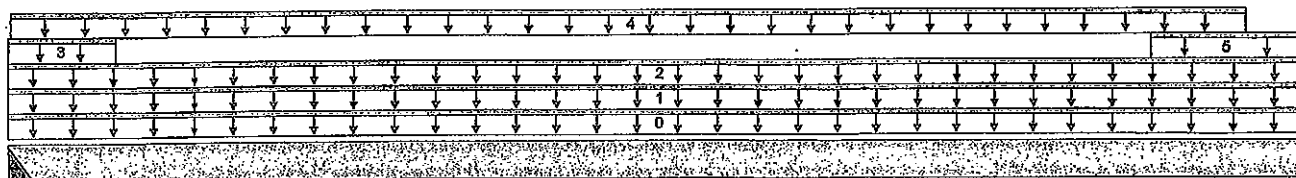

B1

08-05-00

B2

Total Horizontal Product Length = 06-05-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	344 / 0	618 / 0		
B2, 3-1/2"	167 / 0	496 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	06-05-00	Top		5			00-00-00
1	3(i760)	Unf. Lin. (lb/ft)	L	00-00-00	06-05-00	Top		81			n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	06-05-00	Top	19	9			n/a
3	3(i760)	Unf. Lin. (lb/ft)	L	00-00-00	00-06-06	Top	427	536			n/a
4	3(i760)	Unf. Lin. (lb/ft)	L	00-00-02	06-01-08	Top	20	12			n/a
5	3(i760)	Unf. Lin. (lb/ft)	L	05-08-00	06-05-00	Top	53	192			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	748 ft-lbs	7546 ft-lbs	9.9%	0	03-01-12
End Shear	594 lbs	3761 lbs	15.8%	0	00-11-08
Total Load Deflection	L/999 (0.02")	n/a	n/a	4	03-01-12
Live Load Deflection	L/999 (0.006")	n/a	n/a	5	03-00-15
Max Defl.	0.02"	n/a	n/a	4	03-01-12
Span / Depth	7.7				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Hanger 2" x 1-3/4"	865 lbs	n/a	31.2%	Hanger
B2	Column 3-1/2" x 1-3/4"	694 lbs	21.5%	14.3%	Unspecified

Cautions

Hanger model Hanger was not found. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO CBC 2012

AMENDED 2020



Structural COM. QMENT ONLY Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B5(I2038)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

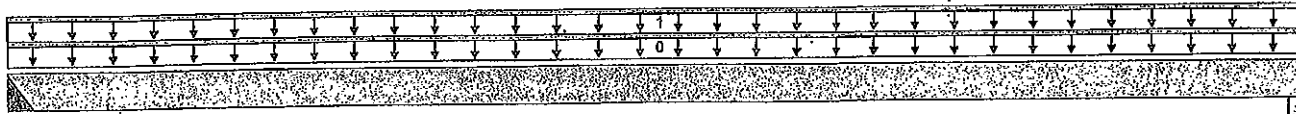

05-01-02

B1

B2

Total Horizontal Product Length = 05-01-02

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	44 / 0	34 / 0		
B2, 1-3/4"	44 / 0	34 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	05-01-02	Top		5			00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	05-01-02	Top	17	9			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	129 ft-lbs	11610 ft-lbs	1.1%	1	02-06-11
End Shear	68 lbs	5785 lbs	1.2%	1	00-11-08
Total Load Deflection	L/999 (0.002")	n/a	n/a	4	02-06-11
Live Load Deflection	L/999 (0.001")	n/a	n/a	5	02-06-11
Max Defl.	0.002"	n/a	n/a	4	02-06-11
Span / Depth	6.2				

			Demand/Resistance Support	Demand/Resistance Member	Material	
Bearing Supports	Dim. (LxW)	Demand				
B1	Hanger	2" x 1-3/4"	109 lbs	n/a	2.6%	Hanger
B2	Column	1-3/4" x 1-3/4"	108 lbs	4.4%	2.9%	Unspecified

Cautions

Hanger model Hanger was not found. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO DBC 2012

AMENDED 2020



SWH NO. TAM 6092-20
STRUCTURAL
COMPONENT ONLY


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report
Build 7239
Job name:
File name: MOUNTAINASH 6 EL 1.mmdl

Address:
Description: 1ST FLR FRAMING\Flush Beams\B6(i2036)

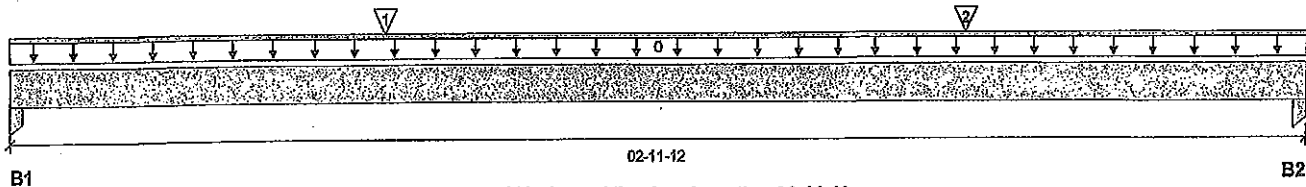City, Province, Postal Code:
Specifier:
Customer:
Designer:
Code reports:
CCMC 12472-R
Company:

Total Horizontal Product Length = 02-11-12
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	113 / 0	64 / 0		
B2, 3-1/2"	119 / 0	67 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	02-11-12	Top	5				00-00-00
1	J6(i1935)	Conc. Pt. (lbs)	L	00-10-06	00-10-06	Top	118	59			n/a
2	J6(i2002)	Conc. Pt. (lbs)	L	02-02-06	02-02-06	Top	114	57			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	157 ft-lbs	11610 ft-lbs	1.3%	1	00-10-11
End Shear	174 lbs	5785 lbs	3.0%	1	01-01-00
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	01-05-14
Live Load Deflection	L/999 (0")	n/a	n/a	5	01-05-14
Max Defl.	0.001"	n/a	n/a	4	01-05-14
Span / Depth	3.2				

				Demand/ Resistance Support	Demand/ Resistance Member	
Bearing Supports	Dim. (LxW)		Demand			Material
B1	Column	3-1/2" x 1-3/4"	249 lbs	5.0%	3.3%	Unspecified
B2	Column	3-1/2" x 1-3/4"	261 lbs	5.3%	3.5%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.


Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

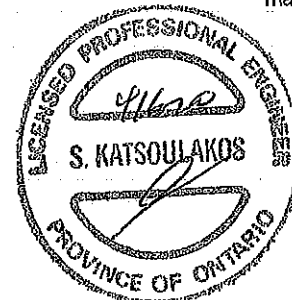CONFORMS TO CBC 2012
AMENDED 2020

AWG NO. TAM 6093-20
STRUCTURAL
COMPONENT ONLY
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.



Single 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLR FRAMING\Flush Beams\B7(I2063) (Flush Beam)

Dry | 1 span | No cant.

February 10, 2020 11:38:52

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 6 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B7(I2063)

City, Province, Postal Code:

Specifier:


Customer:

Designer:

Code reports:

CCMC 12472-R

Company:

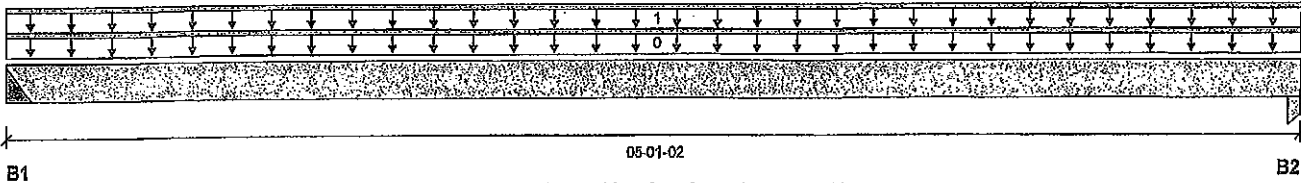

Total Horizontal Product Length = 05-01-02

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	40 / 0	32 / 0		
B2, 1-3/4"	40 / 0	32 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	05-01-02	Top	1.00	0.65	1.00	1.15	
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	05-01-02	Top	16	8			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	118 ft-lbs	11610 ft-lbs	1.0%	1	02-06-11
End Shear	63 lbs	5785 lbs	1.1%	1	00-11-08
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	02-06-11
Live Load Deflection	L/999 (0.001")	n/a	n/a	5	02-06-11
Max Defl.	0.001"	n/a	n/a	4	02-06-11
Span / Depth	6.2				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Hanger	2" x 1-3/4"	100 lbs	n/a	2.3%	Hanger
B2 Column	1-3/4" x 1-3/4"	99 lbs	4.0%	2.7%	Unspecified

Cautions

Hanger model Hanger was not found. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



UWB NO. TAM 6094 -20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJSTM®, ALLJOIST®, BC RIM BOARD™, BCIO®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 6 EL 1 DECK CONDITION.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B1A(12350)

Specifier:

Designer: AJ

Company:

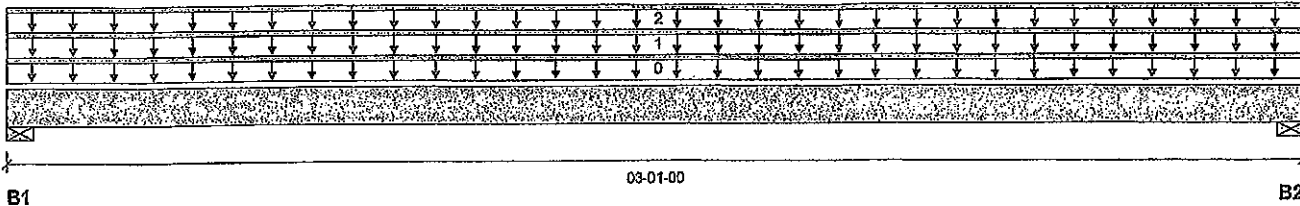

Total Horizontal Product Length = 03-01-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3"	41 / 0	160 / 0		
B2, 3"	41 / 0	160 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	10				00-00-00
1	E3(i585)	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	81				n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	27	13			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	133 ft-lbs	15093 ft-lbs	0.9%	0	01-06-08
End Shear	73 lbs	7521 lbs	1.0%	0	01-00-08
Total Load Deflection	L/999 (0")	n/a	n/a	4	01-06-08
Live Load Deflection	L/999 (0")	n/a	n/a	5	01-06-08
Max Defl.	0"	n/a	n/a	4	01-06-08
Span / Depth	3.4				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3" x 3-1/2"	224 lbs	5.3%	2.7%	Spruce-Pine-Fir
B2	Wall/Plate 3" x 3-1/2"	224 lbs	5.3%	2.7%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

CONFORMS TO UBC 2012

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

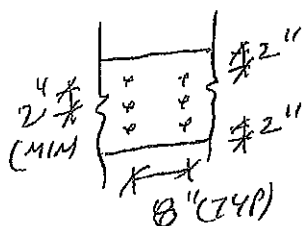

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLR FRAMING\Flush Beams\B1B(I2351) (Flush Beam)

Dry | 1 span | No cant.

April 16, 2020 08:43:03

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 6 EL 1 DECK CONDITION.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B1B(I2351)

Specifier:

Designer: AJ

Company:

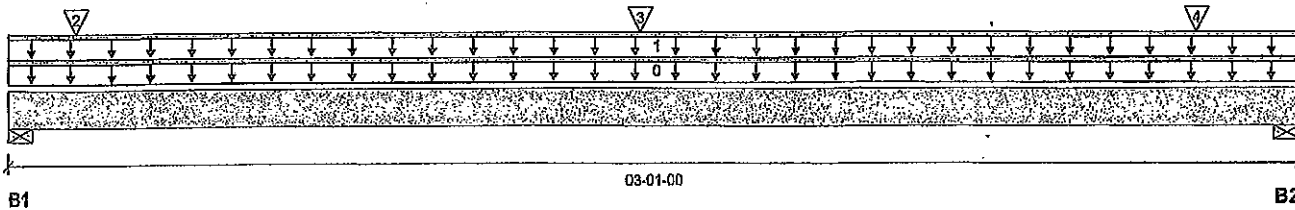

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3"	938 / 0	810 / 0		
B2, 3"	928 / 0	604 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	1.00	0.65	1.00	1.15	00-00-00
1	E9(I588)	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	270	216			n/a
2	J3(I2302)	Conc. Pt. (lbs)	L	00-02-00	00-02-00	Top	345	173			n/a
3	J3(I2284)	Conc. Pt. (lbs)	L	01-06-00	01-06-00	Top	345	173			n/a
4	J3(I2227)	Conc. Pt. (lbs)	L	02-10-00	02-10-00	Top	345	173			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1125 ft-lbs	23220 ft-lbs	4.8%	1	01-06-00
End Shear	721 lbs	11571 lbs	6.2%	1	01-00-08
Total Load Deflection	L/999 (0.002")	n/a	n/a	4	01-06-07
Live Load Deflection	L/999 (0.001")	n/a	n/a	5	01-06-07
Max Defl.	0.002"	n/a	n/a	4	01-06-07
Span / Depth	3.4				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3" x 3-1/2"	2170 lbs	33.6%	16.9%	Spruce-Pine-Fir
B2	Wall/Plate 3" x 3-1/2"	2147 lbs	33.2%	16.8%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.


Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

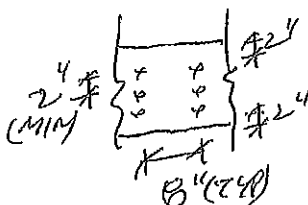

PROVIDE 3 ROWS OF 3x8 ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



OWN NO. TAM6097-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).

Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods.

Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,




Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-0"	16'-0"	15'-1"	13'-11"	17'-0"	16'-0"	15'-1"	13'-11"
	NI-60	17'-2"	16'-2"	15'-5"	14'-3"	17'-2"	16'-2"	15'-5"	14'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-6"	18'-0"	17'-3"	16'-7"	15'-6"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-3"	17'-5"	16'-9"	15'-10"
11-7/8"	NI-20	17'-10"	16'-10"	16'-0"	14'-10"	18'-6"	17'-1"	16'-0"	14'-10"
	NI-40x	19'-4"	17'-11"	17'-3"	15'-10"	19'-11"	18'-6"	17'-9"	15'-10"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-1"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-5"	22'-1"	20'-6"	19'-6"	17'-5"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-9"	16'-1"	15'-1"	13'-11"	17'-9"	16'-1"	15'-1"	13'-11"
	NI-60	18'-1"	16'-5"	15'-5"	14'-3"	18'-1"	16'-5"	15'-5"	14'-3"
	NI-70	19'-10"	17'-11"	16'-9"	15'-6"	19'-10"	17'-11"	16'-9"	15'-6"
	NI-80	20'-2"	18'-3"	17'-1"	15'-10"	20'-2"	18'-3"	17'-1"	15'-10"
11-7/8"	NI-20	18'-10"	17'-1"	16'-0"	14'-10"	18'-10"	17'-1"	16'-0"	14'-10"
	NI-40x	21'-3"	19'-3"	17'-9"	15'-10"	21'-3"	19'-3"	17'-9"	15'-10"
	NI-60	21'-9"	19'-8"	18'-5"	17'-1"	21'-9"	19'-8"	18'-5"	17'-1"
	NI-70	23'-4"	21'-5"	20'-1"	18'-6"	23'-8"	21'-5"	20'-1"	18'-6"
	NI-80	23'-7"	21'-10"	20'-5"	18'-11"	24'-1"	21'-10"	20'-5"	18'-11"
14"	NI-90x	24'-3"	22'-6"	21'-3"	19'-7"	24'-8"	22'-7"	21'-3"	19'-7"
	NI-40x	24'-2"	21'-5"	19'-6"	17'-5"	24'-2"	21'-5"	19'-6"	17'-5"
	NI-60	24'-9"	22'-5"	21'-0"	19'-6"	24'-9"	22'-5"	21'-0"	19'-6"
	NI-70	26'-1"	24'-3"	22'-9"	21'-0"	26'-8"	24'-3"	22'-9"	21'-0"
	NI-80	26'-6"	24'-7"	23'-3"	21'-6"	27'-1"	24'-10"	23'-3"	21'-6"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-4"	27'-9"	25'-10"	24'-3"	22'-4"
	NI-60	27'-3"	24'-11"	23'-5"	21'-7"	27'-6"	24'-11"	23'-5"	21'-7"
	NI-70	28'-8"	26'-8"	25'-3"	23'-4"	29'-3"	26'-11"	25'-3"	23'-4"
	NI-80	29'-2"	27'-0"	25'-9"	23'-10"	29'-8"	27'-6"	25'-10"	23'-10"
	NI-90x	29'-11"	27'-10"	26'-6"	24'-10"	30'-6"	28'-5"	26'-11"	24'-10"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-1274C.




Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf
Simple spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-2"	13'-9"	N/A	15'-7"	14'-8"	14'-2"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-8"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	N/A	16'-8"	15'-3"	14'-5"	N/A
	NI-40x	17'-11"	16'-11"	16'-1"	N/A	18'-5"	17'-1"	16'-1"	N/A
	NI-60	18'-2"	17'-1"	16'-4"	N/A	18'-7"	17'-4"	16'-4"	N/A
	NI-70	19'-2"	17'-10"	17'-2"	N/A	19'-7"	18'-3"	17'-7"	N/A
	NI-80	19'-5"	18'-0"	17'-4"	N/A	19'-10"	18'-5"	17'-8"	N/A
11-7/8"	NI-20	19'-6"	18'-1"	17'-3"	N/A	19'-11"	18'-3"	17'-3"	N/A
	NI-40x	21'-0"	19'-6"	18'-8"	N/A	21'-7"	20'-2"	19'-2"	N/A
	NI-60	21'-4"	19'-9"	18'-11"	N/A	21'-11"	20'-4"	19'-6"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-5"	20'-5"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-8"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-11"	20'-11"	N/A	24'-3"	22'-7"	21'-7"	N/A
	NI-60	24'-0"	22'-3"	21'-3"	N/A	24'-8"	22'-11"	21'-11"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-11"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-5"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	25'-3"	24'-2"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of $1.50L + 1.25D$. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.





Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
3/4" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-9"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-6"	16'-7"	15'-11"	15'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-7"	18'-5"	17'-3"	16'-7"	15'-11"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-6"	18'-6"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-6"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-11"	22'-1"	20'-6"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-1"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-70	20'-0"	18'-7"	17'-9"	16'-7"	20'-5"	18'-11"	17'-10"	16'-7"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-7"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-70	23'-4"	21'-8"	20'-8"	19'-7"	23'-10"	22'-3"	21'-2"	19'-9"
	NI-80	23'-7"	21'-11"	20'-11"	19'-9"	24'-1"	22'-6"	21'-5"	20'-0"
14"	NI-90x	24'-3"	22'-6"	21'-6"	20'-4"	24'-8"	23'-0"	22'-0"	20'-9"
	NI-40x	24'-5"	22'-9"	21'-8"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
	NI-60	24'-10"	23'-1"	22'-0"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-70	26'-1"	24'-3"	23'-2"	21'-10"	26'-8"	24'-11"	23'-9"	22'-4"
	NI-80	26'-6"	24'-7"	23'-5"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-9"	27'-9"	25'-11"	24'-8"	23'-4"
	NI-60	27'-3"	25'-5"	24'-2"	22'-10"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-70	28'-8"	26'-8"	25'-4"	23'-11"	29'-3"	27'-4"	26'-1"	24'-8"
	NI-80	29'-1"	27'-0"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90x	29'-11"	27'-10"	26'-6"	25'-0"	30'-6"	28'-5"	27'-2"	25'-8"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



Maximum Floor Spans



Live Load = 40 psf, Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	17'-9"	16'-1"	15'-1"	N/A	17'-9"	16'-1"	15'-1"	N/A
	NI-60	18'-1"	16'-4"	15'-4"	N/A	18'-1"	16'-4"	15'-4"	N/A
	NI-70	19'-2"	17'-10"	16'-9"	N/A	19'-7"	17'-10"	16'-9"	N/A
	NI-80	19'-5"	18'-0"	17'-1"	N/A	19'-10"	18'-3"	17'-1"	N/A
11-7/8"	NI-20	18'-9"	17'-0"	16'-0"	N/A	18'-9"	17'-0"	16'-0"	N/A
	NI-40x	21'-0"	19'-3"	17'-9"	N/A	21'-3"	19'-3"	17'-9"	N/A
	NI-60	21'-4"	19'-8"	18'-5"	N/A	21'-8"	19'-8"	18'-5"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-4"	20'-0"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-5"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-5"	19'-6"	N/A	24'-1"	21'-5"	19'-6"	N/A
	NI-60	24'-0"	22'-3"	21'-0"	N/A	24'-8"	22'-5"	21'-0"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-9"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	24'-10"	23'-4"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

1W-1

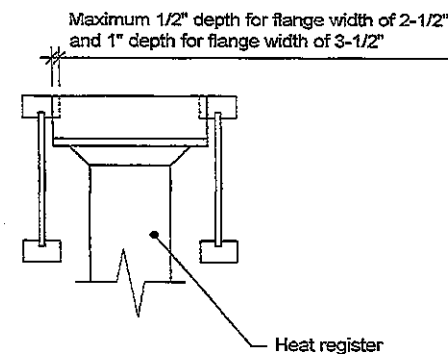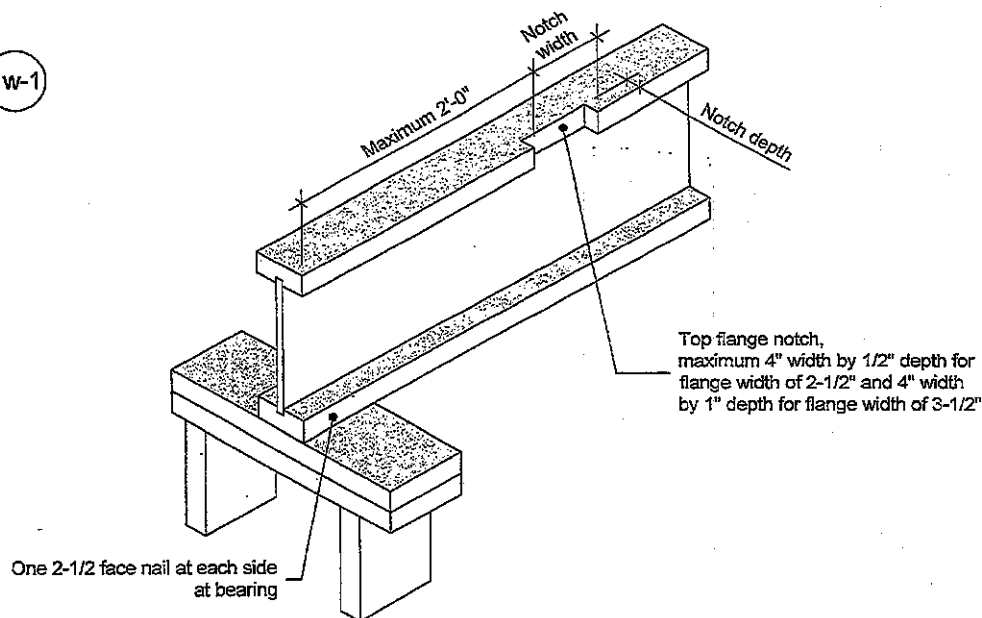

Notes:

1. Blocking required at bearing for lateral support, not shown for clarity.
2. The maximum dimensions for a notch on the side of the top flange are 4-inch width by 1/2-inch depth for flange width of 2-1/2 inches, and 4-inch width by 1-inch depth for flange width of 3-1/2 inches.
3. This detail applies to simple-span joists and multiple-span joists where the notch is located at the end half-span.
4. For other applications, contact Nordic Structures.

This document supersedes all previous versions. If the document has been in effect for more than one year, consult nordic.ca or contact Nordic Structures.

All nails shown in the details are assumed to be common nails unless otherwise noted. Nails shall have a diameter not less than 0.128 inch for 2-1/2-inch nails, or 0.144 inch for 3-inch nails. Individual components not shown to scale for clarity.

NORDIC
STRUCTURES

T 514-871-8526
1 866 817-3418
nordic.ca

TITLE
Notch in I-joist for Heat Register

CATEGORY
I-joist - Typical Floor Framing and Construction Details

DOCUMENT

-

DATE

2018-04-10

NUMBER


1W-1

Allowance for Piping (Installation Notes)

The floor layouts have usually not been checked for heating and/or plumbing interference. On-site adjustment of joists of up to 3 inches is permitted to avoid interferences. When moving a joist, the subfloor thickness shall be checked with code requirements when the joist spacing exceeds 19.2 inches. Except for cutting to length, I-joist flanges should never be cut, drilled, or notched.

Installation of Nordic I-joists shall be as per *Nordic Joist Installation Guide for Residential Floors*. Refer to Tables 1 and 2 for maximum web hole and duct chase openings, respectively. These tables are based on the I-joists being used at their maximum spans. The minimum distance given may be reduced for shorter spans; contact your distributor for additional information.

The detail below shows the 3-inch allowance for piping. Every third joist may be shifted up to 3 inches to avoid heating/plumbing interference. For other applications, please contact your distributor.

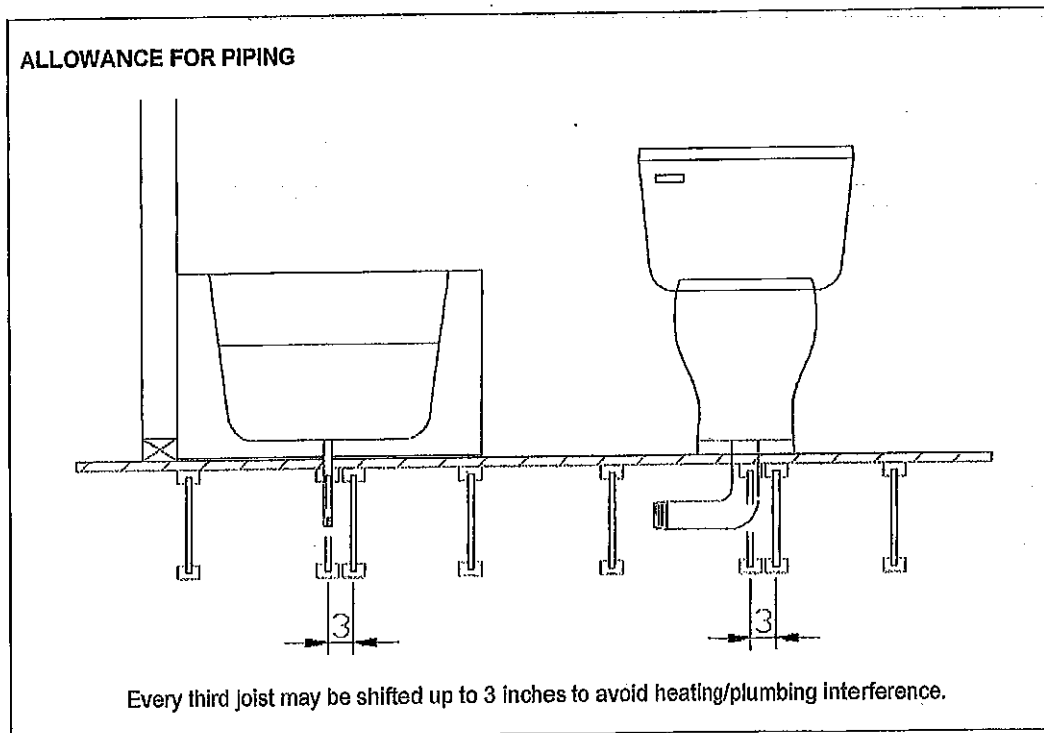

Revised April 12, 2012