

# REVEAL™



**MILOS VARAKLIC 161  
CHARNWOOD DRIVE,  
OAKVILLE**

For help with questions about the specifications provided for your configuration, call us toll-free between 8am-5pm CST at [\(866\) 689-9653](tel:8666899653).

Disclaimer: We strongly recommend saving all Reveal configurations to "My Sub-Zero Account" to ensure the most up-to-date specification information is reflected on your shared documents as product specifications are subject to change without notice. Otherwise, we suggest that this configuration be recreated prior to finalizing your cabinetry enclosures. The reveal listed in this configuration is the minimum reveal suggested by the manufacturer.

## Group 1: Flush Inset Installation

### Specifications:

Specifications Summary

Planning Notes

Front View

Side View

Top View

MDD30CM/B/TH Additional  
Requirements

SO30CE/B/TH Additional  
Requirements



MDD30CM/B/TH

30" M Series Contemporary Drop-down Door Microwave Oven



SO30CE/B/TH













30" E Series Contemporary Built-In Single Oven

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

## Specifications Summary

Group 1

## SECTION A

MODEL	OVERALL DIMENSIONS	OPENING DIMENSIONS	CLEAT DEPTH	TRIM OVERLAP	BASE SUPPORT
MDD30CM/B/TH	29 <sup>7</sup> / <sub>8</sub> " 	22 <sup>1</sup> / <sub>8</sub> " 	<sup>7</sup> / <sub>8</sub> "	<sup>3</sup> / <sub>16</sub> " Top	125 lbs
<a href="#">3D Studio Max (3DS)</a>	17 <sup>7</sup> / <sub>8</sub> " 	17 <sup>11</sup> / <sub>16</sub> " 		0" Bottom	
<a href="#">3D AutoCad (DWG)</a>	20" 	21 <sup>9</sup> / <sub>16</sub> " 		3 <sup>7</sup> / <sub>8</sub> " Sides	
<a href="#">2D AutoCad (DWG)</a>					
<a href="#">AutoCad (DXF)</a>					
<a href="#">ArchiCad (GSM)</a>					
<a href="#">3D Studio Max (MAX)</a>					
<a href="#">Wavefront 3D (OBJ)</a>					
<a href="#">Revit Files (RFA)</a>					
<a href="#">SketchUp (SKP)</a>					
<a href="#">QR SHEET</a>					
<a href="#">Wolf Design Guide</a>					
<a href="#">Model Detail</a>					
SO30CE/B/TH	29 <sup>7</sup> / <sub>8</sub> " 	28 <sup>1</sup> / <sub>2</sub> " 	1 <sup>1</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> " Top	250 lbs
<a href="#">3D Studio Max (3DS)</a>	27 <sup>7</sup> / <sub>8</sub> " 	27 <sup>1</sup> / <sub>4</sub> " 		<sup>1</sup> / <sub>8</sub> " Bottom	
<a href="#">3D AutoCad (DWG)</a>	23 <sup>3</sup> / <sub>4</sub> " 	24" 		<sup>11</sup> / <sub>16</sub> " Sides	
<a href="#">2D AutoCad (DWG)</a>					
<a href="#">AutoCad (DXF)</a>					
<a href="#">ArchiCad (GSM)</a>					
<a href="#">3D Studio Max (MAX)</a>					
<a href="#">Wavefront 3D (OBJ)</a>					
<a href="#">Revit Files (RFA)</a>					
<a href="#">SketchUp (SKP)</a>					
<a href="#">QR SHEET</a>					
<a href="#">Wolf Design Guide</a>					
<a href="#">Model Detail</a>					

## Planning Notes

Group 1

Cleats will be visible and should be finished to match the cabinetry.

If two products with different reveals are specified, the larger reveal must be used.

Dimensions provided assume minimum allowable reveals.

**Microwaves**

MDD30CM/B/TH: A minimum 1/8" (3) reveal is required on all sides.

## E Series Built-In Ovens


If a cooktop is being installed above an oven, a minimum of 1/4" (6) is required between units.

SO30CE/B/TH: For flush inset installations, a minimum of 1/4" reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

### Front View

Group 1


SECTION A

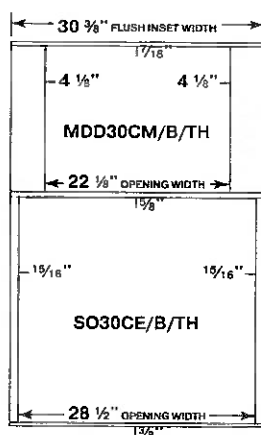

### Top View

Group 1


SECTION A



## Side View


Group 1

## SECTION A

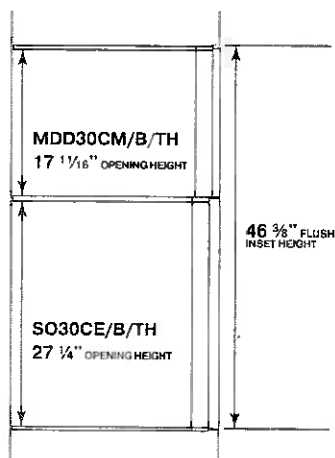

## MDD30CM/B/TH Overall Dimensions

Group 1

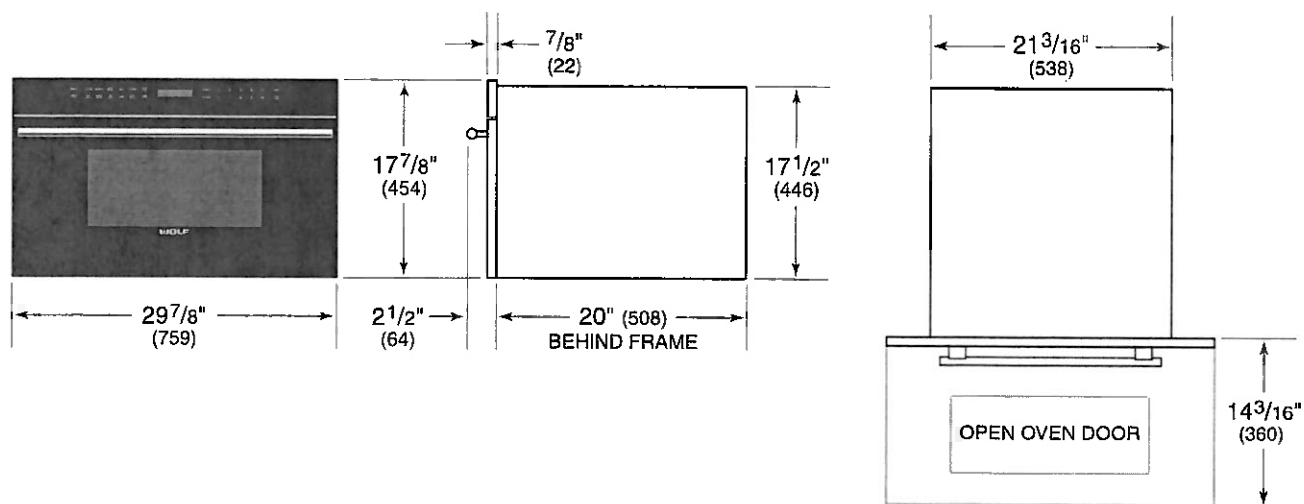

## MDD30CM/B/TH Electrical

Group 1

**E** ELECTRICAL SUPPLY WITHIN OPENING OR IN ADJACENT CABINET WITHIN REACH OF POWER CORD

**E**

&gt;


Electrical Supply	grounded, 120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type

**WARNING**

Installation must comply with all applicable electrical codes.


# S030CE/B/TH Overall Dimensions

Group 1

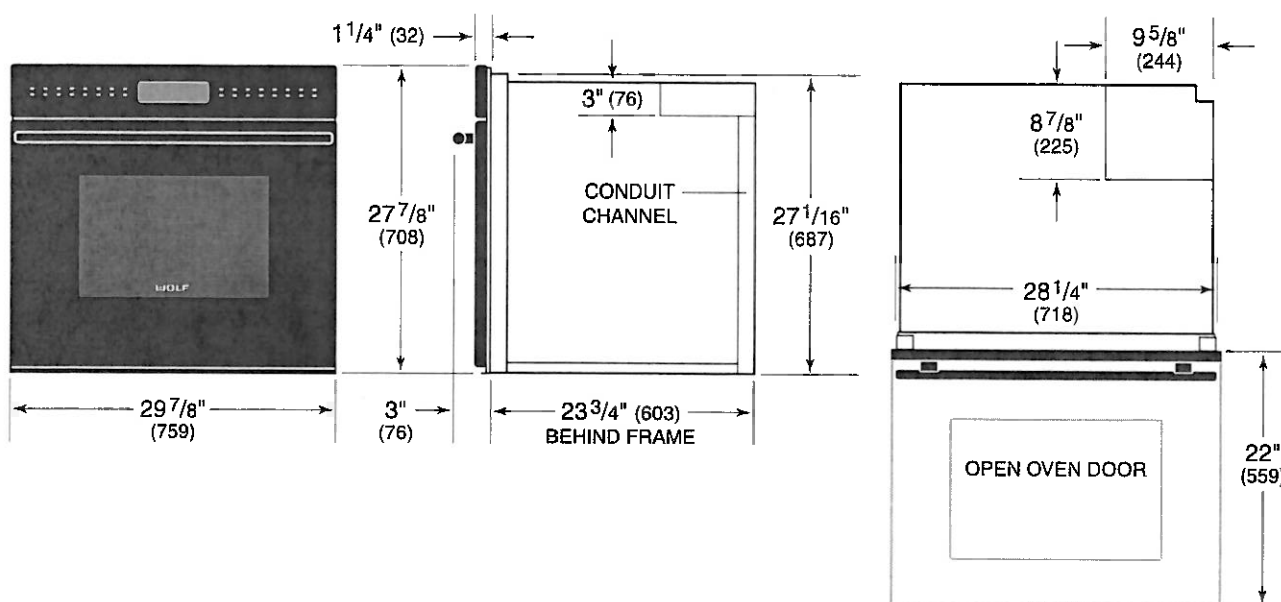

## SO30CE/B/TH Electrical

Group 1

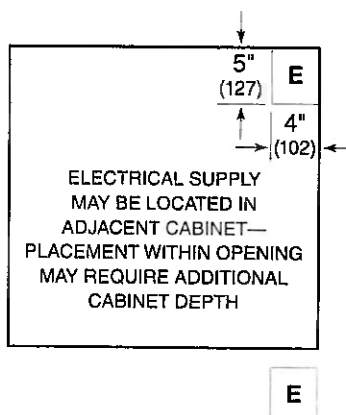

&gt;

Electrical Supply	grounded, 240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Conduit Length	4 Feet



## WARNING

Installation must comply with all applicable electrical codes.

Performance may be compromised if the electrical supply is less than 240 volts.

The oven is supplied with a conduit consisting of two insulated hot lead conductors and a bare ground conductor. The wiring diagram covering the control circuit is provided with the oven.



## BI-48SD/O: Opening Specs Only, Flush Inset Installation

### Specifications:

Specifications Summary

Front View

Front View Detail

Side View

Top View

Additional Requirements



**BI-48SD/O**  
48" Classic Side-by-Side Refrigerator/Freezer with Dispenser - Panel Ready



**7008926**  
Built-In 48" Stainless Steel Flush Inset Freezer Door Panel with Pro Handle



**7008929**  
Built-In 48" Stainless Steel Flush Inset Refrigerator Door Panel with Pro Handle



**7030224**  
Built-In 48" Stainless Steel Flush Inset Freezer Door Panel with Tubular Handle









**7030225**  
Built-In 48" Stainless Steel Flush Inset Refrigerator Door Panel with Tubular Handle

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

## Specifications Summary


Single Model: BI-48SD/O

MODEL	OVERALL DIMENSIONS	WEIGHT	FLUSH INSET OPENING DIMENSIONS
BI-48SD/O <a href="#">3D Studio Max (3DS)</a> <a href="#">3D AutoCad (DWG)</a> <a href="#">2D AutoCad (DWG)</a> <a href="#">AutoCad (DXF)</a> <a href="#">ArchiCad (GSM)</a> <a href="#">3D Studio Max (MAX)</a> <a href="#">Wavefront 3D (OBJ)</a> <a href="#">Revit Files (RFA)</a> <a href="#">SketchUp (SKP)</a> <a href="#">QR SHEET</a> <a href="#">Subzero Design Guide</a> <a href="#">Model Detail</a>	48"  84"  24" 	656 lbs	50"  84"  26 <sup>3</sup> / <sub>16</sub> " 

## Front View


Single Model: BI-48SD/O

BI-48SD/O

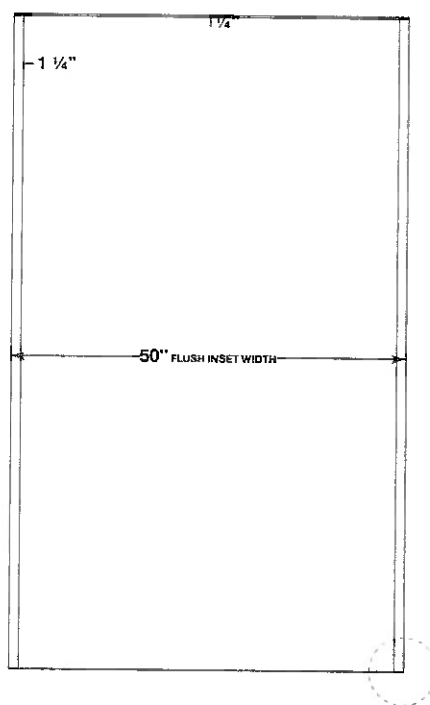

# Front View Detail


Single Model: BI-48SD/O

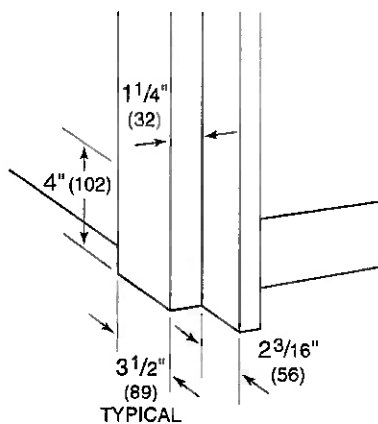

# Top View


Single Model: BI-48SD/O

BI-48SD/O

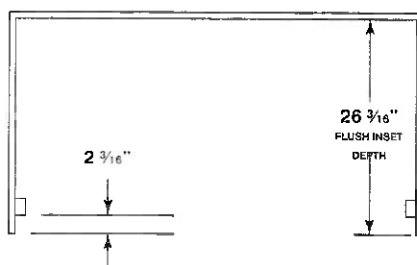


## Side View


Single Model: BI-48SD/O

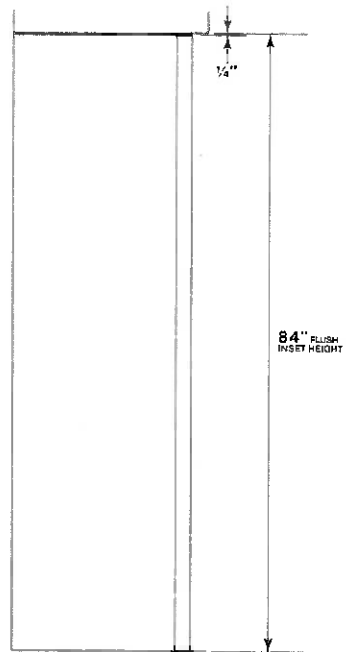

Single Model: BI-48SD/O

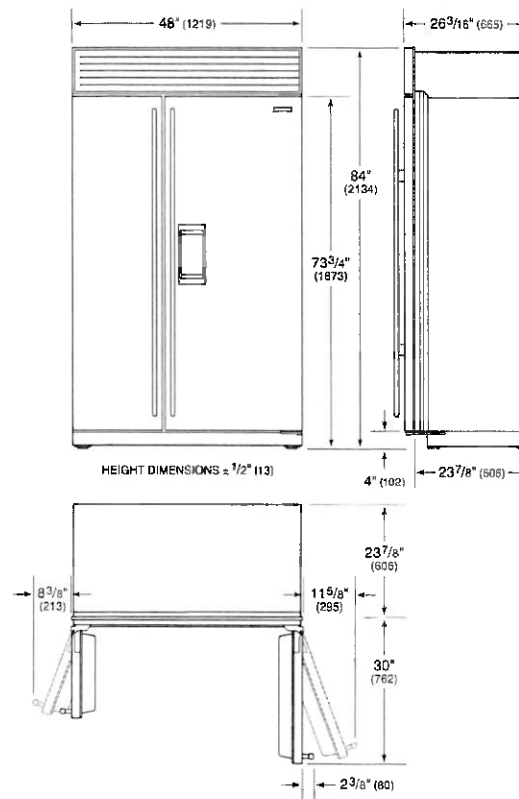

Single Model: BI-48SD/O

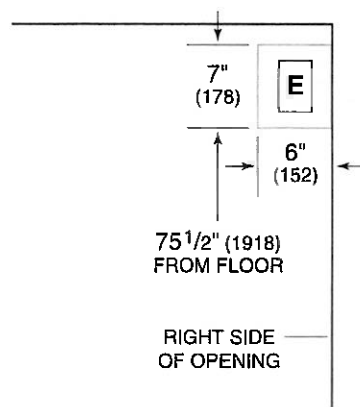

Electrical Supply	grounded, 115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type




Installation must comply with all applicable electrical codes.

A separate circuit, servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation. Installation must comply with all applicable electrical codes.

## Plumbing

Single Model: BI-48SD/O

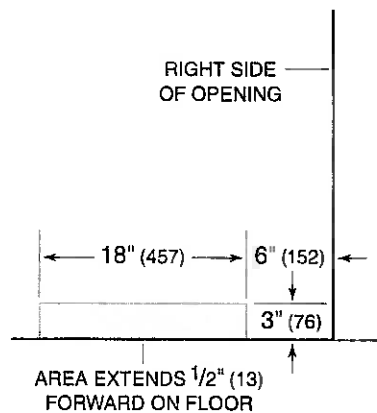

Excess Line For  
Connection 36"

The water supply line should be connected to the house supply with an easily accessible shut-off valve. Do not use self-piercing valves. The water supply line must not interfere with installation of the anti-tip brackets. A reverse osmosis system can be used provided there is constant water pressure of 35–120 psi (2.4–8.3 bar) supplied to the unit at all times. A copper line is not recommended for this application. Installation must comply with all applicable plumbing codes.

**CE365C/B: Standard Installation****Specifications:**

Specifications Summary

Planning Notes

Views

Additional Requirements






CE365C/B

36" Contemporary Electric Cooktop

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

## Specifications Summary

Single Model: CE365C/B

MODEL	OVERALL DIMENSIONS	WEIGHT
CE365C/B		60 lbs
<a href="#">3D Studio Max (3DS)</a>	36" 	
<a href="#">3D AutoCad (DWG)</a>	4" 	
<a href="#">2D AutoCad (DWG)</a>	21" 	
<a href="#">AutoCad (DXF)</a> <a href="#">ArchiCad (GSM)</a>		
<a href="#">3D Studio Max (MAX)</a>		
<a href="#">Wavefront 3D (OBJ)</a>		
<a href="#">Revit Files (RFA)</a> <a href="#">SketchUp (SKP)</a>		
<a href="#">QR SHEET</a> <a href="#">Wolf Design Guide</a>		
<a href="#">Model Detail</a>		

## Planning Notes

Single Model: CE365C/B

### Electric Cooktops


A minimum 2" (51) is required from the bottom of the cooktop to combustible materials. If a cooktop is installed above an oven, a minimum of 1/4" (6) is required between units.

If the cooktop is to be mounted flush with the countertop, a recessed area surrounding the cooktop cut-out must be provided. Flush mount installations are intended for granite, solid surface or stone countertop surfaces only.



## Views


Single Model: CE365C/B

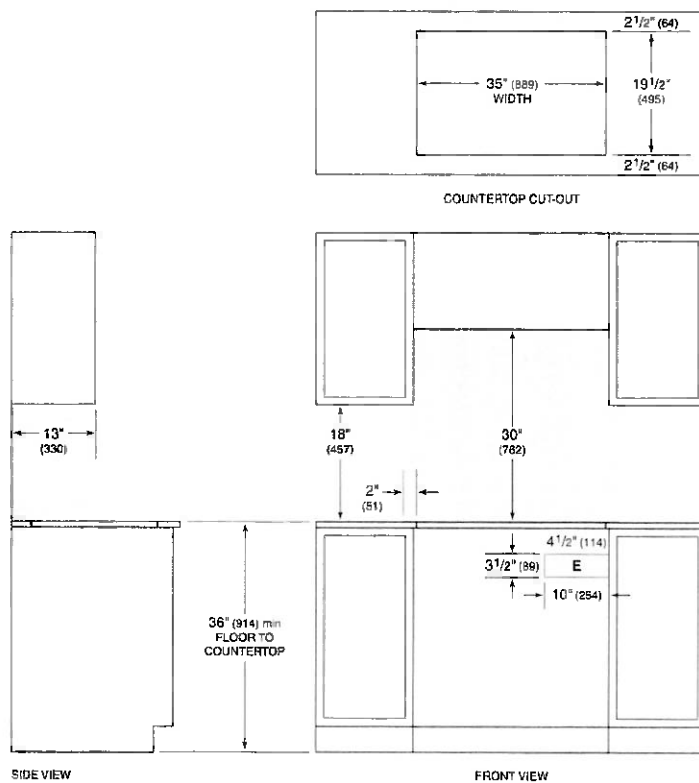

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
Electrical supply location only applies to installations with built-in oven.


## Overall Dimensions

Single Model: CE365C/B

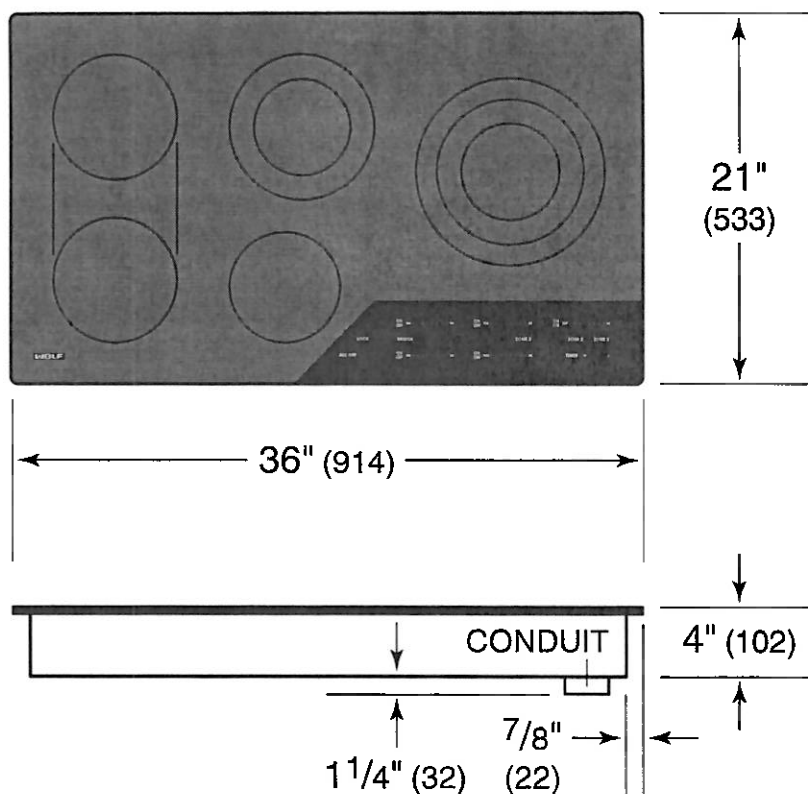

## Electrical

Single Model: CE365C/B

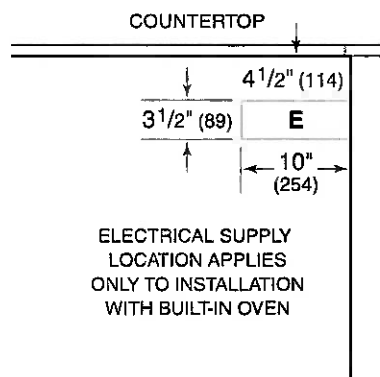

&gt;

Electrical Supply	grounded, 3-wire, 240 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Conduit Length	4 Feet

**WARNING**

Installation must comply with all applicable electrical codes.

A separate circuit, servicing only this appliance is required.

A black and white photograph of a Miele Futura Series integrated dishwasher. The dishwasher is built into a light-colored wooden countertop. On the countertop, there are several clear glasses and a stack of white plates. The dishwasher's control panel is located on the right side of the door, featuring a digital display and several buttons. The Miele logo is visible on the bottom right of the control panel. The dishwasher door is closed, and the overall aesthetic is clean and modern.

**Miele**

## Futura Series Integrated Dishwashers

LUMEN  
~~DIAMOND~~

G 6835 SCi ✓  
~~G 6935 SCi~~


This document is in no way a substitute for the Operating Instructions and Installation Specifications supplied with the appliance. Please refer to the Operating Instructions and Specifications supplied with your appliance (or online at [miele.ca](http://miele.ca)) prior to installing or using for the first time.

 [miele.ca](http://miele.ca)  
Specification Sheets TBS 0303-016

**SPECIFICATIONS**

Overall Unit Width	23 <sup>9</sup> / <sub>16</sub> " (598mm)
Overall Unit Height	33 <sup>11</sup> / <sub>16</sub> " - 36 <sup>1</sup> / <sub>4</sub> " (855 - 920mm)
Overall Unit Depth	22 <sup>7</sup> / <sub>16</sub> " (570mm)
Niche	
Minimum Cabinet Opening Width	23 <sup>5</sup> / <sub>8</sub> " (600mm)
Minimum Cabinet Opening Height	33 <sup>3</sup> / <sub>4</sub> " (857mm)
Minimum Cabinet Opening Depth	22 <sup>7</sup> / <sub>16</sub> " (570mm)
Plumbing	
Water Supply Requirements	May be connected to a cold or hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/8" compression. The water shut-off valve must be accessible after installation. The water pressure must be between 4.35 psi (0.3 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed.
Water Connection Line	4' 11" (1.5m) flexible water intake hose is supplied with a 3/8 compression connection.
Drain Hose	4' 11" (1.5m) flexible drain hose is supplied.
Electrical	
Electrical Requirements - Volts/Amps	110V / 120V, 60Hz, 15 Amps
Power Cord - Plug and length	Yes - NEMA 5-15 plug, 5' 6" (1.7m), Convertible to Hardwire
Shipping	
Shipping Weight	118 lbs (53.5kg)
Support	
Call Miele	800.565.6435
Miele Website	<a href="http://www.miele.ca">www.miele.ca</a>

INSTALLATION SPECIFICATIONS

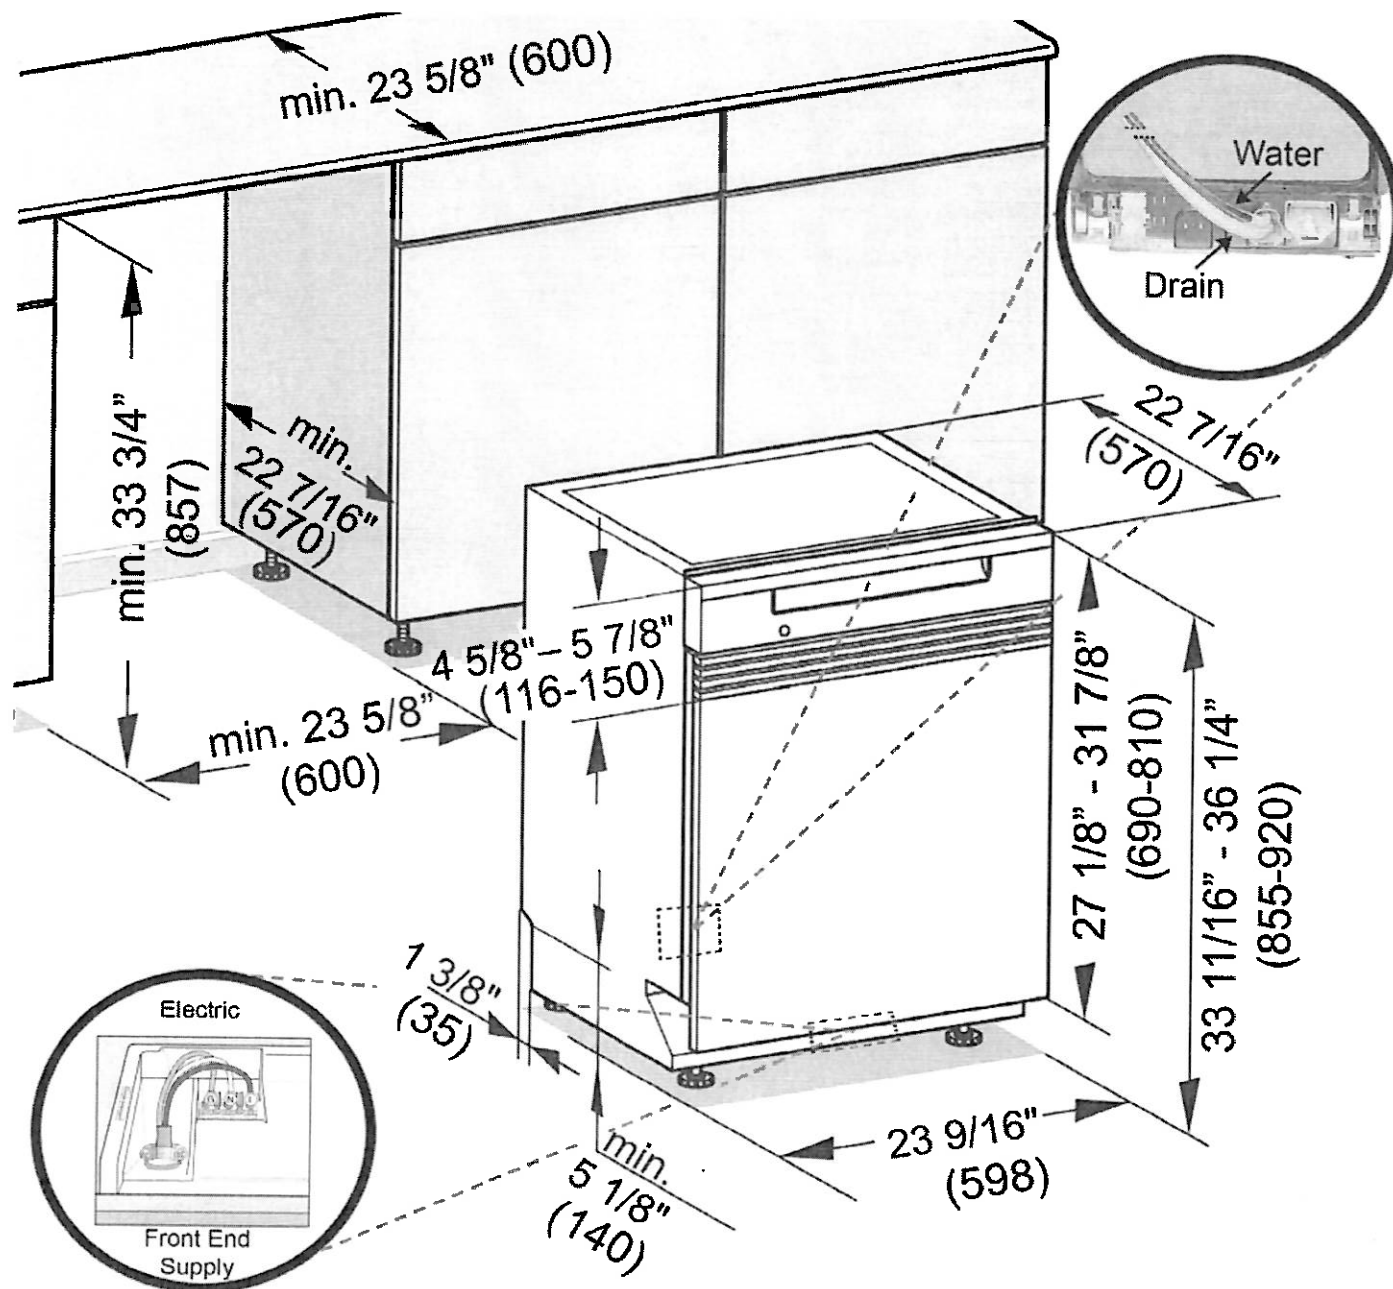

- Drain -** 4 ft 11 in (1.5 m) flexible drain hose.  
(Connects from lower center rear)
- Water -** 4 ft 11 in (1.5 m) flexible water intake hose with 3/8" compression fitting.  
(Connects from lower center rear)
- Electric -** 4 ft 11 in (1.5 m) 120V 15 A 3 wire molded NEMA 5-15 plug power supply. (Connects via Front End Supply or may be hardwired)