

FROM PLAN DATED:

BUILDER: GREENPARK HOMES

SITE: RUSSELL GARDENS PH 3

MODEL: MOUNTAINASH 4

ELEVATION: 3

LOT: 338

CITY: WATERDOWN

SALESMAN: MARIO DICIANO

DESIGNER: AJ

REVISION:

NOTES:

REFER TO THE **NORDIC INSTALLATION** GUIDE FOR PROPER STORAGE AND INSTALLATION.

SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2 S.P.F REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING CANT' OVER BRICK RE-I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 7, TABLES 1 & 2. **CERAMIC TIL** APPLICATION AS PER O.B.C 9.30.6.

LOADING:

DESIGN LOADS: L/480.000

LIVE LOAD: 40.0 lb/ft²


DEAD LOAD: 20.0 lb/ft²

SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 2020-04-16


1st FLOOR


DECK CONDITION

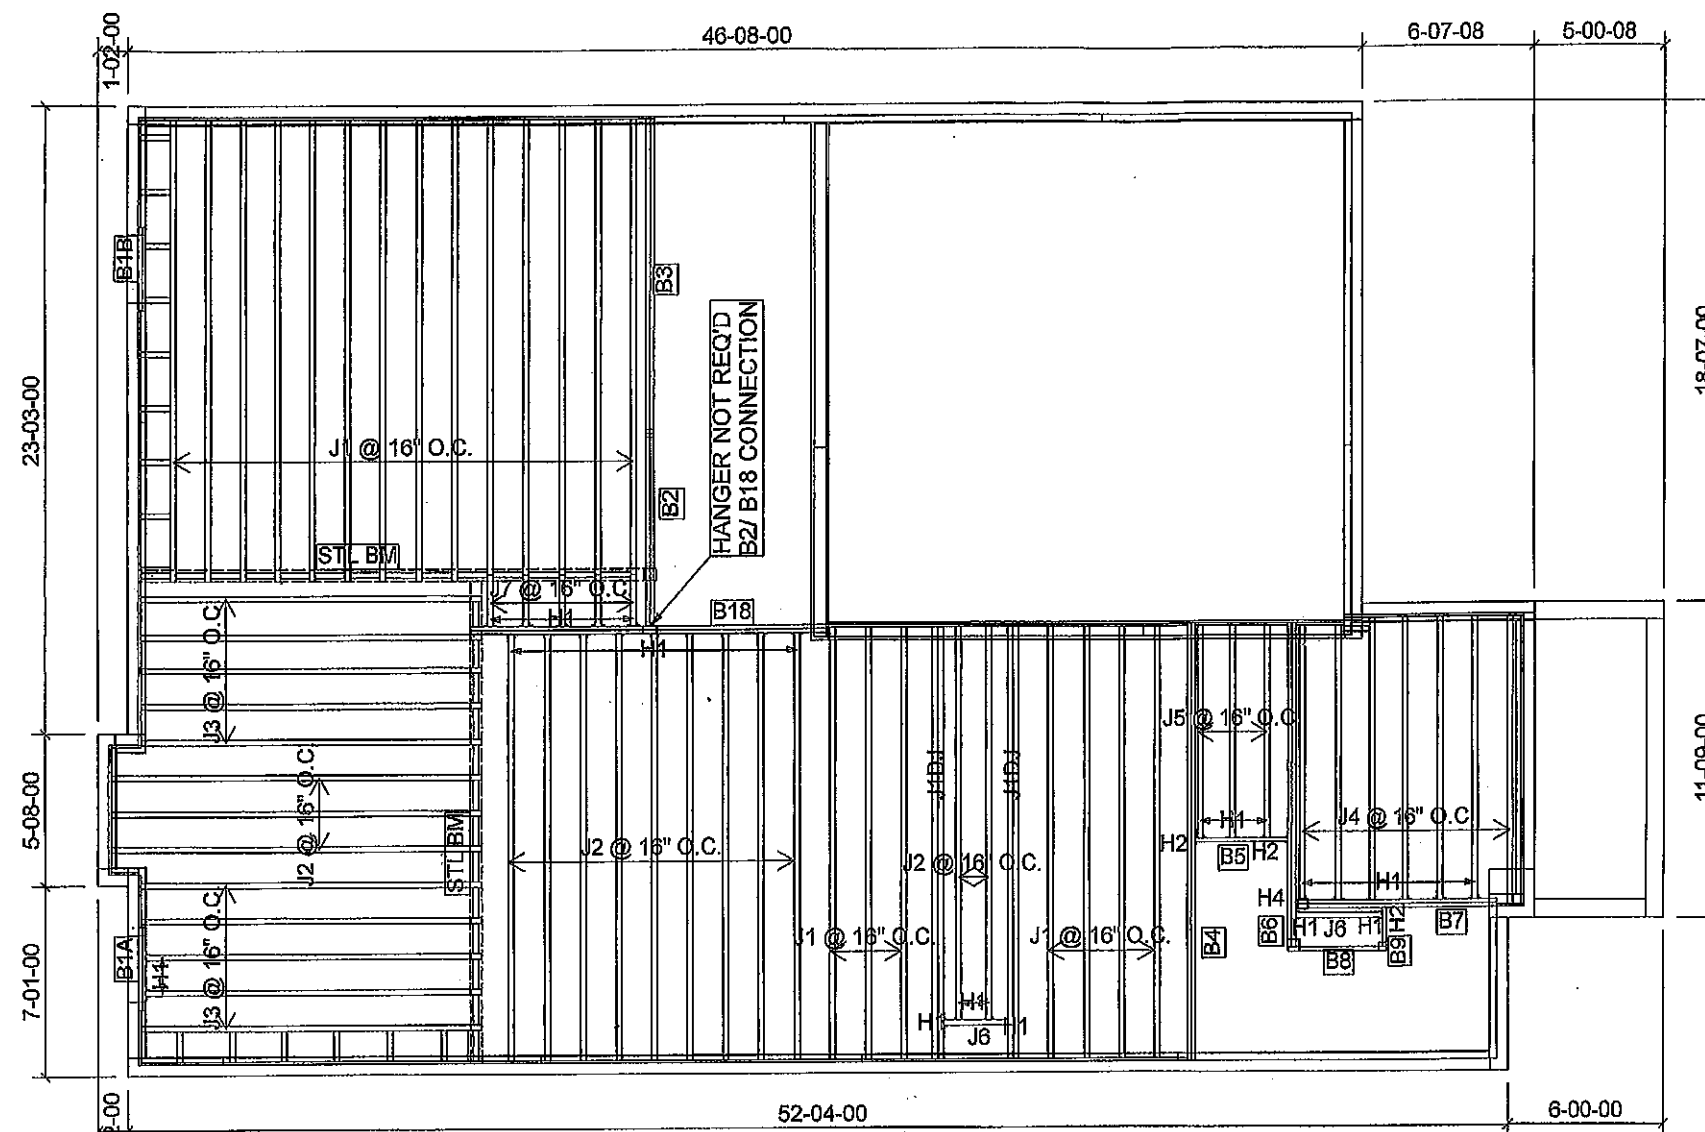

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	18-00-00	11 7/8" NI-40x	1	21	MFD
J1DJ	18-00-00	11 7/8" NI-40x	2	4	MFD
J2	16-00-00	11 7/8" NI-40x	1	14	MFD
J3	14-00-00	11 7/8" NI-40x	1	10	MFD
J4	12-00-00	11 7/8" NI-40x	1	7	MFD
J5	8-00-00	11 7/8" NI-40x	1	3	MFD
J6	4-00-00	11 7/8" NI-40x	1	2	MFD
J7	2-00-00	11 7/8" NI-40x	1	5	MFD
B4	18-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B18	14-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B6	14-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B3	12-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B2	8-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B7	8-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B5	4-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	1	1	MFD
B8	4-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	1	1	MFD
B1A	4-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B1B	4-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2	MFD
B9	2-00-00	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	1	1	MFD

Connector Summary		
Qty	Manuf	Product
4	H1	IUS2.56/11.88
23	H1	IUS2.56/11.88
2	H1	IUS2.56/11.88
2	H1	IUS2.56/11.88
3	H2	HUS1.81/10
1	H4	HGUS410





FROM PLAN DATED:

BUILDER: GREENPARK HOMES

SITE: RUSSELL GARDENS PH 3

MODEL: MOUNTAINASH 4

ELEVATION: 3

LOT: 338

CITY: WATERDOWN

SALESMAN: MARIO DICIANO

DESIGNER: AJ

REVISION:


NOTES:
REFER TO THE NORDIC INSTALLATION GUIDE FOR PROPER STORAGE AND INSTALLATION. **SQUASH BLOCKS** OF 2x4, 2x6, 2x8 #2 S.P.F. REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING CANT' OVER BRICK REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURE 7 TABLES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING DUCT CHASE AND FIELD CUT OPENINGS SEE FIGURE 7 TABLES 1 & 2 OF THE INSTALLATION GUIDE. **CERAMIC TILE** APPLICATION AS PER O.B.C. 9.30.6

LOADING:
DESIGN LOADS: L/480.000
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 20.0 lb/ft²
SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 2020-02-18


2nd FLOOR

OPTION 5 BEDROOM

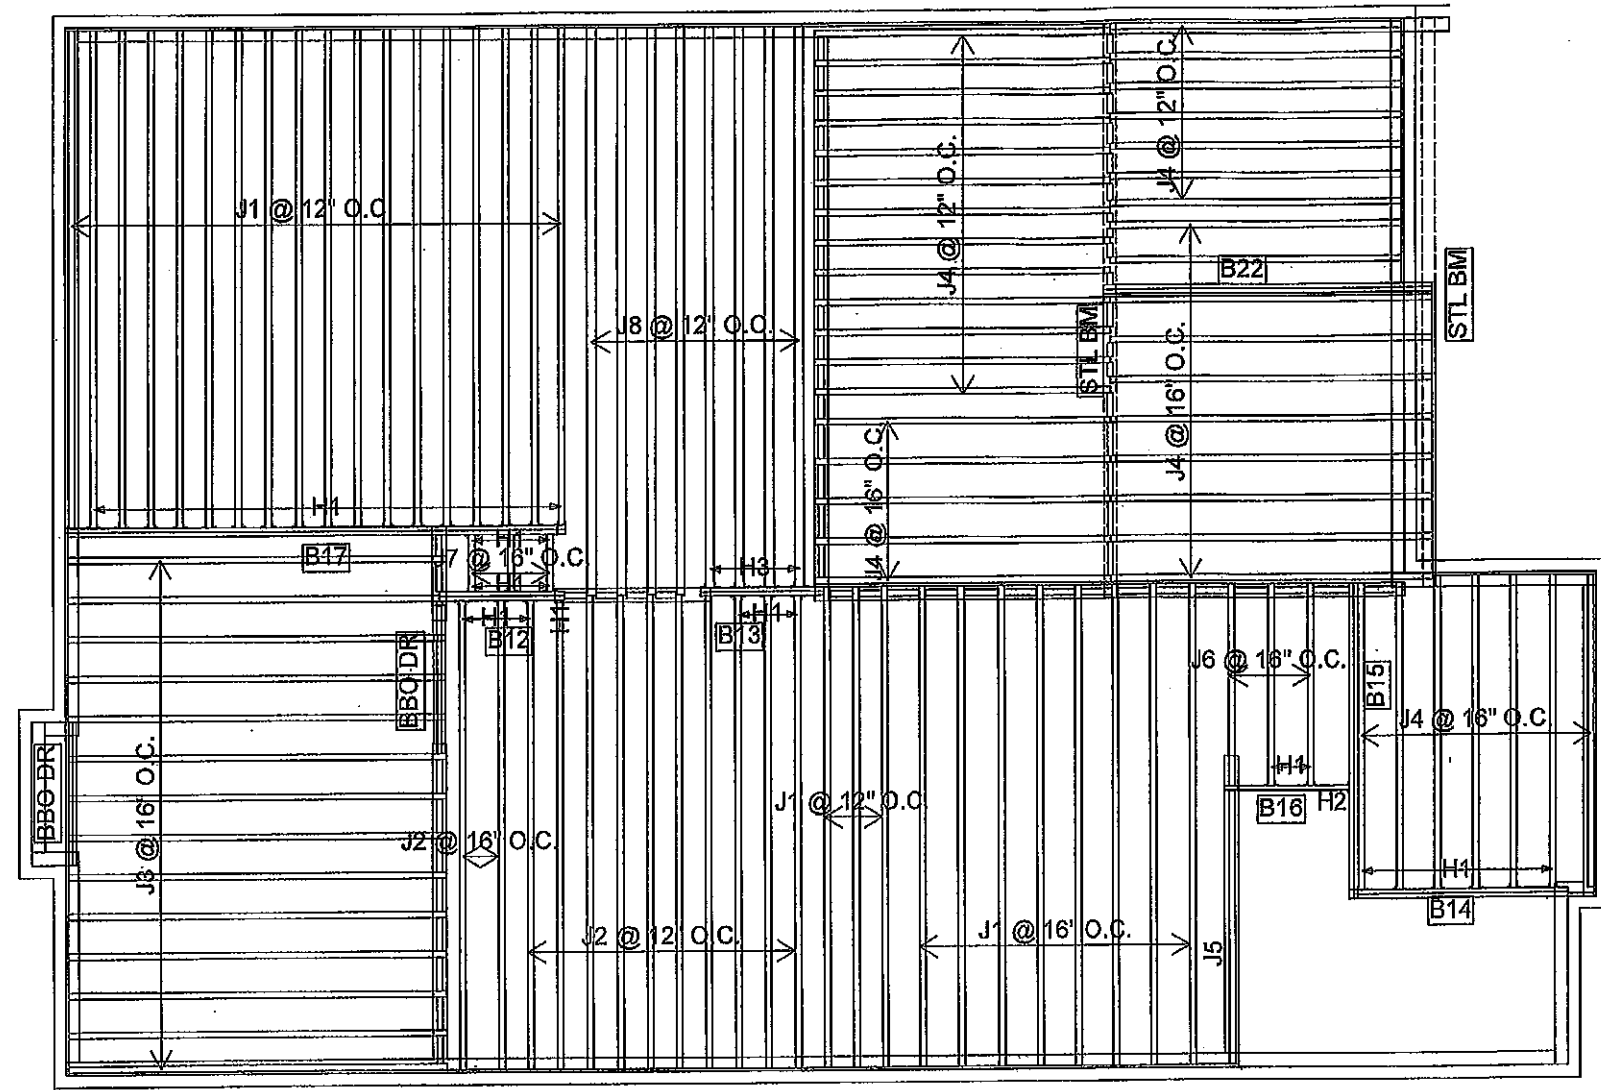

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	18-00-00	11 7/8" NI-40x	1	29	MFD
J2	16-00-00	11 7/8" NI-40x	1	12	MFD
J3	14-00-00	11 7/8" NI-40x	1	14	MFD
J4	12-00-00	11 7/8" NI-40x	1	42	MFD
J5	10-00-00	11 7/8" NI-40x	1	1	MFD
J6	8-00-00	11 7/8" NI-40x	1	3	MFD
J7	2-00-00	11 7/8" NI-40x	1	3	MFD
J8	20-00-00	11 7/8" NI-80	1	8	MFD
B17	18-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B15	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B22	12-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B14	8-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B16	6-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1	MFD
B12	6-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD
B13	6-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2	MFD

Connector Summary		
Qty	Manuf	Product
2	H1	IUS2.56/11.88
36	H1	IUS2.56/11.88
1	H2	HUS1.81/10
4	H3	IUS3.56/11.88

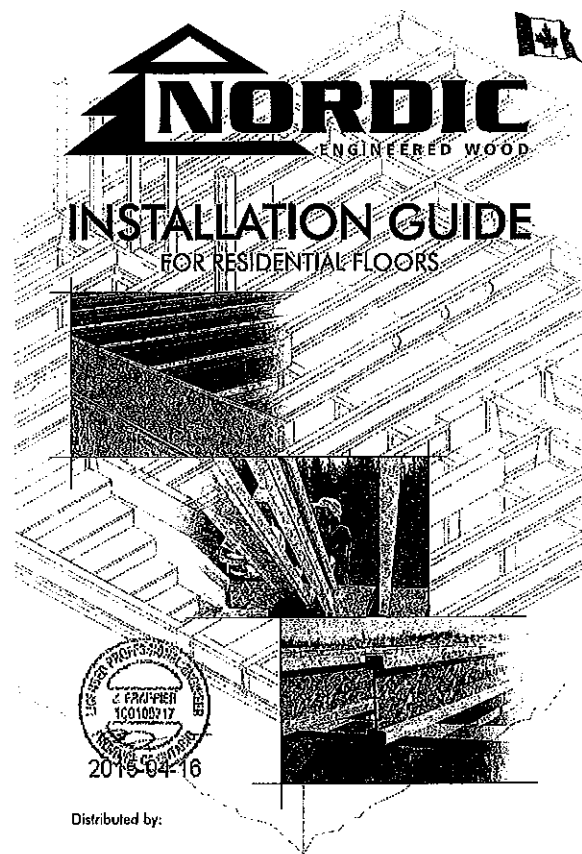

NORDIC / November 2014

SAFETY AND CONSTRUCTION PRECAUTIONS



Do not walk on I-joists until fully fastened and braced, or serious injuries can result.




Never stack building materials over unsecured I-joists. Once sheathed, do not over-stress I-joist with concentrated loads from building materials.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

STORAGE AND HANDLING GUIDELINES

- Bundle wrap can be slippery when wet. Avoid walking on wrapped bundles.
- Store, stack, and handle I-joists vertically and level only.
- Always stack and handle I-joists in the upright position only.
- Do not store I-joists in direct contact with the ground and/or finish.
- Protect I-joists from weather, and use spacers to separate bundles.
- Bundled units should be kept intact until time of installation.
- When handling I-joists with a crane on the job site, take a few simple precautions to prevent damage to the I-joists and injury to your work crew.
 - Pick I-joists in bundles as shipped by the supplier.
 - Orient the bundles so that the webs of the I-joists are vertical.
 - Pick the bundles at the 5th points, using a spreader bar if necessary.
- Do not handle I-joists in a horizontal orientation.
- NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.



MAXIMUM FLOOR SPANS

- Maximum clear spans applicable to simple-span or multiple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration and a live load deflection limit of L/480. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less, or 3/4 inch for joist spacing of 24 inches. Adhesive shall meet the requirements given in CGS-71.26 Standard. No concrete topping or bridging material was assumed. Increased spans may be achieved with the use of gypsum end/or a row of blocking at mid-span.
- Minimum bearing length shall be 1-3/4 inches for the end bearings, and 3-1/2 inches for the intermediate bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniform loads, an engineering analysis may be required based on the use of the design properties.
- Tables are based on Limit States Design per CAN/CSA C86-09 Standard, and NRC 2010.
- SI units conversion: 1 inch = 25.4 mm
1 foot = 0.305 m


MAXIMUM FLOOR SPANS FOR NORDIC I-JOISTS SIMPLE AND MULTIPLE SPANS

Joist Depth	Joist Series	Simple spans				Multiple spans			
		On center spacing				On center spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	N-40	13'1"	14'2"	15'0"	15'5"	16'5"	15'4"	14'10"	13'5"
	N-40S	16'1"	15'2"	14'8"	14'9"	17'5"	16'5"	15'10"	14'5"
	N-40L	16'3"	15'4"	14'10"	14'11"	17'7"	16'7"	15'2"	14'1"
	N-40	17'1"	16'1"	15'6"	15'7"	18'7"	17'4"	16'9"	15'10"
	N-40L	17'3"	16'3"	15'8"	15'9"	18'10"	17'6"	16'11"	15'10"
11-7/8"	N-40	18'11"	16'0"	15'5"	15'6"	18'4"	17'3"	16'8"	15'7"
	N-40S	18'1"	17'0"	16'5"	16'6"	20'0"	18'4"	17'9"	17'7"
	N-40L	18'4"	17'3"	16'7"	16'8"	20'3"	18'9"	18'0"	16'1"
	N-40	19'9"	18'0"	17'4"	17'5"	21'6"	19'11"	19'0"	18'1"
	N-40S	19'9"	18'3"	17'6"	17'7"	21'9"	20'2"	19'3"	19'4"
14"	N-40	20'2"	18'7"	17'10"	17'11"	22'3"	20'7"	19'9"	19'9"
	N-40S	20'4"	18'9"	17'11"	18'0"	22'5"	20'9"	19'10"	19'11"
	N-40L	20'1"	18'7"	17'10"	17'11"	22'2"	20'6"	19'8"	19'4"
	N-40	21'7"	20'0"	19'1"	19'2"	23'10"	22'1"	21'1"	21'2"
	N-40S	21'1"	20'3"	19'4"	19'5"	24'3"	22'5"	21'5"	21'6"
16"	N-40	22'5"	20'8"	19'9"	19'10"	24'9"	22'10"	21'10"	21'10"
	N-40S	22'7"	20'11"	19'11"	20'0"	25'0"	23'1"	22'9"	22'2"
	N-40L	22'3"	20'6"	19'7"	19'8"	24'7"	22'9"	21'9"	21'10"
	N-40	23'6"	21'9"	20'9"	20'10"	26'0"	24'6"	23'0"	23'0"
	N-40S	24'8"	22'9"	21'9"	21'10"	27'3"	25'9"	24'0"	24'1"

CEC EVALUATION REPORT 13032-R

I-JOIST HANGERS

- Hangers shown illustrate the three most commonly used metal hangers to support I-joists.
- All nailing must meet the hanger manufacturer's recommendations.
- Hangers should be selected based on the joist depth, flange width and load capacity based on the maximum spans.
- Web stiffeners are required when the side of the hangers do not laterally brace the top flange of the I-joist.



WEB STIFFENERS

RECOMMENDATIONS:


A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the Joist Properties table found in the Joist Connection Guide (C101). The gap between the stiffener and the flange is at the top.

A bearing stiffener is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and the flange is at the top.

A load stiffener is required at locations where a factored concentrated load greater than 2,570 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.

SI units conversion: 1 inch = 25.4 mm

FIGURE 2 WEB STIFFENER INSTALLATION DETAILS

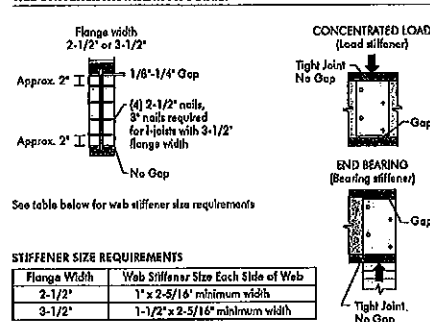

See table below for web stiffener size requirements


Flange Width	Web Stiffener Size Each Side of Web
2-1/2"	1" x 2-5/16" minimum width
3-1/2"	1-1/2" x 2-5/16" minimum width

INSTALLING NORDIC I-JOISTS





















- Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, consult supplier.
- Except for existing to length, I-joist flanges should never be cut, drilled, or notched.
- Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
- I-joists must be anchored securely to supports before floor sheathing is attached, and supports for multiple-span applications must be level.
- Minimum bearing lengths: 1-3/4 inches for end bearings and 3-1/2 inches for intermediate bearings.
- When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
- Leave a 1/16-inch gap between the I-joist and end a header.
- Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unusual or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
- Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
- Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
- For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squish blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
- Due to shrinkage, common framing lumber set on edge may never be used as blocking or rim boards. I-joist blocking panels or other engineered wood products—such as rim board—must be cut to fit between the I-joists, and on I-joist-compatible depth selected.
- Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
- If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
- Nail spacing: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.

FIGURE 1 TYPICAL NORDIC I-JOIST FLOOR FRAMING AND CONSTRUCTION DETAILS

Some framing requirements such as traction bracing and blocking panels have been omitted for clarity.

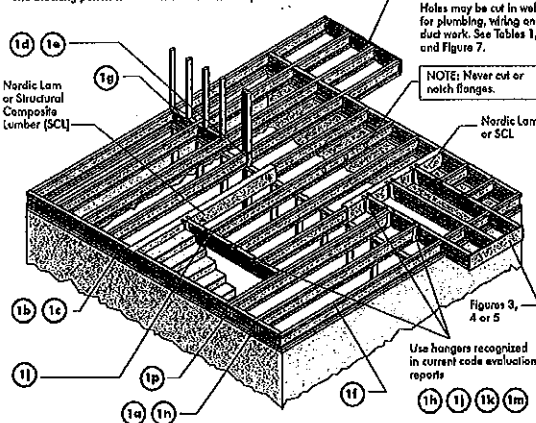

All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.122") common spiral nails may be substituted for 2-1/2" (0.126") common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.





Refer to the Installation Guide for Residential Floors for additional information.
CCMC EVALUATION REPORT 13032-R

WEB HOLE SPECIFICATIONS

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:

- The distance between the inside edge of the support and the centreline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
- 1-joint top and bottom flanges must NEVER be cut, notched, or otherwise modified.
- Whenever possible, field-cut holes should be centred on the middle of the web.
- The maximum size hole or the maximum depth of a duct chase opening that can be cut into a 1-joint web shall equal the clear distance between the flanges of the 1-joint minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole or opening and the adjacent 1-joint flange.

- The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the minimum round hole permitted at that location.
- Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the longest side of the largest rectangular hole or duct chase opening) and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
- A knockout is not considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
- Holes measuring 1-1/2 inches or smaller are permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.

- A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
- All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
- Limit three maximum size holes per span, of which one may be a duct chase opening.
- A group of round holes at approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

TABLE 1
LOCATION OF CIRCULAR HOLES IN JOIST WEBS
Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum Distance from Inside Face of Any Support to Centre of Hole (ft - in.)											
		Round Hole Diameter (in.)											
9-1/2"	N1-20	0-7"	1-6"	2-10"	4-3"	5-8"	6-0"	---	---	---	---	---	---
	N1-40x	0-7"	1-6"	3-0"	4-4"	6-0"	6-4"	---	---	---	---	---	---
	N1-60	1-3"	2-6"	4-0"	5-4"	7-0"	7-8"	---	---	---	---	---	---
	N1-70	2-0"	3-4"	4-9"	6-3"	8-0"	8-4"	---	---	---	---	---	---
	N1-80	2-3"	3-6"	5-0"	6-6"	8-2"	8-8"	---	---	---	---	---	---
11-7/8"	N1-20	0-7"	0-8"	1-0"	2-4"	3-8"	4-0"	5-0"	6-6"	7-9"	---	---	---
	N1-40x	0-7"	0-8"	1-0"	2-4"	3-8"	4-0"	5-0"	6-6"	7-9"	---	---	---
	N1-60	0-7"	1-8"	3-0"	4-3"	5-9"	6-0"	7-3"	8-10"	10-0"	---	---	---
	N1-70	1-3"	2-6"	4-0"	5-4"	7-0"	7-2"	8-4"	10-0"	11-2"	---	---	---
	N1-80	1-6"	2-10"	4-2"	5-6"	7-0"	7-5"	8-6"	10-3"	11-4"	---	---	---
14"	N1-20	0-7"	0-8"	1-5"	3-2"	4-10"	5-4"	6-9"	8-9"	10-2"	---	---	---
	N1-40x	0-7"	0-8"	0-9"	2-5"	4-4"	4-9"	6-3"	---	---	---	---	---
	N1-60	0-7"	0-8"	1-8"	3-0"	4-3"	4-8"	5-8"	7-2"	8-0"	---	---	---
	N1-70	0-8"	1-10"	3-0"	4-5"	5-10"	6-21"	7-3"	8-9"	10-4"	12-0"	---	---
	N1-80	0-10"	2-0"	3-4"	4-9"	6-21"	6-5"	7-6"	9-0"	10-0"	10-8"	12-4"	---
16"	N1-20	0-7"	0-8"	0-10"	2-5"	4-0"	4-5"	5-9"	7-3"	8-3"	11-4"	12-11"	---
	N1-40x	0-7"	0-8"	0-8"	2-0"	3-9"	4-2"	5-5"	7-3"	8-5"	9-2"	---	---
	N1-60	0-7"	0-8"	0-8"	1-6"	2-10"	3-2"	4-2"	5-6"	6-4"	7-0"	8-8"	9-8"
	N1-70	0-7"	1-0"	2-3"	3-6"	4-10"	5-3"	6-3"	7-8"	8-6"	9-2"	10-8"	12-0"
	N1-80	0-7"	1-3"	2-6"	3-10"	5-3"	5-6"	6-6"	8-0"	9-0"	9-5"	11-0"	12-3"



- Above table may be used for 1-joint spacing of 24 inches on centre or less.
- Hole location distance is measured from inside face of supports to centre of hole.
- Distances in this chart are based on uniformly loaded joists.
- The above table is based on the 1-joints being used at their maximum spans. The minimum distance as given above may be reduced for shorter spans; contact your local distributor.

TABLE 2
DUCT CHASE OPENING SIZES AND LOCATIONS
Simple Span Only

Joist Depth	Joist Series	Minimum distance from inside face of supports to centre of opening (ft - in.)											
		Duct Chase Length (in.)											
9-1/2"	N1-20	4-1"	4-5"	4-10"	5-4"	5-8"	6-1"	6-6"	7-1"	7-5"	---	---	---
	N1-40x	5-3"	5-8"	6-0"	6-5"	6-10"	7-3"	7-8"	8-2"	8-6"	---	---	---
	N1-60	5-4"	5-9"	6-2"	6-7"	7-1"	7-5"	8-0"	8-5"	8-9"	---	---	---
	N1-70	5-11"	5-5"	5-10"	6-3"	6-7"	7-1"	7-6"	8-1"	8-4"	---	---	---
	N1-80	5-3"	5-8"	6-0"	6-5"	6-10"	7-3"	7-8"	8-2"	8-6"	---	---	---
11-7/8"	N1-20	6-9"	6-2"	6-6"	7-1"	7-5"	7-9"	8-3"	8-9"	9-4"	---	---	---
	N1-40x	6-8"	7-2"	7-6"	8-1"	8-6"	9-1"	9-6"	10-1"	10-5"	---	---	---
	N1-60	7-3"	7-8"	8-0"	8-6"	9-0"	9-3"	9-9"	10-3"	10-8"	---	---	---
	N1-70	7-1"	7-4"	7-9"	8-3"	8-7"	9-1"	9-6"	10-1"	10-4"	---	---	---
	N1-80	7-2"	7-7"	8-0"	8-5"	8-10"	9-3"	9-8"	10-2"	10-6"	---	---	---
14"	N1-20	7-6"	7-11"	8-0"	8-9"	9-2"	9-7"	10-1"	10-7"	10-11"	---	---	---
	N1-40x	7-2"	8-1"	8-5"	8-10"	8-4"	9-3"	10-2"	10-6"	11-2"	---	---	---
	N1-60	8-1"	8-7"	9-0"	9-6"	10-1"	10-6"	11-1"	11-6"	12-0"	---	---	---
	N1-70	8-9"	9-3"	9-8"	10-1"	10-6"	11-1"	11-6"	12-1"	12-6"	---	---	---
	N1-80	8-7"	9-1"	9-5"	9-10"	10-4"	10-8"	11-2"	11-7"	12-3"	---	---	---
16"	N1-20	9-0"	9-3"	9-9"	10-1"	10-7"	11-1"	11-6"	12-1"	12-6"	---	---	---
	N1-40x	9-2"	9-8"	10-0"	10-6"	10-11"	11-5"	11-9"	12-4"	12-11"	---	---	---
	N1-60	10-3"	10-8"	11-2"	11-6"	12-1"	12-6"	13-2"	14-1"	14-10"	---	---	---
	N1-70	10-1"	10-5"	11-0"	11-4"	11-10"	12-3"	12-8"	13-3"	14-0"	---	---	---
	N1-80	10-4"	10-9"	11-3"	11-8"	12-1"	12-6"	13-1"	13-6"	14-4"	---	---	---

- Above table may be used for 1-joint spacing of 24 inches on centre or less.
- Duct chase opening location distance is measured from inside face of supports to centre of opening.
- The above table is based on simple-span joists only. For other applications, contact your local distributor.
- Distances are based on uniformly loaded floor joists that meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480.
- The above table is based on the 1-joints being used at their maximum spans. The minimum distance as given above may be reduced for shorter spans; contact your local distributor.

FIGURE 7
FIELD-CUT HOLE LOCATOR

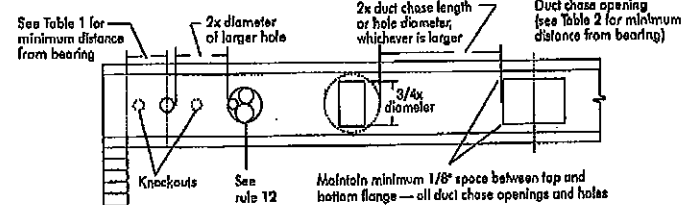

Knockouts are pre-scored holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on center along the length of the 1-joint. Where possible, it is preferable to use knockouts instead of field-cut holes.

Never drill, cut or notch the flange, or over-cut the web.

Holes in webs should be cut with a sharp saw.

For rectangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the 1-joint.

SAFETY AND CONSTRUCTION PRECAUTIONS



Do not walk on 1-joints until fully fastened and braced, or serious injuries can result.



Never stack building materials over unshathed 1-joints. Once shathed, do not over-stress 1-joints with concentrated loads from building materials.

WARNING: 1-joints are not stable until completely installed, and will not carry any load until fully braced and sheathed.

AVOID ACCIDENTS BY FOLLOWING THESE IMPORTANT GUIDELINES:

- Brace and nail each 1-joint as it is installed, using hangers, blocking panels, rim board, and/or cross-briding at joist ends. When 1-joints are applied continuously over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
- When the building is completed, the floor sheathing will provide lateral support for the top flanges of the 1-joints. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent 1-joint rollover or buckling.
 - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each 1-joint. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two 1-joints.
 - Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of 1-joints at the end of the bay.
- For cantilevered 1-joints, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-briding.
- Install and fully nail permanent sheathing to each 1-joint before placing loads on the floor system. Then, stack building materials over beams or walls only.
- Never install a damaged 1-joint.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic 1-joints, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

PRODUCT WARRANTY

Chantiers Chibougamau guarantees that, in accordance with our specifications, Nordic products are free from manufacturing defects in material and workmanship.

Furthermore, Chantiers Chibougamau warrants that our products, when utilized in accordance with our handling and installation instructions, will meet or exceed our specifications for the lifetime of the structure.

Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
NI Joists	3,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

Attach 1-joint to top plate per detail 1b

2-1/2" nails at 6" o.c. to top plate (when used for lateral shear transfer, nail to bearing plate with same nailing as required for decking)

Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	8,090

*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

One 2-1/2" wire or spiral nail at top and bottom flange

Attach rim board to top plate using 2-1/2" wire or spiral toe-nails at 6" o.c.

To avoid splitting flange, start nails at least 1-1/2" from end of 1-joint. Nails may be driven at an angle to avoid splitting of bearing plate.

Minimum bearing length shall be 1-3/4" for the end bearings, and 3-1/2" for the intermediate bearings when applicable.

Pair of Squash Blocks	Maximum Factored Vertical Load per Pair of Squash Blocks (lbs)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300

Provide lateral bracing per detail 1a or 1b

Load bearing wall above shall align vertically with the bearing below. Other conditions, such as offset bearing walls, are not covered by this detail.

Blocking required over all interior supports under load-bearing walls or when floor joists are not continuous over support

NI blocking panel per detail 1a

2-1/2" nails at 6" o.c. to top plate

Backer block (use if hanger load exceeds 360 lbs). Before installing a backer block to a double 1-joint, drive three additional 3" nails through the webs and filler block where the backer block will fit. Clinch, install backer right to top flange. Use twelve 3" nails, clinched when possible. Maximum factored resistance for hanger for this detail = 1,620 lbs.

BACKER BLOCKS (Blocks must be long enough to permit required nailing without splitting)

Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

* Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA-O325 or CAN/CSA-O437 Standard.

** For face-mount hangers use net joist depth minus 3-1/4" for joists with 1-1/2" thick flanges. For 2" thick flanges use net depth minus 4-1/4".

Top- or face-mount hanger. Double 1-joint header. NOTE: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

Backer block required (both sides for face-mount hangers)

For hanger capacity see hanger manufacturer's recommendations. Verify double 1-joint capacity to support concentrated loads.

Nordic Laminated or Structural Composite Lumber (SCL). For nailing schedules for multiple beams, see the manufacturer's recommendations.

Top- or face-mount hanger installed per manufacturer's recommendations

NOTE: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

2x plate flush with inside face of wall or beam. 1/8" overhang allowed past inside face of wall or beam. NOTE: Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

Top-mount hanger installed per manufacturer's recommendations

Multiple 1-joint header with full depth filler block shown. Nordic Laminated or SCL headers may also be used. Verify double 1-joint capacity to support concentrated loads.

Backer block attached per detail 1h. Nail with twelve 3" nails, clinch when possible.

Filler block per detail 1p

Maximum support capacity = 1,620 lbs.

Do not bevel-cut joist beyond inside face of wall. Attach 1-joint per detail 1b.

NOTE: Blocking required at bearing for lateral support, not shown for clarity.

Lumber 2x4 min., extend block to face of adjacent web. Two 2-1/2" spiral nails from each web to lumber piece, alternate on opposite side.

NI blocking panel

OPTIONAL: Minimum 1x4 inch strip applied to underside of joist at blocking line or 1/2 inch minimum gypsum ceiling attached to underside of joists.

Filler block requirements for double 1-joint construction. Filler block. Offset nails from opposite face by 6". 1/8" to 1/4" gap between top flange and filler block.

NOTES:

- Support back of 1-joint web during nailing to prevent damage to web/flange connection.
- Leave a 1/8 to 1/4-inch gap between top of filler block and bottom of top 1-joint flange.
- Filler block is required between joists for full length of span.
- Nail joists together with two rows of 3" nails of 12 inches o.c. (clinched when possible) on each side of the double 1-joint. Total of four nails per foot are required. If nails can be clinched, only two nails per foot are required.
- The maximum factored load that may be applied to one side of the double joist using this detail is 860 lb/ft. Verify double 1-joint capacity.

Flange Size	Net Depth	Filler Block Size
2-1/2" x 1-1/2"	9-1/2"	2-1/8" x 6"
	11-7/8"	2-1/8" x 8"
	14"	2-1/8" x 10"
	16"	2-1/8" x 12"
3-1/2" x 1-1/2"	9-1/2"	3" x 6"
	11-7/8"	3" x 8"
	14"	3" x 10"
	16"	3" x 12"
3-1/2" x 2"	11-7/8"	3" x 7"
	14"	3" x 9"
	16"	3" x 11"

One 2-1/2" nail at top and bottom flange. 2x4 min. (1/8" gap minimum). Two 2-1/2" nails from each web to lumber piece, alternate on opposite side. One 2-1/2" nail one side only.

NOTES:

- In some local codes, blocking is prescriptively required in the first joist space (or first and second joist space) next to the starter joist. Where required, see local code requirements for spacing of the blocking.
- All nails are common spiral in this detail.

All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.125 dia.) common spiral nails may be substituted for 2-1/2" (0.125 dia.) common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.

WEB STIFFENERS

RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the joist properties table found in the Joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the 1-joint is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.

FIGURE 2
WEB STIFFENER INSTALLATION DETAILS

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 09:44


PROJECT
J1 1ST FLOOR.wwb

Design Check Calculation Sheet Nordic Sizer - Canada 7.2

Loads:

Load	Type	Distribution	Pat-tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

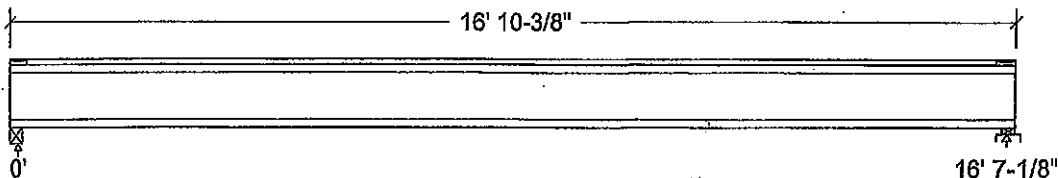


Unfactored:			
Dead	221		221
Live	442		442
Factored:			
Total	940		940
Bearing:			
Capacity			
Joist	2137		2102
Support	4036		3981
Des ratio			
Joist	0.44		0.45
Support	0.23		0.24
Load case	#2		#2
Length	2-5/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	1.00		1.00
fcp sup	769		769
Kzcp sup	1.00		1.09

Nordic 11-7/8" NI-40x Floor Joist @ 16" o.c.

Supports: 1 - Lumber Beam, No.1/No.2; 2 - Lumber Sill plate, No.1/No.2;
Total length: 16' 10-3/8"; Clear span: 16' 5-3/8"; 3/4" nailed and glued OSB sheathing
This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 940	Vr = 2336	lbs	VE/Vr = 0.40
Moment(+)	Mf = 3901	Mr = 6255	lbs-ft	ME/Mr = 0.62
Perm. Defl'n	0.11 = < L/999	0.55 = L/360	in	0.20
Live Defl'n	0.23 = L/879	0.41 = L/480	in	0.55
Total Defl'n	0.34 = L/586	0.83 = L/240	in	0.41
Bare Defl'n	0.27 = L/727	0.55 = L/360	in	0.49
Vibration	Lmax = 16'-7.1	Lv = 18'-1.3	ft	0.92
Defl'n	= 0.029	= 0.038	in	0.76



REG. NO. 6035-28
STRUCTURAL
COMPONENT ONLY

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	6255	1.00	1.00	-	1.000	-	-	-	#2
EI	371.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment(+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth,groundwater E=earthquake

L=live(use,occupancy) Ls=live(storage,equipment) f=fire

Load Patterns: s=S/2 L=L+Ls _=no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:E_Ieff = 459.76 lb-in² K= 6.18e06 lbs

"Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO OBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.



OWG NO. YAM 6085 -20
STRUCTURAL
COMPONENT ONLY

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 09:44


PROJECT
J1 2ND FLOOR.wvb

Design Check Calculation Sheet Nordic Sizer – Canada 7.2

Loads:

Load	Type	Distribution	Pat-tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

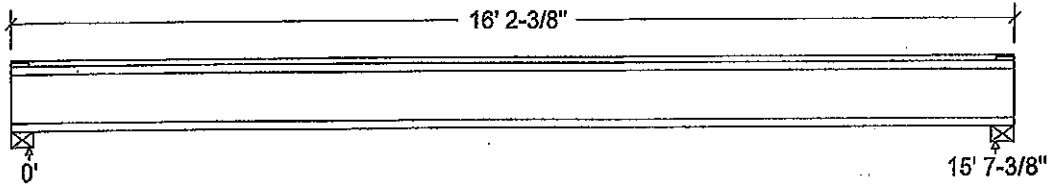

Unfactored:			
Dead	208		208
Live	416		416
Factored:			
Total	885		885
Bearing:			
Capacity			
Joist	2336		2336
Support	6734		6734
Des ratio			
Joist	0.38		0.38
Support	0.13		0.13
Load case	#2		#2
Length	4-3/8		4-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	1.00		1.00
fcp sup	769		769
Kzcp sup	1.00		1.00

Nordic 11-7/8" NI-40x Floor Joist @ 16" o.c.

Supports: All - Lumber Beam, No.1/No.2

Total length: 16' 2-3/8"; Clear span: 15' 5-5/8"; 5/8" nailed and glued OSB sheathing with 1/2" gypsum ceiling

This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 885	Vr = 2336	lbs	Vf/Vr = 0.38
Moment(+)	Mf = 3454	Mr = 6255	lbs-ft	Mf/Mr = 0.55
Perm. Defl'n	0.09 = < L/999	0.52 = L/360	in	0.18
Live Defl'n	0.18 = < L/999	0.39 = L/480	in	0.47
Total Defl'n	0.28 = L/676	0.78 = L/240	in	0.35
Bare Defl'n	0.22 = L/861	0.52 = L/360	in	0.42
Vibration	Lmax = 15'-7.4	Lv = 17'-8.1	ft	0.88
Defl'n	= 0.028	= 0.041	in	0.68



NO. 6036-20
STRUCTURAL
COMPONENT ONLY

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	6255	1.00	1.00	-	1.000	-	-	-	#2
EI	371.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L
 Moment(+) : LC #2 = 1.25D + 1.5L
 Deflection: LC #1 = 1.0D (permanent)
 LC #2 = 1.0D + 1.0L (live)
 LC #2 = 1.0D + 1.0L (total)
 LC #2 = 1.0D + 1.0L (bare joist)
 Bearing : Support 1 - LC #2 = 1.25D + 1.5L
 Support 2 - LC #2 = 1.25D + 1.5L
 Load Types: D=dead W=wind S=snow H=earth,groundwater E=earthquake
 L=live(use,occupancy) Ls=live(storage,equipment) f=fire
 Load Patterns: s=S/2 L=L+Ls =no pattern load in this span
 All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:

EI_{eff} = 447.63 lb-in² K= 6.18e06 lbs
 "Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO UBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.



OWB NO. YAM6036-20
 STRUCTURAL
 COMPONENT ONLY

NORDIC STRUCTURES

COMPANY
Apr. 9, 2020 09:47


PROJECT
J8 2ND FLOOR.wwb

Design Check Calculation Sheet Nordic Sizer – Canada 7.2

Loads:

Load	Type	Distribution	Pat-tern	Location [ft] Start End	Magnitude Start End	Unit
Load1	Dead	Full Area			20.00	psf
Load2	Live	Full Area			40.00	psf

Maximum Reactions (lbs) and Support Bearing (in):

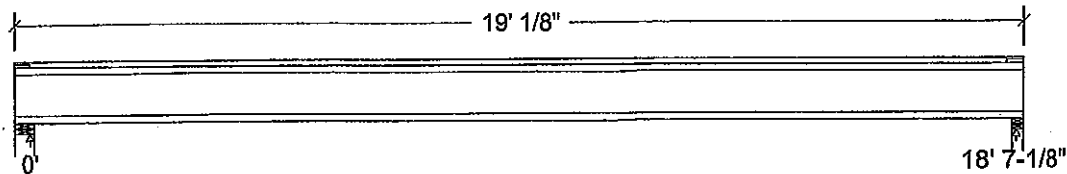

Unfactored:			
Dead	186		186
Live	372		372
Factored:			
Total	790		790
Bearing:			
Capacity			
Joist	2336		2188
Support	10841		5573
Des ratio			
Joist	0.34		0.36
Support	0.07		0.14
Load case	#2		#2
Length	4-3/8		2-3/8
Min req'd	1-3/4		1-3/4
Stiffener	No		No
KD	1.00		1.00
KB support	-		-
fcp sup	769		769
Kzcp sup	-		-

Bearing for wall supports is perpendicular-to-grain bearing on top plate. No stud design included.

Nordic 11-7/8" NI-80 Floor joist @ 12" o.c.


Supports: All - Lumber Wall, No.1/No.2

Total length: 19' 1/8"; Clear span: 18' 5-3/8"; 5/8" nailed and glued OSB sheathing with 1/2" gypsum ceiling

This section PASSES the design code check.

Limit States Design using CSA O86-14 and Vibration Criterion:

Criterion	Analysis Value	Design Value	Unit	Analysis/Design
Shear	Vf = 790	Vr = 2336	lbs	Vf/Vr = 0.34
Moment (+)	Mf = 3673	Mr = 11609	lbs-ft	Mf/Mr = 0.32
Perm. Defl'n	0.10 = < L/999	0.62 = L/360	in	0.16
Live Defl'n	0.20 = < L/999	0.46 = L/480	in	0.44
Total Defl'n	0.30 = L/735	0.93 = L/240	in	0.33
Bare Defl'n	0.22 = L/998	0.62 = L/360	in	0.36
Vibration	Lmax = 18'-7.1	Lv = 20'-5.8	ft	0.91
Defl'n	= 0.027	= 0.034	in	0.79



OWN NO. YAM 6037-20
STRUCTURAL
COMPONENT ONLY

Additional Data:

FACTORS:	f/E	KD	KH	KZ	KL	KT	KS	KN	LC#
Vr	2336	1.00	1.00	-	-	-	-	-	#2
Mr+	11609	1.00	1.00	-	1.000	-	-	-	#2
EI	547.1 million	-	-	-	-	-	-	-	#2

CRITICAL LOAD COMBINATIONS:

Shear : LC #2 = 1.25D + 1.5L

Moment (+) : LC #2 = 1.25D + 1.5L

Deflection: LC #1 = 1.0D (permanent)

LC #2 = 1.0D + 1.0L (live)

LC #2 = 1.0D + 1.0L (total)

LC #2 = 1.0D + 1.0L (bare joist)

Bearing : Support 1 - LC #2 = 1.25D + 1.5L

Support 2 - LC #2 = 1.25D + 1.5L

Load Types: D=dead W=wind S=snow H=earth, groundwater E=earthquake

L=live (use, occupancy) Ls=live (storage, equipment) f=fire

Load Patterns: s=S/2 L=L+Ls =no pattern load in this span

All Load Combinations (LCs) are listed in the Analysis output

CALCULATIONS:E_{leff} = 613.27 lb-in² K= 6.18e06 lbs

"Live" deflection is due to all non-dead loads (live, wind, snow...)

CONFORMS TO OBC 2012

AMENDED 2020

Design Notes:

1. WoodWorks analysis and design are in accordance with the 2015 National Building Code of Canada (NBC), Division B, Part 4, and the CSA O86-14 Engineering Design in Wood standard, Update No. 2 (June 2017).
2. Please verify that the default deflection limits are appropriate for your application.
3. Refer to Nordic Structures technical documentation for installation guidelines and construction details.
4. Nordic I-joists are listed in CCMC evaluation report 13032-R.
5. Joists shall be laterally supported at supports and continuously along the compression edge.
6. The design assumptions and specifications have been provided by the client. Any damages resulting from faulty or incorrect information, specifications, and/or designs furnished, and the correctness or accuracy of this information is their responsibility. This analysis does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of this component based on the design criteria and loadings shown.



DWG NO. TAN 6037-20
STRUCTURAL
COMPONENT ONLY

2ND FLR FRAMING\Dropped Beams\B19A DR(i2421) (Dropped Beam)

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Dropped Beams\B19A DR(i2421)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

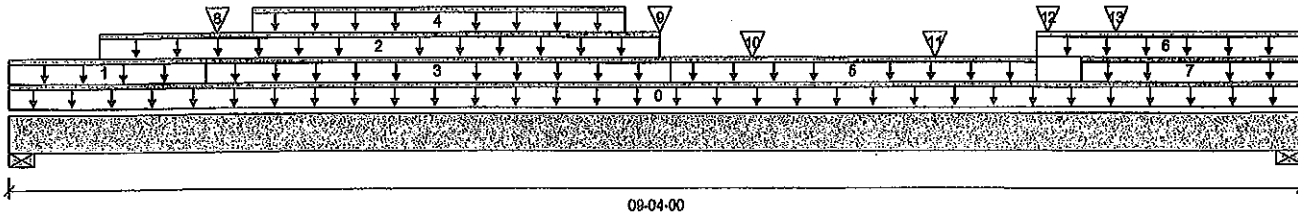

Total Horizontal Product Length = 09-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4"	999 / 0	945 / 0	405 / 0	
B2, 5-1/2"	1034 / 0	996 / 0	444 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-04-00	Top		10			00-00-00
1	R1(i1840)	Unf. Lin. (lb/ft)	L	00-00-00	01-05-00	Top		41			n/a
2	Smoothed Load	Unf. Lin. (lb/ft)	L	00-08-00	04-08-00	Top	205	103			n/a
3	R1(i1840)	Unf. Lin. (lb/ft)	L	01-05-00	04-09-00	Top		81			n/a
4	R1(i1840)	Unf. Lin. (lb/ft)	L	01-09-00	04-05-00	Top	44	40	92		n/a
5	R1(i1840)	Unf. Lin. (lb/ft)	L	04-09-00	07-05-00	Top		41			n/a
6	R1(i1840)	Unf. Lin. (lb/ft)	L	07-05-00	09-04-00	Top		81			n/a
7	R1(i1840)	Unf. Lin. (lb/ft)	L	07-09-00	09-04-00	Top	44	40	92		n/a
8	R1(i1840)	Conc. Pt. (lbs)	L	01-06-00	01-06-00	Top	72	90	151		n/a
9	R1(i1840)	Conc. Pt. (lbs)	L	04-08-00	04-08-00	Top	75	93	156		n/a
10	J4(i1832)	Conc. Pt. (lbs)	L	05-04-00	05-04-00	Top	273	137			n/a
11	J4(i1774)	Conc. Pt. (lbs)	L	06-08-00	06-08-00	Top	273	137			n/a
12	R1(i1840)	Conc. Pt. (lbs)	L	07-06-00	07-06-00	Top	72	90	151		n/a
13	J4(i1726)	Conc. Pt. (lbs)	L	08-00-00	08-00-00	Top	253	126			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	7076 ft-lbs	23220 ft-lbs	30.5%	1	04-05-00
End Shear	3013 lbs	11571 lbs	26.0%	1	01-01-08
Total Load Deflection	L/721 (0.144")	n/a	33.3%	35	04-06-08
Live Load Deflection	L/999 (0.087")	n/a	n/a	51	04-06-08
Max Defl.	0.144"	n/a	n/a	35	04-06-08
Span / Depth	10.9				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4" x 3-1/2"	3084 lbs	16.5%	18.1%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	3240 lbs	12.6%	13.8%	Spruce-Pine-Fir



DWG NO. TAM 6038-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Dropped Beams\B19A DR(I2421) (Dropped Beam)

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Dropped Beams\B19A DR(I2421)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3 1/2" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



DWG NO. TAW 6038-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Bolsa Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Bolsa Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.



Boise Cascade

**Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP****PASSED****2ND FLR FRAMING\Dropped Beams\B20A DR(i2266) (Dropped Beam)**

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALCO® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Dropped Beams\B20A DR(i2266)

Specifier:

Designer: AJ

Company:

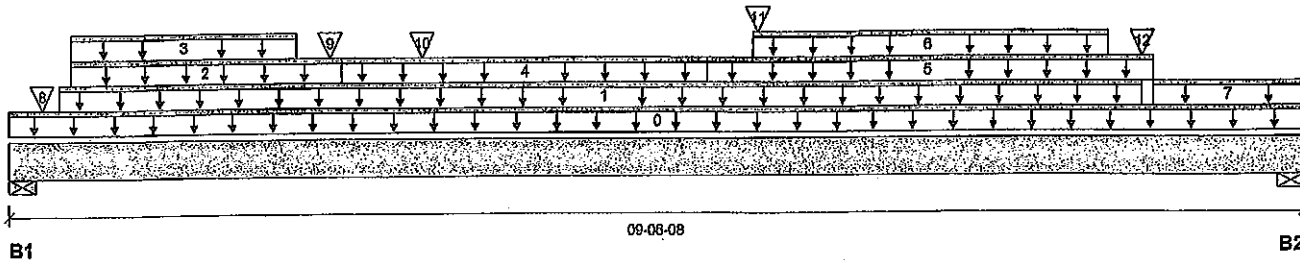**Reaction Summary (Down / Uplift) (lbs)**

Bearing	Live	Dead	Snow	Wind
B1, 2"	1272 / 0	1070 / 0	399 / 0	
B2, 4"	1109 / 0	1043 / 0	462 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-06-08	Top		10			00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	00-04-08	08-04-08	Top	102	52			n/a
2	R1(i1840)	Unf. Lin. (lb/ft)	L	00-05-08	02-05-08	Top		81			n/a
3	R1(i1840)	Unf. Lin. (lb/ft)	L	00-05-08	02-01-08	Top	44	40	92		n/a
4	R1(i1840)	Unf. Lin. (lb/ft)	L	02-05-08	05-01-08	Top		41			n/a
5	R1(i1840)	Unf. Lin. (lb/ft)	L	05-01-08	08-05-08	Top		81			n/a
6	R1(i1840)	Unf. Lin. (lb/ft)	L	05-05-08	08-01-08	Top	44	40	92		n/a
7	R1(i1840)	Unf. Lin. (lb/ft)	L	08-05-08	09-06-08	Top		41			n/a
8	-	Conc. Pt. (lbs)	L	00-02-14	00-02-14	Top	328	164			n/a
9	R1(i1840)	Conc. Pt. (lbs)	L	02-04-08	02-04-08	Top	75	93	156		n/a
10	J4(i1794)	Conc. Pt. (lbs)	L	03-00-08	03-00-08	Top	273	137			n/a
11	-	Conc. Pt. (lbs)	L	05-05-14	05-05-14	Top	345	227	151		n/a
12	-	Conc. Pt. (lbs)	L	08-04-08	08-04-08	Top	348	230	156		n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	7786 ft-lbs	23220 ft-lbs	33.5%	1	05-02-08
End Shear	3399 lbs	11571 lbs	29.4%	1	08-05-00
Total Load Deflection	L/614 (0.179")	n/a	39.1%	35	04-09-00
Live Load Deflection	L/999 (0.108")	n/a	n/a	51	04-09-00
Max Defl.	0.179"	n/a	n/a	35	04-09-00
Span / Depth	11.6				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 2" x 3-1/2"	3645 lbs	39.0%	42.7%	Spruce-Pine-Fir
B2	Wall/Plate 4" x 3-1/2"	3430 lbs	18.4%	20.1%	Spruce-Pine-Fir



SWA NO. 7AM 6039-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Dropped Beams\B20A DR(I2266) (Dropped Beam)

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Dropped Beams\B20A DR(I2266)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 00-01-11, Bottom: 00-01-11.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 0

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



ONE NO. 4x12 6039-28
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJSTM, ALLJOIST®, BC RIM BOARD™, BCIO®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B12(i2257)

Specifier:

Designer: AJ

Company:

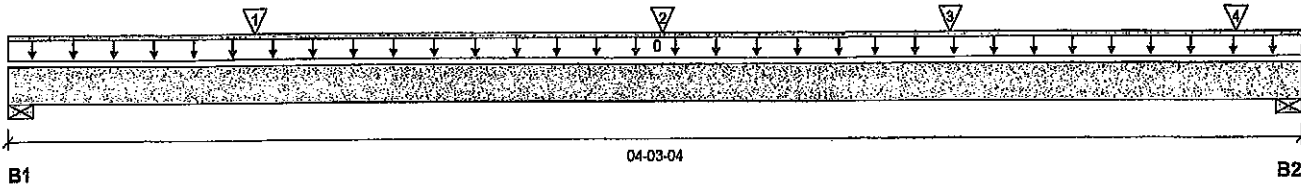

Total Horizontal Product Length = 04-03-04

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2-3/4"	602 / 0	326 / 0		
B2, 4"	903 / 0	477 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-03-04	Top	12				00-00-00
1	-	Conc. Pt. (lbs)	L	00-09-12	00-09-12	Top	382	191			n/a
2	-	Conc. Pt. (lbs)	L	02-01-13	02-01-13	Top	428	215			n/a
3	J2(i2353)	Conc. Pt. (lbs)	L	03-01-04	03-01-04	Top	317	158			n/a
4	-	Conc. Pt. (lbs)	L	04-00-10	04-00-10	Top	378	188			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1459 ft-lbs	35392 ft-lbs	4.1%	1	02-01-04
End Shear	1045 lbs	14464 lbs	7.2%	1	02-11-06
Total Load Deflection	L/999 (0.003")	n/a	n/a	4	02-01-04
Live Load Deflection	L/999 (0.002")	n/a	n/a	5	02-01-04
Max Defl.	0.003"	n/a	n/a	4	02-01-04
Span / Depth	3.9				



Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 2-3/4" x 3-1/2"	1310 lbs	22.1%	11.2%	Spruce-Pine-Fir
B2	Wall/Plate 4" x 3-1/2"	1951 lbs	22.7%	11.4%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



PROVIDE 3 ROWS OF 3 1/2" ARDOX SPIRAL NAILS @ 2" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS

OWN NO. YAM 6040-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B13(12387)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

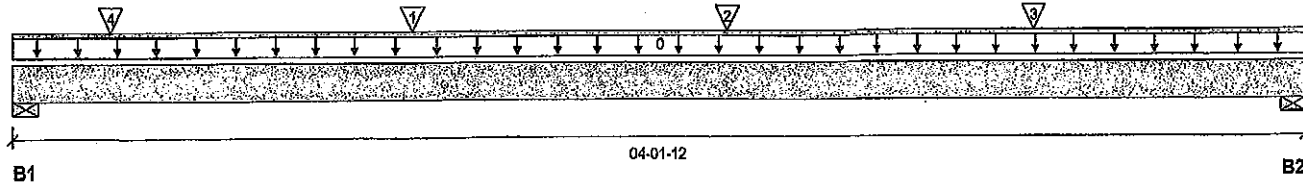

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4"	1278 / 0	664 / 0		
B2, 3-3/4"	1032 / 0	541 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-01-12	Top		12			00-00-00
1	-	Conc. Pt. (lbs)	L	01-03-07	01-03-07	Top	694	347			n/a
2	-	Conc. Pt. (lbs)	L	02-03-07	02-03-07	Top	694	347			n/a
3	-	Conc. Pt. (lbs)	L	03-03-05	03-03-05	Top	545	273			n/a
4	J8(12418)	Conc. Pt. (lbs)	L	00-03-12	00-03-12	Top	376	188			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	2393 ft-lbs	35392 ft-lbs	6.8%	1	02-03-00
End Shear	1870 lbs	14464 lbs	12.9%	1	01-03-14
Total Load Deflection	L/999 (0.004")	n/a	n/a	4	02-00-15
Live Load Deflection	L/999 (0.003")	n/a	n/a	5	02-00-15
Max Defl.	0.004"	n/a	n/a	4	02-00-15
Span / Depth	3.7				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4" x 3-1/2"	2747 lbs	31.9%	16.1%	Spruce-Pine-Fir
B2	Wall/Plate 3-3/4" x 3-1/2"	2224 lbs	27.5%	13.9%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.


Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



UWG NO. YAM 6041-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B14(i1719)

City, Province, Postal Code: WATERDOWN

Specifier:


Customer:

Designer: AJ

Code reports:

CCMC 12472-R

Company:

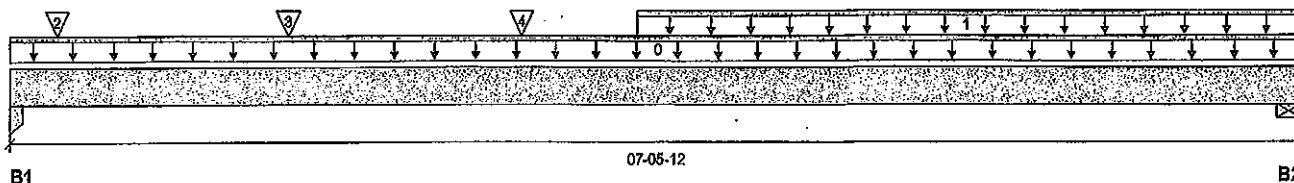

Total Horizontal Product Length = 07-05-12

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 1-3/4"	748 / 0	417 / 0		
B2, 5-1/2"	893 / 0	492 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-05-12	Top	12				00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	03-07-06	07-05-12	Top	222	111			n/a
2	J4(i1797)	Conc. Pt. (lbs)	L	00-03-06	00-03-06	Top	206	103			n/a
3	J4(i1843)	Conc. Pt. (lbs)	L	01-07-06	01-07-06	Top	163	82			n/a
4	J4(i2389)	Conc. Pt. (lbs)	L	02-11-06	02-11-06	Top	413	206			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3010 ft-lbs	35392 ft-lbs	8.5%	1	02-11-06
End Shear	1337 lbs	14464 lbs	9.2%	1	06-00-06
Total Load Deflection	L/999 (0.019")	n/a	n/a	4	03-07-06
Live Load Deflection	L/999 (0.012")	n/a	n/a	5	03-07-06
Max Defl.	0.019"	n/a	n/a	4	03-07-06
Span / Depth	7.1				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 1-3/4" x 3-1/2"	1643 lbs	33.0%	22.0%	Unspecified
B2	Wall/Plate 5-1/2" x 3-1/2"	1955 lbs	16.5%	8.3%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.


Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. **AMENDED 2020**

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



**OWG NO. TAM 6042-20
STRUCTURAL
COMPONENT ONLY**

Disclosure

Use of the Bolsa Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Bolsa Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Dry | 1 span | No cant.

February 18, 2020 08:54:51

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B15(11830)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

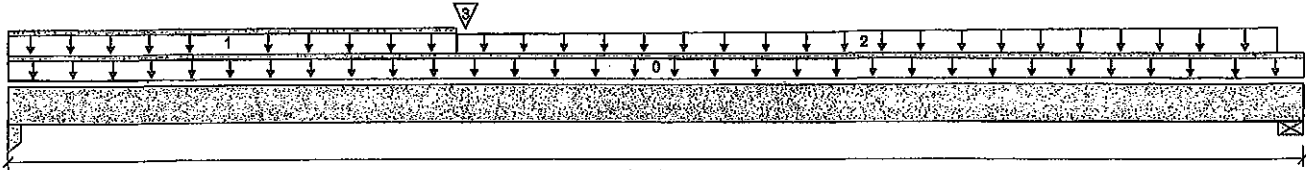

Total Horizontal Product Length = 10-07-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	501 / 0	290 / 0		
B2, 5-1/2"	394 / 0	234 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-07-08	Top	1.00	0.65	1.00	1.15	00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-08-00	Top	3				n/a
2	FC2 Floor Material	Trapezoidal (lb/ft)	L	03-08-00	10-04-12	Top	30	15			n/a
3	B16(11764)	Conc. Pt. (lbs)	L	03-08-14	03-08-14	Top	647	336			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3813 ft-lbs	17696 ft-lbs	21.5%	1	03-08-14
End Shear	1096 lbs	7232 lbs	15.2%	1	01-03-06
Total Load Deflection	L/999 (0.085")	n/a	n/a	4	04-11-02
Live Load Deflection	L/999 (0.054")	n/a	n/a	5	04-11-02
Max Defl.	0.085"	n/a	n/a	4	04-11-02
Span / Depth	10.1				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 3-1/2" x 1-3/4"	1113 lbs	22.4%	14.9%	Unspecified
B2	Wall/Plate 5-1/2" x 1-3/4"	883 lbs	14.9%	7.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



OWN NO. 7AM6043-20

STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B16(i1764)

Specifier:

Designer: AJ

Company:

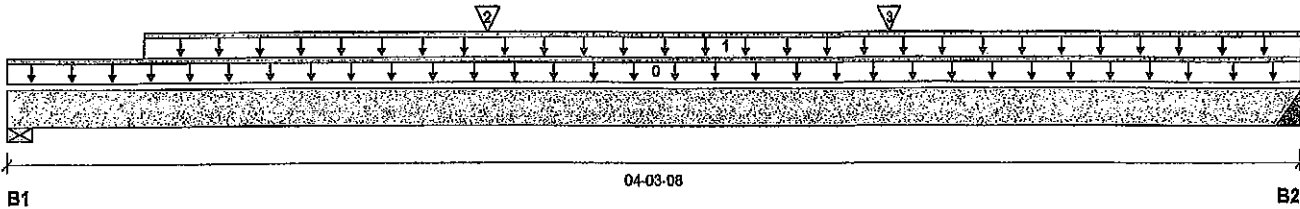

Total Horizontal Product Length = 04-03-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/2"	632 / 0	330 / 0		
B2, 2"	664 / 0	345 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-03-08	Top	1.00	0.65	1.00	1.15	00-00-00
1	STAIR	Unf. Lin. (lb/ft)	L	00-05-08	04-03-08	Top	240	120			n/a
2	J6(i1825)	Conc. Pt. (lbs)	L	01-07-00	01-07-00	Top	181	91			n/a
3	J6(i1743)	Conc. Pt. (lbs)	L	02-11-00	02-11-00	Top	191	96			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1419 ft-lbs	17696 ft-lbs	8.0%	1	02-04-00
End Shear	837 lbs	7232 lbs	11.6%	1	01-05-06
Total Load Deflection	L/999 (0.005")	n/a	n/a	4	02-03-08
Live Load Deflection	L/999 (0.004")	n/a	n/a	5	02-03-08
Max Defl.	0.005"	n/a	n/a	4	02-03-08
Span / Depth	3.8				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 5-1/2" x 1-3/4"	1361 lbs	23.0%	11.6%	Spruce-Pine-Fir
B2	Hanger 2" x 1-3/4"	1427 lbs	n/a	33.4%	HUS1.81/10

Cautions

Header for the hanger HUS1.81/10 at B2 is a Single 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF. Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned


Resistance Factor phi has been applied to all presented results per CSA O86. **AMENDED 2020**

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



OWB NO. TAN 6044 -20
**STRUCTURAL
 COMPONENT ONLY**

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B17(I2170)

City, Province, Postal Code: WATERDOWN

Specifier:


Customer:

Designer: AJ

Code reports:

CCMC 12472-R

Company:

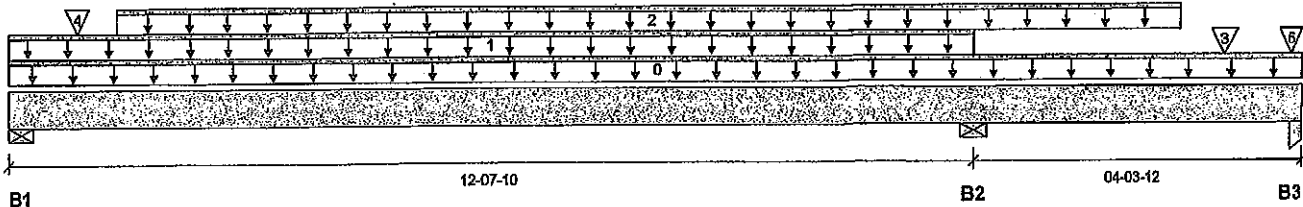

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4-3/8"	1695 / 16	906 / 0		
B2, 5-1/2"	4638 / 0	2482 / 0		
B3, 3-1/2"	939 / 1231	0 / 164		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	16-11-06	Top	12				00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	12-07-10	Top	19	9			n/a
2	Smoothed Load	Unf. Lin. (lb/ft)	L	01-04-14	15-04-14	Top	333	167			n/a
3	-	Conc. Pt. (lbs)	L	15-11-09	15-11-09	Top	377	158			n/a
4	J1(I2296)	Conc. Pt. (lbs)	L	00-10-14	00-10-14	Top	293	147			n/a
5	J1(I2172)	Conc. Pt. (lbs)	L	16-09-10	16-09-10	Top	316	158			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	9514 ft-lbs	35392 ft-lbs	26.9%	2	04-10-14
Neg. Moment	-11329 ft-lbs	-35392 ft-lbs	32.0%	1	12-07-10
End Shear	3318 lbs	14464 lbs	22.9%	2	01-04-04
Cont. Shear	5044 lbs	14464 lbs	34.9%	1	11-05-00
Total Load Deflection	L/934 (0.158")	n/a	25.7%	9	05-10-14
Live Load Deflection	L/999 (0.104")	n/a	n/a	12	05-10-14
Total Neg. Defl.	L/999 (-0.014")	n/a	n/a	9	14-04-02
Max Defl.	0.158"	n/a	n/a	9	05-10-14
Span / Depth	12.5				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4-3/8" x 3-1/2"	3675 lbs	39.0%	19.7%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	10059 lbs	84.9%	42.8%	Spruce-Pine-Fir
B3	Column 3-1/2" x 3-1/2"	1262 lbs	12.7%	8.4%	Unspecified
B3	Uplift	2051 lbs			

Cautions

Uplift of 2051 lbs found at bearing B3. (SIMPSON 1-T522 @ B3)



DWG NO. YAM6045-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Flush Beams\B17(I2170) (Flush Beam)

Dry | 2 spans | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 1.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B17(I2170)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.



BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020

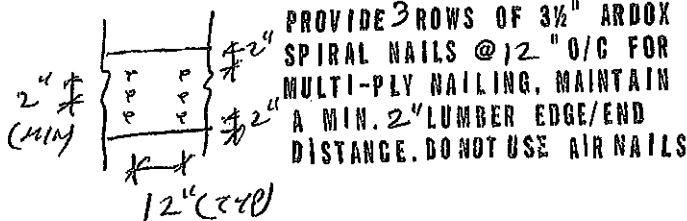

DWG NO. TAM 6045-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B18(13879)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

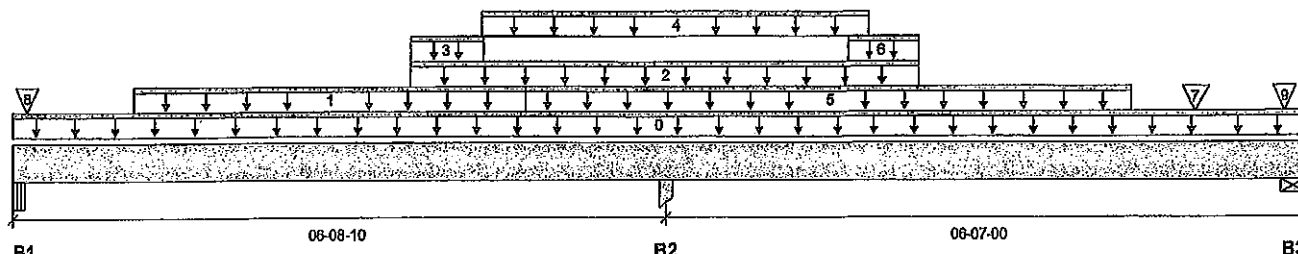

Total Horizontal Product Length = 13-03-10

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	1388 / 344	605 / 0		
B2, 6"	7432 / 0	4243 / 0		
B3, 5-1/2"	2738 / 310	2808 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-03-10	Top	1.00	0.65	1.00	1.16	00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	01-03-04	05-03-04	Top	363	182			n/a
2	5(1592)	Unf. Lin. (lb/ft)	L	04-01-02	09-04-02	Top		81			n/a
3	5(1592)	Unf. Lin. (lb/ft)	L	04-01-02	04-10-02	Top	1209	638			n/a
4	5(1592)	Unf. Lin. (lb/ft)	L	04-09-14	08-09-14	Top	698	349			n/a
5	Smoothed Load	Unf. Lin. (lb/ft)	L	05-03-04	11-06-08	Top	348	174			n/a
6	5(1592)	Unf. Lin. (lb/ft)	L	08-07-02	09-04-02	Top	2107	1087			n/a
7	J2(13755)	Conc. Pt. (lbs)	L	12-02-08	12-02-08	Top	522	287			n/a
8	4(1589)	Conc. Pt. (lbs)	L	00-01-14	00-01-14	Top	178	118			n/a
9	1(1533)	Conc. Pt. (lbs)	L	13-00-14	13-00-14	Top	1208	2139			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	6231 ft-lbs	35392 ft-lbs	17.6%	3	09-04-02
Neg. Moment	-9047 ft-lbs	-35392 ft-lbs	25.6%	1	06-08-10
End Shear	2710 lbs	14464 lbs	18.7%	3	11-10-04
Cont. Shear	7571 lbs	14464 lbs	52.3%	1	07-11-08
Total Load Deflection	L/999 (0.027")	n/a	n/a	10	09-09-08
Live Load Deflection	L/999 (0.02")	n/a	n/a	13	09-09-08
Total Neg. Defl.	L/999 (-0.008")	n/a	n/a	10	04-10-02
Max Defl.	0.027"	n/a	n/a	10	09-09-08
Span / Depth	6.4				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Beam	5-1/4" x 3-1/2"	2838 lbs	28.9%	12.7%	Unspecified
B2 Column	6" x 3-1/2"	16451 lbs	96.5%	64.2%	Unspecified
B3 Wall/Plate	5-1/2" x 3-1/2"	7617 lbs	64.3%	32.4%	Spruce-Pine-Fir



DWG NO. TAM 6046-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

1ST FLR FRAMING\Flush Beams\B18(13879) (Flush Beam)

Dry | 2 spans | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B18(13879)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/4" ARDOX
SPIRAL NAILS @ 8" O/C FOR
MULTI-PLY NAILING, MAINTAIN
A MIN. 2" LUMBER EDGE/END
DISTANCE. DO NOT USE AIR NAILS



DWG NO. YAM 6046-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B2(13880)

Specifier:

Designer: AJ

Company:

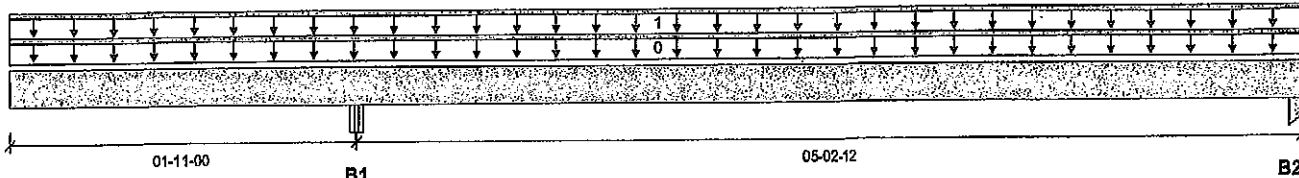

Total Horizontal Product Length = 07-01-12

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	90 / 0	103 / 0		
B2, 1-3/4"	49 / 7	49 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-01-12	Top	12				00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	07-01-12	Top	19	9			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	157 ft-lbs	35392 ft-lbs	0.4%	3	04-07-14
Neg. Moment	-100 ft-lbs	-35392 ft-lbs	0.3%	1	01-11-00
End Shear	73 lbs	14464 lbs	0.5%	3	06-00-02
Cont. Shear	94 lbs	14464 lbs	0.6%	1	03-01-08
Total Load Deflection	L/999 (0.001")	n/a	n/a	10	04-06-13
Live Load Deflection	2xL/1998 (-0")	n/a	n/a	13	00-00-00
Total Neg. Defl.	2xL/1998 (-0")	n/a	n/a	10	00-00-00
Max Defl.	0.001"	n/a	n/a	10	04-06-13
Span / Depth	5.2				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Beam	5-1/4" x 3-1/2"	264 lbs	2.7%	1.2%	Unspecified
B2 Column	1-3/4" x 3-1/2"	135 lbs	2.7%	1.8%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets User specified (2xL/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

Cantilevers require sheathed bottom flanges, blocking at cantilever support and closure at ends.


CONFORMS TO OBC 2012

DWG NO. FAM 6047 -20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALCO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLR FRAMING\Flush Beams\B3(I3832) (Flush Beam)**

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B3(I3832)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:



B1

11-07-10

B2

Total Horizontal Product Length = 11-07-10

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 1-3/4"	108 / 0	124 / 0		
B2, 1-7/8"	108 / 0	124 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-07-10	Top	1.00	0.65	1.00	1.15	00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	11-07-10	Top	19	9			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	894 ft-lbs	35392 ft-lbs	2.5%	1	05-09-12
End Shear	255 lbs	14464 lbs	1.8%	1	01-01-10
Total Load Deflection	L/999 (0.016")	n/a	n/a	4	05-09-12
Live Load Deflection	L/999 (0.007")	n/a	n/a	5	05-09-12
Max Defl.	0.016"	n/a	n/a	4	05-09-12
Span / Depth	11.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 1-3/4" x 3-1/2"	316 lbs	6.4%	4.2%	Unspecified
B2	Wall/Plate 1-7/8" x 3-1/2"	317 lbs	7.9%	4.0%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING, MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



UWB NO. TAM 6048-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

BC CALCO Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B4(I3765)

Specifier:

Designer: AJ

Company:

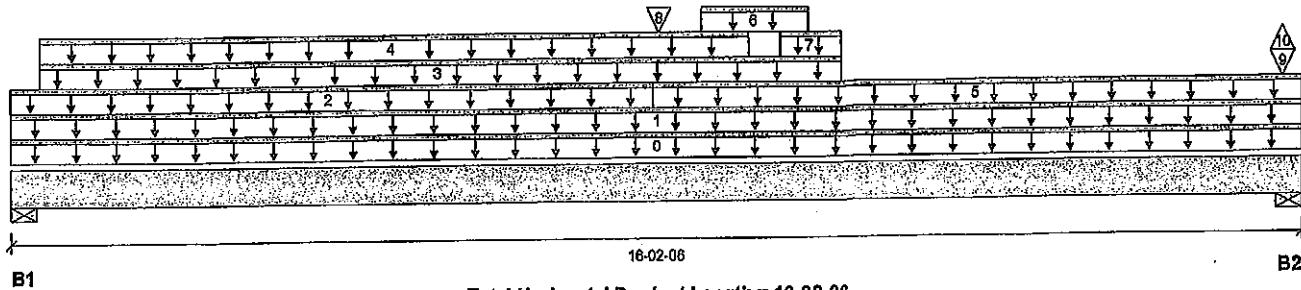

Total Horizontal Product Length = 16-02-06

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 1-7/8"	1167 / 0	1263 / 0		
B2, 5-1/2"	1277 / 5	1062 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	16-02-06	Top		12			00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	16-02-06	Top	26	13			n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	08-00-08	Top	6	3			n/a
3	6(I614)	Unf. Lin. (lb/ft)	L	00-04-06	10-04-10	Top		81			n/a
4	6(I614)	Unf. Lin. (lb/ft)	L	00-04-06	09-02-14	Top	35	23			n/a
5	FC1 Floor Material	Unf. Lin. (lb/ft)	L	08-00-08	16-02-06	Top	7	4			n/a
6	6(I614)	Unf. Lin. (lb/ft)	L	08-07-12	09-11-12	Top	487	254			n/a
7	6(I614)	Unf. Lin. (lb/ft)	L	09-07-10	10-04-10	Top	279	139			n/a
8	B5(I3861)	Conc. Pt. (lbs)	L	08-01-06	08-01-06	Top	709	365			n/a
9	2(I532)	Conc. Pt. (lbs)	L	15-11-10	15-11-10	Top	36	41			n/a
10	2(I532)	Conc. Pt. (lbs)	L	15-11-10	15-11-10	Top	-5				n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	18495 ft-lbs	35392 ft-lbs	52.3%	1	08-01-06
End Shear	3234 lbs	14464 lbs	22.4%	1	01-01-12
Total Load Deflection	L/343 (0.549")	n/a	69.9%	6	08-00-08
Live Load Deflection	L/642 (0.294")	n/a	56.1%	8	08-01-06
Max Defl.	0.549"	n/a	n/a	6	08-00-08
Span / Depth	15.9				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 1-7/8" x 3-1/2"	3330 lbs	82.5%	41.6%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	3244 lbs	27.4%	13.8%	Spruce-Pine-Fir



DWG NO. YAM6049 -20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

1ST FLR FRAMING\Flush Beams\B4(I3765) (Flush Beam)

PASSED

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

Dry | 1 span | No cant.

February 18, 2020 08:54:51

File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B4(I3765)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/8" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



DWG NO. TAM 6049-20

STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

**Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLR FRAMING\Flush Beams\B5(13861) (Flush Beam)**

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B5(13861)

Specifier:

Designer: AJ

Company:



03-07-04

B1

B2

Total Horizontal Product Length = 03-07-04

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	699 / 0	360 / 0		
B2, 2"	663 / 0	343 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-07-04	Top	1.00	0.65	1.00	1.15	00-00-00
1	STAIR	Unf. Lin. (lb/ft)	L	00-00-14	03-07-04	Top	240	120			n/a
2	J5(13844)	Conc. Pt. (lbs)	L	00-02-08	00-02-08	Top	129	64			n/a
3	J5(13855)	Conc. Pt. (lbs)	L	01-05-12	01-05-12	Top	206	103			n/a
4	J5(13872)	Conc. Pt. (lbs)	L	02-09-12	02-09-12	Top	180	90			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1204 ft-lbs	17696 ft-lbs	6.8%	1	01-07-03
End Shear	684 lbs	7232 lbs	9.5%	1	02-05-06
Total Load Deflection	L/999 (0.004")	n/a	n/a	4	01-09-12
Live Load Deflection	L/999 (0.002")	n/a	n/a	5	01-09-12
Max Defl.	0.004"	n/a	n/a	4	01-09-12
Span / Depth	3.4				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Hanger 2" x 1-3/4"	1499 lbs	n/a	35.1%	HUS1.81/10
B2	Hanger 2" x 1-3/4"	1423 lbs	n/a	33.3%	HUS1.81/10

Cautions


Header for the hanger HUS1.81/10 at B1 is a Double 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF.
Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.
Header for the hanger HUS1.81/10 at B2 is a Double 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF.

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
Design meets Code minimum (L/360) Live load deflection criteria.
Calculations assume member is fully braced.
Hanger Manufacturer: Unassigned
Resistance Factor phi has been applied to all presented results per CSA O86.
BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
Design based on Dry Service Condition.
Importance Factor: Normal Part code: Part 9

CONFORMS TO QDC 2012

AMENDED 2020



HWB NO. 9AM 6050 -20
**STRUCTURAL
COMPONENT ONLY**

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).
Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods.
Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCi®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,



Bolsse Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLR FRAMING\Flush Beams\B6(i3876) (Flush Beam)**

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALCO® Member Report

Bulld 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B6(i3876)

Specifier:

Designer: AJ

Company:

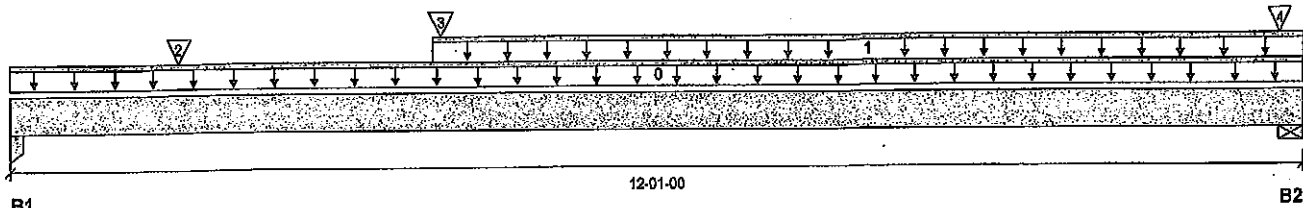

Total Horizontal Product Length = 12-01-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	2577 / 0	1554 / 0		
B2, 5-1/2"	772 / 0	520 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-01-00	Top	1.00	0.65	1.00	1.15	00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	03-11-02	12-01-00	Top	27	13			n/a
2	-	Conc. Pt. (lbs)	L	01-07-02	01-07-02	Top	2325	1374			n/a
3	B5(i3861)	Conc. Pt. (lbs)	L	04-00-00	04-00-00	Top	654	338			n/a
4	2(i532)	Conc. Pt. (lbs)	L	11-10-04	11-10-04	Top	127	95			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	9181 ft-lbs	35392 ft-lbs	25.9%	1	04-00-00
End Shear	5775 lbs	14464 lbs	39.9%	1	01-03-06
Total Load Deflection	L/995 (0.138")	n/a	24.1%	4	05-04-03
Live Load Deflection	L/999 (0.086")	n/a	n/a	5	05-04-03
Max Defl.	0.138"	n/a	n/a	4	05-04-03
Span / Depth	11.6				

			Demand/ Resistance	Demand/ Resistance		
Bearing Supports	Dim. (LxW)	Demand	Support	Member	Material	
B1	Column	3-1/2" x 3-1/2"	5808 lbs	58.4%	38.9%	Unspecified
B2	Wall/Plate	5-1/2" x 3-1/2"	1807 lbs	15.3%	7.7%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.


Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86. **AMENDED 2020**


BC CALCO® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



NO. 47620
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Bolsse Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Bolsse Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALCO®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLR FRAMING\Flush Beams\B7(i3864) (Flush Beam)**

Dry | 1 span | No cant.

February 18, 2020 08:54:51

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B7(i3864)

Specifier:

Designer: AJ

Company:

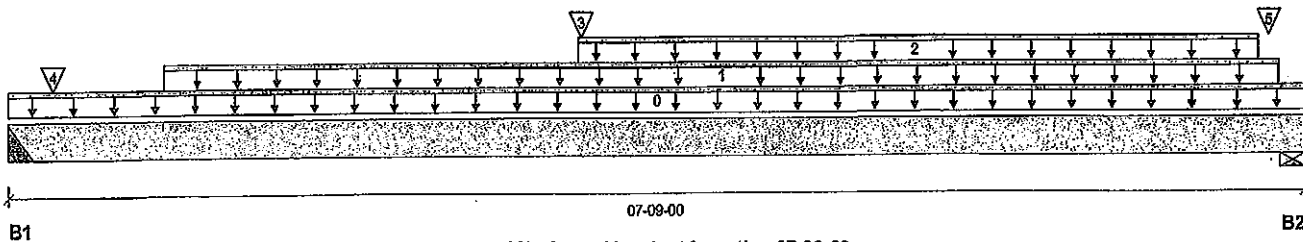**Reaction Summary (Down / Uplift) (lbs)**

Bearing	Live	Dead	Snow	Wind
B1, 4"	2280 / 0	1354 / 0		
B2, 3-1/2"	1726 / 0	976 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.85	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-09-00	Top		12			00-00-00
1	Smoothed Load	Unf. Lin. (lb/ft)	L	00-11-00	07-07-00	Top	216	108			n/a
2	STAIR	Unf. Lin. (lb/ft)	L	03-04-11	07-05-08	Top	120	60			n/a
3	B9(i3871)	Conc. Pt. (lbs)	L	03-04-14	03-04-14	Top	63	36			n/a
4	-	Conc. Pt. (lbs)	L	00-03-04	00-03-04	Top	1439	884			n/a
5	E10(i425)	Conc. Pt. (lbs)	L	07-06-04	07-06-04	Top	545	338			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	4497 ft-lbs	35392 ft-lbs	12.7%	1	04-03-00
End Shear	2014 lbs	14464 lbs	13.9%	1	06-05-10
Total Load Deflection	L/999 (0.03")	n/a	n/a	4	03-11-08
Live Load Deflection	L/999 (0.019")	n/a	n/a	5	03-11-08
Max Defl.	0.03"	n/a	n/a	4	03-11-08
Span / Depth	7.3				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Hanger	4" x 3-1/2"	5113 lbs	n/a	29.9%	HGUS410
B2 Wall/Plate	3-1/2" x 3-1/2"	3809 lbs	50.5%	25.5%	Spruce-Pine-Fir

Cautions

Header for the hanger HGUS410 at B1 is a Double 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF.
Hanger model HGUS410 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.



DWG NO. TAM 6052-20
STRUCTURAL
COMPONENT ONLY



Bolse Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****1ST FLR FRAMING\Flush Beams\B7(13864) (Flush Beam)**

BC CALC® Member Report

Dry | 1 span | No cant.

February 18, 2020 08:54:51

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B7(13864)

City, Province, Postal Code: WATERDOWN

Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

CONFORMS TO OBC 2012

Hanger Manufacturer: Unassigned


AMENDED 2020

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9



PROVIDE 3 ROWS OF 3/4" ARDOX
SPIRAL NAILS @ 8" O/C FOR
MULTI-PLY NAILING. MAINTAIN
A MIN. 2" LUMBER EDGE/END
DISTANCE. DO NOT USE AIR NAILS



DWG NO. TAM6052-20

STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Bolse Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Bolse Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B8(13867)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:



Total Horizontal Product Length = 03-09-04

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	52 / 0	38 / 0		
B2, 3-1/2"	48 / 0	35 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-09-04	Top	6				00-00-00
1	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-09-04	Top	27	13			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	80 ft-lbs	17696 ft-lbs	0.5%	1	01-11-08
End Shear	34 lbs	7232 lbs	0.5%	1	01-05-02
Total Load Deflection	L/999 (0")	n/a	n/a	4	01-11-08
Live Load Deflection	L/999 (0")	n/a	n/a	5	01-11-08
Max Defl.	0"	n/a	n/a	4	01-11-08
Span / Depth	3.2				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Column 5-1/4" x 1-3/4"	126 lbs	1.7%	1.1%	Unspecified
B2	Column 3-1/2" x 1-3/4"	116 lbs	2.3%	1.6%	Unspecified

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020


 UWG NO. TAM6053 -20
**STRUCTURAL
 COMPONENT ONLY**
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B9(13871)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

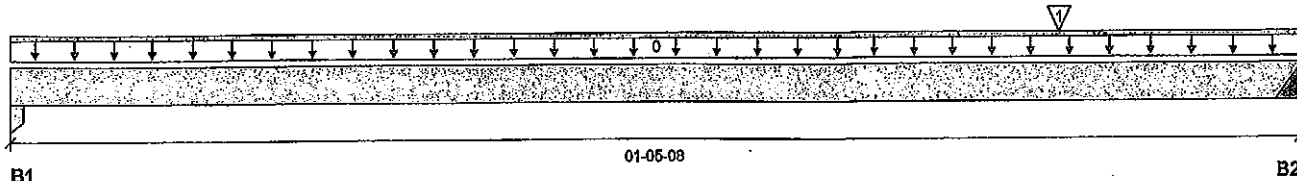

Total Horizontal Product Length = 01-05-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 1-3/4"	8 / 0	8 / 0		
B2, 2"	55 / 0	32 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	01-05-08	Top	6				00-00-00
1	J6(13869)	Conc. Pt. (lbs)	L	01-02-04	01-02-04	Top	63	32			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	20 ft-lbs	17696 ft-lbs	0.1%	1	01-02-04
End Shear	14 lbs	7232 lbs	0.2%	1	01-01-10
Span / Depth	1.3				

Bearing Supports

B1	Column	1-3/4" x 1-3/4"	23 lbs	0.9%	0.6%	Unspecified
B2	Hanger	2" x 1-3/4"	123 lbs	n/a	2.9%	HUS1.81/10

Cautions

Header for the hanger HUS1.81/10 at B2 is a Double 1-3/4" x 11-7/8" VERSA-LAM® 1.7 2400 DF. Hanger model HUS1.81/10 and seat length were input by the user. Hanger has not been analyzed for adequate capacity.

Notes

Calculations assume member is fully braced.

Hanger Manufacturer: Unassigned

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9



HWB NO. TAM 6054-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCi®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

CONFORMS TO UBC 2012

AMENDED 2020



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Dropped Beams\B19 DR(i4489) (Dropped Beam)


BC CALC® Member Report
Bulld 7239

Dry | 1 span | No cant.

February 18, 2020 09:06:05

Job name:
Address:
City, Province, Postal Code: WATERDOWN
Customer:
Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 2.mmdl
Description: 2ND FLR FRAMING\Dropped Beams\B19 DR(i4489)
Specifier:
Designer: AJ
Company:

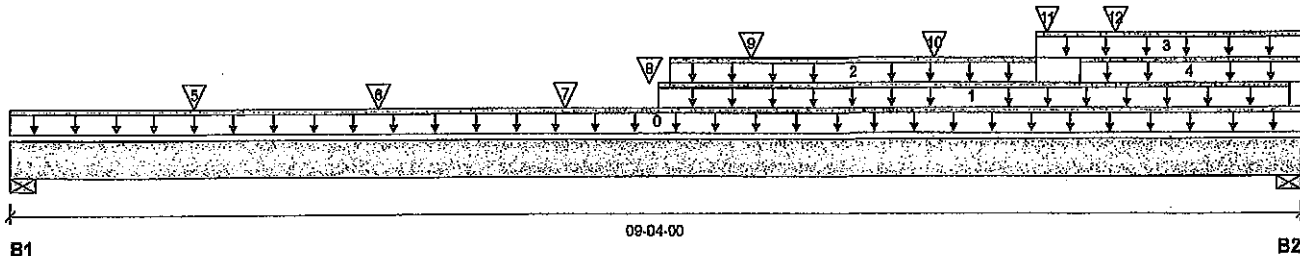

Total Horizontal Product Length = 09-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 4"	1206 / 0	1090 / 0	524 / 0	
B2, 5-1/2"	1274 / 0	1230 / 0	780 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-04-00	Top		10			00-00-00
1	ROOF	Unf. Lin. (lb/ft)	L	04-08-00	09-02-14	Top	33	30	63		n/a
2	R1(i4465)	Unf. Lin. (lb/ft)	L	04-09-00	07-05-00	Top		41			n/a
3	R1(i4465)	Unf. Lin. (lb/ft)	L	07-05-00	09-04-00	Top		81			n/a
4	R1(i4465)	Unf. Lin. (lb/ft)	L	07-09-00	09-04-00	Top	44	40	92		n/a
5	J4(i4437)	Conc. Pt. (lbs)	L	01-04-00	01-04-00	Top	414	342	170		n/a
6	J4(i4460)	Conc. Pt. (lbs)	L	02-08-00	02-08-00	Top	394	331	127		n/a
7	J4(i4484)	Conc. Pt. (lbs)	L	04-00-00	04-00-00	Top	286	237	87		n/a
8	B21(i4467)	Conc. Pt. (lbs)	L	04-07-04	04-07-04	Top	282	331	197		n/a
9	J4(i4447)	Conc. Pt. (lbs)	L	05-04-00	05-04-00	Top	244	136	69		n/a
10	J4(i4129)	Conc. Pt. (lbs)	L	06-08-00	06-08-00	Top	273	137			n/a
11	R1(i4465)	Conc. Pt. (lbs)	L	07-06-00	07-06-00	Top	72	90	151		n/a
12	J4(i3973)	Conc. Pt. (lbs)	L	08-00-00	08-00-00	Top	286	156	69		n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	9223 ft-lbs	23220 ft-lbs	39.7%	1	04-07-04
End Shear	3683 lbs	11571 lbs	31.8%	1	01-01-08
Total Load Deflection	L/561 (0.185")	n/a	42.8%	35	04-07-04
Live Load Deflection	L/999 (0.114")	n/a	n/a	51	04-07-04
Max Defl.	0.185"	n/a	n/a	35	04-07-04
Span / Depth	10.9				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 4" x 3-1/2"	3696 lbs	32.5%	21.6%	Spruce-Pine-Fir
B2	Wall/Plate 5-1/2" x 3-1/2"	4227 lbs	16.5%	18.0%	Spruce-Pine-Fir



OWN NO. TAM 6055 -20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

PASSED

2ND FLR FRAMING\Dropped Beams\B19 DR(i4489) (Dropped Beam)

Dry | 1 span | No cant.

February 18, 2020 09:06:05

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 2.mmdl

Description: 2ND FLR FRAMING\Dropped Beams\B19 DR(i4489)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 01-01-08, Bottom: 01-01-08.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 2 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



DWG NO. YAW 6055-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Dry | 1 span | No cant.

February 18, 2020 09:06:05

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 2.mmdl

Address:

Description: 2ND FLR FRAMING\Dropped Beams\B20 DR(I4444)

City, Province, Postal Code: WATERDOWN


Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

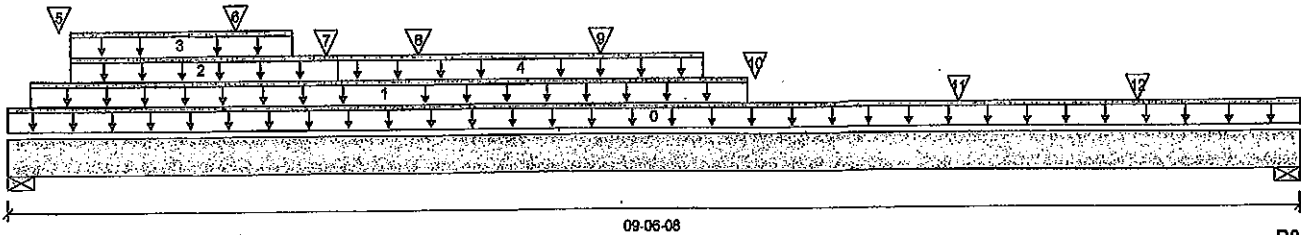

Total Horizontal Product Length = 09-06-08

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 2"	1316 / 0	1199 / 0	738 / 0	
B2, 4"	1285 / 0	1195 / 0	623 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-06-08	Top		10			00-00-00
1	ROOF	Unf. Lin. (lb/ft)	L	00-02-00	05-05-08	Top	33	30	63		n/a
2	R1(I4438)	Unf. Lin. (lb/ft)	L	00-05-08	02-05-08	Top		81			n/a
3	R1(I4438)	Unf. Lin. (lb/ft)	L	00-05-08	02-01-08	Top	44	40	92		n/a
4	R1(I4438)	Unf. Lin. (lb/ft)	L	02-05-08	05-01-08	Top		41			n/a
5	J4(I4000)	Conc. Pt. (lbs)	L	00-04-08	00-04-08	Top	174	87			n/a
6	J4(I3957)	Conc. Pt. (lbs)	L	01-08-08	01-08-08	Top	303	165	69		n/a
7	R1(I4438)	Conc. Pt. (lbs)	L	02-04-08	02-04-08	Top	75	93	156		n/a
8	J4(I4129)	Conc. Pt. (lbs)	L	03-00-08	03-00-08	Top	273	137			n/a
9	J4(I4461)	Conc. Pt. (lbs)	L	04-04-08	04-04-08	Top	295	161	69		n/a
10	-	Conc. Pt. (lbs)	L	05-06-03	05-06-03	Top	430	478	280		n/a
11	J4(I4479)	Conc. Pt. (lbs)	L	07-00-08	07-00-08	Top	371	320	125		n/a
12	J4(I4471)	Conc. Pt. (lbs)	L	08-04-08	08-04-08	Top	427	362	195		n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	9800 ft-lbs	23220 ft-lbs	42.2%	1	04-09-00
End Shear	4031 lbs	11571 lbs	34.8%	1	08-05-00
Total Load Deflection	L/482 (0.228")	n/a	49.8%	35	04-09-00
Live Load Deflection	L/777 (0.142")	n/a	46.3%	51	04-09-00
Max Defl.	0.228"	n/a	n/a	35	04-09-00
Span / Depth	11.6				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	2" x 3-1/2"	4211 lbs	45.1%	49.3%	Spruce-Pine-Fir
B2	4" x 3-1/2"	4044 lbs	35.6%	23.7%	Spruce-Pine-Fir



DWG NO. YAM 6056 -20
STRUCTURAL
COMPONENT ONLY



Boise Cascade

**Double 1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP****PASSED****2ND FLR FRAMING\Dropped Beams\B20 DR(I4444) (Dropped Beam)**

Dry | 1 span | No cant.

February 18, 2020 09:06:05

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 2.mmdl

Description: 2ND FLR FRAMING\Dropped Beams\B20 DR(I4444)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume unbraced length of Top: 01-02-04, Bottom: 01-02-04.


Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012**AMENDED 2020**

PROVIDE 3 ROWS OF 3 1/2" ARDOX
SPIRAL NAILS @ 8" O/C FOR
MULTI-PLY NAILING. MAINTAIN
A MIN. 2" LUMBER EDGE/END
DISTANCE. DO NOT USE AIR NAILS



DWG NO. YAM6056-20

**STRUCTURAL
COMPONENT ONLY****Disclosure**

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALCO® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 2.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B21(i4467)

Specifier:

Designer: AJ

Company:

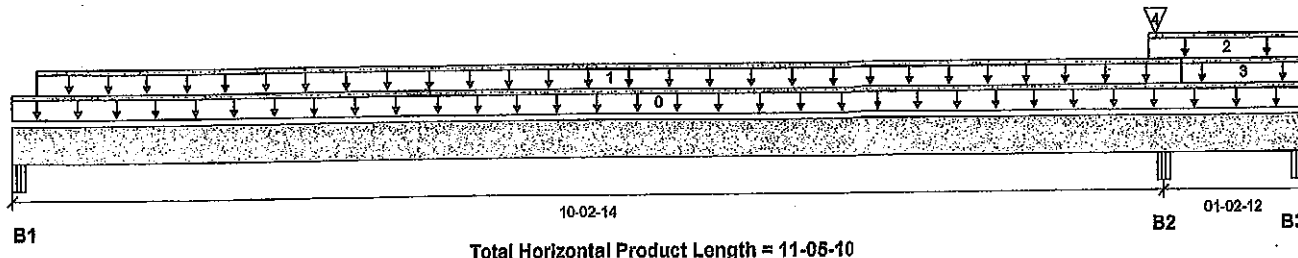

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	105 / 0	103 / 0	0 / 0	
B2, 3-1/2"	620 / 0	650 / 0	206 / 0	
B3, 5-1/4"	38 / 350	0 / 293	50 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-05-10	Top		12			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	10-04-10	Top	27	13			n/a
2	ROOF	Unf. Lin. (lb/ft)	L	10-01-02	11-05-10	Top	33	30	63		n/a
3	FC2 Floor Material	Unf. Lin. (lb/ft)	L	10-04-10	11-05-10	Top	16	7			n/a
4	E21(i1667)	Conc. Pt. (lbs)	L	10-01-14	10-01-14	Top	81	136	169		n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	517 ft-lbs	35392 ft-lbs	1.5%	44	04-02-04
Neg. Moment	-806 ft-lbs	-35392 ft-lbs	2.3%	1	10-02-14
End Shear	919 lbs	14464 lbs	6.4%	44	11-00-06
Cont. Shear	998 lbs	14464 lbs	6.9%	19	10-04-10
Total Load Deflection	L/999 (0.005")	n/a	n/a	107	04-08-00
Live Load Deflection	L/999 (0.003")	n/a	n/a	159	04-08-00
Total Neg. Defl.	L/999 (-0")	n/a	n/a	107	10-07-03
Max Defl.	0.005"	n/a	n/a	107	04-08-00
Span / Depth	10.0				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Beam	5-1/4" x 3-1/2"	287 lbs	2.9%	1.3%	Unspecified
B2 Beam	3-1/2" x 3-1/2"	1948 lbs	13.0%	13.0%	VL 2.0 3100 SP
B3 Beam	5-1/4" x 3-1/2"	0 lbs	n/a	n/a	Unspecified
B3 Uplift		892 lbs			

Cautions

Uplift of 892 lbs found at bearing B3. (SIMPSON 2-H2-5A @ (7.33)



OWG NO. TAM6057-20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

2ND FLR FRAMING\Flush Beams\B21(i4467) (Flush Beam)

PASSED

BC CALC® Member Report

Dry | 2 spans | No cant.

February 18, 2020 09:06:05

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

File name: MOUNTAINASH 4 EL 2.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B21(i4467)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.


Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/4\"/>



UWG NO. TAW 6057-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCi®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****2ND FLR FRAMING\Flush Beams\B22(I4454) (Flush Beam)**

Dry | 2 spans | No cant.

February 18, 2020 09:08:05

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 2.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B22(I4454)

Specifier:

Designer: AJ

Company:

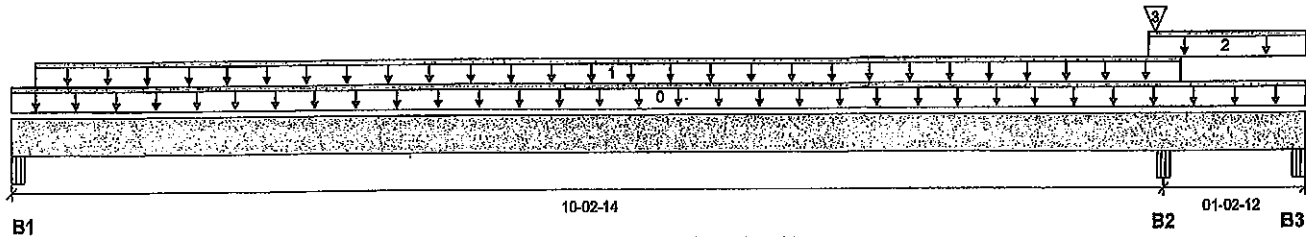**Reaction Summary (Down / Uplift) (lbs)**

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	211 / 0	156 / 0	0 / 0	
B2, 3-1/2"	1088 / 0	876 / 0	118 / 0	
B3, 5-1/4"	27 / 699	0 / 474	50 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-05-10	Top		12			00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	10-04-10	Top	53	27			n/a
2	ROOF	Unf. Lin. (lb/ft)	L	10-01-02	11-05-10	Top	33	30	63		n/a
3	E19(I1665)	Conc. Pt. (lbs)	L	10-01-14	10-01-14	Top	39	107	81		n/a


Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	926 ft-lbs	35392 ft-lbs	2.6%	44	04-02-04
Neg. Moment	-1440 ft-lbs	-35392 ft-lbs	4.1%	1	10-02-14
End Shear	1664 lbs	14464 lbs	11.5%	44	11-00-06
Cont. Shear	1731 lbs	14464 lbs	12.0%	1	10-04-10
Total Load Deflection	L/999 (0.009")	n/a	n/a	107	04-08-00
Live Load Deflection	L/999 (0.005")	n/a	n/a	159	04-08-00
Total Neg. Defl.	L/999 (-0")	n/a	n/a	107	10-07-03
Max Defl.	0.009"	n/a	n/a	107	04-08-00
Span / Depth	10.0				

Bearing Supports	Dlm. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1 Beam	5-1/4" x 3-1/2"	511 lbs	5.2%	2.3%	Unspecified
B2 Beam	3-1/2" x 3-1/2"	2845 lbs	19.0%	19.0%	VL 2.0 3100 SP
B3 Beam	5-1/4" x 3-1/2"	0 lbs	n/a	n/a	Unspecified
B3 Uplift		1641 lbs			

Cautions

Uplift of 1641 lbs found at bearing B3. (SIMPSON 2-H2-54 + 4-3 1/2" ALLOY STEEL TOE-NAILS @ ST. B3).



DWG NO. YAM605B-20

**STRUCTURAL
COMPONENT ONLY**



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP
2ND FLR FRAMING\Flush Beams\B22(i4454) (Flush Beam)

PASSED

BC CALC® Member Report

Dry | 2 spans | No cant.

February 18, 2020 09:06:05

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 2.mmdl

Address:

Description: 2ND FLR FRAMING\Flush Beams\B22(i4454)

City, Province, Postal Code: WATERDOWN

Specifier:

Customer:

Designer: AJ

Code reports: CCMC 12472-R

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

AMENDED 2020


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Unbalanced snow loads determined from building geometry were used in selected product's verification.


Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012



PROVIDE 3 ROWS OF 3 1/2" ARDOX
SPIRAL NAILS @ 12" O/C FOR
MULTI-PLY NAILING. MAINTAIN
A MIN. 2" LUMBER EDGE/END
DISTANCE. DO NOT USE AIR NAILS



DWG NO. TAM 6058-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Borise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Borise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0768 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****2ND FLR FRAMING\Flush Beams\B22(i4484) (Flush Beam)****PASSED**

BC CALC® Member Report

Dry | 2 spans | No cant.

February 18, 2020 09:19:26

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 3 OPT.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B22(i4484)

Specifier:

Designer: AJ

Company:

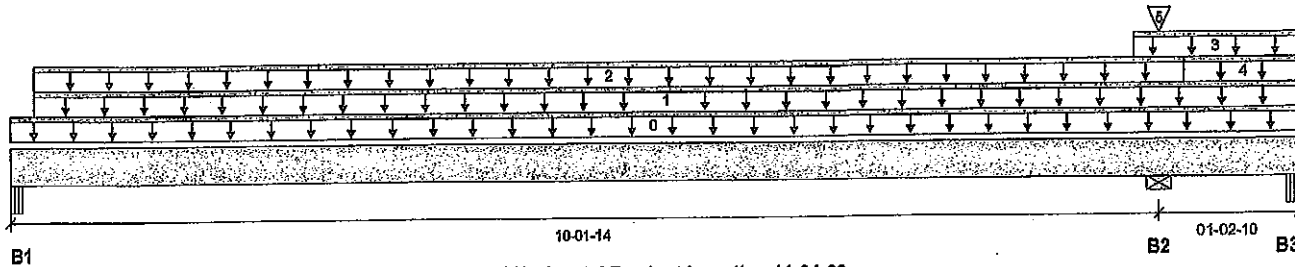**Reaction Summary (Down / Uplift) (lbs)**

Bearing	Live	Dead	Snow	Wind
B1, 5-1/4"	105 / 0	102 / 0	0 / 0	
B2, 5-1/2"	504 / 0	494 / 0	46 / 0	
B3, 4-1/8"	34 / 311	0 / 260	46 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-04-08	Top	1.00	0.65	1.00	1.15	00-00-00
1	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	11-04-08	Top	7	4			n/a
2	FC2 Floor Material	Unf. Lin. (lb/ft)	L	00-02-10	10-04-10	Top	20	10			n/a
3	ROOF	Unf. Lin. (lb/ft)	L	09-11-02	11-04-08	Top	33	30	63		n/a
4	FC2 Floor Material	Unf. Lin. (lb/ft)	L	10-04-10	11-04-08	Top	6	3			n/a
5	E20(i1666)	Conc. Pt. (lbs)	L	10-01-14	10-01-14	Top		14			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	511 ft-lbs	35392 ft-lbs	1.4%	44	04-01-08
Neg. Moment	-788 ft-lbs	-35392 ft-lbs	2.2%	1	10-01-14
End Shear	813 lbs	14464 lbs	5.6%	44	11-00-06
Cont. Shear	886 lbs	14464 lbs	6.1%	1	10-04-10
Total Load Deflection	L/999 (0.005")	n/a	n/a	107	04-07-02
Live Load Deflection	L/999 (0.003")	n/a	n/a	159	04-07-02
Total Neg. Defl.	L/999 (-0")	n/a	n/a	107	10-06-09
Max Defl.	0.005"	n/a	n/a	107	04-07-02
Span / Depth	9.9				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Beam 5-1/4" x 3-1/2"	285 lbs	2.9%	1.3%	Unspecified
B2	Wall/Plate 5-1/2" x 3-1/2"	1420 lbs	12.0%	6.0%	Spruce-Pine-Fir
B3	Beam 4-1/8" x 3-1/2"	0 lbs	n/a	n/a	Unspecified
B3	Uplift	792 lbs			

Cautions

Uplift of 792 lbs found at bearing B3. (SIMPSON 2-HZ-57 @ 07-33)



HWB NO. TAM6059 -20
STRUCTURAL
COMPONENT ONLY



Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP
2ND FLR FRAMING\Flush Beams\B22(I4484) (Flush Beam)

PASSED

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R

Dry | 2 spans | No cant.

February 18, 2020 09:19:26

File name: MOUNTAINASH 4 EL 3 OPT.mmdl

Description: 2ND FLR FRAMING\Flush Beams\B22(I4484)

Specifier:

Designer: AJ

Company:

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Unbalanced snow loads determined from building geometry were used in selected product's verification.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3 1/2" ARDOX SPIRAL NAILS @ 12" O/C FOR MULTI-PLY NAILING. MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



OWG NO. FAW 6059-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

BC CALC® Member Report

Build 7239

Job name:

Address:

City, Province, Postal Code: WATERDOWN

Customer:

Code reports: CCMC 12472-R


File name: MOUNTAINASH 4 EL 1 DECK CONDITION.mmdl

Description: 1ST FLR FRAMING\Flush Beams\B1A(14890)

Specifier:

Designer: AJ

Company:

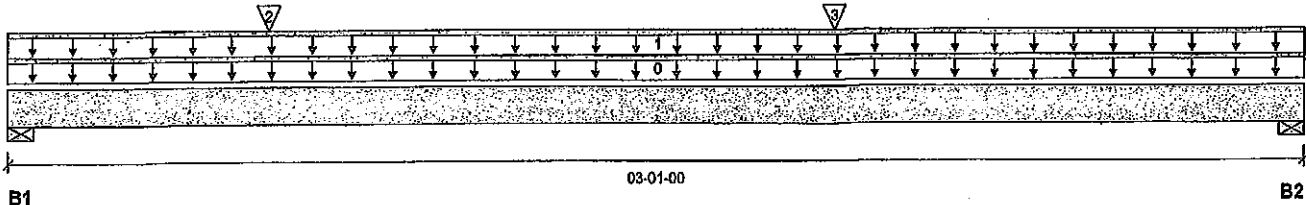

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3"	818 / 0	552 / 0		
B2, 3"	689 / 0	487 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	12				00-00-00
1	E1(1429)	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	262	212			n/a
2	J3(14853)	Conc. Pt. (lbs)	L	00-07-08	00-07-08	Top	349	174			n/a
3	J3(14853)	Conc. Pt. (lbs)	L	01-11-08	01-11-08	Top	349	174			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1140 ft-lbs	35392 ft-lbs	3.2%	1	01-08-12.
End Shear	722 lbs	14464 lbs	5.0%	1	01-10-02
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	01-06-08
Live Load Deflection	L/999 (0.001")	n/a	n/a	5	01-06-08
Max Defl.	0.001"	n/a	n/a	4	01-06-08
Span / Depth	2.7				

Bearing Supports

	Dlm. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3" x 3-1/2"	1917 lbs	29.7%	15.0%	Spruce-Pine-Fir
B2	Wall/Plate 3" x 3-1/2"	1643 lbs	25.4%	12.8%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.


Resistance Factor phi has been applied to all presented results per CSA O86. AMENDED 2020

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.


Design based on Dry Service Condition.

Importance Factor: Normal Part code: Part 9

CONFORMS TO OBC 2012



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING, MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS



ONE NO. TAN 6060-20
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

Build 7239

Job name:

File name: MOUNTAINASH 4 EL 1 DECK CONDITION.mmdl

Address:

Description: 1ST FLR FRAMING\Flush Beams\B1B(14889)

City, Province, Postal Code: WATERDOWN

Specifier:


Customer:

Designer: AJ

Code reports:

CCMC 12472-R

Company:

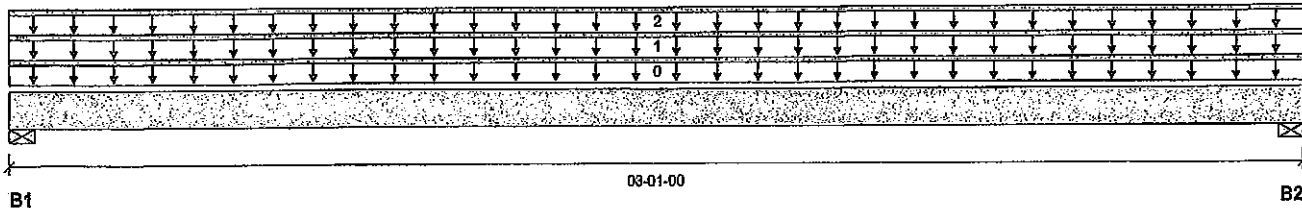

Total Horizontal Product Length = 03-01-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B1, 3"	79 / 0	192 / 0		
B2, 3"	79 / 0	192 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	12				00-00-00
1	E5(1427)	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	25	99			n/a
2	FC1 Floor Material	Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	27	13			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	160 ft-lbs	23005 ft-lbs	0.7%	0	01-06-08
End Shear	53 lbs	9401 lbs	0.6%	0	01-02-14
Total Load Deflection	L/999 (0")	n/a	n/a	4	01-06-08
Live Load Deflection	L/999 (0")	n/a	n/a	5	01-06-08
Max Defl.	0"	n/a	n/a	4	01-06-08
Span / Depth	2.7				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3" x 3-1/2"	268 lbs	6.4%	3.2%	Spruce-Pine-Fir
B2	Wall/Plate 3" x 3-1/2"	268 lbs	6.4%	3.2%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.


BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 9

CONFORMS TO OBC 2012

AMENDED 2020



PROVIDE 3 ROWS OF 3/4" ARDOX SPIRAL NAILS @ 8" O/C FOR MULTI-PLY NAILING, MAINTAIN A MIN. 2" LUMBER EDGE/END DISTANCE. DO NOT USE AIR NAILS




PROF. NO. 41620
STRUCTURAL
COMPONENT ONLY

Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA).

Completeness and accuracy of Input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®.




Maximum Floor Spans

Live Load = 40 psf, Dead Load = 30 psf
Simple Spans L/480 Deflection Limit
3/4" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-0"	16'-0"	15'-1"	13'-11"	17'-5"	16'-1"	15'-1"	13'-11"
	NI-60	17'-2"	16'-2"	15'-5"	14'-3"	17'-6"	16'-5"	15'-5"	14'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-6"	18'-5"	17'-3"	16'-7"	15'-6"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	15'-10"
11-7/8"	NI-20	17'-10"	16'-10"	16'-0"	14'-10"	18'-6"	17'-1"	16'-0"	14'-10"
	NI-40x	19'-4"	17'-11"	17'-3"	15'-10"	19'-11"	18'-6"	17'-9"	15'-10"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-1"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-1"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-5"	22'-1"	20'-6"	19'-6"	17'-5"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-9"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-2"	13'-4"	12'-4"	15'-7"	14'-2"	13'-4"	12'-4"
	NI-40x	17'-9"	16'-1"	15'-1"	13'-11"	17'-9"	16'-1"	15'-1"	13'-11"
	NI-60	18'-1"	16'-5"	15'-5"	14'-3"	18'-1"	16'-5"	15'-5"	14'-3"
	NI-70	19'-10"	17'-11"	16'-9"	15'-6"	19'-10"	17'-11"	16'-9"	15'-6"
	NI-80	20'-2"	18'-3"	17'-1"	15'-10"	20'-2"	18'-3"	17'-1"	15'-10"
11-7/8"	NI-20	18'-10"	17'-1"	16'-0"	14'-10"	18'-10"	17'-1"	16'-0"	14'-10"
	NI-40x	21'-3"	19'-3"	17'-9"	15'-10"	21'-3"	19'-3"	17'-9"	15'-10"
	NI-60	21'-9"	19'-8"	18'-5"	17'-1"	21'-9"	19'-8"	18'-5"	17'-1"
	NI-70	23'-4"	21'-5"	20'-1"	18'-6"	23'-8"	21'-5"	20'-1"	18'-6"
	NI-80	23'-7"	21'-10"	20'-5"	18'-11"	24'-1"	21'-10"	20'-5"	18'-11"
14"	NI-90x	24'-3"	22'-6"	21'-3"	19'-7"	24'-8"	22'-7"	21'-3"	19'-7"
	NI-40x	24'-2"	21'-5"	19'-6"	17'-5"	24'-2"	21'-5"	19'-6"	17'-5"
	NI-60	24'-9"	22'-5"	21'-0"	19'-6"	24'-9"	22'-5"	21'-0"	19'-6"
	NI-70	26'-1"	24'-3"	22'-9"	21'-0"	26'-8"	24'-3"	22'-9"	21'-0"
	NI-80	26'-6"	24'-7"	23'-3"	21'-6"	27'-1"	24'-10"	23'-3"	21'-6"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-4"	27'-9"	25'-10"	24'-3"	22'-4"
	NI-60	27'-3"	24'-11"	23'-5"	21'-7"	27'-6"	24'-11"	23'-5"	21'-7"
	NI-70	28'-8"	26'-8"	25'-3"	23'-4"	29'-3"	26'-11"	25'-3"	23'-4"
	NI-80	29'-1"	27'-0"	25'-9"	23'-10"	29'-8"	27'-6"	25'-10"	23'-10"
	NI-90x	29'-11"	27'-10"	26'-6"	24'-10"	30'-6"	28'-5"	26'-11"	24'-10"

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of $1.50L + 1.25D$. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of $L/480$ and a total load deflection limit of $L/240$.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.





Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-2"	13'-9"	N/A	15'-7"	14'-8"	14'-2"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	N/A	16'-8"	15'-3"	14'-5"	N/A
	NI-40x	17'-11"	16'-11"	16'-1"	N/A	18'-5"	17'-1"	16'-1"	N/A
	NI-60	18'-2"	17'-1"	16'-4"	N/A	18'-7"	17'-4"	16'-4"	N/A
	NI-70	19'-2"	17'-10"	17'-2"	N/A	19'-7"	18'-3"	17'-7"	N/A
	NI-80	19'-5"	18'-0"	17'-4"	N/A	19'-10"	18'-5"	17'-8"	N/A
11-7/8"	NI-20	19'-6"	18'-1"	17'-3"	N/A	19'-11"	18'-3"	17'-3"	N/A
	NI-40x	21'-0"	19'-6"	18'-8"	N/A	21'-7"	20'-2"	19'-2"	N/A
	NI-60	21'-4"	19'-9"	18'-11"	N/A	21'-11"	20'-4"	19'-6"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-5"	20'-5"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-8"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-11"	20'-11"	N/A	24'-3"	22'-7"	21'-7"	N/A
	NI-60	24'-0"	22'-3"	21'-3"	N/A	24'-8"	22'-11"	21'-11"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-11"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	25'-3"	24'-2"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.



Maximum Floor Spans

Live Load = 40 psf, Dead Load = 15 psf

Single Spans, L/480 Deflection Limit

3/4" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-9"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-6"	16'-7"	15'-11"	15'-3"
	NI-70	18'-0"	16'-11"	16'-3"	15'-7"	18'-5"	17'-3"	16'-7"	15'-11"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-6"	18'-6"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-6"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-5"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-70	20'-9"	19'-2"	18'-3"	17'-5"	21'-4"	19'-9"	18'-10"	17'-10"
	NI-80	21'-4"	19'-5"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
14"	NI-90x	21'-8"	20'-0"	19'-1"	18'-0"	22'-2"	20'-6"	19'-6"	18'-6"
	NI-40x	21'-5"	19'-10"	18'-11"	17'-11"	22'-1"	20'-6"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-2"	22'-5"	20'-10"	19'-11"	18'-10"
	NI-70	23'-0"	21'-3"	20'-3"	19'-2"	23'-8"	21'-11"	20'-10"	19'-9"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
16"	NI-90x	24'-1"	22'-3"	21'-2"	20'-0"	24'-8"	22'-10"	21'-9"	20'-7"
	NI-60	23'-5"	22'-0"	20'-11"	19'-10"	24'-6"	22'-9"	21'-8"	20'-6"
	NI-70	25'-1"	23'-2"	22'-0"	20'-10"	25'-9"	23'-10"	22'-9"	21'-6"
	NI-80	25'-6"	23'-6"	22'-4"	21'-2"	26'-1"	24'-2"	23'-1"	21'-10"
	NI-90x	26'-4"	24'-3"	23'-1"	21'-10"	26'-11"	24'-11"	23'-8"	22'-5"

Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-70	20'-3"	18'-7"	17'-9"	16'-7"	20'-5"	18'-11"	17'-10"	16'-7"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-7"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-70	23'-4"	21'-8"	20'-8"	19'-7"	23'-10"	22'-3"	21'-2"	19'-9"
	NI-80	23'-7"	21'-11"	20'-11"	19'-9"	24'-1"	22'-6"	21'-5"	20'-0"
14"	NI-90x	24'-3"	22'-6"	21'-6"	20'-4"	24'-8"	23'-0"	22'-0"	20'-9"
	NI-40x	24'-5"	22'-9"	21'-8"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
	NI-60	24'-10"	23'-1"	22'-0"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-70	26'-1"	24'-3"	23'-2"	21'-10"	26'-8"	24'-11"	23'-9"	22'-4"
	NI-80	26'-6"	24'-7"	23'-5"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
16"	NI-90x	27'-3"	25'-4"	24'-1"	22'-9"	27'-9"	25'-11"	24'-8"	23'-4"
	NI-60	27'-3"	25'-5"	24'-2"	22'-10"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-70	28'-8"	26'-8"	25'-4"	23'-11"	29'-3"	27'-4"	26'-1"	24'-8"
	NI-80	29'-1"	27'-0"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90x	29'-11"	27'-10"	26'-6"	25'-0"	30'-6"	28'-5"	27'-2"	25'-8"

1. Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.50L + 1.25D. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of L/480 and a total load deflection limit of L/240.


2. Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 3/4 inch for a joist spacing of 24 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.

3. Minimum bearing length shall be 1-3/4 inches for the end bearings.

4. Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.

5. This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.

6. Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.





Maximum Floor Spans

Live Load = 40 psf; Dead Load = 30 psf
Simple Spans, L/480 Deflection Limit
5/8" OSB G&N Sheathing

Depth	Series	Bare				1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	16'-1"	15'-2"	14'-8"	N/A	16'-7"	15'-7"	15'-1"	N/A
	NI-60	16'-3"	15'-4"	14'-10"	N/A	16'-8"	15'-9"	15'-3"	N/A
	NI-70	17'-1"	16'-1"	15'-6"	N/A	17'-5"	16'-5"	15'-10"	N/A
	NI-80	17'-3"	16'-3"	15'-8"	N/A	17'-8"	16'-7"	16'-0"	N/A
11-7/8"	NI-20	16'-11"	16'-0"	15'-5"	N/A	17'-6"	16'-6"	16'-0"	N/A
	NI-40x	18'-1"	17'-0"	16'-5"	N/A	18'-9"	17'-6"	16'-11"	N/A
	NI-60	18'-4"	17'-3"	16'-7"	N/A	19'-0"	17'-8"	17'-1"	N/A
	NI-70	19'-6"	18'-0"	17'-4"	N/A	20'-1"	18'-7"	17'-9"	N/A
	NI-80	19'-9"	18'-3"	17'-6"	N/A	20'-4"	18'-10"	17'-11"	N/A
14"	NI-90x	20'-4"	18'-9"	17'-11"	N/A	20'-10"	19'-3"	18'-5"	N/A
	NI-40x	20'-1"	18'-7"	17'-10"	N/A	20'-10"	19'-4"	18'-6"	N/A
	NI-60	20'-5"	18'-11"	18'-1"	N/A	21'-2"	19'-7"	18'-9"	N/A
	NI-70	21'-7"	20'-0"	19'-1"	N/A	22'-3"	20'-7"	19'-8"	N/A
	NI-80	21'-11"	20'-3"	19'-4"	N/A	22'-7"	20'-11"	20'-0"	N/A
16"	NI-90x	22'-7"	20'-11"	19'-11"	N/A	23'-3"	21'-6"	20'-6"	N/A
	NI-60	22'-3"	20'-8"	19'-9"	N/A	23'-1"	21'-5"	20'-6"	N/A
	NI-70	23'-6"	21'-9"	20'-9"	N/A	24'-3"	22'-5"	21'-5"	N/A
	NI-80	23'-11"	22'-1"	21'-1"	N/A	24'-8"	22'-10"	21'-9"	N/A
	NI-90x	24'-8"	22'-9"	21'-9"	N/A	25'-4"	23'-5"	22'-4"	N/A
Depth	Series	Mid-Span Blocking				Mid-Span Blocking and 1/2" Gypsum Ceiling			
		On Centre Spacing				On Centre Spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-7"	14'-1"	13'-3"	N/A	15'-7"	14'-1"	13'-3"	N/A
	NI-40x	17'-9"	16'-1"	15'-1"	N/A	17'-9"	16'-1"	15'-1"	N/A
	NI-60	18'-1"	16'-4"	15'-4"	N/A	18'-1"	16'-4"	15'-4"	N/A
	NI-70	19'-2"	17'-10"	16'-9"	N/A	19'-7"	17'-10"	16'-9"	N/A
	NI-80	19'-5"	18'-0"	17'-1"	N/A	19'-10"	18'-3"	17'-1"	N/A
11-7/8"	NI-20	18'-9"	17'-0"	16'-0"	N/A	18'-9"	17'-0"	16'-0"	N/A
	NI-40x	21'-0"	19'-3"	17'-9"	N/A	21'-3"	19'-3"	17'-9"	N/A
	NI-60	21'-4"	19'-8"	18'-5"	N/A	21'-8"	19'-8"	18'-5"	N/A
	NI-70	22'-6"	20'-10"	19'-11"	N/A	23'-0"	21'-4"	20'-0"	N/A
	NI-80	22'-9"	21'-1"	20'-1"	N/A	23'-3"	21'-7"	20'-5"	N/A
14"	NI-90x	23'-4"	21'-8"	20'-8"	N/A	23'-10"	22'-2"	21'-2"	N/A
	NI-40x	23'-7"	21'-5"	19'-6"	N/A	24'-1"	21'-5"	19'-6"	N/A
	NI-60	24'-0"	22'-3"	21'-0"	N/A	24'-8"	22'-5"	21'-0"	N/A
	NI-70	25'-3"	23'-4"	22'-3"	N/A	25'-10"	24'-0"	22'-9"	N/A
	NI-80	25'-7"	23'-8"	22'-7"	N/A	26'-2"	24'-4"	23'-2"	N/A
16"	NI-90x	26'-4"	24'-4"	23'-3"	N/A	26'-10"	24'-11"	23'-9"	N/A
	NI-60	26'-5"	24'-6"	23'-4"	N/A	27'-2"	24'-10"	23'-4"	N/A
	NI-70	27'-9"	25'-8"	24'-6"	N/A	28'-5"	26'-5"	25'-2"	N/A
	NI-80	28'-2"	26'-1"	24'-10"	N/A	28'-10"	26'-9"	25'-6"	N/A
	NI-90x	29'-0"	26'-10"	25'-7"	N/A	29'-7"	27'-5"	26'-2"	N/A

- Maximum clear span applicable to simple-span residential floor construction with a design live load of 40 psf and dead load of 30 psf. The ultimate limit states are based on the factored loads of $1.50L + 1.25D$. The serviceability limit states include the consideration for floor vibration, a live load deflection limit of $L/480$ and a total load deflection limit of $L/240$.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less. The composite floor may include 1/2 inch gypsum ceiling and/or one row of blocking at mid-span with strapping. Strapping shall be minimum 1x4 inch strap applied to underside of joists at blocking line or 1/2 inch gypsum ceiling attached to joists.
- Minimum bearing length shall be 1-3/4 inches for the end bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniformly distributed loads, an engineering analysis may be required based on the use of the design properties. Tables are based on Limit States Design per CSA O86-09, NBC 2010, and OBC 2012.
- Joists shall be laterally supported at supports and continuously along the compression edge. Refer to technical documentation for installation guidelines and construction details. Nordic I-joists are listed in CCMC evaluation report 13032-R and APA Product Report PR-L274C.

1W-1

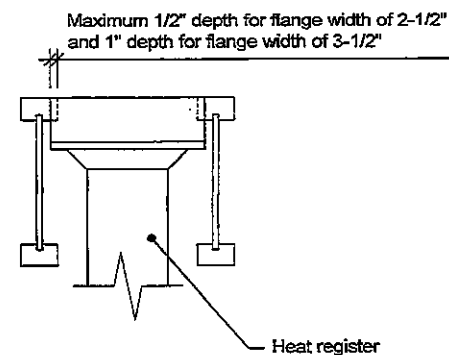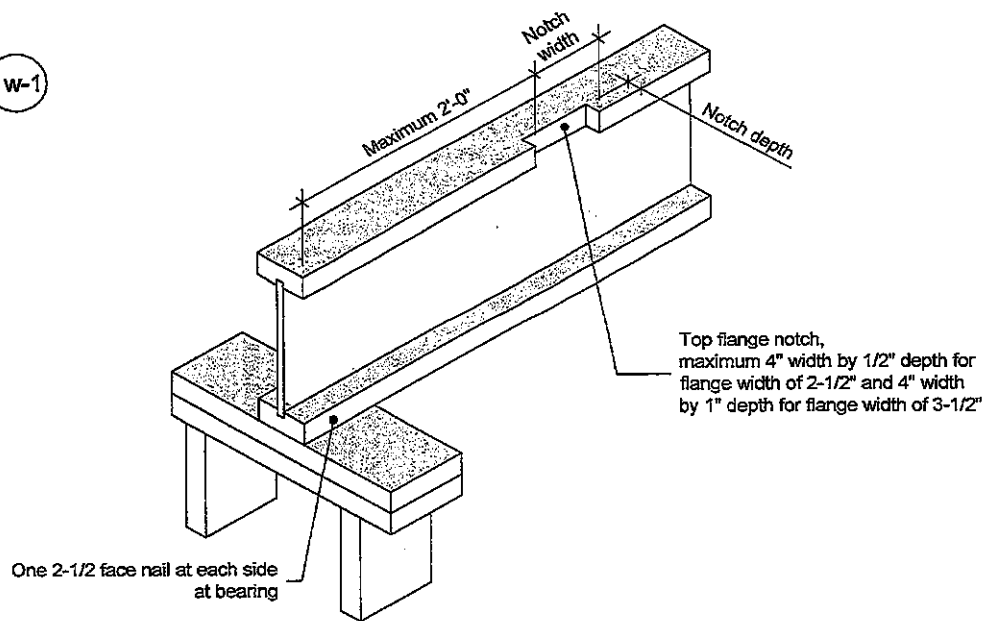

Notes:

1. Blocking required at bearing for lateral support, not shown for clarity.
2. The maximum dimensions for a notch on the side of the top flange are 4-inch width by 1/2-inch depth for flange width of 2-1/2 inches, and 4-inch width by 1-inch depth for flange width of 3-1/2 inches.
3. This detail applies to simple-span joists and multiple-span joists where the notch is located at the end half-span.
4. For other applications, contact Nordic Structures.

This document supersedes all previous versions. If the document has been in effect for more than one year, consult nordic.ca or contact Nordic Structures.

All nails shown in the details are assumed to be common nails unless otherwise noted. Nails shall have a diameter not less than 0.128 inch for 2-1/2-inch nails, or 0.144 inch for 3-inch nails. Individual components not shown to scale for clarity.

NORDIC
STRUCTURES

T 514-871-8526
1 866 817-3418
nordic.ca

TITLE

Notch in I-joist for Heat Register

CATEGORY

I-joist - Typical Floor Framing and Construction Details

DOCUMENT

-

DATE

2018-04-10

NUMBER


1W-1

Allowance for Piping (Installation Notes)

The floor layouts have usually not been checked for heating and/or plumbing interference. On-site adjustment of joists of up to 3 inches is permitted to avoid interferences. When moving a joist, the subfloor thickness shall be checked with code requirements when the joist spacing exceeds 19.2 inches. Except for cutting to length, I-joist flanges should never be cut, drilled, or notched.

Installation of Nordic I-joists shall be as per *Nordic Joist Installation Guide for Residential Floors*. Refer to Tables 1 and 2 for maximum web hole and duct chase openings, respectively. These tables are based on the I-joists being used at their maximum spans. The minimum distance given may be reduced for shorter spans; contact your distributor for additional information.

The detail below shows the 3-inch allowance for piping. Every third joist may be shifted up to 3 inches to avoid heating/plumbing interference. For other applications, please contact your distributor.

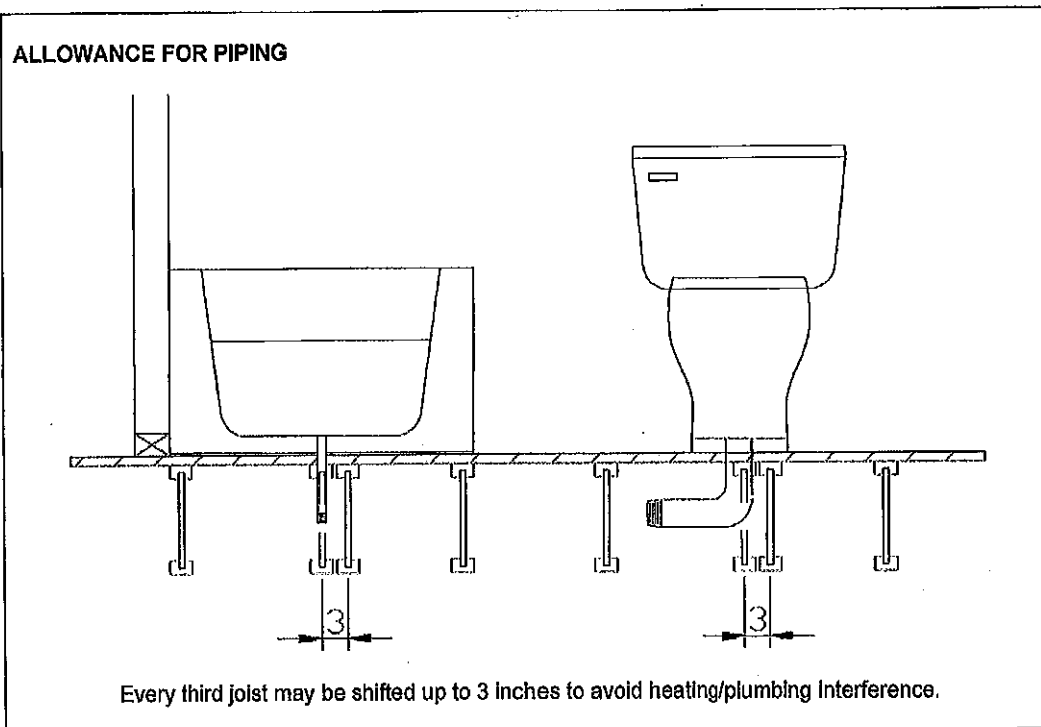

Revised April 12, 2012