


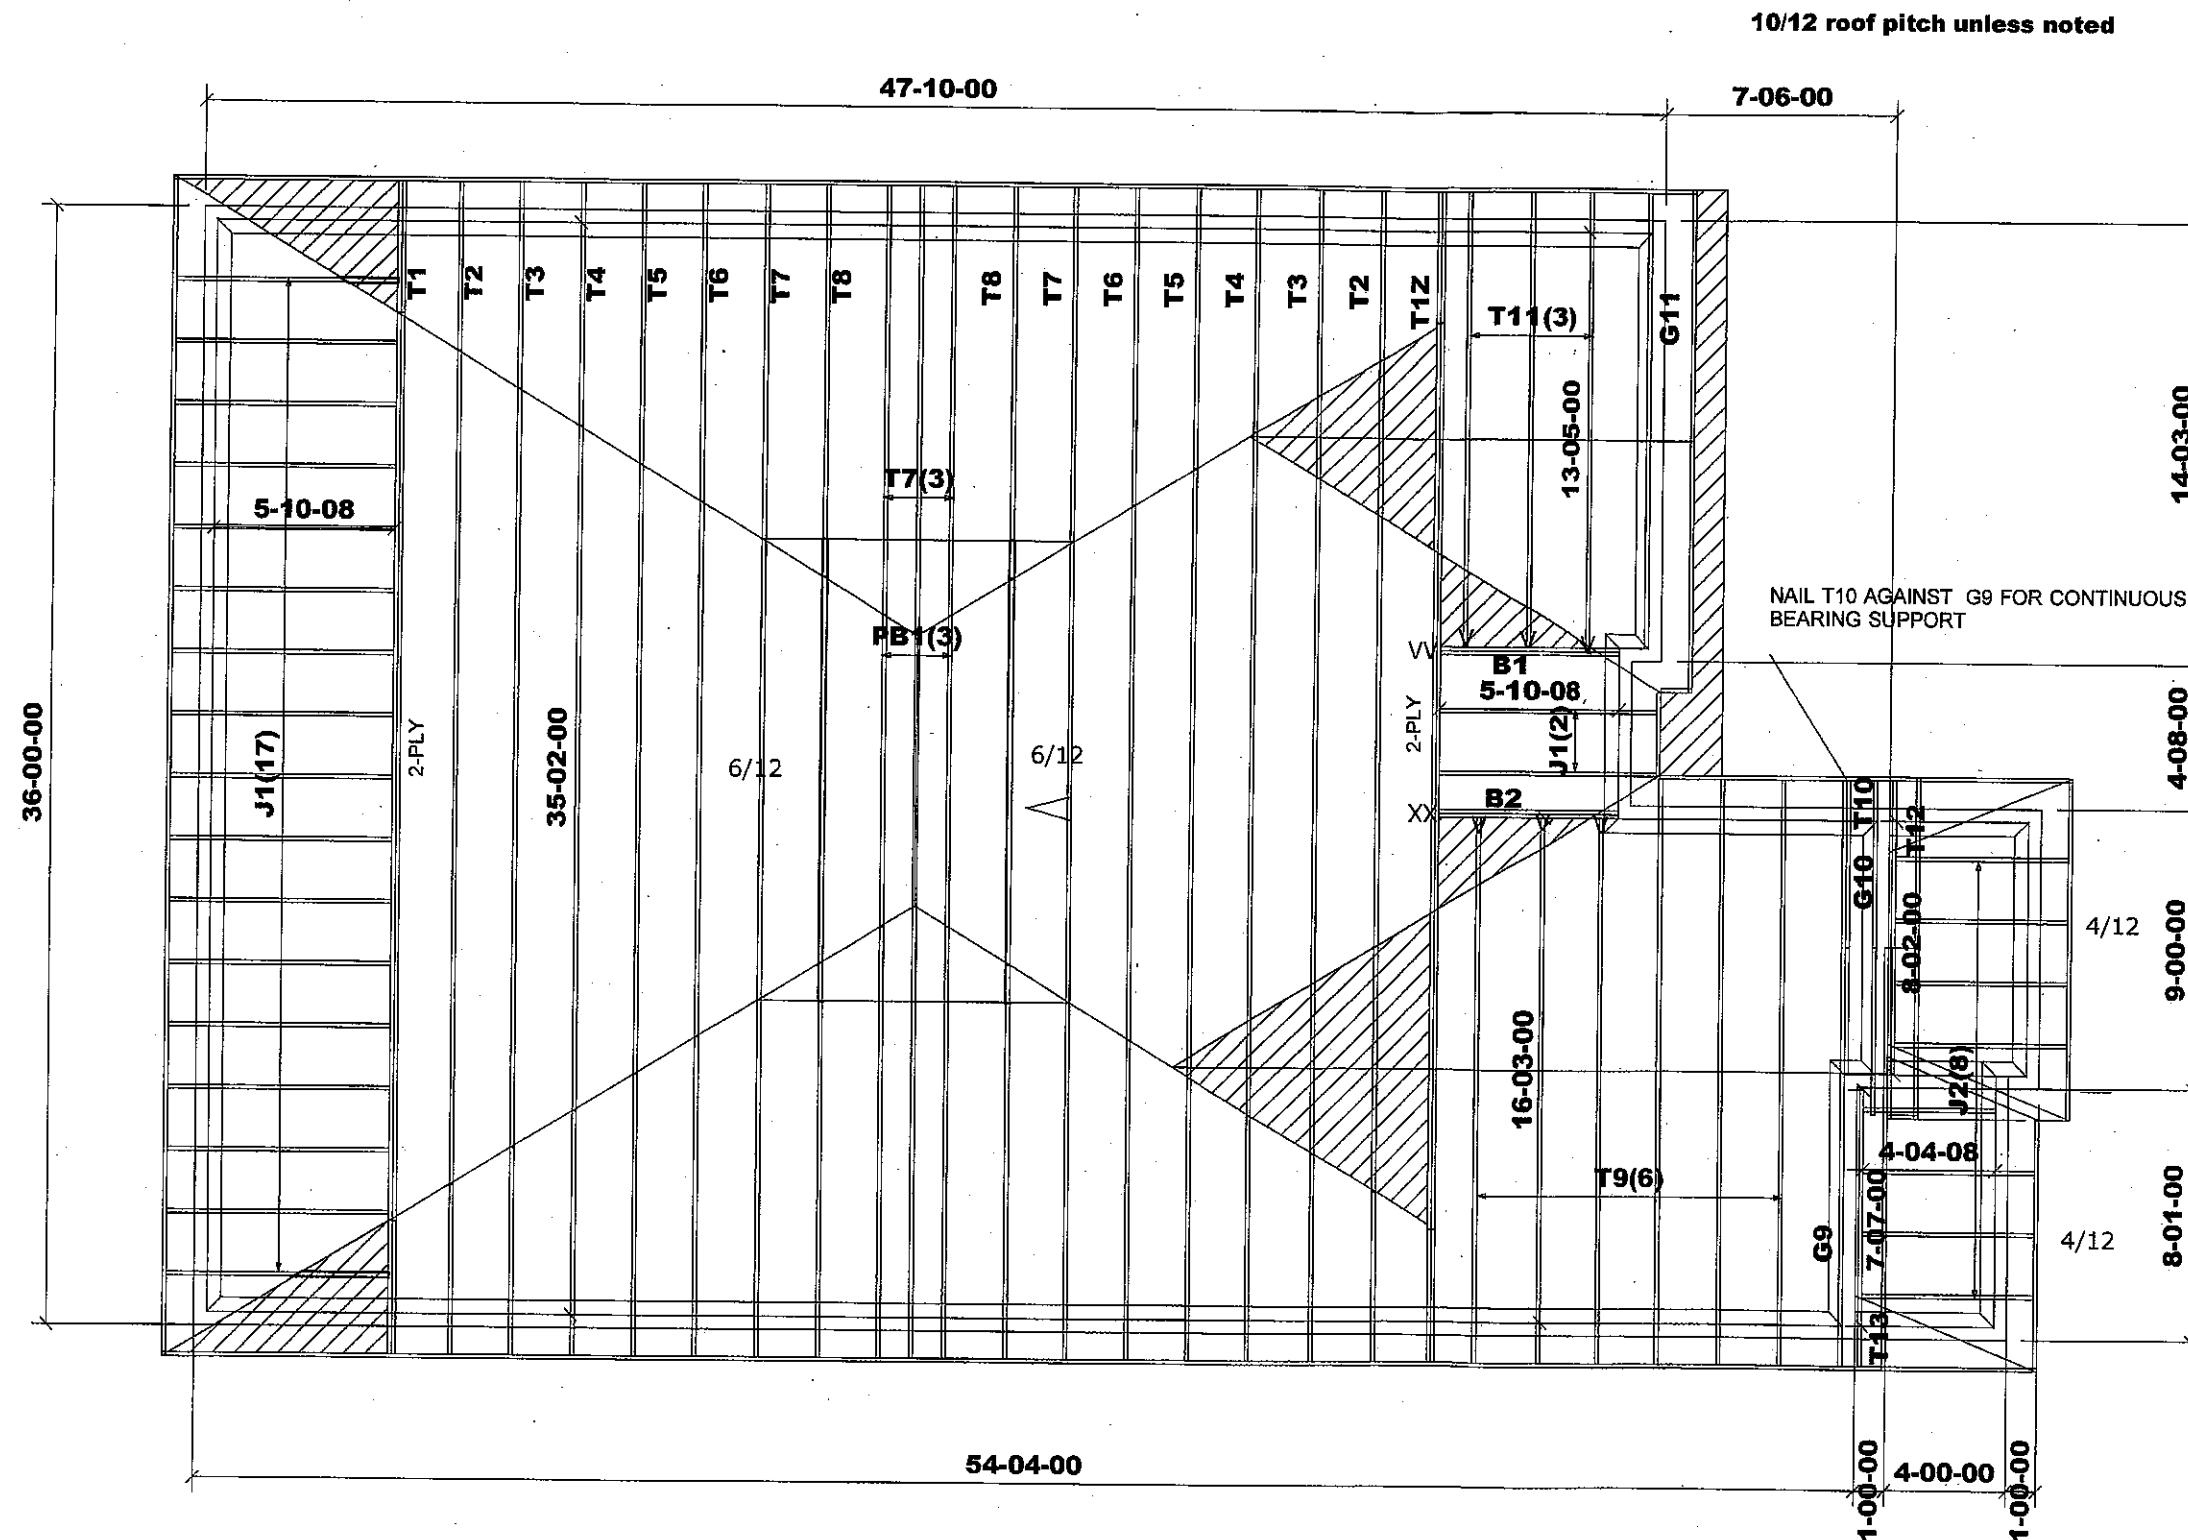

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012
(2019 amendment) OCCUPANCY:
RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:

TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

CITY OF HAMILTON
Building Division

20-187748

HARDWARE:

LUS24 - (O)
LJS26DS - (V)
HGUS26-2 - (XX)
LUS26-2-(VV)

THE OWNER AND/OR CONTRACTOR SHALL COMPLY WITH THE CANADIAN BUILDING CODE AND ALL OTHER APPLICABLE L/W

These drawings and/or specifications have been reviewed by

DATE

BEAMS:

B1= B2 = 2 - 2x10 SPF #2

DENOTES:
CONVENTIONAL
FRAMING

M13126



Job Track: 51225

Plan Log: 202406

Layout ID: 408168

Builder / Location:

GREEN PARK HOMES / WATERDOWN

Project: RUSSELL GARDENS PH.3

Date: 2020-04-27

Sales: Mario DiCaro


Designer: JG

Model / Elevation:

MOUNTAINASH 5/1- STD OR OPT.5 BR

Milek ver 8.3.1.215

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

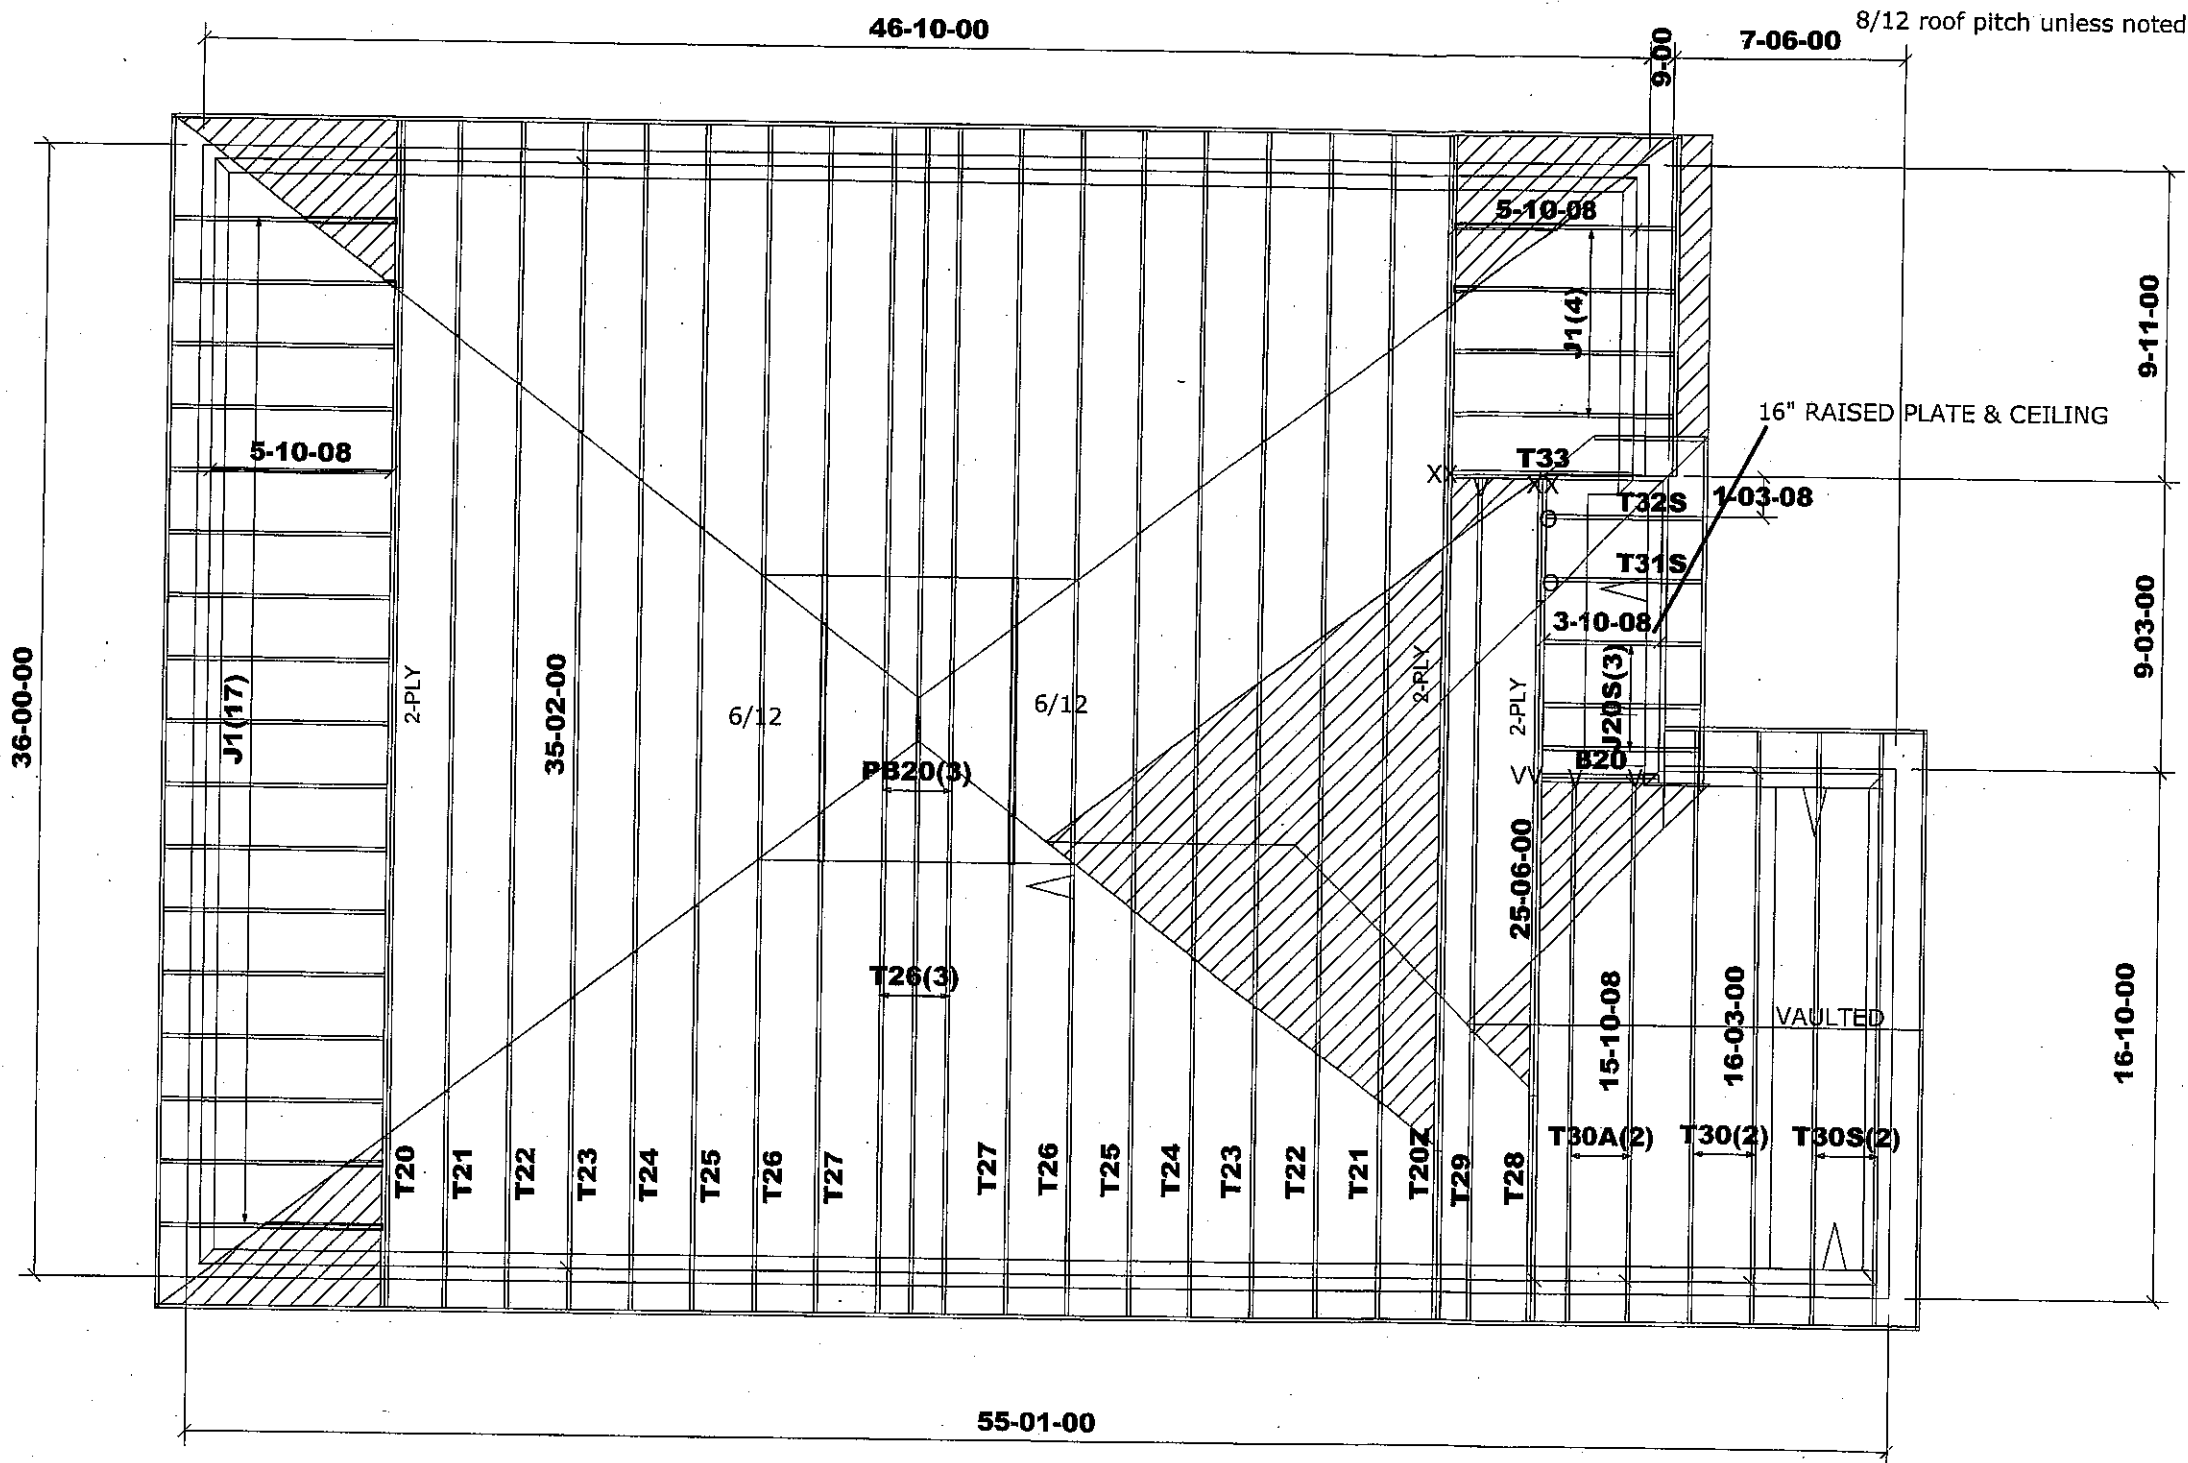

ASPHALT SHINGLES
 FINISHED OVERHANG: 12"
 2x6 EXTERIOR WALLS
 2x6 FASCIA BOARD
 HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
 Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:

TCSL = 25.6 psf
 TCDL = 6.0 psf
 BCLL = 0.0 psf
 BCDL = 7.4 psf

CITY OF HAMILTON
 Building Division

HARDWARE:

LUS24 - (O)
 LJS26DS - (V)
 HGUS26-2 - (XX)
 LUS26-2-(VV)

Permit No. 20-187740

THESE STAMPED DRAWINGS SHALL BE AVAILABLE ON SITE
 THE OWNER AND/OR CONTRACTOR SHALL COMPLY WITH
 THE ORDINANCE BUILDING CODE AND ALL OTHER APPLICABLE LAW

BEAMS:

B20= B21 =
 2 - 2x10 SPF #2

These drawings and/or specifications have been reviewed by
 FOR CHIEF BUILDING OFFICIAL DATE

DENOTES:
 CONVENTIONAL
 FRAMING

M13126



Job Track: 51225
 Plan Log: 202406
 Layout ID: 408169

Builder / Location:
 GREEN PARK HOMES / WATERDOWN

Project: RUSSELL GARDENS PH.3


Date: 2020-04-27 Sales: Mario DiCano

Designer: JG

Model / Elevation:
 MOUNTAINASH 5/2- STD OR OPT.5 BR

Mitek ver 8.3.1.215

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

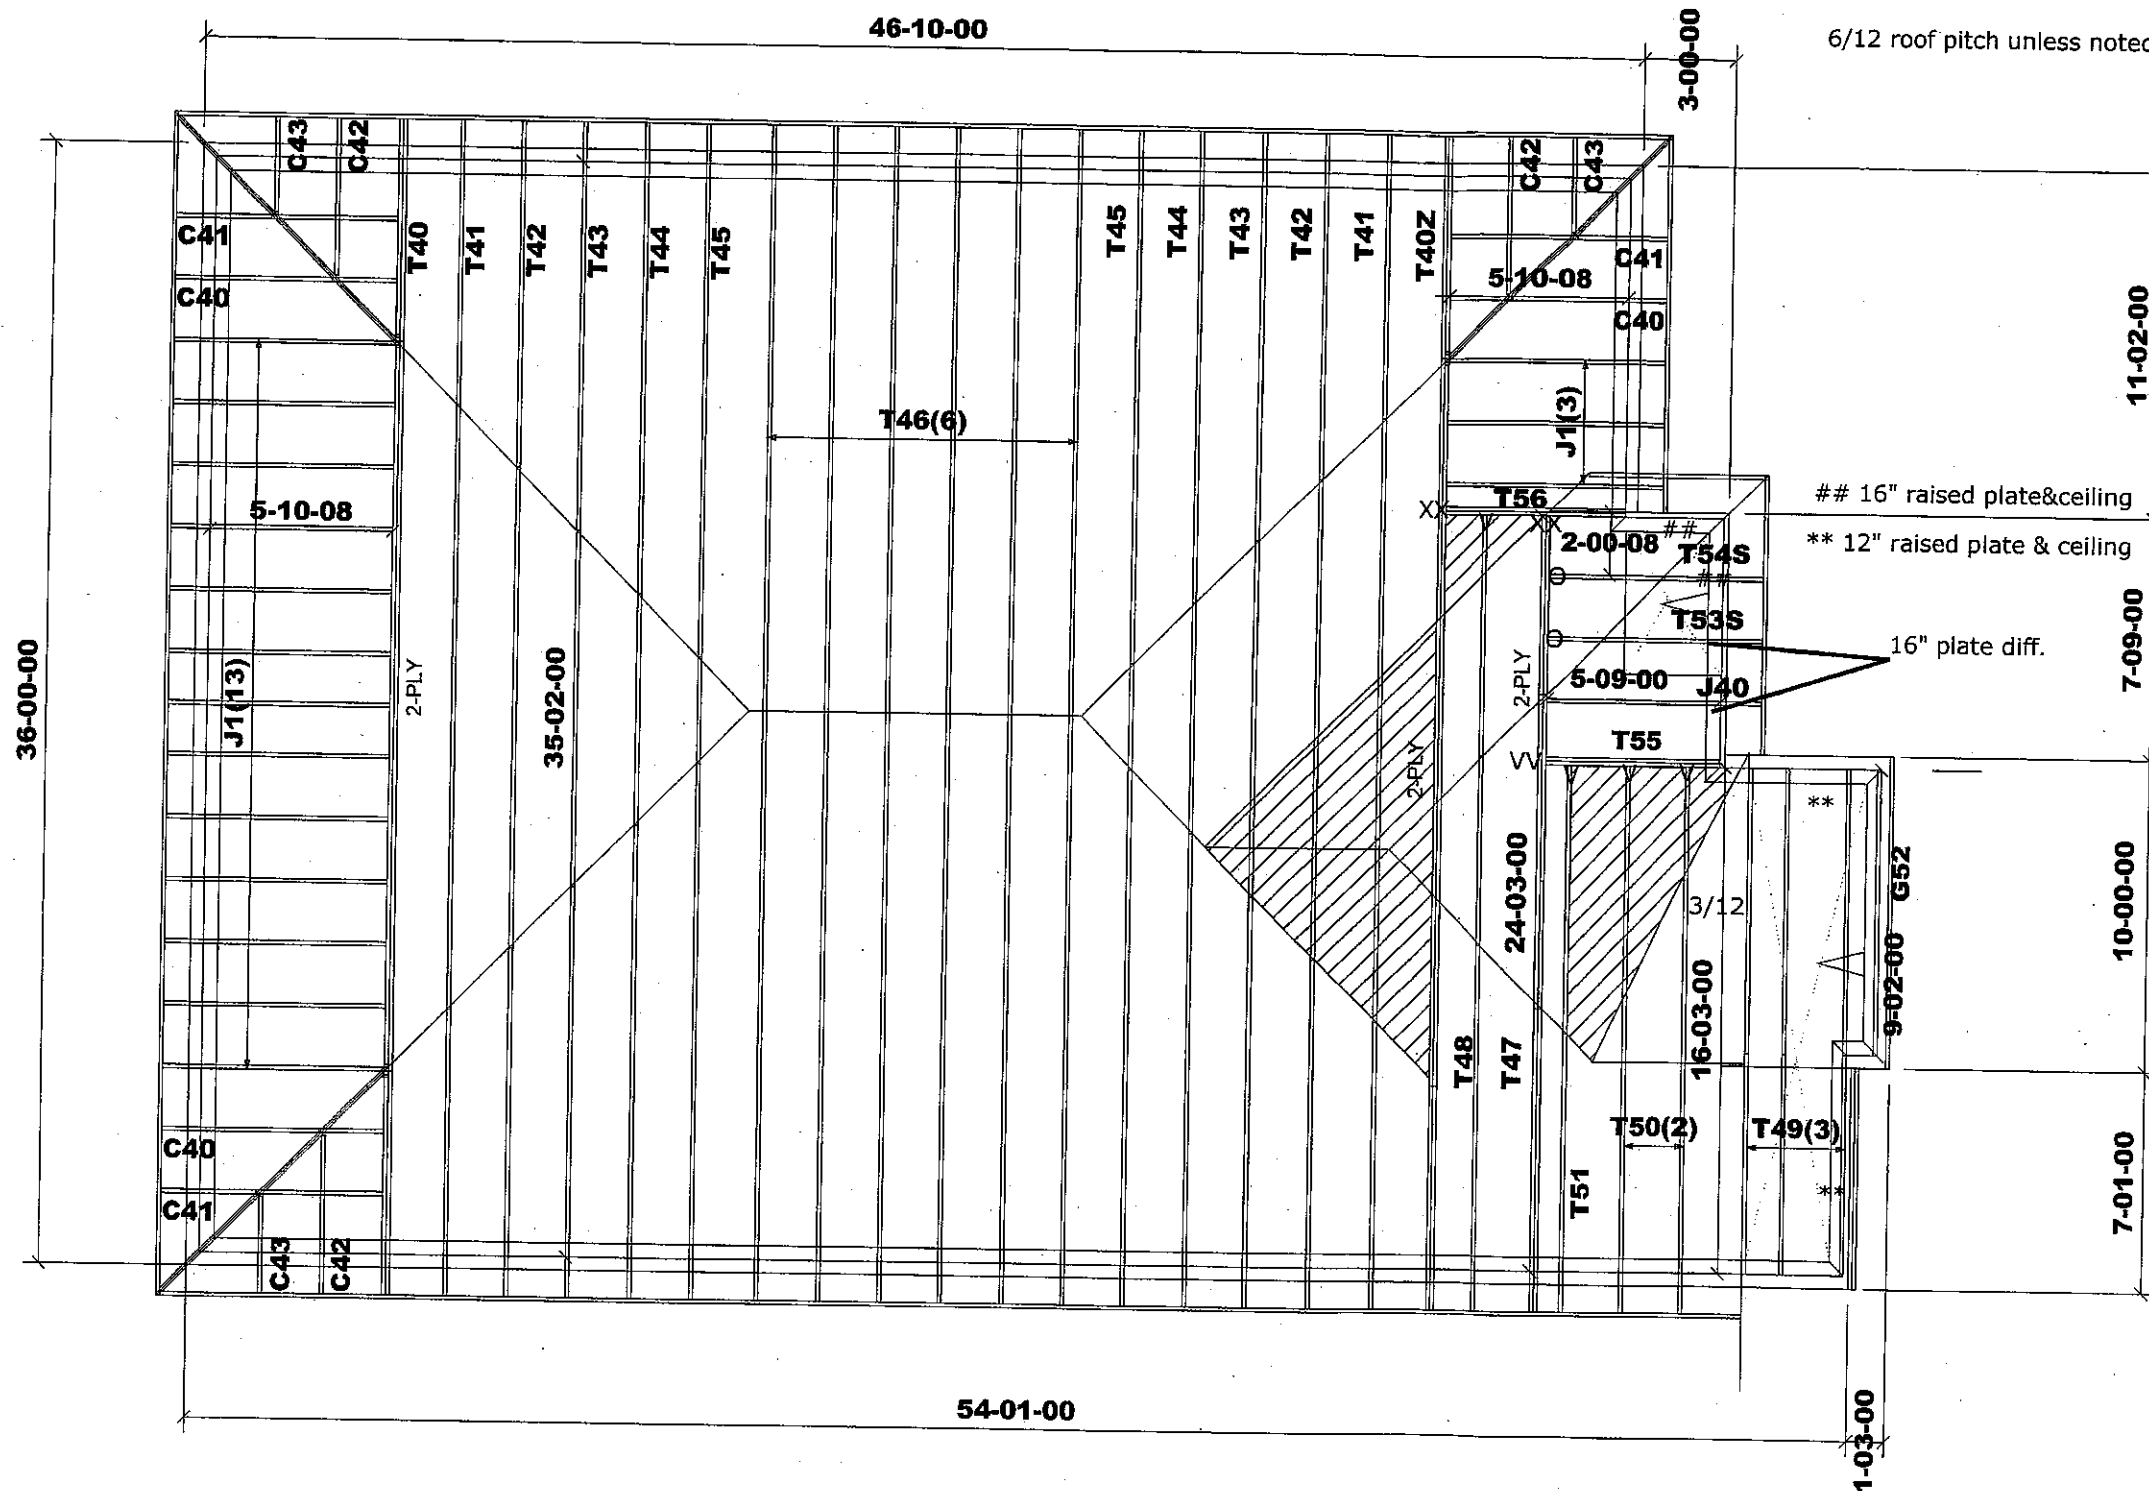

ASPHALT SHINGLES
 FINISHED OVERHANG: 12"
 2x6 EXTERIOR WALLS
 2x6 FASCIA BOARD
 HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
 Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
 TCSL = 25.6 psf
 TCDL = 6.0 psf
 BCLL = 0.0 psf
 BCDL = 7.4 psf

CITY OF HAMILTON
 Building Division

HARDWARE:
 LUS24 - (O)
 LJS26DS - (V)
 HGUS26-2 - (XX)
 LUS26-2-(VV)

Permit No. 20-187748
 THESE STAMPED DRAWINGS SHALL BE AVAILABLE ON SITE
 THE OWNER AND/OR CONTRACTOR SHALL COMPLY WITH THE ONTARIO BUILDING CODE AND ALL OTHER APPLICABLE LAW

These drawings and/or specifications have been reviewed by
 [Signature] DEC 14/20
 FOR CHIEF BUILDING OFFICIAL DATE

DENOTES: CONVENTIONAL FRAMING

M13126



Job Track: 51225
 Plan Log: 202406
 Layout ID: 408170

Builder / Location: GREEN PARK HOMES / WATERDOWN
 Project: RUSSELL GARDENS PH.3
 Date: 2020-04-27 Sales: Mario DiCano Designer: JG

Model / Elevation: MOUNTAINASH 5/3- STD OR OPT.5 BR

Mitek ver 8.3.1.215

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.


 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 5 Lot #: Elevation: 1- STD OR OPT.5 BR	Job Track: 51225 PlanLog: 202406 Layout ID: 408168 Ref # Page: 1 of 2 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1 Hip Girder	10 /12	35-02-00	4-01-11	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	365.29 218.00		
	1 2-ply	T1Z Hip Girder	10 /12	35-02-00	4-01-11	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	365.29 218.00		
	2	T2 Hip	10 /12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	293.44 185.67		
	2	T3 Hip	10 /12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	296.43 188.67		
	2	T4 Hip	10 /12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	323.09 204.33		
	2	T5 Hip	10 /12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	326.19 204.67		
	2	T6 Hip	10 /12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	363.03 228.67		
	5	T7 Hip	10 /12	35-02-00	10-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	866.6 540.00		
	2	T8 Hip	10 /12	35-02-00	11-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	380.36 236.67		
	6	T9 Common	10 /12	16-03-00	8-04-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	480.92 308.00		
	1	G9 GABLE	10 /12	16-03-00	8-04-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	81.49 53.33		
	1	T10 Common	10 /12	8-02-00	5-00-08	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	38.47 25.83		
	1	G10 GABLE	10 /12	8-02-00	5-00-08	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	40.07 27.83		
	3	T11 Common	10 /12	13-05-00	7-02-12	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	191.27 120.50		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 5 Lot #: Elevation: 1- STD OR OPT.5 BR	Job Track: 51225 PlanLog: 202406 Layout ID: 408168 Ref # Page: 2 of 2 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	G11 GABLE	10/12	13-05-00	7-02-12	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	65.46 42.17		
	1	T12 Hip Girder	10/12	8-02-00	2-02-08	2 x 4	1-03-08 1-03-08	1-00-07 1-00-07	34.43 25.33		
	1	T13 Half Hip Girder	10/12	7-07-00	2-02-08	2 x 4	1-03-08	1-00-07 1-09-07	31.77 22.60		
	3	PB1 Piggyback	10/12	14-10-03	2-00-00	2 x 4			135.57 90.00		
	19	J1 Jack-Open	6/12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	319.1 202.67		
	8	J2 Jack-Open	4/12	4-04-08	2-02-06	2 x 4	1-03-08	3-15 1-09-07	95.29 64.00		

TOTAL # TRUSS= 66 TOTAL BFT OF ALL TRUSSES= 3206.84 BFT. TOTAL WEIGHT OF ALL TRSSES 5093.55 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
1	Hardware	HGUS26-2	
5	Hardware	LJS28DS	
1	Hardware	LUS26-2	

TOTAL NUMBER OF
ITEMS= 7



 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST				Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 5 Lot #: Elevation: 2- STD OR OPT.5 BR		Job Track: 51225 PlanLog: 202406 Layout ID: 408169 Ref # Page: 1 of 2 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano	

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T20 Hip Girder	8 /12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	320.72 200.67		
	1 2-ply	T20Z Hip Girder	8 /12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	320.72 200.67		
	2	T21 Hip	8 /12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	279.76 177.00		
	2	T22 Hip	8 /12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	302.77 191.33		
	2	T23 Hip	8 /12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	309.14 195.67		
	2	T24 Hip	8 /12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	316.79 196.67		
	2	T25 Hip	8 /12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	329.26 205.00		
	5	T26 Hip	8 /12	35-02-00	10-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	857.95 538.33		
	2	T27 Hip	8 /12	35-02-00	11-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	332.54 206.67		
	1 2-ply	T28 Hip Girder	8 /12	25-06-00	5-03-13	2 x 4 2 x 6	1-03-08	1-04-13 2-08-13	244.99 150.00		
	1	T29 Hip	8 /12	25-06-00	6-07-13	2 x 4	1-03-08	1-04-13 2-08-13	108.69 70.33		
	2	T30 Common	8 /12	16-03-00	6-09-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	144.92 91.33		
	2	T30A Common	8 /12	15-10-08	6-09-13	2 x 4	1-03-08	1-04-13 1-04-13	139.63 87.67		
	2	T30S Scissor	8 /12 4 /12	16-03-00	6-09-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	133.1 87.33		

 TAMARACK ROOF TRUSSES INC. ALFA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 5 Lot #: Elevation: 2- STD OR OPT.5 BR	Job Track: 51225 PlanLog: 202406 Layout ID: 408169 Ref # Page: 2 of 2 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	T31S Half Hip	8 /12	3-10-08	4-09-13	2 x 4	1-03-08	1-04-13 4-09-13	29.4 20.17		
	1	T32S Half Hip	8 /12	3-10-08	3-05-13	2 x 4	1-03-08	1-04-13 3-05-13	24.65 17.17		
	1 2-ply	T33 Jack-Closed Girder	6 /12	5-10-08	4-01-04	2 x 4 2 x 6		1-02-00 4-01-04	57.64 37.00		
	3	PB20 Piggyback	8 /12	9-00-12	2-00-00	2 x 4			74.54 50.50		
	21	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	352.68 224.00		
	3	J20S Jack-Open	8 /12	3-10-08	5-03-13	2 x 4	1-03-08	1-04-13 5-03-13	85.86 57.50		

TOTAL # TRUSS= 61 TOTAL BFT OF ALL TRUSSES= 3005.01 BFT. TOTAL WEIGHT OF ALL TRSSES 4765.74 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
2	Hardware	HGUS26-2	
3	Hardware	LJS26DS	
2	Hardware	LUS24	

TOTAL NUMBER OF
ITEMS= 7



DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 5
 Lot #:
 Elevation: 3- STD OR OPT.5 BR




Job Track: 51225
 PlanLog: 202406
 Layout ID: 408170
 Ref #
 Page: 1 of 2
 Date: 04-27-2020
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T40 Hip Girder	6/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-02-00 1-02-00	337.66 208.00		
	1 2-ply	T40Z Hip Girder	6/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-02-00 1-02-00	337.66 208.00		
	2	T41 Hip	6/12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	277.99 174.00		
	2	T42 Hip	6/12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	277.12 174.67		
	2	T43 Hip	6/12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	289.07 179.67		
	3	C43 Jack-Open	6/12	1-09-07	2-00-12	2 x 4	1-03-08 1-01	1-02-00 2-00-12	21.08 14.00		
	2	T44 Hip	6/12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	290.73 183.33		
	2	T45 Hip	6/12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	301.67 191.33		
	6	T46 Common	6/12	35-02-00	9-11-08	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	910.08 558.00		
	1 2-ply	T47 Hip Girder	6/12	24-03-00	5-04-08	2 x 4 2 x 6	1-03-08	1-02-00 2-06-00	228.14 142.33		
	1	T48 Hip	6/12	24-03-00	6-04-08	2 x 4	1-03-08	1-02-00 2-06-00	99.13 63.33		
	3	T49 Roof Special	0/12	16-03-00	4-02-00	2 x 4		3-05-00 4-02-00	215.73 139.50		
	2	T50 Roof Special	6/12	16-03-00	4-06-08	2 x 4	1-03-08	1-02-00 2-02-00	125.84 80.33		
	1	T51 Half Hip	6/12	16-03-00	4-11-12	2 x 4	1-03-08	1-02-00 4-11-12	69.78 44.67		

 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 5 Lot #: Elevation: 3- STD OR OPT.5 BR	Job Track: 51225 PlanLog: 202406 Layout ID: 408170 Ref # Page: 2 of 2 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	G52 GABLE	0 / 12	9-02-00	4-02-00	2 x 4		4-02-00 4-02-00	40.75 26.67		
	1	T53S Half Hip	6 / 12	5-09-00	4-05-04	2 x 4	1-03-08	1-02-00 4-05-04	32.51 21.50		
	1	T54S Half Hip	6 / 12	5-09-00	3-05-04	2 x 4	1-03-08	1-02-00 3-05-04	30.62 20.67		
	1 2-ply	T55 Jack-Closed Girder	6 / 12	5-09-00	5-04-08	2 x 4 2 x 6		2-06-00 5-04-08	67.19 43.67		
	1 2-ply	T56 Jack-Closed Girder	6 / 12	5-10-08	4-01-04	2 x 4 2 x 6		1-02-00 4-01-04	57.17 37.00		
	1	J40 Jack-Open	6 / 12	5-09-00	5-04-08	2 x 4	1-03-08	2-06-00 5-04-08	19.99 13.50		
	16	J1 Jack-Open	6 / 12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	266.71 170.67		
	3	C40 Jack-Open	6 / 12	3-09-07	3-00-12	2 x 4	1-03-08 2-01-01	1-02-00 3-00-12	42.4 26.00		
	3	C41 Jack-Open	6 / 12	1-09-07	2-00-12	2 x 4	1-03-08 4-01-01	1-02-00 2-00-12	34.75 22.00		
	3	C42 Jack-Open	6 / 12	1-10-08	3-00-12	2 x 4	1-03-08 1-10-15	1-02-00 2-01-04	28.71 18.00		

TOTAL # TRUSS= 65 TOTAL BFT OF ALL TRUSSES= 2760.84 BFT. TOTAL WEIGHT OF ALL TRSSES 4404.41 LBS

HARDWARE


QTY	TYPE	MODEL	LENGTH
2	Hardware	HGUS26-2	
3	Hardware	LJS26DS	
2	Hardware	LUS24	
1	Hardware	LUS26-2	

TOTAL NUMBER OF
ITEMS= 8

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408168	T1	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 26 12:34:48 2020 Page 1
ID:DMCubINVR6TstFoe31v6l_zns11-Mcniq2FikQuZwGH_JYq9US_3Kj34wGOWeSZNBRL

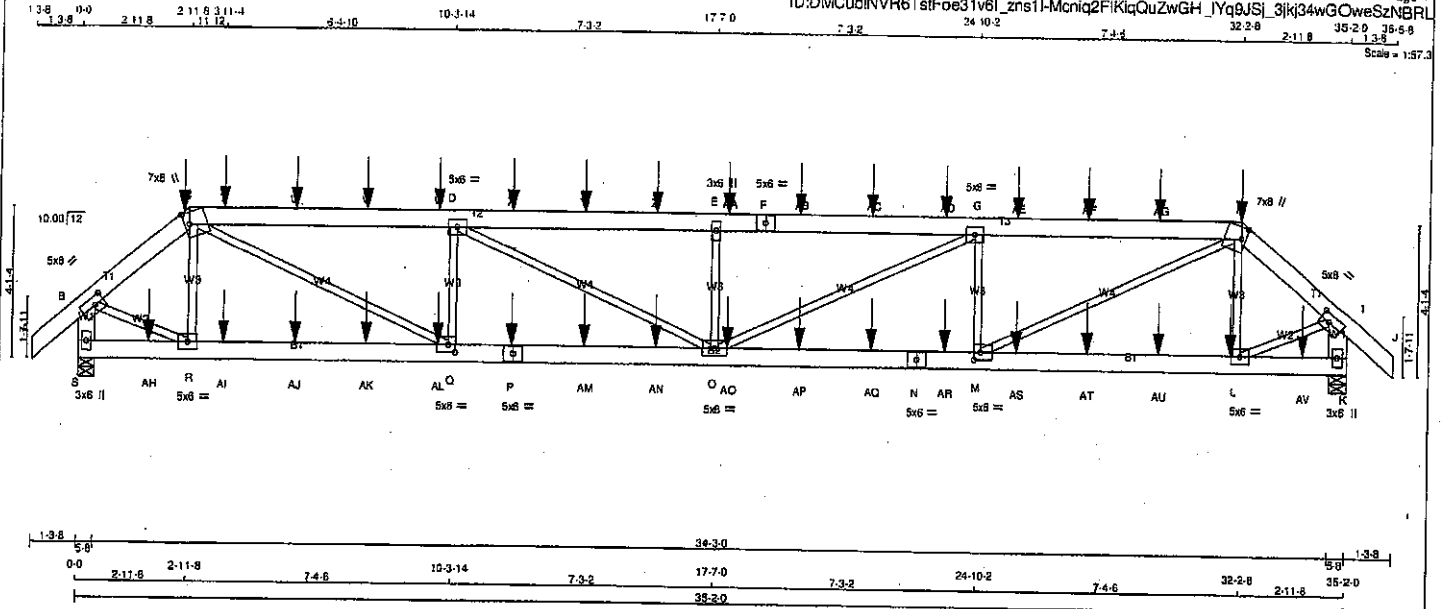

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x6	DRY	No.2	SPF
C - F	2x8	DRY	No.2	SPF
F - H	2x6	DRY	No.2	SPF
H - J	2x6	DRY	No.2	SPF
S - B	2x6	DRY	No.2	SPF
K - I	2x6	DRY	No.2	SPF
S - P	2x6	DRY	2100F 1.8E	SPF
P - N	2x6	DRY	2100F 1.8E	SPF
N - K	2x6	DRY	2100F 1.8E	SPF

ALL WEBS 2x3 DRY No.2 SPF
EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-C 2	12	SIDE(122.0)
C-F 2	12	SIDE(61.0)
F-H 2	12	SIDE(61.0)
H-J 2	12	SIDE(122.0)
S-B 2	12	TOP
K-I 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
S-P 2	12	SIDE(0.0)
P-N 2	12	SIDE(0.0)
N-K 2	12	SIDE(197.8)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS	REACTION	GROSS	REACTION	BRG	IN-SX	BRG	IN-SX
S	3330	0	3330	0	0	5-8	5-8	5-8	5-8
K	3379	0	3379	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST LOOSE	MAX./MIN.	COMPONENT REACTIONS	LIVE	PERM.	WIND	DEAD	SOIL
S	2354	1553 / 0	0 / 0	0 / 0	0 / 0	0 / 0	801 / 0	0 / 0
K	2388	1572 / 0	0 / 0	0 / 0	0 / 0	0 / 0	816 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.98 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS	
MEMB.	FORCE (LBS)	VERT. LOAD (LBS)	MAX. (LBS)	MEMB.	FORCE (LBS)
FR-TO				FR-TO	
A-B	0 / 42	-91.8	-91.8 0.04 (1)	R-C	-850 / 0
B-C	-3367 / 0	-91.8	-91.8 0.05 (1)	C-Q	0 / 4809
C-T	-6802 / 0	-91.8	-91.8 0.38 (1)	Q-D	-1799 / 0
T-U	-6802 / 0	-91.8	-91.8 0.38 (1)	D-O	0 / 1370
U-V	-6802 / 0	-91.8	-91.8 0.38 (1)	O-E	-987 / 0
V-W	-6802 / 0	-91.8	-91.8 0.38 (1)	E-G	0 / 1362
W-D	-6802 / 0	-91.8	-91.8 0.38 (1)	G-H	-1787 / 0
D-X	-7826 / 0	-91.8	-91.8 0.42 (1)	H-I	0 / 4481
X-Y	-7826 / 0	-91.8	-91.8 0.42 (1)	I-L	-861 / 0
Y-Z	-7826 / 0	-91.8	-91.8 0.42 (1)	B-R	0 / 2736
Z-E	-7826 / 0	-91.8	-91.8 0.42 (1)	L-I	0 / 2771
E-AA	-7826 / 0	-91.8	-91.8 0.42 (1)		
AA-F	-7826 / 0	-91.8	-91.8 0.42 (1)		
F-AB	-7826 / 0	-91.8	-91.8 0.42 (1)		
AB-AC	-7826 / 0	-91.8	-91.8 0.42 (1)		
AC-AD	-7826 / 0	-91.8	-91.8 0.42 (1)		
AD-G	-7826 / 0	-91.8	-91.8 0.42 (1)		
G-AE	-6808 / 0	-91.8	-91.8 0.38 (1)		
AE-AF	-6808 / 0	-91.8	-91.8 0.38 (1)		
AF-AG	-6808 / 0	-91.8	-91.8 0.38 (1)		
AG-H	-6808 / 0	-91.8	-91.8 0.38 (1)		
H-I	-3410 / 0	-91.8	-91.8 0.05 (1)		
I-J	0 / 42	-91.8	-91.8 0.04 (1)		
S-B	-8375 / 0	0.0	0.0 0.12 (1)		
K-I	-3414 / 0	0.0	0.0 0.12 (1)		

S-AH	0 / 0	-18.5	-18.5 0.05 (4)	10.00
AH-R	0 / 0	-18.5	-18.5 0.05 (4)	10.00
R-AI	0 / 2553	-18.5	-18.5 0.12 (1)	10.00
AI-AJ	0 / 2553	-18.5	-18.5 0.12 (1)	10.00
AJ-AK	0 / 2553	-18.5	-18.5 0.12 (1)	10.00
AK-AL	0 / 2553	-18.5	-18.5 0.12 (1)	10.00
AL-Q	0 / 2553	-18.5	-18.5 0.12 (1)	10.00
Q-P	0 / 6802	-18.5	-18.5 0.22 (1)	10.00
P-AM	0 / 6802	-18.5	-18.5 0.22 (1)	10.00
AM-AN	0 / 6802	-18.5	-18.5 0.22 (1)	10.00
AN-O	0 / 6802	-18.5	-18.5 0.22 (1)	10.00
O-AO	0 / 6809	-18.5	-18.5 0.22 (1)	10.00
AO-AP	0 / 6809	-18.5	-18.5 0.22 (1)	10.00
AP-AQ	0 / 6809	-18.5	-18.5 0.22 (1)	10.00
AQ-N	0 / 6809	-18.5	-18.5 0.22 (1)	10.00
N-AR	0 / 6809	-18.5	-18.5 0.22 (1)	10.00
AR-M	0 / 6809	-18.5	-18.5 0.22 (1)	10.00

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2018
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17)
CALCULATED VERT. DEFL.(LL) = L/999 (0.20)
ALLOWABLE DEFL.(TL) = L/360 (1.17)
CALCULATED VERT. DEFL.(TL) = L/999 (0.37)

CSI: TC=0.42/1.00 (D-E:1), BC=0.22/1.00 (O-Q:1),
WB=0.56/1.00 (C-Q:1), SS=0.22/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PL) (PL)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.89 (H) (INPUT = 0.90)
JSI METAL = 0.65 (N) (INPUT = 1.00)



Structural component only
DWG# T-2007129 1/2

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408168	T1	1	2	TRUSS DESC.		

Temarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Sat Apr 25 12:34:46 2020 Page 2
ID:DMCubINVR6TstFoe31v6I zns1I-Mcniq2FIKigQuZwGH 1Yq8USI 3Ik34wGOWeSzNBRL

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-I	MT20	5.0	8.0	2.50	3.25
C	TTWW+m	MT20	7.0	8.0	3.75	1.50
D	TMWW-I	MT20	5.0	6.0		
E	TMWW-w	MT20	3.0	6.0		
F	TS-I	MT20	5.0	6.0		
G	TMWW-I	MT20	5.0	6.0		
H	TTWW+m	MT20	7.0	8.0	3.75	1.50
I	TMWW-I	MT20	5.0	8.0	2.50	3.25
K	BMV1+p	MT20	3.0	6.0		
L	BMWW-I	MT20	5.0	6.0		
M	BMWW-I	MT20	5.0	6.0	2.50	2.25
N	BS-I	MT20	5.0	6.0		
O	BMWWW-I	MT20	5.0	8.0		
P	BS-I	MT20	5.0	6.0		
Q	BMWW-I	MT20	5.0	6.0	2.50	2.25
R	BMWW-I	MT20	5.0	6.0		
S	BMV1+p	MT20	3.0	6.0		

LOADING

TOTAL LOAD CASES: (4)

CHORDS

MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX	MAX. FACTORED UNBRAC (LBS)	MAX. FACTORED CSI (LC)
FR-TO		FROM	TO		LENGTH FR-TO	
M-AS	0 / 2586	-18.5	-18.5	0.12 (1)	10.00	
AS-AT	0 / 2586	-18.5	-18.5	0.12 (1)	10.00	
AT-AU	0 / 2586	-18.5	-18.5	0.12 (1)	10.00	
AU-L	0 / 2586	-18.5	-18.5	0.12 (1)	10.00	
L-AV	0 / 0	-18.5	-18.5	0.05 (1)	10.00	
AV-K	0 / 0	-18.5	-18.5	0.05 (1)	10.00	


WEBS

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-38	-42		FRONT	VERT	DEAD		C1
C	2-11-8	-191	-191		FRONT	VERT	SNOW		C1
H	32-2-8	-38	-42		FRONT	VERT	DEAD		C1
H	32-2-8	-116	-119		FRONT	VERT	TOTAL		C1
H	32-2-8	-191	-191		FRONT	VERT	SNOW		C1
L	31-11-4	-26	-26		FRONT	VERT	TOTAL		C1
P	11-11-4	-26	-26		FRONT	VERT	TOTAL		C1
T	3-11-4	-111	-111		FRONT	VERT	TOTAL		C1
U	5-11-4	-110	-110		FRONT	VERT	TOTAL		C1
V	7-11-4	-110	-110		FRONT	VERT	TOTAL		C1
W	9-11-4	-110	-110		FRONT	VERT	TOTAL		C1
X	11-11-4	-110	-110		FRONT	VERT	TOTAL		C1
Y	13-11-4	-110	-110		FRONT	VERT	TOTAL		C1
Z	15-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AA	17-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AB	19-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AC	21-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AD	23-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AE	25-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AF	27-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AG	29-11-4	-110	-110		FRONT	VERT	TOTAL		C1
AH	1-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AI	3-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AJ	5-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AK	7-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AL	9-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AM	13-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AN	15-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AO	17-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AP	19-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AQ	21-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AR	23-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AS	25-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AT	27-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AU	29-11-4	-26	-26		FRONT	VERT	TOTAL		C1
AV	33-11-4	-26	-26		FRONT	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2007129

JOB NAME 408168	TRUSS NAME T1Z	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	----------

Tamarack Roof Truss, Burlington

Version 6.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:34:49 2020 Page 1

ID:DMCubINVR6TstFos31v6L_zns1l-qoL41NGw50yHWVSRipnNNrbzOlzT47D9w8UBuzNBRK

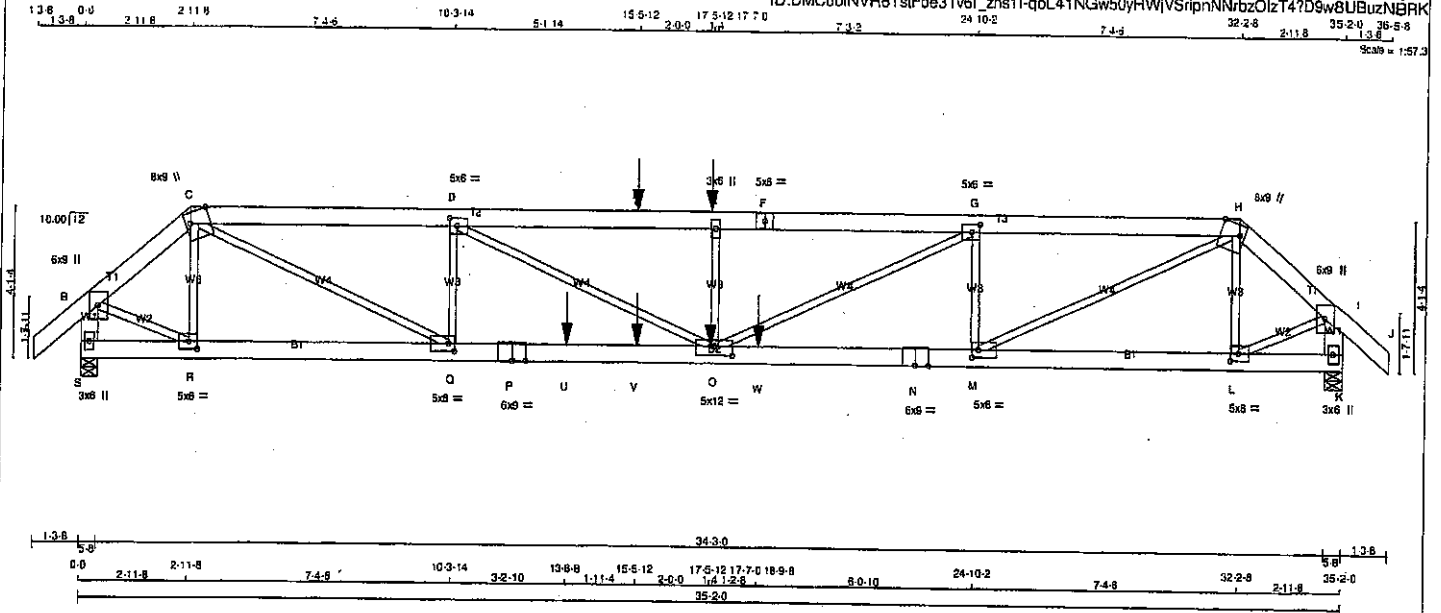

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER	DESCR.
A - C	2x6	DRY	No.2	SPF		
C - F	2x6	DRY	No.2	SPF		
F - H	2x6	DRY	No.2	SPF		
H - J	2x6	DRY	No.2	SPF		
J - L	2x6	DRY	No.2	SPF		
L - M	2x6	DRY	No.2	SPF		
M - P	2x6	DRY	No.2	SPF		
P - R	2x6	DRY	No.2	SPF		
R - S	2x6	DRY	No.2	SPF		
S - T	2x6	DRY	No.2	SPF		
T - U	2x6	DRY	No.2	SPF		
U - V	2x6	DRY	No.2	SPF		
V - W	2x6	DRY	No.2	SPF		
W - X	2x6	DRY	No.2	SPF		
X - Y	2x6	DRY	No.2	SPF		
Y - Z	2x6	DRY	No.2	SPF		

ALL WEBS 2x3 DRY No.2 SPF
EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS: (0.122"x3") SPIRAL NAILS		
A-C	2	12
C-F	2	12
F-H	2	12
H-J	2	12
J-L	2	12
L-M	2	12
M-P	2	12
P-R	2	12
R-S	2	12
S-T	2	12
T-U	2	12
U-V	2	12
V-W	2	12
W-X	2	12
X-Y	2	12
Y-Z	2	12

TOP CHORDS: (0.122"x3") SPIRAL NAILS

BOTTOM CHORDS: (0.122"x3") SPIRAL NAILS

WEBS: (0.122"x3") SPIRAL NAILS

2x3

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT 3983	DOWN 3983	0	5-8
S	0	0	0	5-8
K	0	0	0	5-8

UNFACTORED REACTIONS	1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW LIVE PERM.LIVE WIND DEAD SOIL
S	2793	1890 / 0 0 / 0 0 / 0 0 / 0 802 / 0 0 / 0
K	2599	1756 / 0 0 / 0 0 / 0 0 / 0 843 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K.

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.20 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MAX. FACTORED VERT. LOAD (LC2)	MAX. FACTORED VERT. LOAD (LC3)	MAX. FACTORED VERT. LOAD (LC4)	MAX. FACTORED VERT. LOAD (LC5)	MAX. FACTORED VERT. LOAD (LC6)	MAX. FACTORED VERT. LOAD (LC7)	MAX. FACTORED VERT. LOAD (LC8)	MAX. FACTORED VERT. LOAD (LC9)	MAX. FACTORED VERT. LOAD (LC10)
A-B	0 / 42	-91.8	-91.8	0.04 (1)	10.00	R-C	-1066 / 0	0.13 (1)					
B-C	-3986 / 0	-91.8	-91.8	0.05 (1)	5.55	C-Q	0 / 7263	0.90 (1)					
C-D	-9534 / 0	-91.8	-91.8	0.37 (1)	3.74	Q-D	-2160 / 0	0.26 (1)					
D-E	-12331 / 0	-91.8	-91.8	0.52 (1)	3.20	D-O	0 / 3130	0.39 (1)					
E-F	-12331 / 0	-91.8	-91.8	0.52 (1)	3.20	O-E	-776 / 0	0.09 (1)					
F-G	-12331 / 0	-91.8	-91.8	0.50 (1)	3.23	G-O	0 / 4203	0.52 (1)					
G-H	-8575 / 0	-91.8	-91.8	0.50 (1)	3.23	H-M	-2613 / 0	0.31 (1)					
H-I	-3786 / 0	-91.8	-91.8	0.33 (1)	3.94	M-H	0 / 8383	0.79 (1)					
I-J	0 / 42	-91.8	-91.8	0.04 (1)	7.14	L-H	-843 / 0	0.10 (1)					
J-K	-3945 / 0	0.0	0.0	0.14 (1)	7.14	H-R	0 / 3239	0.40 (1)					
K-L	-3733 / 0	0.0	0.0	0.13 (1)	7.29	L-I	0 / 3052	0.38 (1)					
S-R	0 / 0	-18.5	-18.5	0.02 (4)	10.00								
R-Q	0 / 3013	-18.5	-18.5	0.21 (1)	10.00								
Q-P	0 / 9534	-18.5	-18.5	0.87 (1)	10.00								
P-U	0 / 9534	-18.5	-18.5	0.67 (1)	10.00								
U-V	0 / 9534	-18.5	-18.5	0.67 (1)	10.00								
V-O	0 / 9534	-18.5	-18.5	0.67 (1)	10.00								
O-W	0 / 8575	-18.5	-18.5	0.49 (1)	10.00								
W-N	0 / 8575	-18.5	-18.5	0.49 (1)	10.00								
N-M	0 / 8575	-18.5	-18.5	0.49 (1)	10.00								
M-L	0 / 2844	-18.5	-18.5	0.12 (1)	10.00								
L-K	0 / 0	-18.5	-18.5	0.05 (1)	10.00								

FACTORED CONCENTRATED LOADS (LBS)	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
JT	17-5-12	-110	-110	---	BACK	VERT	TOTAL	---	C1
E	17-5-12	-26	-26	---	BACK	VERT	TOTAL	---	C1
T	15-5-12	-110	-110	---	BACK	VERT	TOTAL	---	C1
U	13-6-8	-1815	-1815	---	BACK	VERT	TOTAL	---	C1
V	15-5-12	-26	-26	---	BACK	VERT	TOTAL	---	C1
W	18-9-8	-1620	-1620	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17)
CALCULATED VERT. DEFL.(LL) = L/999 (0.35)
ALLOWABLE DEFL.(TL) = L/360 (1.17)
CALCULATED VERT. DEFL.(TL) = L/657 (0.64)

CSI: TC=0.52/1.00 (D-E:1), BC=0.67/1.00 (O-C:1), WB=0.90/1.00 (C-Q:1), SS=0.53/1.00 (M-O:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (C) (INPUT = 0.90)
JSI METAL = 0.95 (P) (INPUT = 1.00)



Structural component only
DWG# T-2007130 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408168	T1Z	1	2	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Sal Apr 25 12:34:49 2020 Page 2
ID:DMCubINVR6TslFoe31v6l_zns1l-qoL41NGw50vHWIVSripnNNrbzOlzT4?D9w8UBuzNBRK

PLATES (table is in inches)


JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	6.0	9.0		
C	TTWW+m	MT20	8.0	9.0	Edge	6.50
D	TMWW-l	MT20	5.0	6.0	2.50	2.50
E	TMW+w	MT20	3.0	6.0		
F	TS-l	MT20	5.0	6.0		
G	TMWW-l	MT20	5.0	6.0	2.50	2.50
H	TTWW+m	MT20	8.0	9.0	Edge	6.50
I	TMVW+p	MT20	6.0	9.0		
K	BMV1+p	MT20	3.0	6.0		
L	BMWW-l	MT20	5.0	6.0	2.50	2.75
M	BMWW-l	MT20	5.0	8.0	2.50	2.00
N	BS-l	MT20	6.0	9.0		
O	BMWWW-l	MT20	5.0	12.0	3.00	6.00
P	BS-l	MT20	6.0	9.0		
Q	BMWW-l	MT20	5.0	8.0	2.50	2.00
R	BMWW-l	MT20	5.0	6.0	2.50	2.75
S	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.



Structural component only
DWG# T-2007130 92

138 000 4114 553 971 14110 5315 5315 3102 4114 3520 3658
ID:DMCubINVR6TsfFoe31v61_zns11-l7vSFjHzsJ48753IPPK0vaCkac0f0CfaoOat1KzNag5
2020 5315 25415 5315 3102 4114 3520 3658
Scale = 1:1000



1. *Journal of the American Medical Association*, 1997; 277: 1033-1036.




JOB NAME 408168	TRUSS NAME T3	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:34:51 2020 Page 1

ID:DMCubINVR6TatFoe31v6l_zns1l-mBTrS3lBddC?l0ery7rF5oxJC1Ex4wWcEdaFzNBRI

35.20 36.58

Scale = 1:57.4

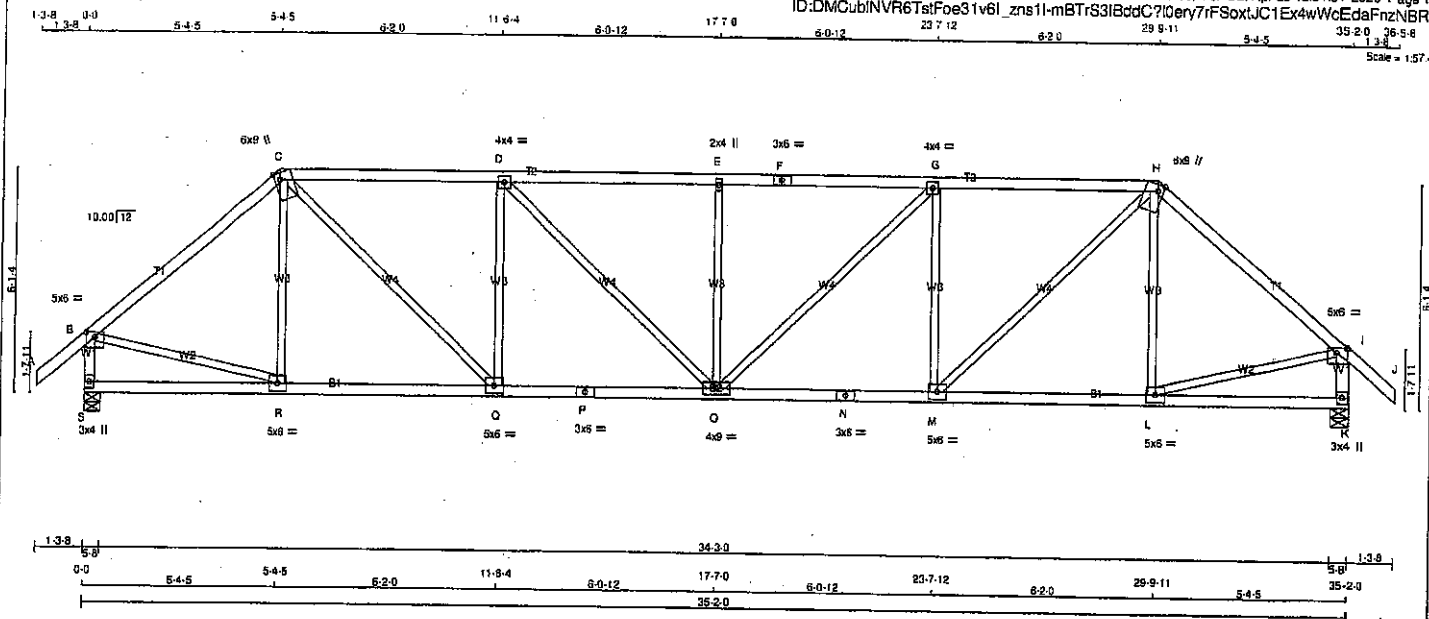

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - J	2x4	DRY	No.2
S - B	2x4	DRY	No.2
K - I	2x4	DRY	No.2
S - P	2x4	DRY	No.2
P - N	2x4	DRY	No.2
N - K	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2

EXCEPT

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.00
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW-t	MT20	4.0	4.0		
E	TMVW-w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-t	MT20	4.0	4.0		
H	TTWW+m	MT20	6.0	9.0	Edge	1.75
I	TMVW-p	MT20	5.0	6.0	1.50	3.00
K	BMV1+p	MT20	3.0	4.0		
L, M, Q, R						
L	BMVW-t	MT20	5.0	6.0		
N	BS-t	MT20	3.0	6.0		
O	BMVW-w	MT20	4.0	9.0		
P	BS-t	MT20	3.0	6.0		
S	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	REQD
JT	VERT	HORZ	DOWN	UPLIFT
S	2066	0	2066	0
K	2066	0	2066	0

UNFACTORED REACTIONS

1ST CASE	MAX/MIN COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD
S	1458	871 / 0	0 / 0	0 / 0	0 / 0	489 / 0
K	1458	871 / 0	0 / 0	0 / 0	0 / 0	489 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.28 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	R-C	-246 / 7	0.14 (1)
B-C	-2004 / 0	-91.8 -91.8	0.64 (1)	4.11	C-Q	0 / 1538	0.35 (1)
C-D	-2653 / 0	-91.8 -91.8	0.74 (1)	3.50	Q-D	-943 / 0	0.56 (1)
D-E	-2978 / 0	-91.8 -91.8	0.78 (1)	3.28	D-O	0 / 450	0.10 (1)
E-F	-2978 / 0	-91.8 -91.8	0.78 (1)	3.28	O-E	-513 / 0	0.30 (1)
F-G	-2978 / 0	-91.8 -91.8	0.78 (1)	3.28	O-G	0 / 450	0.10 (1)
G-H	-2853 / 0	-91.8 -91.8	0.74 (1)	3.50	M-G	-943 / 0	0.56 (1)
H-I	-2004 / 0	-91.8 -91.8	0.64 (1)	4.11	M-H	0 / 1538	0.35 (1)
I-J	0 / 41	-91.8 -91.8	0.13 (1)	10.00	L-H	-246 / 7	0.14 (1)
J-K	-2026 / 0	0.0 0.0	0.22 (1)	5.94	B-R	0 / 1580	0.36 (1)
K-L	-2026 / 0	0.0 0.0	0.22 (1)	5.94	L-I	0 / 1580	0.36 (1)
S-R	0 / 0	-18.5 -18.5	0.14 (4)	10.00			
R-Q	0 / 1532	-18.5 -18.5	0.33 (1)	10.00			
Q-P	0 / 2653	-18.5 -18.5	0.49 (1)	10.00			
P-O	0 / 2653	-18.5 -18.5	0.49 (1)	10.00			
O-N	0 / 2653	-18.5 -18.5	0.49 (1)	10.00			
N-M	0 / 2653	-18.5 -18.5	0.49 (1)	10.00			
M-L	0 / 1532	-18.5 -18.5	0.33 (1)	10.00			
L-K	0 / 0	-18.5 -18.5	0.14 (4)	10.00			

TOTAL WEIGHT = 2 X 148 = 296 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCG 2010, NBCG 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.5 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = 1/360 (1.17")
CALCULATED VERT. DEFL.(LL) = 1/999 (0.16")
ALLOWABLE DEFL.(TL) = 1/360 (1.17")
CALCULATED VERT. DEFL.(TL) = 1/999 (0.29")
CSI: TC=0.78/1.00 (E-G:1), BC=0.49/1.00 (M-O:1), WB=0.55/1.00 (G-M:1), SS=0.27/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1687 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.90 (B) (INPUT = 0.90)
JSI METAL= 0.85 (N) (INPUT = 1.00)



Structural component only
DWG# T-2007132

JOB NAME 408168	TRUSS NAME T4	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Sat Apr 25 12:34:52 2020 Page 1
ID:DMCubINVR6TstFoe31v6I zns1l-EN1DfPpOxKsNAD1WgNu_?T6R6nZgQVfrum8oDzNBRH

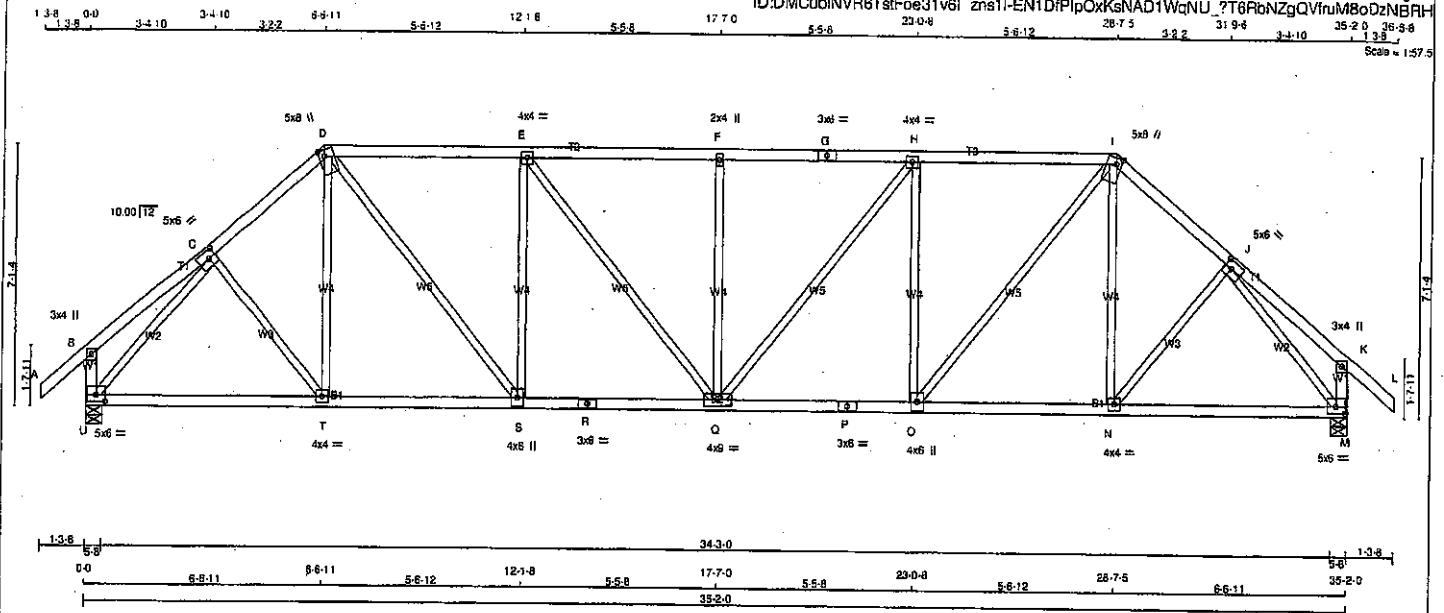

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - D	2x4 DRY	No.2	SPF
D - G	2x4 DRY	No.2	SPF
G - I	2x4 DRY	No.2	SPF
I - L	2x4 DRY	No.2	SPF
U - B	2x4 DRY	No.2	SPF
M - K	2x4 DRY	No.2	SPF
U - R	2x4 DRY	No.2	SPF
R - P	2x4 DRY	No.2	SPF
P - M	2x4 DRY	No.2	SPF
ALL WEBS EXCEPT	2x3 DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMV+p	MT20	3.0	4.0		
C TMWW-t	MT20	5.0	6.0	2.50	2.25
D TTWW+m	MT20	5.0	8.0	2.00	1.75
E TMWW-t	MT20	4.0	4.0		
F TMWW-w	MT20	2.0	4.0		
G TS-t	MT20	3.0	6.0		
H TMWW-t	MT20	4.0	4.0		
I TTWW+m	MT20	5.0	8.0	2.00	1.75
J TMWW-t	MT20	5.0	6.0	2.50	2.25
K TMV+p	MT20	3.0	4.0		
M BMVW-t	MT20	5.0	5.0	2.25	3.00
N BMWW-t	MT20	4.0	4.0		
O BMWW-t	MT20	4.0	6.0		
P BS-t	MT20	3.0	6.0		
Q BMWWW-t	MT20	4.0	9.0		
R BS-t	MT20	3.0	6.0		
S BMWW-t	MT20	4.0	6.0		
T BMWW-t	MT20	4.0	4.0		
U BMVW-t	MT20	5.0	6.0	2.25	3.00

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
FACTORED	MAXIMUM FACTORED	INPUT	REQD
GROSS REACTION	GROSS REACTION	BRG	BRG
VERT	DOWN	HORZ	UPLIFT
IN-SX	IN-SX	IN-SX	IN-SX
JT 2068	0	2068	0
U 2068	0	2068	0
M 2068	0	2068	0

UNFACTORED REACTIONS

1ST LOSE	MAX/MIN COMPONENT REACTIONS	DEAD	SOIL
COMBINED	SNOW	LIVE	PERM.LIVE
WIND	WIND	WIND	WIND
JT 1458	971 / 0	0 / 0	0 / 0
U 1458	971 / 0	0 / 0	0 / 0
M 1458	971 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.77 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS			
MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (FT)
FR-TO			
A-B	0 / 41	-91.8 -91.8 0.13 (1)	10.00
B-C	0 / 19	-91.8 -91.8 0.14 (1)	10.00
C-D	-2023 / 0	-91.8 -91.8 0.20 (1)	4.59
D-E	-2308 / 0	-91.8 -91.8 0.55 (1)	3.94
E-F	-2534 / 0	-91.8 -91.8 0.57 (1)	3.77
F-G	-2534 / 0	-91.8 -91.8 0.57 (1)	3.77
G-H	-2534 / 0	-91.8 -91.8 0.57 (1)	3.77
H-I	-2308 / 0	-91.8 -91.8 0.55 (1)	3.94
I-J	-2023 / 0	-91.8 -91.8 0.20 (1)	4.59
J-K	0 / 19	-91.8 -91.8 0.14 (1)	10.00
K-L	0 / 41	-91.8 -91.8 0.13 (1)	10.00
L-M	-246 / 0	0.0 0.0 0.03 (1)	7.81
M-K	-246 / 0	0.0 0.0 0.03 (1)	7.81
U-T	0 / 1433	-18.5 -18.5 0.33 (1)	10.00
T-S	0 / 1535	-18.5 -18.5 0.35 (1)	10.00
S-R	0 / 2308	-18.5 -18.5 0.42 (1)	10.00
R-Q	0 / 2308	-18.5 -18.5 0.42 (1)	10.00
Q-P	0 / 2308	-18.5 -18.5 0.42 (1)	10.00
P-O	0 / 2308	-18.5 -18.5 0.42 (1)	10.00
O-N	0 / 1535	-18.5 -18.5 0.35 (1)	10.00
N-M	0 / 1433	-18.5 -18.5 0.33 (1)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.13")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.23")

CSI: TC=0.57/1.00 (E-F:1), BC=0.42/1.00 (D-C:1), WS=0.98/1.00 (J-M:1), SSI=0.24/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 768 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.88 (I) (INPUT = 0.90)
JSI METAL= 0.72 (P) (INPUT = 1.00)



Structural component only
DWG# T-2007133

JOB NAME 408168	TRUSS NAME T5	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mike Industries, Inc. Sat Apr 25 12:34:53 2020 Page 1
ID:DMCubINVR6TstFoe31v6f_zns1l-habblJR9ESl_KoE4YujXD0Eb7pPtp4Y6hKfzNBRG

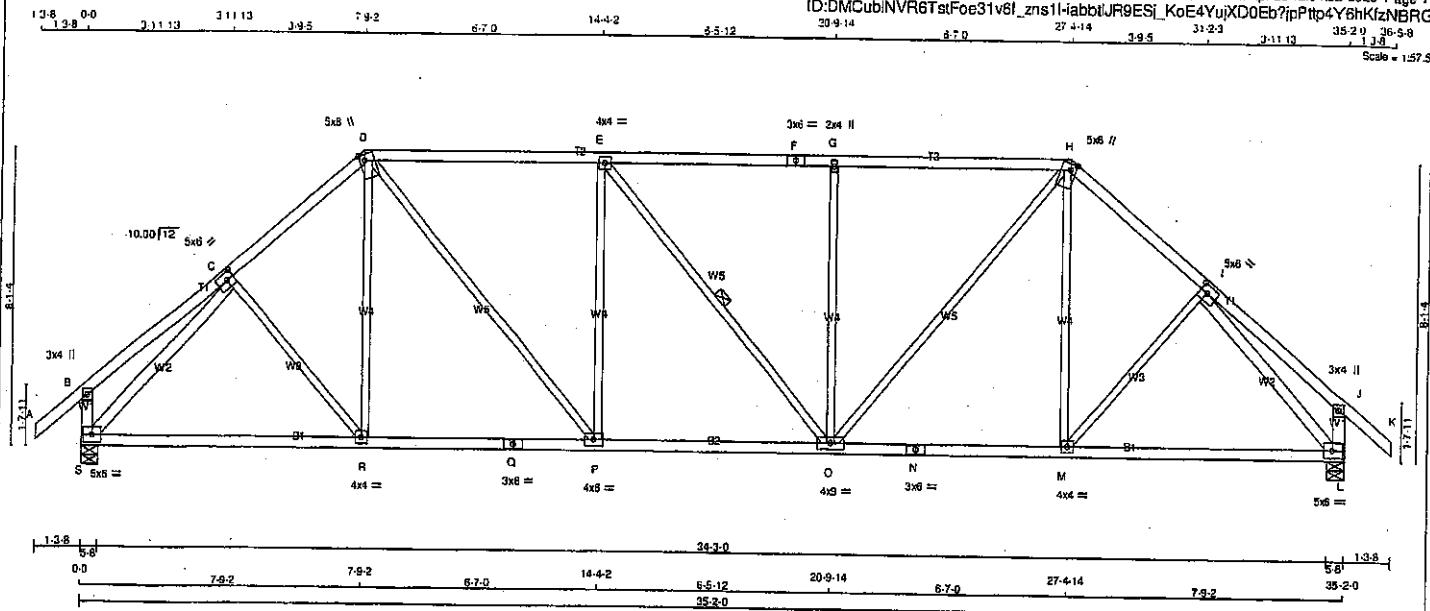

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - K	2x4	DRY	No.2
S - B	2x4	DRY	No.2
L - J	2x4	DRY	No.2
S - Q	2x4	DRY	No.2
O - N	2x4	DRY	No.2
N - L	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
S - C	2x4	DRY	No.2
I - L	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
C	TMVW-t	MT20	5.0	8.0	2.50 2.50
D	TTWV+m	MT20	5.0	8.0	2.00 1.75
E	TMVW-t	MT20	4.0	4.0	
F	TS-t	MT20	3.0	5.0	
G	TMVW+m	MT20	2.0	4.0	
H	TTWV+m	MT20	5.0	8.0	2.00 1.75
I	TMVW-t	MT20	5.0	8.0	2.50 2.50
J	TMV+p	MT20	3.0	4.0	
L	BMVW-t	MT20	5.0	8.0	
M	BMVW-t	MT20	4.0	4.0	
N	BS-t	MT20	3.0	6.0	
O	BMVWV-t	MT20	4.0	9.0	
P	BMVW-t	MT20	4.0	8.0	
Q	BS-t	MT20	3.0	8.0	
R	BMVW-t	MT20	4.0	4.0	
S	BMVW-t	MT20	5.0	6.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
JT	VERT	GROSS REACTION	GROSS REACTION	BRG	BRG
S	2068	0	2068	0	5-8
L	2068	0	2068	0	5-8

UNFACTORED REACTIONS		1ST CASE	MAX/MIN COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE PERM/LIVE WIND DEAD SOIL
S	1458	971 / 0	0 / 0 0 / 0 488 / 0 0 / 0
L	1458	971 / 0	0 / 0 0 / 0 488 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.81 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-O.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	FORCE	MEMB.	FORCE
FR-TO	VERT. LOAD	FR-TO	VERT. LOAD
A-B	0 / 41	C-R	0 / 64
B-C	0 / 26	R-D	0 / 126
C-D	-2006 / 0	D-P	0 / 998
D-E	-2163 / 0	P-E	-650 / 0
E-F	-2162 / 0	E-O	-2 / 0
F-G	-2162 / 0	O-G	-649 / 0
G-H	-2162 / 0	H-I	0 / 996
H-I	-2006 / 0	I-J	0 / 126
I-J	0 / 26	J-K	0 / 84
J-K	0 / 41	K-L	-2291 / 0
K-L	-264 / 0	L-J	-2291 / 0
L-J	-264 / 0		
S-R	0 / 1487		
R-Q	0 / 1519		
Q-P	0 / 1519		
P-O	0 / 2163		
O-N	0 / 1519		
N-M	0 / 1519		
M-L	0 / 1487		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.5 PSF
DL = 6.0 PSF
BOT. CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.5 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.21")

CSI: TC=0.73/1.00 (D-E-1), BC=0.42/1.00 (D-P-1), WB=0.97/1.00 (I-L-1), SSI=0.28/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(ORY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 518 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (I) (INPUT = 0.90)
JSI METAL= 0.56 (I) (INPUT = 1.00)




Structural component only
DWG# T-2007134

JOB NAME 408168	TRUSS NAME T6	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:34:55 2020 Page 1
ID:DMCubINV6TstFoe31v6l_zns1l-eyILIRLhSIQEycBzwBce5IFpOxtr5XsboOYzNBRE

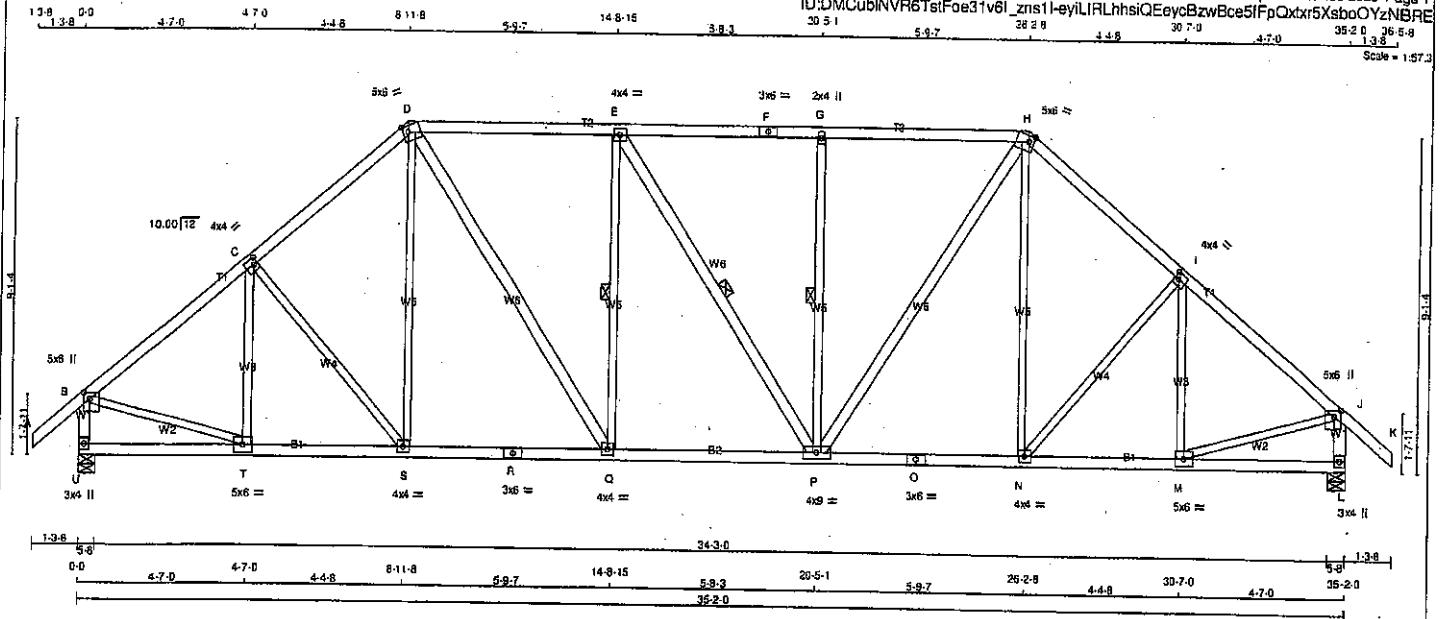

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - K	2x4	DRY	No.2
U - B	2x4	DRY	No.2
L - J	2x4	DRY	No.2
U - R	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - L	2x4	DRY	No.2

ALL WEBS	2x3	DRY	No.2
EXCEPT			
D - Q	2x4	DRY	No.2
E - P	2x4	DRY	No.2
P - H	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMVW+p	MT20	5.0	6.0	2.00	2.00
C TMWW-t	MT20	4.0	4.0	2.00	1.25
D TTWW-m	MT20	5.0	6.0	2.00	1.75
E TMWW-t	MT20	4.0	4.0		
F TS-t	MT20	3.0	6.0		
G TMW-w	MT20	2.0	4.0		
H TTWW-m	MT20	5.0	6.0	2.00	1.75
I TMWW-t	MT20	4.0	4.0	2.00	1.25
J TMVW+p	MT20	5.0	6.0	2.00	2.00
L BMV1+p	MT20	3.0	4.0		
M BMWW-t	MT20	5.0	6.0		
N, Q, S					
N BMWW-t	MT20	4.0	4.0		
O BS-t	MT20	3.0	6.0		
P BMWWWW-t	MT20	4.0	9.0		
R BS-t	MT20	3.0	6.0		
T BMWW-t	MT20	5.0	6.0		
U BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	UP
U	2086	0	0	5-8
L	2086	0	0	5-8

UNFACTORED REACTIONS

	1ST LCASE	MAX/MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
U	1458	971 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0
L	1458	971 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.44 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-Q, E-P, G-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. CS (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	T-C	-357 / 0	0.16 (1)
B-C	-1994 / 0	-91.8 -91.8	0.30 (1)	4.53	C-S	-121 / 0	0.10 (1)
C-D	-1957 / 0	-91.8 -91.8	0.29 (1)	4.57	S-D	0 / 188	0.05 (4)
D-E	-1923 / 0	-91.8 -91.8	0.40 (1)	4.44	D-Q	0 / 810	0.13 (1)
E-F	-1821 / 0	-91.8 -91.8	0.37 (1)	4.49	Q-E	-569 / 0	0.31 (1)
F-G	-1921 / 0	-91.8 -91.8	0.37 (1)	4.49	E-P	-3 / 0	0.00 (1)
G-H	-1921 / 0	-91.8 -91.8	0.40 (1)	4.45	P-G	-568 / 0	0.31 (1)
H-I	-1957 / 0	-91.8 -91.8	0.29 (1)	4.57	P-H	0 / 807	0.13 (1)
I-J	-1894 / 0	-91.8 -91.8	0.30 (1)	4.53	N-H	0 / 189	0.05 (4)
J-K	0 / 41	-91.8 -91.8	0.13 (1)	10.00	N-I	-121 / 0	0.10 (1)
U-B	-2028 / 0	0.0 0.0	0.22 (1)	5.94	M-I	-358 / 0	0.16 (1)
L-J	-2028 / 0	0.0 0.0	0.22 (1)	5.94	B-T	0 / 1617	0.38 (1)
					M-J	0 / 1517	0.36 (1)
U-T	0 / 0	-18.5 -18.5	0.08 (4)	10.00			
T-S	0 / 1585	-18.5 -18.5	0.30 (1)	10.00			
S-R	0 / 1477	-18.5 -18.5	0.30 (1)	10.00			
R-Q	0 / 1477	-18.5 -18.5	0.30 (1)	10.00			
Q-P	0 / 1923	-18.5 -18.5	0.38 (1)	10.00			
P-O	0 / 1478	-18.5 -18.5	0.30 (1)	10.00			
O-N	0 / 1478	-18.5 -18.5	0.30 (1)	10.00			
N-M	0 / 1555	-18.5 -18.5	0.31 (1)	10.00			
M-L	0 / 0	-18.5 -18.5	0.08 (4)	10.00			

TOTAL WEIGHT = 2 X 182 = 363 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
BOT CH.	LL = 6.0	PSF
	LL = 0.0	PSF
	LL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.17")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.08")
ALLOWABLE DEFL.(TL) = $L/360$ (1.17")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.16")

CSI: TC=0.40/1.00 (D-E:1), BC=0.38/1.00 (P-Q:1), WB=0.36/1.00 (B-T:1), SSI=0.25/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PS)	(PL)	(PL)
MAX MIN	MAX MIN	MAX MIN
MT20	618	354
	1557	788
	1987	1856


PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (B) (INPUT = 0.80)
JSI METAL = 0.50 (O) (INPUT = 1.00)



Structural component only
DWG# T-2007135

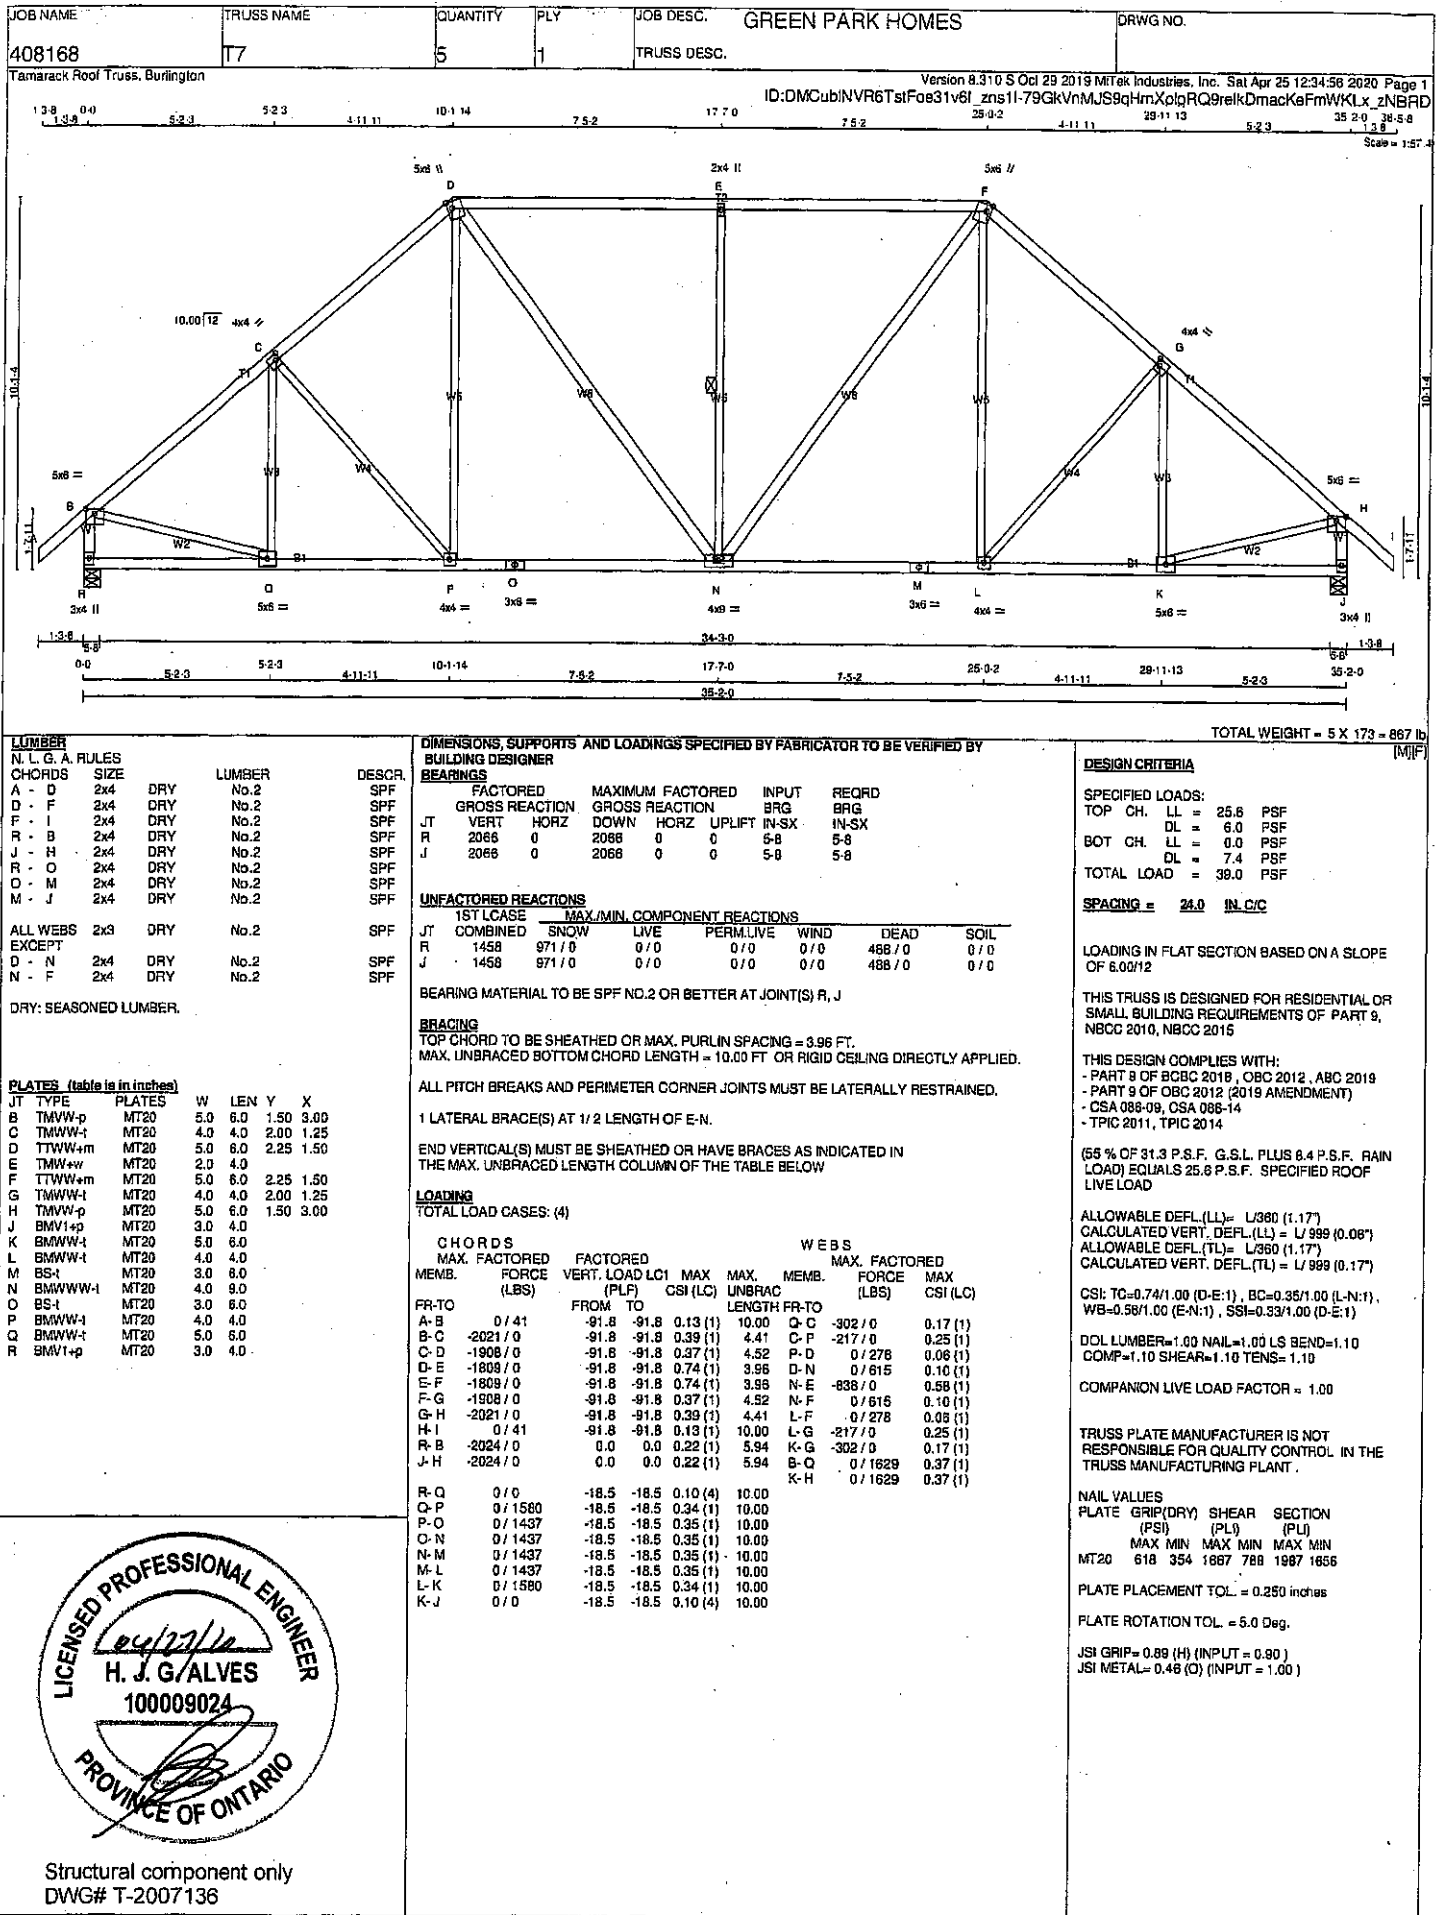


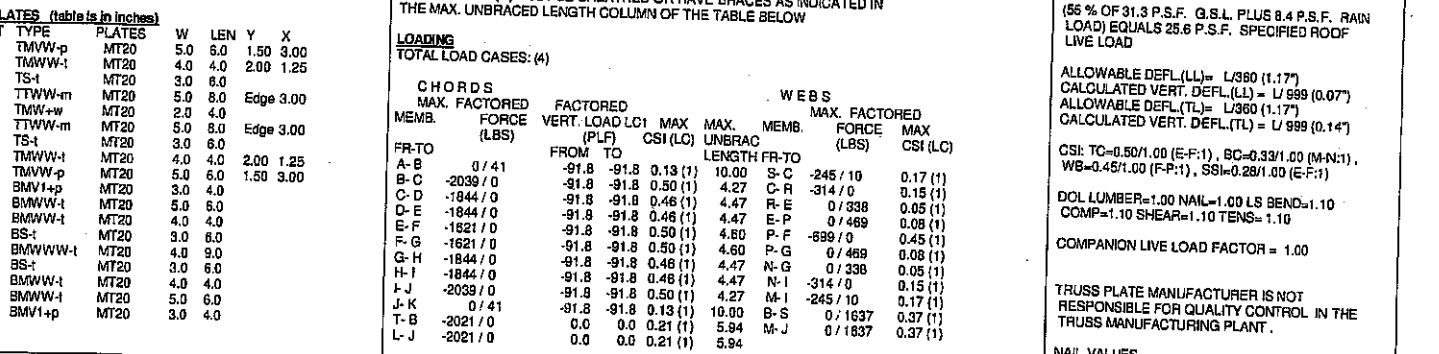[illegible]

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408168	T9	6	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:34:58 2020 Page 1
ID:DMCubINVR6TsIFoe31v6l_zns1l-3XOUwSNa_n5?55hB15UueGJD_0Uq4EhYDqps7tzNBRB

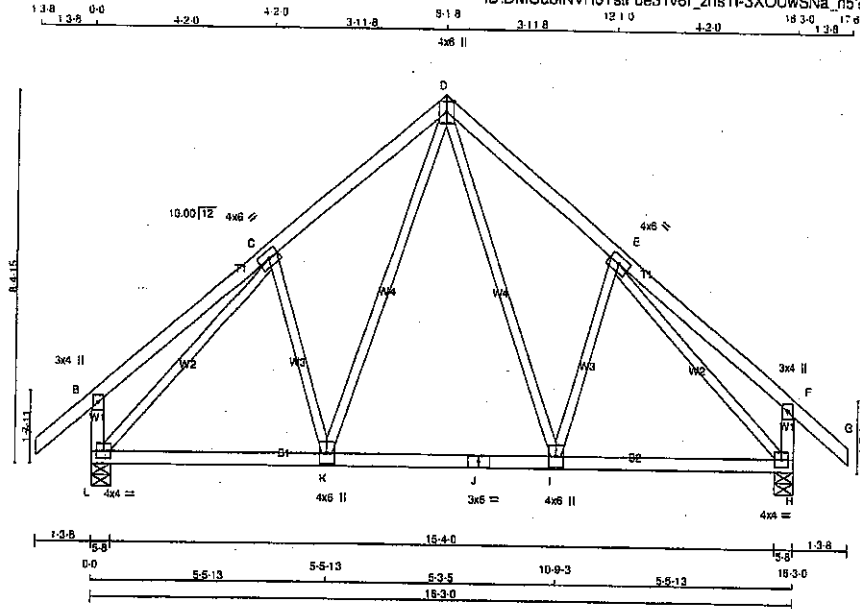

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
L - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
L - J	2x4	DRY	No.2
J - H	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV-p	MT20	3.0	4.0		
C	TMWW-t	MT20	4.0	8.0		
D	TTWW-p	MT20	4.0	8.0	Edge	
E	TMWW-t	MT20	4.0	8.0		
F	TMV-p	MT20	3.0	4.0		
H	BMVW-t	MT20	4.0	4.0		
I	BMWW-t	MT20	4.0	6.0		
J	BS-t	MT20	3.0	6.0		
K	BMWW-t	MT20	4.0	6.0		
L	BMVW-t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	DOWN	IN-SX	IN-SX
L	1023	0	5-8	5-8
H	1023	0	5-8	5-8

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
L	721	487 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0
H	721	487 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC1)	MAX. FACTORED VERT. LOAD (LC1)
FR-TO		FROM TO		FR-TO		FROM TO	
A-B	0 / 41	-91.8	-91.8 0.13 (1)	D-I	0 / 330	0.07 (1)	
B-C	0 / 28	-91.8	-91.8 0.24 (1)	I-E	-216 / 0	0.09 (1)	
C-D	-745 / 0	-91.8	-91.8 0.19 (1)	K-D	0 / 330	0.07 (1)	
D-E	-745 / 0	-91.8	-91.8 0.24 (1)	C-K	-216 / 0	0.09 (1)	
E-F	0 / 28	-91.8	-91.8 0.24 (1)	L-C	-943 / 0	0.61 (1)	
F-G	0 / 41	-91.8	-91.8 0.13 (1)	E-H	-943 / 0	0.61 (1)	
L-B	-267 / 0	0.0	0.0 0.03 (1)				
H-F	-267 / 0	0.0	0.0 0.03 (1)				
L-K	0 / 616	-18.5	-18.5 0.17 (4)				
K-J	0 / 449	-18.5	-18.5 0.16 (4)				
J-I	0 / 449	-18.5	-18.5 0.16 (4)				
I-H	0 / 616	-18.5	-18.5 0.17 (4)				

TOTAL WEIGHT = 6 X 80 = 481 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. O.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BOCB 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 085-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(LL) = $L/989$ (0.02")
ALLOWABLE DEFL.(TL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(TL) = $L/989$ (0.04")

CSI: TC=0.24/1.00 (B-C:1), BC=0.17/1.00 (H-I:4), WB=0.61/1.00 (C-L:1), SS=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	618	354	1667

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.76 (C) (INPUT = 0.90)
JSI METAL= 0.25 (C) (INPUT = 1.00)




Structural component only
DWG# T-2007138

Structural component only
DWG# T-2007123

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:34:59 2020 Page 1
ID:DMCubiNVR6TstFoe31v6l_zns1-I-Xiys8oOCi4DsiFFNQo?7nUGOUQrOpqnhSUZ?XJznBRA

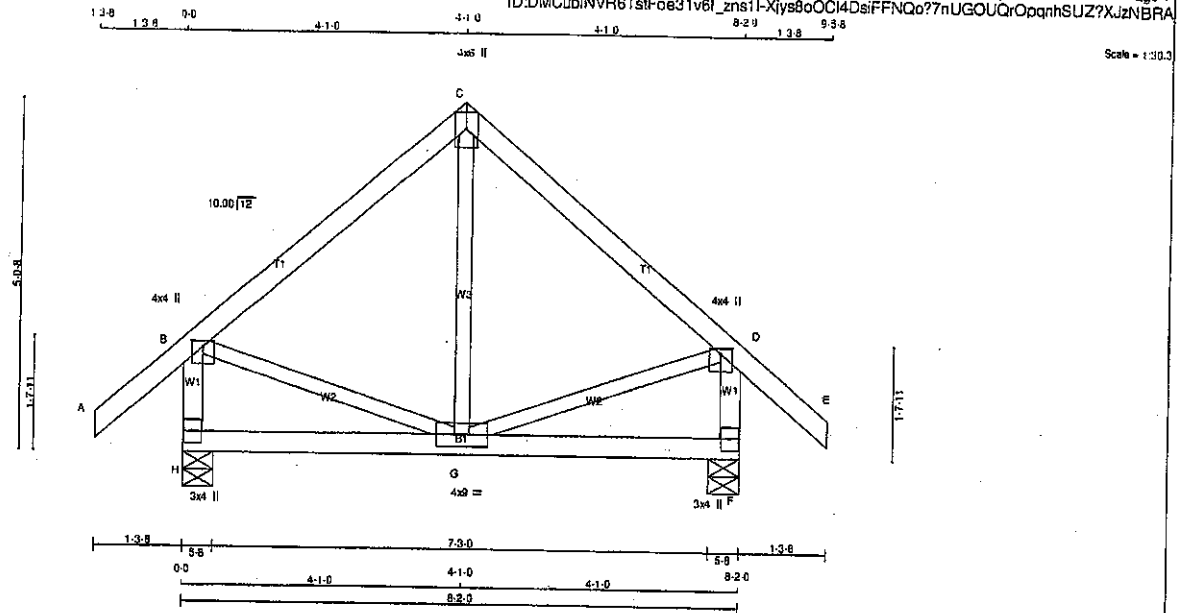

LUMBER		N. L. G. A. RULES	
CHORDS	SIZE	LUMBER	
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
H - B	2x4	DRY	No.2
F - D	2x4	DRY	No.2
H - F	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.00	2.00
C	TTW+p	MT20	4.0	6.0	Edge	
D	TMVW+p	MT20	4.0	4.0	1.00	2.00
F	BMV1+p	MT20	3.0	4.0		
G	BMVWVW-i	MT20	4.0	9.0		
H	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

BUILDING DESIGNER

BEARINGS							
	FACTORED		MAXIMUM FACTORED			INPUT	REQD
	GROSS REACTION		GROSS REACTION		BRG	BRG	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
JT	577	0	577	0	0	5-8	5-8
H	577	0	577	0	0	5-8	5-8
F	577	0	577	0	0	5-8	5-8

UNFACTORED REACTIONS

1ST LGASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
H	406	280 / 0	0 / 0	0 / 0	0 / 0	126 / 0	0 / 0
F	406	280 / 0	0 / 0	0 / 0	0 / 0	126 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS (LBS)	MAX. UNBRAC LENGTH	MEMB.	MAX. FORCE (LBS)	FACTORED MAX CS (LBS)
FR-TO		FROM TO			FR-TO		
A-B	0 / 41	-91.8	-91.8	1.13 (1)	10.00	G-C	
B-C	-264 / 0	-91.8	-91.8	0.20 (1)	6.25	B-G	-37 / 57 0.02 (4)
C-D	-264 / 0	-91.8	-91.8	0.20 (1)	6.25	G-D	0 / 213 0.05 (1)
D-E	0 / 41	-91.8	-91.8	1.13 (1)	10.00		
H-B	-548 / 0	0.0	0.0	0.06 (1)	7.81		
F-D	-548 / 0	0.0	0.0	0.06 (1)	7.81		
H-G	0 / 0	-18.5	-18.5	0.09 (4)	10.00		
G-F	0 / 0	-18.5	-18.5	0.09 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.8	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD			=	39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.27")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.27")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.20/1.00 (B-C:1), BC=0.09/1.00 (F-G:4),
WB=0.05/1.00 (D-G:1), SS=0.11/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)	(PLI)	(PLI)	(PLI)	(PLI)	(PLI)
MT20	618	354	1667	789	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.46 (D) (INPUT = 0.90)
JSI METAL= 0.12 (D) (INPUT = 1.00)




Structural component only
DWG# T-2007139

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:34:41 2020 Page 1
ID:DMCubINVR6TstFoe31v6!_zns1f-3Gs3MeAv_YyQYUtnW0gv2hWL7AjCchl2JgC3vMzNBRS

Scale = 1:29.4

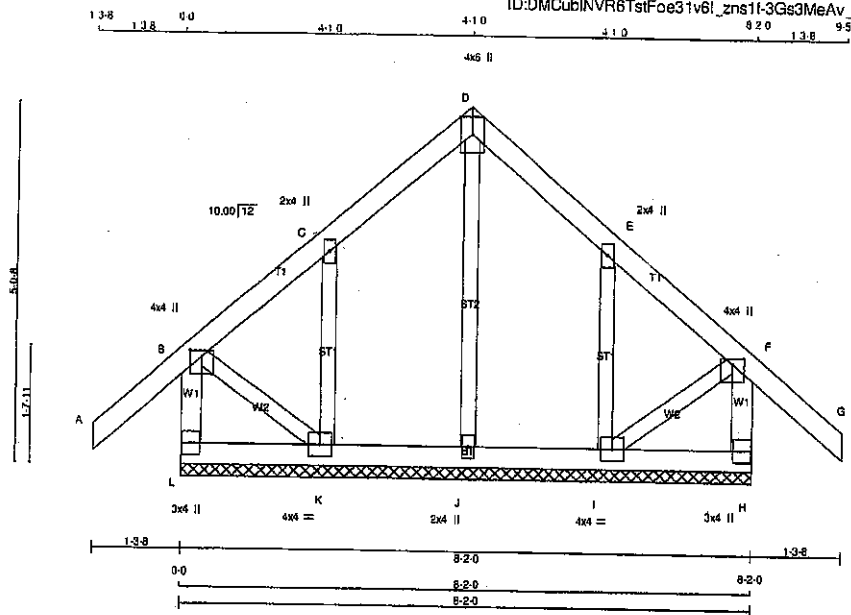

TOTAL WEIGHT = 40 lb

LUMBER

N. L. G. A. RULES

CHORDS	SIZE		LUMBER
L - B	2x4	DRY	No.2
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
H - F	2x4	DRY	No.2
L - H	2x4	DRY	No.2

ALL WEBS	2x3	DRY	No.2
ALL GABLE WEBS			
	2x3	DRY	No.2
DRY: SEASONED LUMBER			

GABLE STUDS SPACED AT 2'-0" OC.

PLATES (tablets in inches)

J	T	PLATES	W	LEN	Y	X
B	TMWV+p	MT20	2.0	4.0	1.00	2.00
C	TMWV+w	MT20	2.0	4.0		
D	TTW+p	MT20	4.0	6.0	Edge	
E	TMW+w	MT20	2.0	4.0		
F	TMWV+p	MT20	4.0	4.0	1.00	2.00
H	BMV1+p	MT20	3.0	4.0		
I	BMWV1-1	MT20	4.0	4.0		
J	BMW1+w	MT20	2.0	4.0		
K	BMWV1-1	MT20	4.0	4.0		
L	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BUILDING BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS			FACTORED			WEBBS		
MEMB.	MAX. FORCE (LBS)	VERT. LOAD (PLF)	LC1 (C)	LC2 (C)	MAX. UNBRAC	MEMB.	MAX. FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO			LENGTH	FR-TO		
L-B	-224 / 0	0.0	0.0	0.02 (1)	7.61	J-D	-126 / 0	0.05 (1)
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00	K-C	-227 / 0	0.04 (1)
B-C	-11 / 0	-91.8	-91.8	0.08 (1)	6.25	I-E	-227 / 0	0.04 (1)
C-D	-31 / 0	-91.8	-91.8	0.08 (1)	6.25	S-K	0 / 24	0.01 (1)
D-E	-31 / 0	-91.8	-91.8	0.06 (1)	6.25	I-F	0 / 24	0.01 (1)
E-F	-11 / 0	-91.8	-91.8	0.08 (1)	6.25			
F-G	0 / 41	-91.8	-91.8	0.13 (1)	10.00			
H-F	-224 / 0	0.0	0.0	0.02 (1)	7.61			
L-K	0 / 0	-18.5	-18.5	0.02 (4)	10.00			
K-J	0 / 13	-18.5	-18.5	0.02 (4)	10.00			
J-I	0 / 13	-18.5	-18.5	0.02 (4)	10.00			
I-H	0 / 0	-18.5	-18.5	0.02 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL =	25.6	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD		=	39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.13/1.00 (A-B:1), BC=0.02/1.00 (J-K:4),
WB=0.05/1.00 (D-J:1), SSI=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)	(PSI)	(PLI)	(PLI)	(PLI)	(PLI)
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	618	354	1667	788	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.17 (C) (INPUT = 0.80)
JSI METAL= 0.12 (C) (INPUT = 1.00)



Structural component only
DWG# T-2007124

JOB NAME 408168	TRUSS NAME G11	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

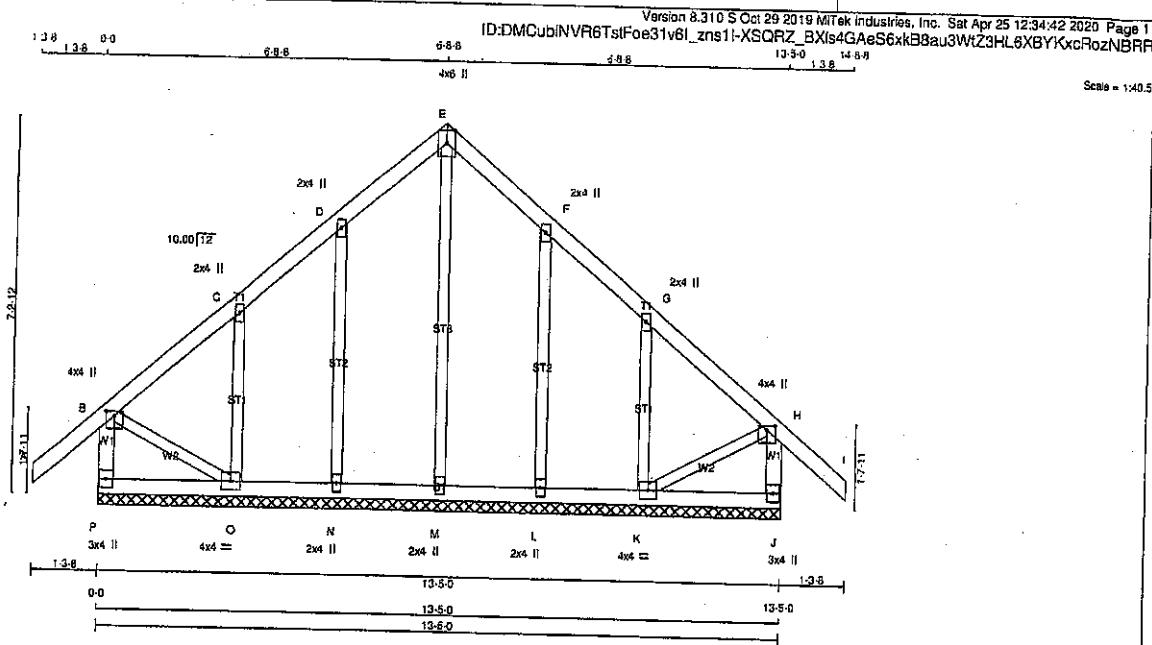

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER
P - B	2x4	DRY No.2
A - E	2x4	DRY No.2
E - I	2x4	DRY No.2
J - H	2x4	DRY No.2
P - J	2x4	DRY No.2

ALL WEBS 2x3 DRY No.2

ALL GABLE WEBS 2x3 DRY No.2

DRY: SEASONED LUMBER.

GABLE STUDS SPACED AT 2'-0" OC.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMWV+p	MT20	4.0	4.0	1.00	2.00
C, D, F, G					
C TMW+w	MT20	2.0	4.0		
E TTW+p	MT20	4.0	6.0	Edge	
H TMWV+p	MT20	4.0	4.0	1.00	2.00
J BMV1+p	MT20	3.0	4.0		
K BMWV1-t	MT20	4.0	4.0		
L, M, N					
L BMW1+w	MT20	2.0	4.0		
O BMWV1-t	MT20	4.0	4.0		
P BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S).

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	LENGTH
FR-TO				FR-TO			
P-B	-263 / 0	0.0	0.03 (1)	M-E	-128 / 0	0.11 (1)	7.81
A-B	0 / 41	-91.8	-91.8 0.13 (1)	N-D	-180 / 0	0.09 (1)	10.00
B-C	-24 / 0	-91.8	-91.8 0.08 (1)	O-C	-239 / 0	0.06 (1)	6.25
C-D	-36 / 0	-91.8	-91.8 0.08 (1)	L-F	-190 / 0	0.09 (1)	6.25
D-E	-35 / 0	-91.8	-91.8 0.05 (1)	K-G	-239 / 0	0.06 (1)	6.25
E-F	-35 / 0	-91.8	-91.8 0.05 (1)	B-O	0 / 32	0.01 (1)	6.25
F-G	-36 / 0	-91.8	-91.8 0.08 (1)	K-H	0 / 32	0.01 (1)	6.25
G-H	-24 / 0	-91.8	-91.8 0.08 (1)				
H-I	0 / 41	-91.8	-91.8 0.13 (1)				10.00
J-H	-263 / 0	0.0	0.03 (1)				7.81
P-O	0 / 0	-18.5	-18.5 0.03 (4)				10.00
O-N	0 / 22	-18.5	-18.5 0.03 (4)				10.00
N-M	0 / 19	-18.5	-18.5 0.02 (4)				10.00
M-L	0 / 19	-18.5	-18.5 0.02 (4)				10.00
L-K	0 / 22	-18.5	-18.5 0.03 (4)				10.00
K-J	0 / 0	-18.5	-18.5 0.03 (4)				10.00

TOTAL WEIGHT = 65 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA C88-09, CSA C88-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.13/1.00 (H-I:1), BC=0.03/1.00 (K-L:4), WB=0.11/1.00 (E-M:1), SS=0.09/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENG=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY) (PSI)	SHEAR (PLI)	SECTION (PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1887 788

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.20 (B) (INPUT = 0.90)

JSI METAL= 0.13 (G) (INPUT = 1.00)




Structural component only
DWG# T-2007125

JOB NAME 408168	TRUSS NAME T12	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitak Industries, Inc. Sat Apr 25 12:35:01 2020 Page 1
ID:DMCubINVR6TstFoe31v6I_zns1I-T63dYUPSGITayZPmYD1bsvLjXEW1HhI_vn26cCzNBR8

Scale = 1:18.8

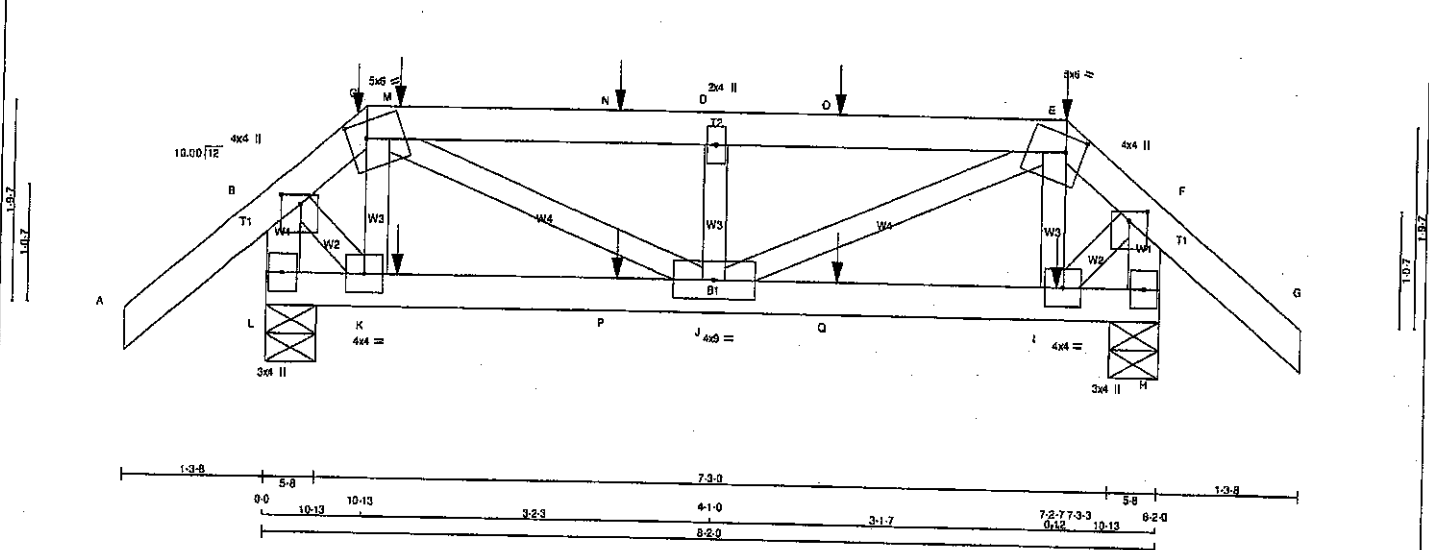

LUMBER
N. L. G. A. RULES
CHORDS SIZE DRY LUMBER DESCR. SPF

CHORDS	SIZE	DRY	LUMBER	DESCR.	SPF
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
L - B	2x4	DRY	No.2	SPF	
H - F	2x4	DRY	No.2	SPF	
L - H	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.00	2.00
C	TTWW-m	MT20	5.0	8.0	1.75	2.00
D	TMW+w	MT20	2.0	4.0		
E	TTWW-m	MT20	5.0	8.0	1.75	2.00
F	TMVW+p	MT20	4.0	4.0	1.00	2.00
H	BMV1+p	MT20	3.0	4.0		
J	BMVW-t	MT20	4.0	4.0		
K	BMVW-t	MT20	4.0	4.0		
L	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS REACTION	GROSS REACTION	DOWN	HORIZ	BRG	IN-SX	BRG	IN-SX
L	913	0	913	0	0	5-8	5-8	5-8	5-8
H	911	0	911	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
L	842	442 / 0	0 / 0	0 / 0	0 / 0	199 / 0	0 / 0
H	641	437 / 0	0 / 0	0 / 0	0 / 0	204 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.82 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD	LC1 MAX	MEMB.	FORCE (LBS)	VERT. LOAD	LC1 MAX
FR-TO		FROM TO		FR-TO		FROM TO	
A-B	0 / 41	-91.8	-91.8 0.14 (1)	J-D	-487 / 0	0.08 (1)	
B-C	-931 / 0	-91.8	-91.8 0.14 (1)	K-C	-156 / 0	0.02 (1)	
C-M	-1054 / 0	-91.8	-91.8 0.23 (1)	C-J	0 / 700	0.17 (1)	
M-N	-1054 / 0	-91.8	-91.8 0.23 (1)	B-K	0 / 525	0.13 (1)	
N-D	-1054 / 0	-91.8	-91.8 0.23 (1)	I-E	-149 / 0	0.02 (1)	
D-O	-1054 / 0	-91.8	-91.8 0.23 (1)	J-E	0 / 698	0.17 (1)	
O-E	-1054 / 0	-91.8	-91.8 0.23 (1)	I-F	0 / 526	0.13 (1)	
E-F	-632 / 0	-91.8	-91.8 0.14 (1)				
F-G	0 / 41	-91.8	-91.8 0.14 (1)				
L-B	-936 / 0	0.0	0.0 0.10 (1)				
H-F	-937 / 0	0.0	0.0 0.10 (1)				
L-K	0 / 0	-18.5	-18.5 0.05 (1)				
K-P	0 / 420	-18.5	-18.5 0.13 (1)				
P-J	0 / 420	-18.5	-18.5 0.13 (1)				
J-Q	0 / 421	-18.5	-18.5 0.14 (1)				
Q-I	0 / 421	-18.5	-18.5 0.14 (1)				
I-H	0 / 0	-18.5	-18.5 0.05 (1)				

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.27")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.27")
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.23/1.00 (C-D:1), BC=0.14/1.00 (I-J:1), WB=0.17/1.00 (C-J:1), SS=0.22/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00


COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MT20 618 354 1667 789 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches
PLATE ROTATION TOL. = 5.0 Deg.




Structural component only
DWG# T-2007141

JOB NAME 408168	TRUSS NAME T13	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:35:03 2020 Page 1
ID:DMCubINVR6TstFoe31v6L_zns11-PVBNzARioJiBsZ9fe33xKQvZ1CWYJHN5XDg4zNBR6

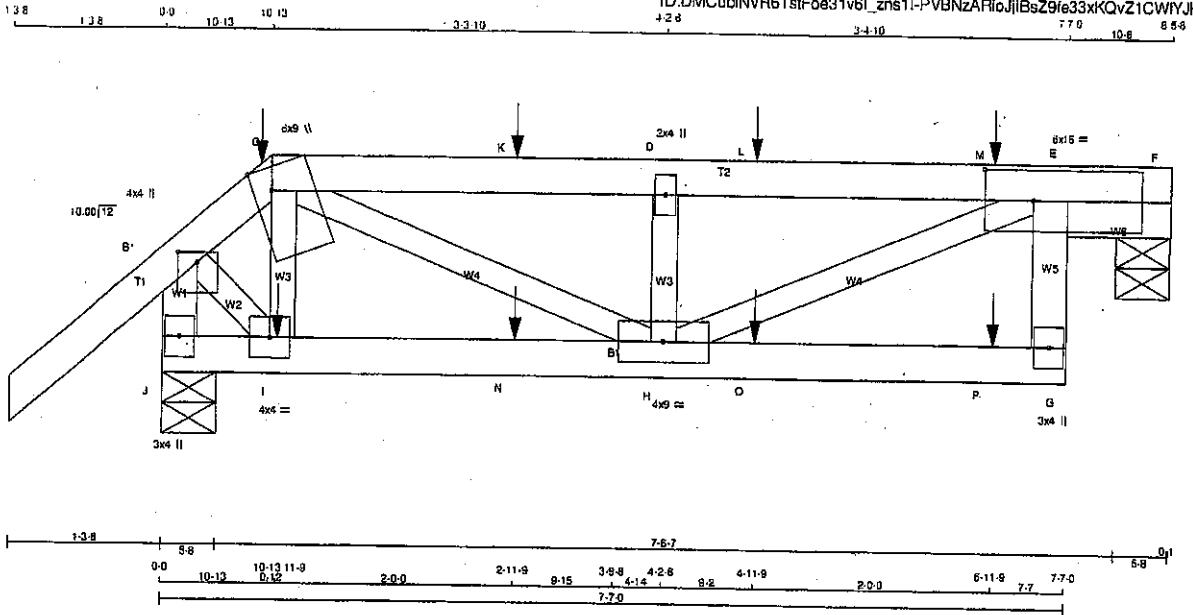

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
E - F	2x4	DRY	No.2
G - E	2x4	DRY	No.2
J - B	2x4	DRY	No.2
J - G	2x4	DRY	No.2

ALL WEBS 2x3 DRY
DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.00	2.00
C	TIWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW+w	MT20	2.0	4.0		
E	TMVWV-I	MT20	6.0	19.0	3.00	5.00
G	BMV+p	MT20	3.0	4.0		
H	BMVWV-I	MT20	4.0	9.0		
J	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	DOWN	HORIZ	UPLIFT
F	895	0	0	5-8
J	936	0	0	5-8

BEVELED PLATE OR SHIM REQUIRED TO PROVIDE FULL BEARING SURFACE WITH TRUSS CHORD AT JT(S): F

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	490	327 / 0	0 / 0	0 / 0	0 / 0	163 / 0	0 / 0	0 / 0
J	659	449 / 0	0 / 0	0 / 0	0 / 0	210 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.58 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED HORIZ. LOAD (LBS)	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED HORIZ. LOAD (LBS)
A-B	0 / 41	-91.8	-91.8	0.14 (1)	10.00	10.00	0.03 (1)
B-C	-655 / 0	-91.8	-91.8	0.14 (1)	6.25	6.25	0.14 (1)
C-K	-1230 / 0	-91.8	-91.8	0.46 (1)	5.09	5.09	0.12 (1)
K-D	-1230 / 0	-91.8	-91.8	0.46 (1)	5.09	5.09	0.12 (1)
D-L	-1230 / 0	-91.8	-91.8	0.89 (1)	3.58	3.58	0.21 (1)
L-M	-1230 / 0	-91.8	-91.8	0.89 (1)	3.58	3.58	0.33 (1)
M-E	-1230 / 0	-91.8	-91.8	0.89 (1)	3.58	3.58	0.33 (1)
E-F	0 / 0	-91.8	-91.8	0.35 (1)	10.00	10.00	0.33 (1)
G-E	0 / 83	0.0	0.0	0.02 (4)	10.00	10.00	0.33 (1)
J-B	-968 / 0	0.0	0.0	0.11 (1)	7.81	7.81	0.33 (1)
J-I	0 / 0	-18.5	-18.5	0.06 (1)	10.00	10.00	0.33 (1)
I-N	0 / 438	-18.5	-18.5	0.14 (1)	10.00	10.00	0.33 (1)
N-H	0 / 438	-18.5	-18.5	0.14 (1)	10.00	10.00	0.33 (1)
H-O	0 / 0	-18.5	-18.5	0.09 (1)	10.00	10.00	0.33 (1)
O-P	0 / 0	-18.5	-18.5	0.09 (1)	10.00	10.00	0.33 (1)
P-G	0 / 0	-18.5	-18.5	0.09 (1)	10.00	10.00	0.33 (1)

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	FACE	DIR.	TYPE	HEEL	CONN.
C	10-13	-9	-10	FRONT	VERT	DEAD	-	C1
C	10-13	-90	-90	FRONT	VERT	TOTAL	-	C1
C	10-13	-44	-44	FRONT	VERT	SNOW	-	C1
I	11-9	-49	-49	FRONT	VERT	TOTAL	-	C1
K	2-11-9	-82	-82	FRONT	VERT	TOTAL	-	C1
L	4-11-9	-82	-82	FRONT	VERT	TOTAL	-	C1
M	6-11-9	-82	-82	FRONT	VERT	TOTAL	-	C1
N	2-11-9	-49	-49	FRONT	VERT	TOTAL	-	C1
O	4-11-9	-49	-49	FRONT	VERT	TOTAL	-	C1
P	6-11-9	-53	-53	FRONT	VERT	TOTAL	-	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 32 lb

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 6.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADDT'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.25")
CALCULATED VERT. DEFL.(LL) = 1/899 (0.07")
ALLOWABLE DEFL.(TL) = L/360 (0.25")
CALCULATED VERT. DEFL.(TL) = 1/688 (0.13")

CSI: TC=0.89/1.00 (D-E:1), BC=0.14/1.00 (H-I:1),
WB=0.33/1.00 (E-H:1), SSI=0.42/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX	MIN	MAX
MT20	618	354
	1667	789
	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.79 (C) (INPUT = 0.90)
JSI METAL= 0.30 (H) (INPUT = 1.00)



Structural component only
DWG# T-2007142

JOB NAME 408169	TRUSS NAME T20	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					
Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:24 2020 Page 1					
ID:K?TPthgJ0npfqiYabWIOFzIdeG-ibigtasntSB7_Budbz0zKub4B6zN_xr0MZbHOgzNBDI					
Scale = 1:57.3					

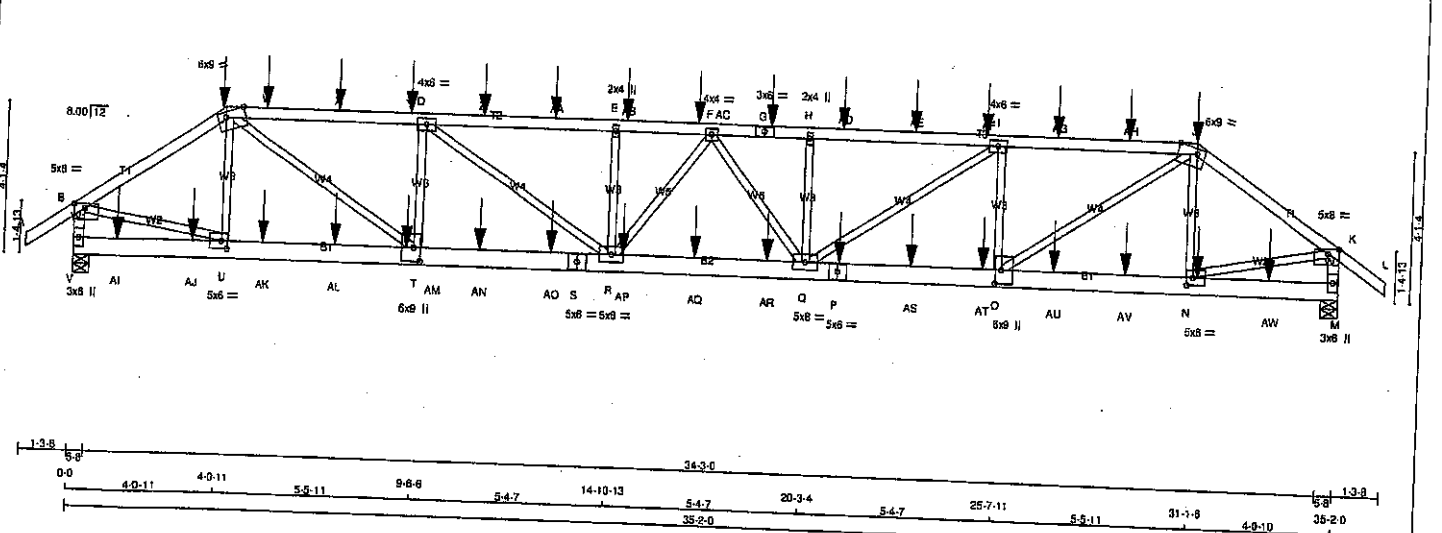

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4	DRY	No.2
C - G	2x4	DRY	No.2
G - J	2x4	DRY	No.2
J - L	2x4	DRY	No.2
V - B	2x4	DRY	No.2
M - K	2x4	DRY	No.2
V - S	2x6	DRY	No.2
S - P	2x6	DRY	No.2
P - M	2x6	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C	12	SIDE(61.0)
C - G	12	SIDE(61.0)
G - J	12	SIDE(61.0)
J - L	12	SIDE(61.0)
V - B	12	SIDE(61.0)
M - K	12	SIDE(61.0)
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
V - S	12	SIDE(183.1)
S - P	12	SIDE(183.1)
P - M	12	SIDE(183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3	6	SIDE(61.0)

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	GROSS REACTION	VERT	HORZ	GROSS REACTION	DOWN	UPLIFT	IN-SX	BRG	IN-SX
V	3342	0	0	3342	0	0	5-8	5-8	5-8
M	3393	0	0	3393	0	0	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST LOASE	MAX/MIN COMPONENT REACTIONS	PERM/LIVE	WIND	DEAD	SOIL
V	2363	1585 / 0	0 / 0	0 / 0	808 / 0	0 / 0
M	2397	1585 / 0	0 / 0	0 / 0	812 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) V, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.03 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD	LC1 MAX (PLF)	MEMB.	FORCE (LBS)	MAX. (LBS)	MAX. (LC)
FR-TO				FR-TO			
A-B	0 / 35	-91.8	-91.9 0.07 (1)	U-C	-596 / 0	0.08 (1)	0.08 (1)
B-C	-3951 / 0	-91.8	-91.8 0.22 (1)	C-T	0 / 3530	0.44 (1)	0.44 (1)
C-W	-6186 / 0	-91.8	-91.8 0.61 (1)	T-D	-1829 / 0	0.23 (1)	0.23 (1)
W-X	-6186 / 0	-91.8	-91.8 0.61 (1)	D-R	0 / 1602	0.20 (1)	0.20 (1)
X-Y	-6186 / 0	-91.8	-91.8 0.61 (1)	R-E	-602 / 0	0.08 (1)	0.08 (1)
Y-D	-6186 / 0	-91.8	-91.8 0.61 (1)	Q-H	-596 / 0	0.08 (1)	0.08 (1)
D-Z	-7502 / 0	-91.8	-91.8 0.71 (1)	Q-I	0 / 1573	0.19 (1)	0.19 (1)
Z-AA	-7502 / 0	-91.8	-91.8 0.71 (1)	O-I	-1806 / 0	0.23 (1)	0.23 (1)
AA-E	-7502 / 0	-91.8	-91.8 0.71 (1)	C-J	0 / 3493	0.43 (1)	0.43 (1)
E-AB	-7502 / 0	-91.8	-91.8 0.71 (1)	N-J	-616 / 0	0.08 (1)	0.08 (1)
AB-AC	-7502 / 0	-91.8	-91.8 0.35 (1)	B-U	0 / 3374	0.42 (1)	0.42 (1)
AC-F	-7502 / 0	-91.8	-91.8 0.35 (1)	N-K	0 / 3439	0.43 (1)	0.43 (1)
F-G	-7509 / 0	-91.8	-91.8 0.37 (1)	R-F	-179 / 0	0.03 (1)	0.03 (1)
G-H	-7509 / 0	-91.8	-91.8 0.37 (1)	F-Q	-168 / 0	0.03 (1)	0.03 (1)
H-AD	-7509 / 0	-91.8	-91.8 0.71 (1)				
AD-AE	-7509 / 0	-91.8	-91.8 0.71 (1)				
AE-AF	-7509 / 0	-91.8	-91.8 0.71 (1)				
AF-I	-7509 / 0	-91.8	-91.8 0.71 (1)				
I-AG	-6217 / 0	-91.8	-91.8 0.61 (1)				
AG-AH	-6217 / 0	-91.8	-91.8 0.61 (1)				
AH-J	-6217 / 0	-91.8	-91.8 0.61 (1)				
J-K	-4025 / 0	-91.8	-91.8 0.22 (1)				
K-L	0 / 35	-91.8	-91.8 0.07 (1)				
V-B	-3298 / 0	0.0	0.0 0.18 (1)				
M-K	-3356 / 0	0.0	0.0 0.19 (1)				

V-AI	0 / 0	-18.5	-18.5 0.05 (4)	10.00
AI-AJ	0 / 0	-18.5	-18.5 0.05 (4)	10.00
AJ-U	0 / 0	-18.5	-18.5 0.05 (4)	10.00
U-AK	0 / 3285	-18.5	-18.5 0.25 (1)	10.00
AK-AL	0 / 3285	-18.5	-18.5 0.25 (1)	10.00
AL-AM	0 / 3285	-18.5	-18.5 0.25 (1)	10.00
AM-T	0 / 3285	-18.5	-18.5 0.25 (1)	10.00
T-AN	0 / 6186	-18.5	-18.5 0.45 (1)	10.00
AN-AO	0 / 6186	-18.5	-18.5 0.45 (1)	10.00
AO-S	0 / 6186	-18.5	-18.5 0.45 (1)	10.00
S-R	0 / 6186	-18.5	-18.5 0.45 (1)	10.00
R-AP	0 / 7606	-18.5	-18.5 0.56 (1)	10.00
AP-AQ	0 / 7606	-18.5	-18.5 0.56 (1)	10.00
AQ-AR	0 / 7606	-18.5	-18.5 0.56 (1)	10.00
AR-Q	0 / 7606	-18.5	-18.5 0.56 (1)	10.00
Q-P	0 / 6217	-18.5	-18.5 0.46 (1)	10.00
P-AS	0 / 6217	-18.5	-18.5 0.46 (1)	10.00

TOTAL WEIGHT = 2 X 160 = 321 LB

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL	= 25.6 PSF
	DL	= 6.0 PSF
BOT CH.	LL	= 0.0 PSF
	DL	= 7.4 PSF
TOTAL LOAD		= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(5% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.23")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/664 (0.44")

CSI: TC=0.71/1.00 (D-E:1), BC=0.56/1.00 (Q-R:1),
WB=0.44/1.00 (C-T:1), SSI=0.23/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSB) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1657 786 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.71 (G) (INPUT = 0.90)
JSI METAL = 0.56 (S) (INPUT = 1.00)

CONTINUED ON PAGE 2



Structural component only
DWG# T-2007145 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408169	T20	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:49:24 2020 Page 2
ID:K?TPdng0npl1q/YdbwWOFzIdeG-i8itgasn1sB7 Budbz0zKub4B6zN xr0MZbHOgzNBDf

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	1.50	3.50
C	TTWW-m	MT20	6.0	9.0	Edge	6.25
D	TMWW-t	MT20	4.0	6.0		
E	TMW-w	MT20	2.0	4.0		
F	TMWW-t	MT20	4.0	4.0		
G	TS-t	MT20	3.0	5.0		
H	TMW-w	MT20	2.0	4.0		
I	TMWW-t	MT20	4.0	6.0		
J	TTWW-m	MT20	6.0	9.0	Edge	6.25
K	TMVW-p	MT20	5.0	8.0	1.50	3.50
M	BMV1-p	MT20	3.0	5.0		
N	BMWW-t	MT20	5.0	6.0	2.50	2.00
O	BMWW-t	MT20	6.0	9.0	4.50	2.00
P	BS-t	MT20	5.0	6.0		
Q	BMWWW-t	MT20	5.0	8.0		
R	BMWWW-t	MT20	5.0	8.0		
S	BS-t	MT20	5.0	6.0		
T	BMWW-t	MT20	6.0	9.0	4.50	2.00
U	BMWW-t	MT20	5.0	5.0	2.50	2.00
V	BMV1-p	MT20	3.0	5.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX	MAX. UNBRAC. LENGTH FR-TO	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO					
AS-AT	0 / 6217	-18.5	-18.5	0.46 (1)			10.00
AT-O	0 / 6217	-18.5	-18.5	0.46 (1)			10.00
O-AU	0 / 3326	-18.5	-18.5	0.26 (1)			10.00
AU-AV	0 / 3326	-18.5	-18.5	0.26 (1)			10.00
AV-N	0 / 3326	-18.5	-18.5	0.26 (1)			10.00
N-AW	0 / 0	-18.5	-18.5	0.04 (4)			10.00
AW-M	0 / 0	-18.5	-18.5	0.04 (4)			10.00

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	4-0-11	-49	-55		FRONT	VERT	DEAD		C1
C	4-0-11	-254	-254		FRONT	VERT	SNOW		C1
G	19-2-12	-110	-110		BACK	VERT	TOTAL		C1
J	31-1-6	-49	-55		FRONT	VERT	DEAD		C1
J	31-1-6	-117	-117		BACK	VERT	TOTAL		C1
J	31-1-6	-254	-254		FRONT	VERT	SNOW		C1
N	31-2-12	-26	-26		BACK	VERT	TOTAL		C1
P	21-2-12	-26	-26		BACK	VERT	TOTAL		C1
W	5-2-12	-110	-110		BACK	VERT	TOTAL		C1
X	7-2-12	-110	-110		BACK	VERT	TOTAL		C1
Y	9-2-12	-110	-110		BACK	VERT	TOTAL		C1
Z	11-2-12	-110	-110		BACK	VERT	TOTAL		C1
AA	13-2-12	-110	-110		BACK	VERT	TOTAL		C1
AB	15-2-12	-110	-110		BACK	VERT	TOTAL		C1
AC	17-2-12	-110	-110		BACK	VERT	TOTAL		C1
AD	21-2-12	-110	-110		BACK	VERT	TOTAL		C1
AE	23-2-12	-110	-110		BACK	VERT	TOTAL		C1
AF	25-2-12	-110	-110		BACK	VERT	TOTAL		C1
AG	27-2-12	-110	-110		BACK	VERT	TOTAL		C1
AH	29-2-12	-110	-110		BACK	VERT	TOTAL		C1
AI	1-2-12	-26	-26		BACK	VERT	TOTAL		C1
AJ	3-2-12	-26	-26		BACK	VERT	TOTAL		C1
AK	5-2-12	-26	-26		BACK	VERT	TOTAL		C1
AL	7-2-12	-26	-26		BACK	VERT	TOTAL		C1
AM	9-2-12	-26	-26		BACK	VERT	TOTAL		C1
AN	11-2-12	-26	-26		BACK	VERT	TOTAL		C1
AO	13-2-12	-26	-26		BACK	VERT	TOTAL		C1
AP	15-2-12	-26	-26		BACK	VERT	TOTAL		C1
AQ	17-2-12	-26	-26		BACK	VERT	TOTAL		C1
AR	19-2-12	-26	-26		BACK	VERT	TOTAL		C1
AS	23-2-12	-26	-26		BACK	VERT	TOTAL		C1
AT	25-2-12	-26	-26		BACK	VERT	TOTAL		C1
AU	27-2-12	-26	-26		BACK	VERT	TOTAL		C1
AV	29-2-12	-26	-26		BACK	VERT	TOTAL		C1
AW	33-2-12	-26	-26		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2007145

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408169	T20Z	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Sat Apr 25 12:49:25 2020 Page 1

ID:K7TPdng0npl1qYdbWfOFzIdG-AKHFWuP09K_cKTP9gXC167DKWF2jIk9bCKqW7zNBDe

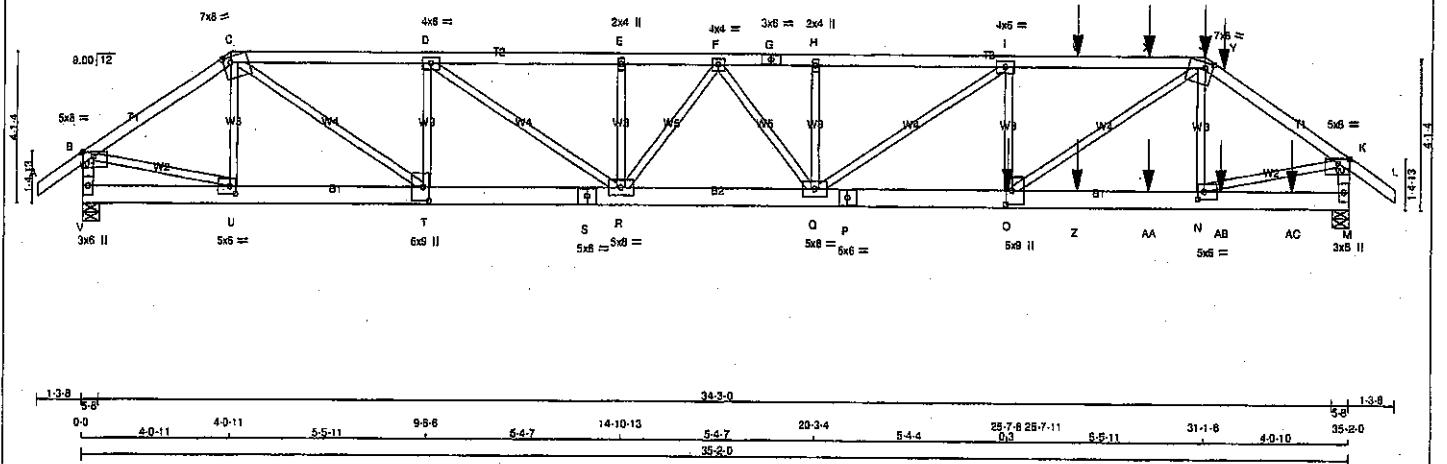

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - G	2x4	DRY	No.2	SPF	
G - J	2x4	DRY	No.2	SPF	
J - L	2x4	DRY	No.2	SPF	
V - B	2x4	DRY	No.2	SPF	
M - K	2x4	DRY	No.2	SPF	
V - S	2x6	DRY	No.2	SPF	
S - P	2x6	DRY	No.2	SPF	
P - M	2x6	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		TOP
A-C	12	TOP
C-G	12	TOP
G-J	12	TOP
J-L	12	TOP
V-B	12	TOP
M-K	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		TOP
V-S	12	TOP
S-P	12	TOP
P-M	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		TOP
2x3	6	TOP
I-O	3	TOP
D-T	3	TOP

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
GROSS REACTION	GROSS REACTION	BRG	BRG	
JT VERT	2938	0	2938	0
M VERT	4796	0	4796	0

UNFACTORED REACTIONS							
	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
V	2073	1388 / 0	0 / 0	0 / 0	0 / 0	684 / 0	0 / 0
M	3361	2278 / 0	0 / 0	0 / 0	0 / 0	1103 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) V, M

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.57 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	CS1 (LC)	MEMB. FORCE (LBS)
FR-TO		FROM TO	LENGTH	FR-TO
A-B	0 / 35	-91.8	-91.8 0.07 (1)	10.00
B-C	-3442 / 0	-91.8	-91.8 0.20 (1)	4.88
C-D	-5905 / 0	-91.8	-91.8 0.43 (1)	3.70
D-E	-7947 / 0	-91.8	-91.8 0.58 (1)	3.11
E-F	-7947 / 0	-91.8	-91.8 0.51 (1)	3.30
F-G	-9222 / 0	-91.8	-91.8 0.38 (1)	3.01
G-H	-9222 / 0	-91.8	-91.8 0.36 (1)	3.01
H-I	-9222 / 0	-91.8	-91.8 0.77 (1)	2.73
I-W	-9635 / 0	-91.8	-91.8 0.68 (1)	2.57
W-X	-9635 / 0	-91.8	-91.8 0.88 (1)	2.57
X-J	-9635 / 0	-91.8	-91.8 0.88 (1)	2.57
J-Y	-9847 / 0	-91.8	-91.8 0.33 (1)	3.78
Y-K	-9847 / 0	-91.8	-91.8 0.33 (1)	3.78
K-L	0 / 35	-91.8	-91.8 0.07 (1)	10.00
V-B	-2914 / 0	0.0	0.0 0.16 (1)	8.74
M-K	-4771 / 0	0.0	0.0 0.27 (1)	5.48
V-U	0 / 0	-18.5	-18.5 0.03 (4)	10.00
U-T	0 / 2843	-18.5	-18.5 0.21 (1)	10.00
T-S	0 / 5906	-18.5	-18.5 0.44 (1)	10.00
S-R	0 / 5906	-18.5	-18.5 0.44 (1)	10.00
R-Q	0 / 8653	-18.5	-18.5 0.52 (1)	10.00
Q-P	0 / 9635	-18.5	-18.5 0.72 (1)	10.00
P-O	0 / 9635	-18.5	-18.5 0.72 (1)	10.00
O-Z	0 / 4855	-18.5	-18.5 0.41 (1)	10.00
Z-AA	0 / 4855	-18.5	-18.5 0.41 (1)	10.00
AA-N	0 / 4855	-18.5	-18.5 0.41 (1)	10.00
N-AB	0 / 0	-18.5	-18.5 0.06 (4)	10.00
AB-AC	0 / 0	-18.5	-18.5 0.08 (4)	10.00
AC-M	0 / 0	-18.5	-18.5 0.06 (4)	10.00

FACTORED CONCENTRATED LOADS (LBS)	LOC.	LC1	MAX.	FACE	DIR.	TYPE	HEEL	CONN.
JT	31-1-6	-49	-55	---	FRONT	VERT	DEAD	C1
J	31-1-6	-254	-254	---	FRONT	VERT	SNOW	C1
O	25-7-8	-2840	-2840	---	FRONT	VERT	TOTAL	C1
W	27-6-12	-110	-110	---	FRONT	VERT	TOTAL	C1
X	28-6-12	-110	-110	---	FRONT	VERT	TOTAL	C1
Y	31-6-12	-136	-136	---	FRONT	VERT	TOTAL	C1
Z	27-6-12	-26	-26	---	FRONT	VERT	TOTAL	C1
AA	29-6-12	-26	-26	---	FRONT	VERT	TOTAL	C1
AB	31-6-12	-26	-26	---	FRONT	VERT	TOTAL	C1
AC	33-6-12	-26	-26	---	FRONT	VERT	TOTAL	C1

TOTAL WEIGHT = 2 X 160 = 321 lb

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
DL = 8.0	PSF	
BOT CH.	LL = 0.0	PSF
DL = 7.4	PSF	
TOTAL LOAD = 39.0	PSF	

SPACING = 24.0 IN. O/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(65% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.28")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/832 (0.51")

CSI: TC=0.88/1.00 (I-J:1), BC=0.72/1.00 (O-Q:1),
WB=0.71/1.00 (J-O:1), SS=0.16/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 518 354 1867 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (C) (INPUT = 0.90)
JSI METAL= 0.87 (S) (INPUT = 1.00)

CONTINUED ON PAGE 2



Structural component only
DWG# T-2007146 1/2

JOB NAME 408169	TRUSS NAME T20Z	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 26 12:49:25 2020 Page 2
ID:K?TPdHg0ngl1qYdbWIOFzIdeG-AKHFWuPo9K cKTo9gXCi67DKWF2Jk9bCKqW7zNBDe

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	1.50	3.50
C	TTWW-m	MT20	7.0	8.0	1.75	2.50
D	TMVW-t	MT20	4.0	6.0		
E	TMVW-w	MT20	2.0	4.0		
F	TMVW-t	MT20	4.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMVW-w	MT20	2.0	4.0		
I	TMVW-t	MT20	4.0	6.0		
J	TTWW-m	MT20	7.0	8.0	1.75	2.50
K	TMVW-p	MT20	5.0	8.0	1.50	3.50
M	BMV1-p	MT20	3.0	6.0		
N	BMVW-t	MT20	5.0	8.0	2.50	2.00
O	BMVW-t	MT20	6.0	9.0	4.50	2.00
P	BS-t	MT20	5.0	6.0		
Q	BMVW-w-t	MT20	5.0	8.0		
R	BMVW-w-t	MT20	5.0	8.0		
S	BS-t	MT20	5.0	6.0		
T	BMVW-t	MT20	6.0	9.0	4.50	2.00
U	BMVW-t	MT20	5.0	6.0	2.50	2.00
V	BMV1-p	MT20	3.0	6.0		

CONNECTION REQUIREMENTS

- 1) CT: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2007146 42

JOB NAME 408169	TRUSS NAME T21	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:26 2020 Page 1
ID:K?TPdhgip1q1YdbWOFzideG-eWrd5G12ZTSrDU10jO2RPJgCNwdaSRJps4OSZzNBDD

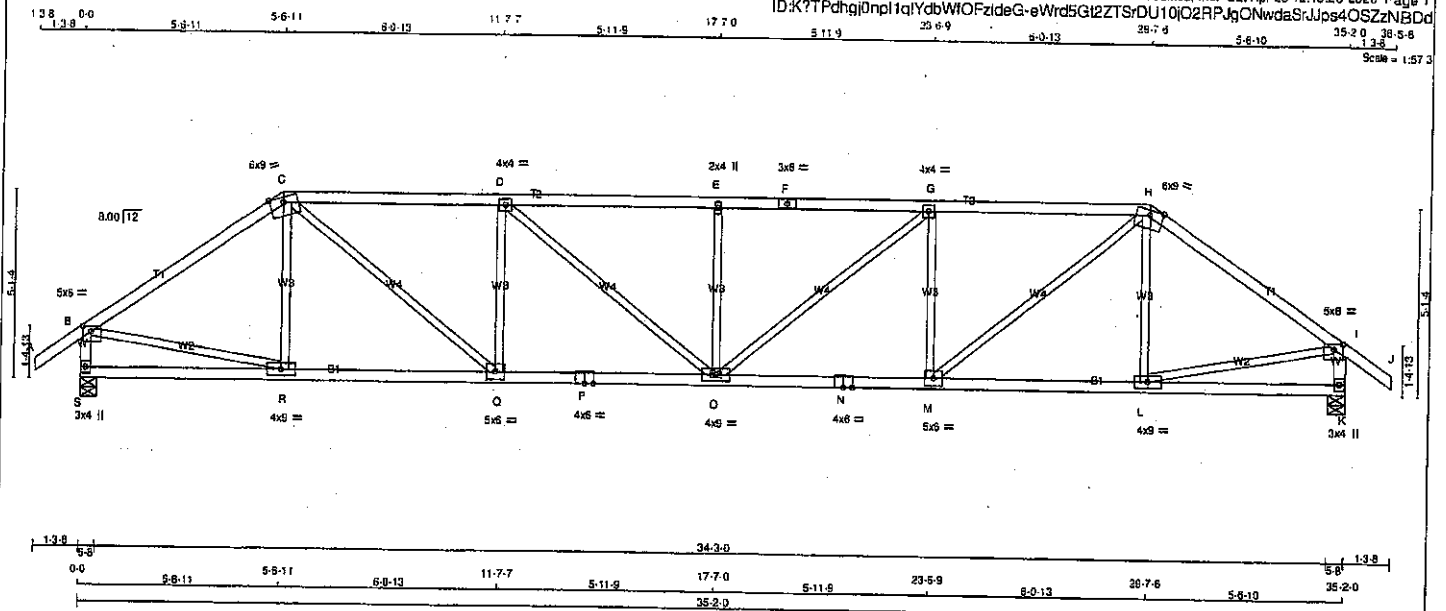

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - J	2x4	DRY	No.2
S - B	2x4	DRY	No.2
K - I	2x4	DRY	No.2
S - P	2x4	DRY	No.2
P - N	2x4	DRY	No.2
N - K	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW-p	MT20	5.0	6.0	1.75 2.75
C	TTWW-m	MT20	6.0	9.0	Edge
D	TMVW-t	MT20	4.0	4.0	
E	TMVW-w	MT20	2.0	4.0	
F	TS-t	MT20	3.0	6.0	
G	TMVW-i	MT20	4.0	4.0	
H	TTWW-m	MT20	6.0	9.0	Edge
I	TMVW-p	MT20	5.0	6.0	1.75 2.75
J	BMV1-p	MT20	3.0	4.0	
K	BMVW-t	MT20	4.0	8.0	
L	BMVW-t	MT20	5.0	8.0	
N	BS-t	MT20	4.0	6.0	
O	BMVW-w	MT20	4.0	9.0	
P	BS-t	MT20	4.0	6.0	
Q	BMVW-i	MT20	5.0	6.0	
R	BMVW-i	MT20	4.0	9.0	
S	BMV1-p	MT20	3.0	4.0	

Edges - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT		REQD	
JT	VERT	DOWN	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
S	2065	0	0	2065	0	0	5-8	5-8	5-8
K	2065	0	0	2065	0	0	5-8	5-8	5-8

UNFACTORED REACTIONS		1ST LOOSE		MAX/MIN COMPONENT REACTIONS		PERM/LIVE		WIND		DEAD		SOIL	
JT	COMBINED	SNOW	LIVE	SNOW	LIVE	SNOW	LIVE	SNOW	LIVE	SNOW	LIVE	SNOW	LIVE
S	1458	970 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0	488 / 0	0 / 0	0 / 0	0 / 0
K	1458	970 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0	488 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.97 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS	
MEMB.	FORCE (LBS)	VERT. LOAD	MAX. FACTORED (PLF)	MEMB.	FORCE (LBS)
FR-TO				FR-TO	
A-B	0 / 35	-91.8	-91.8 0.12 (1)	R-C	-243 / 10
B-C	-2297 / 0	-91.8	-91.8 0.70 (1)	C-Q	0 / 1669
C-D	-3213 / 0	-91.8	-91.8 0.80 (1)	Q-D	-929 / 0
D-E	-3594 / 0	-91.8	-91.8 0.86 (1)	D-O	0 / 489
E-F	-3594 / 0	-91.8	-91.8 0.86 (1)	O-E	-505 / 0
F-G	-3594 / 0	-91.8	-91.8 0.86 (1)	G-O	0 / 480
G-H	-3213 / 0	-91.8	-91.8 0.80 (1)	M-G	-929 / 0
H-I	-2296 / 0	-91.8	-91.8 0.70 (1)	M-H	0 / 1670
I-J	0 / 35	-91.8	-91.8 0.12 (1)	L-H	-243 / 10
S-B	-2023 / 0	0.0	0.0 0.21 (1)	B-R	0 / 1943
K-I	-2023 / 0	0.0	0.0 0.21 (1)	L-I	0 / 1943
S-R	0 / 0	-18.5	-18.5 0.15 (4)		
R-Q	0 / 1904	-18.5	-18.5 0.39 (1)		
Q-P	0 / 3213	-18.5	-18.5 0.59 (1)		
P-O	0 / 3213	-18.5	-18.5 0.59 (1)		
O-N	0 / 3213	-18.5	-18.5 0.59 (1)		
N-M	0 / 3213	-18.5	-18.5 0.59 (1)		
M-L	0 / 1903	-18.5	-18.5 0.39 (1)		
L-K	0 / 0	-18.5	-18.5 0.15 (4)		

TOTAL WEIGHT = 2 X 140 = 280 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCG 2010, NBCG 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17')
CALCULATED VERT. DEFL.(LL) = L/999 (0.21')
ALLOWABLE DEFL.(TL) = L/360 (1.17')
CALCULATED VERT. DEFL.(TL) = L/999 (0.39')

CSI: TO=0.86/1.00 (E-G:1), BC=0.58/1.00 (O-Q:1), WB=0.44/1.00 (B-R:1), SSI=0.26/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1687 788 1967 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.87 (B) (INPUT = 0.80)
JSI METAL=0.74 (P) (INPUT = 1.00)




Structural component only
DWG# T-2007147

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408169	T22	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 29 2019 Mitak Industries, Inc. Sat Apr 25 12:49:27 2020 Page 1
ID:K?TPdngj0npl1q1YdbWIOFzdeG-6jO?JbugKnairecCH5ZgyXDemJ?DB9HS2VwpX??zNBDO

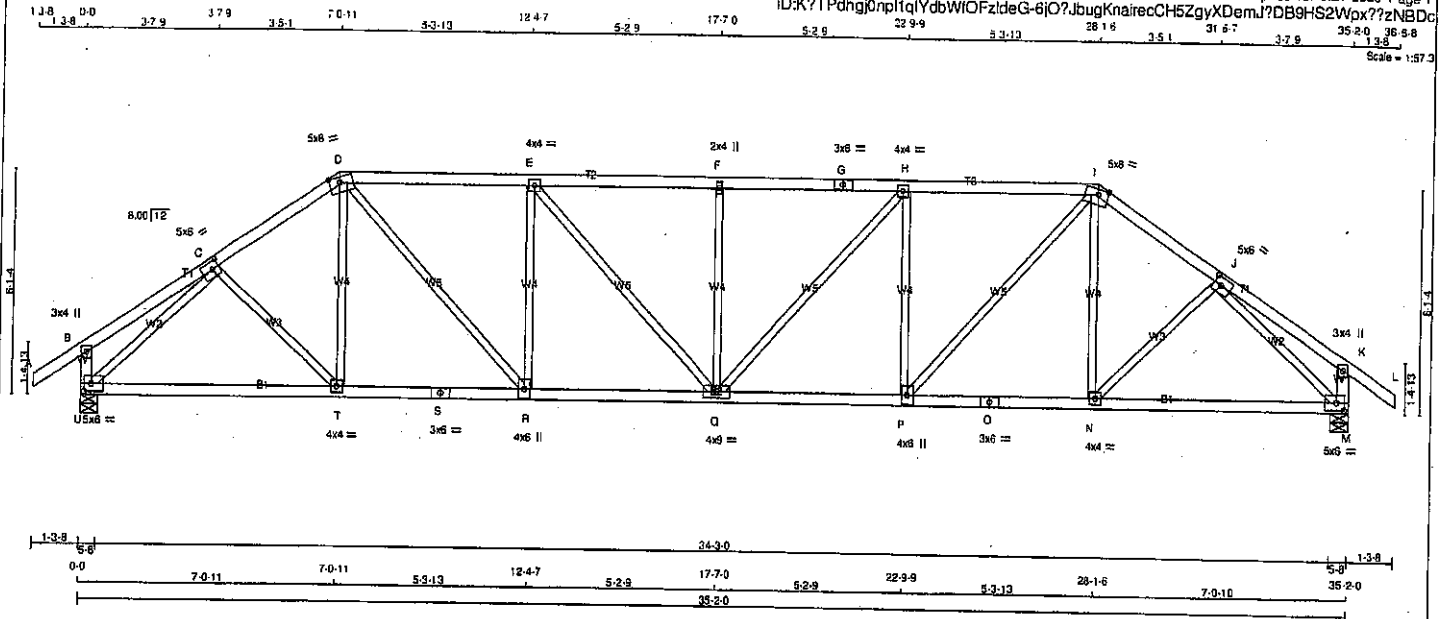

LUMBER

N.L.G.A. RULES

CHORDS	SIZE	DRY	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - G	2x4	DRY	No.2	SPF
G - I	2x4	DRY	No.2	SPF
I - L	2x4	DRY	No.2	SPF
U - B	2x4	DRY	No.2	SPF
M - K	2x4	DRY	No.2	SPF
U - S	2x4	DRY	No.2	SPF
S - O	2x4	DRY	No.2	SPF
O - M	2x4	DRY	No.2	SPF

ALL WEBS 2x3 DRY No.2 SPF
EXCEPT

DRY; SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+P	MT20	3.0	4.0		
C	TMV+H	MT20	5.0	8.0	2.50	2.50
D	TTWW-m	MT20	5.0	8.0	1.75	3.50
E	TMV+H	MT20	4.0	4.0		
F	TMV+H	MT20	2.0	4.0		
G	TS-I	MT20	4.0	4.0		
H	TMV+H	MT20	5.0	8.0	1.75	3.50
I	TTWW-m	MT20	5.0	8.0	2.50	2.50
J	TMV+H	MT20	3.0	4.0		
K	TMV+P	MT20	3.0	4.0		
M	BMVW-I	MT20	5.0	8.0	2.50	2.25
N	BMVW-I	MT20	4.0	4.0		
O	BS-I	MT20	3.0	6.0		
P	BMVW-I	MT20	4.0	6.0		
Q	BMVW-I	MT20	4.0	6.0		
R	BMVW-I	MT20	4.0	6.0		
S	BS-I	MT20	3.0	6.0		
T	BMVW-I	MT20	4.0	4.0		
U	BMVW-I	MT20	5.0	6.0	2.50	2.25

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
U	2065	0	2065	0
M	2065	0	2065	0

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
U	1458	970 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0
M	1458	970 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.53 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MAX. FACTORED VERT. LOAD (LC2)	MAX. FACTORED VERT. LOAD (LC3)	MAX. FACTORED VERT. LOAD (LC4)	MAX. FACTORED VERT. LOAD (LC5)	MAX. FACTORED VERT. LOAD (LC6)	MAX. FACTORED VERT. LOAD (LC7)	MAX. FACTORED VERT. LOAD (LC8)	MAX. FACTORED VERT. LOAD (LC9)	MAX. FACTORED VERT. LOAD (LC10)
FR-TO													
A-B	0 / 35	-91.8	-91.8	0.12 (1)	10.00	C-T	0 / 135	0.03 (4)					
B-C	0 / 18	-91.8	-91.8	0.16 (1)	10.00	T-D	0 / 90	0.03 (4)					
C-D	-2305 / 0	-91.8	-91.8	0.23 (1)	4.31	D-R	0 / 1218	0.27 (1)					
D-E	-2723 / 0	-91.8	-91.8	0.54 (1)	3.69	R-E	-814 / 0	0.48 (1)					
E-F	-2986 / 0	-91.8	-91.8	0.56 (1)	3.53	E-Q	0 / 363	0.08 (1)					
F-G	-2986 / 0	-91.8	-91.8	0.56 (1)	3.53	Q-F	-440 / 0	0.26 (1)					
G-H	-2986 / 0	-91.8	-91.8	0.56 (1)	3.53	H-Q	0 / 363	0.08 (1)					
H-I	-2723 / 0	-91.8	-91.8	0.54 (1)	3.69	P-H	-614 / 0	0.48 (1)					
I-J	-2305 / 0	-91.8	-91.8	0.23 (1)	4.31	P-I	0 / 1218	0.27 (1)					
J-K	0 / 18	-91.8	-91.8	0.16 (1)	10.00	N-I	0 / 90	0.03 (4)					
K-L	0 / 35	-91.8	-91.8	0.12 (1)	10.00	N-J	0 / 136	0.03 (4)					
U-B	-255 / 0	0.0	0.0	0.03 (1)	7.81	U-C	-2515 / 0	0.97 (1)					
M-K	-255 / 0	0.0	0.0	0.03 (1)	7.81	J-M	-2514 / 0	0.97 (1)					
U-T	0 / 1802	-18.5	-18.5	0.40 (1)	10.00								
T-S	0 / 1901	-18.5	-18.5	0.41 (1)	10.00								
S-R	0 / 1901	-18.5	-18.5	0.41 (1)	10.00								
R-Q	0 / 2724	-18.5	-18.5	0.49 (1)	10.00								
Q-P	0 / 2723	-18.5	-18.5	0.49 (1)	10.00								
P-O	0 / 1900	-18.5	-18.5	0.41 (1)	10.00								
O-N	0 / 1900	-18.5	-18.5	0.41 (1)	10.00								
N-M	0 / 1801	-18.5	-18.5	0.40 (1)	10.00								

TOTAL WEIGHT = 2 X 151 = 303 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.17)
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.16")
ALLOWABLE DEFL.(TL) = $L/360$ (1.17)
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.29")

CSI: TC=0.56/1.00 (E-F:1), 8C=0.48/1.00 (Q-R:1), WB=0.97/1.00 (C-U:1), SSI=0.23/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1687 788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (M) (INPUT = 0.90)
JSI METAL= 0.63 (C) (INPUT = 1.00)




Structural component only
DWG# T-2007148

JOB NAME 408169	TRUSS NAME T23	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitel Industries, Inc. Sat Apr 25 12:49:28 2020 Page 1

ID:K?TPdghi0npl1qlydbWfOfzdeG-5vWxv154ZToBCqp4vVknEjLmwVbHAZVXRzNBDb

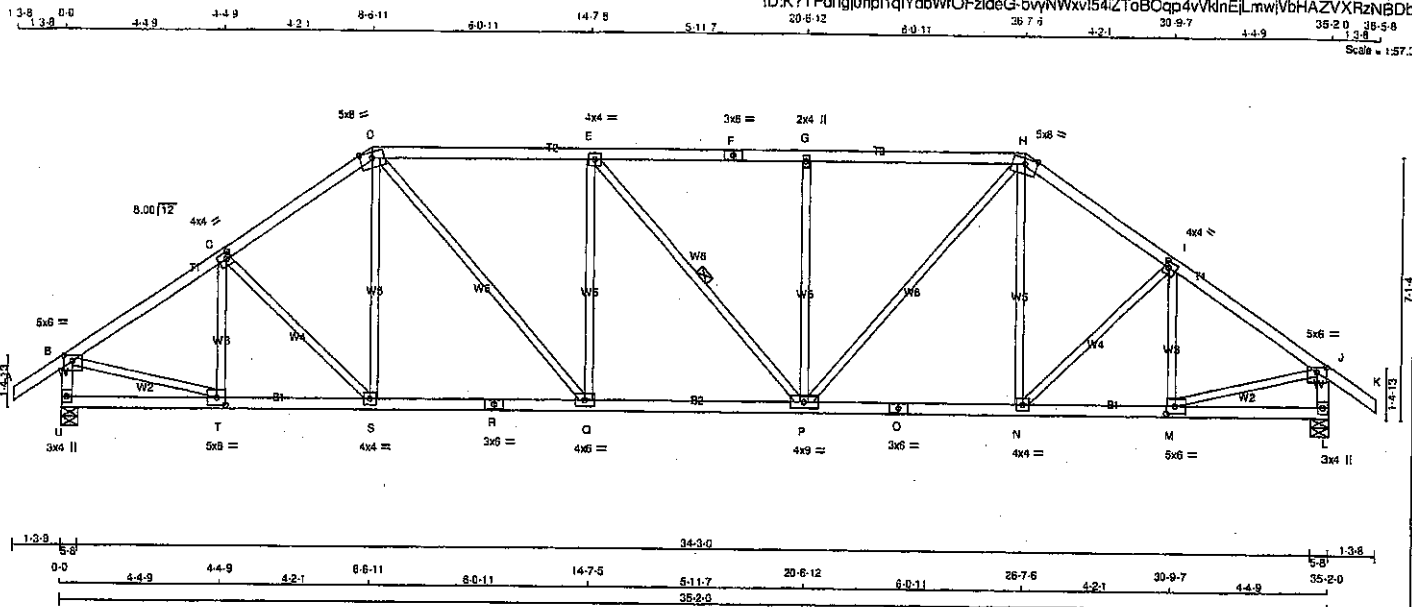

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER
A - D	2x4	DRY No.2
D - F	2x4	DRY No.2
F - H	2x4	DRY No.2
H - K	2x4	DRY No.2
U - B	2x4	DRY No.2
L - J	2x4	DRY No.2
U - R	2x4	DRY No.2
R - O	2x4	DRY No.2
O - L	2x4	DRY No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMVW-p	MT20	5.0	6.0	1.75	2.75
C TMVW-i	MT20	4.0	4.0	2.00	1.50
D TTWW-m	MT20	5.0	8.0	Edge	
E TMVW-i	MT20	4.0	4.0		
F TS-i	MT20	3.0	6.0		
G TMVW-w	MT20	2.0	4.0		
H TTWW-m	MT20	5.0	8.0	Edge	
I TMVW-i	MT20	4.0	4.0	2.00	1.50
J TMVW-p	MT20	5.0	6.0	1.75	2.75
L BMVW-i	MT20	3.0	4.0		
M BMVW-i	MT20	5.0	8.0	2.50	2.75
O BS-i	MT20	4.0	4.0		
P BMVW-i	MT20	3.0	6.0		
Q BMVW-i	MT20	4.0	6.0		
R BS-i	MT20	3.0	6.0		
S BMVW-i	MT20	4.0	4.0		
T BMVW-i	MT20	5.0	6.0	2.50	2.75
U BMVW-i	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REC'D BRG
JT VERT	2065	0	0	5-8
U HORIZ	2065	0	0	5-8
L HORIZ	2065	0	0	5-8

UNFACTORED REACTIONS

	1ST CASE	MAX / MIN	COMPONENT REACTIONS
JT COMBINED	1458	970 / 0	0 / 0
U SNOW	1458	970 / 0	0 / 0
L LIVE	1458	970 / 0	0 / 0
PERM. LIVE	1458	970 / 0	0 / 0
WIND	1458	970 / 0	0 / 0
DEAD	1458	970 / 0	0 / 0
SOIL	1458	970 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.72 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	FACTORED CS1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO					FR-TO		
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	T-C	-398 / 0	0.11 (1)
B-C	2270 / 0	-91.8	-91.8 0.37 (1)	4.19	C-S	-79 / 0	0.05 (1)
C-D	2254 / 0	-91.8	-91.8 0.38 (1)	4.21	S-D	0 / 158	0.04 (4)
D-E	2485 / 0	-91.8	-91.8 0.84 (1)	3.72	D-Q	0 / 949	0.21 (1)
E-F	2483 / 0	-91.8	-91.8 0.84 (1)	3.72	Q-E	-597 / 0	0.52 (1)
F-G	2483 / 0	-91.8	-91.8 0.84 (1)	3.72	E-P	-2 / 0	0.00 (1)
G-H	2483 / 0	-91.8	-91.8 0.83 (1)	3.74	P-G	-598 / 0	0.52 (1)
H-I	2254 / 0	-91.8	-91.8 0.38 (1)	4.21	P-H	0 / 947	0.21 (1)
I-J	2269 / 0	-91.8	-91.8 0.37 (1)	4.19	N-H	0 / 157	0.04 (4)
J-K	0 / 35	-91.8	-91.8 0.12 (1)	10.00	N-I	-78 / 0	0.05 (1)
U-B	-2027 / 0	0.0	0.0 0.21 (1)	5.94	M-I	-387 / 0	0.11 (1)
L-J	-2026 / 0	0.0	0.0 0.21 (1)	5.94	S-T	0 / 1966	0.44 (1)
					M-J	0 / 1965	0.44 (1)
U-T	0 / 0	-18.5	-18.5 0.08 (4)	10.00			
T-S	0 / 1909	-18.5	-18.5 0.37 (1)	10.00			
S-R	0 / 1854	-18.5	-18.5 0.36 (1)	10.00			
R-Q	0 / 1854	-18.5	-18.5 0.36 (1)	10.00			
Q-P	0 / 2485	-18.5	-18.5 0.47 (1)	10.00			
P-O	0 / 1854	-18.5	-18.5 0.36 (1)	10.00			
O-N	0 / 1854	-18.5	-18.5 0.36 (1)	10.00			
N-M	0 / 1908	-18.5	-18.5 0.37 (1)	10.00			
M-L	0 / 0	-18.5	-18.5 0.08 (4)	10.00			

TOTAL WEIGHT = 2 X 155 = 309 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = $L/360$ (1.17")
CALCULATED VERT. DEFL. (LL) = $L/999$ (0.12")
ALLOWABLE DEFL. (TL) = $L/360$ (1.17")
CALCULATED VERT. DEFL. (TL) = $L/989$ (0.24")

CSI: TC=0.84/1.00 (D-E:1), BC=0.47/1.00 (P-Q:1), WB=0.52/1.00 (E-Q:1), SS=0.26/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	618	354 1667 778 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.90 (D) (INPUT=0.90)
JSI METAL=0.82 (D) (INPUT=1.00)




Structural component only
DWG# T-2007149

JOB NAME 408169	TRUSS NAME T24	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 26 12:49:29 2020 Page 1

ID:K7TPdhgJ0np1qYdbWIOFzIdG-35WmkHwsOqQ4ymbOWc81yIwH7iBtWqI23uzNBDe

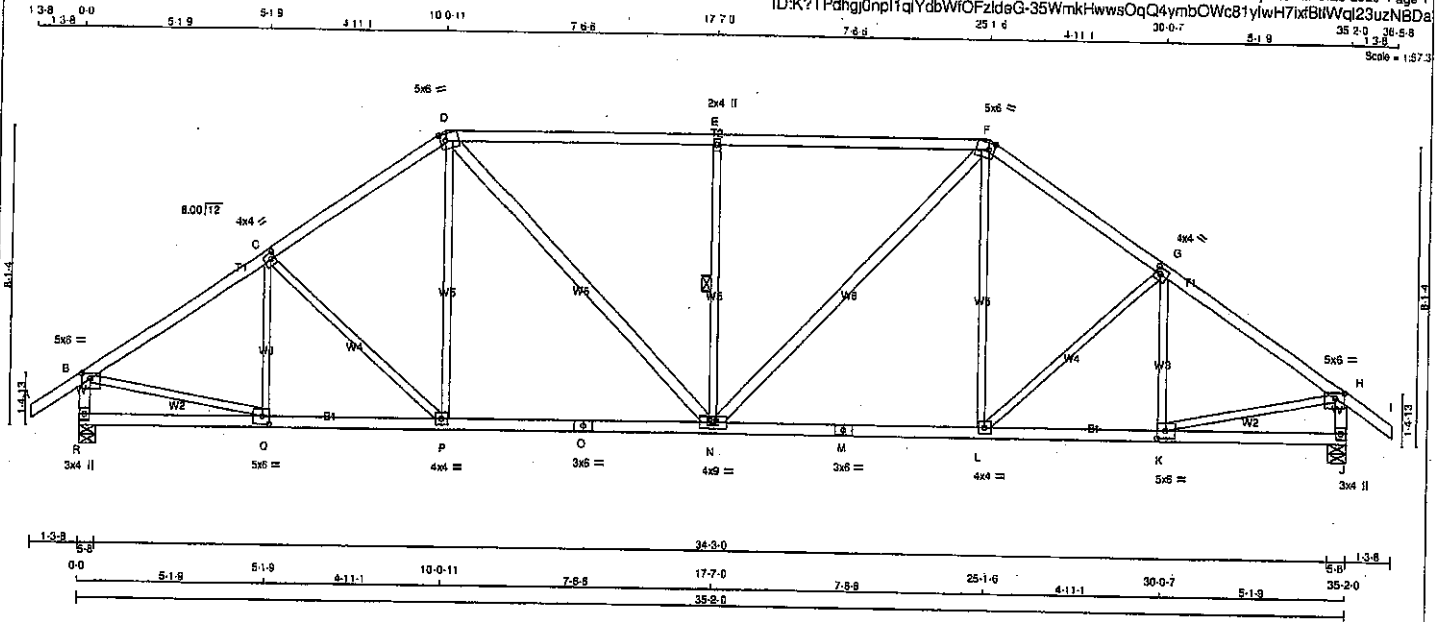

LUMBER

N.L.G.A. RULES

CHORDS	SIZE	DRY	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - I	2x4	DRY	No.2	SPF
R - B	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
R - O	2x4	DRY	No.2	SPF
O - M	2x4	DRY	No.2	SPF
M - J	2x4	DRY	No.2	SPF

ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
D - N	2x4	DRY	No.2	SPF
N - F	2x4	DRY	No.2	SPF

DRY, SEASONED LUMBER.

PLATES (tab's in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.75	2.75
C	TMVW-t	MT20	4.0	4.0	2.00	1.50
D	TTVW-m	MT20	5.0	6.0	2.25	1.75
E	TMW-w	MT20	2.0	4.0		
F	TTVW-m	MT20	5.0	6.0	2.25	1.75
G	TMVW-t	MT20	4.0	4.0	2.00	1.50
H	TMVW-p	MT20	5.0	6.0	1.75	2.75
J	BMV1+p	MT20	3.0	4.0		
K	BMVW-t	MT20	5.0	6.0	2.50	2.75
L	BMVW-t	MT20	3.0	4.0		
M	BS-t	MT20	3.0	6.0		
N	BMVW-t	MT20	4.0	4.0		
O	BS-t	MT20	3.0	6.0		
P	BMVW-t	MT20	4.0	4.0		
Q	BMVW-t	MT20	5.0	6.0	2.50	2.75
R	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	VERT	GROSS REACTION	HORZ	DOWN	HORZ	UPLIFT	BRG	IN-SX	IN-SX
R	2065	0	2065	0	0	5-8	5-8	5-8	5-8
J	2065	0	2065	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1458	970 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0
J	1458	970 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. FURLIN SPACING = 3.47 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	UNBRACED LENGTH
FR-TO				FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	Q-C	-321 / 0	0.11 (1)	10.00
B-C	-2318 / 0	-91.8	-91.8 0.38 (1)	C-P	-218 / 0	0.18 (1)	4.16
C-D	-2185 / 0	-91.8	-91.8 0.37 (1)	P-D	0 / 266	0.08 (1)	4.28
D-E	-2274 / 0	-91.8	-91.8 0.81 (1)	D-N	0 / 691	0.11 (1)	3.47
E-F	-2274 / 0	-91.8	-91.8 0.81 (1)	N-E	-851 / 0	0.35 (1)	3.47
F-G	-2185 / 0	-91.8	-91.8 0.37 (1)	N-F	0 / 691	0.11 (1)	4.28
G-H	-2317 / 0	-91.8	-91.8 0.38 (1)	L-F	0 / 266	0.08 (1)	4.16
H-I	0 / 35	-91.8	-91.8 0.12 (1)	L-G	-218 / 0	0.18 (1)	10.00
R-B	-2022 / 0	0.0	0.0 0.21 (1)	K-G	-321 / 0	0.11 (1)	5.94
J-H	-2022 / 0	0.0	0.0 0.21 (1)	B-Q	0 / 1986	0.45 (1)	5.94
R-Q	0 / 0	-18.5	-18.5 0.10 (4)	K-H	0 / 1986	0.45 (1)	10.00
Q-P	0 / 1963	-18.5	-18.5 0.40 (1)				
P-O	0 / 1794	-18.5	-18.5 0.41 (1)				
O-N	0 / 1794	-18.5	-18.5 0.41 (1)				
N-M	0 / 1794	-18.5	-18.5 0.41 (1)				
M-L	0 / 1794	-18.5	-18.5 0.41 (1)				
L-K	0 / 1953	-18.5	-18.5 0.40 (1)				
K-J	0 / 0	-18.5	-18.5 0.10 (4)				

TOTAL WEIGHT = 2 X 158 = 317 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 38.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN. LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.11")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.22")

CSI: TC=0.81/1.00 (D-E:1), SC=0.41/1.00 (N-P:1), WB=0.45/1.00 (B-Q:1), SS=0.34/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (B) (INPUT = 0.50)
JSI METAL= 0.64 (M) (INPUT = 1.00)



Structural component only
DWG# T-2007150

JOB NAME 408169	TRUSS NAME T25	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

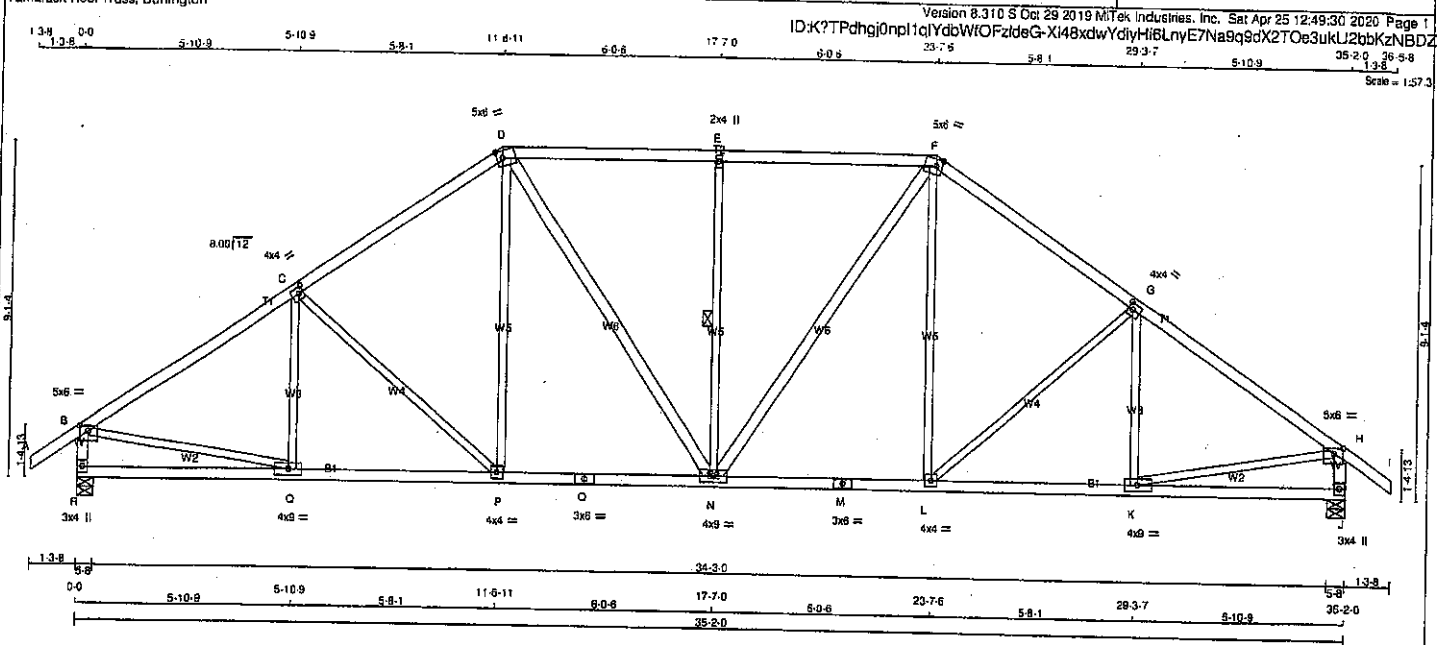

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - I	2x4	DRY	No.2
I - B	2x4	DRY	No.2
B - H	2x4	DRY	No.2
H - O	2x4	DRY	No.2
O - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2

EXCEPT

D - N 2x4 DRY No.2

N - F 2x4 DRY No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.75	2.75
C	TMVW-w	MT20	4.0	4.0	2.00	1.50
D	TMVW-m	MT20	5.0	8.0	2.25	2.00
E	TMVW-w	MT20	2.0	4.0		
F	TMVW-m	MT20	5.0	8.0	2.25	2.00
G	TMVW-w	MT20	4.0	4.0	2.00	1.50
H	TMVW-p	MT20	5.0	8.0	1.75	2.75
J	BMV1-p	MT20	3.0	4.0		
K	BMVW-w	MT20	4.0	9.0		
L	BMVW-w	MT20	4.0	4.0		
M	BS-t	MT20	3.0	6.0		
N	BMVW-w	MT20	4.0	9.0		
O	BS-t	MT20	3.0	6.0		
P	BMVW-w	MT20	4.0	4.0		
Q	BMVW-w	MT20	4.0	9.0		
R	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	RECORD BRG
	VERT	HORZ	DOWN	HORZ		
R	2065	0	2065	0	5-8	5-8
J	2065	0	2065	0	5-8	5-8

UNFACTORED REACTIONS						
JT	1ST CASE COMBINED		MAX./MIN. COMPONENT REACTIONS			
	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1458	970 / 0	0 / 0	0 / 0	488 / 0	0 / 0
J	1458	970 / 0	0 / 0	0 / 0	488 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.99 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (FT)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (FT)	MAX. FACTORED FORCE (LBS)
FR-TO				FR-TO			
A-B	0 / 35	-91.8	10.00	Q-C	-248 / 11	0.11 (1)	
B-C	-2347 / 0	-91.8	3.99	C-P	-356 / 0	0.42 (1)	
C-D	-2098 / 0	-91.8	4.22	P-D	0 / 342	0.08 (1)	
D-E	-1985 / 0	-91.8	4.26	D-N	0 / 477	0.08 (1)	
E-F	-1985 / 0	-91.8	4.26	N-E	-677 / 0	0.37 (1)	
F-G	-2098 / 0	-91.8	4.22	N-F	0 / 477	0.08 (1)	
G-H	-2346 / 0	-91.8	3.99	L-F	0 / 341	0.08 (1)	
H-I	0 / 35	-91.8	10.00	L-G	-356 / 0	0.42 (1)	
R-B	-2018 / 0	0.0	5.94	K-G	-249 / 11	0.11 (1)	
J-H	-2018 / 0	0.0	5.84	B-Q	0 / 2014	0.45 (1)	
R-Q	0 / 0	-18.5	10.00	K-H	0 / 2014	0.45 (1)	
Q-P	0 / 1981	-18.5	10.00				
P-O	0 / 1716	-18.5	10.00				
O-N	0 / 1716	-18.5	10.00				
N-M	0 / 1716	-18.5	10.00				
M-L	0 / 1716	-18.5	10.00				
L-K	0 / 1980	-18.5	10.00				
K-J	0 / 0	-18.5	10.00				

TOTAL WEIGHT = 2 X 165 = 329 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2018
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA C86-09, CSA C86-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.52/1.00 (B-C-1), BC=0.39/1.00 (P-Q-1), WB=0.45/1.00 (B-Q-1), SS=0.27/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PL) (PL)
MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (B) (INPUT = 0.90)
JSI METAL = 0.56 (M) (INPUT = 1.00)




Structural component only
DWG# T-2007151

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408169	T26	5	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:32 2020 Page 1
ID:K7TPdhgi0npl1qlydbWIOFzdeG-TgCuMjyo8JC?yPVA3e9fawTUKJtsYXBCoXigDzNBOX

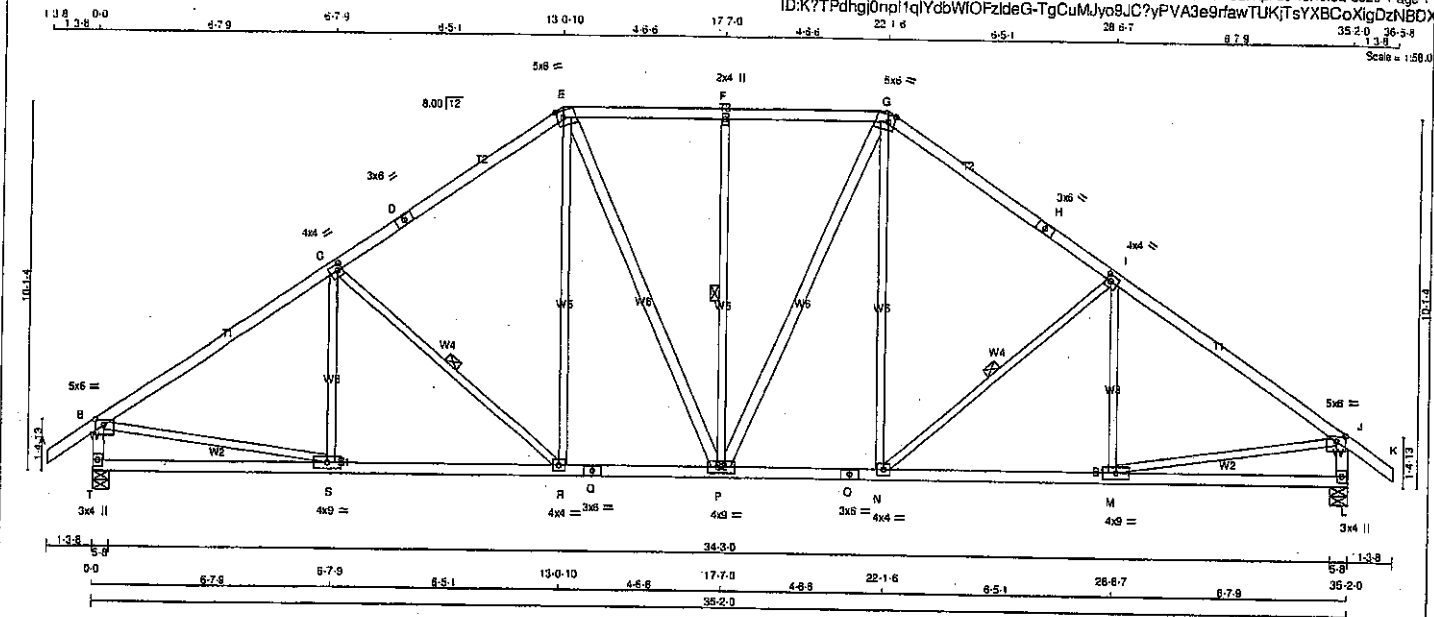


JOB NAME 408169	TRUSS NAME T28	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 9.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:49:34 2020 Page 2
ID:K?TPdthgI0npl1qYdbWIOFzIdeG-P3Jfn? 3gwSIBIfYB3BJk??uz8RBKVIUf60pl5zNBDV


PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-i	MT20	5.0	5.0	2.50	1.75
C	TTWW+m	MT20	5.0	6.0	2.00	1.50
D	TMWW-i	MT20	4.0	4.0		
E	TMW+w	MT20	2.0	4.0		
F	TTWW-m	MT20	5.0	6.0	2.00	1.50
G	TMVW+p	MT20	5.0	6.0	Edge	
H	BMV1+p	MT20	3.0	6.0		
I, L, M						
I	BMWW-i	MT20	5.0	6.0		
J	BMWWW-i	MT20	5.0	6.0		
K	BS-i	MT20	5.0	6.0		
N	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.



Structural component only
DWG# T-2007154 *WV*

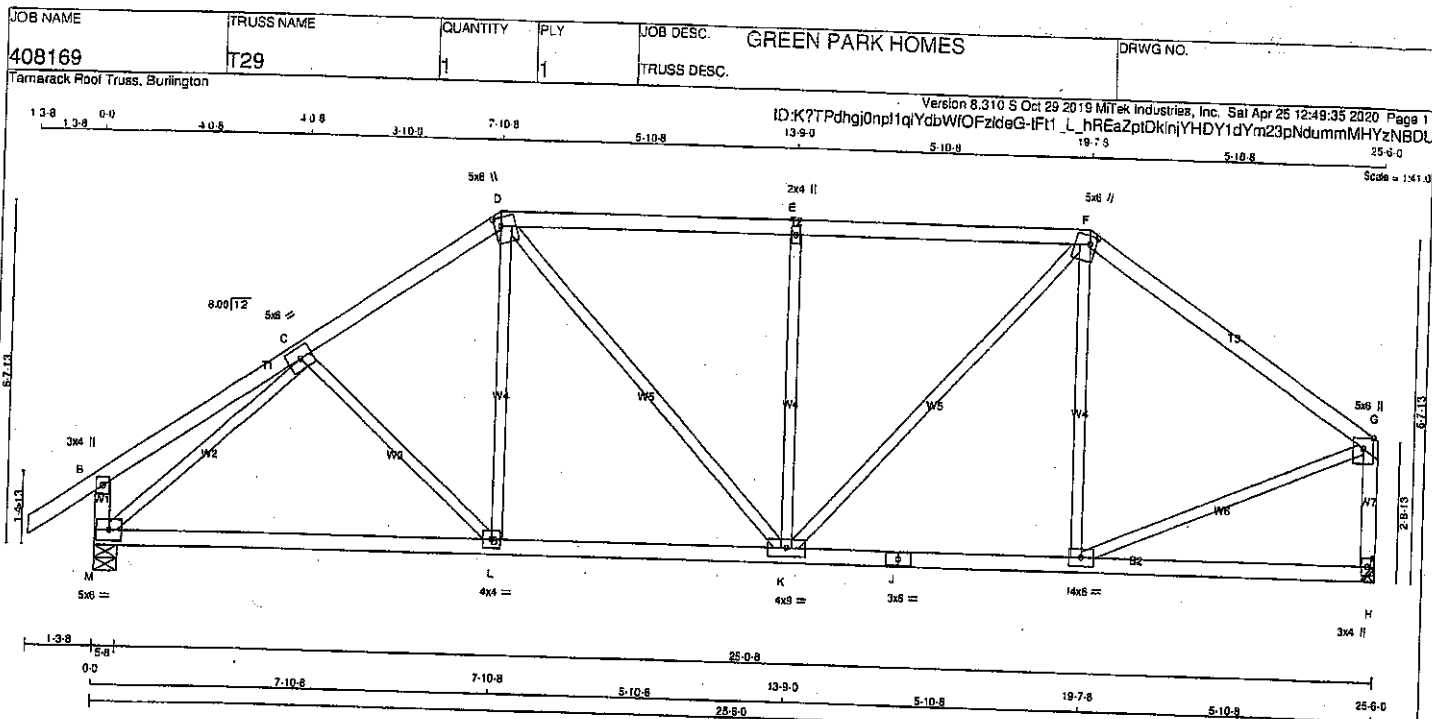

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER
A - D	2x4	DRY No.2
D - F	2x4	DRY No.2
F - G	2x4	DRY No.2
M - B	2x4	DRY No.2
H - G	2x4	DRY No.2
M - J	2x4	DRY No.2
J - H	2x4	DRY No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMV+p	MT20	3.0	4.0		
C TMWW-t	MT20	5.0	8.0		
D TTWW+m	MT20	5.0	6.0	2.00	1.50
E TMW+w	MT20	2.0	4.0		
F TTWW+m	MT20	5.0	6.0	2.00	1.50
G TMVW+p	MT20	5.0	8.0		Edge
H BMV+p	MT20	3.0	4.0		
I BMWW-t	MT20	4.0	8.0		
J BS-t	MT20	3.0	8.0		
K BMWWW-t	MT20	4.0	9.0		
L BMWW-t	MT20	4.0	4.0		
M BMVW-t	MT20	5.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT VERT	1532	0	5-8	5-8
M	1406	0	5-8	5-8
H	1406	0	5-8	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS

1ST CASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	1081	728 / 0	0 / 0	0 / 0	0 / 0	358 / 0	0 / 0
M	994	652 / 0	0 / 0	0 / 0	0 / 0	342 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.89 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)
FR-TO				FR-TO			
A-B	0 / 35	-91.8	-91.8	C-L	-80 / 27	0.04	(1)
B-C	0 / 22	-91.8	-91.8	L-D	0 / 209	0.05	(4)
C-D	-1491 / 0	-91.8	-91.8	D-K	0 / 354	0.08	(1)
D-E	-1484 / 0	-91.8	-91.8	K-E	-662 / 0	0.48	(1)
E-F	-1464 / 0	-91.8	-91.8	K-F	0 / 663	0.15	(1)
F-G	-1226 / 0	-91.8	-91.8	I-F	-282 / 0	0.21	(1)
M-B	-266 / 0	0.0	0.0	M-C	-1757 / 0	0.83	(1)
H-G	-1362 / 0	0.0	0.0	I-G	0 / 1098	0.25	(1)
M-L	0 / 1279	-18.5	-18.5				
L-K	0 / 1223	-18.5	-18.5				
K-J	0 / 1014	-18.5	-18.5				
J-I	0 / 1014	-18.5	-18.5				
I-H	0 / 0	-18.5	-18.5				

TOTAL WEIGHT = 109 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
D.L.	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
D.L.	= 7.4 PSF
TOTAL LOAD	= 35.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2015 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.85")
CALCULATED VERT. DEFL.(LL) = L/999 (0.05")
ALLOWABLE DEFL.(TL) = L/360 (0.85")
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CS: TC=0.44/1.00 (F-G:1), BC=0.36/1.00 (K-L:4), WB=0.83/1.00 (G-M:1), SS=0.26/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 798

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.82 (D) (INPUT = 0.90)
JSI METAL= 0.51 (G) (INPUT = 1.00)




Structural component only
DWG# T-2007155

JOB NAME 408169	TRUSS NAME T30	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Sat Apr 25 12:49:35 2020 Page 1
ID:K?7PdHgJOnp1qYdbWfOfzdeG-MSRPCg?JCYlQQ1oxIUEnpQ4FSy9zoKVn7QVwp_zNBDT

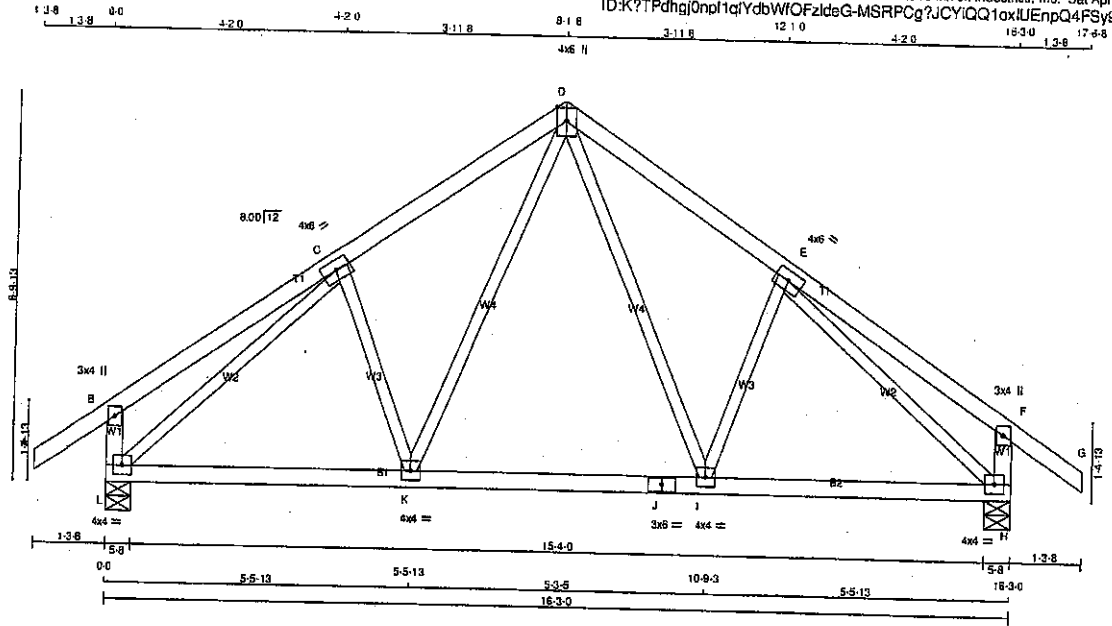

Scale = 1/32" = 1'-0"

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
L - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
L - J	2x4	DRY	No.2
J - H	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-t	MT20	4.0	6.0		
D	TTWW+p	MT20	4.0	6.0	Edge	
E	TMWW-t	MT20	4.0	6.0		
F	TMV+p	MT20	3.0	4.0		
H	BMVW1-t	MT20	4.0	4.0		
I	BMVW-t	MT20	4.0	4.0		
J	BS-t	MT20	3.0	6.0		
K	BMVW-t	MT20	4.0	4.0		
L	BMVW1-t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
L	1022	0	1022	0	0	5-8	5-8
H	1022	0	1022	0	0	5-8	5-8

UNFACTORED REACTIONS

JT	COMBINED	1ST LOSE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
L	720	485 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0
H	720	485 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. FURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)
FR-TO				FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	D-I	0 / 336	0.08 (1)	0.08 (1)
B-C	0 / 24	-91.8	-91.8 0.24 (1)	I-E	-217 / 0	0.08 (1)	0.08 (1)
C-D	-845 / 0	-91.8	-91.8 0.19 (1)	K-D	0 / 336	0.08 (1)	0.08 (1)
D-E	-845 / 0	-91.8	-91.8 0.19 (1)	C-K	-217 / 0	0.08 (1)	0.08 (1)
E-F	0 / 24	-91.8	-91.8 0.24 (1)	L-C	-1042 / 0	0.52 (1)	0.52 (1)
F-G	0 / 35	-91.8	-91.8 0.12 (1)	E-H	-1042 / 0	0.52 (1)	0.52 (1)
L-B	-268 / 0	0.0	0.0 0.03 (1)				
H-F	-268 / 0	0.0	0.0 0.03 (1)				
L-K	0 / 762	-18.5	-18.5 0.19 (1)				
K-J	0 / 557	-18.5	-18.5 0.17 (4)				
J-I	0 / 557	-18.5	-18.5 0.17 (4)				
I-H	0 / 762	-18.5	-18.5 0.19 (1)				

TOTAL WEIGHT = 2 X 72 = 145 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 085-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.02")
ALLOWABLE DEFL.(TL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.04")

CSI: TC=0.24/1.00 (B-C:1), BC=0.19/1.00 (H-I:1),
WB=0.52/1.00 (C-L:1), SS=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX	MIN	MAX MIN
MT20	618	354
	1667	788
	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (H) (INPUT = 0.90)
JSI METAL= 0.29 (L) (INPUT = 1.00)




Structural component only
DWG# T-2007156

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408169	T30A	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Sat Apr 25 12:49:37 2020 Page 1

ID:K?TPdngj0nph1qYdbWIOFz/deG-qe?nPO0xzrqH2AN7sC10MedQCLVGXo_wL4FTLOzNBDS

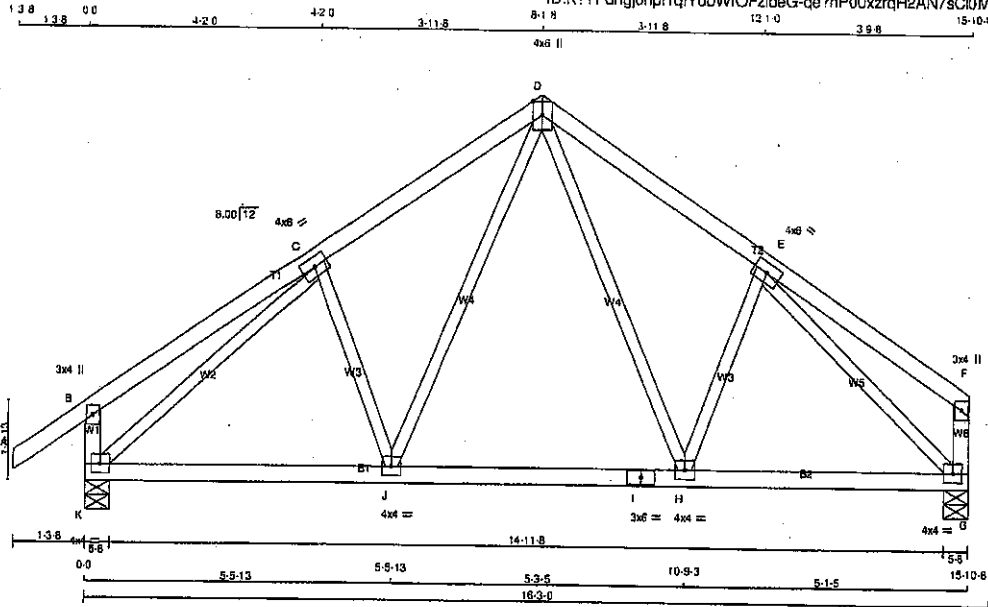

Scale = 1/32"

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
K - B	2x4	DRY	No.2	SPF	
G - F	2x4	DRY	No.2	SPF	
K - I	2x4	DRY	No.2	SPF	
I - G	2x4	DRY	No.2	SPF	

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMV-p	MT20	3.0	4.0		
C	TMVW-1	MT20	4.0	6.0		
D	TMVW-1	MT20	4.0	6.0	Edge	
E	TMVW-1	MT20	4.0	6.0		
F	TMV-p	MT20	3.0	4.0		
G	BMVW-1	MT20	4.0	4.0		
H	BMVW-1	MT20	4.0	4.0		
I	BS-1	MT20	3.0	6.0		
J	BMVW-1	MT20	4.0	4.0		
K	BMVW-1	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

BUILDING DESIGNER

BEARINGS

	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	UPLIFT
K	1001	0	1001	0
G	875	0	875	0

UNFACTORED REACTIONS

1ST LCASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT							
K	706	478 / 0	0 / 0	0 / 0	0 / 0	229 / 0	0 / 0
G	619	408 / 0	0 / 0	0 / 0	0 / 0	213 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC)	
FR-TO		FROM TO	MAX. UNBRAC LENGTH	FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	D-H	0 / 272	0.06 (1)	
B-C	0 / 24	-91.8	-91.8 0.24 (1)	H-E	-160 / 2	0.05 (1)	
C-D	-617 / 0	-91.8	-91.8 0.19 (1)	J-D	0 / 342	0.08 (1)	
D-E	-783 / 0	-91.8	-91.8 0.18 (1)	C-J	-222 / 0	0.06 (1)	
E-F	0 / 24	-91.8	-91.8 0.22 (1)	K-C	-1912 / 0	0.51 (1)	
K-B	-288 / 0	0.0	0.0 0.03 (1)	E-G	-992 / 0	0.44 (1)	
G-F	-124 / 0	0.0	0.0 0.01 (1)				
K-J	0 / 740	-18.5	-18.5 0.18 (1)				
J-I	0 / 531	-18.5	-18.5 0.17 (4)				
I-H	0 / 531	-18.5	-18.5 0.17 (4)				
H-G	0 / 691	-18.5	-18.5 0.17 (1)				

TOTAL WEIGHT = 2 X 70 = 140 LB

[M/F]

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	38.0	PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(65 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.53")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.53")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.24/1.00 (B-C:1), BC=0.18/1.00 (J-K:1), WB=0.51/1.00 (C-K:1), SSI=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 768 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (K) (INPUT = 0.90)
JSI METAL= 0.26 (K) (INPUT = 1.00)




Structural component only
DWG# T-2007157

Structural component only
DWG# T-2007158

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408169	T31S	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:39 2020 Page 1
ID:K7TPdhgJ0np1qYdbWIOFzIdG-m17Yq1BVT47HUXW_dnUR3inH9Cs?pxDpOkaQJzNBDDC

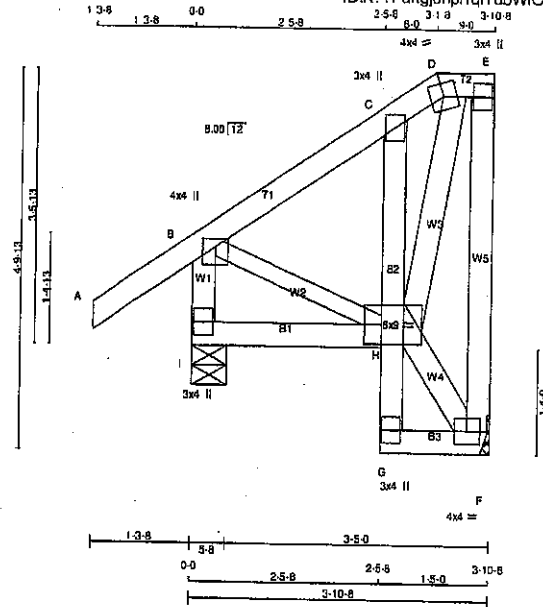

Scale = 1/26.6

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER
A - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - B	2x4	DRY	No.2
I - H	2x4	DRY	No.2
G - C	2x4	DRY	No.2
G - F	2x4	DRY	No.2

ALL WEBS	2x4	DRY	No.2
EXCEPT			
B - H	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.25	2.00
C	TMV+p	MT20	3.0	4.0		
D	TTW-m	MT20	4.0	4.0		
E	TMV+p	MT20	3.0	4.0		
F	BMVW1-t	MT20	4.0	4.0		
G	BMV+p	MT20	3.0	4.0		
H	BMVWWH	MT20	6.0	9.0	3.00	2.75
I	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	RECORD BRG
	VERT	HORZ	DOWN	HORZ		
F	193	0	193	0	MECHANICAL	5-8
I	361	0	361	0	5-8	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE MAX/MIN. COMPONENT REACTIONS						
	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	196	88 / 0	0 / 0	0 / 0	0 / 0	49 / 0	0 / 0
I	252	161 / 0	0 / 0	0 / 0	0 / 0	72 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) !

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 / 35	-91.8	-91.8	0.14 (5)	10.00	H-F	-27 / 0
B-C	-87 / 0	-91.8	-91.8	0.08 (1)	6.25	H-G	0 / 68
C-D	-99 / 0	-91.8	-91.8	0.07 (1)	6.25	H-D	0 / 173
D-E	-11 / 0	-91.8	-91.8	0.07 (1)	6.25		0.03 (1)
F-E	-148 / 0	0.0	0.0	0.04 (1)	7.81		
I-B	-327 / 0	0.0	0.0	0.02 (4)	7.81		
I-H	0 / 8	-18.5	-18.5	0.03 (4)	10.00		
G-H	-2 / 8	0.0	0.0	0.05 (1)	10.00		
H-C	-203 / 0	0.0	0.0	0.04 (1)	7.81		
G-F	0 / 30	-18.5	-18.5	0.03 (1)	10.00		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 29 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.19")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.00")
ALLOWABLE DEFL.(TL) = $L/360$ (0.19")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.01")

CSI: TC=0.14/1.00 (A-B-5), SC=0.05/1.00 (G-H-1), WB=0.03/1.00 (D-H-1), SS=0.12/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP (DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 788

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.23 (B) (INPUT = 0.90)
JSI METAL = 0.07 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007159

JOB NAME 408169	TRUSS NAME T32S	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	--------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:40 2020 Page 1
ID:K7TPdHgJ0np1qYdbWfOFzldG-EDhw122qGmCsve6XKlI_GPy1ZYDkG4M22T7ylzNBDF

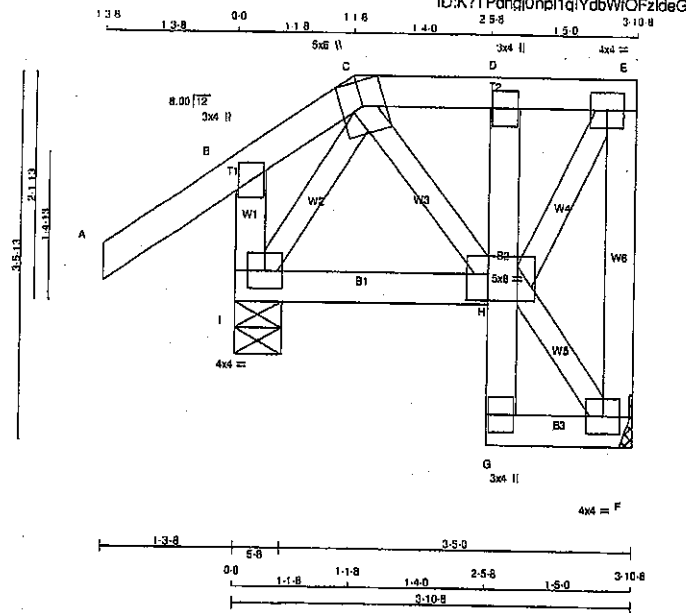

Scale = 1/20,1

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - S	2x4	DRY	No.2
I - H	2x4	DRY	No.2
G - D	2x4	DRY	No.2
G - F	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMV+p	MT20	3.0	4.0		
C TTWW+m	MT20	5.0	6.0	Edge	
D TMV+p	MT20	3.0	4.0		
E TMVW-i	MT20	4.0	4.0		
F BMVW-i	MT20	4.0	4.0		
G BMV+p	MT20	3.0	4.0		
H BMVWW-i	MT20	5.0	8.0	3.00	2.50
I BMVW-i	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	DOWN	IN-SX	IN-SX
F	191	0	0	MECHANICAL
I	362	0	0	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	136	87 / -12	0 / 0	0 / 0	0 / 0	0 / 0	49 / 0	0 / 0
I	253	182 / 0	0 / 0	0 / 0	0 / 0	0 / 0	71 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 8.25 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 35	-91.8	-91.8 0.14 (5)	10.00	C-H	0 / 60	0.01 (1)
B-C	-41 / 0	-91.8	-91.8 0.13 (5)	6.25	H-F	-7 / 0	0.00 (1)
C-D	-59 / 0	-91.8	-91.8 0.02 (1)	6.25	F-E	0 / 153	0.03 (1)
D-E	-59 / 0	-91.8	-91.8 0.02 (1)	6.25	E-C	-100 / 34	0.02 (1)
F-E	-175 / 0	0.0	0.0 0.03 (1)	7.81			
E-B	-253 / 0	0.0	0.0 0.03 (1)	7.81			
I-H	-18 / 53	-18.5	-18.5 0.04 (4)	8.25			
G-H	0 / 13	0.0	0.0 0.01 (1)	10.00			
H-D	-142 / 0	0.0	0.0 0.01 (1)	7.81			
G-F	0 / 5	-18.5	-18.5 0.01 (4)	10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 25 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 6.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2015
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.19")
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")
ALLOWABLE DEFL. (TL) = L/360 (0.19")
CALCULATED VERT. DEFL. (TL) = L/999 (0.00")

CS: TC=0.14/1.00 (A-B-5), BC=0.04/1.00 (H-I-4), WB=0.03/1.00 (E-H-1), SS=0.09/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MT20	MAX MIN	MAX MIN	MAX MIN
	618 354	1667 788	1987 1658

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.18 (E) (INPUT = 0.90)
JSI METAL = 0.09 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007160

JOB NAME 408169	TRUSS NAME T33	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRAWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	-------------	-----------

Tamarack Roof Truss, Burlington

Version 9.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:41 2020 Page 1
ID:K7TPdhgJ0npl1qYdbWfOFzIdeG-iPFIFC3S14LjXohu51pyWUo8MznVTaTWGiDhUBzNBDO

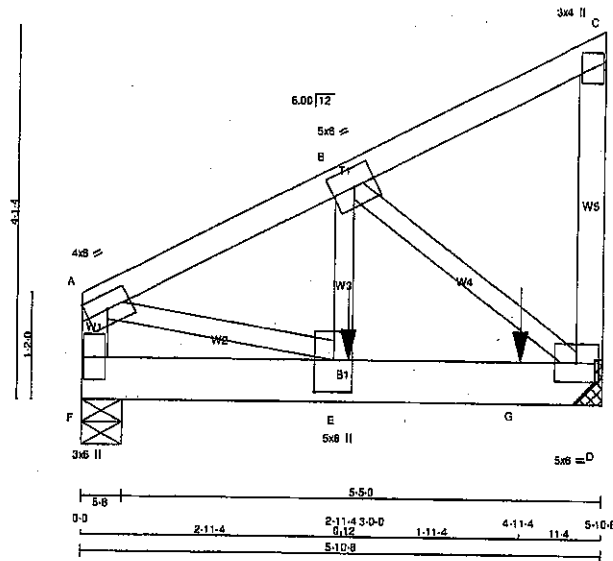

Scale = 1/2" = 1'-0"

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
F - A	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
D - C	2x4	DRY	No.2	SPF	
F - D	2x6	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
F-A 1	12	TOP
A-C 1	12	TOP
C-D 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F-D 2	9	SIDE(305.2)
WEBS : (0.122"x3") SPIRAL NAILS		
B-E 1	2	SIDE(408.9)
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
A TMVW-1	MT20	4.0	6.0		Edge
B TMVW-1	MT20	5.0	6.0		
C TMVW-1	MT20	3.0	4.0		
D BMVW-1	MT20	5.0	6.0		
E BMVW-1	MT20	5.0	8.0	4.25	2.50

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	DOWN	HORIZ	UPLIFT
F	1914	0	1914	0
D	2859	0	2859	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 4'-0".

UNFACTORED REACTIONS
1ST LOASE MAX/MIN. COMPONENT REACTIONS

JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	1348	915 / 0	0 / 0	0 / 0	0 / 0	434 / 0	0 / 0
D	2015	1359 / 0	0 / 0	0 / 0	0 / 0	657 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.59 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX	MAX. UNBRACED LENGTH	CS1 (LC)	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	CS1 (LC)
FR-TO							FR-TO			
F-A	-1877 / 0	0.0	0.0	0.10 (1)	7.81		A-E	0 / 2360	0.29 (1)	
A-B	-2568 / 0	-91.8	-91.8	0.08 (1)	5.59		E-B	0 / 2608	0.32 (1)	
B-C	-7 / 0	-91.8	-91.8	0.08 (1)	10.00		B-D	-2898 / 0	0.35 (1)	
D-C	-120 / 0	0.0	0.0	0.01 (1)	7.81					
F-E	0 / 0	-18.5	-18.5	0.01 (1)	10.00					
E-G	0 / 2301	-18.5	-18.5	0.49 (1)	10.00					
G-D	0 / 2301	-18.5	-18.5	0.49 (1)	10.00					

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	3-0-0	-2737	-2737		BACK	VERT	TOTAL		C1
G	4-11-4	-1388	-1388		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 29 = 58 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	DL	=	25.6	PSF
	LL	=	8.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.10/1.00 (A-F:1), BC=0.49/1.00 (D-E:1), WB=0.35/1.00 (B-D:1), SS=0.32/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES


PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)	MAX MIN	MAX MIN
MT20	618	354	1667	788
			1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.84 (B) (INPUT = 0.80)
JSI METAL = 0.44 (E) (INPUT = 1.00)

CONTINUED ON PAGE 2



Structural component only
DWG# T-2007161 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408169	T33	1	2	GREEN PARK HOMES	


Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:48:41 2020 Page 2
ID:K7TPdhi0npl1qlYdbWfOFzIdeG-iPFIF03S14LiXohuS1pyWU5BMznVTaTWGiDhUBzNBDO

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
F	BMV1+p	MT20	3.0	6.0	

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.




Structural component only
DWG# T-2007161 22

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T40	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:15 2020 Page 1
ID:K7TPdghj0npl1qlydbWfOfzideG-dToLVCBPTKkK_gKpGOLN4U0ubv6N8dVf?sayUzNB1c
Scale = 1:37.5

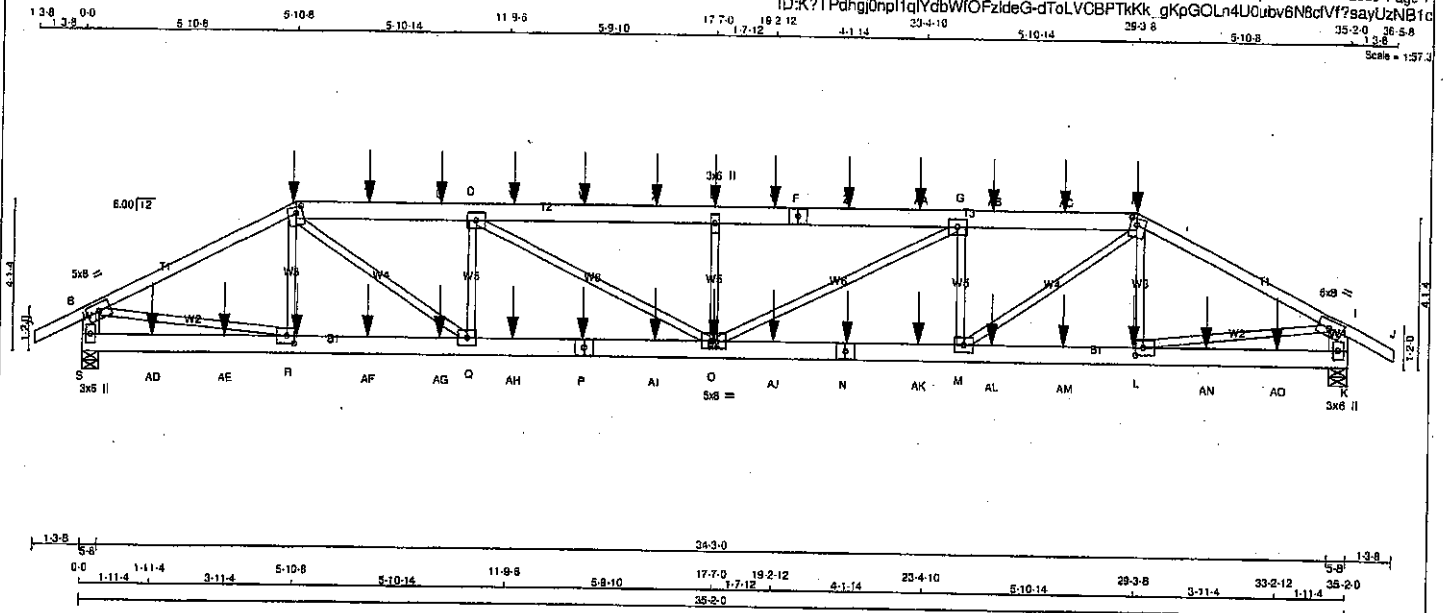

LUMBER	CHORDS	SIZE	LUMBER	DESCR.
N. L. G. A. RULES				
A - C	2x4	DRY	No.2	SPF
C - F	2x6	DRY	No.2	SPF
F - H	2x6	DRY	No.2	SPF
H - J	2x4	DRY	No.2	SPF
S - B	2x6	DRY	No.2	SPF
K - I	2x6	DRY	No.2	SPF
S - P	2x6	DRY	No.2	SPF
P - N	2x6	DRY	No.2	SPF
N - K	2x6	DRY	No.2	SPF

ALL WEBS 2x3 DRY No.2
EXCEPT
SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C 1	12	SIDE(81.0)
H - J 1	12	SIDE(81.0)
C - F 2	12	SIDE(81.0)
F - H 2	12	SIDE(81.0)
S - B 2	12	TOP
K - I 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
S - P 2	12	SIDE(183.1)
P - N 2	12	SIDE(183.1)
N - K 2	12	SIDE(183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	RECORD
JT	VERT	HORZ	DOWN	HORZ
S	3331	0	3331	0
K	3331	0	3331	0

UNFACTORED REACTIONS	1ST CASE	MAX. MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW
S	2356	1544 / 0
K	2356	1544 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.87 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CS (LC)	UNBRACED LENGTH	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CS (LC)
FR-TO						R-C			
A-B	0 / 28	-81.8	-81.8	0.07 (1)	10.00	Q-C	-449 / 0	0.06 (1)	
B-C	-5069 / 0	-81.8	-81.8	0.52 (1)	3.87	Q-D	0 / 3021	0.37 (1)	
C-T	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35	Q-E	-1608 / 0	0.19 (1)	
T-U	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35	D-O	0 / 1339	0.17 (1)	
U-D	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35	O-E	-1056 / 0	0.13 (1)	
D-V	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02	O-G	0 / 1339	0.17 (1)	
V-W	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02	M-H	0 / 3021	0.37 (1)	
W-X	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02	L-H	-449 / 0	0.08 (1)	
X-E	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02	B-R	0 / 4585	0.57 (1)	
E-Y	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02	L-I	0 / 4585	0.57 (1)	
Y-F	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02				
F-Z	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02				
Z-AA	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02				
AA-G	-8155 / 0	-81.8	-81.8	0.31 (1)	4.02				
G-AB	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35				
AB-AC	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35				
AC-H	-6976 / 0	-81.8	-81.8	0.24 (1)	4.35				
H-I	-5069 / 0	-81.8	-81.8	0.52 (1)	3.87				
I-J	0 / 28	-81.8	-81.8	0.07 (1)	10.00				
S-B	-3250 / 0	0.0	0.0	0.11 (1)	7.69				
K-I	-3250 / 0	0.0	0.0	0.11 (1)	7.69				

S-AD	0 / 0	-18.5	-18.5	0.07 (4)	10.00
AD-AE	0 / 0	-18.5	-18.5	0.07 (4)	10.00
AE-R	0 / 0	-18.5	-18.5	0.07 (4)	10.00
R-AF	0 / 4557	-18.5	-18.5	0.33 (1)	10.00
AF-AG	0 / 4557	-18.5	-18.5	0.33 (1)	10.00
AG-Q	0 / 4557	-18.5	-18.5	0.33 (1)	10.00
Q-AH	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
AH-P	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
P-AI	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
AI-O	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
O-AJ	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
AJ-N	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
N-AK	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
AK-M	0 / 6975	-18.5	-18.5	0.52 (1)	10.00
M-AL	0 / 4357	-18.5	-18.5	0.33 (1)	10.00
AL-AM	0 / 4357	-18.5	-18.5	0.33 (1)	10.00
AM-L	0 / 4557	-18.5	-18.5	0.33 (1)	10.00
L-AN	0 / 0	-18.5	-18.5	0.07 (4)	10.00
AN-AO	0 / 0	-18.5	-18.5	0.07 (4)	10.00
AO-K	0 / 0	-18.5	-18.5	0.07 (4)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. O.C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.21")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.36")

CSI: TC=0.52/1.00 (B-C:1), BC=0.52/1.00 (D-O:1), WB=0.57/1.00 (B-R:1), SSI=0.16/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (H) (INPUT = 0.90)
JSI METAL= 0.67 (P) (INPUT = 1.00)



Structural component only
DWG# T-2007168 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T40	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:15 2020 Page 2
ID:K?TPdhq0np1tqYcbWIOFz/deG-dToLVCBPTkKk gKpGOLn4U0ubv6N8cfVf?eayUzNB1c

PLATES (table is in inches)


JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-1	MT20	5.0	8.0		
C	TTWW-m	MT20	5.0	8.0	2.00	2.25
D	TMWV-1	MT20	5.0	8.0		
E	TMW-w	MT20	3.0	6.0		
F	TS-1	MT20	5.0	6.0		
G	TMWV-1	MT20	5.0	8.0		
H	TTWW-m	MT20	5.0	8.0	2.00	2.25
I	TMW-1	MT20	5.0	8.0		
K	BMV1-p	MT20	3.0	6.0		
L	BMWV-1	MT20	5.0	8.0	2.50	2.50
M	BMWV-1	MT20	5.0	8.0		
N	BS-1	MT20	6.0	6.0		
O	BMWV-1	MT20	5.0	8.0		
P	BS-1	MT20	5.0	6.0		
Q	BMWV-1	MT20	5.0	8.0		
R	BMWV-1	MT20	5.0	8.0	2.50	2.50
S	BMV1-p	MT20	3.0	6.0		

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	5-10-8	-437	-437	---	FRONT	VERT	TOTAL	---	C1
E	17-7-0	-110	-110	---	FRONT	VERT	TOTAL	---	C1
H	29-3-8	-437	-437	---	FRONT	VERT	TOTAL	---	C1
L	29-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
N	21-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
O	17-7-0	-26	-26	---	FRONT	VERT	TOTAL	---	C1
P	13-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
R	5-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
T	7-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
U	9-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
V	11-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
W	13-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
X	15-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Y	19-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Z	21-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AA	23-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AB	25-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AC	27-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AD	1-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AE	3-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AF	7-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AG	9-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AH	11-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AI	15-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AJ	19-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AK	23-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AL	25-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AM	27-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AN	31-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AO	33-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS


- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2007168

JOB NAME 408170	TRUSS NAME T40Z	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:17 2020 Page 1
 ID:K?TPdHg0np1qYdbWFOFzldaG-arw5vuOf_MaSDzUBNpNF9v6Bulk?cSGo6JLh0NzNB1a
 13.8 0.0 5.10.8 5.10.8 20.12 2.00 9.11.4 11.9.5 5.8.10 17.7.0 5.9.10 23.4.10 5.10.14 29.3.6 5.10.8 35.2.0 38.5.8 1.3.8
 Scale = 1:57.3

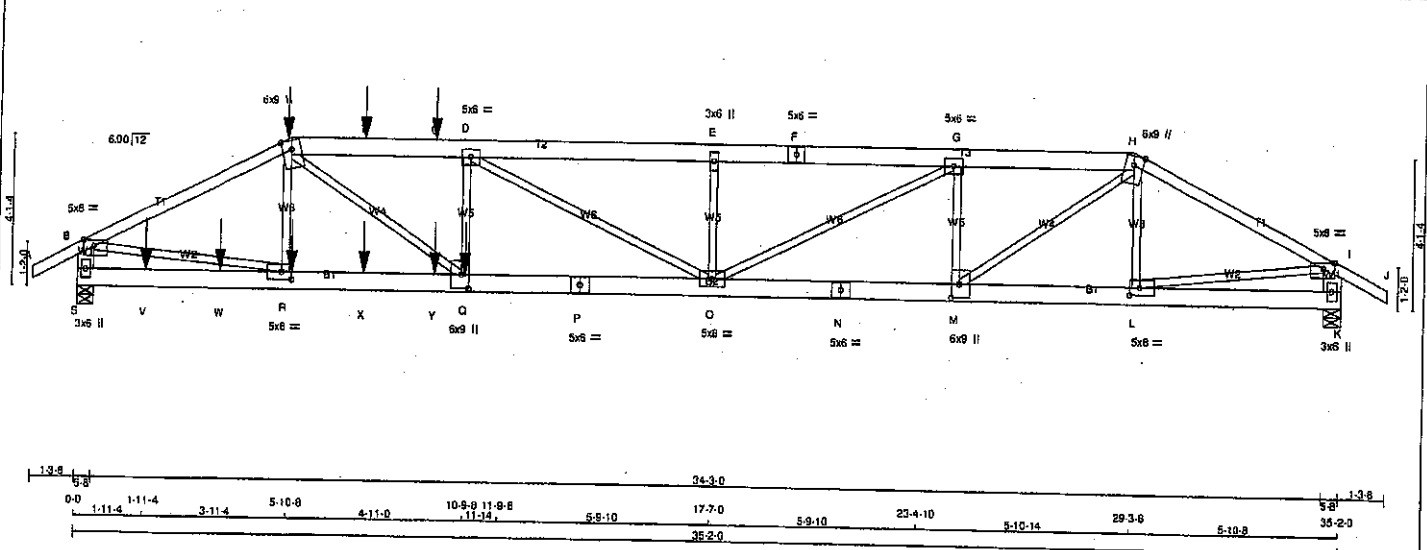

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF		
C - F	2x6	DRY	No.2	SPF		
F - H	2x4	DRY	No.2	SPF		
H - J	2x4	DRY	No.2	SPF		
J - L	2x6	DRY	No.2	SPF		
L - M	2x6	DRY	No.2	SPF		
M - N	2x6	DRY	No.2	SPF		
N - K	2x6	DRY	No.2	SPF		

ALL WEBS 2x3 DRY No.2
 EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-C 12	12	SIDE(61.0)
H-J 12	12	TOP
C-F 2	12	SIDE(61.0)
F-H 2	12	TOP
S-B 2	12	TOP
K-I 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
S-P 2	12	SIDE(183.1)
P-N 2	12	TOP
N-K 2	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	SIDE(525.1)
D-Q 1	3	
G-M 1	3	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT 4582	DOWN 4582	0	5-8
K	HORZ 3047	HORZ 3047	0	5-8

UNFACTORED REACTIONS

1ST CASE	MAX/MIN. COMPONENT REACTIONS	2ND CASE	MAX/MIN. COMPONENT REACTIONS
JT	COMBINED SNOW 3236	LIVE 2151 / 0	PERM. LIVE 0 / 0
S	2151 / 0	0 / 0	WIND 0 / 0
K	1436 / 0	0 / 0	DEAD 1084 / 0
			SOIL 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.15 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
 TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD LC1 (PLF)	MEMB.	FORCE (LBS)
FR-TO		FROM TO	FR-TO	
A-B	0 / 28	-91.8 -91.8 0.07 (1)	R-C	-873 / 0
B-C	-7293 / 0	-91.8 -91.8 0.72 (1)	C-Q	0 / 4986
C-T	-10549 / 0	-91.8 -91.8 0.34 (1)	Q-D	-184 / 38
T-U	-10549 / 0	-91.8 -91.8 0.34 (1)	D-O	-1207 / 0
U-D	-10549 / 0	-91.8 -91.8 0.34 (1)	O-E	-646 / 0
D-E	-9465 / 0	-91.8 -91.8 0.31 (1)	E-G	0 / 2871
E-F	-9465 / 0	-91.8 -91.8 0.29 (1)	M-G	-1984 / 0
F-G	-9465 / 0	-91.8 -91.8 0.29 (1)	H-H	0 / 3512
G-H	-6958 / 0	-91.8 -91.8 0.17 (1)	L-H	-464 / 0
H-I	-4608 / 0	-91.8 -91.8 0.48 (1)	B-R	0 / 6588
I-J	0 / 28	-91.8 -91.8 0.07 (1)	L-I	0 / 4167
S-B	-4503 / 0	0.0 0.0 0.16 (1)		
K-I	-2980 / 0	0.0 0.0 0.11 (1)		

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD LC1 (PLF)	MEMB.	FORCE (LBS)
FR-TO		FROM TO	FR-TO	
S-V	0 / 0	-18.5 -18.5 0.06 (4)		
V-W	0 / 0	-18.5 -18.5 0.06 (4)		
W-R	0 / 0	-18.5 -18.5 0.06 (4)		
R-X	0 / 6557	-18.5 -18.5 0.50 (1)		
X-Y	0 / 6557	-18.5 -18.5 0.50 (1)		
Y-Q	0 / 6557	-18.5 -18.5 0.50 (1)		
Q-P	0 / 10548	-18.5 -18.5 0.77 (1)		
P-O	0 / 10548	-18.5 -18.5 0.77 (1)		
O-N	0 / 6955	-18.5 -18.5 0.50 (1)		
N-M	0 / 8955	-18.5 -18.5 0.50 (1)		
M-L	0 / 4144	-18.5 -18.5 0.29 (1)		
L-K	0 / 0	-18.5 -18.5 0.04 (4)		

FACTORED CONCENTRATED LOADS (LBS)	LOC.	LOC1	MAX.	MAX.	FACE	DIR.	TYPE	HEEL	CONN.
JT	5-10-8	-437	-437	---	BACK	VERT	TOTAL	---	C1
C	10-9-8	-2715	-2715	---	BACK	VERT	TOTAL	---	C1
O	5-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1
R	7-11-4	-110	-110	---	BACK	VERT	TOTAL	---	C1
T	9-11-4	-110	-110	---	BACK	VERT	TOTAL	---	C1
U	1-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1
V	3-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1
W	7-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1
X	9-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1
Y	9-11-4	-26	-26	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 169 = 338 lb

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 6.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF BCBC 2018, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 085-14
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.26")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/881 (0.48")

CSF: TC=0.72/1.00 (B-C:1), BC=0.77/1.00 (O-Q:1),
 WB=0.82/1.00 (B-R:1), SS=0.13/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION
 (PSI) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (B) (INPUT = 0.90)
 JSI METAL= 0.99 (P) (INPUT = 1.00)



Structural component only
 DWG# T-2007169

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T40Z	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Sat Apr 25 13:02:17 2020 Page 2
ID:K?TPdhqj0npl1qYdbWtOFzIdG-arw5vuDf MaSDzUBNpNF8v6Bulk?cSGo6JLhONzNB1a


PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-p	MT20	5.0	8.0	2.00	3.50
C	TTWW+m	MT20	6.0	9.0	Edge	
D	TMWW-l	MT20	5.0	6.0		
E	TMWW-w	MT20	3.0	6.0		
F	TS-l	MT20	5.0	6.0		
G	TMWW-l	MT20	5.0	6.0		
H	TTWW+m	MT20	6.0	9.0	Edge	
I	TMWW-p	MT20	5.0	8.0	2.00	3.50
K	BMV1+p	MT20	3.0	6.0		
L	BMWW-l	MT20	5.0	8.0	2.50	3.25
M	BMWW-l	MT20	8.0	9.0	4.50	2.50
N	BS-l	MT20	5.0	6.0		
O	BMWW-l	MT20	5.0	8.0		
P	BS-l	MT20	5.0	6.0		
Q	BMWW-l	MT20	6.0	9.0	4.50	2.50
R	BMWW-l	MT20	5.0	8.0	2.50	3.25
S	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2007169 2/2

JOB NAME 408170	TRUSS NAME T41	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamerack Roof Truss, Burlington


Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:16 2020 Page 1
ID:K7TPdhgj0npl1q1YdbWf0FzIdeG-22UT7EDHfU/730xWvUibEJ865BLvLxLz4FZpzNB1Z

1 3.8 0.0 1.3.8 4.0.8 3.10.0 7.10.8 8.8.1 14.4.9 20.9.7 8.8.1 27.3.8 31.1.8 4.0.8 35.2.0 38.5.8 1.3.8
Scale = 1:37.2

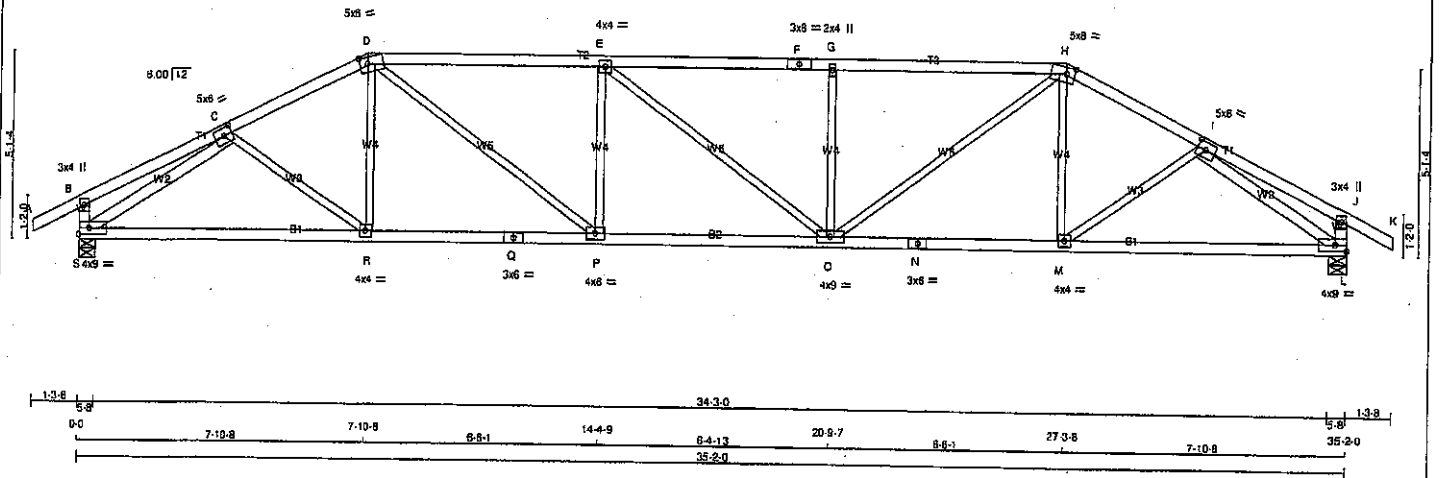

LUMBER				DESIGN CRITERIA			
N. L. G. A. RULES				TOTAL WEIGHT = 2 X 139 = 278 lb			
CHORDS	SIZE	LUMBER	DESCR.	SPECIFIED LOADS:			
A - D	2x4	DRY	No.2	TOP CH. LL = 25.6 PSF			
D - F	2x4	DRY	No.2	DL = 6.0 PSF			
F - H	2x4	DRY	No.2	BOT CH. LL = 0.0 PSF			
H - K	2x4	DRY	No.2	DL = 7.4 PSF			
S - B	2x4	DRY	No.2	TOTAL LOAD = 39.0 PSF			
L - J	2x4	DRY	No.2	SPACING = 24.0 IN. C.C.			
S - Q	2x4	DRY	No.2	LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12			
Q - N	2x4	DRY	No.2	THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015			
N - L	2x4	DRY	No.2	THIS DESIGN COMPLIES WITH:			
ALL WEBS	2x3	DRY	No.2	- PART 9 OF CBC 2010, CBC 2012, ABC 2019			
EXCEPT				- PART 9 OF CBC 2012 (2019 AMENDMENT)			
S - C	2x4	DRY	No.2	- CSA 086-09, CSA 086-14			
I - L	2x4	DRY	No.2	- TPIC 2011, TPIC 2014			
DRY: SEASONED LUMBER.				(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD			

PLATES (table is in inches)				CHORDS			
JT TYPE	PLATES	W	LEN Y X	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRAC LENGTH FR-TO
B TMV+p	MT20	3.0	4.0	A-B	0 / 28	-91.8	-91.8 0.12 (1)
C TMWV-t	MT20	5.0	6.0	B-C	0 / 18	-91.8	-91.8 0.20 (1)
D TTWW-m	MT20	5.0	8.0	C-D	-2799 / 0	-91.8	-91.8 0.32 (1)
E TMWV-t	MT20	4.0	4.0	D-E	-3508 / 0	-91.8	-91.8 0.95 (1)
F TS-t	MT20	3.0	8.0	E-F	-3507 / 0	-91.8	-91.8 0.93 (1)
G TMW+w	MT20	2.0	4.0	F-G	-3507 / 0	-91.8	-91.8 0.93 (1)
H TTWW-m	MT20	5.0	8.0	G-H	-3507 / 0	-91.8	-91.8 0.93 (1)
I TMWV-t	MT20	5.0	6.0	H-I	-2799 / 0	-91.8	-91.8 0.32 (1)
J TMV+p	MT20	3.0	4.0	I-J	0 / 18	-91.8	-91.8 0.20 (1)
K BMWV-t	MT20	4.0	9.0	J-K	0 / 28	-91.8	-91.8 0.12 (1)
L BMWV-t	MT20	4.0	4.0	S-B	-270 / 0	0.0	0.0 0.03 (1)
M BS-t	MT20	3.0	6.0	L-J	-270 / 0	0.0	0.0 0.03 (1)
N BMWV-t	MT20	4.0	9.0	S-R	0 / 2417	-18.5	-18.5 0.53 (1)
O BMWV-t	MT20	4.0	9.0	R-Q	0 / 2489	-18.5	-18.5 0.54 (1)
P BMWV-t	MT20	4.0	6.0	Q-P	0 / 2489	-18.5	-18.5 0.54 (1)
Q BS-t	MT20	3.0	6.0	P-O	0 / 3509	-18.5	-18.5 0.84 (1)
R BMWV-t	MT20	4.0	4.0	O-N	0 / 2489	-18.5	-18.5 0.54 (1)
S BMWV-t	MT20	4.0	9.0	N-M	0 / 2489	-18.5	-18.5 0.54 (1)
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.				M-L	0 / 2417	-18.5	-18.5 0.53 (1)



Structural component only
DWG# T-2007170


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408170	T42	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:19 2020 Page 1

ID:K?TPdngi0npl1qfYdbWIOFzIdeG-WE2rKaEwWz9THdaVEQIEKBSUWUW4PP4adqo5FzNB1Y

1-3.8 0-0 5-0.8 5-0.8 4-10.0 9-10.8 7-8.8 17-7.0 7-8.8 25-3.8 4-10.0 30-1.8 5-0.8 35-2.0 36-5.8 1-3.8
Scale = 1:57.3

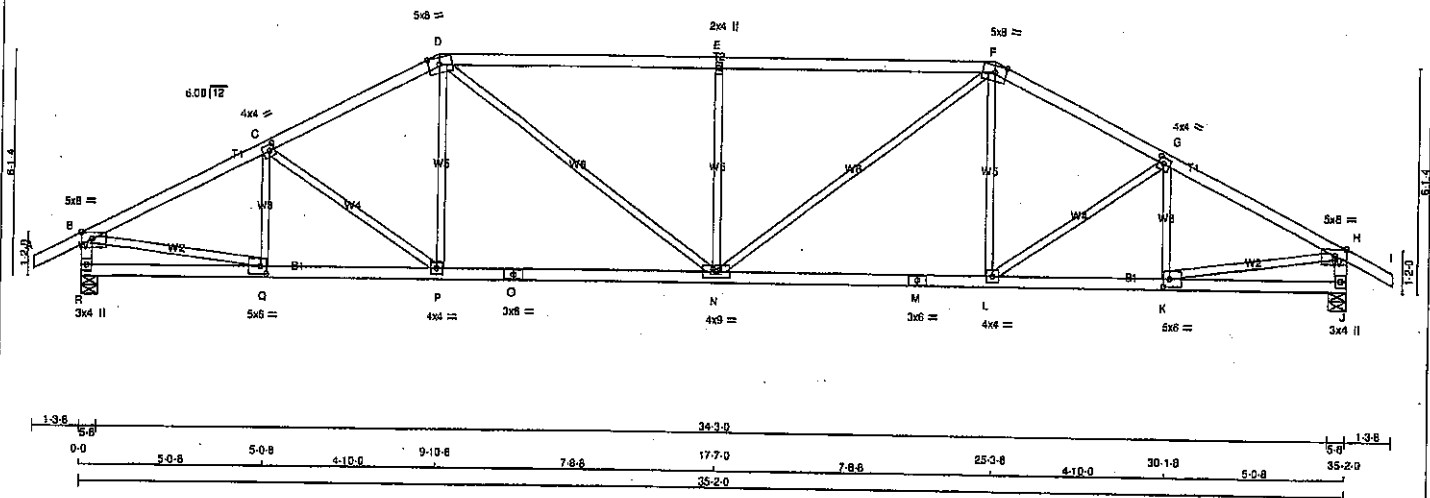

LUMBER

N.L.G.A. RULES

CHORDS SIZE

A - D 2x4 DRY

D - F 2x4 DRY

F - I 2x4 DRY

R - B 2x4 DRY

J - H 2x4 DRY

R - O 2x4 DRY

O - M 2x4 DRY

M - J 2x4 DRY

ALL WEBS 2x3 DRY

EXCEPT

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT TYPE PLATES

B TMVW-p MT20

C TMVW-w MT20

D TTWW-m MT20

E TMVW-w MT20

F TTWW-m MT20

G TMVW-w MT20

H TMVW-p MT20

J BMV1-p MT20

K BMVW-t MT20

L BMVW-t MT20

M BS-t MT20

N BMVW-w MT20

O BS-t MT20

P BMVW-w MT20

Q BMVW-t MT20

R BMV1-p MT20

Edge - INDICATES REFERENCE CORNER OF PLATE

TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORIZ
R	2063	0	2063	0
J	2063	0	2063	0

UNFACTORED REACTIONS

	1ST CASE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1457	989 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0
J	1457	989 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.78 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS

MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED FORCE (LBS)	WEBS	MAX. FACTORED FORCE (LBS)	MAX. FACTORED FORCE (LBS)
FR-TO					FR-TO		
A-B	0 / 28	-91.8	-91.8	0.12 (1)	Q-C	-353 / 0	0.08 (1)
B-C	-2834 / 0	-91.8	-91.8	0.39 (1)	C-P	-210 / 0	0.13 (1)
C-D	-2887 / 0	-91.8	-91.8	0.37 (1)	P-O	0 / 246	0.06 (4)
D-E	-3060 / 0	-91.8	-91.8	0.97 (1)	D-N	0 / 844	0.19 (1)
E-F	-3060 / 0	-91.8	-91.8	0.97 (1)	N-E	-672 / 0	0.51 (1)
F-G	-2887 / 0	-91.8	-91.8	0.37 (1)	E-F	0 / 844	0.19 (1)
G-H	-2834 / 0	-91.8	-91.8	0.39 (1)	H-F	0 / 246	0.06 (4)
H-I	0 / 28	-91.8	-91.8	0.12 (1)	L-G	-210 / 0	0.13 (1)
I-B	-2018 / 0	0.0	0.0	0.20 (1)	K-G	-353 / 0	0.08 (1)
J-H	-2018 / 0	0.0	0.0	0.20 (1)	K-Q	0 / 2591	0.58 (1)
R-Q	0 / 0	-18.5	-18.5	0.10 (4)	Q-P	0 / 2555	-18.5
Q-P	0 / 2555	-18.5	-18.5	0.51 (1)	P-O	0 / 2386	-18.5
P-O	0 / 2386	-18.5	-18.5	0.49 (1)	O-N	0 / 2386	-18.5
O-N	0 / 2386	-18.5	-18.5	0.49 (1)	N-M	0 / 2386	-18.5
N-M	0 / 2386	-18.5	-18.5	0.49 (1)	M-L	0 / 2386	-18.5
M-L	0 / 2386	-18.5	-18.5	0.49 (1)	L-K	0 / 2555	-18.5
L-K	0 / 2555	-18.5	-18.5	0.51 (1)	K-J	0 / 0	-18.5
K-J	0 / 0	-18.5	-18.5	0.10 (4)			

TOTAL WEIGHT = 2 X 139 = 277 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.17")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.17")
ALLOWABLE DEFL.(TL) = $L/360$ (1.17")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.34")

CSI: TC=0.97/1.00 (D-E:1) ; BC=0.51/1.00 (P-Q:1) ;
WB=0.58/1.00 (B-Q:1) ; SS=0.34/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LB BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	610	354
	1067	788
	1987	1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.87 (F) (INPUT = 0.90)
JSI METAL = 0.75 (M) (INPUT = 1.00)




Structural component only
DWG# T-2007171

JOB NAME 408170	TRUSS NAME T43	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.3.10 5 Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:20 2020 Page 1
ID:K?TPdngj0npl1qYobWtOFzIdeG-QcEYwFYHHz04RCm3xxynXkjMwq0osVEoHZLdzNB1X

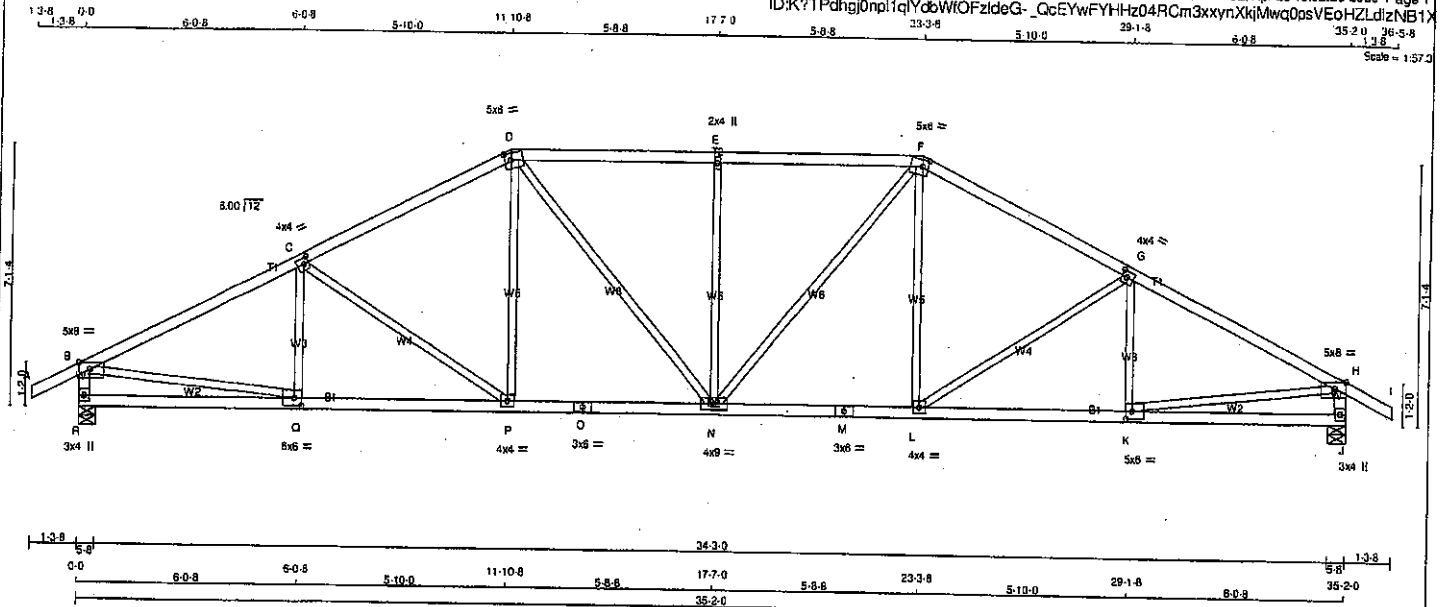

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - I	2x4	DRY	No.2
R - B	2x4	DRY	No.2
J - H	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2

DRY, SEASONED LUMBER.

PLATES (tables in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	3.50
C	TMVW-l	MT20	4.0	4.0	2.00	1.75
D	TTWW-m	MT20	5.0	6.0	2.25	2.00
E	TMVW-w	MT20	2.0	4.0		
F	TTWW-m	MT20	5.0	6.0	2.25	2.00
G	TMVW-l	MT20	4.0	4.0	2.00	1.75
H	TMVW-p	MT20	5.0	8.0	Edge	3.50
J	BMV1+p	MT20	3.0	4.0		
K	BMVW-l	MT20	5.0	6.0	2.50	2.25
L	BMVW-l	MT20	4.0	4.0		
M	BS-l	MT20	3.0	6.0		
N	BMVWW-l	MT20	4.0	9.0		
O	BS-l	MT20	3.0	6.0		
P	BMVW-l	MT20	4.0	4.0		
Q	BMVW-l	MT20	5.0	6.0	2.50	2.25
R	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	DOWN	HORZ	UPLIFT	IN-SX
R	2083	0	2083	0	5-8
J	2083	0	2083	0	5-8

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE
R	1457	969 / 0	0 / 0
J	1457	969 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.58 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)	
CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO	FROM TO	FR-TO	FROM TO
A-B	0 / 28	Q-C	-255 / 12
B-C	-2089 / 0	C-P	-435 / 0
C-D	-2539 / 0	P-D	0 / 360
D-E	-2559 / 0	D-N	0 / 482
E-F	-2559 / 0	N-E	-641 / 0
F-G	-2559 / 0	N-F	0 / 482
G-H	-2889 / 0	L-F	0 / 350
H-I	0 / 28	L-G	-435 / 0
R-B	-2014 / 0	K-G	-255 / 12
J-H	-2014 / 0	B-Q	0 / 2635
R-Q	0 / 0	K-H	0 / 2635
Q-P	0 / 2609		
P-O	0 / 2249		
O-N	0 / 2249		
N-M	0 / 2249		
M-L	0 / 2249		
L-K	0 / 2509		
K-J	0 / 0		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.28")

CSI: TC=0.58/1.00 (B-C:1), BC=0.49/1.00 (P-Q:1), WB=0.59/1.00 (B-Q:1), SSI=0.25/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP=0.89 (Q) (INPUT = 0.90)
JSI METAL=0.69 (M) (INPUT = 1.00)




Structural component only
DWG# T-2007172

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T45	2	1	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:22 2020 Page 1
ID:K?TPdHgQnph1qlYdovWfOFZideG-wpL_zbGopuDKKIM9AMzQsy6jVPHiyXGb2SiazNB1V

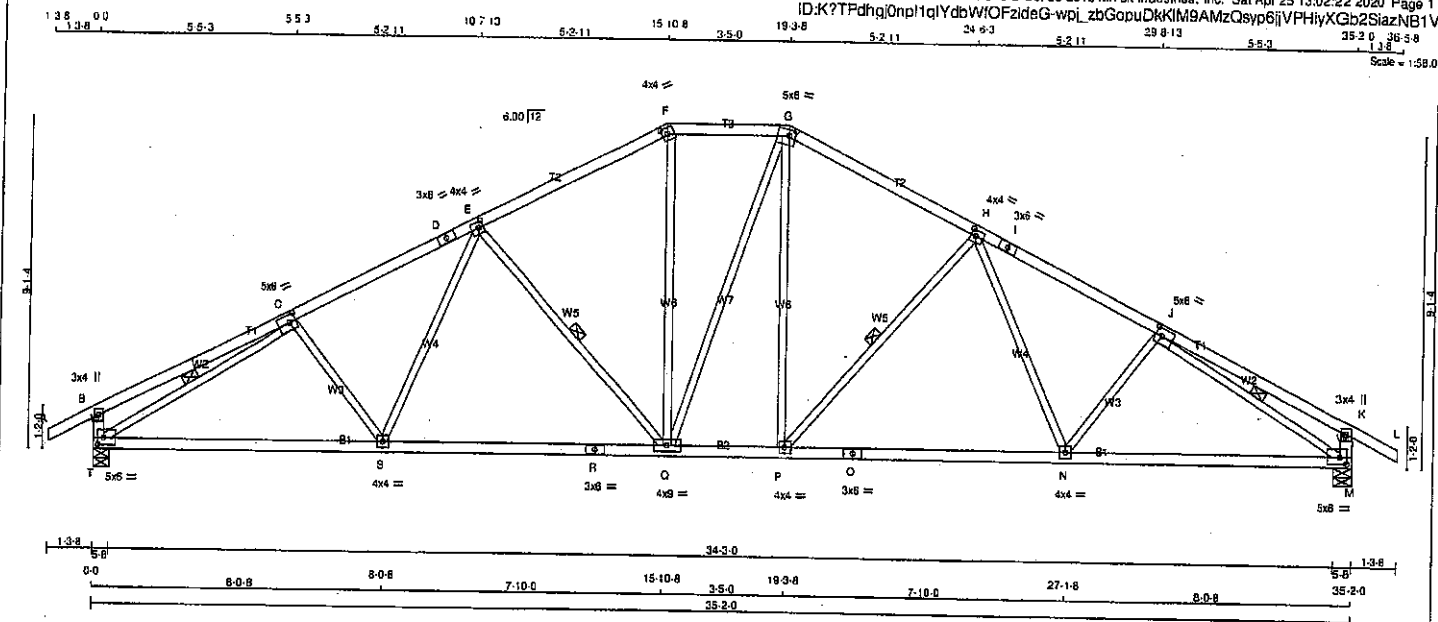

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - G	2x4	DRY	No.2	SPF	
G - I	2x4	DRY	No.2	SPF	
I - L	2x4	DRY	No.2	SPF	
L - B	2x4	DRY	No.2	SPF	
B - K	2x4	DRY	No.2	SPF	
K - R	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-t	MT20	5.0	6.0	2.50	2.25
D	TS-t	MT20	3.0	6.0		
E	TMWW-t	MT20	4.0	4.0	2.00	1.50
F	TTW-h	MT20	4.0	4.0	2.00	1.75
G	TTWW-m	MT20	5.0	6.0	2.00	2.00
H	TMWW-t	MT20	4.0	4.0	2.00	1.50
I	TS-t	MT20	3.0	6.0		
J	TMWW-t	MT20	5.0	6.0	2.50	2.25
K	TMV+p	MT20	3.0	4.0		
M	BMWW-t	MT20	5.0	6.0	2.25	2.00
N	P.S					
O	BMWW-t	MT20	4.0	4.0		
Q	BS-t	MT20	3.0	5.0		
R	BS-t	MT20	3.0	6.0		
T	BMVW-t	MT20	5.0	6.0	2.25	2.00

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	RECORD
	VERT	DOWN	BRG	BRG
T	2063	0	0	5-8
M	2063	0	0	5-8

UNFACTORED REACTIONS

JT	1ST CASE	MAX./MIN. COMPONENT REACTIONS	LIVE	PERM. LIVE	WIND	DEAD	SOIL
T	COMBINED	SNOW	0/0	0/0	0/0	488/0	0/0
M	COMBINED	SNOW	0/0	0/0	0/0	488/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.85 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-Q, H-P, C-T, J-M.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	VERT. LOAD	LC1	MAX	MAX.	MEMB.	MAX. FACTORED	WEBS	MAX. FACTORED	MAX
MEMB.	FORCE	(PLF)	FROM	TO	CS1 (LC)	UNBRAC	LENGTH	FR-TO	MEMB.	FORCE	MAX
FR-TO	(LBS)										
A-B	0/28	-91.8	-91.8	0.12 (1)	10.00	C-S	-110/37	0.04 (1)			
B-C	0/19	-91.8	-91.8	0.32 (1)	10.00	S-E	0/276	0.06 (1)			
C-D	-2759/0	-91.8	-91.8	0.40 (1)	3.66	E-Q	-681/0	0.31 (1)			
D-E	-2759/0	-91.8	-91.8	0.40 (1)	3.66	Q-F	0/613	0.14 (1)			
E-F	-2167/0	-91.8	-91.8	0.38 (1)	4.30	Q-G	0/4	0.00 (1)			
F-G	-1925/0	-91.8	-91.8	0.18 (1)	4.71	P-G	0/609	0.14 (1)			
G-H	-2168/0	-91.8	-91.8	0.36 (1)	4.30	P-H	-682/0	0.31 (1)			
H-I	-2760/0	-91.8	-91.8	0.40 (1)	3.66	H-N	0/278	0.06 (1)			
I-J	-2760/0	-91.8	-91.8	0.40 (1)	3.66	N-J	-110/37	0.04 (1)			
J-K	0/19	-91.8	-91.8	0.32 (1)	10.00	T-C	-3040/0	0.85 (1)			
K-L	0/28	-91.8	-91.8	0.12 (1)	10.00	J-M	-3041/0	0.85 (1)			
T-B	-326/0	0.0	0.0	0.03 (1)	7.81						
M-K	-326/0	0.0	0.0	0.03 (1)	7.81						
T-S	0/2536	-18.5	-18.5	0.55 (1)	10.00						
S-R	0/2362	-18.5	-18.5	0.53 (1)	10.00						
R-Q	0/2362	-18.5	-18.5	0.53 (1)	10.00						
Q-P	0/1924	-18.5	-18.5	0.40 (1)	10.00						
P-O	0/2352	-18.5	-18.5	0.53 (1)	10.00						
O-N	0/2362	-18.5	-18.5	0.53 (1)	10.00						
N-M	0/2537	-18.5	-18.5	0.55 (1)	10.00						

TOTAL WEIGHT = 2 X 151 = 302 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA C86-09, CSA C86-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.32")

CSI: TC=0.40/1.00 (H-J:1), BC=0.56/1.00 (M-N:1), WB=0.65/1.00 (J-M:1), SSI=0.20/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (M) (INPUT = 0.90)
JSI METAL = 0.78 (O) (INPUT = 1.00)



Structural component only
DWG# T-2007174

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T46	6	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					
Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:23 2020 Page 1					
ID:K?TPdhgJ0npl1qYvbbWtCFzIdeG-O?HMAxHQAclBxuxLk4UjPALGz7q50ADgUfo?E1zNB1U					
352.0 365.8 1.3.8 Scale = 1/32.0					

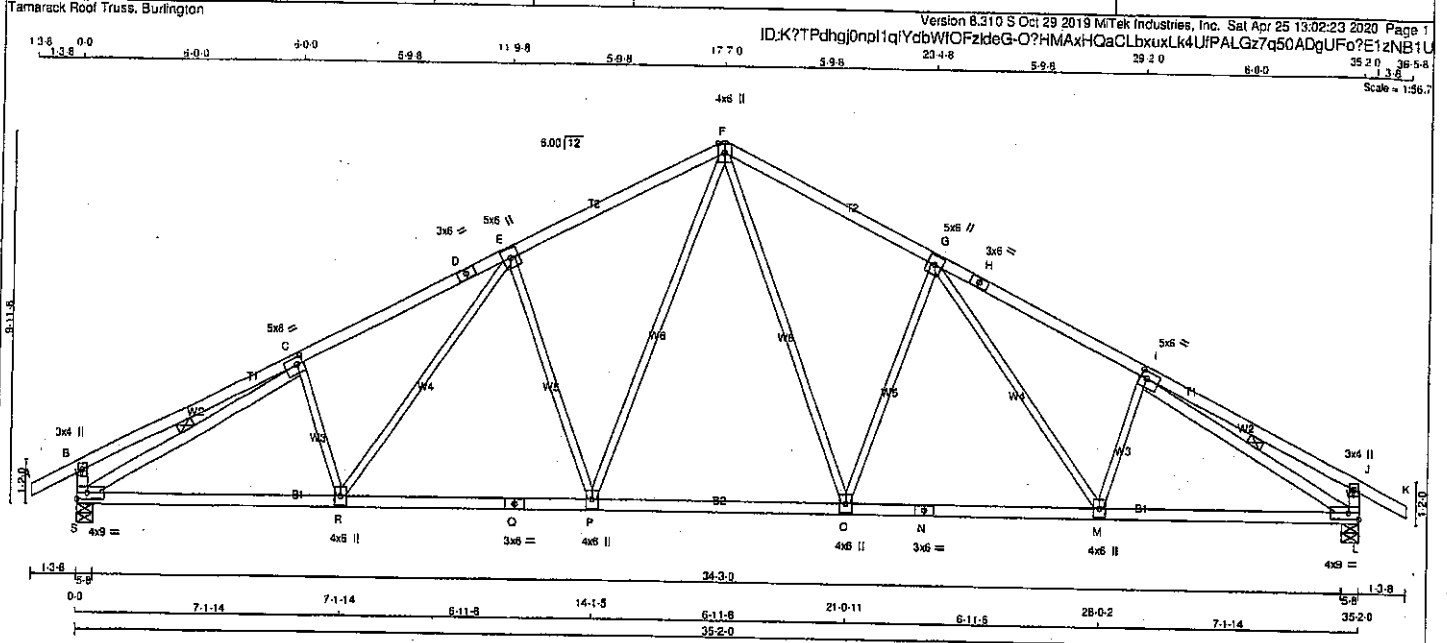

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - K	2x4	DRY	No.2
S - B	2x4	DRY	No.2
L - J	2x4	DRY	No.2
S - Q	2x4	DRY	No.2
Q - N	2x4	DRY	No.2
N - L	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
S - C	2x4	DRY	No.2
I - L	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-1	MT20	5.0	6.0	2.25	2.00
D	TS-1	MT20	3.0	6.0		
E	TMWW+1	MT20	5.0	6.0		
F	TTWW+p	MT20	4.0	6.0	Edge	
G	TMWW+1	MT20	5.0	6.0		
H	TS-1	MT20	3.0	6.0		
I	TMWW-1	MT20	5.0	6.0	2.25	2.00
J	TMV+p	MT20	3.0	4.0		
L	BMVW-1	MT20	4.0	9.0	Edge	
M, O, P, R						
M	BMWW+1	MT20	4.0	6.0		
N	BS-1	MT20	3.0	6.0		
Q	BS-1	MT20	3.0	6.0		
S	BMVW-1	MT20	4.0	9.0	Edge	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	BRG	BRG
S	2063	0	2063	0	0	5-8	5-8	5-8	5-8
L	2063	0	2063	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS		1ST CASE		MAX/MIN. COMPONENT REACTIONS		LIVE		PERM. LIVE		WIND		DEAD		SOIL	
JT	COMBINED	SNOW	S	1457	989 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0	488 / 0	0 / 0	0 / 0	0 / 0
L	1457	989 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0	488 / 0	0 / 0	488 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L.

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.75 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-S, I-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	FORCE (LBS)	MAX. CSI (LC)	MAX. CSI (LC)
FR-TO		FROM TO		FR-TO			
A-B	0 / 28	-91.8 -91.8	0.12 (1)	10.00	F-O	0 / 886	0.19 (1)
B-C	0 / 22	-91.8 -91.8	0.40 (1)	10.00	O-G	-728 / 0	0.72 (1)
C-D	-2808 / 0	-91.8 -91.8	0.48 (1)	3.75	G-M	0 / 391	0.09 (1)
D-E	-2808 / 0	-91.8 -91.8	0.48 (1)	3.75	M-I	-192 / 18	0.05 (1)
E-F	-2322 / 0	-91.8 -91.8	0.48 (1)	4.07	P-F	0 / 886	0.19 (1)
F-G	-2322 / 0	-91.8 -91.8	0.48 (1)	4.07	E-P	-728 / 0	0.72 (1)
G-H	-2808 / 0	-91.8 -91.8	0.48 (1)	3.75	F-E	0 / 391	0.09 (1)
H-I	-2808 / 0	-91.8 -91.8	0.48 (1)	3.75	C-R	-192 / 18	0.05 (1)
I-J	0 / 22	-91.8 -91.8	0.40 (1)	10.00	S-C	-3064 / 0	0.72 (1)
J-K	0 / 28	-91.8 -91.8	0.12 (1)	10.00	I-L	-3064 / 0	0.72 (1)
S-B	-344 / 0	0.0 0.0	0.03 (1)	7.81			
L-J	-344 / 0	0.0 0.0	0.03 (1)	7.81			
S-R	0 / 2574	-18.5 -18.5	0.53 (1)	10.00			
R-Q	0 / 2291	-18.5 -18.5	0.47 (1)	10.00			
Q-P	0 / 2291	-18.5 -18.5	0.47 (1)	10.00			
P-O	0 / 1762	-18.5 -18.5	0.36 (1)	10.00			
O-N	0 / 2291	-18.5 -18.5	0.47 (1)	10.00			
N-M	0 / 2281	-18.5 -18.5	0.47 (1)	10.00			
M-L	0 / 2574	-18.5 -18.5	0.53 (1)	10.00			

TOTAL WEIGHT = 6 X 152 = 910 lb (M/F)

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (1.17")
CALCULATED VERT. DEFL. (LL) = L/999 (0.14")
ALLOWABLE DEFL. (TL) = L/360 (1.17")
CALCULATED VERT. DEFL. (TL) = L/999 (0.28")

CSI: TO=0.49/1.00 (G-I), BC=0.53/1.00 (R-S:1), WB=0.72/1.00 (E-P:1), SSI=0.22/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (C) (INPUT = 0.90)
JSI METAL= 0.77 (I) (INPUT = 1.00)




Structural component only
DWG# T-2007 175

JOB NAME 408170	TRUSS NAME T47	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	--------------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:24 2020 Page 1

ID:K?TPdhgJ0npl1qYdbWfOFzIdeG-sCrkNH12LVTSZZWXXIn?uxNuSFXBollOpjvXZmTzNB1T

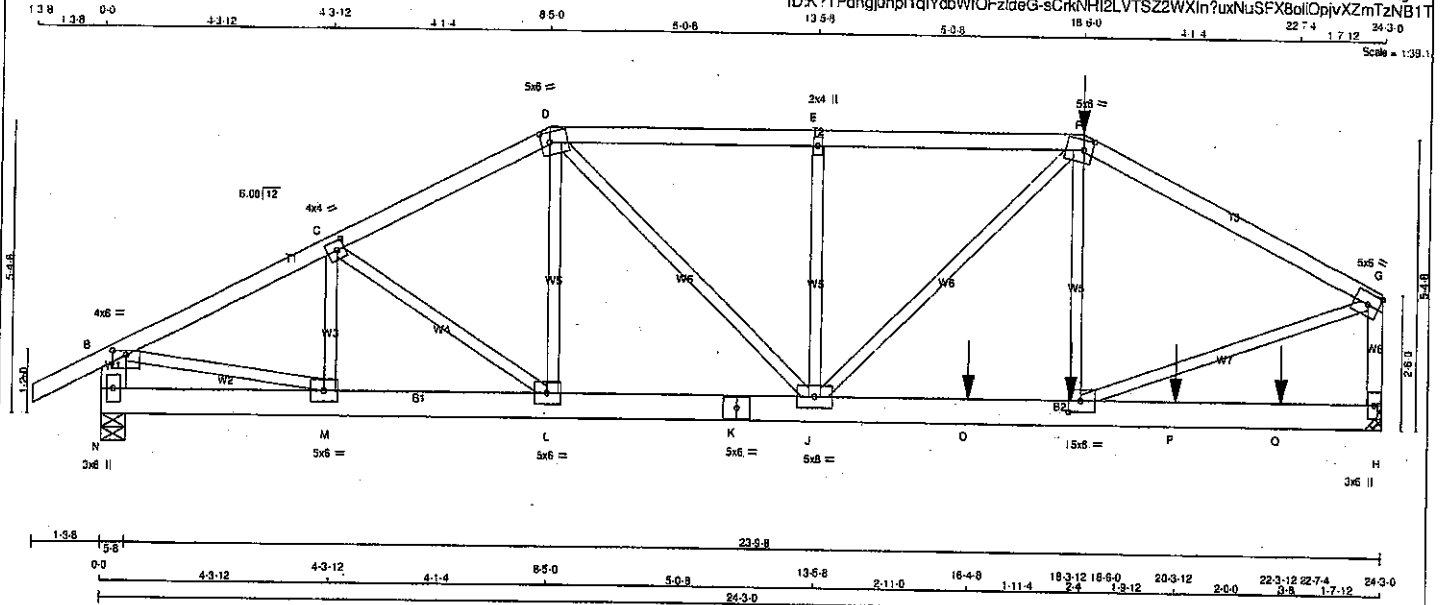

LUMBER	N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS				
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - G	2x4	DRY	No.2	SPF
N - B	2x6	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
N - K	2x6	DRY	No.2	SPF
K - H	2x6	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-D 1 12	TOP	
D-F 1 12	SIDE(61.0)	
F-G 1 12	SIDE(61.0)	
H-G 1 12	TOP	
N-B 2 12	TOP	
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
N-K 2 12	TOP	
K-H 2 12	SIDE(183.1)	
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1 8		

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	DOWN	IN-SX	IN-SX
N	2120	0	5-8	5-8
H	3119	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 4-0.

UNFACTORED REACTIONS

1ST CASE	MAX MIN. COMPONENT REACTIONS
JT	COMBINED SNOW LIVE PERM LIVE WIND DEAD SOIL
N	1495 1003 / 0 0 / 0 0 / 0 492 / 0 0 / 0
H	2201 1472 / 0 0 / 0 0 / 0 729 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.84 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD LC1 (PLF)	MAX. CSI (LC)	MAX. UNBRACED LENGTH	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO						FR-TO			
A-B	0 / 28	-91.8	-91.8	0.07 (1)	10.00	M-C	-408 / 0	0.04 (1)	
B-C	-2814 / 0	-91.8	-91.8	0.17 (1)	5.22	C-L	-86 / 0	0.01 (1)	
C-D	-2892 / 0	-91.8	-91.8	0.17 (1)	5.24	L-D	0 / 70	0.01 (4)	
D-E	-3517 / 0	-91.8	-91.8	0.27 (1)	4.74	D-J	0 / 1336	0.17 (1)	
E-F	-3517 / 0	-91.8	-91.8	0.27 (1)	4.74	J-E	-555 / 0	0.12 (1)	
F-G	-3486 / 0	-91.8	-91.8	0.39 (1)	4.84	J-F	0 / 575	0.07 (1)	
N-B	-2054 / 0	0.0	0.0	0.07 (1)	7.81	I-F	0 / 522	0.05 (1)	
H-G	-2933 / 0	0.0	0.0	0.20 (1)	8.72	I-G	0 / 3293	0.41 (1)	
						B-M	0 / 2664	0.33 (1)	
N-M	0 / 0	-18.5	-18.5	0.03 (1)	10.00				
M-L	0 / 2622	-18.5	-18.5	0.21 (1)	10.00				
L-K	0 / 2568	-18.5	-18.5	0.33 (1)	10.00				
K-J	0 / 2568	-18.5	-18.5	0.33 (1)	10.00				
J-O	0 / 3109	-18.5	-18.5	0.69 (1)	10.00				
O-I	0 / 3109	-18.5	-18.5	0.69 (1)	10.00				
I-P	0 / 0	-18.5	-18.5	0.32 (1)	10.00				
P-Q	0 / 0	-18.5	-18.5	0.32 (1)	10.00				
Q-H	0 / 0	-18.5	-18.5	0.32 (1)	10.00				

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX.	FACE	DIR.	TYPE	HEEL	CONN.
JT	18-6-0	-178	-178	---	FRONT	VERT	TOTAL	---	C1
I	18-3-12	-35	-35	---	FRONT	VERT	TOTAL	---	C1
O	18-4-8	-1661	-1661	---	FRONT	VERT	TOTAL	---	C1
P	20-3-12	-283	-283	---	FRONT	VERT	TOTAL	---	C1
Q	22-3-12	-284	-284	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
DL = 6.0	PSF	
BOT CH.	LL = 0.0	PSF
DL = 7.4	PSF	
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BOCB 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 91.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.81")
CALCULATED VERT. DEFL.(LL) = L/999 (0.08")
ALLOWABLE DEFL.(TL) = L/600 (0.81")
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CSI: TC=0.39/1.00 (F-G:1), BC=0.69/1.00 (H-J:1),
WB=0.41/1.00 (G-I:1), SS=0.37/1.00 (F-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354 1667 788 1987 1656	

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (I) (INPUT = 0.90)
JSI METAL = 0.44 (G) (INPUT = 1.00)



Structural component only
DWG# T-2007176 92

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T47	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:24 2020 Page 2
ID:K?TPdhai0npl1qYdbWIOFzIdeG-sCrkNH12LVTSSZzWXIn?uxNuSFx8cllOpivXZmTzNB11


PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW-p	MT20	4.0	8.0	1.00 3.00
C	TMWW-t	MT20	4.0	4.0	2.00 1.75
D	TTWW-m	MT20	5.0	6.0	2.25 2.00
E	TMW-w	MT20	2.0	4.0	
F	TTWW-m	MT20	5.0	6.0	2.25 2.00
G	TMWW-t	MT20	5.0	6.0	Edge
H	BMV1-p	MT20	3.0	6.0	
I	BMWW-t	MT20	5.0	6.0	2.50 2.75
J	BMWWW-t	MT20	5.0	6.0	
K	BS-t	MT20	5.0	6.0	
L	BMWW-t	MT20	5.0	6.0	
M	BMWW-t	MT20	5.0	6.0	
N	BMV1-p	MT20	3.0	6.0	

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.



Structural component only
DWG# T-2007176 4/2

JOB NAME 408170	TRUSS NAME T48	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

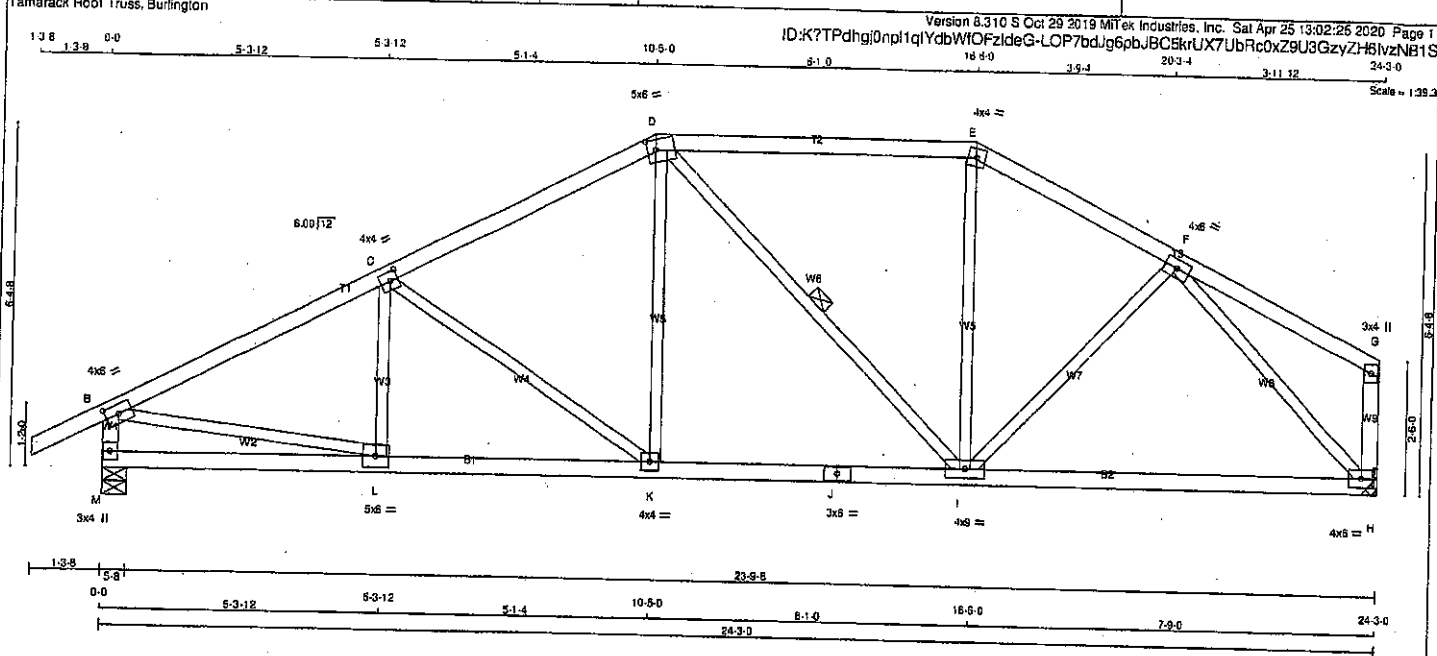

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR
A - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
M - B	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
M - J	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY; SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-1	MT20	4.0	6.0	2.00	3.00
C	TMWV-1	MT20	4.0	4.0	2.00	1.75
D	TTWV-m	MT20	5.0	6.0	2.25	2.00
E	TTWV-m	MT20	4.0	4.0		
F	TMWV-1	MT20	4.0	6.0		
G	TMWV-1	MT20	3.0	4.0		
H	BMWVW-1	MT20	4.0	6.0		
I	BMWVW-1	MT20	4.0	9.0		
J	BS-1	MT20	3.0	6.0		
K	BMWVW-1	MT20	4.0	4.0		
L	BMWVW-1	MT20	5.0	6.0		
M	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
M	1481	1481	0	5-8
H	1337	1337	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	PERM. LIVE	WIND	DEAD	SOIL
M	1031	690 / 0	0 / 0	0 / 0	341 / 0	0 / 0
H	945	620 / 0	0 / 0	0 / 0	325 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.58 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)
A-B	0 / 28	-91.8	-165 / 32	0.04 (1)
B-C	-1844 / 0	-91.8	-438 / 0	0.31 (1)
C-D	-1469 / 0	-91.8	0 / 334	0.08 (1)
D-E	-1181 / 0	-91.8	-189 / 0	0.09 (1)
E-F	-1396 / 0	-91.8	0 / 175	0.05 (4)
F-G	0 / 18	-91.8	0 / 158	0.04 (4)
G-H	-1419 / 0	0.0	0 / 1692	0.38 (1)
H-I	-138 / 0	0.0	-1563 / 0	0.82 (1)
M-L	0 / 0	-18.5		
L-K	0 / 1671	-18.5		
K-J	0 / 1313	-18.5		
J-I	0 / 1313	-18.5		
I-H	0 / 1099	-18.5		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF

BOT CH. LL = 0.0 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.81")

CALCULATED VERT. DEFL. (LL) = L/999 (0.05")

ALLOWABLE DEFL. (TL) = L/360 (0.81")

CALCULATED VERT. DEFL. (TL) = L/999 (0.14")

CSI: TC=0.46/1.00 (D-E:1), BC=0.36/1.00 (H-K:4), WB=0.82/1.00 (F-H:1), SSI=0.22/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY) SHEAR SECTION (PSD) (PL) (PLJ) (PLJ)

MAX MIN MAX MIN MAX MIN


MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.90 (B) (INPUT = 0.90)

JSI METAL = 0.50 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007177

JOB NAME 408170	TRUSS NAME T49	QUANTITY 3	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:27 2020 Page 1
ID:K?TPdhgi0np1qYdbWOFzIdeG-HnXIOJKxeQr1QWF6zvZbZ0Wx4kDry?IGPmDNozNB1Q

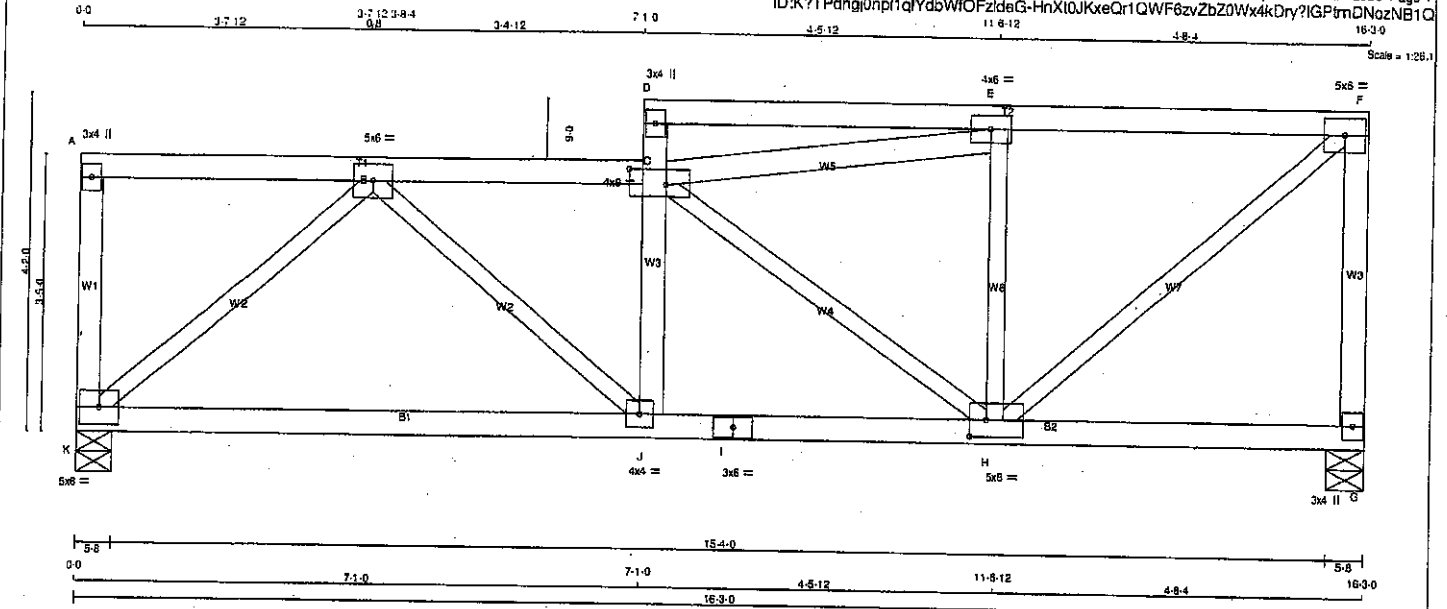

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
K - A	2x4	DRY No.2	SPF
A - C	2x4	DRY No.2	SPF
D - E	2x4	DRY No.2	SPF
E - F	2x4	DRY No.2	SPF
F - G	2x4	DRY No.2	SPF
G - H	2x4	DRY No.2	SPF
H - I	2x4	DRY No.2	SPF
I - J	2x4	DRY No.2	SPF

ALL WEBS	EXCEPT	DESCR.
C - E	2x4	DRY No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	3.0	4.0		
B	TMVW-i	MT20	5.0	8.0		
C	TMVW-i	MT20	4.0	9.0	2.25	5.50
D	TMV+p	MT20	3.0	4.0		
E	TMVW-i	MT20	4.0	8.0		
F	TMVW-i	MT20	5.0	8.0		
G	BMV1+p	MT20	3.0	4.0		
H	BMVW-i	MT20	5.0	8.0	2.50	2.50
I	BS-i	MT20	3.0	6.0		
J	BMVW-i	MT20	4.0	4.0		
K	BMVW-i	MT20	5.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

PROVIDE ADEQUATE DRAINAGE TO PREVENT PONING

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	UPLIFT
K	1079	0	1079	0
G	1079	0	1079	0

UNFACTORED REACTIONS

JT	1ST CASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	780	416 / 0	0 / 0	0 / 0	0 / 0	364 / 0	0 / 0	0 / 0
G	780	416 / 0	0 / 0	0 / 0	0 / 0	364 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.47 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM	TO	FR-TO			
K-A	-163 / 0	0.0	0.0 0.04 (1)	7.81	K-B	-1328 / 0	0.65 (1)
A-B	0 / 0	-114.3	-114.3 0.32 (1)	10.00	B-J	0 / 538	0.16 (1)
B-C	-1416 / 0	-114.3	-114.3 0.37 (1)	4.47	C-E	-961 / 0	0.30 (1)
J-C	-226 / 0	0.0	0.0 0.06 (1)	7.81	C-H	-489 / 0	0.30 (1)
C-D	-183 / 0	0.0	0.0 0.06 (1)	7.81	H-E	-471 / 0	0.16 (1)
D-E	-58 / 0	-114.3	-114.3 0.51 (1)	6.25	H-F	0 / 1303	0.39 (1)
E-F	-1004 / 0	-114.3	-114.3 0.55 (1)	4.81			
G-F	-1039 / 0	0.0	0.0 0.37 (1)	6.91			
K-J	0 / 1013	-18.5	-18.5 0.41 (4)	10.00			
J-I	0 / 1402	-18.5	-18.5 0.46 (4)	10.00			
I-H	0 / 1402	-18.5	-18.5 0.46 (4)	10.00			
H-G	0 / 0	-18.5	-18.5 0.13 (4)	10.00			

TOTAL WEIGHT = 3 X 72 = 216 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
DL	= 15.0	PSF	
BOT CH.	LL	= 0.0	PSF
DL	= 7.4	PSF	
TOTAL LOAD	= 48.0	PSF	

SPACING = 24.0 IN/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 0.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.54")
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")
ALLOWABLE DEFL.(TL) = L/360 (0.54")
CALCULATED VERT. DEFL.(TL) = L/999 (0.11")

CSI: TC=0.55/1.00 (E-F:1), BC=0.48/1.00 (H-J:4), WB=0.55/1.00 (B-K:1), SSI=0.34/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00
FLAT ROOF FACTOR = 0.75

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	616	354	1867

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.95 (C) (INPUT = 0.90)
JSI METAL= 0.62 (I) (INPUT = 1.00)




Structural component only
DWG# T-2007178

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408170	T50	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:28 2020 Page 1
ID:K7TPdhgJ0npl1qYdbWIOFzIdeG-tz5FDILZPkzu2gpJXd4q6D3AB8cjhXEPeXWmvEzNB1P

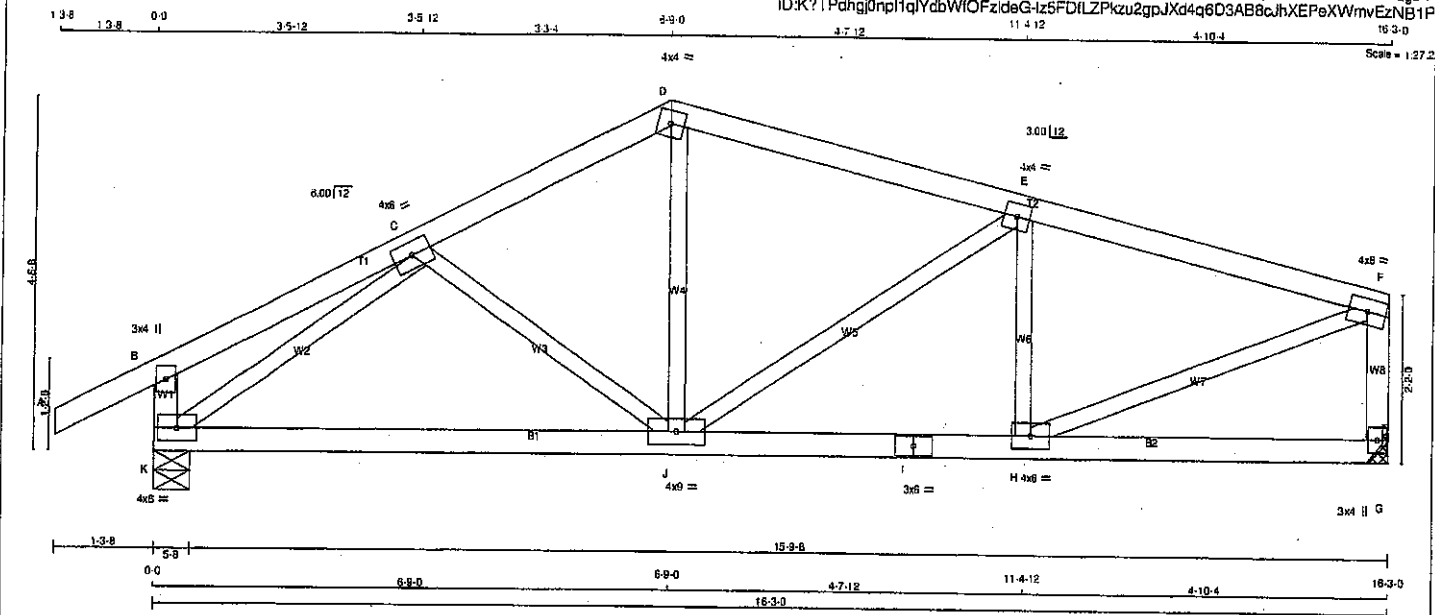

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
K - B	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
K - I	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF

ALL WEBS 2x8 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMV-p	MT20	3.0	4.0		
C TMVW-t	MT20	4.0	6.0		
D TTW-t	MT20	4.0	4.0		
E TMVW-t	MT20	4.0	4.0		
F TMVW-t	MT20	4.0	6.0		
G BMV1-p	MT20	3.0	4.0		
H BMVW-t	MT20	4.0	6.0		
I BS-t	MT20	3.0	6.0		
J BMVW-t	MT20	4.0	6.0		
K BMVW-t	MT20	4.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
K	1020	0	1020	0
G	886	0	886	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3'-8".

UNFACTORED REACTIONS

JT	1ST LCASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
K	719	485 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0	0 / 0
G	833	416 / 0	0 / 0	0 / 0	0 / 0	218 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.73 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 28	-91.8	-91.8 0.12 (1)	10.00	C-J	-135 / 7	0.04 (1)
B-C	0 / 14	-91.8	-91.8 0.15 (1)	10.00	J-D	0 / 355	0.08 (1)
C-D	-962 / 0	-91.8	-91.8 0.13 (1)	6.20	J-E	-263 / 0	0.13 (1)
D-E	-894 / 0	-91.8	-91.8 0.26 (1)	6.18	H-E	-355 / 0	0.07 (1)
E-F	-1094 / 0	-91.8	-91.8 0.27 (1)	5.73	K-C	-1185 / 0	0.35 (1)
K-B	-248 / 0	0.0	0.0 0.03 (1)	7.81	H-F	0 / 1150	0.28 (1)
G-F	-855 / 0	0.0	0.0 0.10 (1)	7.81			
K-J	0 / 956	-18.5	-18.5 0.28 (1)	10.00			
J-I	0 / 1073	-18.5	-18.5 0.27 (1)	10.00			
I-H	0 / 1073	-18.5	-18.5 0.27 (1)	10.00			
H-G	0 / 0	-18.5	-18.5 0.10 (4)	10.00			

TOTAL WEIGHT = 2 X 63 = 126 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
DL = 6.0 PSF	
BOT CH.	LL = 0.0 PSF
DL = 7.4 PSF	
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.03")
ALLOWABLE DEFL.(TL) = $L/360$ (0.54")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.03")

CSI: TC=0.27/1.00 (E-F:1), BC=0.27/1.00 (H-J:1),
WB=0.35/1.00 (C-K:1), SS=0.21/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX	MIN	MAX
MT20	618	354
	1667	788
	1987	1856

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.71 (H) (INPUT = 0.90)
JSI METAL= 0.32 (I) (INPUT = 1.00)



Structural component only
DWG# T-2007179

JOB NAME 408170	TRUSS NAME T51	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:29 2020 Page 1
ID:K?TPdHgI0npt1qYdbWfOfZdeG-D9fdR?MBA25fpOV4Kb3eRbKcYx2QzGZIBFKSgzNB1C

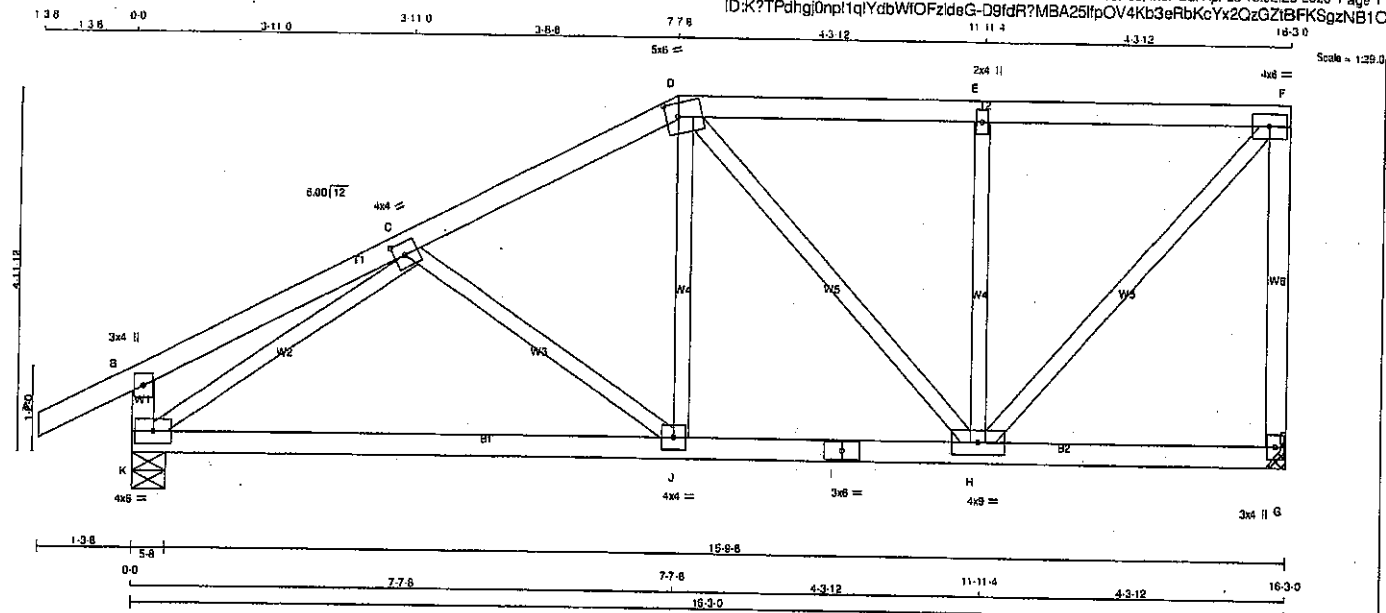

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
G - F	2x4	DRY	No.2
K - B	2x4	DRY	No.2
K - I	2x4	DRY	No.2
I - G	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMV+p	MT20	3.0	4.0
C	TMVW-i	MT20	4.0	4.0 2.00 1.75
D	TTWVW-m	MT20	5.0	6.0 2.25 2.00
E	TMVW-i	MT20	2.0	4.0
F	TMVW-i	MT20	4.0	6.0
G	BMV1+p	MT20	3.0	4.0
H	BMVWVW-i	MT20	4.0	6.0
I	BS-i	MT20	3.0	6.0
J	BMVWVW-i	MT20	4.0	6.0
K	BMVWVW-i	MT20	4.0	6.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER									
BEARINGS									
	FACTORED	MAXIMUM FACTORED	INPUT	REQD					
	GROSS REACTION	GROSS REACTION	BRG	BRG					
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX		
G	886	0	886	0	0	MECHANICAL	5-8		
K	1020	0	1020	0	0	5-8	5-8		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3'-8".

UNFACTORED REACTIONS							
JT	1ST LCASE	MAX	MIN	COMPONENT REACTIONS			
	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
G	633	416 / 0	0 / 0	0 / 0	0 / 0	218 / 0	0 / 0
K	719	485 / 0	0 / 0	0 / 0	0 / 0	234 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.21 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD	LC1 MAX (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO					FR-TO		
A-B	0 / 28	-91.8	-91.8 0.12 (1)	10.00	C-J	-215 / 0	0.08 (1)
B-C	0 / 17	-91.8	-91.8 0.20 (1)	10.00	J-D	0 / 268	0.08 (1)
C-D	-901 / 0	-91.8	-91.8 0.22 (1)	6.21	D-H	-210 / 0	0.14 (1)
D-E	-854 / 0	-91.8	-91.8 0.29 (1)	6.25	H-E	-488 / 0	0.18 (1)
E-F	-854 / 0	-91.8	-91.8 0.29 (1)	6.25	H-F	0 / 961	0.22 (1)
F-G	-858 / 0	0.0	0.0 0.35 (1)	7.81	K-C	-1192 / 0	0.43 (1)
K-B	-261 / 0	0.0	0.0 0.03 (1)	7.81			
K-J	0 / 965	-18.5	-18.5 0.30 (4)	10.00			
J-I	0 / 796	-18.5	-18.5 0.30 (4)	10.00			
I-H	0 / 796	-18.5	-18.5 0.30 (4)	10.00			
H-G	0 / 0	-18.5	-18.5 0.08 (4)	10.00			

TOTAL WEIGHT = 70 lb

DESIGN CRITERIA			
SPECIFIED LOADS:			
TOP CH.	LL =	25.6	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	39.0	PSF

SPACING = 24.0 IN. G/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.54")
CALCULATED VERT. DEFL.(LL) = L/899 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.54")
CALCULATED VERT. DEFL.(TL) = L/999 (0.12")

CS1: TC=0.35/1.00 (F-G:1), BC=0.30/1.00 (J-K:4), WB=0.43/1.00 (C-K:1), SS=0.19/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	618	354	1867
	788	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (C) (INPUT = 0.90)
JSI METAL= 0.40 (C) (INPUT = 1.00)




Structural component only
DWG# T-2007180

JOB NAME 408170	TRUSS NAME G52	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	-------------	----------

Tamarack Pool Truss, Burlington

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Sat Apr 25 13:02:13 2020 Page 1
ID:K?TPdhg0npl1q1YabWfOFzldG-h4ha4W99x740lMAQ9zJ?3x105Y1gpiCBiNutzNB1e

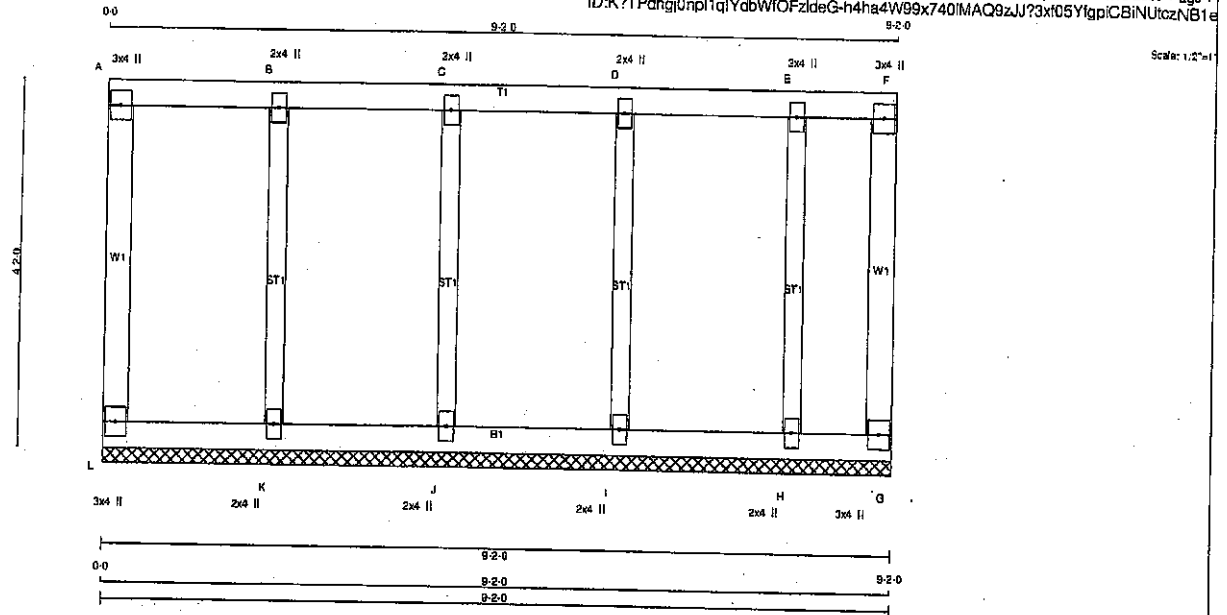

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER
L - A	2x4	DRY	No.2	
A - F	2x4	DRY	No.2	
G - F	2x4	DRY	No.2	
L - G	2x4	DRY	No.2	

ALL WEBS	2x3	DRY	No.2
ALL GABLE WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

GABLE STUDS SPACED AT 2'-0" O.C.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
A - TMV+p	MT20	3.0	4.0		
B, C, D, E					
B - TMW+w	MT20	2.0	4.0		
F - TMV+p	MT20	3.0	4.0		
G - BMV1+p	MT20	3.0	4.0		
H, I, J, K					
H - BMW1+w	MT20	2.0	4.0		
L - BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

PROVIDE ADEQUATE DRAINAGE TO PREVENT PONDING.

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
L-A	-100 / 0	0.0	0.0 0.02 (1)	K-B	-245 / 0	0.09 (1)	
A-B	-4 / 0	-114.3	-114.3 0.08 (1)	J-C	-224 / 0	0.08 (1)	
B-C	-4 / 0	-114.3	-114.3 0.08 (1)	I-D	-238 / 0	0.08 (1)	
C-D	-4 / 0	-114.3	-114.3 0.07 (1)	H-E	-186 / 0	0.06 (1)	
D-E	-4 / 0	-114.3	-114.3 0.07 (1)				
E-F	-4 / 0	-114.3	-114.3 0.05 (1)				
G-F	-54 / 0	0.0	0.0 0.02 (1)				
L-K	0 / 4	-18.5	-18.5 0.02 (4)				
K-J	0 / 4	-18.5	-18.5 0.02 (4)				
J-I	0 / 4	-18.5	-18.5 0.02 (4)				
I-H	0 / 4	-18.5	-18.5 0.02 (4)				
H-G	0 / 4	-18.5	-18.5 0.01 (4)				

TOTAL WEIGHT = 41 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	15.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	48.0	PSF

SPACING = 24.0 IN. O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 0.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2015, OBC 2012, ASG 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.08/1.00 (B-C:1), BC=0.02/1.00 (J-K:4), WB=0.08/1.00 (B-K:1), SS=0.13/1.00 (A-S:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00
FLAT ROOF FACTOR = 0.75

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	618	354	1887

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.17 (B) (INPUT = 0.90)
JSI METAL= 0.07 (K) (INPUT = 1.00)



Structural component only
DWG# T-2007166


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408170	T53S	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:30 2020 Page 1

ID:K?TPdngi0np1ciYcbWfOFzIdeG-hLCdeLNPxLdCtzzhe26Be8YnyLF9WNI5r?1_7zNB1N

Scale = 1:25.0

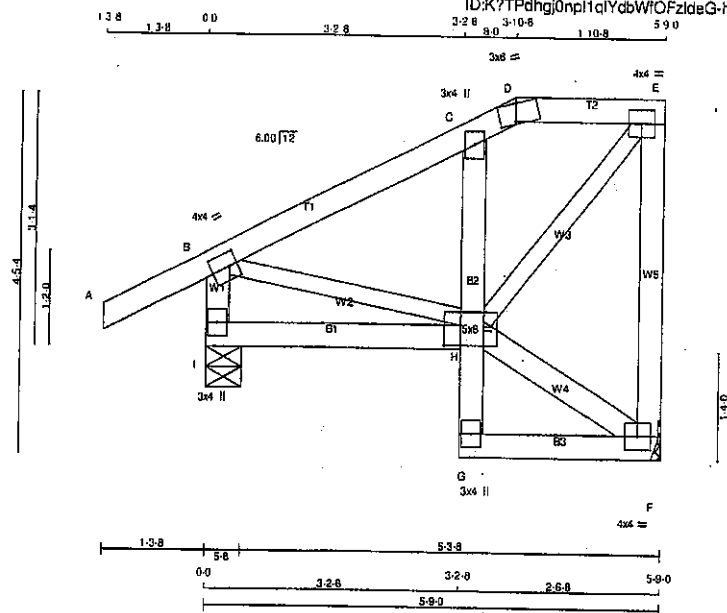

TOTAL WEIGHT = 33 lb

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4 DRY	No.2	SPF		
D - E	2x4 DRY	No.2	SPF		
F - E	2x4 DRY	No.2	SPF		
I - B	2x4 DRY	No.2	SPF		
I - H	2x4 DRY	No.2	SPF		
G - C	2x4 DRY	No.2	SPF		
G - F	2x4 DRY	No.2	SPF		
ALL WEBS	2x4 DRY	No.2	SPF		
EXCEPT					
B - H	2x3 DRY	No.2	SPF		
H - E	2x3 DRY	No.2	SPF		

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-1	MT20	4.0	4.0	2.00	1.25
C	TMV+p	MT20	3.0	4.0		
D	TT-m	MT20	3.0	6.0	0.50	2.50
E	TMVW-1	MT20	4.0	4.0		
F	BMVW1-1	MT20	4.0	4.0		
G	BMV+p	MT20	3.0	4.0		
H	BMVWW-1	MT20	5.0	8.0	3.00	2.50
I	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
F	302	0	302	0
I	457	0	457	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN	COMPONENT REACTIONS	WIND	DEAD	SOIL
F	214	138 / 0	0 / 0	0 / 0	75 / 0	0 / 0
I	320	225 / 0	0 / 0	0 / 0	95 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED	FORCE	VERT. LOAD	LC1	MAX	CS1 (LC)	UNBRAC	MEMB.	MAX. FACTORED	FORCE	MAX	CS1 (LC)
			(LBS)					LENGTH			(LBS)		
FR-TO									FR-TO				
A-B	0 / 28	-91.8	-91.8	0.12	(1)	10.00	H-F	-10 / 0	0.00	(1)			
B-C	-217 / 0	-91.8	-91.8	0.14	(1)	6.25	B-H	0 / 153	0.03	(1)			
C-D	-200 / 0	-91.8	-91.8	0.05	(1)	6.25	H-E	0 / 247	0.08	(1)			
D-E	-157 / 0	-91.8	-91.8	0.03	(1)	6.25							
F-E	-273 / 0	0.0	0.0	0.03	(1)	7.81							
I-B	-420 / 0	0.0	0.0	0.04	(4)	7.81							
I-H	0 / 41	-18.5	-18.5	0.05	(4)	10.00							
G-H	0 / 25	0.0	0.0	0.02	(1)	10.00							
H-C	-186 / 0	0.0	0.0	0.04	(1)	7.81							
G-F	0 / 16	-18.5	-18.5	0.02	(4)	10.00							

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
DL = 6.0	PSF	
BOT CH.	LL = 0.0	PSF
DL = 7.4	PSF	
TOTAL LOAD	= 38.0	PSF

SPACING = 24.0 IN. O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPC 2011, TPC 2014

DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CS1: TC=0.14/1.00 (B-C:1), BC=0.05/1.00 (H-I:4), WB=0.06/1.00 (E-H:1), SS=0.11/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	618	354	1867

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.36 (H) (INPUT = 0.90)
JSI METAL= 0.13 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007181

JOB NAME 408170	TRUSS NAME T54S	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	--------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Sat Apr 25 13:02:31 2020 Page 1
ID:K7TPdghi0npl1q1YdbWfOfZideG-9YmOrgNRnH.LTV7YiCleXkshknMhguyR/KVkrWZzNB1M

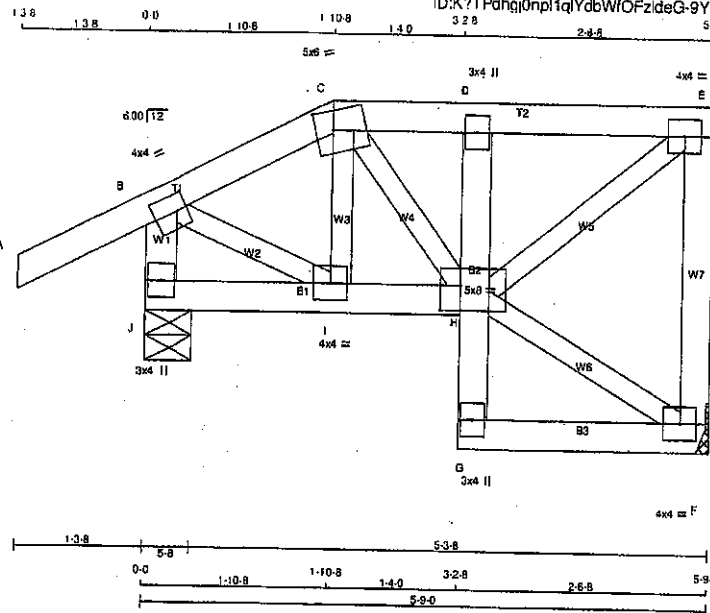

Scale = 1/2" = 1'-0"

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
J - B	2x4	DRY	No.2
J - H	2x4	DRY	No.2
G - D	2x4	DRY	No.2
G - F	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMVW-H	MT20	4.0	4.0	2.00	1.25
C TTWW-m	MT20	5.0	6.0	2.25	2.00
D TMVW-p	MT20	3.0	4.0		
E TMVW-H	MT20	4.0	4.0		
F BMVW-H	MT20	4.0	4.0		
G BMVW-p	MT20	3.0	4.0		
H BMVW-W-H	MT20	5.0	8.0	3.00	2.50
I BMVW-H	MT20	4.0	4.0		
J BMVW-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

FACTORED	GROSS REACTION	MAXIMUM FACTORED	INPUT	RECORD
JT	VERT	HORZ	DOWN	HORZ
F	302	0	302	0
J	456	0	456	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST CASE	MAX/MIN	COMPONENT REACTIONS
JT	COMBINED	SNOW LIVE PERM.LIVE WIND DEAD SOIL
F	214	139 / 0 0 / 0 0 / 0 0 / 0 75 / 0 0 / 0
J	320	225 / 0 0 / 0 0 / 0 0 / 0 95 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MAX. UNBRACED LENGTH FR-TO	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
A-B	0 / 28	-91.8	-91.8	0.12 (1)	10.00	I-C	-50 / 10	0.01 (1)	
B-C	-240 / 0	-91.8	-91.8	0.05 (1)	6.25	C-H	0 / 84	0.02 (1)	
C-D	-240 / 0	-91.8	-91.8	0.05 (1)	6.25	H-F	-9 / 0	0.00 (1)	
D-E	-241 / 0	-91.8	-91.8	0.07 (1)	8.25	H-E	0 / 302	0.07 (1)	
F-E	-276 / 0	0.0	0.0	0.05 (1)	7.81	B-I	0 / 214	0.05 (1)	
J-B	-439 / 0	0.0	0.0	0.04 (1)	7.81				
J-I	0 / 0	-18.5	-18.5	0.02 (4)	10.00				
I-H	0 / 193	-18.5	-18.5	0.04 (1)	10.00				
G-H	0 / 25	0.0	0.0	0.02 (1)	10.00				
H-D	-219 / 0	0.0	0.0	0.01 (1)	7.81				
G-F	0 / 8	-18.5	-18.5	0.03 (4)	10.00				

TOTAL WEIGHT = 31 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
DL = 6.0 PSF	
BOT CH.	LL = 0.0 PSF
DL = 7.4 PSF	
TOTAL LOAD = 39.0 PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.12/1.00 (A-B-1), BC=0.04/1.00 (H-I-1), WB=0.07/1.00 (E-H-1), SS=0.10/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	818	354	1667
	788	1987	1658

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.33 (B) (INPUT = 0.90)
JSI METAL= 0.13 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007182

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T55	1	2	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

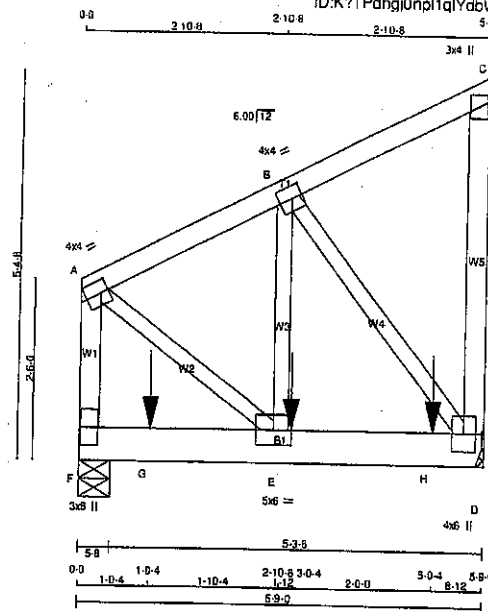

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:32 2020 Page 1
ID:K?TPdhgi0npl1qlybWfOfzideG-dkKm30C3SztJWH74mT9mG3DvHl_9dNX?Z9U_27zNB1L

Scale = 1/25.2

LUMBER	CHORDS	SIZE	DRY	LUMBER	DESCR.
N. L. G. A. RULES	F - A	2x4	DRY	No.2	SPF
	A - C	2x4	DRY	No.2	SPF
	D - C	2x4	DRY	No.2	SPF
	F - D	2x6	DRY	No.2	SPF
	ALL WEBS	2x8	DRY	No.2	SPF
	DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
F - A	12	TOP
A - C	12	TOP
C - D	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F - D	12	SIDE (183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
B - E	6	SIDE (45.8)
2x8	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table in inches)

JT TYPE	PLATES	W	LEN	Y	X
A TMVW-1	MT20	4.0	4.0	2.00	1.25
B TMVW-1	MT20	4.0	4.0	2.00	1.75
C TMV+p	MT20	3.0	4.0		
D BMVW1+p	MT20	4.0	6.0		
E BMVW-1	MT20	5.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
JT	GROSS REACTION	GROSS REACTION	BRG	BRG
F	VERT	DOWN	UP	IN-SX
D	1589	0	0	5-8
	1680	0	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX/MIN	COMPONENT REACTIONS
F	1121	750 / 0	0 / 0
D	1185	792 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (LBS)	LC1	MAX	MAX. FACTORED FORCE (LBS)	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	LC1	MAX
FR-TO	F-A	-1074 / 0	0.0	0.0	0.07 (1)	7.81	A-E	0 / 975	0.12 (1)		
	A-B	-867 / 0	-91.8	-91.8	0.08 (1)	6.25	E-B	0 / 1044	0.13 (1)		
	B-C	-12 / 0	-91.8	-91.8	0.08 (1)	6.25	B-D	-1248 / 0	0.21 (1)		
	D-C	-105 / 0	0.0	0.0	0.02 (1)	7.81					
	F-G	0 / 0	-18.5	-18.5	0.19 (1)	10.00					
	G-E	0 / 0	-18.5	-18.5	0.19 (1)	10.00					
	E-H	0 / 786	-18.5	-18.5	0.21 (1)	10.00					
	H-D	0 / 786	-18.5	-18.5	0.21 (1)	10.00					

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX	MAX	FACE	DIR.	TYPE	HEEL	CONN.
E	3-0-4	-877	-877	---	BACK	VERT	TOTAL	---	C1
G	1-0-4	-877	-877	---	BACK	VERT	TOTAL	---	C1
H	5-0-4	-880	-880	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 34 = 67 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.19")
CALCULATED VERT. DEFL. (LL) = L/999 (0.01")
ALLOWABLE DEFL. (TL) = L/360 (0.19")
CALCULATED VERT. DEFL. (TL) = L/999 (0.01")

CSI: TC=0.07/1.00 (A-F:1), BC=0.21/1.00 (D-E:1), WB=0.21/1.00 (B-D:1), SSI=0.20/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP (DRY)	SHEAR (PL)	SECTION (PL)
MT20	818	354
	1687	788
	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.72 (A) (INPUT = 0.50)
JSI METAL = 0.18 (D) (INPUT = 1.00)



Structural component only
DWG# T-20071831/2


CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T55	1	2	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington


Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:32 2020 Page 2
ID:K?TPdhaj0npl1qYdbWlOFzldG-dkkKm30Q3SzTJWH74mT9mG3DvHl.9dNX?Z9U.2?zNB1L

PLATES (table is in inches)
JT TYPE PLATES W LEN Y X
F BMV1+p MT20 3.0 6.0



Structural component only
DWG# T-2007183

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	T56	1	2	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

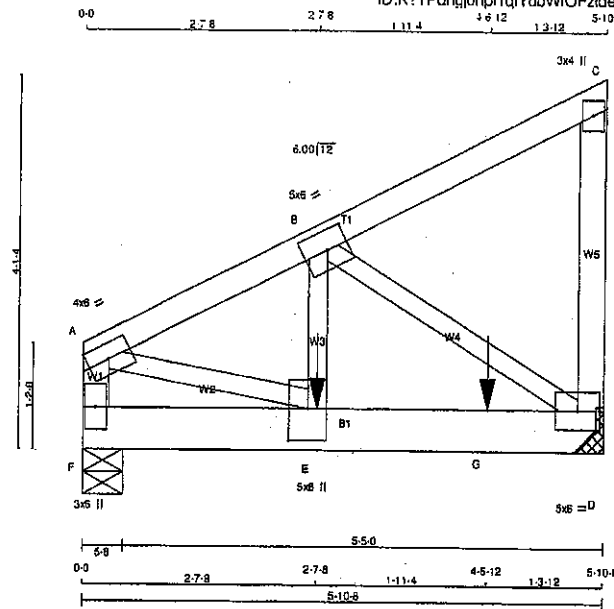

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
F - A	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
D - C	2x4	DRY	No.2	SPF	
F - D	2x6	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
F - A	12	TOP
A - C	12	TOP
C - D	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F - D	5	SIDE(549.3)
WEBS : (0.122"x3") SPIRAL NAILS		
B - E	2	SIDE(259.5)
2x3	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-i	MT20	4.0	6.0		Edge
B	TMVW-i	MT20	5.0	6.0	2.50	2.75
C	TMV+p	MT20	3.0	4.0		
D	BMVW-i	MT20	5.0	6.0		
E	BMVW-i	MT20	5.0	8.0	4.25	2.50

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	HORZ
F	2334	0	2334	0
D	2733	0	2733	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 4-0.

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	1846	1103 / 0	0 / 0	0 / 0	0 / 0	0 / 0	543 / 0	0 / 0
D	1929	1250 / 0	0 / 0	0 / 0	0 / 0	0 / 0	639 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.20 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)
FR-TO								
F-A	-2316 / 0	0.0	0.0	0.13 (1)	7.37	A-E	0 / 2898	0.36 (1)
A-B	-3101 / 0	-91.8	-91.8	0.08 (1)	5.20	E-B	0 / 2898	0.36 (1)
B-C	-5 / 0	-91.8	-91.8	0.08 (1)	10.00	B-D	-3303 / 0	0.42 (1)
D-C	-138 / 0	0.0	0.0	0.02 (1)	7.81			
F-E	0 / 0	-18.5	-18.5	0.01 (4)	10.00			
E-G	0 / 2779	-18.5	-18.5	0.07 (1)	10.00			
G-D	0 / 2779	-18.5	-18.5	0.07 (1)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	2-7-8	-3101	-3101	---	BACK	VERT	TOTAL	---	C1
G	4-6-12	-1318	-1318	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 28 = 57 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
DL = 6.0	PSF	
BOT CH.	LL = 0.0	PSF
DL = 7.4	PSF	
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.02")
ALLOWABLE DEFL.(TL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.04")

CSI: TO=0.13/1.00 (A-F:1), BC=0.57/1.00 (D-E:1), WB=0.42/1.00 (B-D:1), SS=0.27/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354 1867 788 1987 1656	

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (E) (INPUT = 0.80)
JSI METAL = 0.50 (E) (INPUT = 1.00)




JOB NAME 408170	TRUSS NAME T56	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:33 2020 Page 2
ID:K?TPdhq0npl1qYdbWlOFzIdG-6wu8GMPIDGbA8RiGJAq?cHm499FsmS8apDXbHzNB1K

PLATES (table is in inches)
JT TYPE PLATES W LEN Y X
F BMV1+p MT20 3.0 6.0
Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.




Structural component only
DWG# T-2007184 3/2

JOB NAME 408168 Tamarack Roof Truss, Burlington	TRUSS NAME PB1	QUANTITY 3	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
--	--------------------------	----------------------	-----------------	--------------------------------------	-------------	----------

Version 8.310 S Oct 26 2019 MITek Industries, Inc. Sat Apr 25 12:34:46 2020 Page 1
ID:DMCubINVR6TstFoe31v6I_zns11-PDfPME2p5alfFmuAaG4kD6hBP9Gw?nTyypaZzNBRN

Scale = 1/23.3

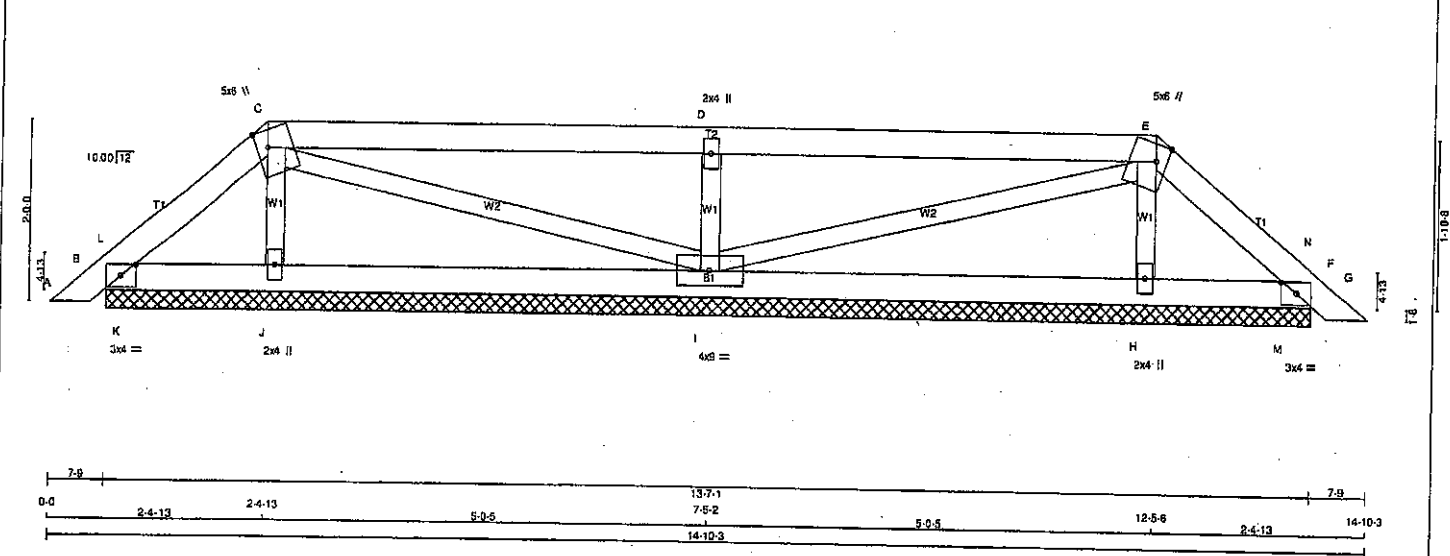

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER
A - C	2x4	DRY
C - E	2x4	DRY
E - G	2x4	DRY
B - F	2x4	DRY

ALL WEBS 2x3 DRY
DRY: SEASONED LUMBER.

DESCR.

SPF
SPF
SPF
SPF

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	RECORD BRG
	VERT	HORZ	DOWN	HORZ		
B	169	0	169	0	13-7-1	13-7-1
F	169	0	169	0	13-7-1	13-7-1
J	288	0	288	0	13-7-1	13-7-1
I	583	0	583	0	13-7-1	13-7-1
H	288	0	288	0	13-7-1	13-7-1

UNFACTORED REACTIONS

JT	1ST LOOSE	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
B	116	93/0	0/0	0/0	0/0	23/0	0/0
F	116	93/0	0/0	0/0	0/0	23/0	0/0
J	207	118/0	0/0	0/0	0/0	89/0	0/0
I	481	327/0	0/0	0/0	0/0	154/0	0/0
H	207	118/0	0/0	0/0	0/0	89/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, F, J, I, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (FT)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (FT)	MAX. FACTORED FORCE (LBS)
FR-TO				FR-TO			
A-B	0/14	-91.8	-91.8 0.02 (1)	10.00	J-C	-194/0	0.03 (1)
B-L	-31/4	-91.8	-91.8 0.01 (1)	6.25	C-I	-22/0	0.01 (1)
L-C	-60/0	-91.8	-91.8 0.03 (1)	6.25	I-D	-576/0	0.08 (1)
C-D	-9/0	-91.8	-91.8 0.39 (1)	10.00	D-E	-22/0	0.01 (1)
D-E	-9/0	-91.8	-91.8 0.39 (1)	10.00	E-H	-194/0	0.03 (1)
E-N	-60/0	-91.8	-91.8 0.03 (1)	6.25	H-L	-121/0	0.00 (1)
N-F	-31/4	-91.8	-91.8 0.01 (1)	6.25	M-N	-121/0	0.00 (1)
F-G	0/14	-91.8	-91.8 0.02 (1)	10.00			
B-K	0/42	-18.5	-18.5 0.04 (1)	10.00			
K-J	0/42	-18.5	-18.5 0.07 (4)	10.00			
J-I	0/29	-18.5	-18.5 0.10 (4)	10.00			
I-H	0/29	-18.5	-18.5 0.10 (4)	10.00			
H-M	0/42	-18.5	-18.5 0.07 (4)	10.00			
M-F	0/42	-18.5	-18.5 0.04 (1)	10.00			

TOTAL WEIGHT = 3 X 45 = 135 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.8 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(5% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

CS: TC=0.39/1.00 (C-D:1), BC=0.10/1.00 (H-I:4), WB=0.08/1.00 (D-I:1), SS=0.22/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PS)	(PL)	(PL)	(PL)
MAX	MIN	MAX	MIN
MT20	618	354	1687 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.30 (D) (INPUT = 0.90)
JSI METAL = 0.12 (D) (INPUT = 1.00)



Structural component only
DWG# T-2007128

JOB NAME 408169	TRUSS NAME PB20	QUANTITY 3	PLY 1	JOB DESC. GREEN PARK HOMES	TRUSS DESC.	DRWG NO.
Tamarack Roof Truss, Burlington				Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:22 2020 Page 1 ID:K?TPdhgJ0np/1qYdbWIOFz/deG-mib6FuqXVExPlkFUJ_VFTVITIPKw7jvF6AJozNBDh		
Scale = 1:18.2						

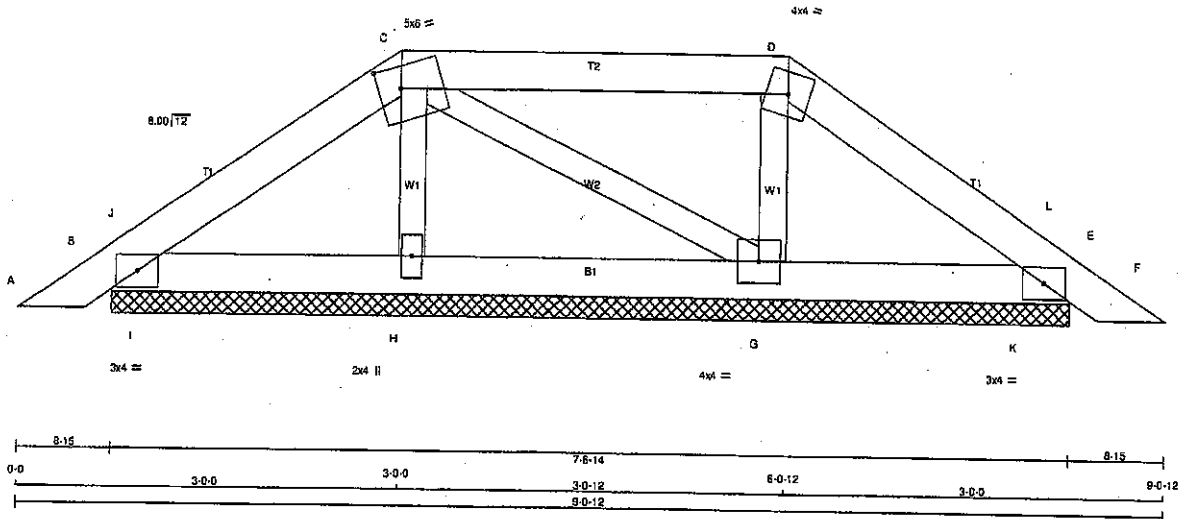

LUMBER

N. L. G. A. RULES

CHORDS SIZE

A - C 2x4 DRY No.2

C - D 2x4 DRY No.2

D - F 2x4 DRY No.2

B - E 2x4 DRY No.2

ALL WEBS 2x3 DRY No.2

DRY: SEASONED LUMBER.

DESCR.

SPF

SPF

SPF

SPF

SPF

SPF

PLATES (table is in inches)

JT TYPE PLATES

B TMB1-1 MT20 3.0 4.0

C TTWW-m MT20 5.0 6.0 2.00 2.00

D TTWW-m MT20 4.0 4.0

E TMB1-1 MT20 3.0 4.0

G BMWW1-1 MT20 4.0 4.0

H BMW1-w MT20 2.0 4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	UP/LIFT	IN-SX
B	221	0	0	7-6-14
E	209	0	0	7-6-14
H	248	0	0	7-6-14
G	280	0	0	7-6-14

UNFACTORED REACTIONS

1ST LCASE	MAX/MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
B	154	113 / 0	0 / 0	0 / 0	0 / 0	41 / 0	0 / 0
E	146	106 / 0	0 / 0	0 / 0	0 / 0	39 / 0	0 / 0
H	176	109 / 0	0 / 0	0 / 0	0 / 0	67 / 0	0 / 0
G	198	127 / 0	0 / 0	0 / 0	0 / 0	71 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LOAD LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LOAD LC1 (LC)
FR-TO				FR-TO			
A-B	0 / 15	-91.8	-91.8 0.03 (1)	H-C	-176 / 0	0.03 (1)	10.00
B-J	-83 / 0	-91.8	-91.8 0.01 (1)	C-G	-21 / 0	0.00 (1)	6.25
J-C	-74 / 0	-91.8	-91.8 0.05 (1)	G-D	-198 / 0	0.03 (1)	6.25
C-D	-30 / 0	-91.8	-91.8 0.15 (1)	I-J	-121 / 0	0.00 (1)	6.25
D-L	-54 / 0	-91.8	-91.8 0.05 (1)	K-L	-123 / 0	0.00 (1)	6.25
L-E	-41 / 0	-91.8	-91.8 0.01 (1)				
E-F	0 / 15	-91.8	-91.8 0.03 (1)				
B-I	0 / 60	-18.5	-18.5 0.05 (1)				
I-H	0 / 60	-18.5	-18.5 0.05 (1)				
H-G	0 / 48	-18.5	-18.5 0.03 (1)				
G-K	0 / 43	-18.5	-18.5 0.05 (1)				
K-E	0 / 43	-18.5	-18.5 0.05 (1)				

TOTAL WEIGHT = 3 X 25 = 75 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.15/1.00 (C-D:1), BC=0.06/1.00 (B-I:1), WB=0.03/1.00 (D-G:1), SS=0.11/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 364 1667 788 1987 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.18 (B) (INPUT = 0.90)
JSI METAL= 0.04 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007144

JOB NAME 408168	TRUSS NAME J1	QUANTITY 19	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	------------------	----------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:34:43 2020 Page 1
ID:DMCubINVR8TstFoe31v6L_zns1i-?e_pnkBAWAC7oc1JURIN76ba9zNy3aYKn_h9zEzNBRC

Scale = 1/22.9

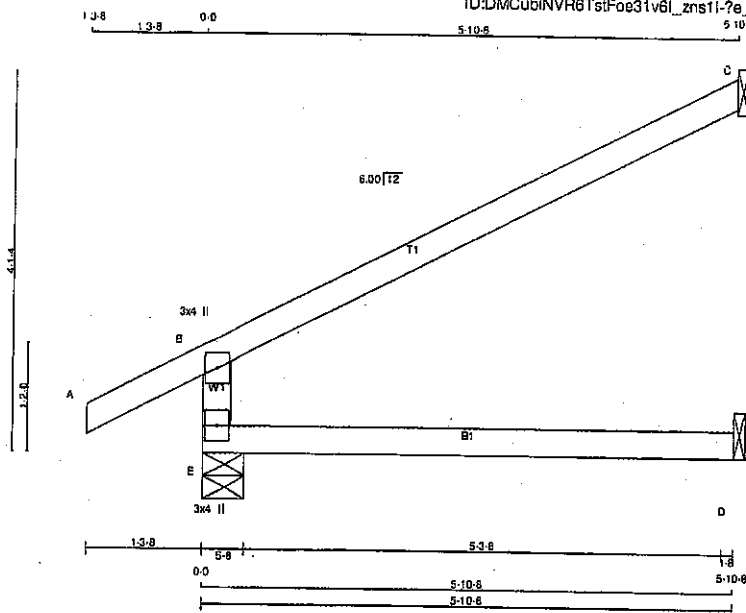

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
E - B	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
E	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	HORZ
E	525	0	525	0
C	202	0	202	0
D	45	0	45	0

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	369	257 / 0	0 / 0	0 / 0	0 / 0	111 / 0	0 / 0	0 / 0
C	139	113 / 0	0 / 0	0 / 0	0 / 0	26 / 0	0 / 0	0 / 0
D	38	0 / 0	0 / 0	0 / 0	0 / 0	38 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	WEBS	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO		FROM TO			FR-TO		
E-B	-481 / 0	0.0	0.0	0.13 (4)	7.81		
A-B	0 / 28	-91.8	-91.8	0.12 (1)	10.00		
B-C	-30 / 0	-91.8	-91.8	0.54 (1)	6.25		
E-D	0 / 0	-18.5	-18.5	0.13 (4)	10.00		

TOTAL WEIGHT = 19 X 17 = 319 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = 1/360 (0.20")
CALCULATED VERT. DEFL.(LL) = 1/999 (0.00")
ALLOWABLE DEFL.(TL) = 1/360 (0.20")
CALCULATED VERT. DEFL.(TL) = 1/999 (0.03")

CSK: TC=0.54/1.00 (B-C:1), BC=0.13/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1987 788 1987 1655

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.19 (E) (INPUT = 0.99)
JSI METAL= 0.13 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007126

JOB NAME 408168	TRUSS NAME J2	QUANTITY 8	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 5 Oct 2019 Mitek Industries, Inc. Sat Apr 25 12:34:44 2020 Page 1
ID:DMCubINVR6TstFoe3iv6l_zns1l-TrYB_gCoHTK_PxcV29DcgJ8qNjco1oU?eQjVhzNBPR

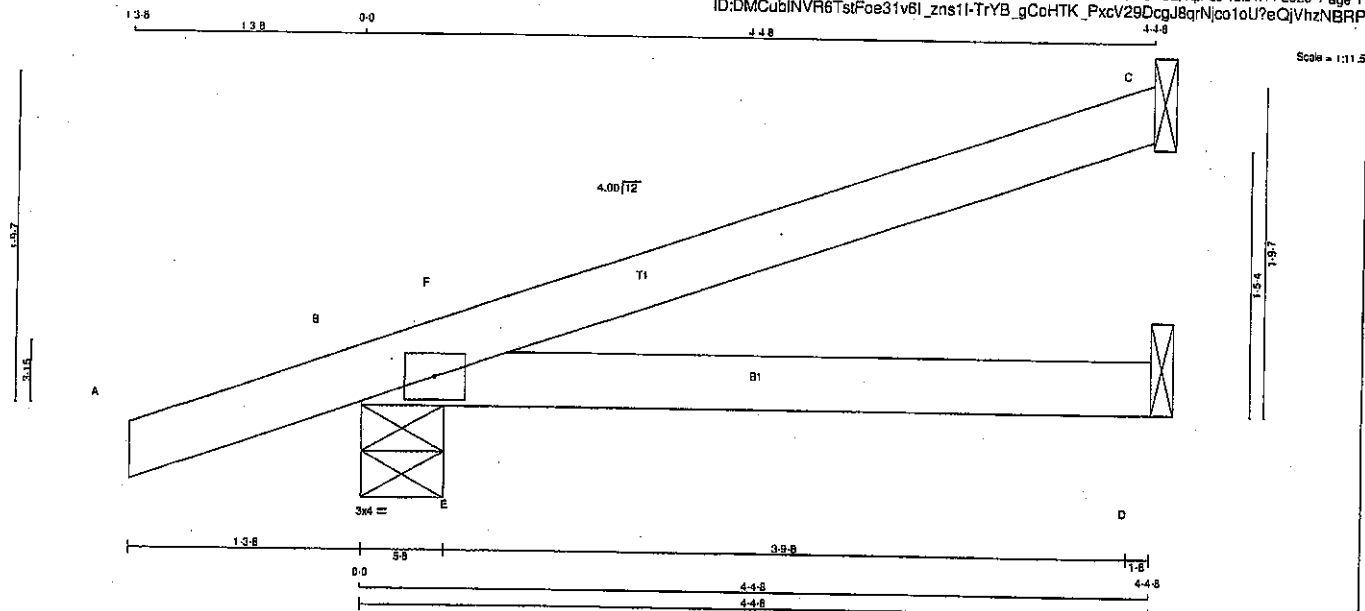

TOTAL WEIGHT = 8 X 12 = 96 lb [M]

LUMBER

N.L.G.A. RULES

CHORDS SIZE
A - C 2x4 DRY
B - D 2x4 DRY

LUMBER
No.2
No.2

DESCR.
SPF
SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE PLATES W LEN Y X
B TMB1-1 MT20 3.0 4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ
C	174	0	174	0
B	364	0	364	0
D	68	0	68	0

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LOASE	MAX./MIN. COMPONENT REACTIONS	PERM. LIVE	WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE			
C	120	83/0	0/0	0/0	27/0	0/0
B	255	160/0	0/0	0/0	75/0	0/0
D	50	19/0	0/0	0/0	32/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MAX. FACTORED VERT. LOAD (LC2)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC3)	MAX. FACTORED VERT. LOAD (LC4)	
FR-TO		FROM TO			FR-TO				
A-B	0 / 18	-91.8	-91.8	0.11 (1)	10.00	E-F	-194 / 7	0.00 (1)	
B-F	-14 / 0	-91.8	-91.8	0.05 (4)	8.25				
F-C	0 / 2	-91.8	-91.8	0.22 (1)	10.00				
B-E	0 / 0	-18.5	-18.5	0.17 (1)	10.00				
E-D	0 / 0	-18.5	-18.5	0.17 (1)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 38.0 PSF

SPACING = 24.0 IN./C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TG=0.22/1.00 (C-F:1), BC=0.17/1.00 (D-E:1), WB=0.00/1.00 (E-F:1), SSI=0.16/1.00 (B-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP = 0.24 (B) (INPUT = 0.80)
JSI METAL = 0.07 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007127

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408169	J20S	3	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 12:49:21 2020 Page 1
ID:K?TPdngi0npl1qlydbWfOfzdeG-I21k2Ypvkxpy7j92wrSGIGzsv3mg3ZgbMdnLzNBD

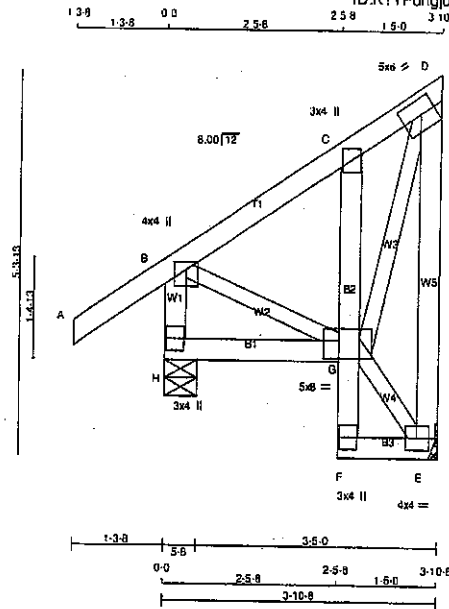

Scale = 1/20.0

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
H - B	2x4	DRY	No.2	SPF
A - D	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
F - C	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.25	2.00
C	TMV+p	MT20	3.0	4.0		
D	TMVW+1	MT20	5.0	8.0	2.50	2.50
E	BMVW+1	MT20	4.0	4.0		
F	BMV+p	MT20	3.0	4.0		
G	BMVW+1	MT20	5.0	8.0	3.00	2.50
H	BMV+1	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
H	332	0	332	0
E	206	0	206	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

1ST LOASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT							
H	232	166 / 0	0 / 0	0 / 0	0 / 0	66 / 0	0 / 0
E	145	95 / 0	0 / 0	0 / 0	0 / 0	50 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MEMB.	FORCE (LBS)
FR-TO		FROM TO	FR-TO	
H-B	-307 / 0	0.0 0.0 0.03 (1)	B-G	0 / 83
A-B	0 / 35	-91.8 -91.8 0.14 (5)	E-D	-184 / 0
B-C	-89 / 0	-91.8 -91.8 0.07 (1)	G-E	-14 / 0
C-D	-100 / 0	-91.8 -91.8 0.06 (1)	G-D	0 / 220
H-G	0 / 0	-18.5 -18.5 0.04 (4)		
F-G	0 / 12	0.0 0.0 0.02 (1)		
G-C	-218 / 0	0.0 0.0 0.02 (1)		
F-E	0 / 9	-18.5 -18.5 0.01 (4)		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 3 X 29 = 86 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCG 2010, NBCG 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B-5), BC=0.04/1.00 (G-H-4),
WB=0.05/1.00 (D-E-1), SS=0.09/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)	(PL)
MAX	MIN	MAX	MIN
MT20	618	354	1667 788 1987 1655

PLATE PLACEMENT TOL. = 0.250 Inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.21 (B) (INPUT = 0.90)
JSI METAL= 0.07 (C) (INPUT = 1.00)




Structural component only
DWG# T-2007143

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408170	J40	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Sat Apr 25 13:02:14 2020 Page 1
ID:K?TPdhg0nph1qYdbWfOfzIdG-9GFyHsAniRCiMWWichqYYGUjuVsSPHGLQM61Q2zNB1c

Scale = 1:25.2

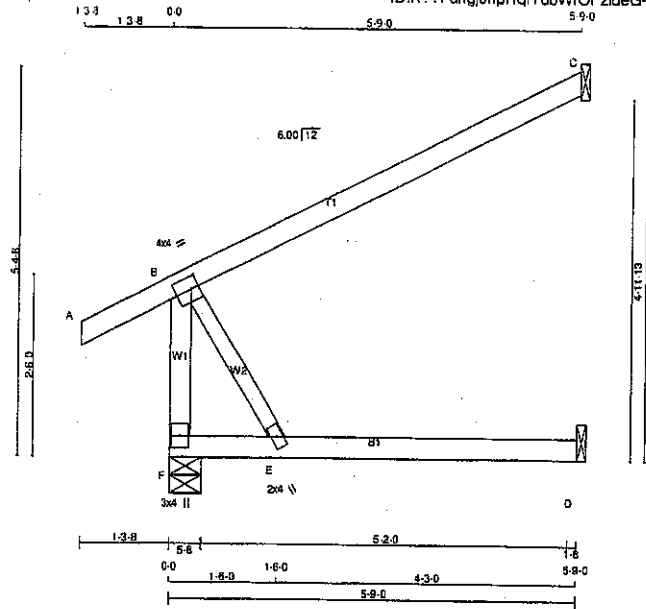

TOTAL WEIGHT = 20 lb

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
F - B	2x4 DRY	No.2	SPF
A - C	2x4 DRY	No.2	SPF
F - D	2x4 DRY	No.2	SPF

ALL WEBS 2x3 DRY No.2
DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-1	MT20	4.0	4.0	2.00	1.25
E	BMVW-w	MT20	2.0	4.0		
F	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQ'D BRG
JT	VERT	HORZ	DOWN	HORZ
F	441	0	441	0
C	264	0	264	0
D	53	0	53	0

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST CASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	310	217 / 0	0 / 0	0 / 0	0 / 0	93 / 0	0 / 0	0 / 0
C	182	147 / 0	0 / 0	0 / 0	0 / 0	35 / 0	0 / 0	0 / 0
D	43	0 / 0	0 / 0	0 / 0	0 / 0	43 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LG)	
FR-TO		FROM TO		FR-TO			
F-B	-388 / 0	0.0	0.0 0.05 (1)	7.81	B-E	0 / 0 0.00 (1)	
A-B	0 / 28	-91.8	-91.8 0.12 (1)	10.00			
B-C	0 / 0	-91.8	-91.8 0.52 (1)	10.00			
F-E	0 / 0	-18.5	-18.5 0.14 (4)	10.00			
E-D	0 / 0	-18.5	-18.5 0.18 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2018 AMENDMENT)
- CSA 088-09, CSA 085-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/899 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/899 (0.05")

CSI: TO=0.52/1.00 (B-C:1), BC=0.18/1.00 (D-E:4), WB=0.00/1.00 (B-E:1), SSI=0.18/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1967 1656

PLATE PLACEMENT TOL = 0.250 inches


PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.24 (B) (INPUT = 0.90)
JSI METAL = 0.07 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007167

Structural component only
DWG# T-2007162

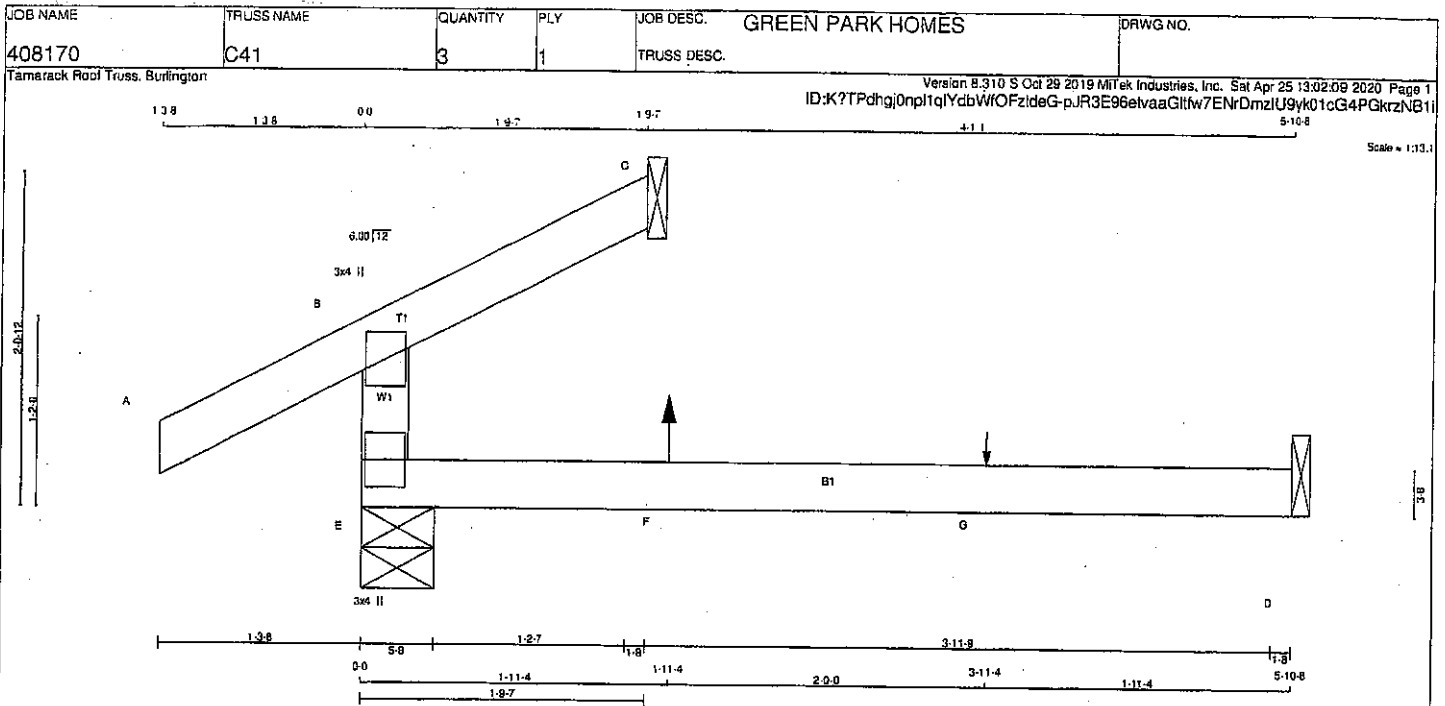

LUMBER

N. L. G. A. RULES
CHORDS SIZE LUMBER
E - B 2x4 DRY No.2
A - C 2x4 DRY No.2
E - D 2x4 DRY No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
E	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	RECORD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
E	284	0	284	0	5-8	5-8
C	63	0	63	0	1-8	1-8
D	44	0	52	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97781H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE		MAX. MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM. LIVE			
E	200	137 / 0	0 / 0	0 / 0	0 / 0	82 / 0	0 / 0
C	46	21 / 0	0 / 0	0 / 0	0 / 0	25 / 0	0 / 0
D	35	0 / 3	0 / 0	0 / 0	0 / 0	37 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (7)

MEMB.	CHORDS		FACTORED		WEBS		MAX. FACTORED	
	MAX. FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX	MAX. UNBRACED LENGTH FR-TO	MEMB. FORCE (LBS)	MAX	CSI (LC)
E-B	-227 / 0	0.0	0.0	0.11 (4)	7.81			
A-B	0 / 28	-91.8	-91.8	0.12 (1)	10.00			
B-C	-9 / 9	-91.8	-91.8	0.08 (4)	10.00			
E-F	0 / 0	-18.5	-18.5	0.14 (4)	10.00			
F-G	0 / 0	-18.5	-18.5	0.14 (4)	10.00			
G-D	0 / 0	-18.5	-18.5	0.14 (4)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
F	1-11-4	7	1	12	BACK	VERT	TOTAL		C1
G	3-11-4	1	1		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL) = L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.12/1.00 (A-B:1), BC=0.14/1.00 (D-E:4),
WB=0.00/1.00 (n/a:0), SS=0.09/1.00 (A-B:1)

DOL LUMBER=0.98 NAIL=0.98 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.10 (E) (INPUT = 0.90)
JSI METAL= 0.06 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007163

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408170	C42	3	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

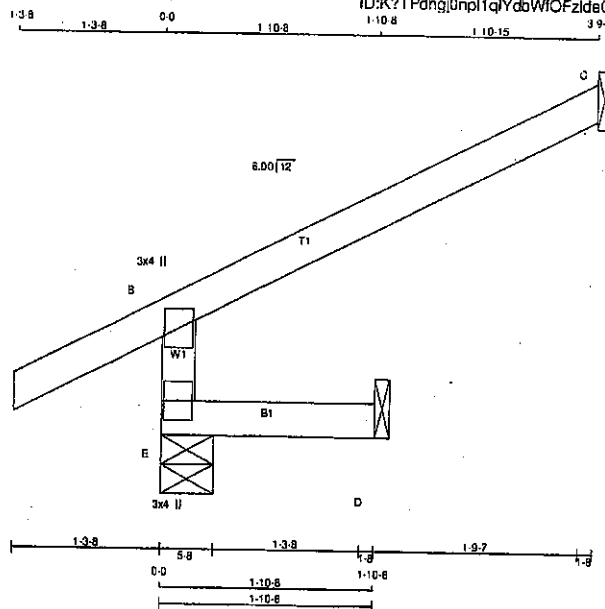

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER
E - B	2x4	DRY	No.2		
A - C	2x4	DRY	No.2		
E - D	2x4	DRY	No.2		

DRY: SEASONED LUMBER.

PLATES (table in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
E	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ		
C	361	0	361	0	5-8	5-8
D	130	0	130	0	1-8	1-8
E	16	0	17	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST CASE		MAX/MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM. LIVE			
E	250	190 / 0	0 / 0	0 / 0	0 / 0	60 / 0	0 / 0
C	90	73 / 0	0 / 0	0 / 0	0 / 0	17 / 0	0 / 0
D	12	0 / 0	0 / 0	0 / 0	0 / 0	12 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 MAX (PLF) CSI (LC)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED FORCE (LBS) CSI (LC)
FR-TO		FROM TO		
E-B	-342 / 0	0.0 0.0 0.01 (4) 7.81		
A-B	0 / 28	-91.8 -91.8 0.13 (5) 10.00		
B-C	-19 / 0	-91.8 -91.8 0.22 (1) 6.25		
E-D	0 / 0	-18.5 -18.5 0.02 (4) 10.00		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 3 X 10 = 29 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2010, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 088-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.22/1.00 (B-C:1), BC=0.02/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.15/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 789 1997 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.14 (E) (INPUT = 0.90)
JSI METAL = 0.09 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007164

LUL/LUS/LJS/HUS/HHUS/HGUS

Standard and Double-Shear Joist Hangers



This product is preferable to similar connectors because of
a) easier installation, b) higher capacities, c) lower installed
cost, or a combination of these features.

Most hangers in this series have double-shear nailing — an innovation that distributes the load through two points on each joist nail for greater strength. This allows for fewer nails, faster installation, and the use of all common nails for the same connection. (Do not bend or remove tabs)

Double-shear hangers range from the light capacity LUS hangers to the highest capacity HGUS hangers. For medium load truss applications, the HUS offers a lower cost alternative and easier installation than the HGUS hangers, while providing greater load capacity and bearing than the LUS.

Material: See table on pp. 258–259.

Finish: Galvanized. Some products available in stainless steel or ZMAX® coating; see Corrosion Information, pp. 20–24.

Installation:


- Use all specified fasteners; see General Notes.
- Nails must be driven at an angle through the joist or truss into the header to achieve the tabulated resistances (except LUL).
- Where 16d commons are specified, 10d commons may be used at 0.83 of the tabulated factored resistance.
- Not designed for welded or nailer applications.
- With single ply 2x carrying members, use 10d x 1½" nails into the header and 10d commons into the joist, and reduce the resistance to 0.64 of the table value where 16d nails are specified and 0.77 where 10d nails are specified.

Options:


- LUS, LJS, LUL and HUS hangers cannot be modified.
- Other sizes available; consult your Simpson Strong-Tie representative.
- See Hanger Options information on p. 126.




Double-Shear
Nailing
Top View




Double-Shear
Nailing
Side View;
Do not
bend tab




Dome Double-Shear
Nailing Side View
(available on
some models)
U.S. Patent 5,603,580




LUS28




LU26L




HUS210
(HUS26, HUS28,
and HHUS similar)



HGUS28-2




HHUS210-2



LJS26DS

Typical HUS26
Installation
with Reduced
Heel Height
(Truss Designer
to provide
fastener quantity
for connecting
multiple members
together)



Plated Truss Connectors

LUL/LUS/LJS/HUS/HHUS/HGUS**HHUS/HGUS**

See Hanger Options information on pp. 125–127.


HHUS — Sloped and/or Skewed Seat

- HHUS hangers can be skewed to a maximum of 45° and/or sloped to a maximum of 45°
- For skew only, maximum factored down resistance is 0.85 of the table value
- For sloped only or sloped and skewed hangers, the maximum factored down resistance is 0.72 of the table value
- Uplift resistances for sloped/skewed conditions are 0.62 of the table value
- The joist must be bevel-cut to allow for double-shear nailing

HGUS — Skewed Seat

- HGUS hangers can be skewed only to a maximum of 45°. Factored resistances are:

HGUS Seat Width	Joist	Down Resistance	Uplift
W < 2"	Bevel or square cut	0.62 of table value	0.46 of table value
2" < W < 6"	Bevel cut	0.67 of table value	0.41 of table value
2" < W < 6"	Square cut	0.46 of table value	0.41 of table value
W > 6"	Bevel cut	0.75 of table value	0.41 of table value

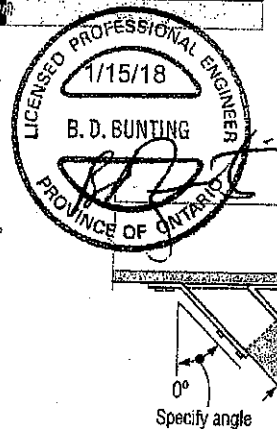

Top View HHUS Hanger
Skewed Right
(joist must be bevel cut)
All joist nails installed on the
outside angle (non-acute side).

Standard and Double-Shear Joist Hangers (cont.)

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32–34 for more information.

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance			
		W	H	B	d _a ³	Header	Joist	D.Fir-L		S-P-F	
								Uplift	Normal	Uplift	Normal
								(K _D = 1.15)	(K _D = 1.00)	(K _D = 1.15)	(K _D = 1.00)
								lb.	lb.	lb.	lb.
Single 2x Sizes											
LUS24	18	1 1/8	3 1/4	1 1/4	2 1/4	(4) 10d	(2) 10d	710	1625	645	1155
								366	723	287	514
LU24L	22	1 1/8	3	1 1/4	2 1/8	(4) 10d	(2) 10d x 1 1/2"	360	1020	320	725
								180	454	142	322
LU26L	22	1 1/8	5	1 1/4	4 1/4	(6) 10d	(4) 10d x 1 1/2"	720	1605	645	1140
								320	714	287	507
LUS26	18	1 1/8	4 3/4	1 1/4	3 3/4	(4) 10d	(4) 10d	1420	2170	1290	1630
								832	985	574	725
HUS26	16	1 1/8	5 1/4	3	3 1/8	(14) 16d	(6) 16d	2705	4940	2065	3875
								1130	2197	920	1724
LJS26DS	18	1 1/8	5	3 1/2	4 1/4	(16) 16d	(6) 16d	2055	4265	1460	4115
								914	1897	649	1831
HGUS26	12	1 1/8	5 1/4	5	4 1/4	(20) 16d	(8) 16d	2685	6625	2685	5700
								1196	2951	1196	2535
LU28L	20	1 1/8	6 3/4	1 1/4	5 1/4	(8) 10d	(6) 10d x 1 1/2"	1140	2185	1020	1550
								507	972	454	689
LUS28	18	1 1/8	6 3/4	1 1/4	3 3/4	(6) 10d	(4) 10d	1420	2520	1290	1790
								632	1121	574	786
HUS28	16	1 1/8	7 1/4	3	6 1/8	(22) 16d	(8) 16d	3605	5365	2675	4345
								1604	2386	1190	1933
HGUS28	12	1 1/8	7 1/4	5	6 1/4	(36) 16d	(12) 16d	3310	7675	3310	6900
								1474	3419	1474	3073
LU210L	20	1 1/8	8	1 1/4	7 1/4	(10) 10d	(6) 10d x 1 1/2"	1140	2495	1020	1770
								507	1110	454	787
LUS210	18	1 1/8	7 1/4	1 1/4	3 3/4	(8) 10d	(4) 10d	1420	2785	1290	2210
								632	1239	574	983

1. Factored uplift resistances have been increased 15% for wind or earthquake loading; no further increase is allowed.
2. Designer must ensure that hanger is compatible with truss when reduced heel height is used.
3. d_a is the distance from the bearing seat to the top joist nail.
4. Resistances shown require a minimum 2-ply girder truss. For fastening to single-ply truss request technical bulletin FC-N10TRSSCN and/or see installation notes.
5. Nails: 16d = 0.162" dia. x 3 1/2" long. See pp. 27–28 for other nail sizes and information.

Face-Mount Hangers

SIMPSON
Strong-Tie

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32-34 for more information.

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance			
		W	H	B	d _o ²	Header	Joist	D.Fir-L		S-P-F	
								Uplift	Normal	Uplift	Normal
								(K _p = 1.15) lb.	(K _p = 1.00) lb.	(K _p = 1.15) lb.	(K _p = 1.00) lb.
Double 2x Sizes											
LUS24-2	18	3 3/8	3 3/8	2	1 1/2	(4) 16d	(2) 16d	835	2020	590	1435
LUS26-2	18	3 3/8	4 3/8	2	4	(4) 16d	(4) 16d	3.71	8.99	2.62	6.38
								1720	2595	1545	1920
HHUS26-2	14	3 3/8	5 3/8	3	3 15/16	(14) 16d	(6) 16d	7.65	11.54	6.87	8.54
								2850	7335	2065	5205
HGUS26-2	12	3 3/8	5 3/8	4	4 1/8	(20) 16d	(8) 16d	12.68	32.63	9.20	23.15
								4385	8950	3110	6355
LUS28-2	18	3 3/8	7	2	4	(6) 16d	(4) 16d	19.51	39.81	13.83	28.27
								1720	3325	1545	2675
HHUS28-2	14	3 3/8	7 3/8	3	6 3/8	(22) 16d	(8) 16d	7.65	14.79	6.87	11.45
								3765	8940	2675	6345
HGUS28-2	12	3 3/8	7 3/8	4	6 3/8	(36) 16d	(12) 16d	16.75	39.77	11.90	28.22
								6070	12980	4310	9215
LUS210-2	18	3 3/8	9	2	6	(8) 16d	(6) 16d	27.00	57.74	19.17	40.99
								2580	4500	2320	3195
HHUS210-2	14	3 3/8	9 3/8	3	8	(30) 16d	(10) 16d	11.48	20.02	10.32	14.21
								4670	9660	4235	7000
HGUS210-2	12	3 3/8	9 3/8	4	8 3/8	(46) 16d	(16) 16d	20.77	42.97	18.84	31.14
								6840	14015	4855	10270
								30.43	62.34	21.60	45.69
Triple 2x Sizes											
HGUS26-3	12	4 1/8	5 1/2	4	4 1/8	(20) 16d	(8) 16d	4385	8950	3110	6355
								19.51	39.81	13.83	28.27
HGUS28-3	12	4 1/8	7 1/4	4	6 3/8	(36) 16d	(12) 16d	6070	12980	4310	9215
								27.00	57.74	19.17	40.99
HHUS210-3	14	4 1/8	9	3	7 3/8	(30) 16d	(10) 16d	4670	9670	4235	6965
								20.77	42.92	18.84	30.54
HGUS210-3	12	4 1/8	9 1/4	4	8 3/8	(46) 16d	(16) 16d	6840	14645	4855	10400
								30.43	65.14	21.60	46.26
Quadruple 2x Sizes											
HGUS26-4	12	6 3/8	5 3/8	4	4 1/8	(20) 16d	(8) 16d	4385	8950	3110	6355
								19.51	39.81	13.83	28.27
HGUS28-4	12	6 3/8	7 3/8	4	6 3/8	(36) 16d	(12) 16d	6070	12980	4310	9215
								27.00	57.74	19.17	40.99
HHUS210-4	14	6 3/8	8 3/8	3	7 3/8	(30) 16d	(10) 16d	4670	10155	4235	7210
								20.77	45.17	18.84	32.07
HGUS210-4	12	6 3/8	9 3/8	4	8 3/8	(46) 16d	(16) 16d	6840	14645	4855	10400
								30.43	65.14	21.60	46.26
HGUS212-4	12	6 3/8	10 3/8	4	10 1/8	(56) 16d	(20) 16d	7640	14995	5425	10645
								33.98	66.70	24.13	47.35
HGUS214-4	12	6 3/8	12 3/8	4	11 1/8	(66) 16d	(22) 16d	10130	16400	7195	11645
								45.06	72.95	32.00	51.80
4x Sizes											
LUS46	18	3 3/8	4 3/8	2	3 3/8	(4) 16d	(4) 16d	1720	2595	1545	1920
								7.65	11.54	6.87	8.54
HHUS46	14	3 3/8	5 1/8	3	3 15/16	(14) 16d	(6) 16d	2540	7335	2065	5205
								11.30	32.63	9.20	23.15
HGUS46	12	3 3/8	5 1/8	4	4 1/8	(20) 16d	(8) 16d	4385	8950	3110	6355
								19.51	39.81	13.83	28.27
LUS48	18	3 3/8	6 3/8	2	3 3/8	(6) 16d	(4) 16d	1720	3325	1545	2675
								7.65	14.79	6.87	11.45
HHUS48	14	3 3/8	7 1/8	3	6 1/8	(22) 16d	(8) 16d	3765	8940	2675	6345
								16.75	39.77	11.90	28.22
HGUS48	12	3 3/8	7 1/8	4	6 1/8	(36) 16d	(12) 16d	6070	12980	4310	9215
								27.00	57.74	19.17	40.99
LUS410	18	3 3/8	8 3/8	2	5 3/8	(8) 16d	(6) 16d	2580	4500	2320	3195
								11.48	20.02	10.32	14.21
HGUS410	12	3 3/8	9	4	8 1/8	(46) 16d	(16) 16d	6840	14015	4855	10270
								30.43	62.34	21.60	45.69
HGUS412	12	3 3/8	10 3/8	4	10 1/8	(56) 16d	(20) 16d	7640	14995	5425	10645
								33.98	66.70	24.13	47.35
HGUS414	12	3 3/8	12 3/8	4	11 1/8	(66) 16d	(22) 16d	10130	16400	7195	11645
								45.06	72.95	32.00	51.80



Plated Truss Connectors

TC – Truss Connectors

SIMPSON
Strong-Tie

The TC truss connector is an ideal connector for scissor trusses and can allow horizontal movement up to 1¼". The TC also attaches plated trusses to top plates or sill plates to resist uplift forces. Typically used on one or both ends of truss as determined by the building designer.

Material: 16 gauge

Finish: G90 galvanized


Design: Factored resistances are in accordance with CSA 086-14

Installation:


- Use all specified fasteners.
- Nails: 10d = 0.148" dia. x 3" long common wire, 10d x 1½" = 0.148" dia. x 1½" long.
- Drive 10d nails into the truss at the inside end of the slotted holes (inside end is towards the centre of the truss) and clinch on the back side. Do not seat these nails into the truss—allow room under the nail head for movement of the truss with respect to the wall.

Optional TC Installation:


- Bend one flange up 90°. Drive specified nails into the top and face of the top plates or install Titen® screws into the top and face of masonry wall. See optional load tables and installation details.




TC24
U.S. Patent 4,932,173

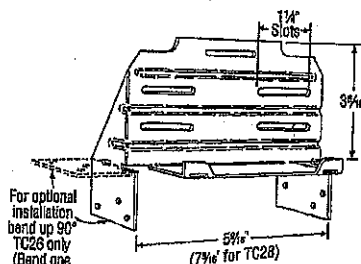


TC26
(TC28 Similar)



Typical TC24 Installation



Optional TC26 Installation for Grouted Concrete Block using a Wood Nailer (8", 10", 12" Wall Installation Similar)



Optional TC26 Installation for Grouted Concrete Block using Titen-Screws

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K _o =1.15)	Uplift (K _o =1.15)
			lb.	lb.
TC24	(4) 10d	(4) 10d	605	430
TC26	(5) 10d	(6) 10d	1015	720
TC28	(5) 10d	(6) 10d	1015	720

Optional TC Installation Table

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K _o =1.15)	Uplift (K _o =1.15)
			lb.	lb.
TC26	(5) 10d	(6) 10d x 1½"	810	660
	(5) 10d	(6) 10d	930	660

1. Factored resistances have been increased 15% for earthquake or wind loading; no further increase allowed; reduce where other loads govern.
2. Grout strength is 15 MPa minimum.
3. Optional TC26 installation with 10d nails requires minimum 3" top plate thickness.
4. TC26 fastened to grouted concrete block with (8) – ½" x 2¼" Titen screws has a factored uplift resistance of 275 lb.



TIME
STATES
DESIGN

For more information on Simpson Strong-Tie products, visit us online at www.strongtie.com or call 1-800-999-5099. We are committed to providing you with the highest quality products and service. Our products are designed to meet or exceed all applicable codes and standards. We are a leader in the industry and we are proud to be a part of your team. We are committed to providing you with the highest quality products and service. Our products are designed to meet or exceed all applicable codes and standards. We are a leader in the industry and we are proud to be a part of your team.

(800) 999-5099
strongtie.com

H/TSP

Seismic and Hurricane Ties (cont.)

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32-34 for more information.

Model No.	Ga.	Fasteners			Factored Resistance ($K_D = 1.15$)					
					D.Fir-L			S-P-F		
		To Rafters/Truss	To Plates	To Studs	Uplift	Lateral		Uplift	Lateral	
						F ₁	F ₂		F ₁	F ₂
					lb.	lb.	lb.	lb.	lb.	lb.
					kN	kN	kN	kN	kN	kN
H1	18	(8) 8d x 1½"	(4) 8d	—	740	685	300	880	485	215
SS H2A	18	(5) 8d x 1½"	(2) 8d x 1½"	(5) 8d x 1½"	3.29	3.05	1.33	3.02	2.16	0.98
SS H2.5A	18	(5) 8d	(5) 8d	—	830	220	75	590	155	55
					3.68	0.98	0.33	2.62	0.69	0.24
H2.5T	18	(5) 8d	(5) 8d	—	805	180	160	765	180	160
					3.68	0.71	0.71	3.36	0.71	0.71
SS H3	18	(4) 8d	(4) 8d	—	835	175	210	740	160	210
					3.71	0.78	0.93	3.29	0.71	0.93
H6	16	—	(8) 8d	(8) 8d	740	180	265	615	125	190
					3.29	0.80	1.18	2.74	0.56	0.65
H7Z	16	(4) 8d	(2) 8d	(8) 8d	1585	1085	—	1125	770	—
					7.05	4.83	—	5.00	3.43	—
SS H8 ²	18	(5) 10d x 1½"	(5) 10d x 1½"	—	1390	670	—	990	475	—
					8.18	2.98	—	4.40	2.11	—
SS H10A ²	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1120	—	—	1025	—	—
					4.98	—	—	4.56	—	—
H10AR	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1735	795	410	1505	565	290
					7.72	3.54	1.82	6.69	2.51	1.29
H10A-2	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1485	690	430	1220	570	305
					6.61	3.07	1.91	5.43	2.54	1.36
H10S ^{2,3}	18	(8) 8d x 1½"	(8) 8d x 1½"	(8) 8d	1835	1275	430	1645	880	305
					8.16	5.67	1.91	7.32	3.91	1.36
H11Z	18	(6) 16d x 2½"	(6) 16d x 2½"	—	1465	795	315	1040	565	225
					6.52	3.54	1.40	4.63	2.51	1.00
H14	18	[1] (12) 8d x 1½"	(13) 8d	—	1095	920	545	780	655	390
					4.87	4.09	2.42	3.47	2.91	1.73
		[2] (12) 8d x 1½"	(15) 8d	—	10.63	3.80	1.42	8.03	2.71	1.02
					2390	855	320	1805	610	230
					10.63	3.80	1.42	8.03	2.71	1.02
TSP	16	(9) 10d x 1½"	(6) 10d x 1½"	—	1295	440	—	920	310	—
					5.76	1.98	—	4.09	1.38	—
		(9) 10d x 1½"	(6) 10d	—	1560	440	—	1105	310	—
					6.94	1.98	—	4.92	1.38	—

- Factored resistances have been increased 15% for short term loading; no further increase is allowed.
- Factored resistances are for one anchor. A minimum rafter thickness of 2½" must be used when framing anchors are installed on the same side of the plate (exception: H2.5A).
- H8 factored uplift resistances for stud-to-bottom plate installations are 595 lb. (2.65 kN) for D.Fir-L and 390 lb. (1.74 kN) for S-P-F.
- When cross-grain bending or cross-grain tension cannot be avoided, mechanical reinforcement to resist such forces should be considered.
- Hurricane ties are shown installed on the outside of the wall for clarity. Installation on the inside of the wall is acceptable. For a continuous load path, connections at the top and bottom of the wall must be on the same side of the wall (see technical bulletin T-HTIECONPATH).
- Factored resistances in the F₁ direction are not intended to replace diaphragm boundary members or prevent cross grain bending of the truss or rafter members. Additional shear transfer elements shall be considered where there may be effects of cross grain bending or tension.

- H10S can have the stud offset a maximum of 1" from the rafter (centre to centre) for a reduced uplift of 1435 lb. (6.38 kN) D.Fir-L and 1015 lb. (4.51 kN) S-P-F.
- H10S nails to plates are optional for uplift but required for lateral loads.
- H10A may be field-bent up to a slope of 8/12. Multiply the tabulated uplift value x 0.75. Full tabulated lateral resistances apply.
- The factored resistances of stainless-steel connectors match carbon-steel connectors when installed with Simpson Strong-Tie® stainless-steel, SCN® ring-shank nails. For more information, refer to engineering letter L-F-SSNAILS at strongtie.com.
- D.Fir-L/S-P-F factored uplift resistances for the H2.5A fastened to a 2x4 truss bottom chord and double top plates using (5) 8d x 1½" nails into the top plates and (3) 8d x 1½" nails into the lowest three flange holes into the truss bottom chord is 495 lb. (2.20 kN).
- Nails: 16d x 2½" = 0.162" dia. x 2½" long, 10d = 0.148" dia. x 3" long, 10d x 1½" = 0.148" dia. x 1½" long, 8d = 0.131" dia. x 2½" long, 8d x 1½" = 0.131" dia. x 1½" long. See pp. 27-28 for other nail sizes and information.



BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY

B97791H1

NAIL TYPE	LENGTH (IN)	DIAMETER (IN)	NAIL LATERAL CAPACITY (LB)	
			S-P-F	D. FIR
COMMON WIRE	3.00	0.144	132	147
	3.25	0.144	132	147
	3.50	0.160	159	177
COMMON SPIRAL	3.00	0.122	97	108
	3.25	0.122	97	108
	3.50	0.152	145	162

NOTES:

1. Rafter and ceiling members may be anchored to top and bottom chords of girder truss by toe-nailing rafter and ceiling members to girder chords provided the reaction does not exceed the lateral capacities in the table. Hangers (specified by others) are required for reactions higher than the maximum toe-nail capacity. Reactions are based on factored loads.
2. Toe nail capacities shown in the table are for one toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor J_A in CSA O86-14, section 12.9.4.1.
3. For 9-3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in tables below.
5. Nail values in table are based on the following relative lumber densities: $G = 0.42$ (SPF), $G = 0.49$ (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See next page for nailing on bearing plate).
7. For loads due to wind the nail lateral capacity in this table may be multiplied by 1.15 (K_D factor).
8. Lumber must be dry (< 19% moisture content) at the time of nail installation.
9. Nail values in this table comply with CSA O86-14, section 12.9.4
10. This design is not valid after March 31, 2021.

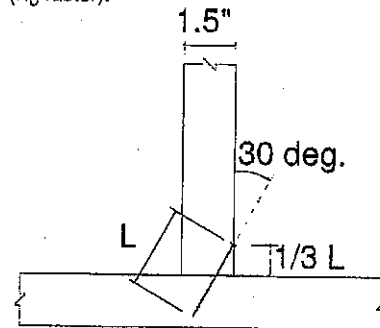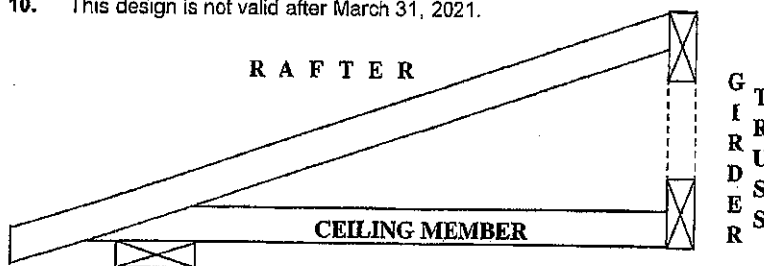

TOE-NAIL INSTALLATION

Nail type	Common wire	Common spiral	Common wire	Common spiral
Nail dia. (in)	0.160	0.152	0.144	0.122
	(3.5" nail)		(3" and 3.25" nail)	
LUMBER SIZE	MAXIMUM NUMBER OF TOE-NAILS			
2X4 SPF	2	2	3	3
2X4 D. Fir	2	2	2	2
2X6 SPF	4	4	4	5
2X6 D. Fir	3	3	3	4

MiTek® MiTek Canada Inc
100 Industrial Rd.
Bradford, Ontario L3Z 3G7

December 2, 2019

PEO
Certificate No. 10889485



BEARING ANCHORAGE BY TOE-NAILS FOR WIND LOADING

B97791H2



NAIL TYPE	LENGTH (IN)	DIAMETER (IN)	NAIL WITHDRAWAL CAPACITY (LB)	
			S-P-F	D. FIR
COMMON WIRE	3.00	0.144	30	42
	3.25	0.144	32	45
	3.50	0.160	38	52
COMMON SPIRAL	3.00	0.122	26	36
	3.25	0.122	28	40
	3.50	0.152	36	50

Note: If using truss with D. Fir lumber and S-P-F bearing plate, use values in table for S-P-F.



NOTES:

1. Truss chord, rafter, or ceiling members may be anchored to bearing plate by toe-nails, provided that the actual factored uplift force due to **wind** or **earthquake** load does not exceed the withdrawal capacities in the table. Hangers (specified by others) are required for uplift forces that are higher than the maximum toe-nail withdrawal capacity.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor J_A in CSA O86-14, section 12.9.5.2.
3. For 9- 3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in table above.
5. Nail values in table are based on the following relative lumber densities: $G = 0.42(\text{SPF})$, $G = 0.49(\text{D. Fir})$.
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See drawing on detail B37579H1).
7. Lumber must be dry (< 19% moisture content) at the time of nail installation.
8. Nail values in this table comply with CSA O86-14, section 12.9.5
9. This design is not valid after March 31, 2021.

Toe-nailing on 2x6 Bearing Plate

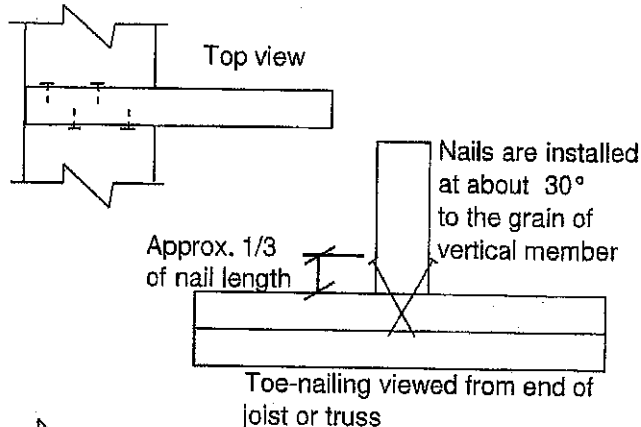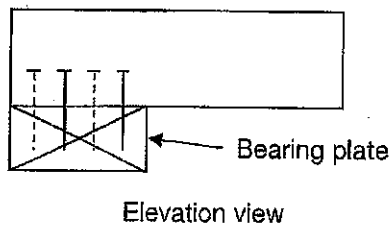


Toe-nailing on 2x4 Bearing Plate



MiTek®


MiTek Canada Inc
100 Industrial Rd.
Bradford, Ontario L3Z 3G7

December 2, 2019




Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths or mm. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0-1/8" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

*Plate location details available in MiTek software or upon request.

PLATE SIZE

4 x 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T, I or Eliminator bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur.


Industry Standards:

TPIC: Truss Design Procedures and Specifications for Light Metal Plate Connected Wood Trusses
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System



dimensions shown in ft-in-sixteenths or mm (Drawings not to scale)

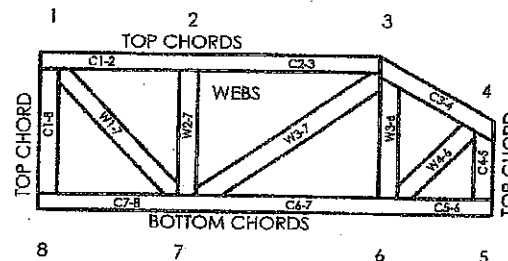

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

CCMC Reports:

11996-L, 10319-L, 13270-L, 12691-R

© 2007 MiTek® All Rights Reserved

MiTek
POWER TO PERFORM.™

MiTek Engineering Reference Sheet: MII-7473C rev. 1D-08

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury


1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T, I, or Eliminator bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane of joint locations are regulated by TPIC.
7. Design assumes trusses will be suitably protected from the environment in accord with TPIC.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with TPIC Quality Criteria.

Overview:

Where piggybacks are connected ovetop of base trusses, 2x4 purlins must be first added to the flat portion of the base truss at a spacing no more than 24" o/c. These purlins not only provide support for the piggyback trusses above, but are required to laterally support the top chord of the base truss which will not have the sheathing directly connected to the flat portion of the base truss. This ensures the top chord, most often in compression, will not buckle laterally.

Further, the purlins in the plane of the flat portion require diagonal bracing to prevent lateral displacement of the purlins themselves where under certain conditions, the trusses may in fact all buckle in the same direction if this additional bracing is not added in the plane of the purlins.

Detail:

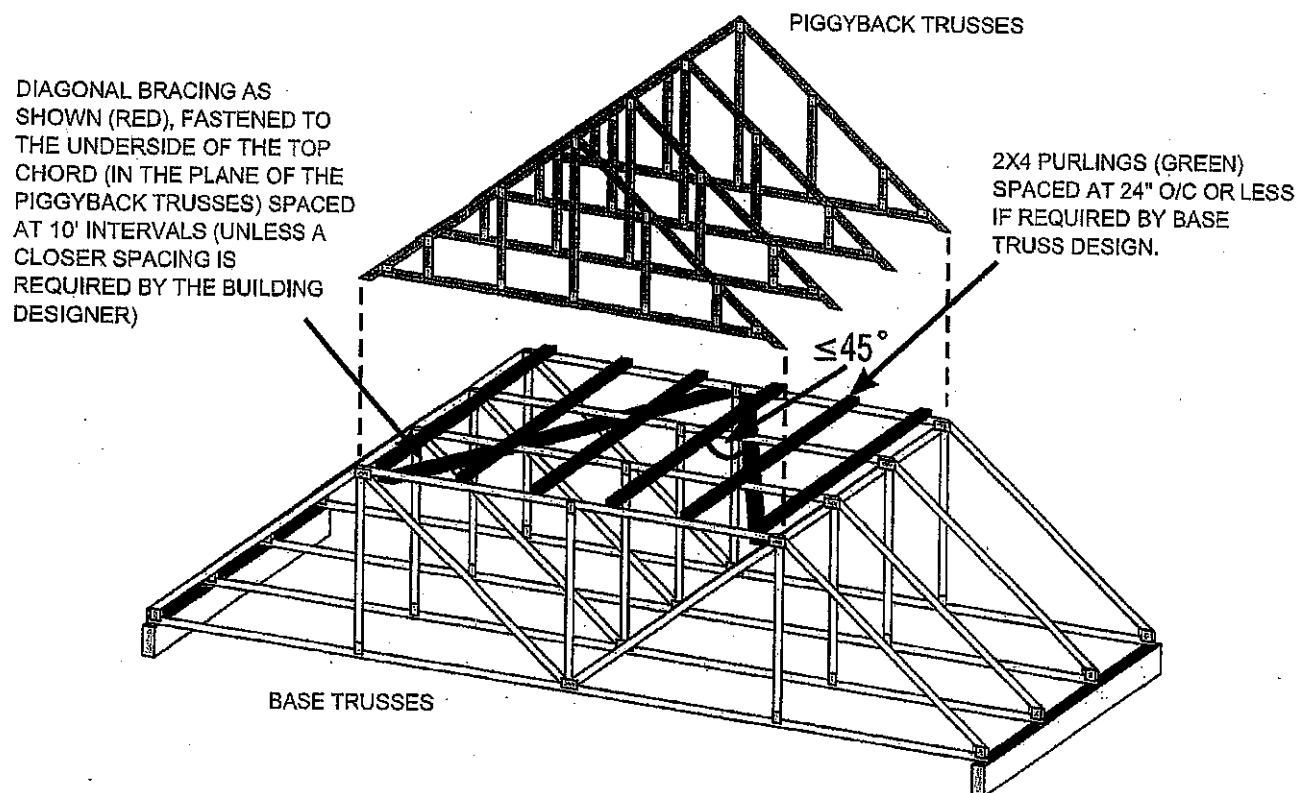


NOTE: THE SLOPED PORTION OF THE TOP CHORD OF THE BASE TRUSS AND PIGGYBACK TRUSS IN THIS SKETCH IS ASSUMED TO BE SHEATHED IN ACCORDANCE WITH THE OBC.

SKETCH FROM BCSI-CANADA 2013

Disclaimer:

OWTFA Tech Notes are intended to provide guidance to the design community both within the membership as well as to third party designers who might benefit from the information. The details have been developed by the OWTFA technical committee and although there may be professional engineers involved in development, the information contained in the tech-note are not intended to be used without having a professional engineer review the information for a specific application. The OWTFA takes no responsibility with respect to the information provided but has developed this tech-note to offer guidance where it is not currently readily available.



Alves Engineering Services Inc.

5208 Easton road
Burlington, Ontario L7L 6N6
(289) 259 5455

RESPONSABILITIES

- 1-Alves Engineering Services Inc. is responsible for the design of trusses as individual components
- 2-It is the responsibility of others to ascertain that the design loads utilized on this drawing meet or exceed the actual dead load imposed by the structure and the live load imposed by the local building code or the authorities having jurisdictions.
- 3- All dimensions are to be verified by owner, contractor, architect or other authority before manufacture.
- 4- Alves Engineering Services Inc. bears no responsibility for the erection of the trusses. Persons erecting trusses are cautioned to seek professional advice regarding temporary and permanent bracing system. Bracing shown on Alves Engineering Services Inc. drawings is specified for the truss as a single component and forms an integral part of the truss design, but is not meant to represent the only required bracing for that truss when trusses are installed in a series of trusses forming a roof truss system.
- 5- It is the manufactures responsibility to ensure that the trusses are manufactured in conformance with Alves Engineering Services Inc. specifications outlined below.

SPECIFICATIONS

- 1-Truss components sealed by Alves Engineering Services Inc. conform to the relevant sections of the current Building Code of Ontario and Canada (part 4 or part 9) or the current Canadian code for Farm Buildings in accordance with the application specified on the sealed truss component drawing. All truss component design procedures must conform to the current design standard issued by the truss plate institute of Canada (TPIC). All lumber and nailing stresses to conform to the current CSA wood design standard identified on the current Building Code and TPIC.
- 2- Lumber is to be the sizes and grade specified on the truss drawing.
- 3- Moist content of lumber is not to exceed 19% in service unless otherwise specified.
- 4- Plates shall be applied to both faces of the each truss joint and shall be positioned as shown on the truss drawings
- 5- Lumber used on manufacture of trusses is not to be treated with chemicals unless otherwise specified on the truss drawings.
- 6- The top chord is assumed to be continuously laterally braced by the roof sheathing or purlins at intervals specified on the truss drawing but not exceeding 24" c/c for (part 9) and not exceeding 48" for (part 4 or farm design)
- 7- When rigid ceiling is not attached directly to the bottom chord, lateral bracing is required and it should not exceed more than 3m or 10' intervals.
- 8-Refer to Mitek sheet MII7473C REV.10-08 attached for information on symbols, numbering system and General Safety notes.

T-1600213

Feb 09, 2018