


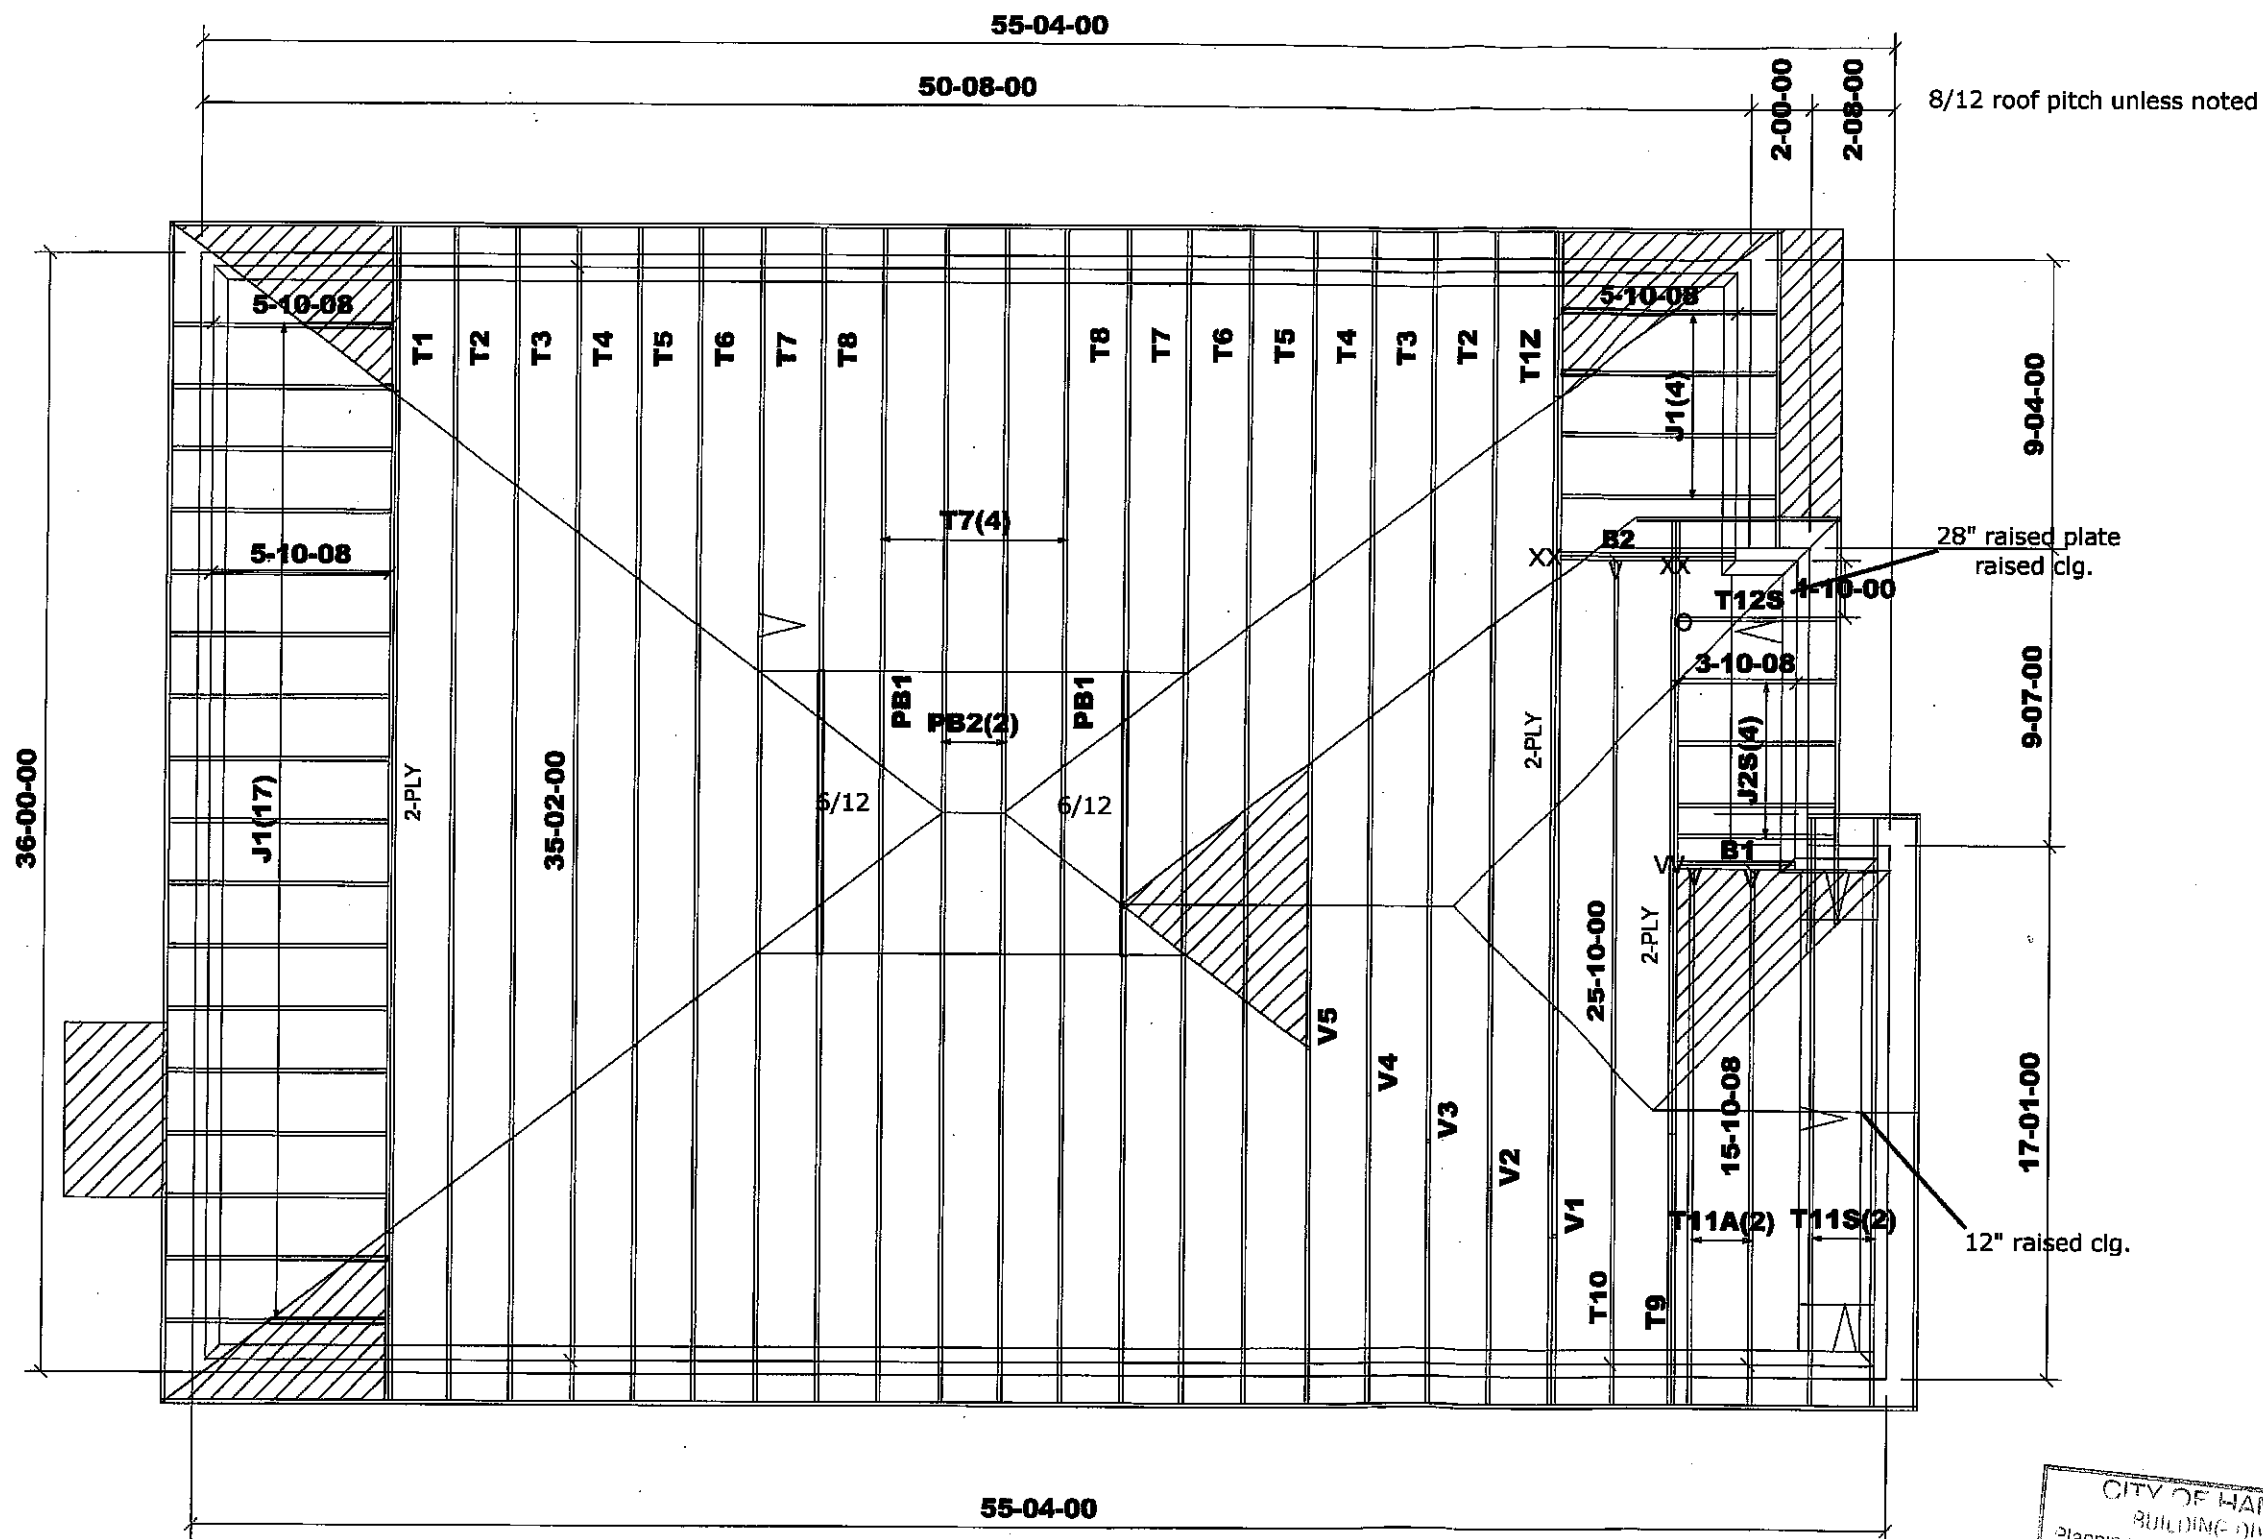

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.


All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.


DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:
LUS24 - (O)
LJS26DS - (V)
HGUS26-2 - (XX)
LUS26-2-(VV)

BEAMS:
B1= B2 = 2 - 2x10 SPF #2

 DENOTES:
CONVENTIONAL
FRAMING

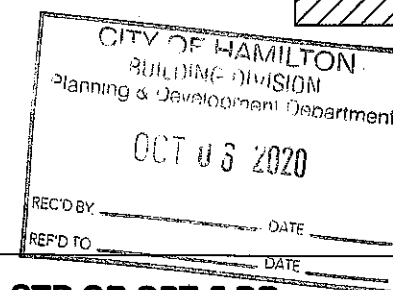

M13138




Job Track: **51225**
Plan Log: **202419**
Layout ID: **408222**

Builder / Location: **GREEN PARK HOMES / WATERDOWN**
Project: **RUSSELL GARDENS PH.3**
Date: 2020-04-27 Sales: **Mario DiCano** Designer: JG

Model / Elevation: **MOUNTAINASH 6/1 -STD OR OPT.5 BR**

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

Mitek ver 8.3.1.215

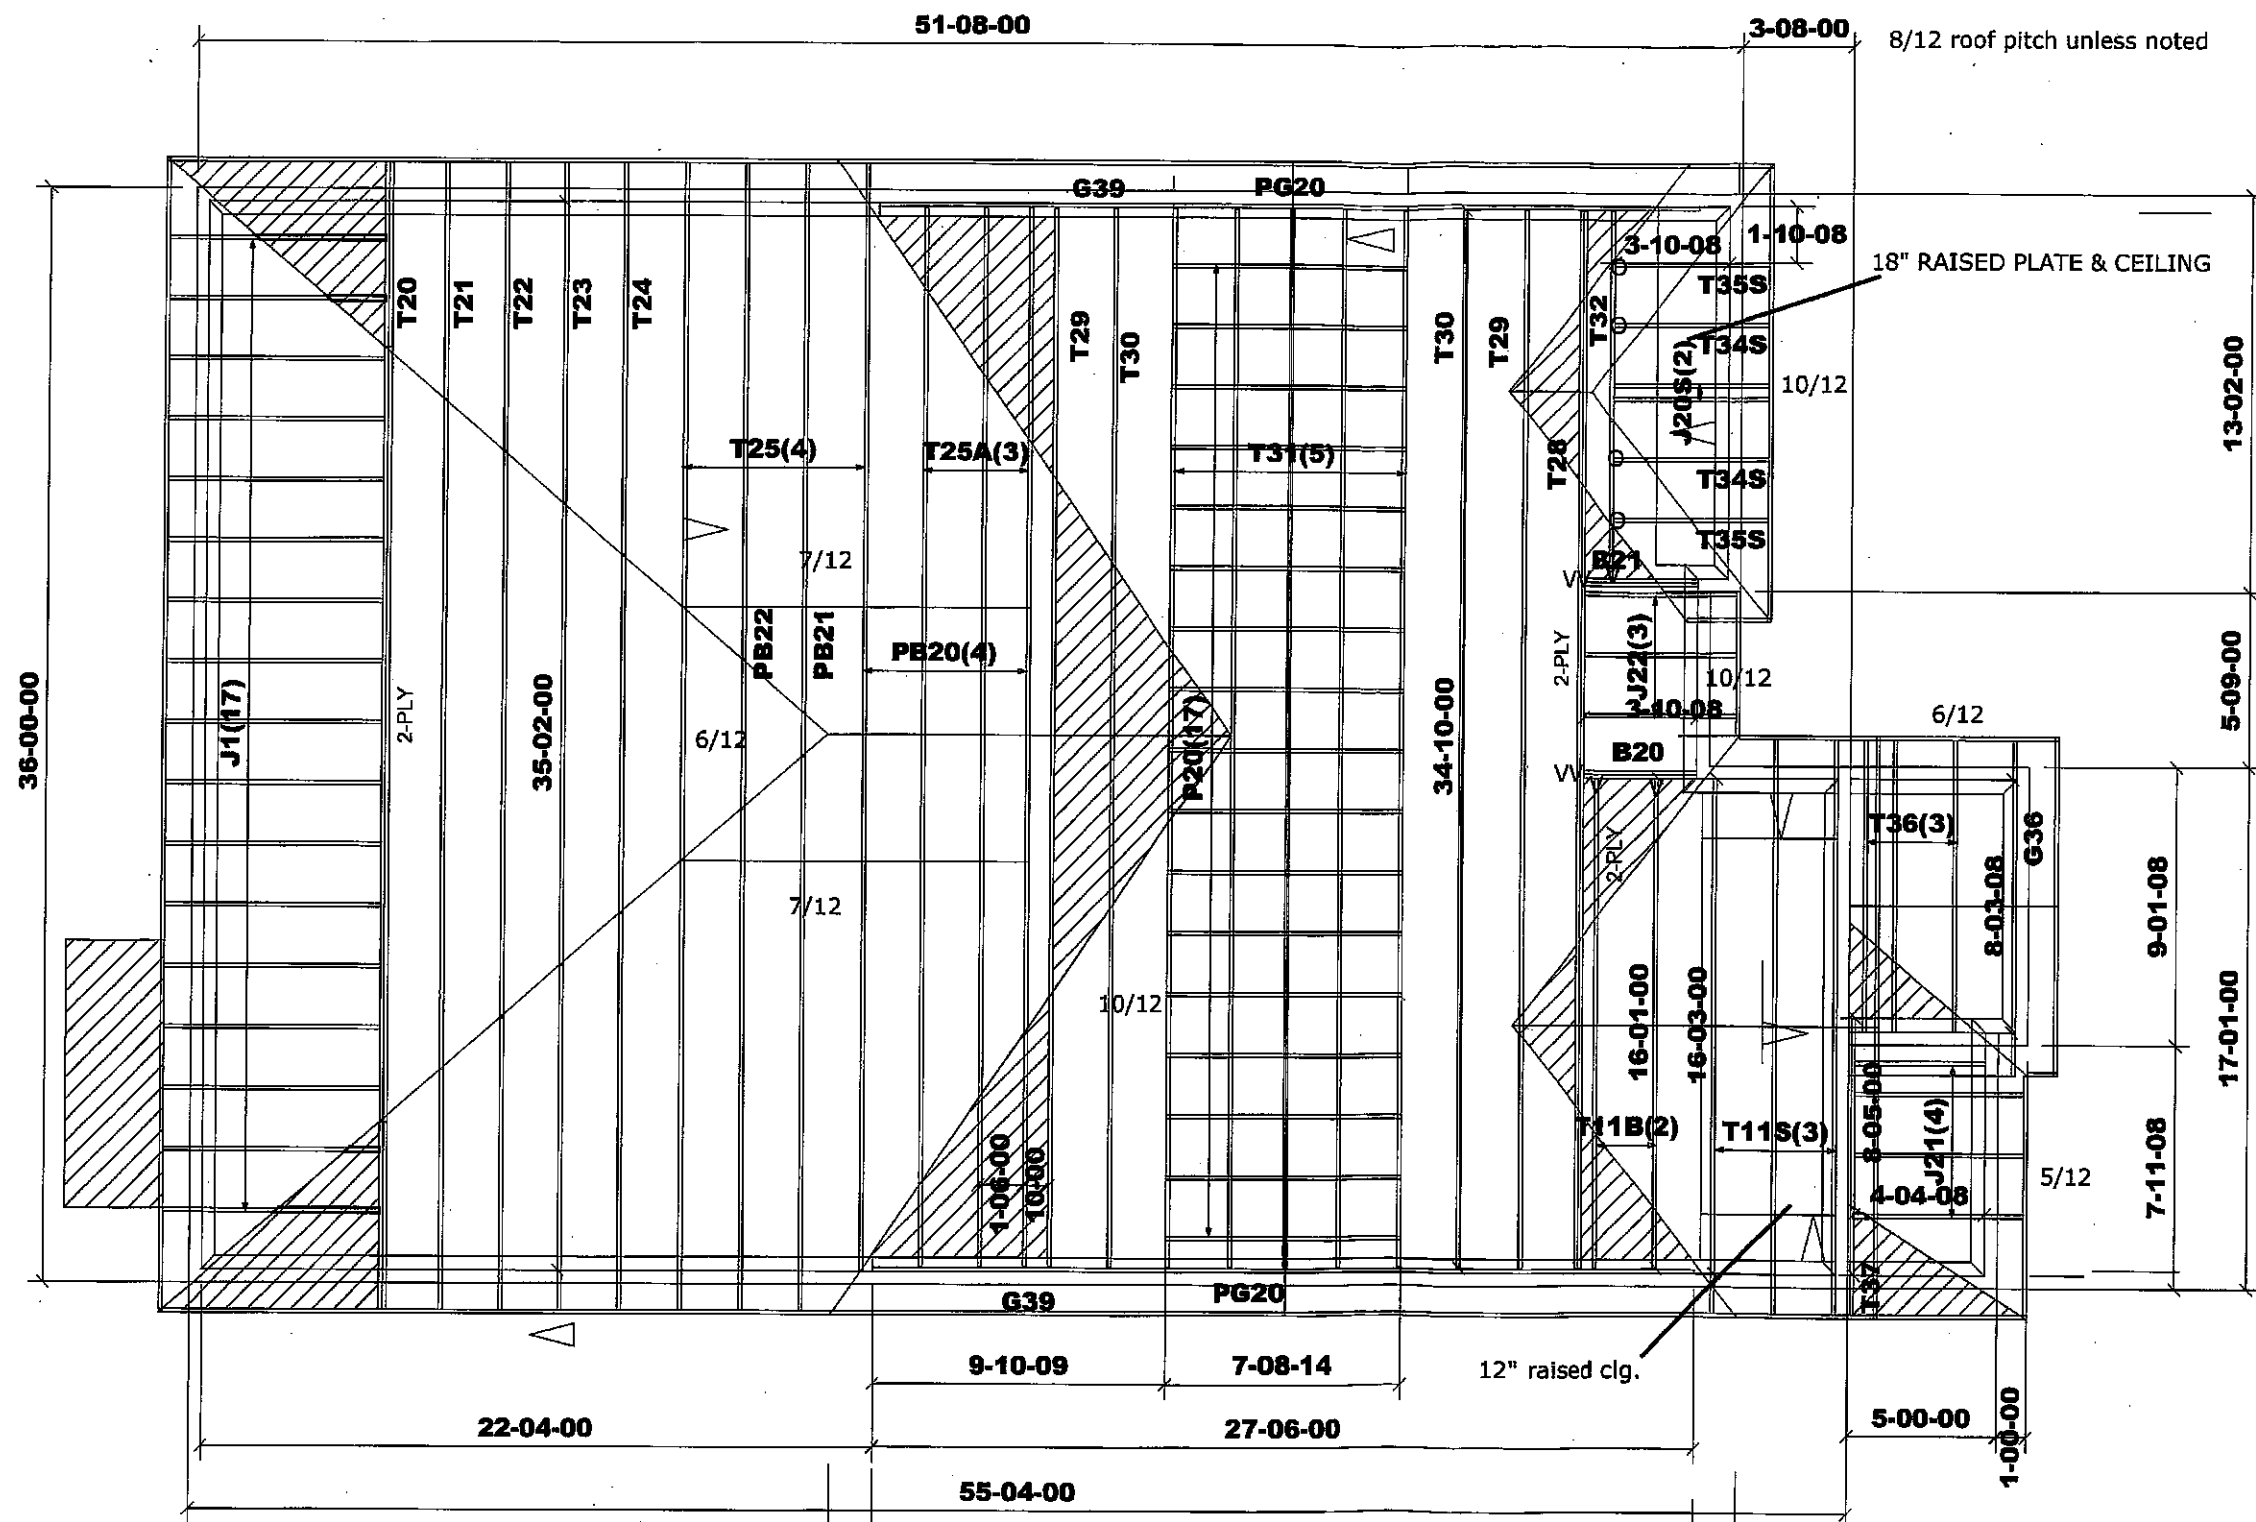

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.


All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:
LUS24 - (O)
LJS26DS - (V)
HGUS26-2 - (XX)
LUS26-2-(VV)

BEAMS:
B20= B21 =
2 - 2x10 SPF #2

 DENOTES:
CONVENTIONAL
FRAMING

M13138




Job Track: 51225
Plan Log: 202419
Layout ID: 408223

Builder / Location: GREEN PARK HOMES / WATERDOWN
Project: RUSSELL GARDENS PH.3
Date: 2020-04-28 Sales: Mario DiCano Designer: JG

Model / Elevation: MOUNTAINASH 6/2-STD OR OPT.5 BR

Mitek ver 8.3.1.215

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

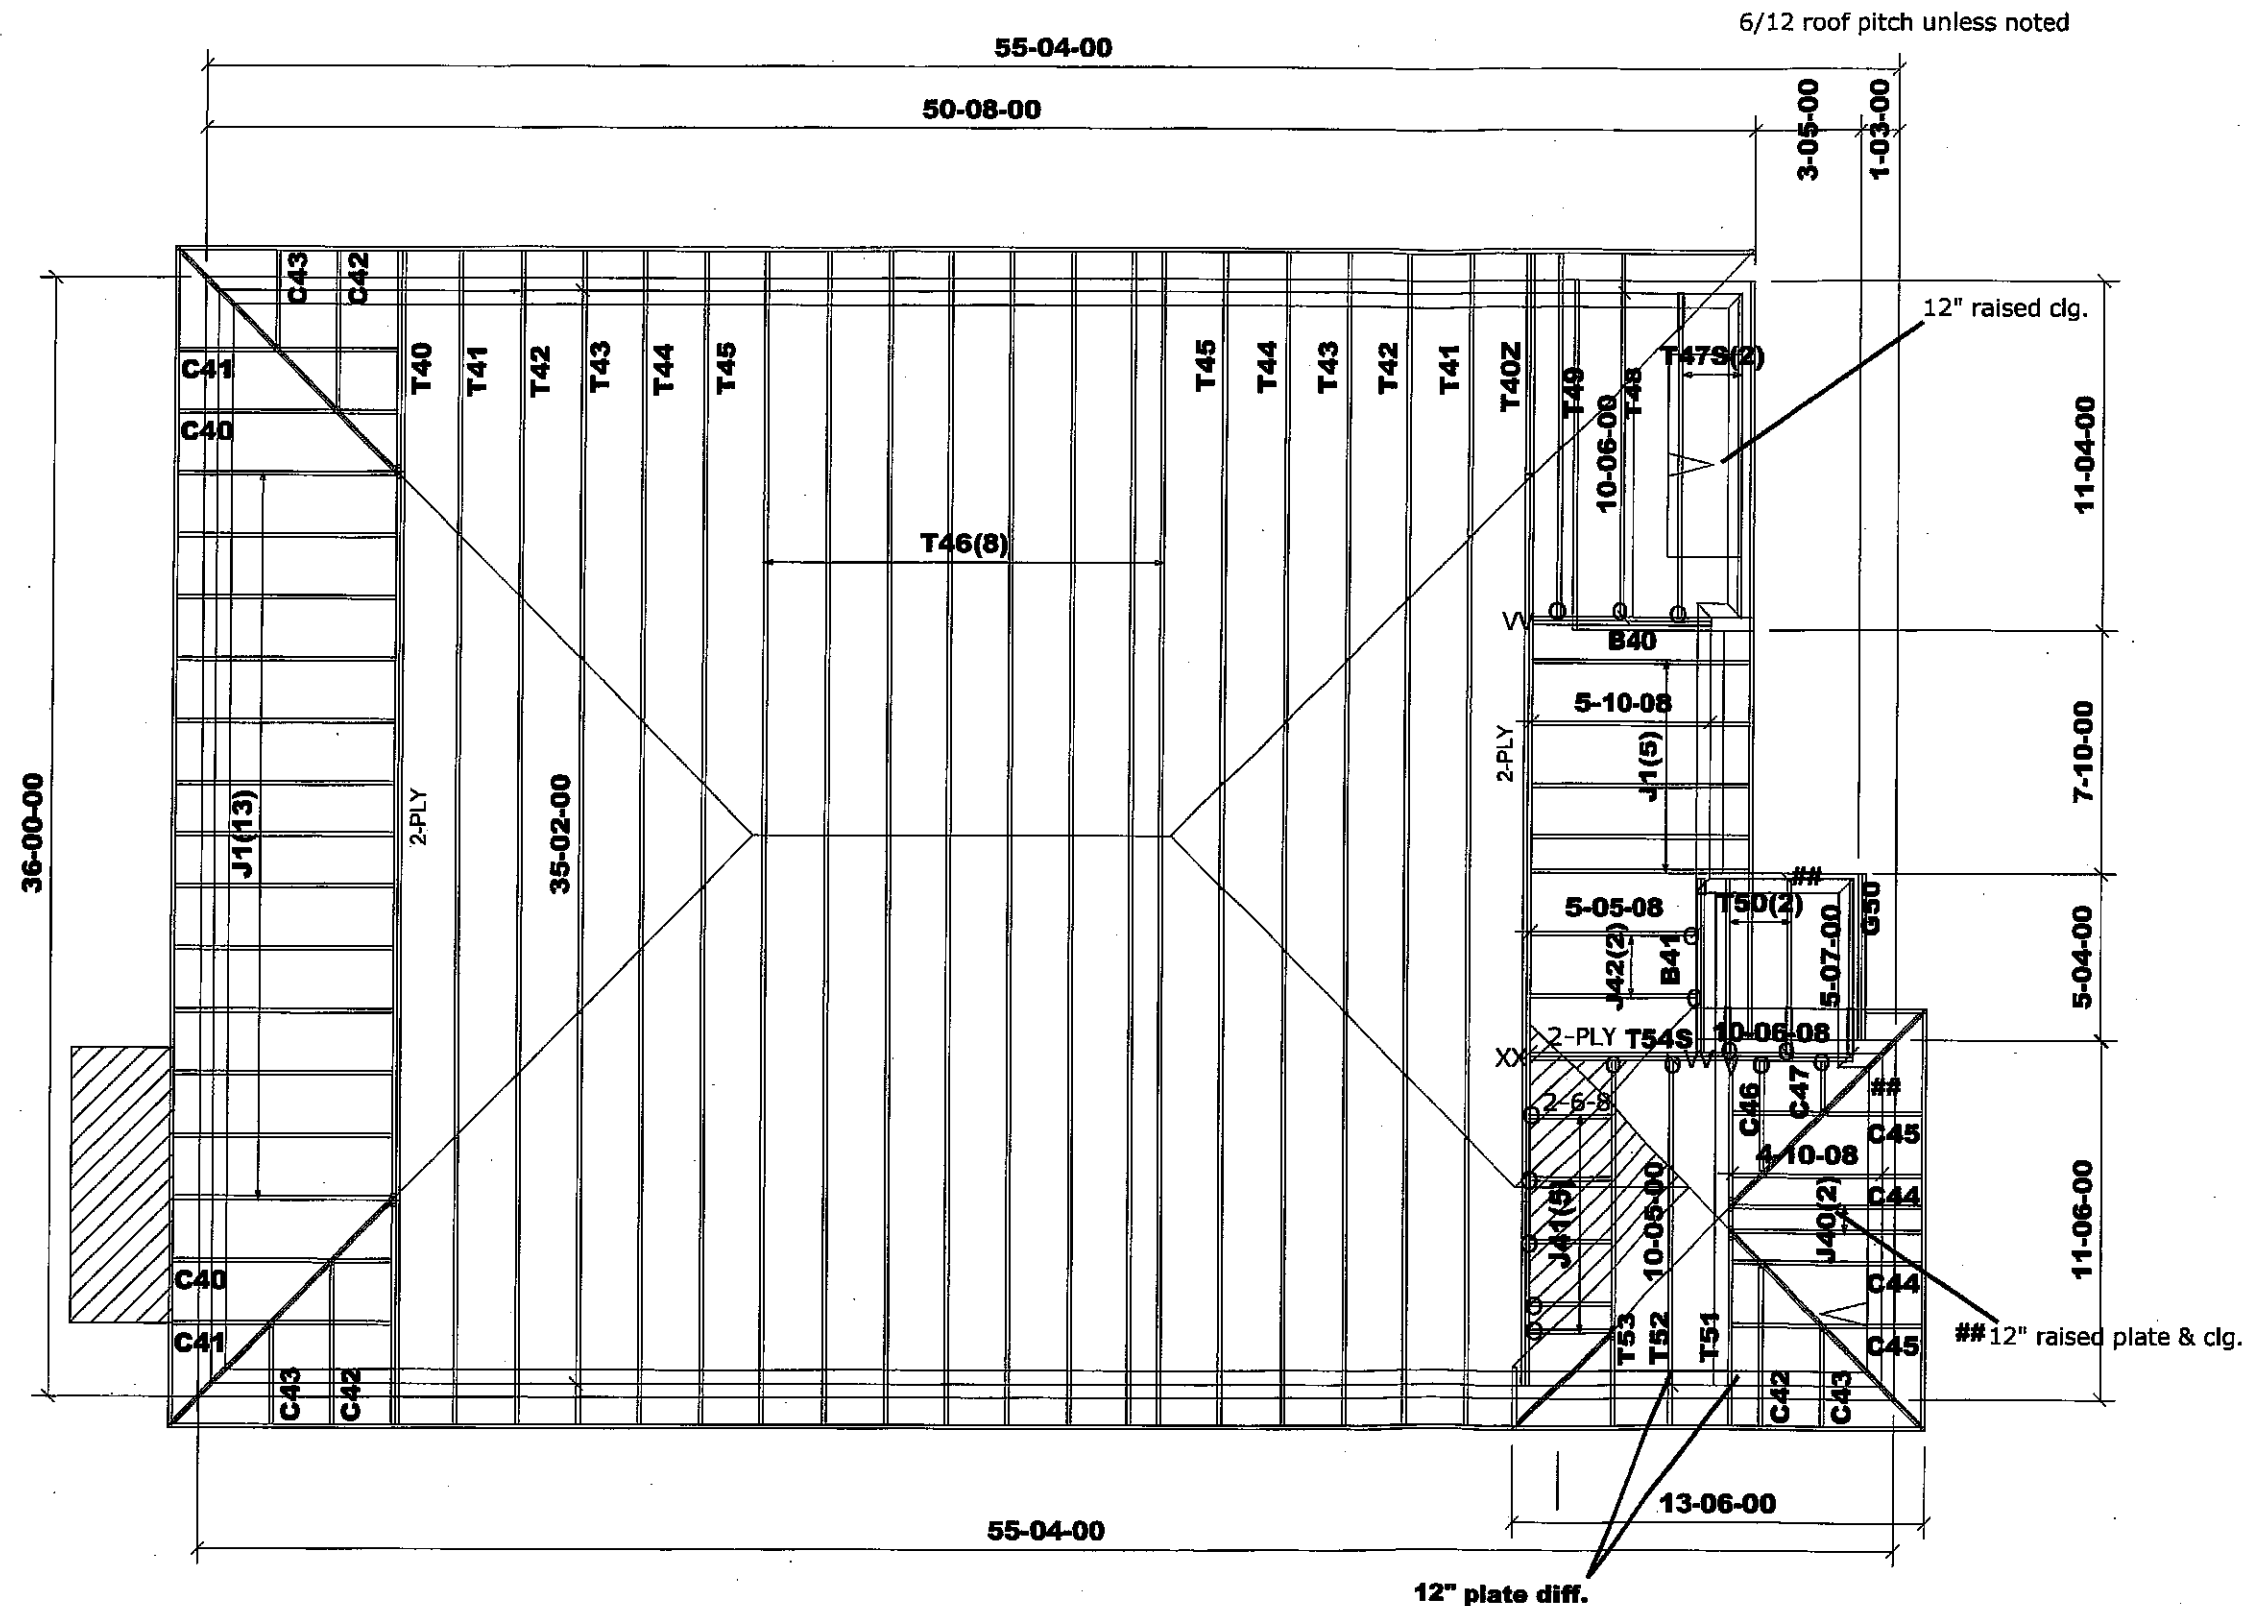

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.


All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012
(2019 amendment) OCCUPANCY:
RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:
LUS24 - (O)
LJS26DS - (V)
HGUS26-2 - (XX)
LUS26-2-(VV)

BEAMS:
B40= B41 =
2 - 2x10 SPF #2

 DENOTES:
CONVENTIONAL
FRAMING

M13138




Job Track: **51225**
Plan Log: **202419**
Layout ID: **408224**

Builder / Location:
GREEN PARK HOMES / WATERDOWN
Project: **RUSSELL GARDENS PH.3**
Date: 2020-04-27 Sales: **Mario DiCano** Designer: JG

Model / Elevation:
MOUNTAINASH 6/3- STD OR OPT.5 BR

Mike ver 8.3.1.215

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC.. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.



DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 6
 Lot #:
 Elevation: 1 -STD OR OPT.5 BR

Job Track: 51225
 PlanLog: 202419
 Layout ID: 408222
 Ref #
 Page: 1 of 2
 Date: 04-27-2020
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1 Hip Girder	8/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	322.76 198.00		
	1 2-ply	T12 Hip Girder	8/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	322.76 198.00		
	2	T2 Hip	8/12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	279.76 177.00		
	2	T3 Hip	8/12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	302.77 191.33		
	2	T4 Hip	8/12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	309.14 195.67		
	2	T5 Hip	8/12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	316.79 196.67		
	2	T6 Hip	8/12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	329.26 205.00		
	6	T7 Hip	8/12	35-02-00	10-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	1029.55 646.00		
	2	T8 Hip	8/12	35-02-00	11-01-04	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	332.55 206.67		
	1 2-ply	T9 Hip Girder	8/12	25-10-00	6-03-13	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 3-08-13	271.38 168.67		
	1	T10 Hip	8/12	25-10-00	7-07-13	2 x 4	1-03-08	1-04-13 3-08-13	117.95 75.67		
	2	T11A Common	8/12	15-10-08	6-09-13	2 x 4	1-03-08	1-04-13 1-07-13	132.62 84.67		
	2	T11S Roof Special	8/12 8/12	16-03-00	6-09-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	134.27 88.67		
	1	T12S Half Hip	8/12	3-10-08	4-11-08	2 x 4	1-03-08	1-04-13 4-11-08	29 20.33		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST				
	Lumber Yard:	TAMARACK LUMBER		Job Track:	51225
	Builder:	GREEN PARK HOMES		PlanLog:	202419
	Project:	RUSSELL GARDENS PH.3		Layout ID:	408222
	Location:	WATERDOWN		Ref #	
	Model:	MOUNTAINASH 6		Page:	2 of 2
Lot #:			Date:	04-27-2020	
Elevation:	1-STD OR OPT.5 BR		Designer:		
			Sales Rep:	Mario DiCano	

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	PB1 Piggyback	8 /12	9-00-12	2-00-00	2 x 4			49.71 33.67		
	2	PB2 Piggyback	8 /12	9-00-12	3-00-04	2 x 4			45.78 29.67		
	1	V1 Valley	8 /12	21-00-07	4-09-13	2 x 4			60.46 38.83		
	1	V2 Valley	8 /12	18-00-07	5-01-13	2 x 4			54.03 33.00		
	1	V3 Valley	8 /12	15-00-07	5-00-02	2 x 4			42.87 26.50		
	1	V4 Valley	8 /12	12-00-07	4-00-02	2 x 4			31.63 19.33		
	1	V5 Valley	8 /12	9-00-07	3-00-02	2 x 4			23.28 14.17		
	21	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	352.68 224.00		
	4	J2S Jack-Open	8 /12	3-10-08	6-03-13	2 x 4	1-03-08	1-04-13 6-03-13	91.79 62.00		


TOTAL # TRUSS= 64

TOTAL BFT OF ALL TRUSSES= 3133.52 BFT. TOTAL WEIGHT OF ALL TRSSES 4982.81 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
3	Hardware	LJS26DS	
1	Hardware	LUS24	
1	Hardware	LUS26-2	
2	Hardware	HGUS26-2	

TOTAL NUMBER OF
ITEMS= 7




DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 6
 Lot #:
 Elevation: 2-STD OR OPT.5 BR

Job Track: 51225
 PlanLog: 202419
 Layout ID: 408223
 Ref #
 Page: 1 of 3
 Date: 04-28-2020
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	T11B Common	8/12	16-01-00	6-09-13	2 x 4		1-06-02 1-04-13	137.47 88.33		
	3	T11S Roof Special	8/12 8/12	16-03-00	6-09-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	201.4 133.00		
	1 2-ply	T20 Hip Girder	7/12	35-02-00	4-01-04	2 x 6	1-03-08 1-03-08	1-03-07 1-03-07	359.46 218.00		
	1	T21 Hip	7/12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-03-07 1-03-07	142.49 89.50		
	1	T22 Hip	7/12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-03-07 1-03-07	146.47 93.50		
	1	T23 Hip	7/12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-03-07 1-03-07	144.95 91.17		
	1	T24 Hip	7/12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-03-07 1-03-07	151.12 95.67		
	4	T25 Hip	7/12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-03-07 1-03-07	631.9 399.33		
	3	T25A Piggyback Base	7/12	34-10-00	9-01-04	2 x 4		1-04-09 1-04-09	461.61 286.50		
	1 2-ply	T28 Flat Girder	0/12	34-10-00	4-10-07	2 x 6		4-10-07 4-10-07	366.38 214.67		
	2	T29 Flat	0/12	34-10-00	6-06-07	2 x 4		6-06-07 6-06-07	313.97 193.33		
	2	T30 Flat	0/12	34-10-00	8-02-07	2 x 4		8-02-07 8-02-07	358.85 220.00		
	5	T31 Flat	0/12	34-10-00	9-10-07	2 x 4		9-10-07 9-10-07	980.54 600.00		
	1	T32 Hip Girder	8/12	12-02-00	6-04-07	2 x 4 2 x 6		3-00-02 2-10-13	66.45 43.67		




DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 6
 Lot #:
 Elevation: 2-STD OR OPT.5 BR

Job Track: 51225
 PlanLog: 202419
 Layout ID: 408223
 Ref #
 Page: 2 of 3
 Date: 04-28-2020
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	T34S Half Hip	10/12	3-10-08	5-05-13	2 x 4	1-03-08	1-07-11 5-05-13	63.75 44.33		
	2	T35S Half Hip	10/12	3-10-08	4-01-13	2 x 4	1-03-08	1-07-11 4-01-13	57.2 41.00		
	3	T36 Common	6/12	8-03-08	3-00-09	2 x 4	1-03-08 1-03-08	5-07 5-07	79.61 63.00		
	1	G36 GABLE	6/12	8-03-08	3-01-05	2 x 4	1-03-08 1-05-00	5-07 5-07	26.93 17.33		
	1	T37 Half Hip Girder	8/12	8-05-00	2-08-03	2 x 4 2 x 6	1-03-08	8-05 2-01-15	36.62 26.00		
	2	G39 GABLE	10/12	27-06-00	9-10-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	303.3 193.33		
	17	P20 Common	10/12	7-08-14	3-02-12	2 x 4		0-01 0-01	363.26 229.50		
	4	PB20 Piggyback	7/12	8-04-05	2-05-04	2 x 4			80.17 49.33		
	1	PB22 Piggyback	7/12	8-04-05	1-00-00	2 x 4			18.26 11.67		
	1	PB21 Piggyback	7/12	8-04-05	2-00-00	2 x 4			21.88 14.33		
	2	PG20 GABLE	10/12	7-09-00	3-02-12	2 x 4			44.53 30.33		
	17	J1 Jack-Open	6/12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	285.51 181.33		
	2	J20S Jack-Open	10/12	3-10-08	6-04-07	2 x 4	1-03-08	1-07-11 6-04-07	65.13 43.33		
	4	J21 Jack-Open	5/12	4-04-08	2-08-02	2 x 4	1-03-08	4-01 2-01-15	48.51 32.00		



DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 6
 Lot #:
 Elevation: 2-STD OR OPT.5 BR

Job Track: 51225
 PlanLog: 202419
 Layout ID: 408223
 Ref #
 Page: 3 of 3
 Date: 04-28-2020
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	3	J22 Jack-Open	10 /12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	45.88 29.00		

TOTAL # TRUSS= 92

TOTAL BFT OF ALL TRUSSES= 3762.48

BFT.


TOTAL WEIGHT OF ALL TRSSES 6003.41 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
3	Hardware	LJS26DS	
4	Hardware	LUS24	
2	Hardware	LUS26-2	

TOTAL NUMBER OF
ITEMS=

9




DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: GREEN PARK HOMES
 Project: RUSSELL GARDENS PH.3
 Location: WATERDOWN
 Model: MOUNTAINASH 6
 Lot #:
 Elevation: 3- STD OR OPT.5 BR






Job Track: 51225
 PlanLog: 202419
 Layout ID: 408224
 Ref #
 Page: 1 of 3
 Date: 04-27-2020
 Designer:
 Sales Rep: Mario DiCano


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T40 Hip Girder	6/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-02-00 1-02-00	337.56 208.00		
	1 2-ply	T40Z Hip Girder	6/12	35-02-00	4-01-04	2 x 4 2 x 6	1-03-08 1-03-08	1-02-00 1-02-00	337.56 208.00		
	2	T41 Hip	6/12	35-02-00	5-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	277.99 174.00		
	2	T42 Hip	6/12	35-02-00	6-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	277.12 174.67		
	2	T43 Hip	6/12	35-02-00	7-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	289.07 179.67		
	2	T44 Hip	6/12	35-02-00	8-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	290.73 183.33		
	2	T45 Hip	6/12	35-02-00	9-01-04	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	301.67 191.33		
	8	T46 Common	6/12	35-02-00	9-11-08	2 x 4	1-03-08 1-03-08	1-02-00 1-02-00	1178.96 725.33		
	2	T47S Roof Special	0/12	10-06-00	3-06-00	2 x 4		3-06-00 3-06-00	101.09 63.67		
	1	T48 Half Hip	6/12	10-06-00	2-08-00	2 x 4	1-03-08	1-02-00 2-08-00	39.94 26.67		
	1	T49 Half Hip	6/12	10-06-00	3-08-00	2 x 4	1-03-08	1-02-00 3-08-00	41.91 27.50		
	2	T50 Flat	0/12	5-07-00	3-00-00	2 x 4		3-00-00 3-00-00	45.54 30.00		
	1	G50 GABLE	0/12	5-07-00	3-00-00	2 x 4		3-00-00 3-00-00	22.18 15.00		
	1	T51 Hip Girder	6/12	10-05-00	3-07-04	2 x 4	1-03-08	1-02-00 1-03-08	43.52 29.67		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST						
	Lumber Yard: TAMARACK LUMBER						Job Track: 51225
	Builder: GREEN PARK HOMES						PlanLog: 202419
	Project: RUSSELL GARDENS PH.3						Layout ID: 408224
	Location: WATERDOWN						Ref #
	Model: MOUNTAINASH 6						Page: 2 of 3
Lot #:						Date: 04-27-2020	
Elevation: 3- STD OR OPT.5 BR						Designer:	
						Sales Rep: Mario DiCano	

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFL	BUNDLE # STACK #	LOAD BY REMARKS
	1	T52 Hip	6 / 12	10-05-00	4-00-00	2 x 4	1-03-08	2-02-00 2-03-08	45.94 29.83		
	1	T53 Hip Girder	6 / 12	10-05-00	3-00-00	2 x 4	1-03-08	2-02-00 2-03-08	46.32 31.83		
	1 2-ply	T54S Roof Special Girder	0 / 12	10-06-08	2-02-00	2 x 4 2 x 6		1-02-00 2-02-00	97.7 64.33		
	18	J1 Jack-Open	6 / 12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	302.3 192.00		
	2	J40 Jack-Open	6 / 12	4-10-08	3-07-04	2 x 4	1-03-08	1-02-00 3-07-04	28.76 18.67		
	5	J41 Jack-Open	6 / 12	2-06-08	3-00-00	2 x 4		1-08-12 3-00-00	49.19 34.17		
	2	J42 Jack-Open	6 / 12	5-05-08	4-01-04	2 x 4		1-04-08 4-01-04	31.44 20.67		
	2	C40 Jack-Open	6 / 12	3-09-07	3-00-12	2 x 4	1-03-08 2-01-01	1-02-00 3-00-12	28.26 17.33		
	2	C41 Jack-Open	6 / 12	1-09-07	2-00-12	2 x 4	1-03-08 4-01-01	1-02-00 2-00-12	23.16 14.67		
	3	C42 Jack-Open	6 / 12	1-10-08	3-00-12	2 x 4	1-03-08 1-10-15	1-02-00 2-01-04	28.71 18.00		
	3	C43 Jack-Open	6 / 12	1-09-07	2-00-12	2 x 4	1-03-08 1-01	1-02-00 2-00-12	21.06 14.00		
	2	C44 Jack-Open	6 / 12	3-09-07	3-00-12	2 x 4	1-03-08 1-01-01	1-02-00 3-00-12	25.88 16.00		
	2	C45 Jack-Open	6 / 12	1-09-07	2-00-12	2 x 4	1-03-08 3-01-01	1-02-00 2-00-12	20.88 13.33		
	1	C46 Jack-Open	6 / 12	1-07-08	3-00-12	2 x 4	1-10-15	1-03-08 2-01-04	7.46 5.33		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP		DELIVERY SHIPLIST	
		Lumber Yard: TAMARACK LUMBER Builder: GREEN PARK HOMES Project: RUSSELL GARDENS PH.3 Location: WATERDOWN Model: MOUNTAINASH 6 Lot #: Elevation: 3- STD OR OPT.5 BR	Job Track: 51225 PlanLog: 202419 Layout ID: 408224 Ref # Page: 3 of 3 Date: 04-27-2020 Designer: Sales Rep: Mario DiCano

Roof Trusses


PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	C47 Jack-Open	6 /12	1-07-08	2-00-12	2 x 4		1-03-08 2-01-04	4.91 3.33		

TOTAL # TRUSS= 77 TOTAL BFT OF ALL TRUSSES= 2730.33 BFT. TOTAL WEIGHT OF ALL TRSSES 4346.93 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
1	Hardware	HGUS26-2	
1	Hardware	LJS26DS	
14	Hardware	LUS24	
2	Hardware	LUS26-2	

TOTAL NUMBER OF
ITEMS= 18

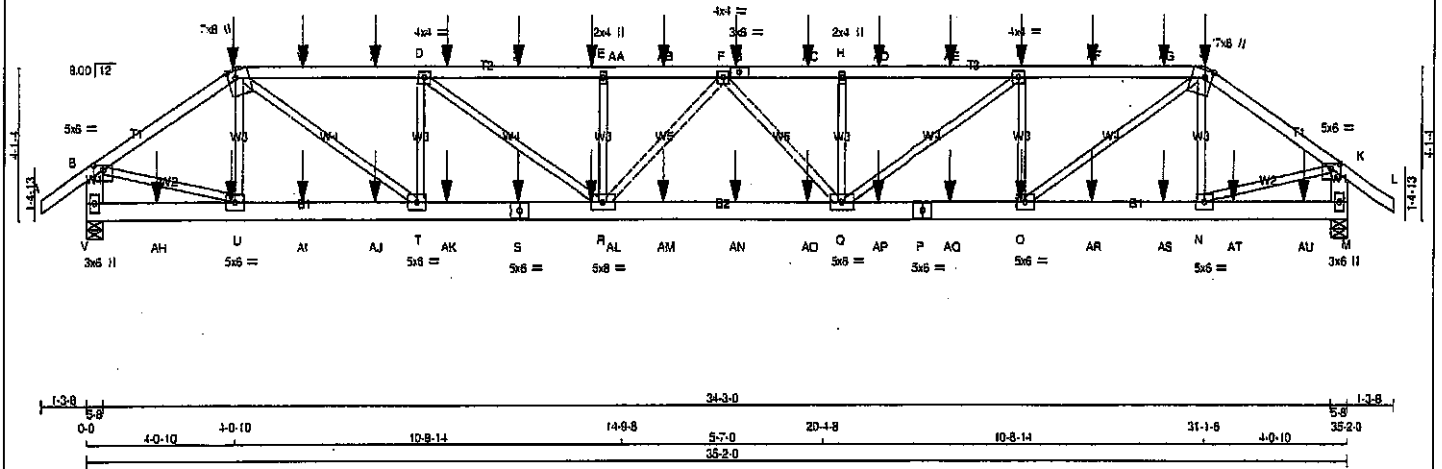

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - G	2x4	DRY	No.2
G - J	2x4	DRY	No.2
J - L	2x4	DRY	No.2
V - B	2x6	DRY	No.2
M - K	2x6	DRY	No.2
V - S	2x6	DRY	No.2
S - P	2x6	DRY	No.2
P - M	2x6	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C	12	SIDE(61.0)
C - G	12	SIDE(61.0)
G - J	12	SIDE(61.0)
J - L	12	SIDE(61.0)
V - B	12	TOP
M - K	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
V - S	12	SIDE(183.1)
S - P	12	SIDE(183.1)
P - M	12	SIDE(183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLYS FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
JT	VERT	JT	HORZ	JT	DOWN	JT	UP
V	3393	0	3393	0	0	5-8	5-8
M	3342	0	3342	0	0	5-8	5-8

UNFACTORED REACTIONS		MAX. MIN. COMPONENT REACTIONS	
JT	COMBINED	JT	COMBINED
V	2397	1585	0
M	2363	1555	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) V, M

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.11 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)	
CHORDS	MEMB.	CHORDS	MEMB.
MAX. FACTORED FORCE (LBS)		MAX. FACTORED FORCE (LBS)	
FR-TO		FR-TO	
A-B	0 35	A-B	-91.8 0.07 (1)
B-C	-4024 0	B-C	-91.8 0.22 (1)
C-W	-8074 0	C-W	-91.8 0.53 (1)
W-X	-8074 0	W-X	-91.8 0.53 (1)
X-D	-8074 0	X-D	-91.8 0.53 (1)
D-Y	-7423 0	D-Y	-91.8 0.83 (1)
Y-Z	-7423 0	Y-Z	-91.8 0.83 (1)
Z-AA	-7423 0	Z-AA	-91.8 0.83 (1)
AA-E	-7423 0	AA-E	-91.8 0.83 (1)
E-AB	-7423 0	E-AB	-91.8 0.35 (1)
AB-F	-7423 0	AB-F	-91.8 0.35 (1)
F-G	-7410 0	F-G	-91.8 0.36 (1)
G-AC	-7410 0	G-AC	-91.8 0.36 (1)
AC-H	-7410 0	AC-H	-91.8 0.36 (1)
H-AD	-7410 0	H-AD	-91.8 0.61 (1)
AD-AE	-7410 0	AD-AE	-91.8 0.61 (1)
AE-I	-7410 0	AE-I	-91.8 0.61 (1)
I-AF	-6040 0	I-AF	-91.8 0.51 (1)
AF-AG	-6040 0	AF-AG	-91.8 0.51 (1)
AG-J	-6040 0	AG-J	-91.8 0.51 (1)
J-K	-3945 0	J-K	-91.8 0.22 (1)
K-L	0 35	K-L	-91.8 0.07 (1)
V-B	-3355 0	V-B	0.0 0.12 (1)
M-K	-3298 0	M-K	0.0 0.12 (1)

V-AH	0 0	-18.5	-18.5 0.04 (4)	10.00
AH-U	0 0	-18.5	-18.5 0.04 (4)	10.00
U-AJ	0 3325	-18.5	-18.5 0.25 (1)	10.00
AJ-AJ	0 3325	-18.5	-18.5 0.25 (1)	10.00
AJ-T	0 3325	-18.5	-18.5 0.25 (1)	10.00
T-AK	0 6074	-18.5	-18.5 0.45 (1)	10.00
AK-S	0 6074	-18.5	-18.5 0.45 (1)	10.00
S-AL	0 6074	-18.5	-18.5 0.45 (1)	10.00
AL-R	0 6074	-18.5	-18.5 0.45 (1)	10.00
R-AM	0 7613	-18.5	-18.5 0.57 (1)	10.00
AM-AN	0 7613	-18.5	-18.5 0.57 (1)	10.00
AN-AO	0 7613	-18.5	-18.5 0.57 (1)	10.00
AO-Q	0 7613	-18.5	-18.5 0.57 (1)	10.00
Q-AP	0 6040	-18.5	-18.5 0.45 (1)	10.00
AP-P	0 6040	-18.5	-18.5 0.45 (1)	10.00
P-AQ	0 6040	-18.5	-18.5 0.45 (1)	10.00
AQ-O	0 6040	-18.5	-18.5 0.45 (1)	10.00
O-AR	0 3261	-18.5	-18.5 0.25 (1)	10.00

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
 GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
 LOADS WERE DERIVED FROM USER INPUT
 NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 8.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

*** NON STANDARD GIRDER ***
 ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF CBC 2010, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPC 2011, TPC 2014

155% OF 31.3 P.S.F. G.S.L. PLUS 6.4 P.S.F. RAIN
 LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.23")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/970 (0.44")

CSI: TC=0.83/1.00 (D-E); BC=0.57/1.00 (Q-R); WB=0.43/1.00 (B-U); SS=0.19/1.00 (C-D)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION
 (PSI) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (I) (INPUT = 0.90)
 JSI METAL= 0.58 (I) (INPUT = 1.00)



PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	1.50	3.00
C	TTWW+m	MT20	7.0	8.0	Edge	2.50
D, F, I						
D	TMVW-l	MT20	4.0	4.0		
E	TMVW+w	MT20	2.0	4.0		
G	TS-l	MT20	3.0	6.0		
H	TMVW+w	MT20	2.0	4.0		
J	TTWW+m	MT20	7.0	8.0	Edge	2.50
K	TMVW-p	MT20	5.0	8.0	1.50	3.00
M	BMV1+p	MT20	3.0	6.0		
N, O, T, U						
N	BMVW-l	MT20	5.0	6.0		
P	BS-l	MT20	5.0	6.0		
Q	BMVW-l	MT20	5.0	8.0		
R	BMVW-l	MT20	5.0	8.0		
S	BS-l	MT20	5.0	6.0		
V	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LOADING

TOTAL LOAD CASES: (4)

CHORDS						WEBS					
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX	MAX.	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX	MAX.
FR-TO		FROM	TO			FR-TO		FROM	TO		
AR-AS	0 3261	-18.5	-18.5	0.25 (1)	10.00						
AS-N	0 3261	-18.5	-18.5	0.25 (1)	10.00						
N-AT	0 0	-18.5	-18.5	0.04 (4)	10.00						
AT-AU	0 0	-18.5	-18.5	0.04 (4)	10.00						
AU-M	0 0	-18.5	-18.5	0.04 (4)	10.00						

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	4-0-10	-48	-55	---	FRONT	VERT	DEAD	---	C1
C	4-0-10	-117	-117	---	FRONT	VERT	TOTAL	---	C1
C	4-0-10	-254	-254	---	FRONT	VERT	SNOW	---	C1
G	17-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
I	25-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
J	31-1-8	-49	-55	---	FRONT	VERT	DEAD	---	C1
J	31-1-8	-254	-254	---	FRONT	VERT	SNOW	---	C1
O	25-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
S	11-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
U	3-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
W	5-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
X	7-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Y	9-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Z	11-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AA	13-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AB	15-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AC	19-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AD	21-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AE	23-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AF	27-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AG	29-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AH	1-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AI	5-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AJ	7-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AK	9-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AL	13-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AM	15-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AN	17-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AO	19-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AP	21-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AQ	23-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AR	27-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AS	29-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AT	31-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1
AU	33-11-4	-28	-28	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	T1Z	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington


Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:05 2020 Page 1

ID:DMCubINVR6TstFoe31v6t zns11-njyhmNBjKcAvHcPQKtuoORW/DoscnkApnRgDRR2zMFle

Scale = 1:57.6

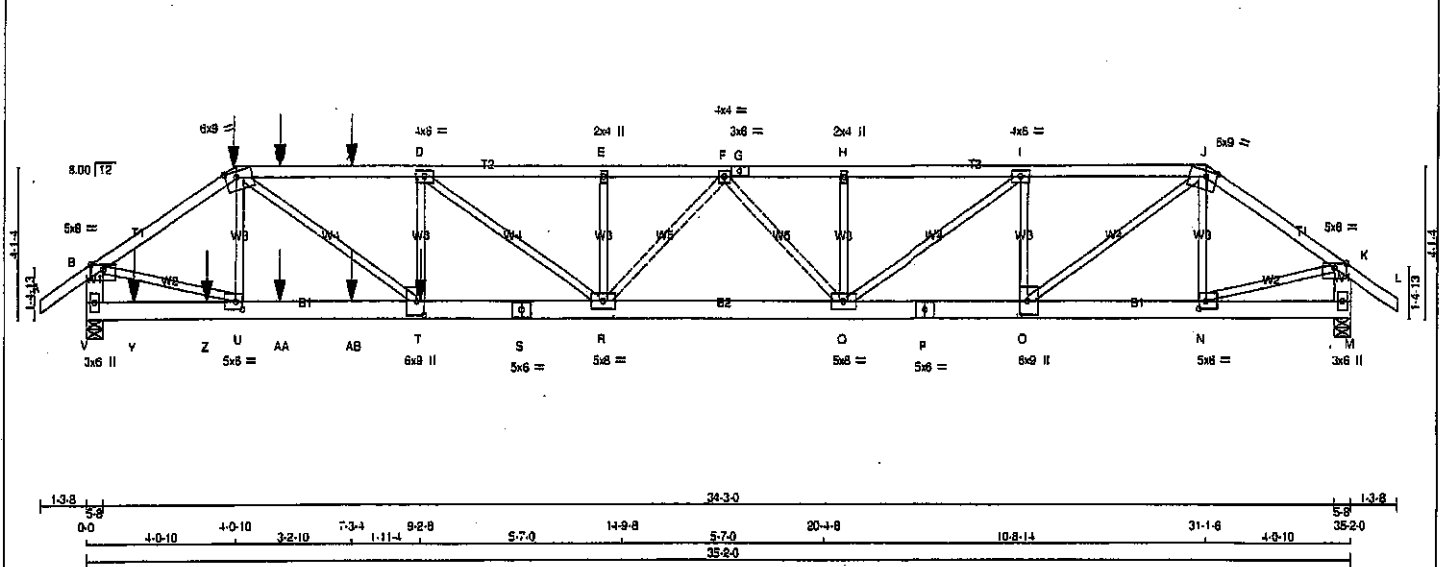

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. SPF A - C 2x4 DRY No.2 SPF C - G 2x4 DRY No.2 SPF G - J 2x4 DRY No.2 SPF J - L 2x4 DRY No.2 SPF V - B 2x6 DRY No.2 SPF M - K 2x6 DRY No.2 SPF V - S 2x6 DRY No.2 SPF S - P 2x6 DRY No.2 SPF P - M 2x6 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT DRY: SEASONED LUMBER. DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS: CHORDS #ROWS SURFACE SPACING (IN) LOAD(PLF) TOP CHORDS : (0.122"x3") SPIRAL NAILS A-C 1 12 SIDE(61.0) C-G 1 12 SIDE(61.0) G-J 1 12 TOP J-L 1 12 TOP V-B 2 12 TOP M-K 2 12 TOP BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS V-S 2 12 SIDE(183.1) S-P 2 12 TOP P-M 2 12 TOP WEBS : (0.122"x3") SPIRAL NAILS 2x3 1 6 SIDE(385.4) D-T 1 4 T-O 1 4 NAILS TO BE DRIVEN FROM ONE SIDE ONLY. GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS. TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED MAXIMUM FACTORED INPUT REORD GROSS REACTION GROSS REACTION BRG BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX V 4215 0 4215 0 0 5-8 5-8 M 2722 0 2722 0 0 5-8 5-8 UNFACTORED REACTIONS 1ST LCASE MAX. MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM. LIVE WIND DEAD SOIL V 2874 1987 0 0 0 0 0 987 0 0 0 M 1921 1283 0 0 0 0 0 638 0 0 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) V. M. BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.00 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MAX. FACTORED WEBS MEMB. FORCE VERT. LOAD LC1 MAX. MAX. MEMB. FORCE MAX. (LBS) (PLF) CSI (LC) LENGTH FR-TO (LBS) CSI (LC) FR-TO A-B 0 35 -91.8 -91.8 0.07 (1) 10.00 U-C -783 0 0.10 (1) B-C -5115 0 -91.8 -91.8 0.26 (1) 4.07 C-T 0 4817 0.80 (1) C-W -9135 0 -91.8 -91.8 0.64 (1) 3.00 T-D -622 0 0.08 (1) W-X -9135 0 -91.8 -91.8 0.64 (1) 3.00 O-I -1797 0 0.23 (1) X-D -9135 0 -91.8 -91.8 0.64 (1) 3.00 C-J 0 3211 0.40 (1) D-E -9106 0 -91.8 -91.8 0.59 (1) 3.05 N-J -512 0 0.06 (1) E-F -9106 0 -91.8 -91.8 0.32 (1) 3.28 B-U 0 4370 0.54 (1) F-G -6926 0 -91.8 -91.8 0.26 (1) 3.57 N-K 0 2893 0.33 (1) G-H -6926 0 -91.8 -91.8 0.26 (1) 3.57 O-I 0 2133 0.26 (1) H-I -6926 0 -91.8 -91.8 0.45 (1) 3.42 D-R -37 24 0.01 (1) I-J -5210 0 -91.8 -91.8 0.34 (1) 3.99 C-H -365 0 0.05 (1) J-K -3153 0 -91.8 -91.8 0.19 (1) 5.04 R-E -343 0 0.04 (1) K-L 0 35 -91.8 -91.8 0.07 (1) 10.00 R-F 0 692 0.09 (1) V-B -4180 0 0.0 0.0 0.15 (1) 6.99 F-O -1061 0 0.23 (1) M-K -2696 0 0.0 0.0 0.10 (1) 7.81 V-Y 0 0 -18.5 -18.5 0.05 (4) 10.00 Y-Z 0 0 -18.5 -18.5 0.05 (4) 10.00 Z-U 0 0 -18.5 -18.5 0.05 (4) 10.00 U-AA 0 4227 -18.5 -18.5 0.35 (1) 10.00 AA-AB 0 4227 -18.5 -18.5 0.35 (1) 10.00 AB-T 0 4227 -18.5 -18.5 0.35 (1) 10.00 T-S 0 8135 -18.5 -18.5 0.81 (1) 10.00 S-R 0 8135 -18.5 -18.5 0.81 (1) 10.00 R-O 0 7845 -18.5 -18.5 0.56 (1) 10.00 O-P 0 5210 -18.5 -18.5 0.38 (1) 10.00 P-O 0 5210 -18.5 -18.5 0.38 (1) 10.00 O-N 0 2604 -18.5 -18.5 0.19 (1) 10.00 N-M 0 0 -18.5 -18.5 0.03 (4) 10.00 FACTORED CONCENTRATED LOADS (LBS) JT LOC. LC1 MAX. MAX+ FACE DIR. TYPE HEEL CONN. C 4-0-10 -48 -55 --- FRONT VERT DEAD --- C1 C 4-0-10 -254 -254 --- FRONT VERT SNOW --- C1 T 9-2-8 -2179 -2179 --- BACK VERT TOTAL --- C1 W 5-3-4 -110 -110 --- BACK VERT TOTAL --- C1 X 7-3-4 -110 -110 --- BACK VERT TOTAL --- C1 Y 1-3-4 -26 -26 --- BACK VERT TOTAL --- C1 Z 3-3-4 -26 -26 --- BACK VERT TOTAL --- C1 AA 5-3-4 -26 -26 --- BACK VERT TOTAL --- C1 AB 7-3-4 -26 -26 --- BACK VERT TOTAL --- C1										DESIGN CRITERIA *** SPECIAL LOADS ANALYSIS *** GEOMETRY AND/OR BASIC LOADS CHANGED BY USER. LOADS WERE DERIVED FROM USER INPUT NO FURTHER MODIFICATIONS WERE MADE SPECIFIED LOADS: TOP CH. LL = 25.8 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 39.0 PSF SPACING = 24.0 IN. O.C. LOADING IN PLAT SECTION BASED ON A SLOPE OF 6.00/12 *** NON STANDARD GIRDER *** ADDTL. USER-DEFINED LOADS APPLIED TO ALL LOAD CASES. THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018, OBC 2012, ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-09, CSA 086-14 - TPIC 2011, TPIC 2014 155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL) = L/360 (1.17") CALCULATED VERT. DEFL.(LL) = L/999 (0.24") ALLOWABLE DEFL.(TL) = L/360 (1.17") CALCULATED VERT. DEFL.(TL) = L/954 (0.44") CSI: TC=0.84/1.00 (C-D:1), BC=0.61/1.00 (R-T:1), WB=0.60/1.00 (C-T:1), SS=0.17/1.00 (C-D:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE HEELS OFF TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 618 354 1887 788 1987 1656 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP = 0.87 (J) INPUT = 0.80 JSI METAL = 0.77 (P) INPUT = 1.00			
---	--	--	--	--	--	--	--	--	--	--	--	--	--	---	--	--	--



Structural component only
DWG# T-2007603 1/4

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T1Z	1	2	GREEN PARK HOMES	
				TRUSS DESC.	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:05 2020 Page 2
ID:DMCubINVR6TstFpe31v6I zns1I-nvhlMNEJKcAvHCpQKTuoQRWDoscNkAgnRqDRR2zMFle


PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	
C	TTWW-m	MT20	6.0	9.0	1.75	3.50
D	TMWW-l	MT20	4.0	6.0		
E	TMWW-w	MT20	2.0	4.0		
F	TMWW-l	MT20	4.0	4.0		
G	TS-l	MT20	3.0	8.0		
H	TMV-w	MT20	2.0	4.0		
I	TMWW-l	MT20	4.0	6.0		
J	TTWW-m	MT20	6.0	9.0	1.75	3.50
K	TMVW-p	MT20	5.0	8.0	Edge	
M	BMV1-p	MT20	3.0	6.0		
N	BMWW-l	MT20	5.0	6.0	2.50	2.25
O	BMWW-l	MT20	6.0	9.0	4.50	2.50
P	BS-l	MT20	5.0	6.0		
Q	BMWWW-l	MT20	5.0	8.0		
R	BMWWW-l	MT20	5.0	8.0		
S	BS-l	MT20	5.0	6.0		
T	BMWW-l	MT20	6.0	9.0	4.50	2.50
U	BMWW-l	MT20	5.0	6.0	2.50	2.25
V	BMV1-p	MT20	3.0	6.0		


Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2007603 7/2

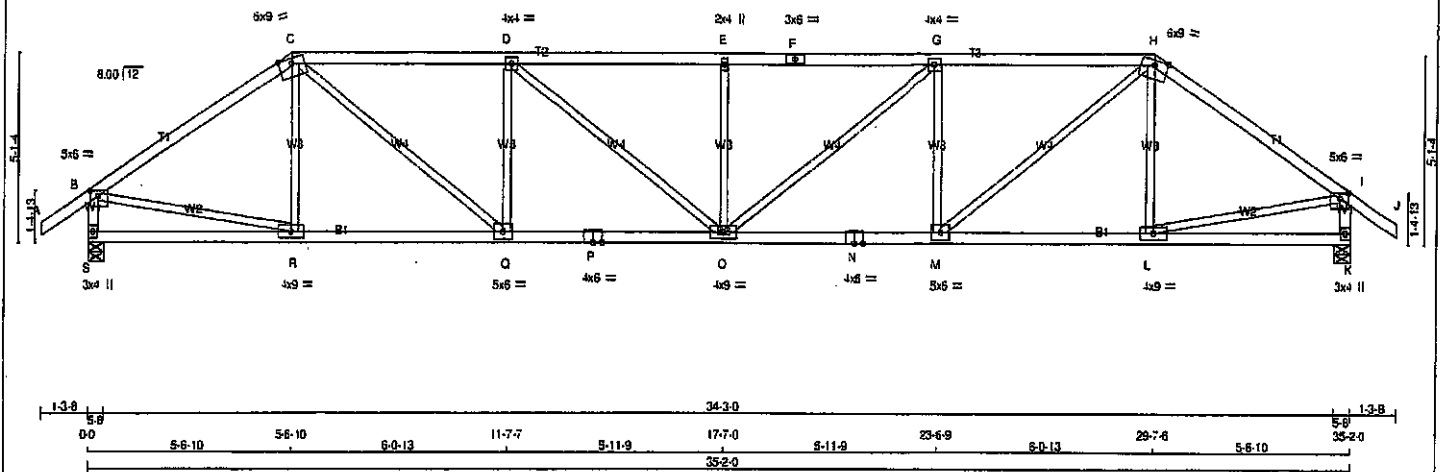

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - F	2x4	DRY No.2	SPF
F - H	2x4	DRY No.2	SPF
H - J	2x4	DRY No.2	SPF
S - B	2x4	DRY No.2	SPF
K - I	2x4	DRY No.2	SPF
S - P	2x4	DRY No.2	SPF
P - N	2x4	DRY No.2	SPF
N - K	2x4	DRY No.2	SPF

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-p	MT20	5.0	8.0	1.75	2.75
C	TTWW-m	MT20	6.0	9.0	Edge	
D	BMWW-l	MT20	4.0	4.0		
E	TMW-w	MT20	2.0	4.0		
F	TS-l	MT20	3.0	8.0		
G	TMWV-m	MT20	4.0	4.0		
H	TTWW-m	MT20	6.0	9.0	Edge	
I	TMWV-p	MT20	5.0	8.0	1.75	2.75
K	BMV1-p	MT20	3.0	4.0		
L	BMWW-l	MT20	4.0	9.0		
M	BMWW-l	MT20	5.0	6.0		
N	BS-l	MT20	4.0	6.0		
O	BMWW-w	MT20	4.0	9.0		
P	BS-l	MT20	4.0	6.0		
Q	BMWW-l	MT20	5.0	6.0		
R	BMWW-l	MT20	4.0	9.0		
S	BMV1-p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	REQD
S	2085	0	2085	0	0	5-8	5-8	
K	2085	0	2085	0	0	5-8	5-8	

UNFACTORED REACTIONS

JT	1ST LCASE	MAX.	MIN.	COMPONENT REACTIONS
S	COMBINED	SNOW	LIVE	PERM.LIVE
S	1458	970.0	0.0	0.0
K	1458	970.0	0.0	0.0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.97 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED HORZ. LOAD (LBS)	MAX. UNBRACED LENGTH (FT)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED HORZ. LOAD (LBS)	MAX. UNBRACED LENGTH (FT)
FR-TO					FR-TO				
A-B	0 35	-91.8	-91.8	0.12 (1)	10.00	R-C	-243	10	0.09 (1)
B-C	-2296 0	-91.8	-91.8	0.70 (1)	3.78	C-Q	0	1670	0.38 (1)
C-D	-3213 0	-91.8	-91.8	0.80 (1)	3.19	Q-D	-929	0	0.36 (1)
D-E	-3594 0	-91.8	-91.8	0.88 (1)	2.97	D-Q	0	490	0.11 (1)
E-F	-3594 0	-91.8	-91.8	0.88 (1)	2.97	Q-E	-505	0	0.19 (1)
F-G	-3594 0	-91.8	-91.8	0.88 (1)	2.97	Q-G	0	490	0.11 (1)
G-H	-3213 0	-91.8	-91.8	0.80 (1)	3.19	M-G	-929	0	0.36 (1)
H-I	-2296 0	-91.8	-91.8	0.70 (1)	3.78	M-H	0	1670	0.38 (1)
I-J	0 35	-91.8	-91.8	0.12 (1)	10.00	L-H	-243	10	0.09 (1)
S-B	-2023 0	0.0	0.0	0.21 (1)	5.94	B-R	0	1943	0.44 (1)
K-I	-2023 0	0.0	0.0	0.21 (1)	5.94	L-I	0	1943	0.44 (1)
S-R	0 0	-18.5	-18.5	0.15 (4)	10.00				
R-Q	0 1903	-18.5	-18.5	0.39 (1)	10.00				
Q-P	0 3213	-18.5	-18.5	0.58 (1)	10.00				
P-O	0 3213	-18.5	-18.5	0.58 (1)	10.00				
O-N	0 3213	-18.5	-18.5	0.58 (1)	10.00				
N-M	0 3213	-18.5	-18.5	0.58 (1)	10.00				
M-L	0 1903	-18.5	-18.5	0.39 (1)	10.00				
L-K	0 0	-18.5	-18.5	0.15 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF

BOT CH. LL = 0.0 PSF
DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, NBC 2012, ABC 2019
- PART 9 OF NBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.21")

ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.39")

CSI: TC=0.86/1.00 (D-E-1), BC=0.58/1.00 (M-O-1), WB=0.44/1.00 (L-1), SS=0.26/1.00 (G-H-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PL) (PL)

MAX MIN MAX MIN MAX MIN

MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.87 (I) (INPUT = 0.90)
JSI METAL= 0.74 (P) (INPUT = 1.00)



Structural component only
DWG# T-2007604


JOB NAME 408222	TRUSS NAME T3	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 \$ Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 09:00:06 2020 Page 1
 ID:DMCubNVR6TstFoe31v6l_zns11-F8H4aJcX5wmmMccuAP1x12QrG_VTXHwLJz? UzMFid
 1-3-8 0-0 3-7-9 3-7-9 3-5-1 7-0-10 5-3-13 12-4-7 5-2-9 17-7-0 5-2-9 22-9-9 5-3-13 28-1-6 3-3-1 31-6-7 35-2-0 36-5-8 1-3-8
 Scale = 1:57.6

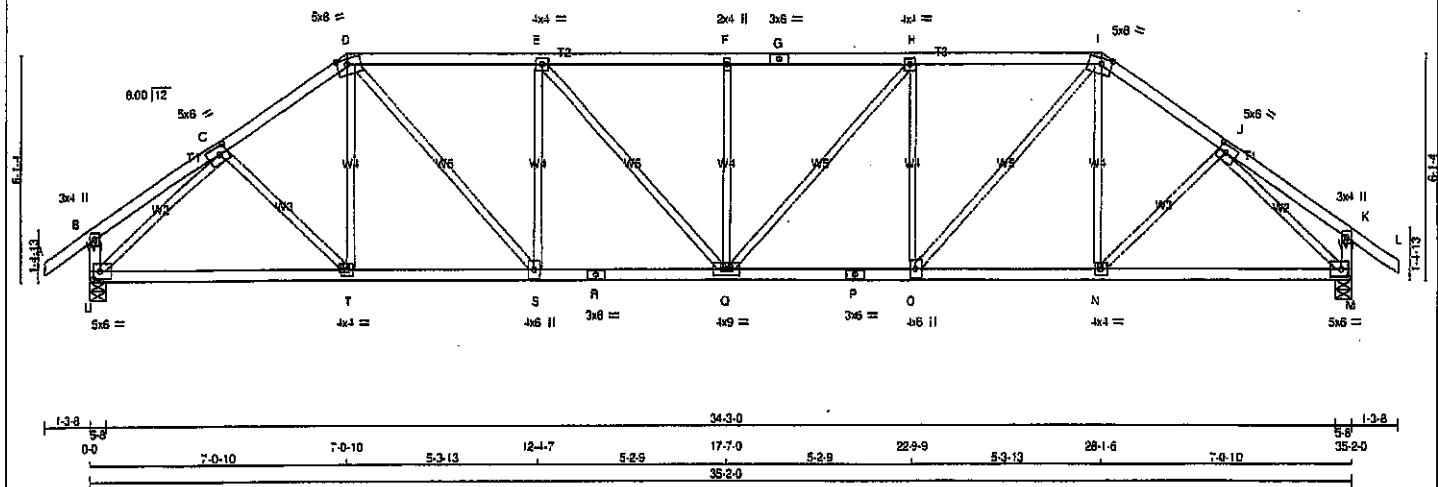

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N, L, G, A. RULES	CHORDS	SIZE	LUMBER	DESCR.	BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD	SPECIFIED LOADS:	
A - D	2x4	DRY	No.2	SPF	FACTORED	GROSS REACTION	GROSS REACTION	BRG	BRG	TOP CH. LL = 25.6 PSF	
D - G	2x4	DRY	No.2	SPF	JT VERT	DOWN	HORIZ	UPLIFT	IN-SX	DL = 6.0 PSF	
G - I	2x4	DRY	No.2	SPF	U	2065	0	0	5-8	BOT CH. LL = 0.0 PSF	
I - L	2x4	DRY	No.2	SPF	M	2065	0	0	5-8	DL = 7.4 PSF	
U - B	2x4	DRY	No.2	SPF	UNFACTORED REACTIONS	1ST CASE	MAX. MIN. COMPONENT REACTIONS			TOTAL LOAD = 39.0 PSF	
M - K	2x4	DRY	No.2	SPF						SPACING = 24.0 IN. C/C	
U - R	2x4	DRY	No.2	SPF							
R - P	2x4	DRY	No.2	SPF							
P - M	2x4	DRY	No.2	SPF							
ALL WEBS	2x3	DRY	No.2	SPF							
EXCEPT											
DRY: SEASONED LUMBER.				BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M				LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12			
				BRACING				THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015			
				TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.53 FT.				THIS DESIGN COMPLIES WITH:			
				MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.				- PART 9 OF BCBC 2018, OBC 2012, ABC 2019			
				ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.				- PART 9 OF OBC 2012 (2019 AMENDMENT)			
				LOADING				- CSA 088-09, CSA 085-14			
				TOTAL LOAD CASES: (4)				- TPIC 2011, TPIC 2014			
								55% OF 31.3 P.S.F. G.S.L. PLUS 6.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD			
								ALLOWABLE DEFL.(LL) = L/360 (1.17")			
								CALCULATED VERT. DEFL.(LL) = L/999 (0.16")			
								ALLOWABLE DEFL.(TL) = L/360 (1.17")			
								CALCULATED VERT. DEFL.(TL) = L/999 (0.28")			
								CSI: TC=0.56/1.00 (E-F:1), BC=0.49/1.00 (O-Q:1), WB=0.97/1.00 (J-M:1), SS=0.23/1.00 (D-E:1)			
								DOL LUMBER=1.00 NAIL=1.00 L3 BEND=1.10			
								COMP=1.10 SHEAR=1.10 TENS=1.10			
								COMPANION LIVE LOAD FACTOR = 1.00			
								TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.			
								NAIL VALUES			
								PLATE GRIP(DRY) SHEAR SECTION			
								(PSI) (PLI) (PLI)			
								MAX MIN MAX MIN MAX MIN			
								MT20 618 354 1667 788 1987 1656			
								PLATE PLACEMENT TOL = 0.250 inches			
								PLATE ROTATION TOL = 5.0 Deg.			
								JSI GRIP= 0.90 (M) (INPUT = 0.90)			
								JSI METAL= 0.84 (P) (INPUT = 1.00)			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV-p	MT20	3.0	4.0	
C	TMWW-t	MT20	5.0	6.0	2.50 2.50
D	TTWW-m	MT20	5.0	8.0	1.75 3.50
E	TMWW-t	MT20	4.0	4.0	
F	TMWW-w	MT20	2.0	4.0	
G	TS-t	MT20	3.0	6.0	
H	TMWW-t	MT20	4.0	4.0	
I	TTWW-m	MT20	5.0	8.0	1.75 3.50
J	TMWW-t	MT20	5.0	6.0	2.50 2.50
K	TMV-p	MT20	3.0	4.0	
M	BMVW-t	MT20	5.0	6.0	2.50 2.25
N	BMVW-t	MT20	4.0	4.0	
O	BMVW-t	MT20	4.0	6.0	
P	BS-t	MT20	3.0	6.0	
Q	BMVWW-t	MT20	4.0	9.0	
R	BS-t	MT20	3.0	6.0	
S	BMVW-t	MT20	4.0	6.0	
T	BMVW-t	MT20	4.0	4.0	
U	BMVW-t	MT20	5.0	6.0	2.50 2.25




Structural component only
 DWG# T-2007605

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T4	2	1	GREEN PARK HOMES	
TRUSS DESC.					

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 M Tek Industries, Inc. Tue Apr 28 09:00:07 2020 Page 1
ID:DMCubINVR6TstFae31v6f_zns1t-LrSn2CzSdQdXWzSuwGTsbZlgK2C5T4u8YVWzMFic

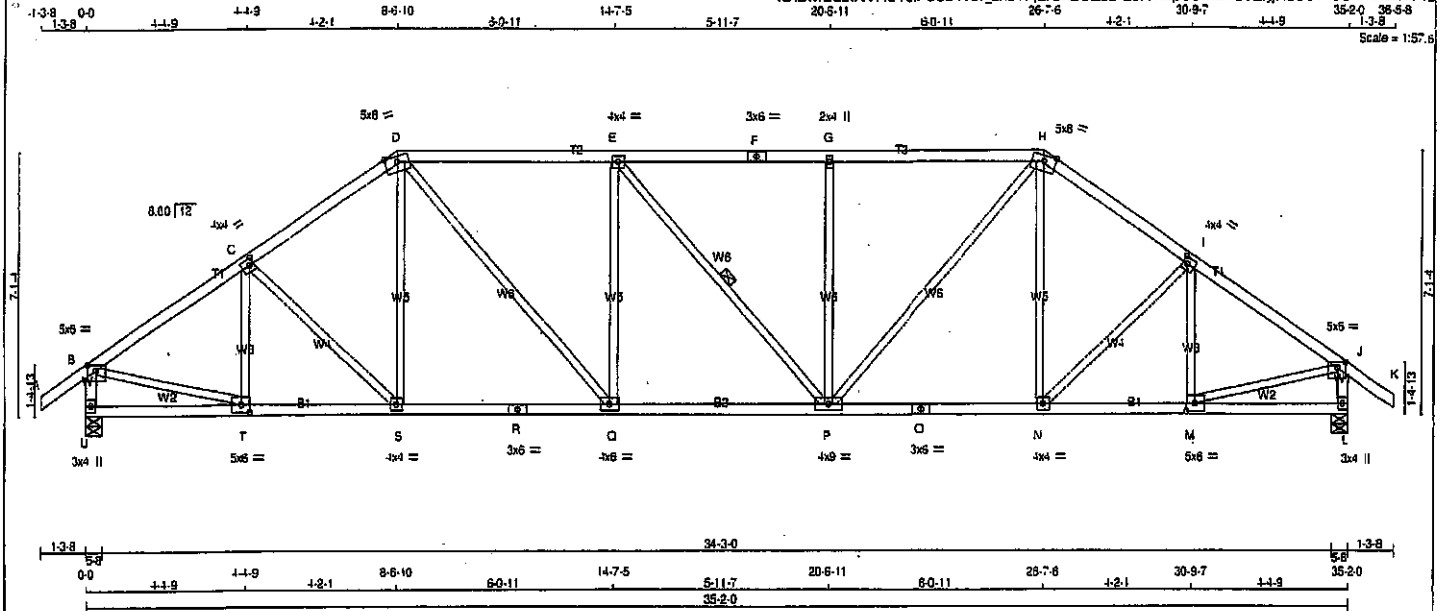

TOTAL WEIGHT = 2 K 155 = 308 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
B - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - K	2x4	DRY	No.2
U - 9	2x4	DRY	No.2
L - J	2x4	DRY	No.2
U - R	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - L	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW-p	MT20	5.0	6.0 1.75 2.75
C	TMVW-t	MT20	4.0	4.0 2.00 1.50
D	TTWW-m	MT20	5.0	8.0 Edge
E	TMVW-t	MT20	4.0	4.0
F	TS-t	MT20	3.0	6.0
G	TMVW-w	MT20	2.0	4.0
H	TTWW-m	MT20	5.0	8.0 Edge
I	TMVW-t	MT20	4.0	4.0 2.00 1.50
J	TMVW-p	MT20	5.0	8.0 1.75 2.75
L	BMV1-p	MT20	3.0	4.0
M	BMVW-t	MT20	5.0	6.0 2.50 2.75
N	BMVW-t	MT20	4.0	4.0
O	BS-t	MT20	3.0	6.0
P	BMVW-w	MT20	4.0	9.0
Q	BMVW-t	MT20	4.0	6.0
R	BS-t	MT20	3.0	6.0
S	BMVW-t	MT20	4.0	4.0
T	BMVW-t	MT20	5.0	6.0 2.50 2.75
U	BMV1-p	MT20	3.0	4.0

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	RECORD
		GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	UPLIFT	IN-SX
U	2065	0	2065	0	5-8
L	2065	0	2065	0	5-8

UNFACTORED REACTIONS		1ST CASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
U	1458	970	0	0	0	488	0	0
L	1458	970	0	0	0	488	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.72 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1.2 LENGTH OF E-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING		CHORDS									
		MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX	LC2 MAX	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	LC1 MAX	LC2 MAX
		FR-TO						FR-TO			
A-B	0 35		-91.8	-91.8	0.12 (1)	10.00	T-C	-397	0	0.11 (1)	
B-C	-2269	0	-91.8	-91.8	0.37 (1)	4.19	C-S	-78	0	0.05 (1)	
C-D	-2254	0	-91.8	-91.8	0.36 (1)	4.21	S-D	0	155	0.04 (4)	
D-E	-2485	0	-91.8	-91.8	0.84 (1)	3.72	D-Q	0	949	0.21 (1)	
E-F	-2483	0	-91.8	-91.8	0.84 (1)	3.72	Q-E	-597	0	0.52 (1)	
F-G	-2483	0	-91.8	-91.8	0.84 (1)	3.72	E-P	-2	0	0.00 (1)	
G-H	-2483	0	-91.8	-91.8	0.83 (1)	3.74	P-G	-597	0	0.52 (1)	
H-I	-2254	0	-91.8	-91.8	0.36 (1)	4.21	P-H	0	947	0.21 (1)	
I-J	-2268	0	-91.8	-91.8	0.37 (1)	4.19	H-N	0	157	0.04 (4)	
J-K	0 35		-91.8	-91.8	0.12 (1)	10.00	N-I	-78	0	0.05 (1)	
K-L	-2027	0	0.0	0.0	0.21 (1)	5.94	M-I	-397	0	0.11 (1)	
L-J	-2026	0	0.0	0.0	0.21 (1)	5.94	B-T	0	1965	0.44 (1)	
U-T	0 0		-18.5	-18.5	0.08 (4)	10.00	M-J	0	1955	0.44 (1)	
T-S	0 1908		-18.5	-18.5	0.37 (1)	10.00					
S-R	0 1853		-18.5	-18.5	0.36 (1)	10.00					
R-O	0 1853		-18.5	-18.5	0.36 (1)	10.00					
Q-P	0 2485		-18.5	-18.5	0.47 (1)	10.00					
P-O	0 1854		-18.5	-18.5	0.36 (1)	10.00					
O-N	0 1854		-18.5	-18.5	0.38 (1)	10.00					
N-M	0 1908		-18.5	-18.5	0.37 (1)	10.00					
M-L	0 0		-18.5	-18.5	0.08 (4)	10.00					

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 5.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.17")
CALCULATED VERT. DEFL.(LL)= L/999 (0.12")
ALLOWABLE DEFL.(TL)= L/360 (1.17")
CALCULATED VERT. DEFL.(TL)= L/999 (0.24")

CSI: TC=0.64/1.00 (D-E:1), BC=0.47/1.00 (P-Q:1), WB=0.52/1.00 (E-Q:1), SS=0.28/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.90 (D) (INPUT = 0.90)
JSI METAL= 0.62 (C) (INPUT = 1.00)



Structural component only
DWG# T-2007606

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T6	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 09:00:09 2020 Page 1
 ID:DMCubINVR6TstFoe31v6t_zns1l-flyCCKePQrgLmp6BZlykZHqxkU0ng01MLSB/apzMFia
 1-3-8 0-0 5-10-9 5-10-9 5-8-1 11-6-10 6-0-6 17-7-0 6-0-6 23-7-6 5-8-1 29-3-7 5-10-9 35-2-0 36-5-8
 Scale = 1:57.6

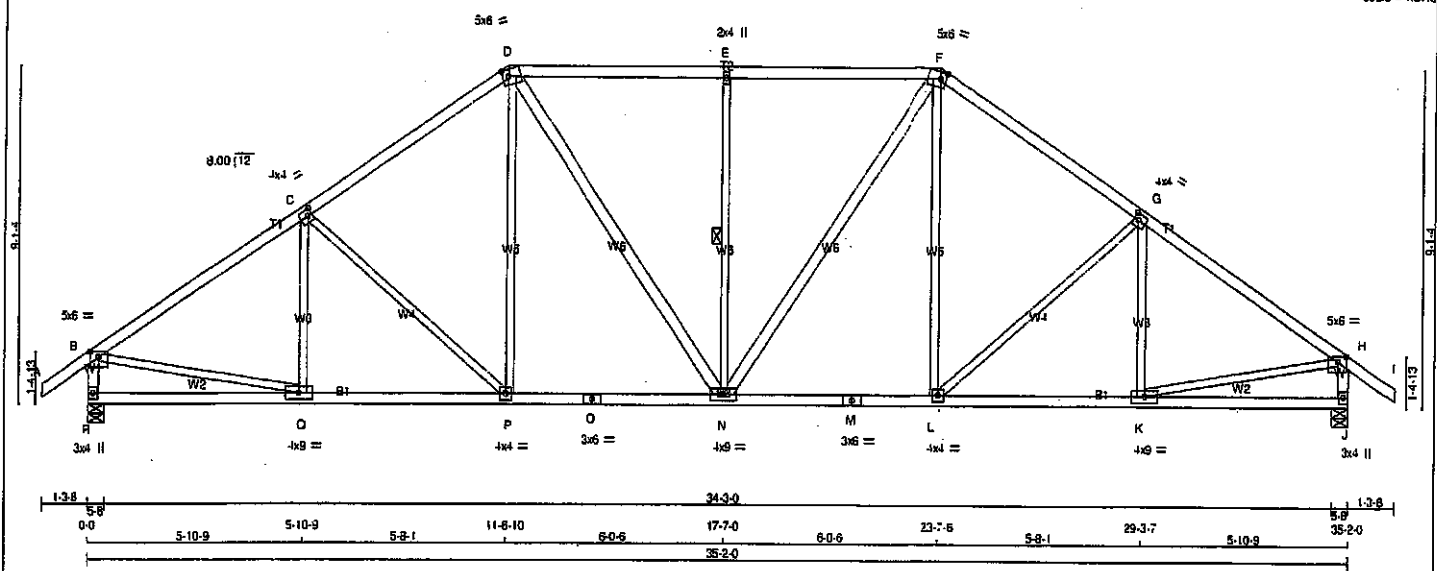

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - I	2x4	DRY	No.2	SPF	
R - S	2x4	DRY	No.2	SPF	
J - H	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
M - J	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					
D - N	2x4	DRY	No.2	SPF	
N - F	2x4	DRY	No.2	SPF	

DRY, SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.75	2.75
C	TMVW-l	MT20	4.0	4.0	2.00	1.50
D	TTWW-m	MT20	5.0	6.0	2.25	2.00
E	TMVW-w	MT20	2.0	4.0		
F	TTWW-m	MT20	5.0	6.0	2.25	2.00
G	TMVW-l	MT20	4.0	4.0	2.00	1.50
H	TMVW-p	MT20	5.0	6.0	1.75	2.75
J	BMV1-p	MT20	3.0	4.0		
K	BMVW-l	MT20	4.0	9.0		
L	BMVW-l	MT20	4.0	4.0		
M	BS-l	MT20	3.0	6.0		
N	BMVWW-l	MT20	4.0	9.0		
D	BS-l	MT20	3.0	6.0		
P	BMVW-l	MT20	4.0	4.0		
Q	BMVW-l	MT20	4.0	9.0		
R	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
R	2065	0	2065	0
J	2065	0	2065	0

UNFACTORED REACTIONS	1ST CASE	SNOW	MIN. COMPONENT REACTIONS	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	COMBINED	970	0	0	0	0	489	0
R	1458	970	0	0	0	0	489	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.99 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
 TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	VERT. LOAD	LCI	MAX	MAX.	UNBRAC	MEMB.	MAX. FACTORED	MAX
MEMB.	FORCE	(PLF)	CSI (LC)	MAX	MAX.	UNBRAC	MEMB.	FORCE	MAX	CSI (LC)
FR-TO	FROM	TO	LENGTH	FR-TO	FROM	TO	LENGTH	FR-TO	FROM	TO
A-B	0	35	-91.8	-91.8	0.12 (1)	10.00	Q-C	-249	11	0.11 (1)
B-C	-2346	0	-91.8	-91.8	0.52 (1)	3.99	C-P	-356	0	0.42 (1)
C-D	-2095	0	-91.8	-91.8	0.48 (1)	4.22	P-D	0	341	0.08 (1)
D-E	-1985	0	-91.8	-91.8	0.49 (1)	4.26	D-N	0	477	0.08 (1)
E-F	-1985	0	-91.8	-91.8	0.49 (1)	4.26	N-E	-678	0	0.37 (1)
F-G	-2095	0	-91.8	-91.8	0.48 (1)	4.22	N-F	0	477	0.08 (1)
G-H	-2346	0	-91.8	-91.8	0.52 (1)	3.99	L-F	0	341	0.08 (1)
H-I	0	35	-91.8	-91.8	0.12 (1)	10.00	L-G	-356	0	0.42 (1)
R-B	-2018	0	0.0	0.0	0.21 (1)	5.94	K-G	-249	11	0.11 (1)
J-H	-2018	0	0.0	0.0	0.21 (1)	5.94	B-Q	0	201	0.45 (1)
							K-H	0	201	0.45 (1)
R-Q	0	0	-18.5	-18.5	0.14 (4)	10.00				
Q-P	0	1980	-18.5	-18.5	0.39 (1)	10.00				
P-O	0	1718	-18.5	-18.5	0.34 (1)	10.00				
O-N	0	1718	-18.5	-18.5	0.34 (1)	10.00				
N-M	0	1718	-18.5	-18.5	0.34 (1)	10.00				
M-L	0	1718	-18.5	-18.5	0.34 (1)	10.00				
L-K	0	1981	-18.5	-18.5	0.39 (1)	10.00				
K-J	0	0	-18.5	-18.5	0.14 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 8.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF BCBC 2018, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.10")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.52(1.00 (G-H:1), BC=0.39(1.00 (K-L:1), WB=0.45(1.00 (H-K:1), SS=0.27(1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 798 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (H) INPUT = 0.90
 JSI METAL= 0.56 (M) INPUT = 1.00




Structural component only
 DWG# T-2007608

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T7	6	1	GREEN PARK HOMES	
TRUSS DESC.					

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 09:00:10 2020 Page 1
ID:DMCubINVR6TsFoe31v6l_zns11-7wWp4FR88oCCzh070Uz5VD4qIMXPTGWA6xC7FzMFIZ
35-20 35-58
1-3-8 1-3-8
Scale = 1:58.9

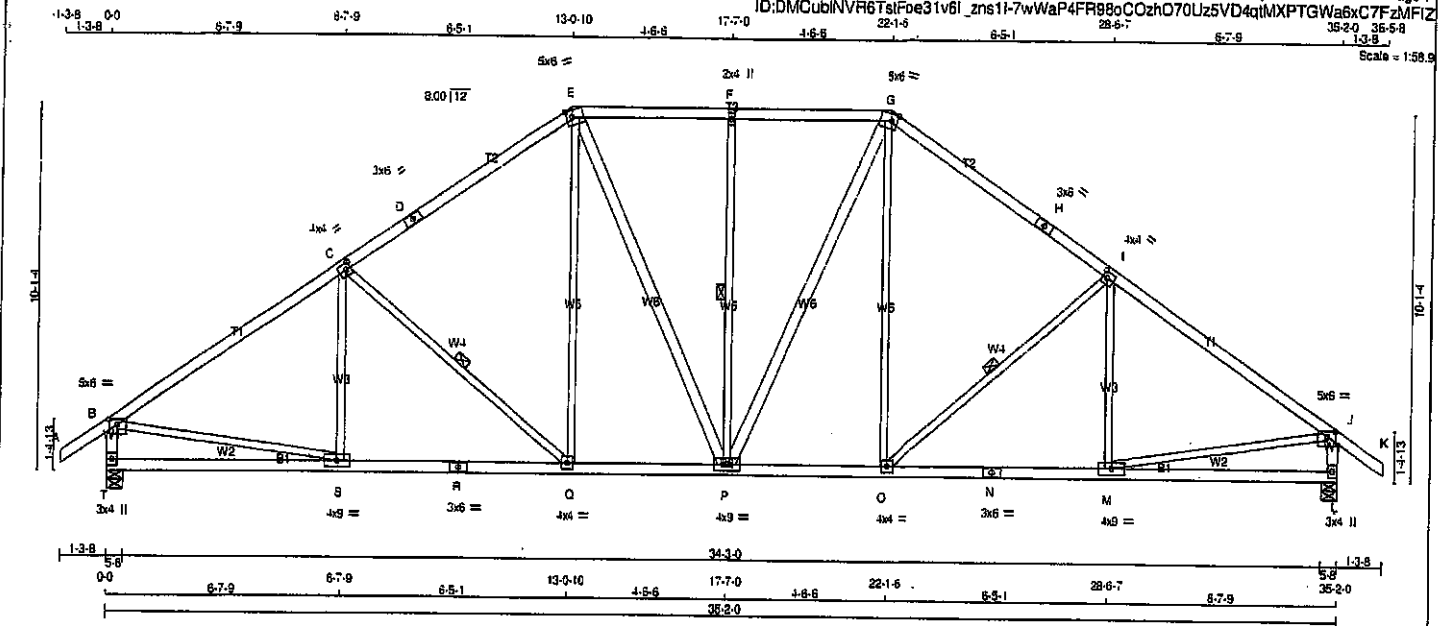

LUMBER	SIZE	DESCR.
N. L. G. A. RULES		
CHORDS		
A - D	2x4 DRY	No.2
D - E	2x4 DRY	No.2
E - G	2x4 DRY	No.2
G - H	2x4 DRY	No.2
H - K	2x4 DRY	No.2
T - B	2x4 DRY	No.2
L - J	2x4 DRY	No.2
T - R	2x4 DRY	No.2
R - N	2x4 DRY	No.2
N - L	2x4 DRY	No.2
ALL WEBS	2x3 DRY	No.2
EXCEPT		
E - P	2x4 DRY	No.2
P - G	2x4 DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-p	MT20	5.0	6.0	1.75	2.75
C	TMWV-i	MT20	4.0	4.0	2.00	1.50
D	TS-i	MT20	3.0	6.0		
E	TTWV-m	MT20	5.0	6.0	2.25	2.00
F	TMWV-w	MT20	2.0	4.0		
G	TTWV-m	MT20	5.0	6.0	2.25	2.00
H	TS-i	MT20	3.0	6.0		
I	TMWV-i	MT20	4.0	4.0	2.00	1.50
J	TMWV-p	MT20	5.0	6.0	1.75	2.75
L	BMV1-p	MT20	3.0	4.0		
M	BMWV-i	MT20	4.0	9.0		
N	BS-i	MT20	3.0	6.0		
O	BMWV-i	MT20	4.0	9.0		
P	BMWV-w	MT20	4.0	9.0		
Q	BMWV-i	MT20	4.0	9.0		
R	BS-i	MT20	3.0	6.0		
S	BMWV-i	MT20	4.0	9.0		
T	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
GROSS REACTION		GROSS REACTION	BRG	BRG
JT	VERT	DOWN	IN-SX	IN-SX
T	2065	0	0	5-8
L	2065	0	0	5-8

UNFACTORED REACTIONS

1ST LOSE	MAX. MIN. COMPONENT REACTIONS	DEAD	SOIL
JT	COMBINED		
T	1458	970	0
L	1458	970	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.77 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-Q, F-P, I-Q.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS			WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
A-B	0 35	-91.8	-91.8	0.12 (1)	10.00	S-C	-189 46 0.10 (1)
B-C	-2358 0	-91.8	-91.8	0.89 (1)	3.77	C-Q	-484 0 0.24 (1)
C-D	-1996 0	-91.8	-91.8	0.62 (1)	4.11	Q-E	0 415 0.09 (1)
D-E	-1996 0	-91.8	-91.8	0.62 (1)	4.11	E-P	0 315 0.05 (1)
E-F	-1781 0	-91.8	-91.8	0.27 (1)	4.77	P-F	-502 0 0.35 (1)
F-G	-1761 0	-91.8	-91.8	0.27 (1)	4.77	P-G	0 315 0.05 (1)
G-H	-1996 0	-91.8	-91.8	0.62 (1)	4.11	O-G	0 415 0.09 (1)
H-I	-1996 0	-91.8	-91.8	0.62 (1)	4.11	O-I	-484 0 0.24 (1)
I-J	-2358 0	-91.8	-91.8	0.89 (1)	3.77	M-I	-189 46 0.10 (1)
J-K	0 35	-91.8	-91.8	0.12 (1)	10.00	B-S	0 2021 0.45 (1)
T-B	-2014 0	0.0	0.0	0.21 (1)	5.95	M-J	0 2021 0.45 (1)
L-J	-2014 0	0.0	0.0	0.21 (1)	5.95		
T-S	0 0	-18.5	-18.5	0.19 (4)	10.00		
S-R	0 1995	-18.5	-18.5	0.42 (1)	10.00		
R-Q	0 1995	-18.5	-18.5	0.42 (1)	10.00		
Q-P	0 1629	-18.5	-18.5	0.32 (1)	10.00		
P-O	0 1629	-18.5	-18.5	0.32 (1)	10.00		
O-N	0 1995	-18.5	-18.5	0.42 (1)	10.00		
N-M	0 1995	-18.5	-18.5	0.42 (1)	10.00		
M-L	0 0	-18.5	-18.5	0.19 (4)	10.00		

TOTAL WEIGHT = 6 X 172 = 1030 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/599 (0.09")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/599 (0.18")

CSI: TC=0.69/1.00 (I-J:1), BC=0.42/1.00 (M-O:1), WB=0.45/1.00 (J-M:1), SSI=0.24/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1687 788 1987 1656


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (J) (INPUT = 0.90)
JSI METAL = 0.67 (N) (INPUT = 1.00)



Structural component only
DWG# T-2007609

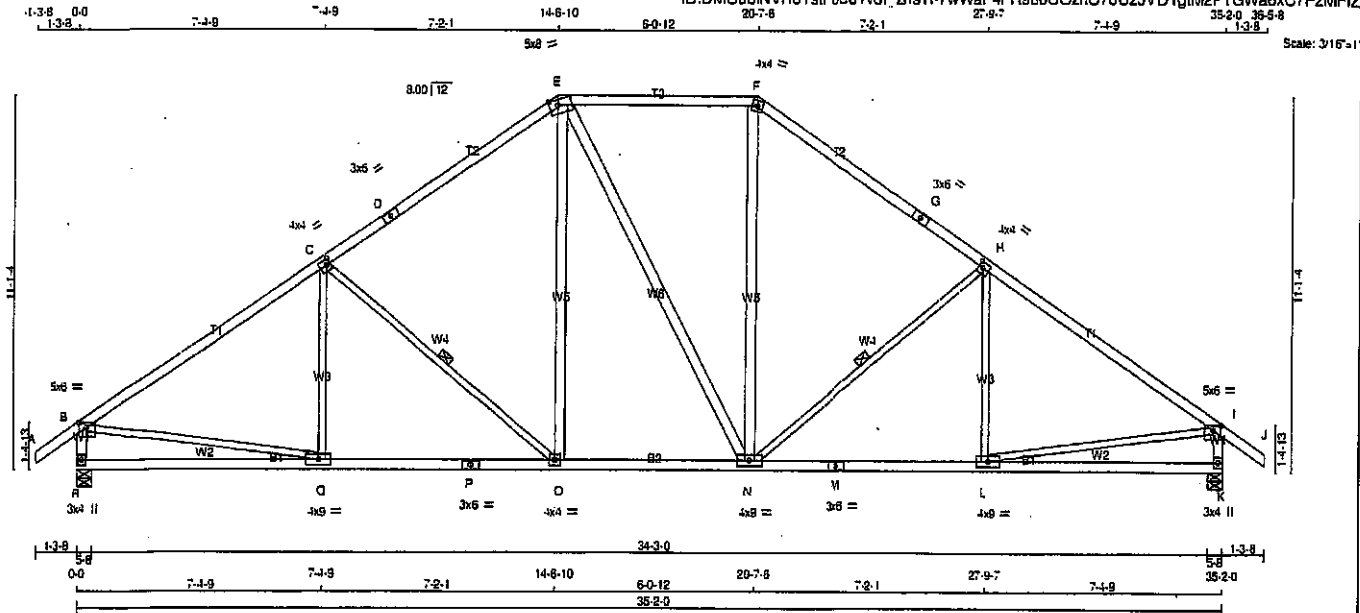

TOTAL WEIGHT = 2 X 166 = 333 lb

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - E	2x4	DRY No.2	SPF
E - F	2x4	DRY No.2	SPF
F - G	2x4	DRY No.2	SPF
G - J	2x4	DRY No.2	SPF
H - B	2x4	DRY No.2	SPF
K - I	2x4	DRY No.2	SPF
R - P	2x4	DRY No.2	SPF
P - M	2x4	DRY No.2	SPF
M - K	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF
O - E	2x4	DRY No.2	SPF
E - N	2x4	DRY No.2	SPF
N - F	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.75	2.75
C	TMWW-I	MT20	4.0	4.0	2.00	1.50
D	TS-I	MT20	3.0	6.0		
E	TTWW-m	MT20	5.0	9.0	2.00	3.00
F	TTW-m	MT20	4.0	4.0		
G	TS-I	MT20	3.0	6.0		
H	TMVW-I	MT20	4.0	4.0	2.00	1.50
I	TMVW-p	MT20	5.0	6.0	1.75	2.75
K	BMV-I+p	MT20	3.0	4.0		
L	BMWW-I	MT20	4.0	9.0		
M	BS-I	MT20	3.0	6.0		
N	BMWW-I	MT20	4.0	9.0		
O	BMWW-I	MT20	4.0	4.0		
P	BS-I	MT20	3.0	6.0		
Q	BMWW-I	MT20	4.0	9.0		
R	BMV-I+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
R	2055 0	2055 0	5-8	5-8
K	2055 0	2055 0	5-8	5-8

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1458	970 0	0 0	0 0	0 0	488 0	0 0
K	1458	970 0	0 0	0 0	0 0	488 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.45 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-C, H-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO				FR-TO			
A-B	0 35	-91.8 -91.8 0.12 (1)	10.00	Q-C	-140 76	0.09 (1)	
B-C	-2357 0	-91.8 -91.8 0.89 (1)	3.45	C-O	-604 0	0.38 (1)	
C-D	-1888 0	-91.8 -91.8 0.78 (1)	3.91	O-E	0 499	0.08 (1)	
D-E	-1888 0	-91.8 -91.8 0.78 (1)	3.91	E-N	0 0	0.00 (1)	
E-F	-1538 0	-91.8 -91.8 0.47 (1)	4.74	N-F	0 500	0.08 (1)	
F-G	-1888 0	-91.8 -91.8 0.78 (1)	3.91	H-N	-604 0	0.38 (1)	
G-H	-1888 0	-91.8 -91.8 0.78 (1)	3.91	L-H	-140 75	0.09 (1)	
H-I	-2357 0	-91.8 -91.8 0.89 (1)	3.45	B-O	0 2020	0.45 (1)	
I-J	0 35	-91.8 -91.8 0.12 (1)	10.00	L-I	0 2013	0.45 (1)	
R-B	-2009 0	0.0 0.0 0.21 (1)	5.95				
K-I	-2009 0	0.0 0.0 0.21 (1)	5.95				
R-Q	0 0	-18.5 -18.5 0.25 (4)	10.00				
Q-P	0 1998	-18.5 -18.5 0.45 (1)	10.00				
P-O	0 1998	-18.5 -18.5 0.45 (1)	10.00				
O-N	0 1538	-18.5 -18.5 0.33 (1)	10.00				
N-M	0 1998	-18.5 -18.5 0.45 (1)	10.00				
M-L	0 1998	-18.5 -18.5 0.45 (1)	10.00				
L-K	0 0	-18.5 -18.5 0.24 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.8 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL TRUSS REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCB 2015, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TRC 2011, TRC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.09")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.20")

CSI: TC=0.89/1.00 (B-C:1), BC=0.45/1.00 (C-Q:1), WB=0.45/1.00 (B-Q:1), SS=0.27/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 518 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.80 (F) INPUT = 0.90
JSI METAL = 0.66 (P) INPUT = 1.00



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T9	1	2	GREEN PARK HOMES	
				TRUSS DESC.	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MT&K Industries, Inc. Tue Apr 28 09:00:11 2020 Page 2
ID:DMCubINVR6TstFoe31v6l zns1l-b64ydQG4wSx3?7Gahj?CeimKBHh8BztfoqmfiZMFIY


PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	Edge	
C	TMVW-l	MT20	4.0	4.0	2.00	1.50
D	TTWW+m	MT20	5.0	6.0	2.00	1.50
E	TMVW-l	MT20	4.0	4.0		
F	TMVW+w	MT20	2.0	4.0		
G	TTWW+m	MT20	5.0	6.0	2.50	1.50
H	TMVW+p	MT20	4.0	6.0	Edge	
J	BMV1+p	MT20	3.0	6.0		
K, N, O, P						
K	BMVW-l	MT20	5.0	6.0		
L	BMVWVW-l	MT20	5.0	6.0		
M	BS-l	MT20	5.0	6.0		
Q	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.



Structural component only
DWG# T-2007611 *h*

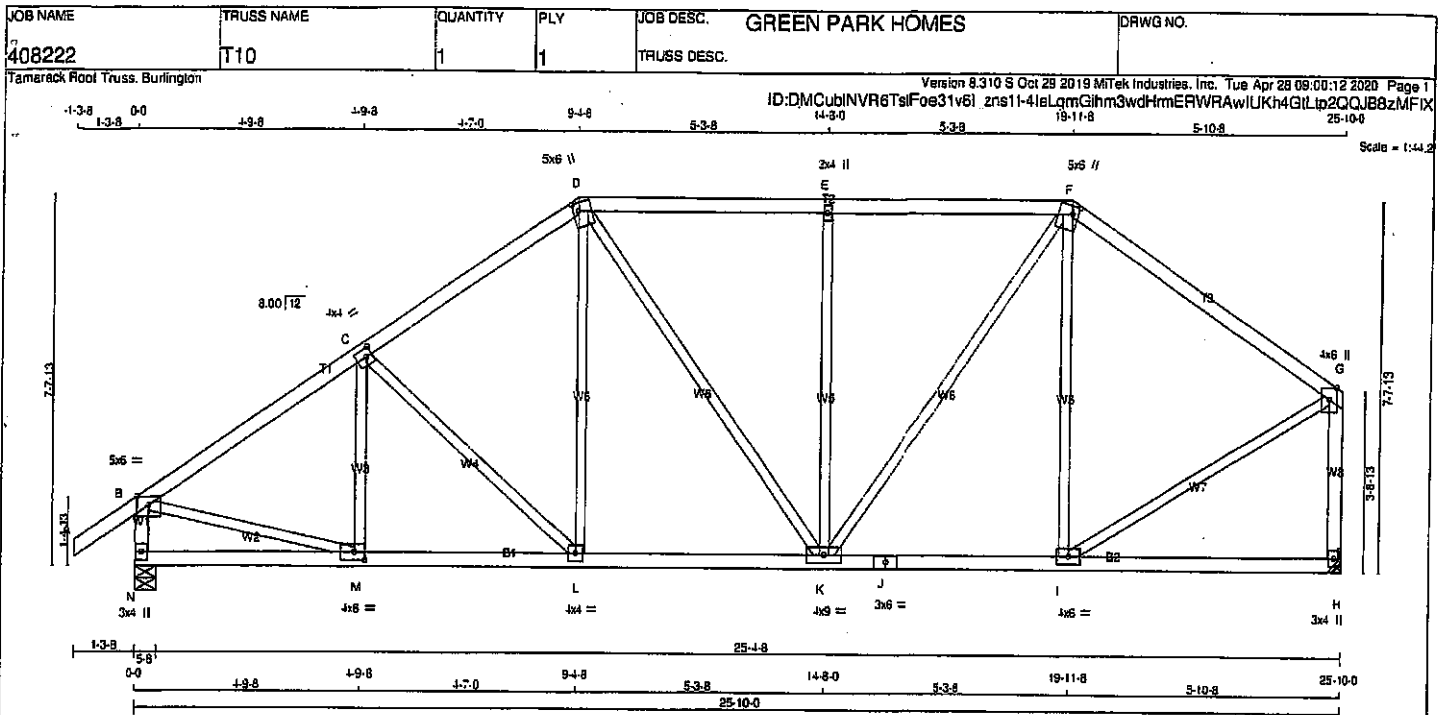

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER	DESCR
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - G	2x4	DRY	No.2	SPF
N - B	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
N - J	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-p	MT20	5.0	6.0	Edge	
C	TMWV-w	MT20	4.0	4.0	2.00	1.50
D	TTWV-w	MT20	5.0	6.0	2.00	1.50
E	TMWV-w	MT20	2.0	4.0		
F	TTWV-w	MT20	5.0	6.0	2.00	1.50
G	TMWV-p	MT20	4.0	6.0	Edge	
H	BMV1-p	MT20	3.0	4.0		
I	BMWV-w	MT20	4.0	6.0		
J	BS-1	MT20	3.0	6.0		
K	BMWV-w	MT20	4.0	6.0		
L	BMWV-w	MT20	4.0	4.0		
M	BMWV-w	MT20	4.0	6.0	2.00	2.50
N	BMV1-p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	RECORD BRG
	VERT	HORZ	DOWN	HORZ		
N	1550	0	1550	0	5-8	5-8
H	1424	0	1424	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS

JT	1ST LCASE		MAX. MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM. LIVE			
N	1054	731	0	0	0	363	0
H	1007	681	0	0	0	346	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.93 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MAX. FACTORED		FACTORED		MAX. FACTORED		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX CS (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CS (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 35	-91.8 -91.8	0.12 (1)	10.00	M-C	-217 3	0.07 (1)
B-C	-1609 0	-91.8 -91.8	0.23 (1)	4.83	C-L	-273 0	0.20 (1)
C-D	-1425 0	-91.8 -91.8	0.28 (1)	5.17	L-D	0 280	0.06 (1)
D-E	-1272 0	-91.8 -91.8	0.35 (1)	5.30	D-K	0 185	0.04 (1)
E-F	-1272 0	-91.8 -91.8	0.35 (1)	5.30	K-E	-595 0	0.64 (1)
F-G	-1077 0	-91.8 -91.8	0.43 (1)	5.52	K-F	0 655	0.15 (1)
N-B	-1511 0	0.0 0.0	0.16 (1)	6.68	I-F	-390 0	0.42 (1)
H-G	-1380 0	0.0 0.0	0.32 (1)	6.92	B-M	0 1366	0.31 (1)
					I-G	0 1031	0.23 (1)
N-M	0 0	-18.5 -18.5	0.09 (4)	10.00			
M-L	0 1362	-18.5 -18.5	0.27 (1)	10.00			
L-K	0 1184	-18.5 -18.5	0.24 (1)	10.00			
K-J	0 890	-18.5 -18.5	0.23 (1)	10.00			
J-I	0 890	-18.5 -18.5	0.23 (1)	10.00			
I-H	0 0	-18.5 -18.5	0.15 (4)	10.00			

TOTAL WEIGHT = 118 lb [M/F]

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 8.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 38.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.86")
CALCULATED VERT. DEFL.(LL) = L/999 (0.05")
ALLOWABLE DEFL.(TL) = L/360 (0.86")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CS: TC=0.43:1.00 (F:G:1), BC=0.27:1.00 (L:M:1), WB=0.84:1.00 (E:K:1), SS=0.23:1.00 (E:F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1 10
COMP=1.10 SHEAR=1.10 TENS=1 10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT


NAIL VALUES

PLATE GRIP(DRY) SHEAR	SECTION
(PSI)	(PLI)
MAX MIN	MAX MIN
MAX MIN	MAX MIN
MT20	618 354 1667 789 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (B) (INPUT = 0.90)
JSI METAL = 0.58 (G) (INPUT = 1.00)



Structural component only
DWG# T-2007612.


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	T11A	2	1	GREEN PARK HOMES	
				TRUSS DESC.	

Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:12 2020 Page 1

ID:DMCubINVR6TstFoe31v6I_zns11-4leLqmGihm3wdHmERWRawtXHh2PIN5p2QQJB8zMFIX

Scale = 1:38.5

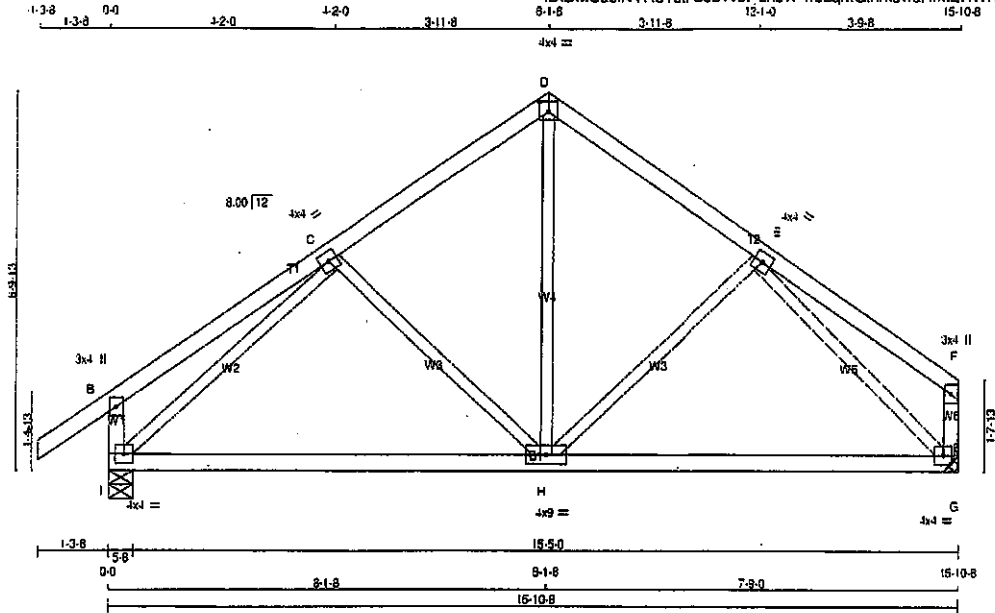

TOTAL WEIGHT = 2 X 66 = 133 lb
[M/F]

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
I - B	2x4	DRY	No.2	SPF	
G - F	2x4	DRY	No.2	SPF	
I - G	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY, SEASONED LUMBER.

PLATES (table is in inches)	JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+P	MT20	3.0	4.0			
C	TMWW+I	MT20	4.0	4.0			
D	TTW+P	MT20	4.0	4.0	2.25	2.00	
E	TMWW+I	MT20	4.0	4.0			
F	TMV+P	MT20	3.0	4.0			
G	BMWW+I	MT20	4.0	4.0			
H	BMWW+I	MT20	4.0	9.0			
I	BMWW+I	MT20	4.0	4.0			

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS							
	FACTORED	MAXIMUM FACTORED	INPUT	RECORD			
	GROSS REACTION	GROSS REACTION	BRG	BRG			
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
I	1001	0	1001	0	0	5-8	5-8
G	875	0	875	0	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3-8.

UNFACTORED REACTIONS							
1ST CASE	JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD
	I	706	476	0	0	0	229
	G	619	408	0	0	0	213

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	0 35	-91.8 -91.8	0.12 (1)	10.00	C-H	-228 0	0.12 (1)
B-C	0 24	-91.8 -91.8	0.24 (1)	10.00	H-D	0 449	0.10 (1)
C-D	-891 0	-91.8 -91.8	0.19 (1)	6.25	H-E	-188 0	0.09 (1)
D-E	-889 0	-91.8 -91.8	0.17 (1)	6.25	I-C	-988 0	0.50 (1)
E-F	0 24	-91.8 -91.8	0.22 (1)	10.00	E-G	-971 0	0.44 (1)
I-B	-289 0	0.0 0.0	0.03 (1)	7.81			
G-F	-125 0	0.0 0.0	0.01 (1)	7.81			
I-H	0 722	-18.5 -18.5	0.39 (4)	10.00			
H-G	0 677	-18.5 -18.5	0.39 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-08, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.53")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.53")
CALCULATED VERT. DEFL.(TL) = L/999 (0.11")

CSI: TC=0.24/1.00 (B-C:1), BC=0.39/1.00 (H-I:4), WB=0.50/1.00 (C-I:1), SS=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.84 (E) (INPUT = 0.90)
JSI METAL= 0.35 (C) (INPUT = 1.00)



Structural component only
DWG# T-2007613

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T11B	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:04:01 2020 Page 1
ID:DMCubINVR6TsFoe31v6I_zns1I-SxVsS1cVvDTv3g25IMsNQthBxxWB?PWwSQ4izMEMI
Scale = 1:38.5

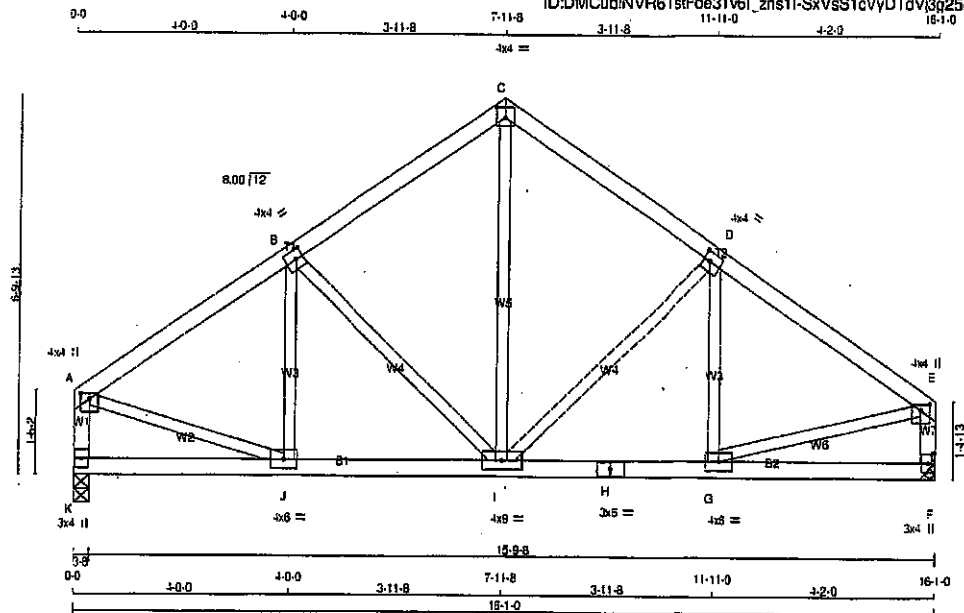

LUMBER					
N. L. G. A. RULES					
CHORDS		SIZE	LUMBER		DESCR
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
K - A	2x4	DRY	No.2	SPF	
F - E	2x4	DRY	No.2	SPF	
K - H	2x4	DRY	No.2	SPF	
H - F	2x4	DRY	No.2	SPF	
ALL WEBS		2x3	DRY	No.2	SPF
EXCEPT					

DRY: SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	4.0	1.25	2.00
B	TMWW-i	MT20	4.0	4.0	2.00	1.50
C	TTW-p	MT20	4.0	4.0	2.25	2.00
D	TMWW-i	MT20	4.0	4.0	2.00	1.50
E	TMVW+p	MT20	4.0	4.0	1.25	2.00
F	BMV1+p	MT20	3.0	4.0		
G	BMWW-i	MT20	4.0	6.0		
H	BS-i	MT20	3.0	6.0		
I	BMWW-i	MT20	4.0	9.0		
J	BMWW-i	MT20	4.0	6.0		
K	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT VERT				
K	887 0	887 0	0	3-8
F	887 0	887 0	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 3-8.

UNFACTORED REACTIONS

1ST CASE	JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	627	411 0	0 0	0 0	0 0	0 0	216 0	0 0
F	627	411 0	0 0	0 0	0 0	0 0	216 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)
FR-TO		FROM TO		FR-TO		FROM TO	
A-B	-898 0	-91.8 -91.8 0.19 (1)	6.25	J-B	-142 18	0.04 (1)	
B-C	-887 0	-91.8 -91.8 0.18 (1)	6.25	B-I	-263 0	0.13 (1)	
C-D	-888 0	-91.8 -91.8 0.19 (1)	6.25	I-C	0 461	0.10 (1)	
D-E	-891 0	-91.8 -91.8 0.20 (1)	6.25	I-D	-292 0	0.15 (1)	
K-A	-885 0	0.0 0.0 0.08 (1)	7.81	G-D	-117 28	0.03 (1)	
F-E	-893 0	0.0 0.0 0.09 (1)	7.81	A-J	0 772	0.17 (1)	
				G-E	0 787	0.18 (1)	
K-J	0 0	-18.5 -18.5 0.07 (4)	10.00				
J-I	0 740	-18.5 -18.5 0.15 (1)	10.00				
I-H	0 781	-18.5 -18.5 0.15 (1)	10.00				
H-G	0 781	-18.5 -18.5 0.15 (1)	10.00				
G-F	0 0	-18.5 -18.5 0.07 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.8 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.54")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.54")
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TO=0.20/1.00 (D-E:1), BC=0.15/1.00 (G-I:1), WB=0.18/1.00 (E-G:1), SS=0.15/1.00 (D-E:1)

COL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(FS)	(PL)	(PL)
MT20	618	354	1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.85 (E) (INPUT = 0.90)
JSI METAL = 0.25 (H) (INPUT = 1.00)




Structural component only
DWG# T-2007631

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	T11S	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:13 2020 Page 1
ID:DMCubINVR6TslFoe31vbl_zns1l-YVCj26HKS3BnFRQzoB1gJ7reK5PdcqyG49sJazMF1W

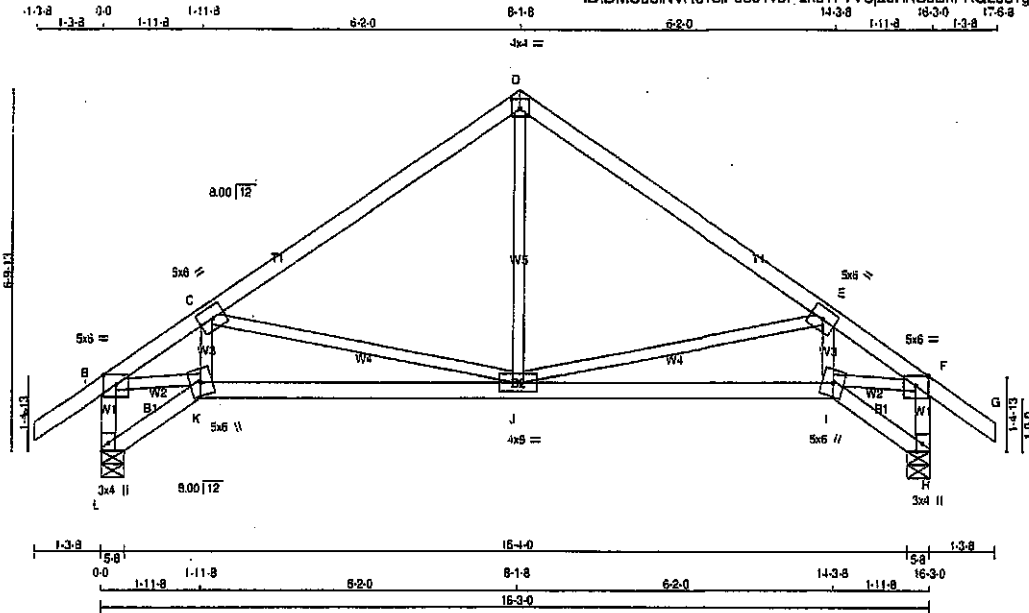

Scale = 1/40

TOTAL WEIGHT = 2 X 67 = 134 lb
(M/F)

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
L - B	2x4	DRY	No.2	SPF
A - D	2x4	DRY	No.2	SPF
D - G	2x4	DRY	No.2	SPF
H - F	2x4	DRY	No.2	SPF
L - K	2x4	DRY	No.2	SPF
K - J	2x4	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	Edge	
C	TMWW-t	MT20	5.0	6.0		
D	TTW-p	MT20	4.0	1.0	2.25	2.00
E	TMWW-t	MT20	5.0	6.0		
F	TMVW-p	MT20	5.0	6.0	Edge	
H	BMV1+p	MT20	3.0	4.0	Edge	
I	SBWW+m	MT20	5.0	6.0		
J	BMVW-w	MT20	4.0	9.0		
K	SBWW+m	MT20	5.0	6.0		
L	BMV1+p	MT20	3.0	4.0	Edge	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
L	1022	0	1022	0	0	5-8	5-8	5-8	5-8
H	1022	0	1022	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
L	720	488	0	0	0	0	234	0
H	720	488	0	0	0	0	234	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINTS L, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.97 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	MAX. FORCE (LBS)	VERT. LOAD (PLF)	CS (LC)	MEMB.	MAX. FORCE (LBS)	CS (LC)	MAX. CS (LC)
FR-TO		FROM TO		FR-TO			
L-B	-1004	0	0.0	0.0	0.11	(1)	7.80
A-B	0	35	-91.8	-91.8	0.12	(1)	10.00
B-C	-1508	0	-91.8	-91.8	0.33	(1)	4.97
C-D	-841	0	-91.8	-91.8	0.41	(1)	6.08
D-E	-841	0	-91.8	-91.8	0.42	(1)	6.07
E-F	-1510	0	-91.8	-91.8	0.33	(1)	4.97
F-G	0	35	-91.8	-91.8	0.12	(1)	10.00
H-F	-1004	0	0.0	0.0	0.11	(1)	7.80
L-K	0	0	-18.5	-18.5	0.02	(4)	10.00
K-J	0	1319	-18.5	-18.5	0.33	(1)	10.00
J-I	0	1320	-18.5	-18.5	0.33	(1)	10.00
I-H	0	0	-18.5	-18.5	0.02	(4)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 6.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(65 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.54")
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")
ALLOWABLE DEFL.(TL) = L/360 (0.54")
CALCULATED VERT. DEFL.(TL) = L/999 (0.08")

CSI: TC=0.42 (1.00) (D-E:1), BC=0.33 (1.00) (J-I:1), WB=0.47 (1.00) (E-J:1), SS=0.21 (1.00) (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX MIN	MAX MIN	MAX MIN
MT20	618	354
	1667	788
	1987	1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (I) (INPUT = 0.90)
JSI METAL = 0.47 (K) (INPUT = 1.00)



Structural component only
DWG# T-2007614


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	T12S	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 09:00:14 2020 Page 1

ID:DMCubINVR6TstF0e31v6l zns11-0hm5FSlyDNJda79MsYvGLOuVqYLOs6VkvQG0zMFIV

Scale = 1:27.5

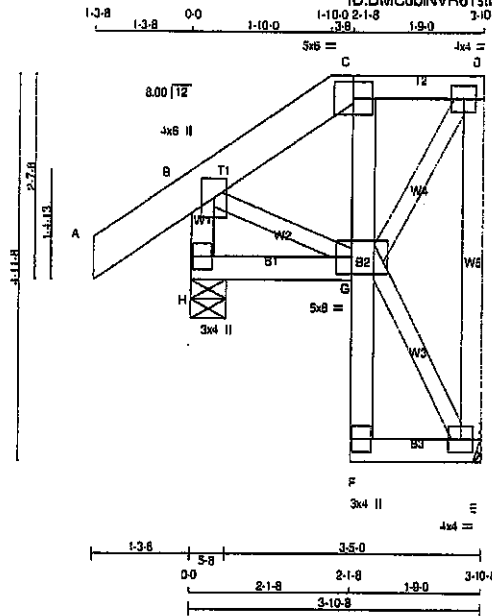

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x6	DRY	No.2
C - D	2x4	DRY	No.2
E - D	2x4	DRY	No.2
H - B	2x4	DRY	No.2
H - G	2x4	DRY	No.2
F - C	2x4	DRY	No.2
F - E	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	
C	TTV-m	MT20	5.0	6.0	
D	TMVW-i	MT20	4.0	4.0	
E	BMVW-1	MT20	4.0	4.0	
F	BMV+p	MT20	3.0	4.0	
G	BMVWW-1	MT20	5.0	8.0	2.50 2.50
H	BMV1+p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	VERT	GROSS REACTION	HORZ	DOWN	HORZ	BRG	IN-SX	BRG	IN-SX
E	214	0	214	0	0	5-8	MECHANICAL	5-8	5-8
H	344	0	344	0	0	5-8	MECHANICAL	5-8	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	151	99	0	0	0	52	0
H	241	172	0	0	0	69	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO	0 36	G-D	0 139
B-C	-105 0	B-G	0 95
C-D	-79 0	G-E	-3 0
E-D	-196 0		
H-B	-323 0		
H-G	0 0		
F-G	0 17		
G-C	-119 0		
F-E	0 2		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.08:1.00 (D-E:1) . 8C=0.03:1.00 (G-H:4) .
WB=0.03:1.00 (D-G:1) . SSI=0.07:1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LB BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSH) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL = 0.250 inches


PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.19 (B) (INPUT = 0.90)
JSI METAL = 0.11 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007615

JOB NAME 408223	TRUSS NAME T20	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Apr 26 10:04:02 2020 Page 1	
ID:DMCubINVR6TstFos31v6I zns11-x73EgNd7jXbU6ssescoDbPaw0PaBNFZ7YIIB c8zMEMh				23-10-14 35-20 36-5-8 1-3-8	
-1-3-8 0-0 -1-10-0 -1-10-0 3-2-12 8-2-8 11-3-2 6-3-14 17-7-0 6-3-14 23-10-14 6-5-2 30-4-0 4-10-0 35-2-0				Scale = 1:57.6	

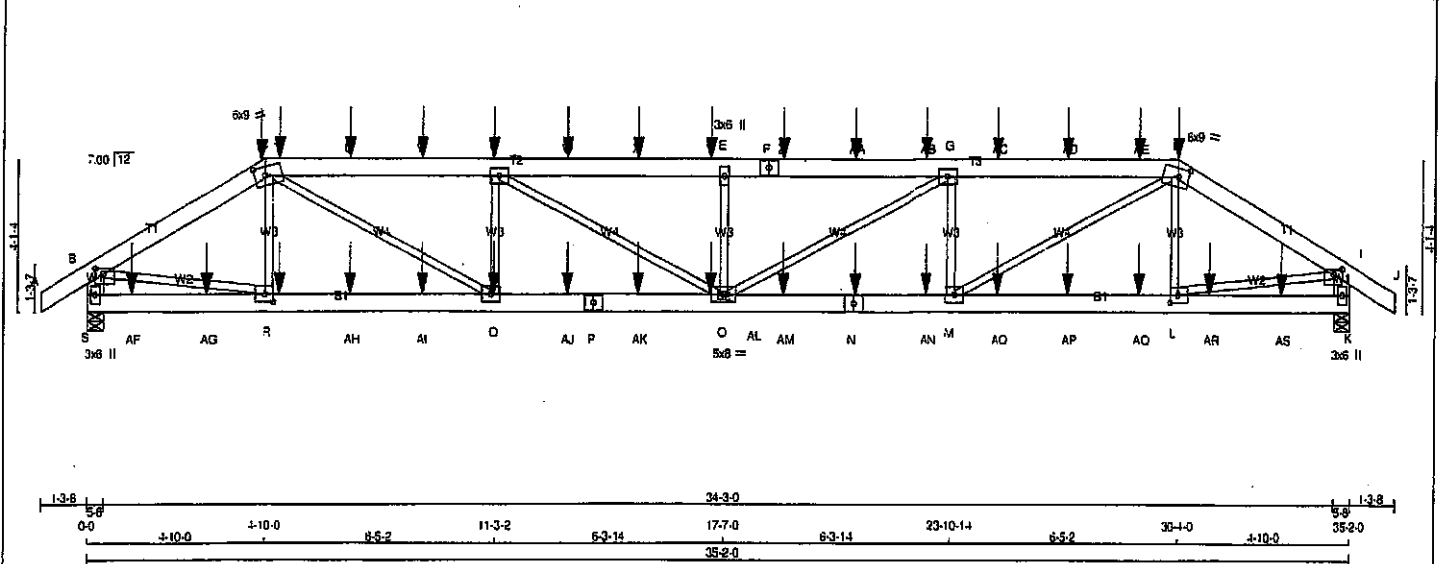

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. SPF A - C 2x6 DRY No.2 SPF C - F 2x6 DRY No.2 SPF F - H 2x6 DRY No.2 SPF H - J 2x6 DRY No.2 SPF S - B 2x6 DRY No.2 SPF K - I 2x6 DRY No.2 SPF S - P 2x6 DRY No.2 SPF P - N 2x6 DRY No.2 SPF N - K 2x6 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT		DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED MAXIMUM FACTORED INPUT RECORD GROSS REACTION GROSS REACTION BRG BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX S 3423 0 3423 0 0 5-8 5-8 K 3365 0 3365 0 0 5-8 5-8 UNFACTORED REACTIONS 1ST LCASE MAX/MIN COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL S 2418 1800 0 0 0 0 0 818 0 0 0 K 2378 1573 0 0 0 0 0 804 0 0 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.03 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD LC1 MAX MAX. UNBRAC LENGTH FR-TO MEMB. MAX. FACTORED FORCE (LBS) MAX. CS1 (LC1) FR-TO FROM TO A-B -8010 0 -91.8 -91.8 0.04 (1) 10.00 R-C -431 9 0.05 (1) B-C -4681 0 -91.8 -91.8 0.13 (1) 5.23 C-D 0 3534 0.44 (1) C-T -7102 0 -91.8 -91.8 0.31 (1) 4.26 D-D 0 1048 0.19 (1) T-U -7102 0 -91.8 -91.8 0.31 (1) 4.26 D-E -864 0 0.10 (1) U-V -7102 0 -91.8 -91.8 0.31 (1) 4.26 E-E -864 0 0.10 (1) V-D -7102 0 -91.8 -91.8 0.32 (1) 4.05 M-G -1573 0 0.19 (1) D-W -8010 0 -91.8 -91.8 0.32 (1) 4.05 M-H 0 3572 0.44 (1) W-X -8010 0 -91.8 -91.8 0.32 (1) 4.05 L-H -421 10 0.05 (1) X-Y -8010 0 -91.8 -91.8 0.32 (1) 4.05 B-R 0 4088 0.51 (1) Y-E -8010 0 -91.8 -91.8 0.33 (1) 4.03 L-I 0 4022 0.50 (1) E-F -8010 0 -91.8 -91.8 0.33 (1) 4.03 F-Z -8010 0 -91.8 -91.8 0.33 (1) 4.03 Z-AA -8010 0 -91.8 -91.8 0.33 (1) 4.03 AA-AB -8010 0 -91.8 -91.8 0.33 (1) 4.03 AB-G -8010 0 -91.8 -91.8 0.33 (1) 4.03 G-AC -7070 0 -91.8 -91.8 0.30 (1) 4.27 AC-AD -7070 0 -91.8 -91.8 0.30 (1) 4.27 AD-AE -7070 0 -91.8 -91.8 0.30 (1) 4.27 AE-H -7070 0 -91.8 -91.8 0.30 (1) 4.27 H-I -4606 0 -91.8 -91.8 0.13 (1) 5.28 I-J 0 33 -91.8 -91.8 0.04 (1) 10.00 S-B -3367 0 0.0 0.0 0.12 (1) 7.58 K-I -3318 0 0.0 0.0 0.12 (1) 7.83 S-AF 0 0 -18.5 -18.5 0.08 (4) 10.00 AF-AG 0 0 -18.5 -18.5 0.06 (4) 10.00 AG-R 0 0 -18.5 -18.5 0.06 (4) 10.00 R-AH 0 4024 -18.5 -18.5 0.31 (1) 10.00 AH-AI 0 4024 -18.5 -18.5 0.31 (1) 10.00 AI-Q 0 4024 -18.5 -18.5 0.31 (1) 10.00 Q-AJ 0 7102 -18.5 -18.5 0.52 (1) 10.00 AJ-P 0 7102 -18.5 -18.5 0.52 (1) 10.00 P-AK 0 7102 -18.5 -18.5 0.52 (1) 10.00 AK-AL 0 7102 -18.5 -18.5 0.52 (1) 10.00 AL-O 0 7102 -18.5 -18.5 0.52 (1) 10.00 O-AM 0 7070 -18.5 -18.5 0.52 (1) 10.00 AM-N 0 7070 -18.5 -18.5 0.52 (1) 10.00 N-AN 0 7070 -18.5 -18.5 0.52 (1) 10.00 AN-M 0 7070 -18.5 -18.5 0.52 (1) 10.00 M-AO 0 3960 -18.5 -18.5 0.30 (1) 10.00 AO-AP 0 3960 -18.5 -18.5 0.30 (1) 10.00 AP-AQ 0 3960 -18.5 -18.5 0.30 (1) 10.00 AQ-L 0 3960 -18.5 -18.5 0.30 (1) 10.00		DESIGN CRITERIA *** SPECIAL LOADS ANALYSIS *** GEOMETRY AND/OR BASIC LOADS CHANGED BY USER. LOADS WERE DERIVED FROM USER INPUT NO FURTHER MODIFICATIONS WERE MADE SPECIFIED LOADS: TOP CH. LL = 25.6 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 39.0 PSF SPACING = 24.0 IN./C LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12 *** NON STANDARD GIRDER *** ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES. THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018, CBC 2012, ABC 2019 - PART 9 OF CBC 2012 (2019 AMENDMENT) - CSA 086-08, CSA 086-14 - TPIC 2011, TPIC 2014 155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFLECT (LL) = L/360 (1.17") CALCULATED VERT. DEFLECT (LL) = L/999 (0.20") ALLOWABLE DEFLECT (TL) = L/360 (1.17") CALCULATED VERT. DEFLECT (TL) = L/999 (0.37") CS1: TC=0.33(1.00) (E-G-1), BC=0.52(1.00) (D-Q-1), WB=0.51(1.00) (B-R-1), SS=0.18(1.00) (G-H-1) DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE HEELS OFF TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PS) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 618 354 1667 788 1987 1656 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.89 (Q) INPUT = 0.90) JSI METAL= 0.68 (P) INPUT = 1.00)	
--	--	---	--	---	--

TOTAL WEIGHT = 2 X 180 = 359 lb



Structural component only
DWG# T-2007632 1/2

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408223	T20	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:04:02 2020 Page 2
ID:DMCubINVR6TstFoe31v6I znsf1-x73EqNd7IXbU6sescDpPaw0PaBNFZZYIB c8zMEMh

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-p	MT20	5.0	6.0	1.75	2.75
C	TTWW-m	MT20	6.0	9.0	2.75	3.50
D	TMWV-t	MT20	5.0	6.0		
E	TMWV-w	MT20	3.0	6.0		
F	TS-t	MT20	5.0	6.0		
G	TMWV-t	MT20	5.0	6.0		
H	TTWW-m	MT20	6.0	9.0	2.75	3.50
I	TMWV-p	MT20	5.0	6.0	1.75	2.75
K	BMV1-p	MT20	3.0	6.0		
L	BMWV-t	MT20	5.0	6.0	2.50	2.75
M	BMWV-t	MT20	5.0	6.0		
N	BS-t	MT20	5.0	6.0		
O	BMWVW-t	MT20	5.0	6.0		
P	BS-t	MT20	5.0	6.0		
Q	BMWV-t	MT20	5.0	6.0		
R	BMWV-t	MT20	5.0	6.0	2.50	2.75
S	BMV1-p	MT20	3.0	6.0		

LOADING

TOTAL LOAD CASES: (4)


CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CS (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CS (LC)	
FR-TO		FROM TO		LENGTH PR-TO			
L-AR	0 0	-18.5 -18.5 0.05 (4)		10.00			
AR-AS	0 0	-18.5 -18.5 0.05 (4)		10.00			
AS-K	0 0	-18.5 -18.5 0.05 (4)		10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	4-10-0	-60	-67	---	FRONT	VERT	DEAD	---	C1
C	4-10-0	-311	-311	---	FRONT	VERT	SNOW	---	C1
D	11-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
H	30-4-0	-60	-67	---	FRONT	VERT	DEAD	---	C1
H	30-4-0	-311	-311	---	FRONT	VERT	SNOW	---	C1
N	21-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
Q	11-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
R	5-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
T	5-2-12	-138	-138	---	FRONT	VERT	TOTAL	---	C1
U	7-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
V	9-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
W	13-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
X	15-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Y	17-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Z	19-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AA	21-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AB	23-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AC	25-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AD	27-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AE	29-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AF	1-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AG	3-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AH	7-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AI	9-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AJ	13-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AK	15-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AL	17-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AM	19-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AN	23-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AO	25-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AP	27-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AQ	29-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AR	31-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AS	33-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2007632

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T21	1	1	GREEN PARK HOMES	
TRUSS DESC.					

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 10:04:03 2020 Page 1

ID:DMCubINVR6TstFoe31v6i zns11-PKdcljellUqJLk0D3AWlqxoT6J Wk xSi yx9bzMEMg

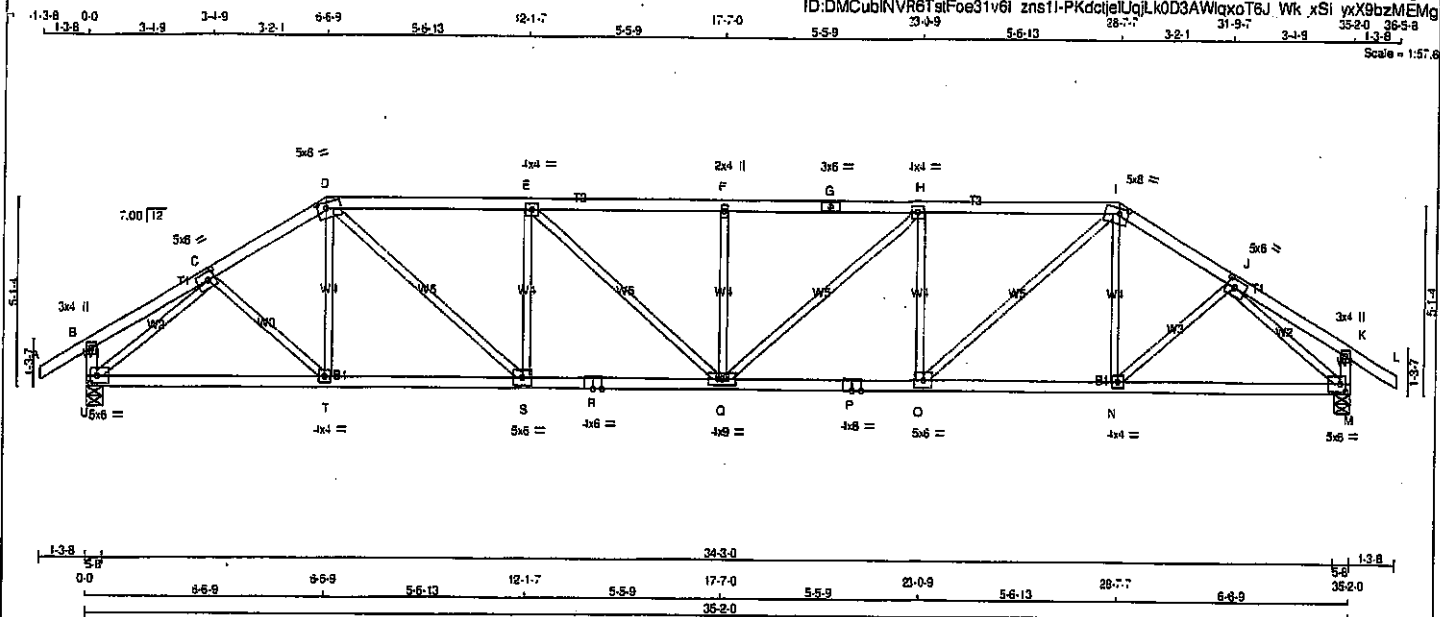

TOTAL WEIGHT = 142 lb

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - G	2x4	DRY	No.2	SPF
G - I	2x4	DRY	No.2	SPF
I - L	2x4	DRY	No.2	SPF
U - B	2x4	DRY	No.2	SPF
M - K	2x4	DRY	No.2	SPF
U - R	2x4	DRY	No.2	SPF
R - P	2x4	DRY	No.2	SPF
P - M	2x4	DRY	No.2	SPF

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0	
C	TMVW+p	MT20	5.0	8.0	2.50 2.50
D	TTWW+m	MT20	5.0	8.0	1.75 3.00
E	TMVW+t	MT20	4.0	4.0	
F	TMVW+w	MT20	2.0	4.0	
G	TS-t	MT20	3.0	6.0	
H	TMVW-t	MT20	4.0	4.0	
I	TTWW-m	MT20	5.0	8.0	1.75 3.00
J	TMVW-t	MT20	5.0	6.0	2.50 2.50
K	TMV+p	MT20	3.0	4.0	
M	BMVW-t	MT20	5.0	6.0	2.50 2.00
N	BMVW-t	MT20	4.0	4.0	
O	BMVW-t	MT20	5.0	6.0	
P	BS-t	MT20	4.0	6.0	
Q	BMVW-t	MT20	4.0	6.0	
R	BS-t	MT20	4.0	6.0	
S	BMVW-t	MT20	5.0	6.0	
T	BMVW-t	MT20	4.0	4.0	
U	BMVW-t	MT20	5.0	6.0	2.50 2.00

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	UPLIFT
U	2064	0	0	5-8
M	2064	0	0	5-8

UNFACTORED REACTIONS

1ST LCASE	MAX. MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
U	1457	970	0	0	0	488	0
M	1457	970	0	0	0	488	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.12 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 (PLF)	MAX. UNBRACED LENGTH (FT)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (FT)	CS1 (LC)
FR-TO				FR-TO			
A-B	0 32	-91.8 -91.8	0.12 (1)	10.00	C-T	0 213	0.05 (1)
B-C	0 13	-91.8 -91.8	0.12 (1)	10.00	T-D	-8 69	0.02 (4)
C-D	-2527 0	-91.8 -91.8	0.20 (1)	4.18	D-S	0 1447	0.33 (1)
D-E	-3264 0	-91.8 -91.8	0.68 (1)	3.30	S-E	-853 0	0.33 (1)
E-F	-3585 0	-91.8 -91.8	0.70 (1)	3.12	E-Q	0 428	0.10 (1)
F-G	-3585 0	-91.8 -91.8	0.70 (1)	3.12	Q-F	-482 0	0.10 (1)
G-H	-3585 0	-91.8 -91.8	0.70 (1)	3.12	Q-H	0 428	0.10 (1)
H-I	-3264 0	-91.8 -91.8	0.68 (1)	3.30	O-H	-853 0	0.33 (1)
I-J	-2527 0	-91.8 -91.8	0.20 (1)	4.18	O-I	0 1447	0.33 (1)
J-K	0 13	-91.8 -91.8	0.12 (1)	10.00	N-I	-8 69	0.02 (4)
K-L	0 32	-91.8 -91.8	0.12 (1)	10.00	N-J	0 213	0.05 (1)
U-B	-249 0	0.0 0.0	0.03 (1)	7.81	U-C	-2671 0	0.82 (1)
M-K	-249 0	0.0 0.0	0.03 (1)	7.81	J-M	-2671 0	0.82 (1)
U-T	0 2005	-18.5 -18.5	0.42 (1)	10.00			
T-S	0 2167	-18.5 -18.5	0.44 (1)	10.00			
S-R	0 3264	-18.5 -18.5	0.58 (1)	10.00			
R-O	0 3264	-18.5 -18.5	0.58 (1)	10.00			
Q-P	0 3264	-18.5 -18.5	0.58 (1)	10.00			
P-O	0 3264	-18.5 -18.5	0.58 (1)	10.00			
O-N	0 2167	-18.5 -18.5	0.44 (1)	10.00			
N-M	0 2005	-18.5 -18.5	0.42 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2016, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

65% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (1.17")
CALCULATED VERT. DEFL. (LL) = L/999 (0.21")
ALLOWABLE DEFL. (TL) = L/360 (1.17")
CALCULATED VERT. DEFL. (TL) = L/999 (0.39")

CS1: TC=0.70/1.00 (E-F:1), BC=0.58/1.00 (Q-S:1), WB=0.82/1.00 (J-M:1), SS=0.24/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.90 (M) (INPUT = 0.90)
JSI METAL = 0.74 (R) (INPUT = 1.00)




Structural component only
DWG# T-2007633

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T23	1	1	GREEN PARK HOMES	
TAMARACK ROOF TRUSS, BURLINGTON					
Version 8.310 S Oct 29 2019 M&T Industries, Inc. Tue Apr 28 10:04:06 2020 Page 1					
ID:DMCubINVR6TstFoe31v6I zns1l-pvJlVkgeml5wbUyerelXZQ5aqCaVBJG8gw9BivzMEDd					
Scale = 1:57.6					

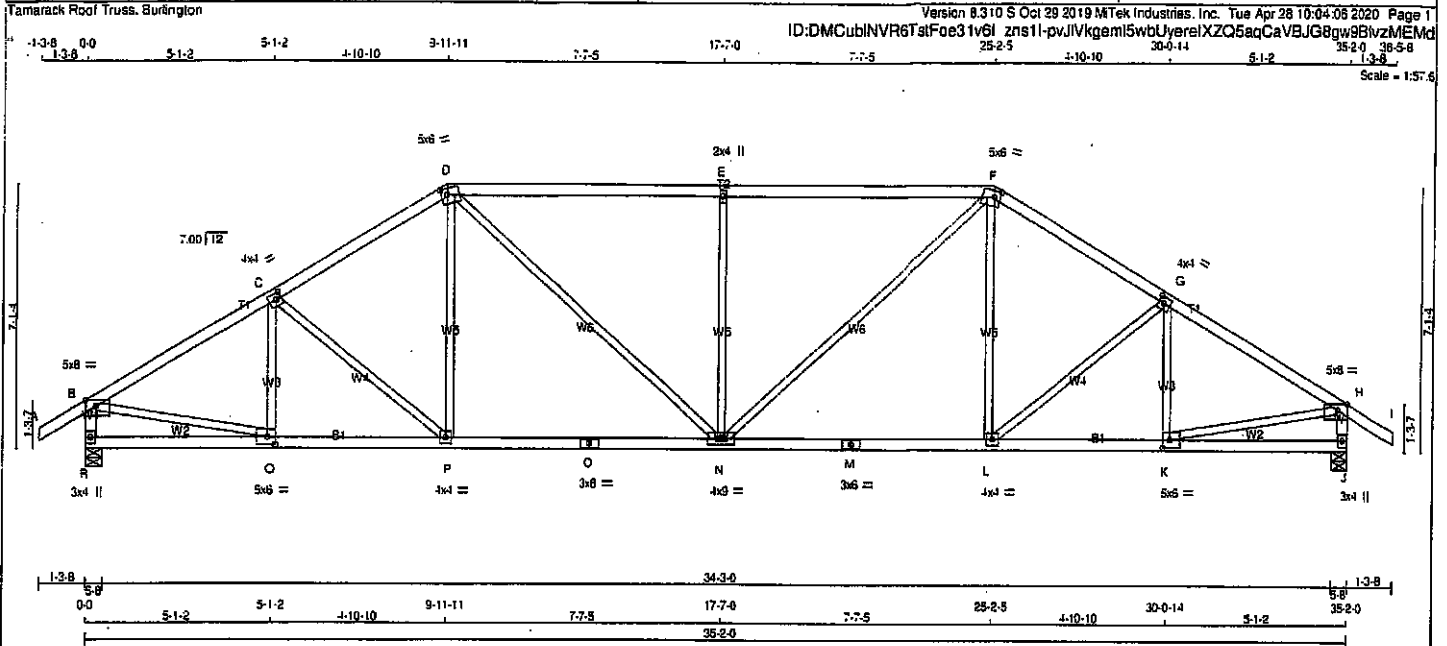


LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N.L.G.A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE	LUMBER	DESCR.	FACTORED				TOP CH. LL = 25.6 PSF			
A - D	2x4	DRY	No.2	GROSS REACTION				DL = 6.0 PSF			
D - F	2x4	DRY	No.2	VERT. DOWN				LL = 0.0 PSF			
F - I	2x4	DRY	No.2	HORIZ. UPLIFT				DL = 7.4 PSF			
R - B	2x4	DRY	No.2	FACTORED				TOTAL LOAD = 39.0 PSF			
J - H	2x4	DRY	No.2	MAXIMUM FACTORED				SPACING = 24.0 IN. C/C			
R - O	2x4	DRY	No.2	INPUT				LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12			
O - M	2x4	DRY	No.2	RECORD				THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015			
M - J	2x4	DRY	No.2	RECORD				THIS DESIGN COMPLIES WITH:			
ALL WEBS	2x3	DRY	No.2	UNFACTORED REACTIONS				- PART 9 OF BCBC 2018, OBC 2012, ABC 2019			
EXCEPT				1ST CASE				- PART 9 OF OBC 2012 (2019 AMENDMENT)			
DRY: SEASONED LUMBER.				MAX. MIN. COMPONENT REACTIONS				- CSA 086-09, CSA 086-14			
				COMBINED				- TPIC 2011, TPIC 2014			
				NO. 1				155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN			
				NO. 2				LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF			
				NO. 3				LIVE LOAD			
				NO. 4				ALLOWABLE DEFL.(LL) = L/360 (1.17")			
				NO. 5				CALCULATED VERT. DEFL.(LL) = L/999 (0.13")			
				NO. 6				ALLOWABLE DEFL.(TL) = L/360 (1.17")			
				NO. 7				CALCULATED VERT. DEFL.(TL) = L/999 (0.27")			
				NO. 8				CSI: TC=0.88(1.00 (E-F:1) , BC=0.45(1.00 (K-L:1) ,			
				NO. 9				WB=0.75(1.00 (E-N:1) , SS=0.34(1.00 (E-F:1) ,			
				NO. 10				DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10			
				NO. 11				COMP=1.10 SHEAR=1.10 TENS=1.10			
				NO. 12				COMPANION LIVE LOAD FACTOR = 1.00			
				NO. 13				TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.			
				NO. 14				NAIL VALUES			
				NO. 15				PLATE GRIP(DRY) SHEAR SECTION			
				NO. 16				(PSI) (PLI) (PLI)			
				NO. 17				MAX MIN MAX MIN MAX MIN			
				NO. 18				MT20 618 354 1667 788 1987 1656			
				NO. 19				PLATE PLACEMENT TOL. = 0.250 inches			
				NO. 20				PLATE ROTATION TOL. = 5.0 Deg.			
				NO. 21				JSI GRIP= 0.88 (K) (INPUT = 0.90)			
				NO. 22				JSI METAL= 0.72 (M) (INPUT = 1.00)			

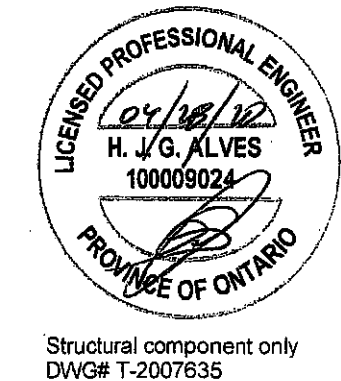

Structural component only
DWG# T-2007635

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T24	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:04:07 2020 Page 1
 ID:DMCubNVR6TstFos31v6l_zns11-H5s7i4hGX3DnDeWqPLpm6esp0tw_wk9HuavklMzMEMc
 1-3-8 0.0 5-11-6 5-11-6 5-8-14 11-8-5 5-10-11 17-7-0 23-5-11 5-8-14 29-2-10 5-11-6 1-3-8
 Scale = 1:57.6

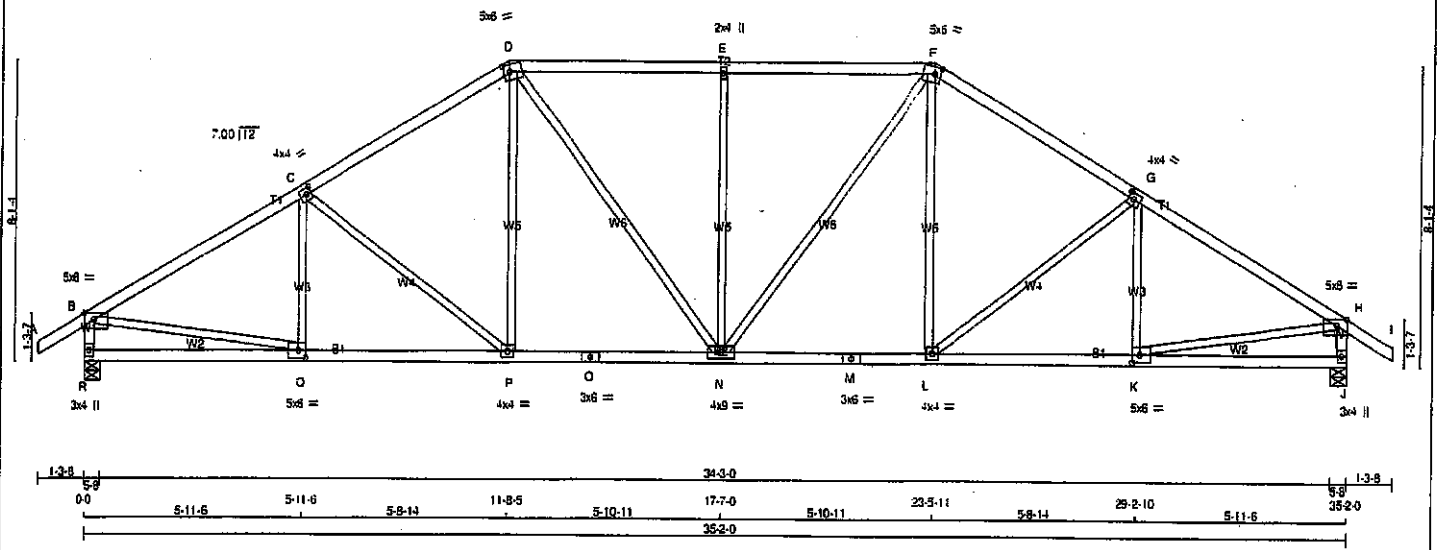

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - I	2x4	DRY	No.2	SPF	
R - B	2x4	DRY	No.2	SPF	
J - H	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
M - J	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	3.50
C	TMVW-i	MT20	4.0	4.0	2.00	1.75
D	TTWW-m	MT20	5.0	6.0	2.25	2.00
E	TMVW-w	MT20	2.0	4.0		
F	TTWW-m	MT20	5.0	6.0	2.25	2.00
G	TMVW-i	MT20	4.0	4.0	2.00	1.75
H	TMVW-p	MT20	5.0	8.0	Edge	3.50
J	BMV1-p	MT20	3.0	4.0		
K	BMVW-i	MT20	5.0	6.0	2.50	2.50
L	BMVW-i	MT20	4.0	4.0		
M	BS-t	MT20	3.0	6.0		
N	BMVW-w-i	MT20	4.0	9.0		
O	BS-t	MT20	3.0	6.0		
P	BMVW-i	MT20	4.0	4.0		
Q	BMVW-i	MT20	5.0	6.0	2.50	2.50
R	BMV1-p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	GROSS REACTION	MAXIMUM FACTORED	INPUT	REQD
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
R	2084	0	2084	0	5-8
J	2084	0	2084	0	5-8

UNFACTORED REACTIONS							
1ST LCASE		MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1457	970 0	0 0	0 0	0 0	488 0	0 0
J	1457	970 0	0 0	0 0	0 0	488 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.81 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)				CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSF (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSF (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSF (LC)
FR-TO				FR-TO				FR-TO			
A-B	0 32	-91.8	-91.8 0.12 (1)	10.00	Q-C	-252 12	0.08 (1)	Q-C	-252 12	0.08 (1)	0.08 (1)
B-C	-2575 0	-91.8	-91.8 0.54 (1)	3.81	C-P	-388 0	0.41 (1)	C-P	-388 0	0.41 (1)	0.41 (1)
C-D	-2283 0	-91.8	-91.8 0.50 (1)	4.05	P-D	0 345	0.08 (1)	P-D	0 345	0.08 (1)	0.08 (1)
D-E	-2236 0	-91.8	-91.8 0.49 (1)	4.06	D-N	0 480	0.11 (1)	D-N	0 480	0.11 (1)	0.11 (1)
E-F	-2236 0	-91.8	-91.8 0.49 (1)	4.08	N-E	-652 0	0.84 (1)	N-E	-652 0	0.84 (1)	0.84 (1)
F-G	-2283 0	-91.8	-91.8 0.50 (1)	4.05	N-F	0 480	0.11 (1)	N-F	0 480	0.11 (1)	0.11 (1)
G-H	-2575 0	-91.8	-91.8 0.54 (1)	3.81	L-F	0 345	0.08 (1)	L-F	0 345	0.08 (1)	0.08 (1)
H-I	0 32	-91.8	-91.8 0.12 (1)	10.00	L-G	-388 0	0.41 (1)	L-G	-388 0	0.41 (1)	0.41 (1)
I-B	-2016 0	0.0	0.0 0.21 (1)	5.94	K-G	-252 12	0.08 (1)	K-G	-252 12	0.08 (1)	0.08 (1)
J-H	-2016 0	0.0	0.0 0.21 (1)	5.94	B-Q	0 2281	0.51 (1)	B-Q	0 2281	0.51 (1)	0.51 (1)
R-Q	0 0	-18.5	-18.5 0.14 (4)	10.00	K-H	0 2281	0.51 (1)	K-H	0 2281	0.51 (1)	0.51 (1)
Q-P	0 2251	-18.5	-18.5 0.43 (1)	10.00							
P-O	0 1947	-18.5	-18.5 0.38 (1)	10.00							
O-N	0 1947	-18.5	-18.5 0.38 (1)	10.00							
N-M	0 1947	-18.5	-18.5 0.38 (1)	10.00							
M-L	0 1947	-18.5	-18.5 0.38 (1)	10.00							
L-K	0 2251	-18.5	-18.5 0.43 (1)	10.00							
K-J	0 0	-18.5	-18.5 0.14 (4)	10.00							

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 6.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. CC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF CBC 2018, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPC 2011, TPC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.12")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.22")
 CSF: TC=0.54 (1.00 (B-C:1), BC=0.43 (1.00 (P-Q:1), WS=0.84 (1.00 (E-N:1), SS=0.25 (1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES	PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	618 354	1687 788	1687 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.86 (Q) (INPUT = 0.90)
 JSI METAL = 0.61 (M) (INPUT = 1.00)




Structural component only
 DWG# T-2007636

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T25A	3	1	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 23 2019 MTEK Industries, Inc. Tue Apr 28 10:04:09 2020 Page 1

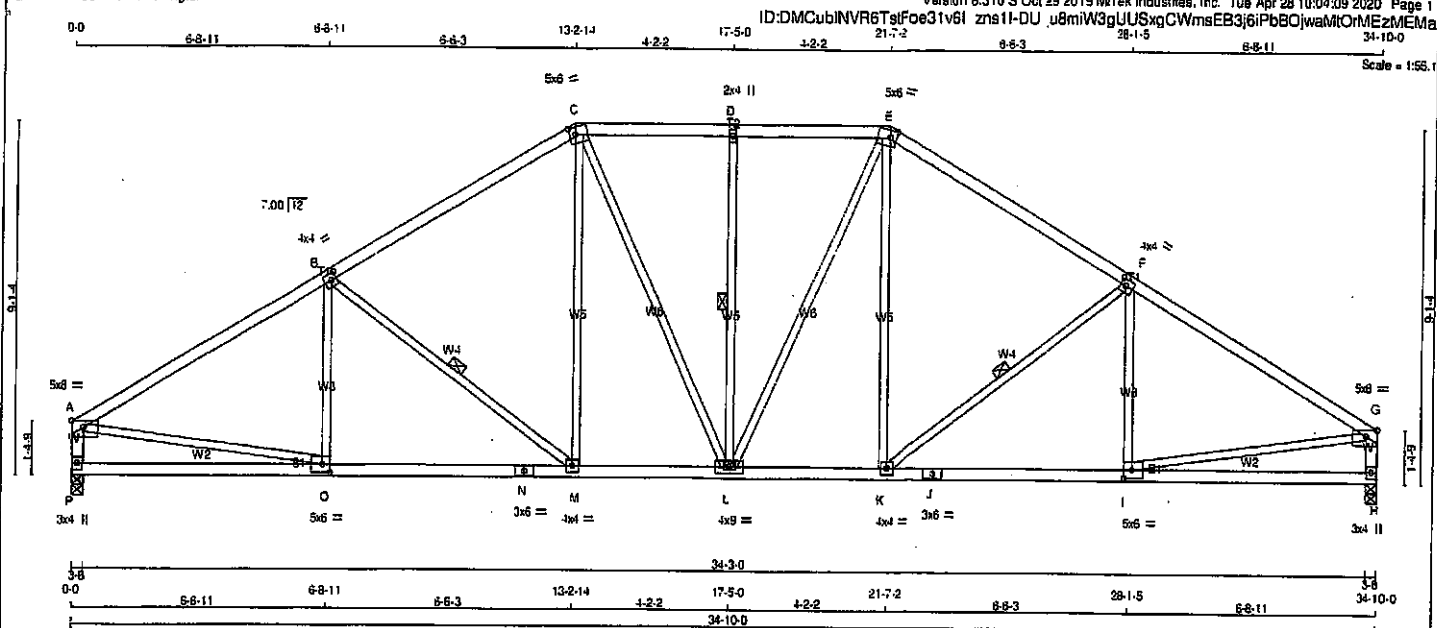

TOTAL WEIGHT = 3 X 154 = 462 lb
[M/F]

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
E - G	2x4	DRY	No.2
P - A	2x4	DRY	No.2
H - G	2x4	DRY	No.2
P - N	2x4	DRY	No.2
N - J	2x4	DRY	No.2
J - H	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-p	MT20	5.0	8.0	2.00 Edge
B	TMVW-w	MT20	4.0	4.0	2.00 1.75
C	TTWW-m	MT20	5.0	6.0	2.25 2.00
D	TMVW-w	MT20	2.0	4.0	
E	TTWW-m	MT20	5.0	6.0	2.25 2.00
F	TMVW-w	MT20	4.0	4.0	2.00 1.75
G	TMVW-p	MT20	5.0	8.0	Edge 3.50
H	BMV1-p	MT20	3.0	4.0	
I	BMVW-t	MT20	5.0	6.0	2.50 2.50
J	BS-t	MT20	3.0	6.0	
K	BMVW-t	MT20	4.0	4.0	
L	BMVW-w	MT20	4.0	9.0	
M	BMVW-t	MT20	4.0	4.0	
N	BS-t	MT20	3.0	6.0	
O	BMVW-t	MT20	5.0	6.0	2.50 2.50
P	BMV1-p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS					
	FACTORED	MAXIMUM FACTORED	INPUT	REQD	
	GROSS REACTION	GROSS REACTION	BRG	BRG	
JT	VERT	HORZ	DOWN	UP	IN-SX
P	1920	0	1920	0	3-8
H	1920	0	1920	0	3-8

UNFACTORED REACTIONS					
1ST CASE	MAX. MIN. COMPONENT REACTIONS				
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND
P	1358	881	0	0	0
H	1358	881	0	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.84 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-M, D-L, F-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING					
TOTAL LOAD CASES: (4)					
CHORDS			WEBS		
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED UNBRACED LENGTH (FT)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO		FR-TO	
A-B	-2510	0	-91.8 -91.8 0.71 (1)	0-B	-212
B-C	-2113	0	-91.8 -91.8 0.63 (1)	0-M	-510
C-D	-1919	0	-91.8 -91.8 0.24 (1)	M-C	0
D-E	-1919	0	-91.8 -91.8 0.24 (1)	C-L	0
E-F	-2113	0	-91.8 -91.8 0.63 (1)	L-D	-461
F-G	-2510	0	-91.8 -91.8 0.71 (1)	D-E	0
P-A	-1858	0	0.0 0.0 0.19 (1)	E-M	0
H-G	-1858	0	0.0 0.0 0.19 (1)	M-E	-510
P-O	0	0	-18.5 -18.5 0.20 (4)	E-F	-212
O-N	0	2199	-18.5 -18.5 0.45 (1)	A-O	0
N-M	0	2199	-18.5 -18.5 0.45 (1)	O-A	0
M-L	0	1797	-18.5 -18.5 0.35 (1)	L-G	0
L-K	0	1797	-18.5 -18.5 0.35 (1)		
K-J	0	2199	-18.5 -18.5 0.45 (1)		
J-I	0	2199	-18.5 -18.5 0.45 (1)		
I-H	0	0	-18.5 -18.5 0.20 (4)		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2015, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

65% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.16")
CALCULATED VERT. DEFL.(LL) = L/999 (0.11")
ALLOWABLE DEFL.(TL) = L/360 (1.16")
CALCULATED VERT. DEFL.(TL) = L/999 (0.21")

CSI: TC=0.71 1.00 (A-B:1), BC=0.45 1.00 (M-O:1), WS=0.50 1.00 (A-O:1), SS=0.25 1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1967 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.84 (1) (INPUT = 0.90)
JSI METAL = 0.66 (N) (INPUT = 1.00)



Structural component only
DWG# T-2007638

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO
408223	T28	1	2	TRUSS DESC.		


Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:04:10 2020 Page 1

ID:DMCubINVR6TsfFoe31v8I zns11-igYGL6j8q_cL45FP4UNTkGGKip777_kbX7PuhzMEMZ

0-0 5-11-3 5-11-3 5-8-15 11-8-1 12-8-4 14-8-4 16-8-4 17-5-0 5-8-15 23-1-15 5-8-15 28-10-13 5-11-3 34-10-0

Scale = 1/32.8

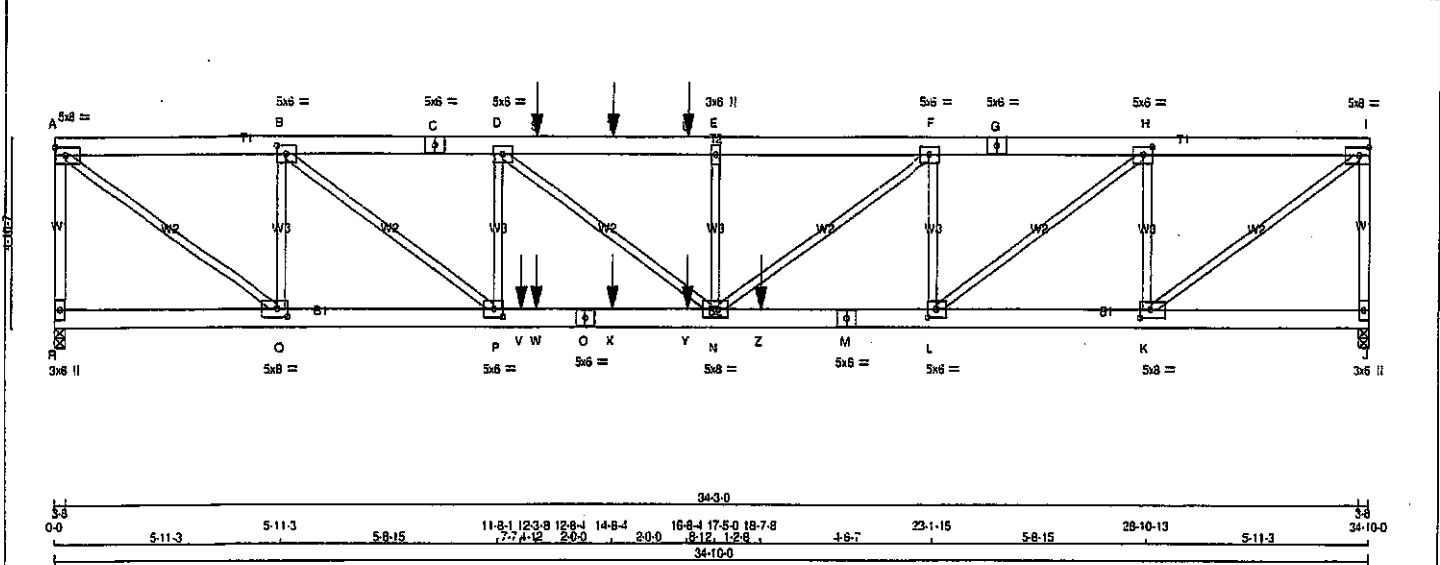

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
R - A	2x4	DRY	No.2
A - C	2x6	DRY	No.2
C - G	2x6	DRY	No.2
G - I	2x6	DRY	No.2
J - I	2x4	DRY	No.2
R - O	2x6	DRY	No.2
O - M	2x6	DRY	No.2
M - J	2x6	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
R - A	12	TOP
A - C	12	TOP
C - G	12	TOP
G - I	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
R - O	12	SIDE(0.0)
O - M	12	SIDE(0.0)
M - J	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x3	6	

MAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS							
	FACTORED	MAXIMUM FACTORED		INPUT	REQD		
	GROSS REACTION	DOWN	HORIZ	BRG	IN-SX	IN-SX	
JT	VERT						
R	3373	0	3873	0	3-8	3-8	
J	3103	0	3103	0	3-8	3-8	

UNFACTORED REACTIONS							
	1ST LOOSE	MAX./MIN. COMPONENT REACTIONS					
	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	2380	1591	0	0	0	789	0
J	2190	1459	0	0	0	731	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.03 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED (PLF)	MAX. FACTORED (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED (LBS)	MAX. FACTORED (LBS)
FR-TO		FROM TO		FR-TO			
R-A	-3318	0	0.0	0.56 (1)	6.39	K-I	0 4719 0.58 (1)
A-B	-4149	0	-91.8	-91.8 0.14 (1)	5.47	A-Q	0 5171 0.64 (1)
B-C	-7288	0	-91.8	-91.8 0.20 (1)	4.33	K-H	-2757 0 0.44 (1)
C-D	-7288	0	-91.8	-91.8 0.20 (1)	4.33	Q-B	-2997 0 0.48 (1)
D-E	-8278	0	-91.8	-91.8 0.28 (1)	4.03	L-H	0 3530 0.44 (1)
E-F	-8278	0	-91.8	-91.8 0.28 (1)	4.03	B-P	0 3958 0.49 (1)
F-G	-8278	0	-91.8	-91.8 0.21 (1)	4.11	L-F	-1791 0 0.28 (1)
G-H	-8278	0	-91.8	-91.8 0.21 (1)	4.11	N-F	0 2134 0.26 (1)
H-I	-3787	0	-91.8	-91.8 0.13 (1)	4.52	D-N	0 1249 0.15 (1)
J-I	-3042	0	0.0	0.51 (1)	6.82	N-E	-873 0 0.11 (1)

MEMB.	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
JT	12-8-4	-86	-86	---	BACK	VERT	TOTAL	---	C1
S	14-8-4	-86	-86	---	BACK	VERT	TOTAL	---	C1
U	16-8-4	-86	-86	---	BACK	VERT	TOTAL	---	C1
V	12-3-8	-1052	-1052	---	BACK	VERT	TOTAL	---	C1
W	12-8-4	-17	-17	---	BACK	VERT	TOTAL	---	C1
X	14-8-4	-17	-17	---	BACK	VERT	TOTAL	---	C1
Y	16-8-4	-17	-17	---	BACK	VERT	TOTAL	---	C1
Z	18-7-8	-1273	-1273	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS									
1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED									

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.16")
CALCULATED VERT. DEFL.(LL) = L/999 (0.21")
ALLOWABLE DEFL.(TL) = L/360 (1.16")
CALCULATED VERT. DEFL.(TL) = L/999 (0.39")

CSI: TC=0.56/1.00 (A-R:1), BC=0.72/1.00 (L-N:1), WB=0.64/1.00 (A-Q:1), SS=0.37/1.00 (L-N:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00

COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1657 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (I) (INPUT = 0.90)
JSI METAL = 0.73 (M) (INPUT = 1.00)



Structural component only
DWG# T-2007639 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T28	1	2	GREEN PARK HOMES	
				TRUSS DESC.	

Tamarack Roof Truss, Burlington


Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 26 10:04:10 2020 Page 2
ID:DMCubINVR6TslFoe31v6i zns1l-igYGL68a cL45FP4UNTkGGKlp177 kbX7PuhzMEMZ

PLATES (table is in inches)


JT	TYPE	PLATES	W	LEN	Y	X
A	TMWW-I	MT20	5.0	8.0	2.50	3.25
B	TMWW-I	MT20	5.0	6.0	2.50	2.75
C	TS-I	MT20	5.0	6.0		
D	TMWW-I	MT20	5.0	6.0		
E	TMWW-I	MT20	3.0	6.0		
F	TMWW-I	MT20	5.0	6.0		
G	TS-I	MT20	5.0	6.0		
H	TMWW-I	MT20	5.0	6.0	2.50	2.75
I	TMWW-I	MT20	5.0	8.0	2.50	3.25
J	BMV1+p	MT20	3.0	6.0		
K	BMWW-I	MT20	5.0	8.0	2.50	3.25
L	BMWW-I	MT20	5.0	6.0	2.50	2.75
M	BS-I	MT20	5.0	6.0		
N	BMWW-I	MT20	5.0	8.0		
O	BS-I	MT20	5.0	6.0		
P	BMWW-I	MT20	5.0	6.0	2.50	2.75
Q	BMWW-I	MT20	5.0	8.0	2.50	3.25
R	BMV1+p	MT20	3.0	6.0		

CONNECTION REQUIREMENTS

1) Ct: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2007639 42

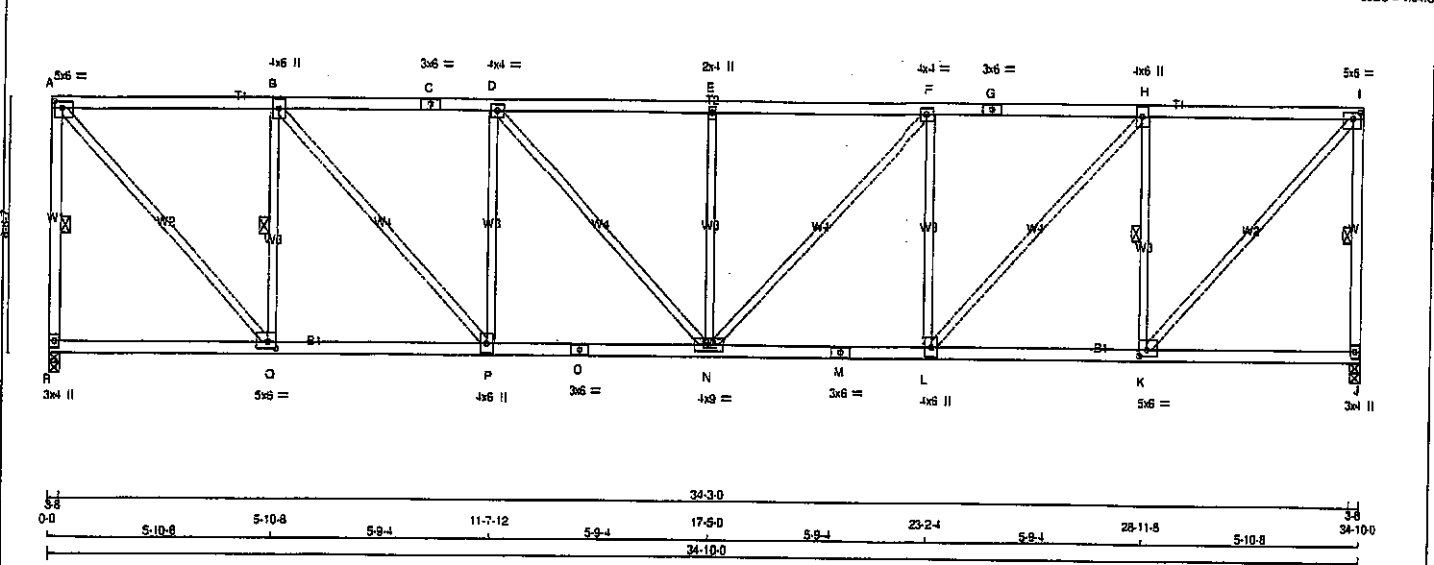

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESOR
R - A	2x4	DRY	No.2
A - C	2x4	DRY	No.2
C - G	2x4	DRY	No.2
G - I	2x4	DRY	No.2
J - I	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
 DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-1	MT20	5.0	6.0	2.00	2.50
B	TMVW-1	MT20	4.0	6.0		
C	TS-1	MT20	3.0	6.0		
D	TMVW-1	MT20	4.0	4.0		
E	TMVW-1	MT20	2.0	4.0		
F	TMVW-1	MT20	4.0	4.0		
G	TS-1	MT20	3.0	6.0		
H	TMVW-1	MT20	4.0	6.0		
I	TMVW-1	MT20	5.0	6.0	2.00	2.50
J	BMV1-p	MT20	3.0	4.0		
K	BMVW-1	MT20	5.0	6.0	2.00	2.50
L	BMVW-1	MT20	4.0	6.0		
M	BS-1	MT20	3.0	6.0		
N	BMVW-1	MT20	4.0	9.0		
O	BS-1	MT20	3.0	6.0		
P	BMVW-1	MT20	4.0	6.0		
Q	BMVW-1	MT20	5.0	6.0	2.00	2.50
R	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	DOWN	UP	IN-SX
R	1920	0	0	3-8
J	1920	0	0	3-8

UNFACTORED REACTIONS

1ST CASE	MAX. MIN. COMPONENT REACTIONS
JT	COMBINED
R	1358
J	1358

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.72 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-R, I-J, B-Q, H-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PL)	FACTORED HORZ. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PL)	FACTORED HORZ. LOAD (LC)
FR-TO				FR-TO			
R-A	-1876	0.0	0.0	A-Q	0	2281	0.51
A-B	-1583	-91.8	-91.8	Q-B	-1540	0	0.43
B-C	-2426	-91.8	-91.8	B-P	0	1272	0.29
C-D	-2426	-91.8	-91.8	P-D	-831	0	0.58
D-E	-2725	-91.8	-91.8	D-N	0	440	0.10
E-F	-2725	-91.8	-91.8	N-E	-539	0	0.38
F-G	-2426	-91.8	-91.8	N-F	0	440	0.10
G-H	-2426	-91.8	-91.8	L-F	-831	0	0.58
H-I	-1583	-91.8	-91.8	L-H	0	1272	0.29
I-J	-1876	0.0	0.0	K-H	-1540	0	0.43
				K-I	0	2281	0.51
R-Q	0	-18.5	-18.5				
Q-P	0	-18.5	-18.5				
P-O	0	-18.5	-18.5				
O-N	0	-18.5	-18.5				
N-M	0	-18.5	-18.5				
M-L	0	-18.5	-18.5				
L-K	0	-18.5	-18.5				
K-J	0	-18.5	-18.5				

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.8 PSF
 DL = 6.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF CBC 2018, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 6.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.16")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.16")
 ALLOWABLE DEFL.(TL) = L/360 (1.16")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.31")

CSI: TC=0.63/1.00 (F-H:1), BC=0.44/1.00 (N-P:1), WB=0.58/1.00 (F-L:1), SH=0.25/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION (PSI) (PL) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 786 1987 1656


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (A) (INPUT = 0.90)
 JSI METAL = 0.78 (M) (INPUT = 1.00)



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T30	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					
Version 3.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:04:12 2020 Page 1					
ID:DMCubINVR6TstFoe31v6l_zns1l-a3g0makOMbs3JPPnBvPxpHb5cdJb7s02rcVzZMEMX					
34-10-0					

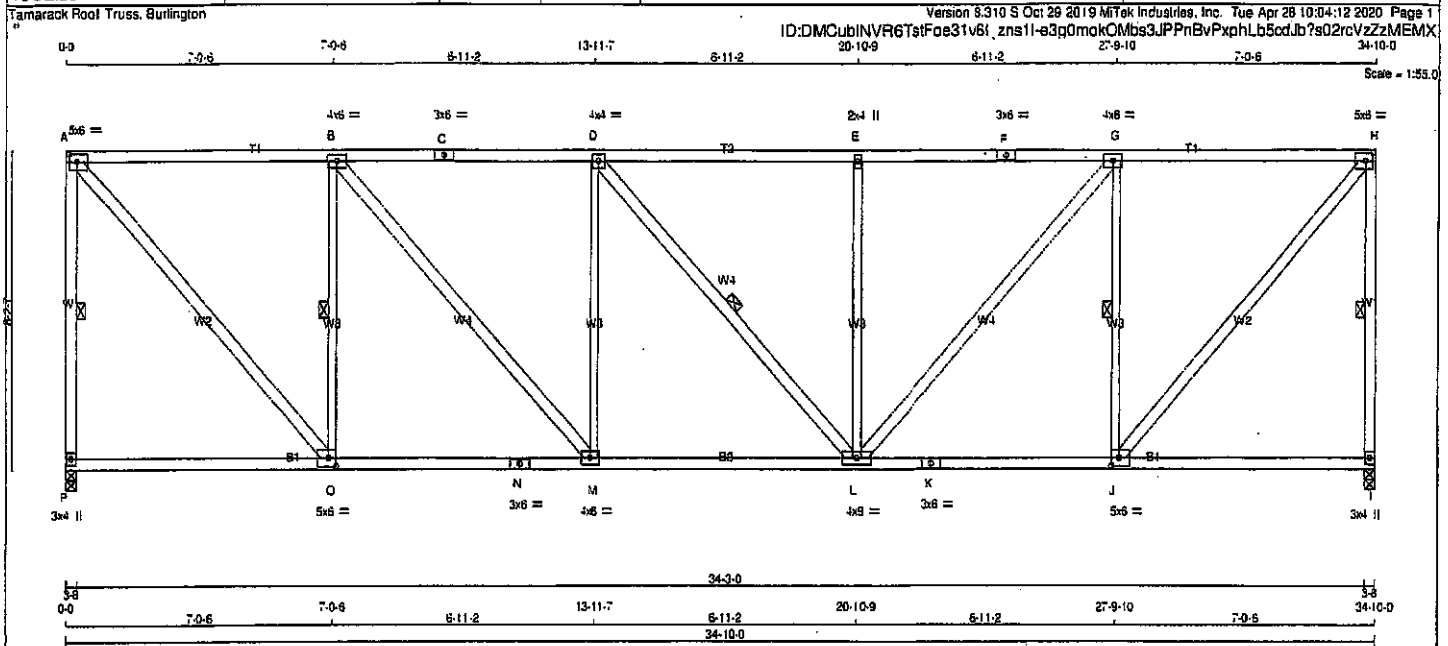

TOTAL WEIGHT = 2 X 179 = 359 lb

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
P - A	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
C - F	2x4	DRY	No.2	SPF	
F - H	2x4	DRY	No.2	SPF	
I - H	2x4	DRY	No.2	SPF	
P - N	2x4	DRY	No.2	SPF	
N - K	2x4	DRY	No.2	SPF	
K - I	2x4	DRY	No.2	SPF	
ALL WEBS	2x4	DRY	No.2	SPF	
EXCEPT					
O - S	2x3	DRY	No.2	SPF	
M - D	2x3	DRY	No.2	SPF	
L - E	2x3	DRY	No.2	SPF	
J - G	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	5.0	6.0	2.50	2.50
B	TMVW-t	MT20	4.0	6.0		
C	TS-t	MT20	3.0	6.0		
D	TMVW-t	MT20	4.0	4.0		
E	TMVW-t	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-t	MT20	4.0	6.0		
H	TMVW-t	MT20	5.0	6.0	2.50	2.50
I	BMV1+p	MT20	3.0	4.0		
J	BMVW-t	MT20	5.0	6.0	2.50	2.50
K	BS-t	MT20	3.0	6.0		
L	BMVW-t	MT20	4.0	9.0		
M	BMVW-t	MT20	4.0	6.0		
N	BS-t	MT20	3.0	6.0		
O	BMVW-t	MT20	5.0	6.0	2.50	2.50
P	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
JT	VERT	GROSS REACTION	GROSS REACTION	BRG	BRG
P	1920	0	1920	0	3-8
I	1920	0	1920	0	3-8

UNFACTORED REACTIONS							
	1ST LOSE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
P	1358	891 0	0 0	0 0	0 0	467 0	0 0
I	1358	891 0	0 0	0 0	0 0	467 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.60 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-P, H-I, B-O, D-L, G-J.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING		CHORDS	WEBS
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)
FR-TO		FROM TO	FR-TO
P-A	-1868	0.0	0.0
A-B	-1432	-91.8	-91.8
B-C	-2081	-91.8	-91.8
C-D	-2081	-91.8	-91.8
D-E	-2080	-91.8	-91.8
E-F	-2080	-91.8	-91.8
F-G	-2080	-91.8	-91.8
G-H	-1432	-91.8	-91.8
H-I	-1868	0.0	0.0
P-O	0	-18.5	-18.5
O-N	0	-18.5	-18.5
N-M	0	-18.5	-18.5
M-L	0	-18.5	-18.5
L-K	0	-18.5	-18.5
K-J	0	-18.5	-18.5
J-I	0	-18.5	-18.5

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L 360 (1.16")
CALCULATED VERT. DEFL.(LL) = L 999 (0.12")
ALLOWABLE DEFL.(TL) = L 360 (1.16")
CALCULATED VERT. DEFL.(TL) = L 999 (0.24")

CSI: TC=0.89/1.00 (E-G:1), BC=0.42/1.00 (L-M:1)
WB=0.81/1.00 (D-M:1), SS=0.30/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSH) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1658


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (H) INPUT = 0.90
JSI METAL = 0.46 (K) INPUT = 1.00



Structural component only
DWG# T-2007641

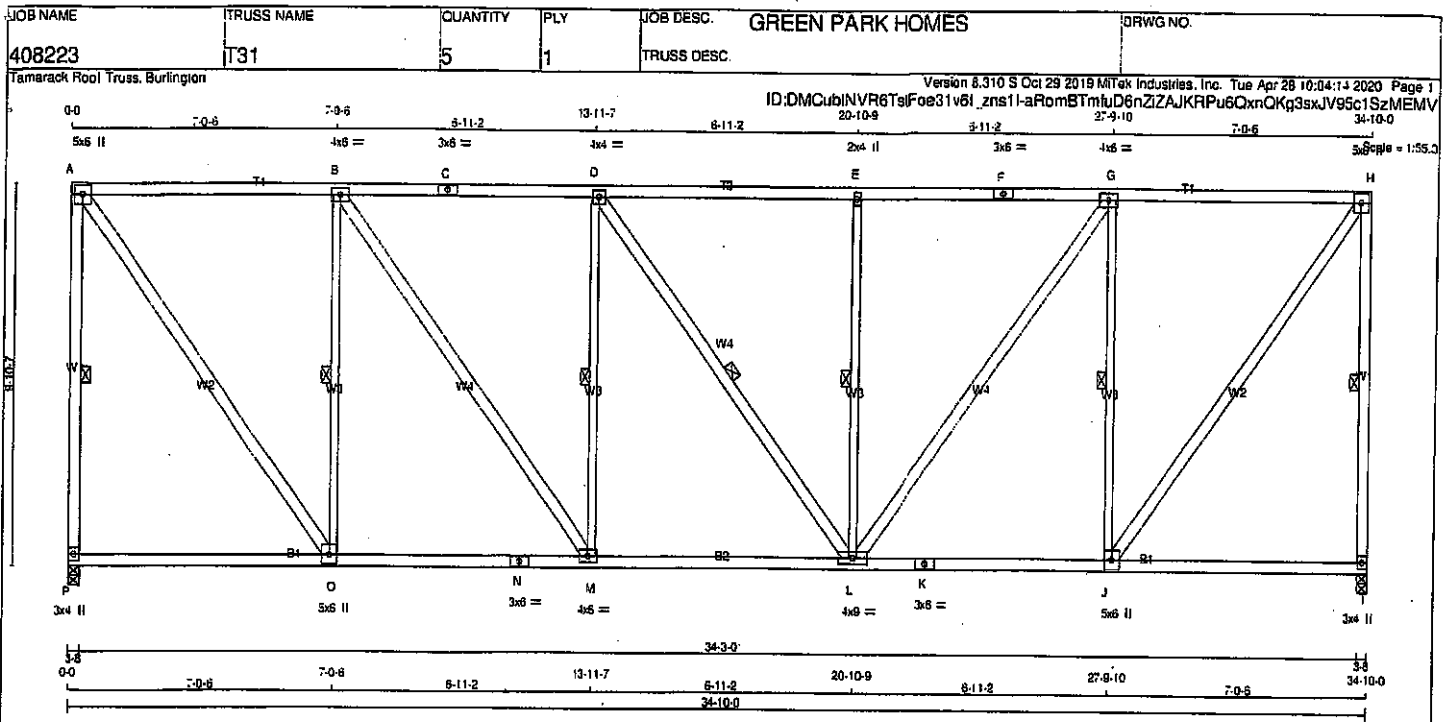

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
P - A	2x4	DRY	No.2
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
I - J	2x4	DRY	No.2
J - K	2x4	DRY	No.2
K - L	2x4	DRY	No.2
L - M	2x4	DRY	No.2
M - N	2x4	DRY	No.2
N - O	2x4	DRY	No.2
O - P	2x4	DRY	No.2
P - Q	2x4	DRY	No.2
Q - R	2x4	DRY	No.2
R - S	2x4	DRY	No.2
S - T	2x4	DRY	No.2
T - U	2x4	DRY	No.2
U - V	2x4	DRY	No.2
V - W	2x4	DRY	No.2
W - X	2x4	DRY	No.2
X - Y	2x4	DRY	No.2
Y - Z	2x4	DRY	No.2
Z - A	2x4	DRY	No.2

ALL WEBS EXCEPT

CHORDS	SIZE	LUMBER	DESCR.
O - B	2x3	DRY	No.2
M - D	2x3	DRY	No.2
L - E	2x3	DRY	No.2
J - G	2x3	DRY	No.2

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT VERT	1920	0	0
P VERT	1920	0	0
I VERT	1920	0	0
JT HORZ	1920	0	0
P HORZ	1920	0	0
I HORZ	1920	0	0

UNFACTORED REACTIONS

1ST LOSE	MAX. MIN. COMPONENT REACTIONS
JT COMBINED	1358 891 0 0 0 0 0 0 0 0
P COMBINED	1358 891 0 0 0 0 0 0 0 0
I COMBINED	1358 891 0 0 0 0 0 0 0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, I.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF

BOT CH. LL = 0.0 PSF
DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00:12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	5.0	6.0		
B	TMVW-t	MT20	4.0	6.0		
C	TS-t	MT20	3.0	6.0		
D	TMVW-t	MT20	4.0	4.0		
E	TMVW-w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-t	MT20	4.0	6.0		
H	TMVW+p	MT20	5.0	6.0		
I	BMV1+p	MT20	3.0	4.0		
J	BMVW-t	MT20	5.0	6.0		
K	BS-t	MT20	3.0	6.0		
L	BMVW-t	MT20	4.0	6.0		
M	BMVW-t	MT20	4.0	6.0		
N	BS-t	MT20	3.0	6.0		
O	BMVW-t	MT20	5.0	6.0		
P	BMV1+p	MT20	3.0	4.0		

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED VERT. LOAD (LBS)
FR-TO									
P-A	-1868	0	0	0	0	0	0	0	0
A-B	-1183	0	-91.8	-91.8	0.75	11	4.69	0	-1466
B-C	-1719	0	-91.8	-91.8	0.82	11	3.96	0	916
C-D	-1719	0	-91.8	-91.8	0.82	11	3.96	0	-617
D-E	-1718	0	-91.8	-91.8	0.83	11	4.37	0	-2
E-F	-1718	0	-91.8	-91.8	0.83	11	3.96	0	-616
F-G	-1718	0	-91.8	-91.8	0.83	11	3.96	0	913
G-H	-1183	0	-91.8	-91.8	0.75	11	4.69	0	-1465
H-I	-1868	0	0	0	0	0	4.91	0	2000
P-O	0	0	-18.5	-18.5	0.22	4	10.00		
O-N	0	1183	-18.5	-18.5	0.32	4	10.00		
N-M	0	1183	-18.5	-18.5	0.32	4	10.00		
M-L	0	1719	-18.5	-18.5	0.36	1	10.00		
L-K	0	1183	-18.5	-18.5	0.32	4	10.00		
K-J	0	1183	-18.5	-18.5	0.32	4	10.00		
J-I	0	0	-18.5	-18.5	0.22	4	10.00		

ALLOWABLE DEFL. (LL) = L/360 (1.16")

CALCULATED VERT. DEFL. (LL) = L/999 (0.11")

ALLOWABLE DEFL. (TL) = L/360 (1.16")

CALCULATED VERT. DEFL. (TL) = L/999 (0.22")

CSI: TC=0.88/1.00 (H-H), BC=0.35/1.00 (L-M), WS=0.96/1.00 (B-C), SS=0.30/1.00 (G-H)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION


(PSI)	(PLI)	(PLI)
MAX	MIN	MAX
618	354	1667
788	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.85 (H) (INPUT = 0.90)


JSI METAL = 0.43 (H) (INPUT = 1.00)



Structural component only
DWG# T-2007642

JOB NAME 408223	TRUSS NAME T32	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 5 Oct 2019 MTek Industries, Inc. Tue Apr 23 10:54:15 2020 Page 1
ID:DMCubINVR6TslFoe31v6I_zns11-2dL9CnHfWEEs8M11yeRKzCFqAovATkpAauzMEMU

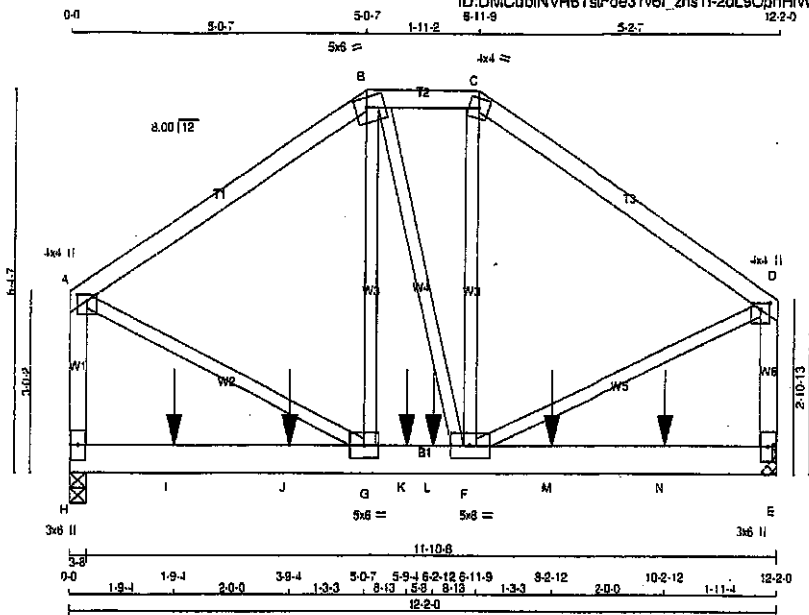

Scale = 1/32\"/>

TOTAL WEIGHT = 66 lb

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - B	2x4	DRY	No.2	
B - C	2x4	DRY	No.2	
C - D	2x4	DRY	No.2	
H - A	2x4	DRY	No.2	
E - D	2x4	DRY	No.2	
H - E	2x6	DRY	No.2	

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	4.0	1.25 2.00
B	TTWW-m	MT20	5.0	6.0	2.00 2.25
C	TTW-m	MT20	4.0	4.0	
D	TMVW+p	MT20	4.0	4.0	1.25 2.00
E	BMV1+p	MT20	3.0	6.0	
F	BMWWW-t	MT20	5.0	8.0	
G	BMWW-t	MT20	5.0	6.0	
H	BMV1+p	MT20	3.0	6.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	UP/LIFT	IN-SX
H	1233	0	1233	0
E	1218	0	1218	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 3-8.

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	867	596	0	0	0	271	0
E	856	588	0	0	0	268	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.77 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	-853	0	-91.8 -91.8 0.48 (1)	5.88	G-B	0	122
B-C	-721	0	-91.8 -91.8 0.07 (1)	6.25	B-F	0	34
C-D	-884	0	-91.8 -91.8 0.51 (1)	5.77	F-C	0	154
H-A	-1065	0	0.0 0.0 0.17 (1)	7.60	A-G	0	795
E-D	-1057	0	0.0 0.0 0.18 (1)	7.63	F-D	0	794
H-I	0	0	-18.5 -18.5 0.20 (1)	10.00			
I-J	0	0	-18.5 -18.5 0.20 (1)	10.00			
J-K	0	0	-18.5 -18.5 0.20 (1)	10.00			
G-K	0	711	-18.5 -18.5 0.28 (1)	10.00			
K-L	0	711	-18.5 -18.5 0.28 (1)	10.00			
L-F	0	711	-18.5 -18.5 0.28 (1)	10.00			
F-M	0	0	-18.5 -18.5 0.20 (1)	10.00			
M-N	0	0	-18.5 -18.5 0.20 (1)	10.00			
N-E	0	0	-18.5 -18.5 0.20 (1)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
I	1-8-4	-172	-172	---	BACK	VERT	TOTAL	---	C1
J	3-8-4	-195	-195	---	BACK	VERT	TOTAL	---	C1
K	5-9-4	-187	-187	---	BACK	VERT	TOTAL	---	C1
L	8-2-12	-187	-187	---	BACK	VERT	TOTAL	---	C1
M	8-2-12	-195	-195	---	BACK	VERT	TOTAL	---	C1
N	10-2-12	-172	-172	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 8.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.41")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.41")
CALCULATED VERT. DEFL.(TL) = L/969 (0.04")

CS: TC=0.51 (1.00 (C-D:1), BC=0.28 (1.00 (F-G:1), WB=0.20 (1.00 (A-G:1), SS=0.20 (1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (Y)	SHEAR (PSI)	SECTION (PLI)
MT20	618	354	1857

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.78 (D) (INPUT = 0.90)
JSI METAL = 0.23 (D) (INPUT = 1.00)




Structural component only
DWG# T-2007843

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T34S	2	1	GREEN PARK HOMES	

Tamarack Roof Truss, Burlington

ID:DMCubINVR6TstFoe31v61_zns11-WqvXc9ovQqMVo0IZQkUzXVSIE5FX?yczTa[6KzMEMT

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:04:16 2020 Page 1

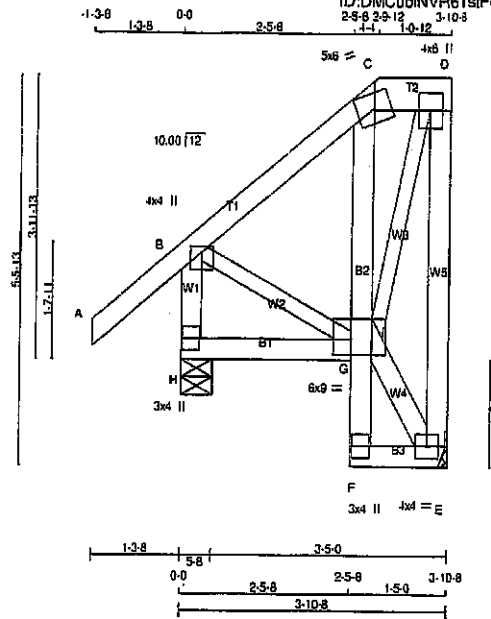

Scale = 1/32"

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - D	2x6	DRY	No.2	SPF	
E - D	2x4	DRY	No.2	SPF	
H - B	2x4	DRY	No.2	SPF	
H - G	2x4	DRY	No.2	SPF	
F - C	2x4	DRY	No.2	SPF	
F - E	2x4	DRY	No.2	SPF	
ALL WEBS	2x4	DRY	No.2	SPF	
EXCEPT					
B - G	2x3	DRY	No.2	SPF	
G - D	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.00 2.00
C	TTV-m	MT20	5.0	6.0	
D	TMVW+p	MT20	4.0	6.0	
E	BMVW1+1	MT20	4.0	4.0	
F	BMV+p	MT20	3.0	4.0	
G	BMVWWW-1	MT20	6.0	9.0	2.50 3.00
H	BMV1+p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
E	214 0	214 0	0 0	MECHANICAL
H	341 0	341 0	0 0	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	DEAD	SOIL
E	151	99 0	0 0	0 0
H	239	170 0	0 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNSHEATHED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRAC. LENGTH (FT)	MEMB.	WEBS	MAX. FACTORED FORCE (LBS)	MAX. UNBRAC. LENGTH (FT)
FR-TO					FR-TO			
A-B	0 41	-91.8	-91.8 0.14 (5)	10.00	G-E	0 0	0.00 (1)	
B-C	-62 0	-91.8	-91.8 0.12 (1)	6.25	B-G	0 53	0.01 (1)	
C-D	-51 0	-91.8	-91.8 0.01 (1)	6.25	G-D	0 134	0.03 (1)	
E-D	-197 0	0.0	0.0 0.10 (1)	7.81				
H-B	-317 0	0.0	0.0 0.03 (1)	7.81				
H-G	0 0	-18.5	-18.5 0.04 (4)	10.00				
F-G	0 13	0.0	0.0 0.01 (1)	10.00				
G-C	-138 0	0.0	0.0 0.01 (1)	7.81				
F-E	0 4	-18.5	-18.5 0.01 (4)	10.00				

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 066-09, CSA 066-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B-5), BC=0.04/1.00 (G-H/4),
WB=0.03/1.00 (D-G/1), SS=0.09/1.00 (A-B-5)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP = 0.24 (8) INPUT = 0.90
JSI METAL = 0.06 (8) INPUT = 1.00



Structural component only
DWG# T-2007644

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	T35S	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington		TRUSS DESC.		Version 8.310 S Oct 29 2019 M/Tek Industries, Inc. Tue Apr 28 10:04:17 2020 Page 1	

ID:DMCubINVR6TstFos31v6L_zns11-_0TvpVoXB8UMQAHl_S76W2dVdRQGSemC7KGenzMEMS

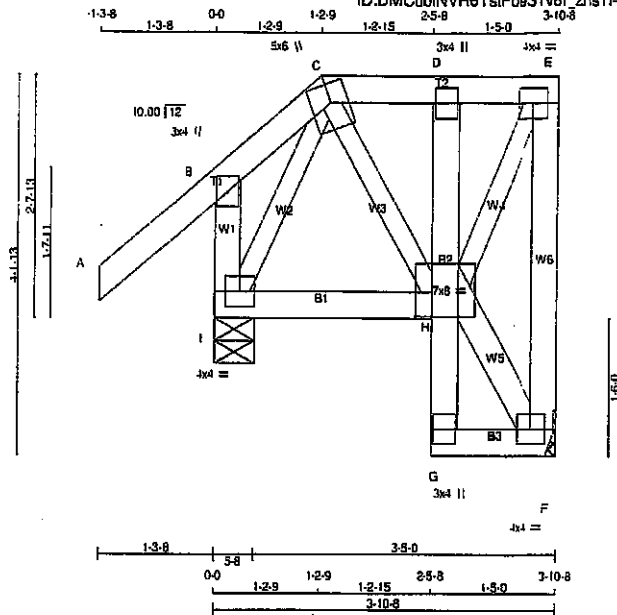

TOTAL WEIGHT = 2 X 29 = 57 lb

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - B	2x4	DRY	No.2
I - H	2x4	DRY	No.2
G - D	2x4	DRY	No.2
G - F	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
H - F	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
C	TTWW+m	MT20	5.0	6.0	2.50 2.25
D	TMV+p	MT20	3.0	4.0	
E	TMVW-1	MT20	4.0	4.0	
F	BMVW-1	MT20	4.0	4.0	
G	BMV+p	MT20	3.0	4.0	
H	BMVWW-1	MT20	7.0	8.0	3.25 2.25
I	BMVW-1	MT20	4.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQ'D
JT	GROSS REACTION	GROSS REACTION	BRG	BRG	
F	VERT	HORZ	DOWN	HORZ	UPLIFT
1	191	0	191	0	0
1	383	0	383	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS							
1ST CASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	135	88	-13	0	0	0	0
F	254	183	0	0	0	72	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED	FACTORED		MEMB.	MAX. FACTORED		
	FORCE	VERT. LOAD	LC1 MAX		FORCE	MAX	
	(LBS)	(PLF)	CSI (LC)		(LBS)	CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	0 41	-91.8 -91.8	0.14 (5)	10.00	H-F	-6 0	0.00 (1)
B-C	-45 0	-91.8 -91.8	0.14 (5)	6.25	H-E	0 141	0.03 (1)
C-D	-69 0	-91.8 -91.8	0.02 (1)	6.25	C-H	0 48	0.01 (1)
D-E	-67 0	-91.8 -91.8	0.02 (1)	6.25	I-C	-96 28	0.02 (1)
F-E	-175 0	0.0 0.0	0.05 (1)	7.81			
I-B	-255 0	0.0 0.0	0.03 (1)	7.81			
I-H	-13 45	-18.5 -18.5	0.04 (4)	6.25			
G-H	0 13	0.0 0.0	0.01 (1)	10.00			
H-D	-135 0	0.0 0.0	0.01 (1)	7.81			
G-F	0 4	-18.5 -18.5	0.01 (4)	10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B:5), BC=0.04/1.00 (H-I:4), WB=0.03/1.00 (E-H:1), SS=0.09/1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PS) (PL) (FL)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (E) (INPUT = 0.90)
JSI METAL= 0.09 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007645

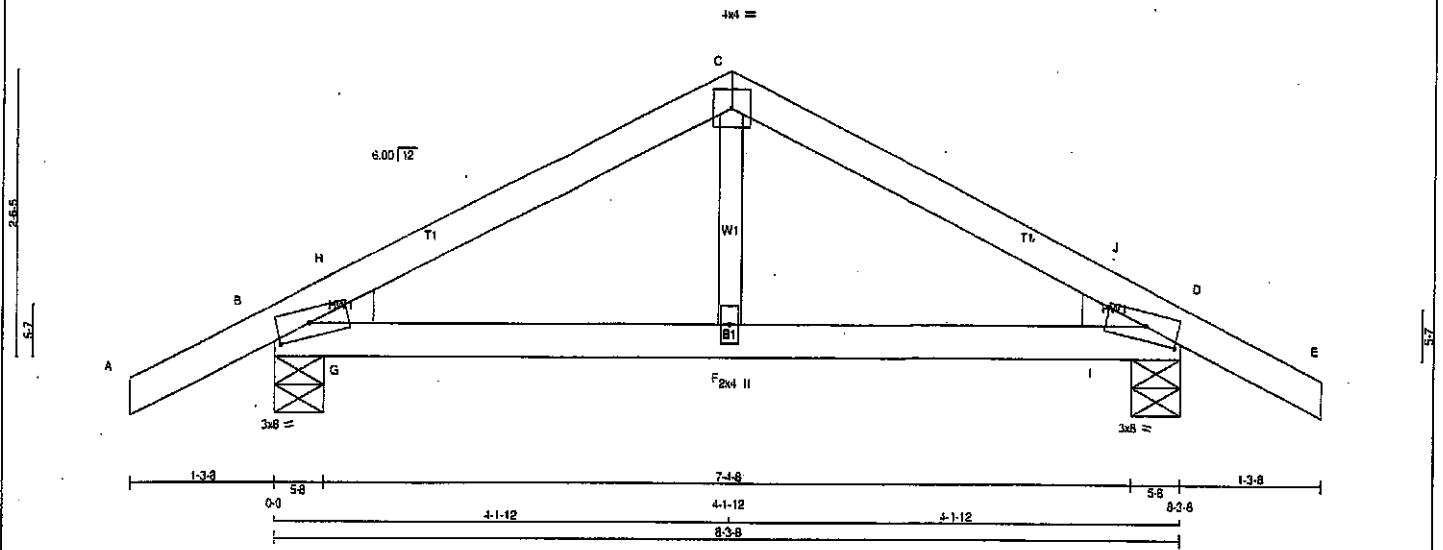

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
B - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X	
B	TMBH1-m	MT20	3.0	8.0	1.50	3.75
C	TTW-p	MT20	4.0	4.0		
D	TMBH1-m	MT20	3.0	8.0	1.50	3.75
F	BMW-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG	HEEL
	VERT	HORZ	DOWN	HORZ			
B	582	0	582	0	5-8	5-8	2x4 L
D	582	0	582	0	5-8	5-8	2x4 R

UNFACTORED REACTIONS

JT	1ST CASE		MAX. MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM. LIVE			
B	409	282	0	0	0	127	0
D	409	282	0	0	0	127	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS					WEBS					
MEMB.	FORCE	FACTORED	VERT. LOAD	LC1	MAX	MEMB.	MAX.	FACTORED		
	(LBS)		(PLF)	CSI (LC)			FORCE	MAX		
FR-TO			FROM	TO	UNBRAC	FR-TO	(LBS)	CSI+LC1		
A-B	0	23	-91.8	-91.8	0.12 (1)	10.00	F-C	0	170	0.04 (1)
B-H	-539	0	-91.8	-91.8	0.04 (1)	6.25	G-H	-158	3	0.00 (1)
H-C	-525	0	-91.8	-91.8	0.15 (1)	6.25	I-J	-158	3	0.00 (1)
C-J	-525	0	-91.8	-91.8	0.15 (1)	6.25				
J-D	-539	0	-91.8	-91.8	0.04 (1)	6.25				
D-E	0	23	-91.8	-91.8	0.12 (1)	10.00				
B-G	0	465	-18.5	-18.5	0.21 (1)	10.00				
G-F	0	465	-18.5	-18.5	0.21 (1)	10.00				
F-I	0	465	-18.5	-18.5	0.21 (1)	10.00				
I-D	0	465	-18.5	-18.5	0.21 (1)	10.00				

TOTAL WEIGHT = 3 X 27 = 80 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.28")
CALCULATED VERT. DEFL. (LL) = L/999 (0.01")
ALLOWABLE DEFL. (TL) = L/360 (0.28")
CALCULATED VERT. DEFL. (TL) = L/989 (0.02")

CSI: TC=0.15/1.00 (C-J:1), BC=0.21/1.00 (F-I:1), WB=0.04/1.00 (C-F:1), SS=0.12/1.00 (C-J:1)

COL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLJ)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1658

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.25 (B) (INPUT = 0.50)
JSI METAL= 0.11 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007646

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	G36	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:03:49 2020 Page 1
ID:DMCubINVR6TstFoe31v6I_zns1l-pdnKxwTznXyK318MLaVXNrbLifioKemmYnfPzMEmu

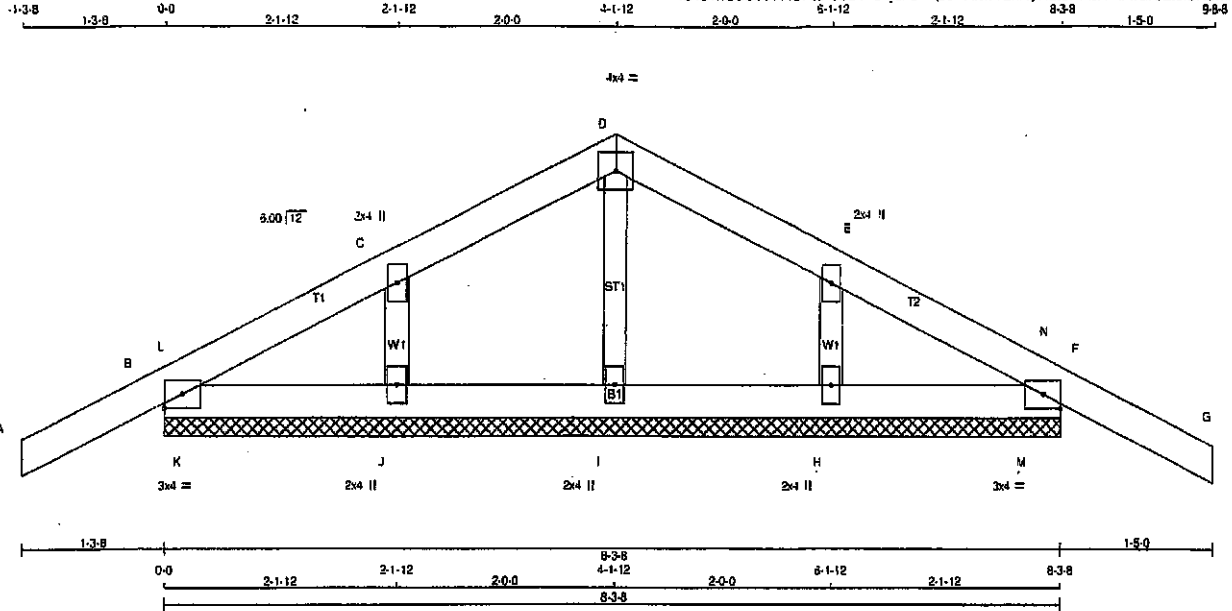

TOTAL WEIGHT = 27 lb [M]

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - D	2x4 DRY	No.2	SPF
D - G	2x4 DRY	No.2	SPF
B - F	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF
ALL GABLE WEBS	2x3 DRY	No.2	SPF
DRY: SEASONED LUMBER.			
GABLE STUDS SPACED AT 2-0-0 OC.			

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMB1-I	MT20	3.0	4.0 Edge
C	TMW-w	MT20	2.0	4.0
D	TTW-p	MT20	4.0	4.0
E	TMW-w	MT20	2.0	4.0
F	TMB1-I	MT20	3.0	4.0 Edge
H, I, J	BMW1-w	MT20	2.0	4.0

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS
THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.
THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.
BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING									
TOTAL LOAD CASES: (4)									
CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS (LC)	MAX. UNBRAC. LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS (LC)		
FR-TO		FROM TO			FR-TO				
A-B	0 23	-91.8 -91.8 0.12 (1)	10.00		I-D	-115 0	0.02 (1)		
B-L	-61 0	-91.8 -91.8 0.01 (4)	6.25		J-C	-218 0	0.03 (1)		
L-C	-39 0	-91.8 -91.8 0.06 (1)	6.25		H-E	-218 0	0.03 (1)		
C-D	-45 0	-91.8 -91.8 0.06 (1)	6.25		K-L	-52 7	0.00 (1)		
D-E	-45 0	-91.8 -91.8 0.06 (1)	6.25		M-N	-52 7	0.00 (1)		
E-N	-39 0	-91.8 -91.8 0.06 (1)	6.25						
N-F	-61 0	-91.8 -91.8 0.01 (4)	6.25						
F-G	0 25	-91.8 -91.8 0.14 (1)	10.00						
B-K	0 44	-18.5 -18.5 0.03 (1)	10.00						
K-J	0 44	-18.5 -18.5 0.03 (1)	10.00						
J-I	0 32	-18.5 -18.5 0.02 (1)	10.00						
I-H	0 32	-18.5 -18.5 0.02 (1)	10.00						
H-M	0 44	-18.5 -18.5 0.03 (1)	10.00						
M-F	0 44	-18.5 -18.5 0.03 (1)	10.00						

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.14/1.00 (F-G:1), BC=0.03/1.00 (H-M:1), WB=0.03/1.00 (E-H:1), SS=0.10/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1867 788 1987 1856


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.21 (B) INPUT = 0.90
JSI METAL= 0.09 (C) INPUT = 1.00



Structural component only
DWG# T-2007621

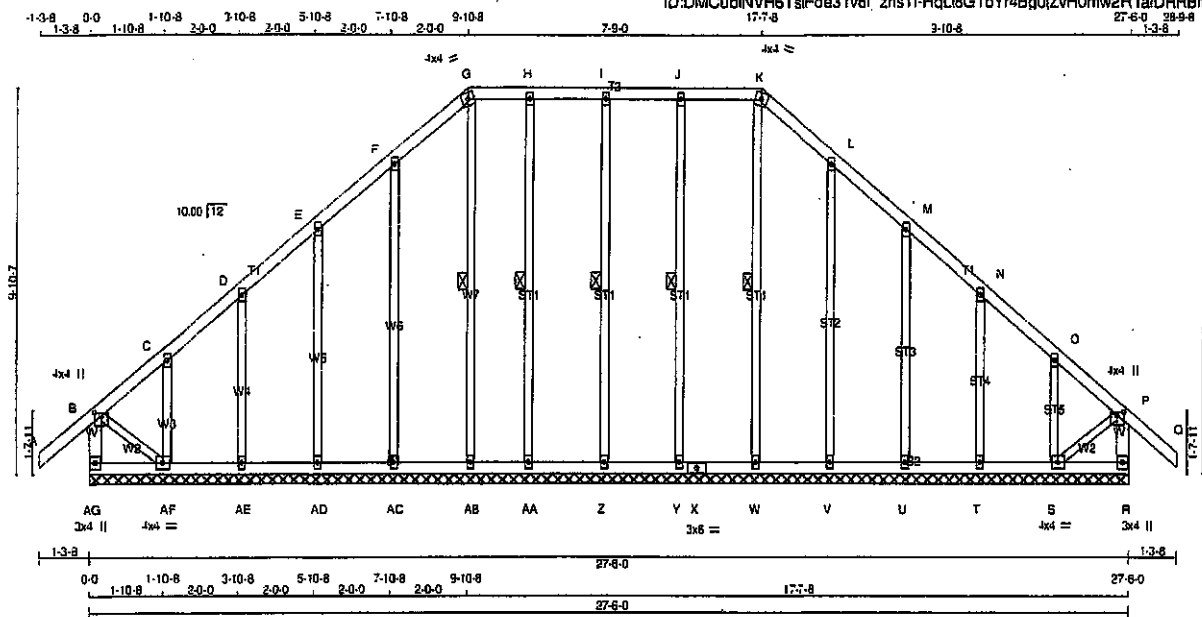

TOTAL WEIGHT = 2 X 152 = 303 lb [M]

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
AG - B	2x4	DRY No.2	SPF
A - G	2x4	DRY No.2	SPF
G - K	2x4	DRY No.2	SPF
K - Q	2x4	DRY No.2	SPF
R - P	2x4	DRY No.2	SPF
AG - X	2x4	DRY No.2	SPF
X - R	2x4	DRY No.2	SPF

ALL WEBS 2x3 DRY No.2 SPF

ALL GABLE WEBS 2x3 DRY No.2 SPF

DRY: SEASONED LUMBER.

GABLE STUDS SPACED AT 2'-0" O.C.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMVW+p	MT20	4.0	4.0	1.00	2.00
C D, E, F, H, I, J, L, M, N, O					
C TMVW+w	MT20	2.0	4.0		
G TTW-m	MT20	4.0	4.0		
K TTW-m	MT20	4.0	4.0		
P TMVW+p	MT20	4.0	4.0	1.00	2.00
R BMV1+p	MT20	3.0	4.0		
S BMVW1-i	MT20	4.0	4.0		
T, U, V, W, Y, Z, AA, AB, AC, AD, AE					
T BMV1+w	MT20	2.0	4.0		
X BS-1	MT20	3.0	6.0		
AF BMVW1-i	MT20	4.0	4.0		
AG BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1:2 LENGTH OF K-W, J-Y, I-Z, H-AA, G-AB.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 MAX (PLF) CSI (LC)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)
FR-TO				
AG-B	-292 0	0.0 0.0 0.03 (1)	7.81 W-K	-140 0 0.09 (1)
A-B	0 41	-91.8 -91.8 0.13 (1)	10.00 Y-J	-210 0 0.14 (1)
B-C	-60 0	-91.8 -91.8 0.12 (1)	6.25 Z-1	-181 0 0.12 (1)
C-D	-23 0	-91.8 -91.8 0.05 (1)	6.25 AA-H	-182 0 0.12 (1)
D-E	-26 0	-91.8 -91.8 0.05 (1)	6.25 V-L	-203 0 0.27 (1)
E-F	-19 0	-91.8 -91.8 0.05 (1)	6.25 U-M	-175 0 0.13 (1)
F-G	-29 0	-91.8 -91.8 0.05 (1)	6.25 T-N	-192 0 0.07 (1)
G-H	-12 0	-91.8 -91.8 0.04 (1)	6.25 S-O	-126 0 0.02 (1)
H-I	-12 0	-91.8 -91.8 0.04 (1)	6.25 AB-G	-121 0 0.06 (1)
I-J	-12 0	-91.8 -91.8 0.05 (1)	6.25 AC-F	-202 0 0.27 (1)
J-K	-12 0	-91.8 -91.8 0.05 (1)	6.25 AD-E	-176 0 0.13 (1)
K-L	-30 0	-91.8 -91.8 0.05 (1)	6.25 AE-D	-192 0 0.07 (1)
L-M	-19 0	-91.8 -91.8 0.05 (1)	6.25 AF-C	-126 0 0.02 (1)
M-N	-26 0	-91.8 -91.8 0.05 (1)	6.25 B-AF	0 32 0.01 (1)
N-O	-24 0	-91.8 -91.8 0.05 (1)	6.25 S-P	0 32 0.01 (1)
O-P	-60 0	-91.8 -91.8 0.12 (1)		
P-Q	0 41	-91.8 -91.8 0.13 (1)		
R-P	-293 0	0.0 0.0 0.03 (1)	7.81	

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 6.00:12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA D86-09, CSA D86-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.13:1.00 (P-Q:1), BC=0.02:1.00 (S-T:4), WB=0.27:1.00 (L-V:1), SS=0.08:1.00 (J-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE (GRIP/DRY) SHEAR SECTION

(PSI)	(PLI)	(PLI)
MAX	MIN	MAX


MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.62 (K) INPUT = 0.90

JSI METAL= 0.11 (L) INPUT = 1.00



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408224	T40	1	2	TRUSS DESC.		


Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mike Industries, Inc. Tue Apr 28 10:19:57 2020 Page 1

ID=DMCubINV6tstF0e31v6l_zns11-TsGG5wA9pyw_Bd8P2IsXcz_APYAIVtA7LN10dlzME7m

1-3-8 0-0 5-10-8 5-10-8 5-10-12 11-9-6 5-9-10 17-7-0 15-2-12 4-1-14 23-4-10 5-10-14 29-3-8 5-10-8 35-2-0 35-2-0 1-3-8

Scale = 1:37.8

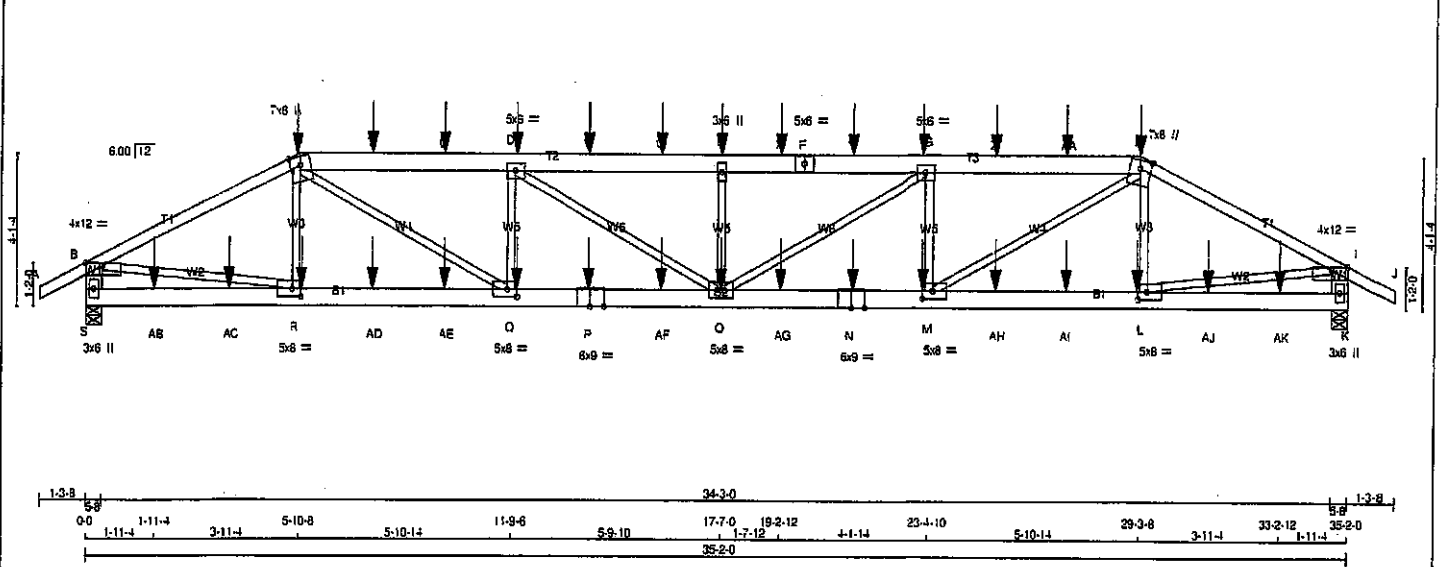

LUMBER N.L.G.A. RULES CHORDS SIZE LUMBER DESCR A - C 2x4 DRY No.2 SPF C - F 2x6 DRY No.2 SPF F - H 2x6 DRY No.2 SPF H - J 2x4 DRY No.2 SPF S - B 2x6 DRY No.2 SPF K - I 2x6 DRY No.2 SPF S - P 2x6 DRY 1650F 1.5E SPF P - N 2x6 DRY 1650F 1.5E SPF N - K 2x6 DRY 1650F 1.5E SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT DRY: SEASONED LUMBER. DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS: CHORDS #ROWS SURFACE SPACING (IN) LOAD(PLF) TOP CHORDS : (0.122"x3") SPIRAL NAILS A-C 1 12 SIDE(61.0) H-J 1 12 SIDE(61.0) C-F 2 12 SIDE(183.1) F-H 2 12 SIDE(183.1) S-B 2 12 TOP K-I 2 12 TOP BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS S-P 2 12 SIDE(183.1) P-N 2 12 SIDE(183.1) N-K 2 12 SIDE(183.1) WEBS : (0.122"x3") SPIRAL NAILS 2x3 1 6 NAILS TO BE DRIVEN FROM ONE SIDE ONLY. GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS. TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED MAXIMUM FACTORED INPUT REQD GROSS REACTION GROSS REACTION BRG BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX S 3323 0 3323 0 0 5-8 5-8 K 3323 0 3323 0 0 5-8 5-8 UNFACTORED REACTIONS 1ST LCASE MAX. MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM. LIVE WIND DEAD SOIL S 2350 1539 0 0.0 0.0 0.0 811 0 0.0 K 2350 1539 0 0.0 0.0 0.0 811 0 0.0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.87 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS WEBS MAX. FACTORED MAX. FACTORED MEMB. FORCE VERT. LOAD LC1 MAX. MEMB. FORCE MAX. (LBS) (PLF) CSI (LC) UNBRAC (LBS) CSI (LC) FR-TO FR-TO A-B 0 28 -91.8 -91.8 0.07 (1) 10.00 R-C -413 20 0.05 (1) B-C -5068 0 -91.8 -91.8 0.52 (1) 3.87 C-Q 0 3193 0.40 (1) C-T -7284 0 -91.8 -91.8 0.27 (1) 4.26 Q-D -1500 0 0.18 (1) T-U -7284 0 -91.8 -91.8 0.27 (1) 4.26 D-O 0 946 0.12 (1) U-D -7284 0 -91.8 -91.8 0.27 (1) 4.26 O-E -830 0 0.10 (1) D-V -8084 0 -91.8 -91.8 0.27 (1) 4.08 E-G 0 946 0.12 (1) V-W -8084 0 -91.8 -91.8 0.27 (1) 4.08 M-G -1500 0 0.18 (1) W-E -8084 0 -91.8 -91.8 0.27 (1) 4.08 O-G 0 3193 0.40 (1) E-X -8084 0 -91.8 -91.8 0.27 (1) 4.08 L-H -413 20 0.05 (1) X-F -8084 0 -91.8 -91.8 0.27 (1) 4.08 B-R 0 4582 0.57 (1) F-Y -8084 0 -91.8 -91.8 0.27 (1) 4.08 L-I 0 4582 0.57 (1) Y-G -8084 0 -91.8 -91.8 0.27 (1) 4.08 G-Z -7284 0 -91.8 -91.8 0.27 (1) 4.26 Z-AA -7284 0 -91.8 -91.8 0.27 (1) 4.26 AA-H -7284 0 -91.8 -91.8 0.27 (1) 4.26 H-I -5085 0 -91.8 -91.8 0.52 (1) 3.87 I-J 0 28 -91.8 -91.8 0.07 (1) 10.00 S-B -3248 0 0.0 0.0 0.11 (1) 7.69 K-I -3248 0 0.0 0.0 0.11 (1) 7.69 S-AB 0 0 -18.5 -18.5 0.04 (4) 10.00 AB-AC 0 0 -18.5 -18.5 0.04 (4) 10.00 AC-FI 0 0 -18.5 -18.5 0.04 (4) 10.00 R-AD 0 4553 -18.5 -18.5 0.22 (1) 10.00 AD-AE 0 4553 -18.5 -18.5 0.22 (1) 10.00 AE-O 0 4553 -18.5 -18.5 0.22 (1) 10.00 O-P 0 7263 -18.5 -18.5 0.34 (1) 10.00 P-AF 0 7263 -18.5 -18.5 0.34 (1) 10.00 AF-O 0 7263 -18.5 -18.5 0.34 (1) 10.00 O-AG 0 7263 -18.5 -18.5 0.34 (1) 10.00 AG-N 0 7263 -18.5 -18.5 0.34 (1) 10.00 N-M 0 7263 -18.5 -18.5 0.34 (1) 10.00 M-AH 0 4553 -18.5 -18.5 0.22 (1) 10.00 AH-AI 0 4553 -18.5 -18.5 0.22 (1) 10.00 AI-L 0 4553 -18.5 -18.5 0.22 (1) 10.00 L-AJ 0 0 -18.5 -18.5 0.04 (4) 10.00 AJ-AK 0 0 -18.5 -18.5 0.04 (4) 10.00 AK-K 0 0 -18.5 -18.5 0.04 (4) 10.00 FACTORED CONCENTRATED LOADS (LBS) JT LOC. LC1 MAX. FACE DIR. TYPE HEEL CONN. C 5-10-8 -429 -429 --- FRONT VERT TOTAL --- C1 D 11-11-4 -110 -110 --- FRONT VERT TOTAL --- C1				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 25.6 PSF DL = 8.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 39.0 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12 THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF NBCC 2018, OBC 2012, ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-09, CSA 086-14 - TPIC 2011, TPIC 2014 .55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL) = L/360 (1:17) CALCULATED VERT. DEFL.(LL) = L/999 (0.21") ALLOWABLE DEFL.(TL) = L/360 (1:17) CALCULATED VERT. DEFL.(TL) = L/999 (0.38") CSI: TC=0.52+1.00 (B-C:1), BC=0.34+1.00 (O-Q:1) WB=0.57+1.00 (B-R:1), SSI=0.15/1.00 (G-H:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE HEELS OFF TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (FPS) (PL) (PL) MAX MIN MAX MIN MAX MIN MT20 618 354 1867 788 1987 1058 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.56 (R) (INPUT = 0.90) JSI METAL= 0.56 (P) (INPUT = 1.00)			
---	--	--	--	---	--	--	--	--	--	--	--



Structural component only
DWG# T-2007660 1/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408224	T40	1	2	TRUSS DESC.		

Tamareck Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Tue Apr 28 10:19:57 2020 Page 2

ID:DMCubiNVR6TstFoe31v6I zns1I-TsGG5wA9gyw BdB2bXcz APYAIVTa7LN10dizME7m

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-p	MT20	4.0	12.0	1.00	5.50
C	TTWW+m	MT20	7.0	8.0	Edge	
D	TMWV-t	MT20	5.0	6.0		
E	TMW+w	MT20	3.0	6.0		
F	TS-t	MT20	5.0	6.0		
G	TMWV-t	MT20	5.0	6.0		
H	TTWW+m	MT20	7.0	8.0	Edge	
I	TMWV-p	MT20	4.0	12.0	1.00	5.50
K	BMV1+p	MT20	3.0	5.0		
L	BMWV-t	MT20	5.0	8.0	2.50	3.00
M	BMWV-t	MT20	5.0	8.0	2.50	3.25
N	BS-t	MT20	6.0	9.0		
O	BMWVW-t	MT20	5.0	8.0		
P	BS-t	MT20	6.0	9.0		
Q	BMWV-t	MT20	5.0	8.0	2.50	3.25
R	BMWV-t	MT20	5.0	8.0	2.50	3.00
S	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	17-7-0	-110	-110	---	FRONT	VERT	TOTAL	---	C1
G	23-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
H	29-3-8	-429	-429	---	FRONT	VERT	TOTAL	---	C1
L	29-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
M	23-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
N	21-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
O	17-7-0	-26	-26	---	FRONT	VERT	TOTAL	---	C1
P	13-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
Q	11-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
R	5-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
T	7-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
U	9-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
V	13-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
W	15-11-4	-110	-110	---	FRONT	VERT	TOTAL	---	C1
X	19-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Y	21-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
Z	25-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AA	27-2-12	-110	-110	---	FRONT	VERT	TOTAL	---	C1
AB	1-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AC	3-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AD	7-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AE	9-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AF	15-11-4	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AG	19-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AH	25-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AI	27-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AJ	31-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1
AK	33-2-12	-26	-26	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

- C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2007660

JOB NAME

408224

TRUSS NAME

T40Z

QUANTITY

1

PLY

2

JOB DESC.

GREEN PARK HOMES

DRWG NO.

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:19:58 2020 Page 2

ID:DMCubINVR6TsFoe31v6Lzns1l-x2qeJGBoaF2pnibcaNm9BWHeyQ8EpcGa1mZakzME7I

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	4.0	12.0	1.00	5.50
C	TTWW+m	MT20	7.0	8.0	Edge	
D	TMWW-l	MT20	5.0	8.0		
E	TMW+w	MT20	3.0	6.0		
F	TS-l	MT20	5.0	6.0		
G	TMWW-l	MT20	5.0	6.0		
H	TTWW+m	MT20	7.0	8.0	Edge	
I	TMVW-p	MT20	4.0	12.0	1.00	5.50
K	BMVl+p	MT20	3.0	6.0		
L	BMWW-l	MT20	5.0	8.0	2.50	3.00
M	BMWW-l	MT20	5.0	8.0	2.50	3.25
N	BS-l	MT20	6.0	9.0		
O	BMWWW-l	MT20	5.0	8.0		
P	BS-l	MT20	6.0	9.0		
Q	BMWW-l	MT20	5.0	8.0	2.50	3.25
R	BMWW-l	MT20	5.0	8.0	2.50	3.00
S	BMVl+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
Q	11-11-4	-28	-28		BACK	VERT	TOTAL		C1
T	13-11-4	-110	-110		BACK	VERT	TOTAL		C1
U	15-11-4	-110	-110		BACK	VERT	TOTAL		C1
V	18-8-4	-110	-110		BACK	VERT	TOTAL		C1
W	20-8-4	-159	-159		BACK	VERT	TOTAL		C1
X	22-8-4	-159	-159		BACK	VERT	TOTAL		C1
Y	10-7-8	-1171	-1171		BACK	VERT	TOTAL		C1
Z	15-11-4	-26	-26		BACK	VERT	TOTAL		C1
AA	18-8-4	-26	-26		BACK	VERT	TOTAL		C1
AB	20-8-4	-32	-32		BACK	VERT	TOTAL		C1
AC	22-8-4	-32	-32		BACK	VERT	TOTAL		C1
AD	24-7-6	-2237	-2237		BACK	VERT	TOTAL		C1
AE	26-6-12	-121	-121		BACK	VERT	TOTAL		C1
AF	28-6-12	-121	-121		BACK	VERT	TOTAL		C1
AG	30-6-12	-121	-121		BACK	VERT	TOTAL		C1
AH	32-6-12	-121	-121		BACK	VERT	TOTAL		C1
AI	33-5-4	-121	-121		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

11 C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

24/10/20

H. J. G. ALVES


100009024

LICENSED PROFESSIONAL ENGINEER

PROVINCE OF ONTARIO

Structural component only

DWG# T-2007661

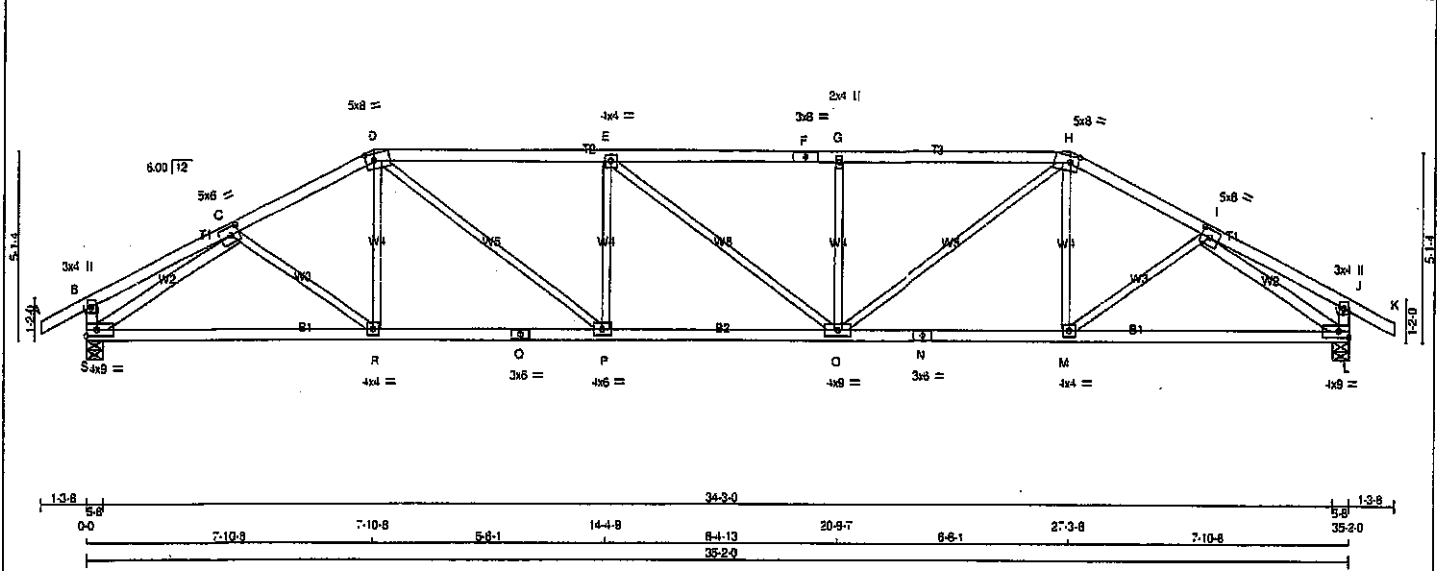


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - F 2x4 DRY No.2 SPF F - H 2x4 DRY No.2 SPF H - K 2x4 DRY No.2 SPF S - B 2x4 DRY No.2 SPF L - J 2x4 DRY No.2 SPF S - Q 2x4 DRY No.2 SPF Q - N 2x4 DRY No.2 SPF N - L 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT S - C 2x4 DRY No.2 SPF I - L 2x4 DRY No.2 SPF DRY: SEASONED LUMBER.				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 25.6 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 39.0 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00:12 THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018, CBC 2012, ABC 2019 - PART 9 OF CBC 2012 (2019 AMENDMENT) - CSA 086-09, CSA 086-14 - TPIC 2011, TPIC 2014 155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL) = L/360 (1.17') CALCULATED VERT. DEFL.(LL) = L/999 (0.21') ALLOWABLE DEFL.(TL) = L/360 (1.17') CALCULATED VERT. DEFL.(TL) = L/999 (0.41') CSI: TC=0.95; 1.00 (D-E:1), BC=0.64; 1.00 (O-P:1), WB=0.63; 1.00 (L-L:1), SS=0.28; 1.00 (O-E:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE HEELS OFF TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 818 354 1687 788 1987 1656 PLATE PLACEMENT TOL = 0.250 inches PLATE ROTATION TOL = 5.0 Deg. JSI GRIP = 0.89 (L) (INPUT = 0.90) JSI METAL = 0.77 (N) (INPUT = 1.00)			
PLATES (table is in inches) JT TYPE PLATES W LEN Y X B TMV-p MT20 3.0 4.0 C TMW-W-1 MT20 5.0 6.0 2.50 2.75 D TTW-W-m MT20 5.0 6.0 2.25 2.75 E TMW-W-1 MT20 4.0 4.0 F TS-1 MT20 3.0 8.0 G TMW-W-m MT20 2.0 4.0 H TTW-W-m MT20 5.0 6.0 2.25 2.75 I TMW-W-1 MT20 5.0 6.0 2.50 2.75 J TMV-p MT20 3.0 4.0 L BMW-W-1 MT20 4.0 9.0 Edge M BMW-W-1 MT20 4.0 4.0 N BS-1 MT20 3.0 8.0 O BMW-W-1 MT20 4.0 9.0 P BMW-W-1 MT20 4.0 6.0 Q BS-1 MT20 3.0 6.0 R BMW-W-1 MT20 4.0 4.0 S BMW-W-1 MT20 4.0 9.0 Edge Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.				BEARINGS FACTORED MAXIMUM FACTORED INPUT REQD GROSS REACTION GROSS REACTION BRG BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX S 2063 0 2063 0 0 5-8 5-8 L 2063 0 2063 0 0 5-8 5-8 UNFACTORED REACTIONS 1ST LOASE MAX-MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL S 1457 989 0 0 0 0 0 488 0 0 0 L 1457 989 0 0 0 0 0 488 0 0 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.94 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS WEBS MAX. FACTORED MAX. FACTORED MEMB. FORCE VERT. LOAD LC1 MAX. MAX. MEMB. MAX. FORCE MAX. (LBS) (PLF) CSI (LC) UNBRAC LENGTH FR-TO (LBS) CSI (LC) FR-TO FROM TO A-B 0 28 -91.8 -91.8 0.12 (1) 10.00 C-R 0 93 0.03 (4) B-C 0 16 -91.8 -91.8 0.20 (1) 10.00 R-D 0 121 0.04 (4) C-D -2799 0 -91.8 -91.8 0.32 (1) 3.88 D-P 0 1267 0.29 (1) D-E -3508 0 -91.8 -91.8 0.95 (1) 2.94 E-O -643 0 0.25 (1) E-F -3507 0 -91.8 -91.8 0.93 (1) 2.94 O-G -2 0 0.00 (1) F-G -3507 0 -91.8 -91.8 0.93 (1) 2.94 O-G -643 0 0.25 (1) G-H -3507 0 -91.8 -91.8 0.94 (1) 2.95 O-H 0 1268 0.28 (1) H-I -2799 0 -91.8 -91.8 0.32 (1) 3.88 M-H 0 121 0.04 (4) I-J 0 16 -91.8 -91.8 0.20 (1) 10.00 M-I 0 93 0.03 (4) J-K 0 28 -91.8 -91.8 0.12 (1) 10.00 S-C -2974 0 0.83 (1) S-B -270 0 0.0 0.0 0.03 (1) 7.81 I-L -2974 0 0.83 (1) L-J -270 0 0.0 0.0 0.03 (1) 7.81 S-R 0 2417 -18.5 -18.5 0.53 (1) 10.00 R-O 0 2489 -18.5 -18.5 0.54 (1) 10.00 Q-P 0 2489 -18.5 -18.5 0.54 (1) 10.00 P-O 0 3508 -18.5 -18.5 0.94 (1) 10.00 O-N 0 2489 -18.5 -18.5 0.54 (1) 10.00 N-M 0 2489 -18.5 -18.5 0.54 (1) 10.00 M-L 0 2417 -18.5 -18.5 0.53 (1) 10.00			



Structural component only
DWG# T-2007662

JOB NAME 408224	TRUSS NAME T42	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tantarrack Roof Truss, Burlington				Version 6.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:20:01 2020 Page 1 ID:DMCubINVR8TslFoe31v6L_znst1H-LdWnxHegIAQPqFSAHixTmP8U9V7RFJIG77En3zME7I 3520 3656 Scale = 1:57.6	

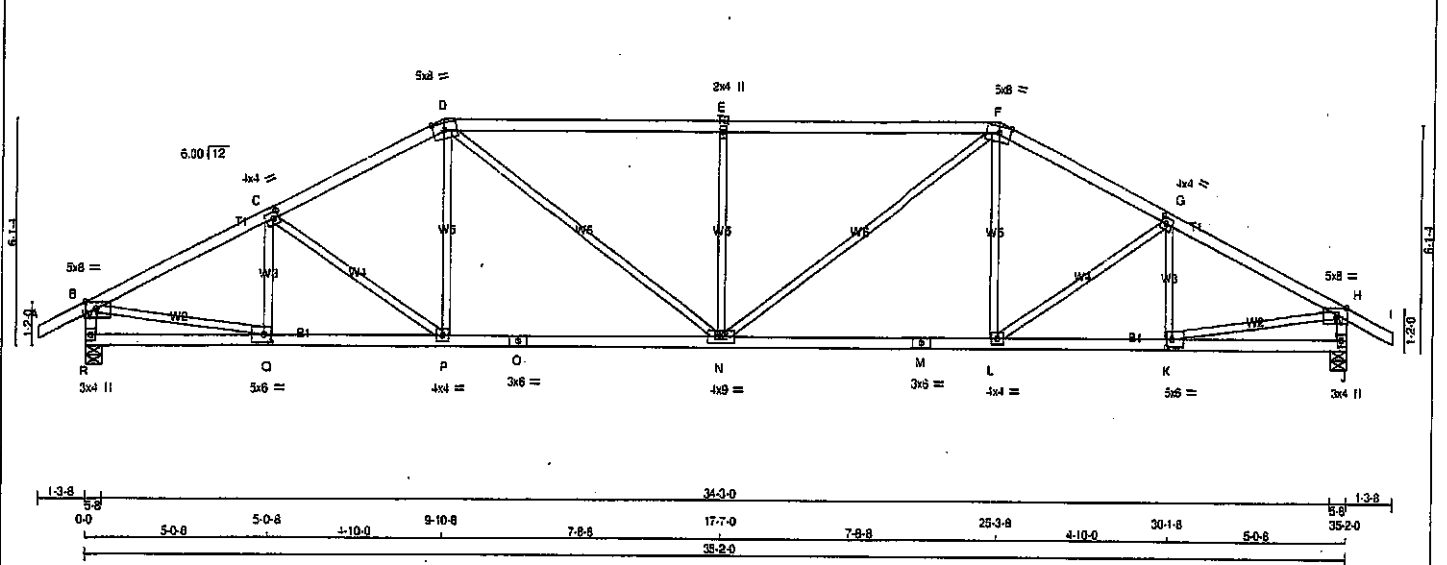

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - I	2x4	DRY	No.2
R - B	2x4	DRY	No.2
J - H	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT
SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMWV-p	MT20	5.0	8.0	Edge 3.50
C	TMWV-i	MT20	4.0	4.0	2.00 1.75
D	TMWV-m	MT20	5.0	8.0	2.25 3.75
E	TMWV-w	MT20	2.0	4.0	
F	TTWV-m	MT20	5.0	8.0	2.25 3.75
G	TMWV-i	MT20	4.0	4.0	2.00 1.75
H	TMWV-p	MT20	5.0	8.0	Edge 3.50
J	BMV1-p	MT20	3.0	4.0	
K	BMWV-i	MT20	5.0	8.0	2.50 2.00
L	BMWV-i	MT20	4.0	4.0	
M	BS-i	MT20	3.0	8.0	
N	BMWVW-i	MT20	4.0	9.0	
O	BS-i	MT20	3.0	8.0	
P	BMWVW-i	MT20	4.0	4.0	
Q	BMWVW-i	MT20	5.0	8.0	2.50 2.00
R	BMV1-p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	RECORD
JT	GROSS REACTION	GROSS REACTION	GROSS REACTION	BRG	BRG
R	2063 0	2063 0	0 0	5-8	5-8
J	2063 0	2063 0	0 0	5-8	5-8

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE PERM.LIVE WIND DEAD SOIL
R	1457	969 0	0 0 0 0 0 0 488 0 0 0
J	1457	969 0	0 0 0 0 0 0 488 0 0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.78 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FR-TO	
A-B	0 28	C-C	-353 0
B-C	-2834 0	C-P	-210 0
C-D	-2887 0	P-D	0 246
D-E	-3080 0	D-N	0 844
E-F	-3060 0	N-E	-672 0
F-G	-2887 0	N-F	0 844
G-H	-2834 0	L-F	0 246
H-I	0 28	L-G	-210 0
I-B	-2018 0	K-G	-353 0
J-H	-2018 0	B-Q	0 2591
		K-H	0 2591
R-Q	0 0		
O-P	0 2555		
P-O	0 2386		
O-N	0 2386		
N-M	0 2386		
M-L	0 2386		
L-K	0 2555		
K-J	0 0		

TOTAL WEIGHT = 2 X 139 = 277 lb

[MIF]

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.17")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.34")

CSI: TC=0.97 1.00 (D-E:1), BC=0.51 1.00 (P-Q:1),
WB=0.58/1.00 (B-Q:1), SS=0.34/1.00 (D-E:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PU)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1657 788 1957 866

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.87 (F) ; INPUT = 0.90
JSI METAL = 0.75 (M) ; INPUT = 1.00



Structural component only
DWG# T-2007663

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	T43	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:20:02 2020 Page 1
ID:DMCubINVR6TstFoe3Iv6I_zn8t1-q498dEleUYGH01NrQSIJ1h7BZrVAiQsViknJVzME7h
Scale = 1:57.6

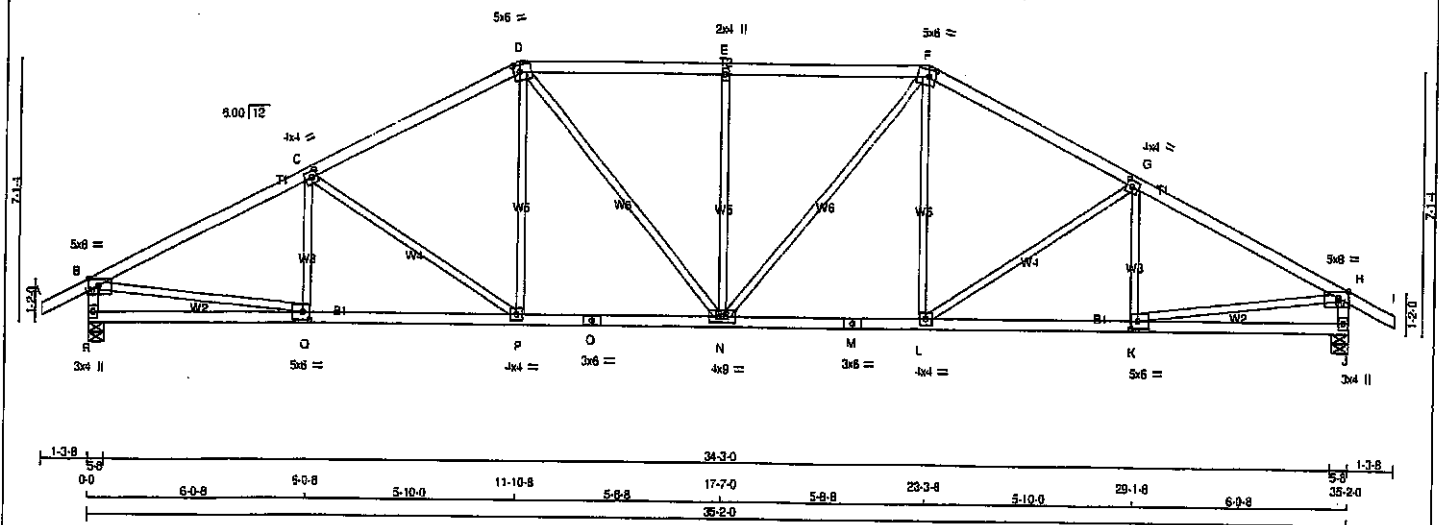

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - F	2x4	DRY No.2	SPF
F - I	2x4	DRY No.2	SPF
R - B	2x4	DRY No.2	SPF
J - H	2x4	DRY No.2	SPF
R - O	2x4	DRY No.2	SPF
D - M	2x4	DRY No.2	SPF
M - J	2x4	DRY No.2	SPF

ALL WEBS 2x3 DRY No.2
EXCEPT
DRY, SEASONED LUMBER.

PLATES (table is in inches)	W	LEN	Y	X
JT TYPE	PLATES			
B TMWV-p	MT20	5.0	8.0	Edge 3.50
C TMWW-i	MT20	4.0	4.0	2.00 1.75
D TTWW-m	MT20	5.0	8.0	2.25 2.00
E TMW-w	MT20	2.0	4.0	
F TTWW-m	MT20	5.0	8.0	2.25 2.00
G TMWW-i	MT20	4.0	4.0	2.00 1.75
H TMWV-p	MT20	5.0	8.0	Edge 3.50
J BMV1-p	MT20	3.0	4.0	
K BMWW-i	MT20	5.0	8.0	2.50 2.25
L BMWW-i	MT20	4.0	4.0	
M BS-t	MT20	3.0	8.0	
N BMWWV-i	MT20	4.0	9.0	
O BS-i	MT20	3.0	6.0	
P BMWW-i	MT20	4.0	4.0	
Q BMWW-i	MT20	5.0	6.0	2.50 2.25
R BMV1-p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT VERT	2063	0	0	0
R	2063	0	0	0
J	2063	0	0	0

UNFACTORED REACTIONS	1ST CASE	MAX. MIN. COMPONENT REACTIONS	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT COMBINED	1457	969	0	0	0	0	0
R	1457	969	0	0	0	0	0
J	1457	969	0	0	0	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.58 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	FACTORED MAX. CS1 (LC)	MAX. UNBRACED LENGTH	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO						FR-TO			
A-B	0 28	-91.8	-91.8	0.12 (1)	10.00	Q-C	-255 12	0.07 (1)	
B-C	-2889 0	-91.8	-91.8	0.58 (1)	3.58	C-P	-435 0	0.42 (1)	
C-D	-2539 0	-91.8	-91.8	0.52 (1)	3.83	P-D	0 350	0.08 (1)	
D-E	-2559 0	-91.8	-91.8	0.48 (1)	3.85	D-N	0 482	0.11 (1)	
E-F	-2559 0	-91.8	-91.8	0.48 (1)	3.85	N-E	-541 0	0.56 (1)	
F-G	-2559 0	-91.8	-91.8	0.52 (1)	3.83	N-F	0 482	0.11 (1)	
G-H	-2889 0	-91.8	-91.8	0.58 (1)	3.58	L-F	0 350	0.08 (1)	
H-I	0 28	-91.8	-91.8	0.12 (1)	10.00	L-G	-435 0	0.42 (1)	
R-B	-2014 0	0.0	0.0	0.20 (1)	5.95	K-G	-255 12	0.07 (1)	
J-H	-2014 0	0.0	0.0	0.20 (1)	5.95	B-Q	0 2635	0.59 (1)	
R-Q	0 0	-18.5	-18.5	0.15 (4)	10.00	K-H	0 2635	0.59 (1)	
Q-P	0 2609	-18.5	-18.5	0.49 (1)	10.00				
P-O	0 2249	-18.5	-18.5	0.43 (1)	10.00				
O-N	0 2249	-18.5	-18.5	0.43 (1)	10.00				
N-M	0 2249	-18.5	-18.5	0.43 (1)	10.00				
M-L	0 2249	-18.5	-18.5	0.43 (1)	10.00				
L-K	0 2609	-18.5	-18.5	0.49 (1)	10.00				
K-J	0 0	-18.5	-18.5	0.15 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 5.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. CC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NSCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")
ALLOWABLE DEFL.(TL) = L/360 (1.17")
CALCULATED VERT. DEFL.(TL) = L/999 (0.28")

CS1: TC=0.58/1.00 (G-H:1), SC=0.49/1.00 (K-L:1),

WB=0.59/1.00 (H-K:1), SS=0.25/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION

(PSI) (PLI)

MAX MIN MAX MIN MAX MIN


MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (Q) INPUT = 0.90

JSI METAL= 0.89 (M) INPUT = 1.00



Structural component only
DWG# T-2007664

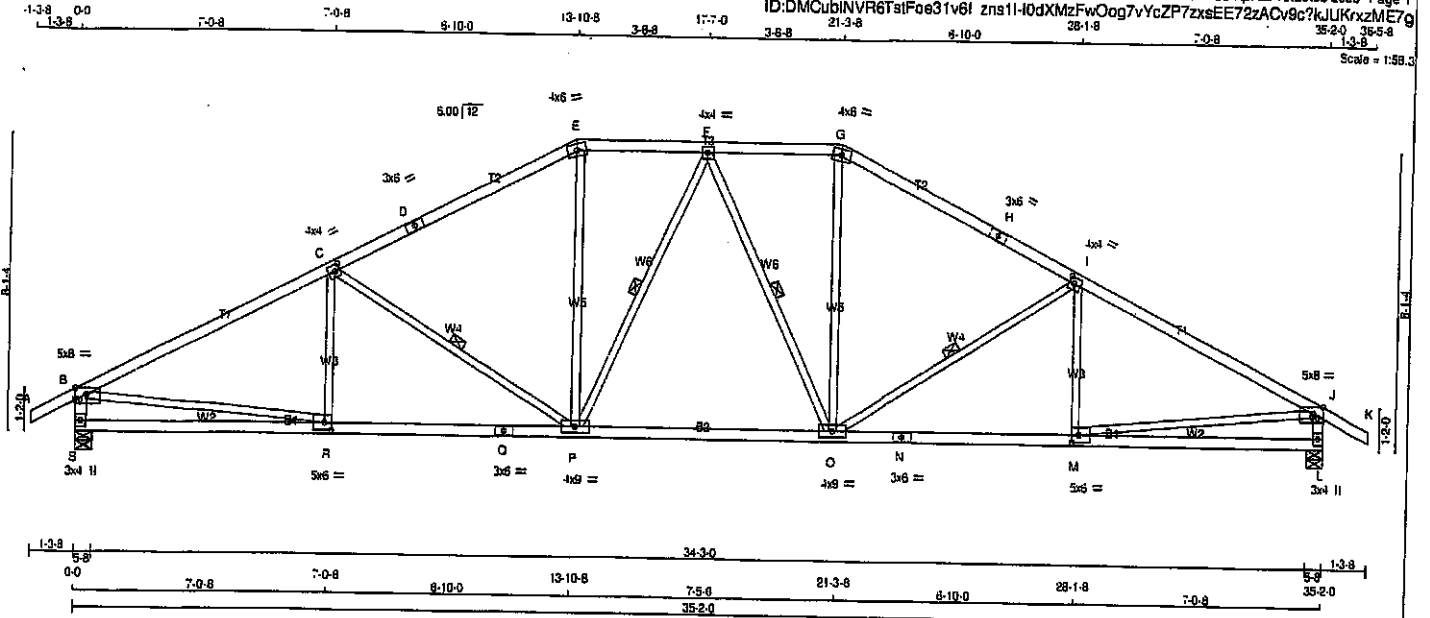

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
G - H	2x4	DRY	No.2	SPF
H - K	2x4	DRY	No.2	SPF
S - B	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
S - Q	2x4	DRY	No.2	SPF
Q - N	2x4	DRY	No.2	SPF
N - L	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	3.30
C	TMVW-l	MT20	4.0	4.0	2.00	1.75
D	TS-l	MT20	3.0	6.0		
E	TTW-m	MT20	4.0	6.0		
F	TMVW-l	MT20	4.0	4.0		
G	TTW-m	MT20	4.0	6.0		
H	TS-l	MT20	3.0	6.0		
I	TMVW-l	MT20	4.0	4.0	2.00	1.75
J	TMVW-p	MT20	5.0	8.0	Edge	3.30
L	BMV-l-p	MT20	3.0	4.0		
M	BS-l	MT20	5.0	6.0	2.50	2.25
N	BS-l	MT20	3.0	6.0		
O	BMVW-l	MT20	4.0	9.0		
P	BS-l	MT20	3.0	6.0		
Q	BS-l	MT20	5.0	6.0	2.50	2.25
S	BMV-l-p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
S	2063 0	2063 0	5-8	5-8
L	2063 0	2063 0	5-8	5-8

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	PERM. LIVE	WIND	DEAD	SOIL
S	1457	569 0	0 0	0 0	488 0	0 0
L	1457	569 0	0 0	0 0	488 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.25 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1:2 LENGTH OF C-P, F-P, F-O, NO.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
 TOTAL LOAD CASES: (4)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)
FR-TO				
A-B	0 29	-91.8 -91.8 0.12 (1)	10.00	R-C -162 52 0.06 (1)
B-C	-2906 0	-91.8 -91.8 0.83 (1)	3.25	C-P -637 0 0.29 (1)
C-D	-2373 0	-91.8 -91.8 0.72 (1)	3.66	P-E 0 674 0.15 (1)
D-E	-2373 0	-91.8 -91.8 0.72 (1)	3.66	P-F -222 0 0.11 (1)
E-F	-2100 0	-91.8 -91.8 0.19 (1)	4.53	F-O -222 0 0.11 (1)
F-G	-2100 0	-91.8 -91.8 0.19 (1)	4.53	O-G 0 674 0.15 (1)
G-H	-2373 0	-91.8 -91.8 0.72 (1)	3.66	O-I -637 0 0.29 (1)
H-I	-2373 0	-91.8 -91.8 0.72 (1)	3.66	M-I -162 52 0.06 (1)
I-J	-2906 0	-91.8 -91.8 0.83 (1)	3.25	B-R 0 2649 0.60 (1)
J-K	0 29	-91.8 -91.8 0.12 (1)	10.00	M-J 0 2649 0.60 (1)
S-B	-2008 0	0.0 0.0 0.20 (1)	5.96	
L-J	-2008 0	0.0 0.0 0.20 (1)	5.96	
S-R	0 0	-18.5 -18.5 0.20 (4)	10.00	
R-O	0 2630	-18.5 -18.5 0.52 (1)	10.00	
Q-P	0 2630	-18.5 -18.5 0.52 (1)	10.00	
P-O	0 2183	-18.5 -18.5 0.45 (1)	10.00	
O-N	0 2630	-18.5 -18.5 0.52 (1)	10.00	
N-M	0 2630	-18.5 -18.5 0.52 (1)	10.00	
M-L	0 0	-18.5 -18.5 0.20 (4)	10.00	

TOTAL WEIGHT = 2 X 145 = 291 lb

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 6.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF CBC 2018, CBC 2012, ABC 2018
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.14")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.30")

CSI: TC=0.83(1.00)(H:1), BC=0.52(1.00)(M:0.1)
 WB=0.63(1.00)(H:1), SS=0.28(1.00)(B:C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION (PS) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.88 (M) (INPUT = 0.90)
 JSI METAL = 0.79 (O) (INPUT = 1.00)



Structural component only
 DWG# T-2007665

JOB NAME 408224	TRUSS NAME T45	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:20:04 2020 Page 1
 ID:DMCubINVR6TstFoe3fv6l_zns1l-mCBvZJGY95o_XIBizUBOSmOWNWqscd9yyDuNOzME7f
 1-3-8 0-0 5-5-3 5-5-3 5-2-11 10-7-13 5-2-11 15-10-8 3-5-0 19-3-8 24-6-3 5-2-11 5-2-11 5-5-3 1-3-8
 Scale = 1:50.3

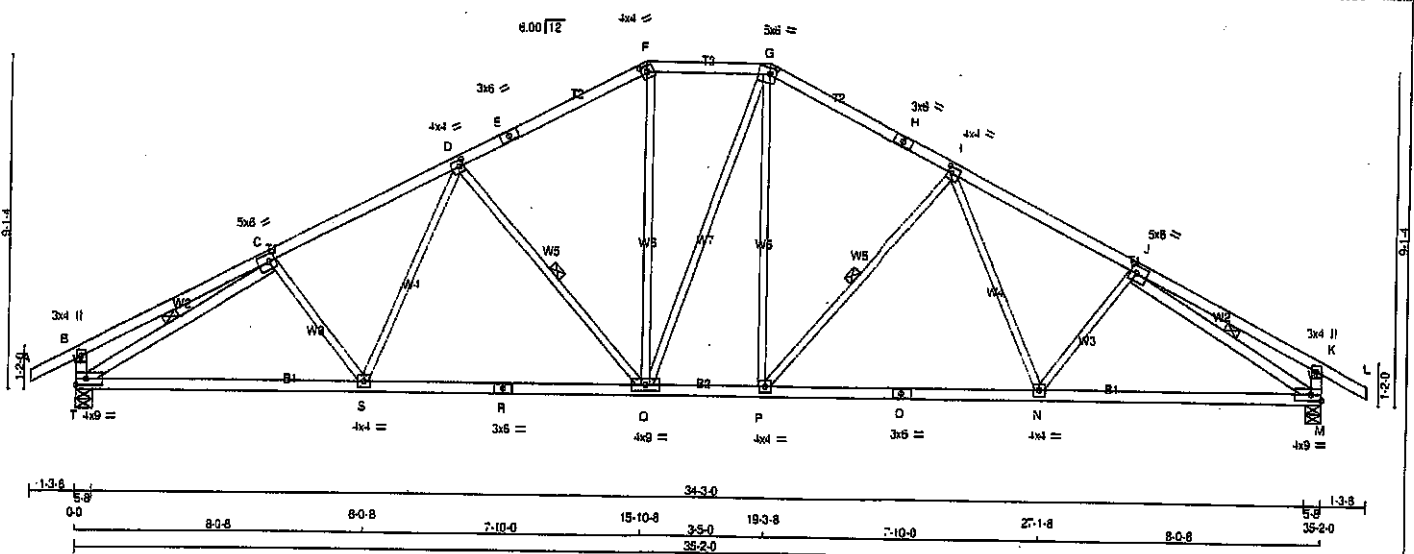

LUMBER				DESCR.	
N. L. G. A. RULES	CHORDS	SIZE	LUMBER		
A - E	2x4	DRY	No.2	SPF	
E - F	2x4	DRY	No.2	SPF	
F - G	2x4	DRY	No.2	SPF	
G - H	2x4	DRY	No.2	SPF	
H - L	2x4	DRY	No.2	SPF	
T - B	2x4	DRY	No.2	SPF	
M - K	2x4	DRY	No.2	SPF	
T - R	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
ALL WEBS				2x3	DRY
EXCEPT					
T - C	2x4	DRY	No.2	SPF	
J - M	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (Table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV-p	MT20	3.0	4.0	
C	TMVW-i	MT20	5.0	6.0	2.50 2.25
D	TMVW-i	MT20	4.0	4.0	2.00 1.50
E	TS-i	MT20	3.0	6.0	
F	TTW-h	MT20	4.0	4.0	2.00 1.75
G	TTW-m	MT20	5.0	8.0	2.00 2.00
H	TS-i	MT20	3.0	6.0	
I	TMVW-i	MT20	4.0	4.0	2.00 1.50
J	TMVW-i	MT20	5.0	6.0	2.50 2.25
K	TMV-p	MT20	3.0	4.0	
M	BMVW-i	MT20	4.0	9.0	Edge
N, P, S					
N	BMVW-i	MT20	4.0	4.0	
O	BS-i	MT20	3.0	6.0	
Q	BMVW-i	MT20	4.0	9.0	
R	BS-i	MT20	3.0	6.0	
T	BMVW-i	MT20	4.0	9.0	Edge

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	GROSS REACTION	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
T	2083	0	0	2083	0	0	5-8	5-8	5-8
M	2083	0	0	2083	0	0	5-8	5-8	5-8

UNFACTORED REACTIONS		1ST LCASE		MAX. MIN. COMPONENT REACTIONS	
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND
T	1457	969	0	0	0
M	1457	969	0	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T, M

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.88 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.
 1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-Q, I-P, C-T, J-M.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

MEMB.		FORCE	VERT. LOAD	CSI: MAX.	MAX.	MEMB.	FORCE	MAX
		(LBS)	(PLF)	LC1: MAX	UNBRAC			CSI(LC)
FR-TO			FROM TO		LENGTH	FR-TO		
A-B	0 28		-91.8 -91.8	0.12 (1)	10.00	C-S	-110 37	0.04 (1)
B-C	0 20		-91.8 -91.8	0.32 (1)	10.00	S-D	0 276	0.08 (1)
C-D	-2780 0		-91.8 -91.8	0.40 (1)	3.86	D-Q	-862 0	0.31 (1)
D-E	-2187 0		-91.8 -91.8	0.36 (1)	4.30	Q-F	0 614	0.14 (1)
E-F	-2187 0		-91.8 -91.8	0.36 (1)	4.30	Q-G	0 4	0.00 (1)
F-G	-1925 0		-91.8 -91.8	0.18 (1)	4.71	P-G	0 609	0.14 (1)
G-H	-2185 0		-91.8 -91.8	0.36 (1)	4.30	P-I	-683 0	0.31 (1)
H-I	-2185 0		-91.8 -91.8	0.36 (1)	4.30	I-N	0 279	0.06 (1)
I-J	-2781 0		-91.8 -91.8	0.40 (1)	3.86	N-J	-110 37	0.04 (1)
J-K	0 20		-91.8 -91.8	0.32 (1)	10.00	T-C	-3042 0	0.81 (1)
K-L	0 28		-91.8 -91.8	0.12 (1)	10.00	J-M	-3043 0	0.57 (1)
T-B	-325 0		0.0 0.0	0.03 (1)	7.81			
M-K	-325 0		0.0 0.0	0.03 (1)	7.81			
T-S	0 2537		-18.5 -18.5	0.56 (1)	10.00			
S-R	0 2363		-18.5 -18.5	0.53 (1)	10.00			
R-O	0 2393		-18.5 -18.5	0.53 (1)	10.00			
Q-P	0 1924		-18.5 -18.5	0.40 (1)	10.00			
P-O	0 2362		-18.5 -18.5	0.53 (1)	10.00			
O-N	0 2362		-18.5 -18.5	0.53 (1)	10.00			
N-M	0 2538		-18.5 -18.5	0.56 (1)	10.00			

TOTAL WEIGHT = 2 X 155 = 310 b

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.8 PSF
 DL = 8.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 5.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF NBCC 2010, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.14")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.26")

CSI: TC=0.40/1.00 (I-J); BC=0.56/1.00 (M-N); WB=0.61/1.00 (J-M); SS=0.20/1.00 (G-I)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 788 1987 1666


PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.89 (F) (INPUT = 0.90)
 JSI METAL = 0.83 (O) (INPUT = 1.00)



Structural component only
 DWG# T-2007666

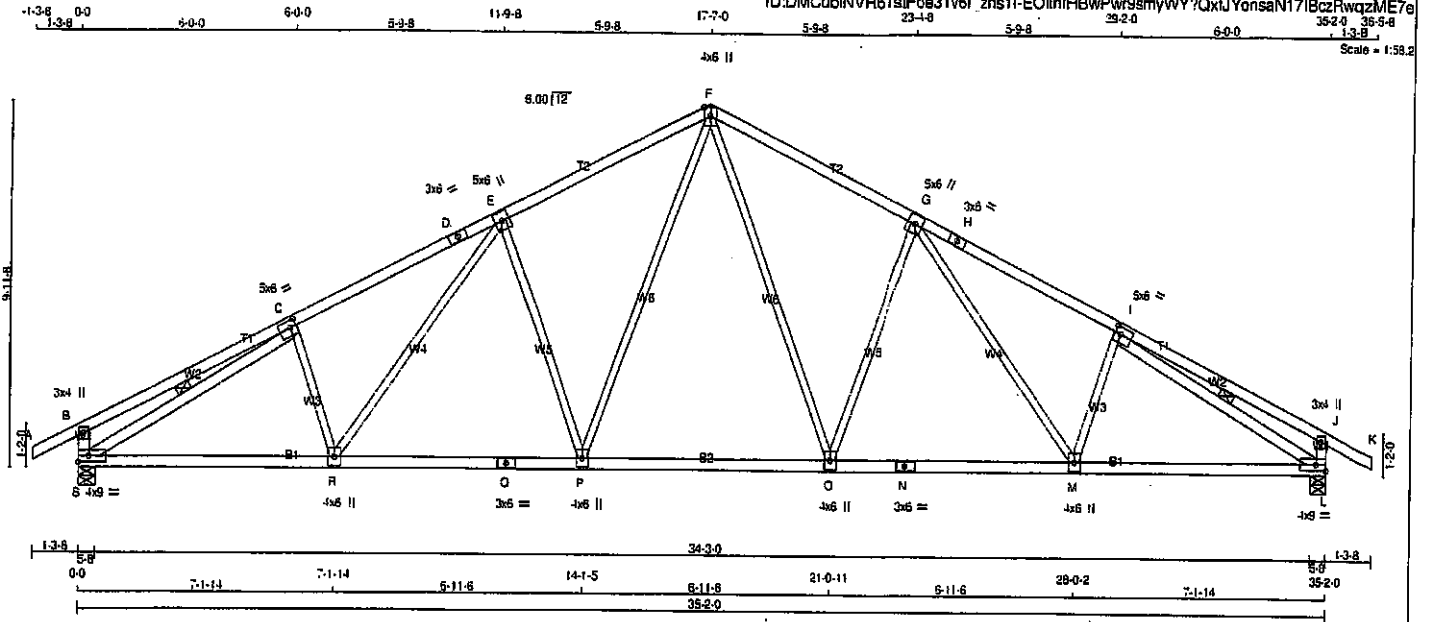

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - F	2x4	DRY No.2	SPF
F - H	2x4	DRY No.2	SPF
H - K	2x4	DRY No.2	SPF
S - B	2x4	DRY No.2	SPF
L - J	2x4	DRY No.2	SPF
S - Q	2x4	DRY No.2	SPF
Q - N	2x4	DRY No.2	SPF
N - L	2x4	DRY No.2	SPF
ALL WEBS	2x3	DRY No.2	SPF
EXCEPT			
S - C	2x4	DRY No.2	SPF
I - L	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMVW+1	MT20	5.0	8.0	2.25	2.00
D	TS+1	MT20	3.0	8.0		
E	TMVW+1	MT20	5.0	8.0		
F	TMVW+p	MT20	4.0	8.0	Edge	
G	TMVW+1	MT20	5.0	8.0		
H	TS+1	MT20	3.0	8.0		
I	TMVW+1	MT20	5.0	8.0	2.25	2.00
J	TMV+p	MT20	3.0	4.0		
L	BMVW+1	MT20	4.0	9.0	Edge	
M	Q, P, R					
N	BMVW+1	MT20	4.0	8.0		
O	BS+1	MT20	3.0	8.0		
Q	BS+1	MT20	3.0	8.0		
S	BMVW+1	MT20	4.0	9.0	Edge	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	HORZ
S	2063	0	2063	0
L	2063	0	2063	0

UNFACTORED REACTIONS

	1ST LCASE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
S	1457	969	0	0	0	488	0
L	1457	969	0	0	0	488	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.75 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-S, I-L

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS1 (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO					FR-TO		
A-B	0 29	-91.8	-91.8 0.12 (1)	10.00	F-O	0 866	0.19 (1)
B-C	0 22	-91.8	-91.8 0.40 (1)	10.00	O-G	-726 0	0.72 (1)
C-D	-2808 0	-91.8	-91.8 0.49 (1)	3.75	G-M	0 391	0.09 (1)
D-E	-2808 0	-91.8	-91.8 0.49 (1)	3.75	M-I	-192 18	0.05 (1)
E-F	-2322 0	-91.8	-91.8 0.46 (1)	4.07	P-F	0 866	0.19 (1)
F-G	-2322 0	-91.8	-91.8 0.46 (1)	4.07	E-P	-726 0	0.72 (1)
G-H	-2808 0	-91.8	-91.8 0.49 (1)	3.75	R-E	0 391	0.09 (1)
H-I	-2808 0	-91.8	-91.8 0.49 (1)	3.75	C-R	-192 18	0.05 (1)
I-J	0 22	-91.8	-91.8 0.40 (1)	10.00	S-C	-3064 0	0.72 (1)
J-K	0 28	-91.8	-91.8 0.12 (1)	10.00	I-L	-3064 0	0.72 (1)
S-B	-344 0	0.0	0.0 0.03 (1)	7.81			
L-J	-344 0	0.0	0.0 0.03 (1)	7.81			
S-R	0 2574	-18.5	-18.5 0.53 (1)	10.00			
R-O	0 2291	-18.5	-18.5 0.47 (1)	10.00			
Q-P	0 2291	-18.5	-18.5 0.47 (1)	10.00			
P-O	0 1762	-18.5	-18.5 0.38 (1)	10.00			
O-N	0 2291	-18.5	-18.5 0.47 (1)	10.00			
N-M	0 2291	-18.5	-18.5 0.47 (1)	10.00			
M-L	0 2574	-18.5	-18.5 0.53 (1)	10.00			

TOTAL WEIGHT = 8 X 152 = 1213 lb [M/F]

DESIGN CRITERIA

SPECIFIED LOADS:
 TOP CH. LL = 25.6 PSF
 DL = 6.0 PSF
 BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF NBCC 2018, OBC 2012, ABC 2019
 - PART 9 OF OBC 2012 (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 2.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.14")
 ALLOWABLE DEFL.(TL) = L/360 (1.17")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.28")

CSI: TC=0.49/1.00 (C-E:1), BC=0.53/1.00 (L-M:1),
 WB=0.72/1.00 (E-P:1), SS=0.22/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
 PLATE GRIP(DRY) SHEAR SECTION
 (PSI) (PLI) (PLI)
 MAX MIN MAX MIN MAX MIN
 MT20 618 354 1667 789 1997 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.87 (C) (INPUT = 0.90)
 JSI METAL = 0.77 (I) (INPUT = 1.00)




Structural component only
 DWG# T-2007667

JOB NAME 408224	TRUSS NAME T47S	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
TRUSS DESC.					

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:20:08 2020 Page 1
ID:DMCubINVR6TstFoe31v6l zns11-ibJg_?Hph2m0K84GWttsngADw8c_RQGi_SGzME7d

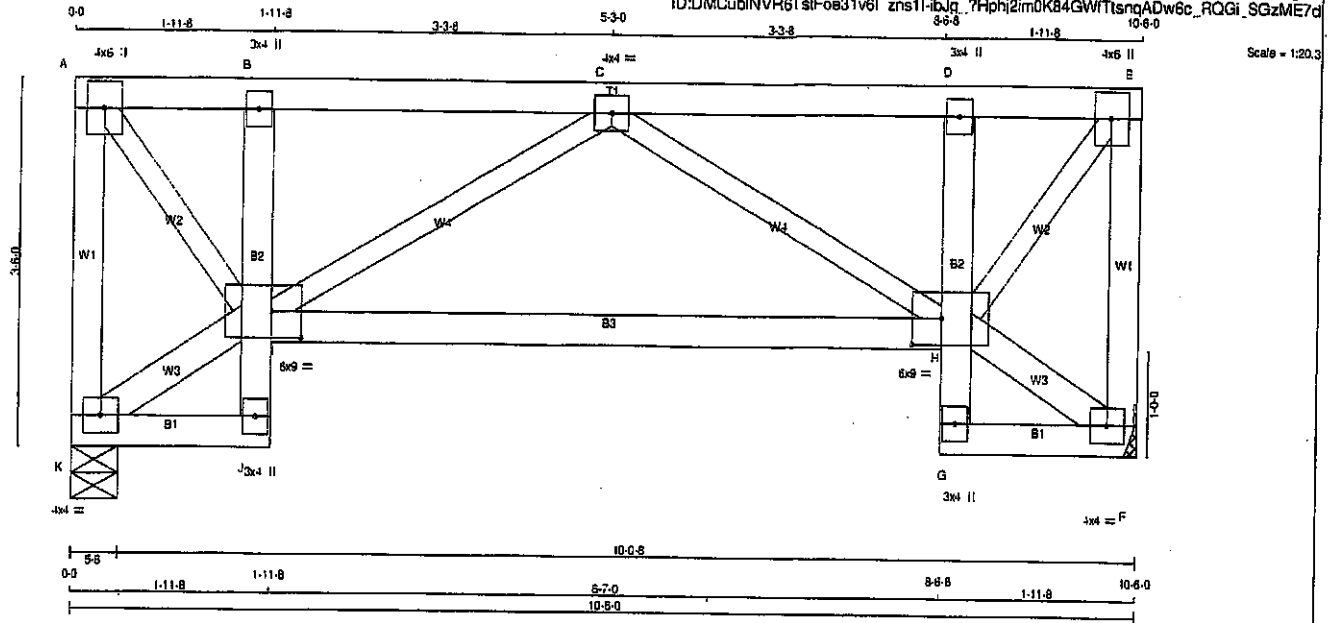

Scale = 1:20.3

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
K - A	2x4	DRY	No.2
A - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
K - J	2x4	DRY	No.2
J - B	2x4	DRY	No.2
I - H	2x4	DRY	No.2
G - D	2x4	DRY	No.2
G - F	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
K - I	2x4	DRY	No.2
H - F	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW+p	MT20	4.0	6.0	
B	TMV+p	MT20	3.0	4.0	
C	TMVW-i	MT20	4.0	4.0	
D	TMV+p	MT20	3.0	4.0	
E	TMVW+p	MT20	4.0	6.0	
F	BMVW-i	MT20	4.0	4.0	
G	BMV+p	MT20	3.0	4.0	
H	BVMWW-i	MT20	6.0	9.0	3.00 3.50
I	BVMWW-i	MT20	6.0	9.0	3.00 3.50
J	BMV+p	MT20	3.0	4.0	
K	BMVW-i	MT20	4.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

PROVIDE ADEQUATE DRAINAGE TO PREVENT PONDING

BEARINGS

	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
K	697	0	697	0
F	697	0	697	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST CASE	COMBINED	SNOW	LIVE	PERM/LIVE	WIND	DEAD	SOIL
K	504	289	0	0	0	235	0
F	504	289	0	0	0	235	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO	LENGTH FR-TO	FR-TO			
K-A	-867	0	0.0 0.0 0.17 (1)	7.81	K-I	-28	0
A-B	-497	0	-114.3 -114.3 0.14 (1)	6.25	A-I	0	783
B-C	-508	0	-114.3 -114.3 0.22 (1)	6.25	H-F	-28	0
C-D	-508	0	-114.3 -114.3 0.22 (1)	6.25	H-E	0	783
D-E	-497	0	-114.3 -114.3 0.14 (1)	6.25	I-C	-384	0
E-F	-867	0	0.0 0.0 0.17 (1)	7.81	C-H	-384	0
K-J	0	25	-18.5 -18.5 0.03 (4)	10.00			
J-I	0	19	0.0 0.0 0.05 (1)	10.00			
I-B	-331	0	0.0 0.0 0.05 (1)	7.81			
I-H	0	832	-18.5 -18.5 0.48 (4)	10.00			
G-H	0	19	0.0 0.0 0.05 (1)	10.00			
H-D	-331	0	0.0 0.0 0.05 (1)	7.81			
G-F	0	25	-18.5 -18.5 0.03 (4)	10.00			

TOTAL WEIGHT = 2 X 51 = 102 lb [M/R]

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	15.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	48.0	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 0.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.35")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL) = L/360 (0.35")
CALCULATED VERT. DEFL.(TL) = L/999 (0.12")

CSI: TC=0.22/1.00 (B-C:1), BC=0.48/1.00 (H-I:4), WB=0.24/1.00 (E-H:1), SS=0.22/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00
FLAT ROOF FACTOR = 0.75

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	818	354	1687 788 1987 1666

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.77 (H) INPUT = 0.90 ;
JSI METAL= 0.30 (E) INPUT = 1.00 ;



Structural component only
DWG# T-2007668

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	T48	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington		Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 10:20:07 2020 Page 1			
		ID:DMCubINVR6TstF0a31v6l zns11-Ant2CLIR50AZOAvKz1u04OyjadNr3HbfwSY jzME7c			
		6-7-12 6-8-8 9,12 3-9-9 10-6-0			
		Scale = 1:18.2			

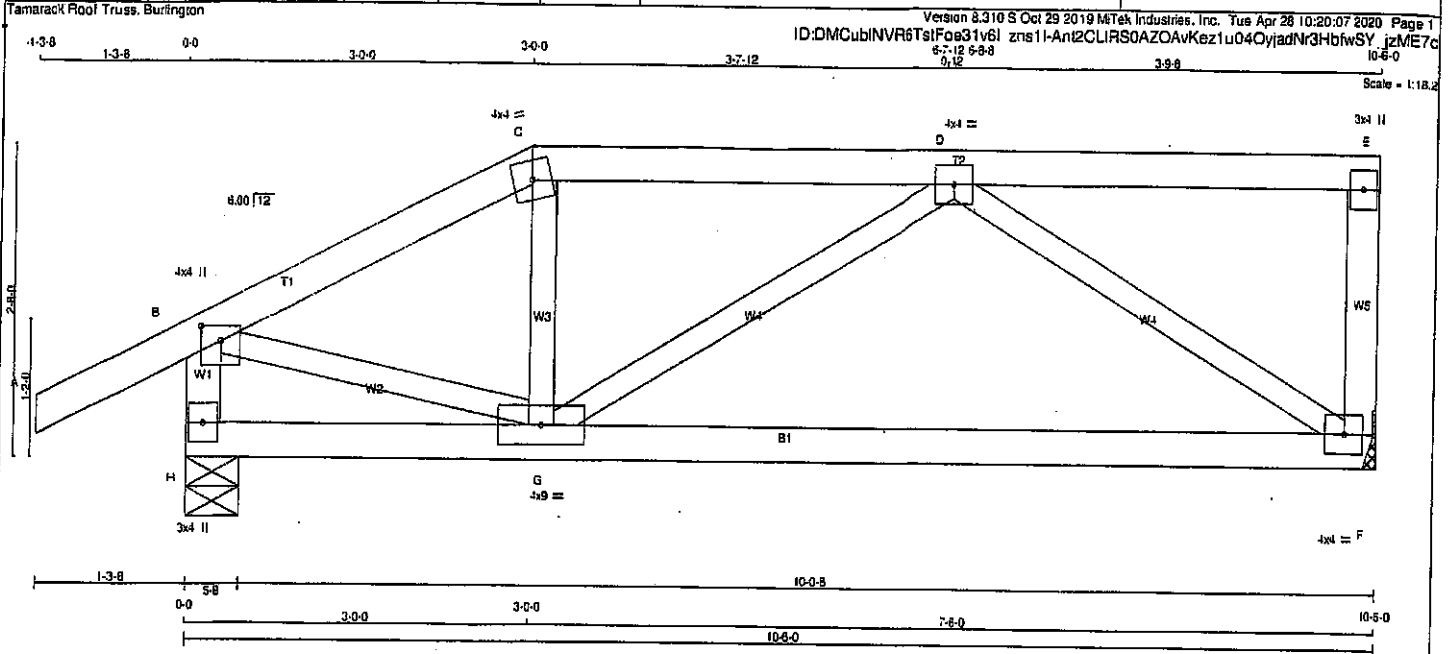

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
H - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.50 2.00
C	ITW-m	MT20	4.0	4.0	
D	TMVW-t	MT20	4.0	4.0	
E	TMV+p	MT20	3.0	4.0	
F	BMVW1-t	MT20	4.0	4.0	
G	BMVWW-t	MT20	4.0	5.0	
H	BMV1-p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER							
BEARINGS							
JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REORD BRG			
F	579 0	579 0	0 0	0 0	MECHANICAL	5-8	
H	703 0	703 0	0 0	5-8			

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS							
JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS					
F	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	408	269 0	0 0	0 0	0 0	141 0	0 0
H	495	338 0	0 0	0 0	0 0	157 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING							
TOTAL LOAD CASES: (4)							
CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 28	-91.8	-91.8 0.12 (1)	10.00	G-C	0 61	0.02 (4)
B-C	-835 0	-91.8	-91.8 0.15 (1)	6.25	G-D	-61 80	0.02 (4)
C-D	-589 0	-91.8	-91.8 0.21 (1)	6.25	D-F	-731 0	0.23 (1)
D-E	0 0	-91.8	-91.8 0.20 (1)	10.00	B-G	0 587	0.13 (1)
E-F	-135 0	0.0	0.0 0.02 (1)	7.81			
H-B	-689 0	0.0	0.0 0.07 (1)	7.81			
H-G	0 0	-18.5	-18.5 0.21 (4)	10.00			
G-F	0 619	-18.5	-18.5 0.25 (4)	10.00			

DESIGN CRITERIA			
SPECIFIED LOADS:			
TOP CH.	LL =	25.6	PSF
	DL =	8.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9. NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

15% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.35")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL) = L/360 (0.35")
CALCULATED VERT. DEFL.(TL) = L/999 (0.09")

CS1: TC=0.21 (1.00 (C-D:1)), BC=0.25 (1.00 (F-G:4)), WB=0.23 (1.00 (D-F:1)), SS=0.17 (1.00 (D-E:1))

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES					
PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)	MAX MIN	MAX MIN	MAX MIN
MT20	618	354	1667	788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.68 (B) (INPUT = 0.90)
JSI METAL = 0.23 (F) (INPUT = 1.00)



Structural component only
DWG# T-2007669

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 10:20:28 2020 Page 1

ID:DMCubINVR6TsIFae31v6l_zns1f-ezRQPhJ3DKIQ0JUWCqZ7Zx3M_ztaUMktaB5W9zME7b

-1-3-8 1-3-8 0-0 5-0-0 5-0-0 5-6-0 10-6-0

5x6 =

Scale = 1:22.0



DRY; SEASONED LUMBER.


JSI GRIP= 0.85 (B) (INPUT = 0.90)
JSI METAL= 0.26 (B) (INPUT = 1.00)



JOB NAME 408224	TRUSS NAME T50	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
--------------------	-------------------	---------------	----------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:20:10 2020 Page 1
ID:DMCubINVR6TstFoe31v8I zns11-bMYBqMKJxY8FdevJ5baj0KcoeV2T1LugCo2zME7Z

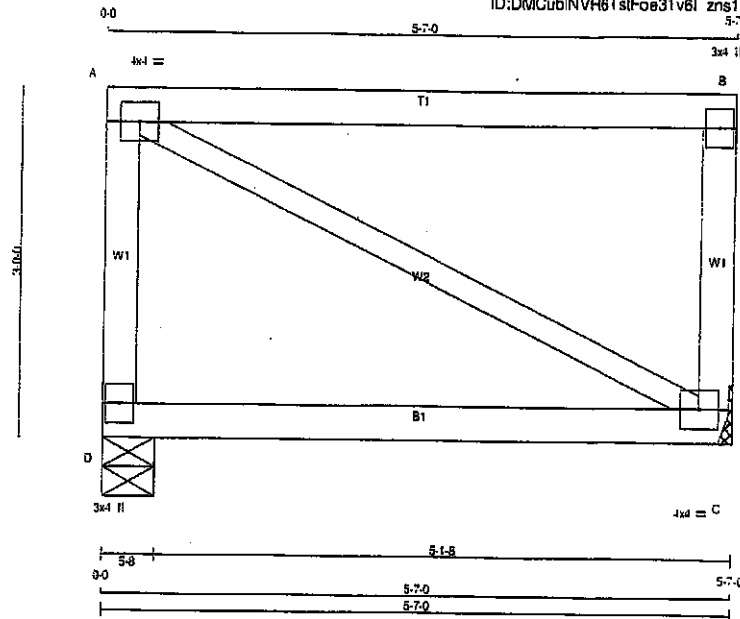

LUMBER

N. L. & A. RULES

CHORDS	SIZE	LUMBER
D - A	2x4 DRY	No.2
A - B	2x4 DRY	No.2
C - B	2x4 DRY	No.2
D - C	2x4 DRY	No.2

ALL WEBS 2x3 DRY No.2
DRY: SEASONED LUMBER.

DESCR.
SPF
SPF
SPF
SPF

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

PROVIDE ADEQUATE DRAINAGE TO PREVENT PONDING

BEARINGS

JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
D	371	0	371	0	0	5-8	5-8	MECHANICAL
C	371	0	371	0	0	5-8	5-8	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 1-8.

UNFACTORED REACTIONS

JT	1ST LOASE	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
D	268	143.0	0.0	0.0	0.0	125.0	0.0
C	268	143.0	0.0	0.0	0.0	125.0	0.0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC1)	MAX. FACTORED VERT. LOAD (LC)	UNBRACED LENGTH	FR-TO	MEMB.	WEBS	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC)
D-A		-319.0	0.0	0.0	0.06 (1)	7.81	A-C			0.0	0.00 (1)
A-B		0.0	-114.3	-114.3	0.81 (1)	10.00					
C-B		-319.0	0.0	0.0	0.06 (1)	7.81					
D-C		0.0	-18.5	-18.5	0.23 (4)	10.00					

TOTAL WEIGHT = 2 X 23 = 46 lb (M/R)

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 15.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 48.0 PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 0.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2018
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TG=0.81 (A-B:1) , BC=0.23/1.00 (C-D:4) ,
WB=0.00/1.00 (A-C:1) , SSI=0.33/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00
FLAT ROOF FACTOR = 0.75

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.25 (A) (INPUT = 0.90)
JSI METAL = 0.07 (A) (INPUT = 1.00)



Structural component only
DWG# T-2007671

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	G50	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 3.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:19:51 2020 Page 1
ID:DMCubINVR6TstFoe31v6f zns1f-eiv?rt6OD89qTthFicI7MikFo7CC5i2EzRaiQezME7s

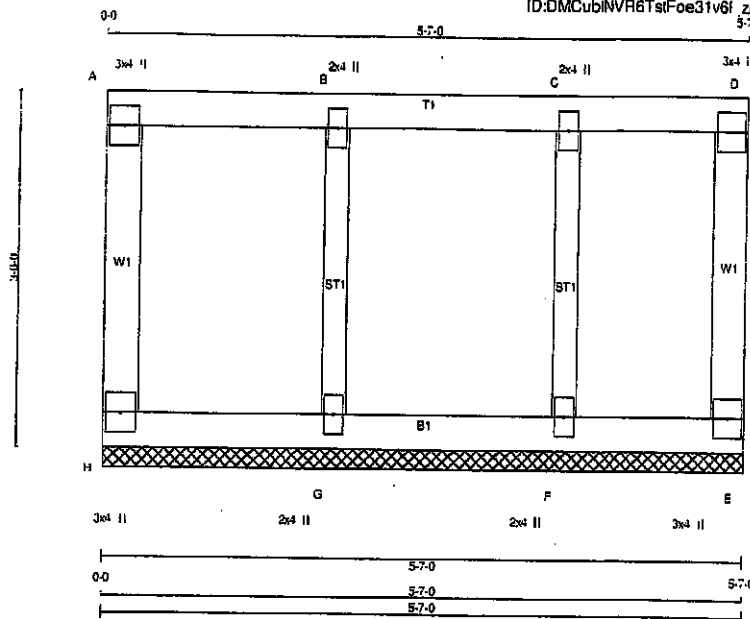

Scale = 1/16"

LUMBER	CHORDS	SIZE	LUMBER
N. L. G. A. RULES			
H - A	2x4	DRY	No.2
A - D	2x4	DRY	No.2
E - D	2x4	DRY	No.2
H - E	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2
ALL GABLE WEBS 2x3 DRY No.2
DRY: SEASONED LUMBER.

GABLE STUDS SPACED AT 2-0-0 OC.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	3.0	4.0		
B	TMW+w	MT20	2.0	4.0		
C	TMW+w	MT20	2.0	4.0		
D	TMV+p	MT20	3.0	4.0		
E	BMV1+p	MT20	3.0	4.0		
F	BMW1+w	MT20	2.0	4.0		
G	BMW1+w	MT20	2.0	4.0		
H	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

PROVIDE ADEQUATE DRAINAGE TO PREVENT PONDING

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
H-A	-101 0	0.0 0.0	0.03 (1)	7.81	G-B	-248 0	0.06 (1)
A-B	-8 0	-114.3 -114.3	0.08 (1)	10.00	F-C	-209 0	0.05 (1)
B-C	-8 0	-114.3 -114.3	0.08 (1)	10.00			
C-D	-8 0	-114.3 -114.3	0.08 (1)	10.00			
E-D	-80 0	0.0 0.0	0.03 (1)	7.81			
H-G	0 8	-18.5 -18.5	0.02 (4)	10.00			
G-F	0 8	-18.5 -18.5	0.02 (4)	10.00			
F-E	0 8	-18.5 -18.5	0.02 (4)	10.00			

TOTAL WEIGHT = 22 lb (M/R)

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	15.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	48.0	PSF	

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 0.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2010, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.08/1.00 (A-B:1) , SC=0.02/1.00 (G-H:1) , WB=0.06/1.00 (B-G:1) , SSI=0.13/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00
FLAT ROOF FACTOR = 0.75

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES


PLATE	GRIP(DRY)	SHEAR	SECTION
	(FS)	(PL)	(PL)
	MAX	MIN	MAX
MT20	618	354	1667
	788	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.17 (G) INPUT = 0.90

JSI METAL= 0.07 (G) INPUT = 1.00



Structural component only
DWG# T-2007656

JOB NAME 408224	TRUSS NAME T51	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

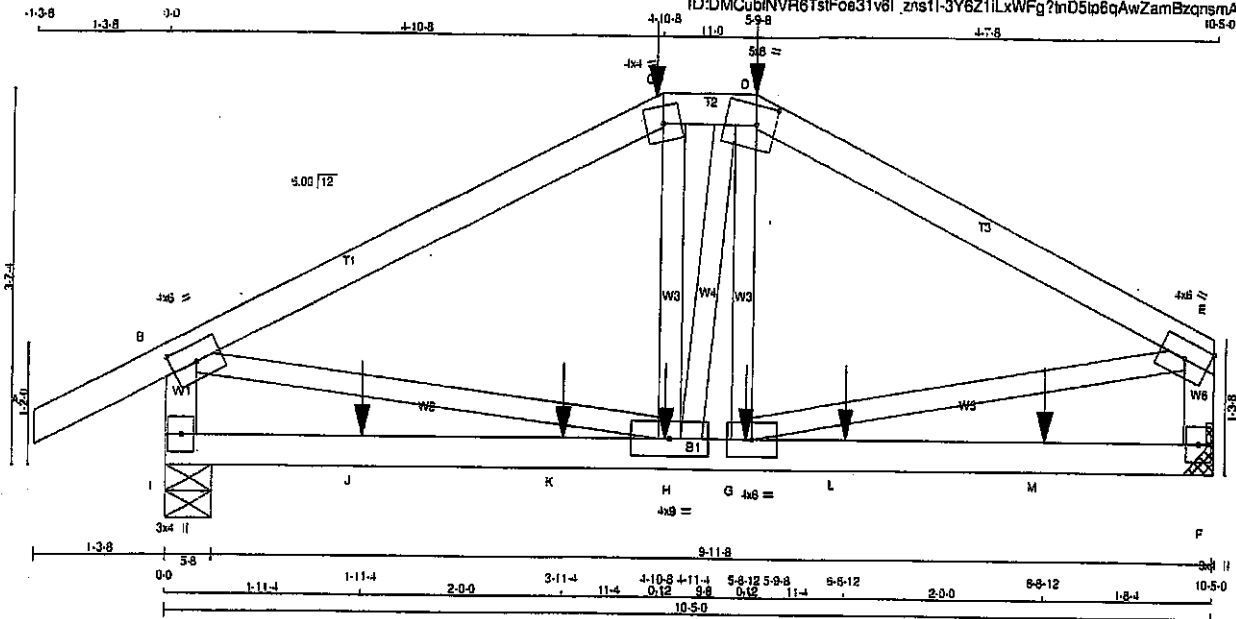

Scale = 1/20.5

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS	2x4	DRY	No.2
A - C	2x4	DRY	No.2
D - E	2x4	DRY	No.2
I - S	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - F	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-I	MT20	4.0	5.0	2.00	3.00
C	TTW-m	MT20	4.0	4.0		
D	TTW-m	MT20	5.0	5.0	2.25	2.25
E	TMVW-I	MT20	4.0	5.0		Edge
F	BMV1+p	MT20	3.0	4.0		
G	BMVW-I	MT20	4.0	5.0		
H	BMVW-I	MT20	4.0	5.0		
I	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT REQD BRG
I	1104 0	1104 0	5-8 IN-SX
F	1000 0	1000 0	5-8 IN-SX MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F MINIMUM BEARING LENGTH AT JOINT F = 3-8.

UNFACTORED REACTIONS

JT	1ST CASE COMBINED	MAX. MIN. SNOW	MAX. MIN. LIVE	MAX. MIN. PERM. LIVE	WIND	DEAD	SOIL
I	778	525 0	0 0	0 0	0 0	253 0	0 0
F	707	465 0	0 0	0 0	0 0	242 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.22 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)	
FR-TO				FR-TO			
A-B	0 28	-91.8 -91.8	0.13 (1)	H-C	-99 54	0.02 (1)	
B-C	-1177 0	-91.8 -91.8	0.46 (1)	H-D	0 30	0.01 (4)	
C-D	-1045 0	-91.8 -91.8	0.03 (1)	G-D	-120 24	0.03 (1)	
D-E	-1167 0	-91.8 -91.8	0.41 (1)	B-H	0 1067	0.26 (1)	
I-B	-1053 0	0.0 0.0	0.12 (1)	G-E	0 1066	0.26 (1)	
F-E	-953 0	0.0 0.0	0.11 (1)				
I-J	0 0	-18.5 -18.5	0.19 (4)				
J-K	0 0	-18.5 -18.5	0.19 (4)				
K-H	0 0	-18.5 -18.5	0.19 (4)				
H-G	0 1039	-18.5 -18.5	0.28 (4)				
G-L	0 0	-18.5 -18.5	0.16 (4)				
L-M	0 0	-18.5 -18.5	0.16 (4)				
M-F	0 0	-18.5 -18.5	0.16 (4)				

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	4-10-8	-361	-361	---	FRONT	VERT	TOTAL	---	C1
D	5-9-8	-361	-361	---	FRONT	VERT	TOTAL	---	C1
G	5-9-12	-19	-19	---	FRONT	VERT	TOTAL	---	C1
H	4-11-4	-19	-19	---	FRONT	VERT	TOTAL	---	C1
J	1-11-4	-17	-17	---	FRONT	VERT	TOTAL	---	C1
K	3-11-4	-19	-19	---	FRONT	VERT	TOTAL	---	C1
L	6-8-12	-19	-19	---	FRONT	VERT	TOTAL	---	C1
M	8-8-12	-17	-17	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 38.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.35")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.35")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TC=0.45/1.00 (B-C:1), BC=0.28/1.00 (G-H:4)
WB=0.25/1.00 (B-H:1), SSI=0.17/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 788

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP=0.71 (G) (INPUT = 0.90)
JSI METAL=0.33 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007672

JOB NAME 408224	TRUSS NAME T52	QUANTITY 1	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 3.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:20:12 2020 Page 1
 ID:DMCubINVR6TstFos3lv6t_zns11-Xlqx2MaHZpsUxolRWd3j86qEbM8WMgKoc9JfwzME7X

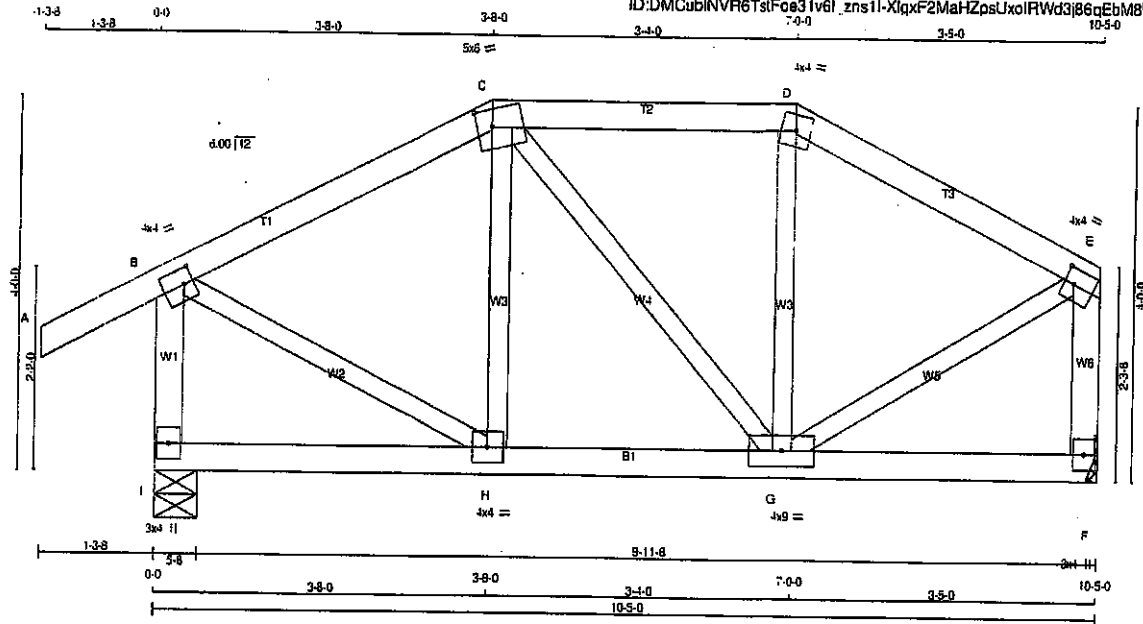

Scale = 1:22.8

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
E - F	2x4	DRY	No.2	SPF
F - G	2x4	DRY	No.2	SPF
G - H	2x4	DRY	No.2	SPF
H - I	2x4	DRY	No.2	SPF
I - J	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	4.0	4.0	2.00	1.25
C	TTWW-m	MT20	5.0	6.0	2.25	2.00
D	TTW-m	MT20	4.0	4.0		
E	TMVW-t	MT20	4.0	4.0	2.00	1.25
F	BMV1+p	MT20	3.0	4.0		
G	BMVWW-I	MT20	4.0	9.0		
H	BMVWW-I	MT20	4.0	4.0		
I	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ		
I	699	0	699	0	5-8	5-8
F	574	0	574	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST LOASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
I	482	336	0	0	0	156	0
F	406	267	0	0	0	140	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0	28	-91.8 -91.8 0.12 (1)	10.00	H-C	-118	14
B-C	-423	0	-91.8 -91.8 0.16 (1)	6.25	C-G	-20	0
C-D	-362	0	-91.8 -91.8 0.13 (1)	6.25	G-D	-126	8
D-E	-409	0	-91.8 -91.8 0.14 (1)	6.25	B-H	0	422
I-B	-689	0	0.0 0.0 0.08 (1)	7.81	G-E	0	419
F-E	-546	0	0.0 0.0 0.07 (1)	7.81			
I-H	0	0	-18.5 -18.5 0.05 (4)	10.00			
H-G	0	375	-18.5 -18.5 0.09 (1)	10.00			
G-F	0	0	-18.5 -18.5 0.05 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN LC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.35")

CALCULATED VERT. DEFL.(LL) = L/999 (0.01")

ALLOWABLE DEFL.(TL) = L/360 (0.35")

CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.16/1.00 (B-C:1) . BC=0.09/1.00 (G-H:1) . WB=0.09/1.00 (B-H:1) . SSI=0.12/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES


PLATE	GRIP(DRY)	SHEAR (PSI)	SECTION (PL)
MT20	618	354	1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.65 (B) INPUT = 0.90

JSI METAL= 0.21 (B) INPUT = 1.00



Structural component only
 DWG# T-2007673

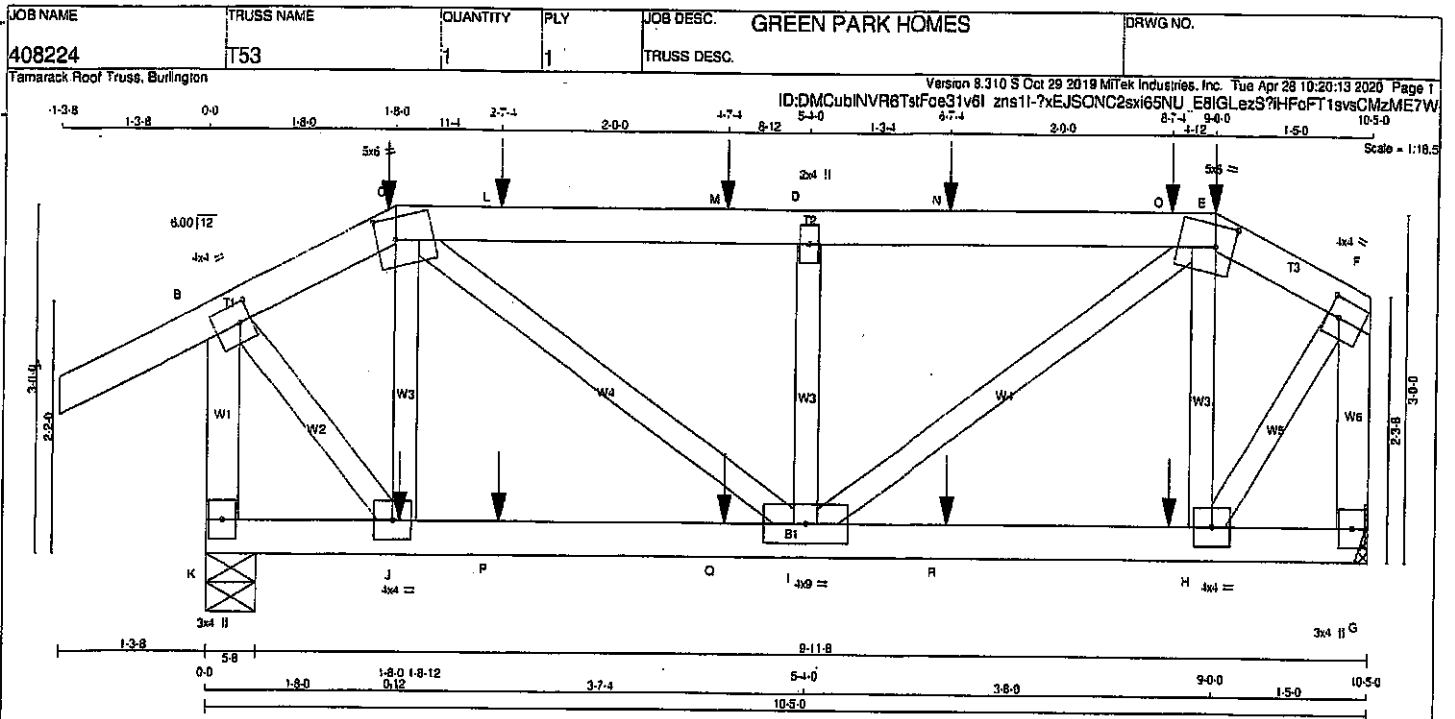

LUMBER

N.L.G.A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - E	2x4	DRY No.2	SPF
E - F	2x4	DRY No.2	SPF
K - B	2x4	DRY No.2	SPF
G - F	2x4	DRY No.2	SPF
K - G	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-1	MT20	4.0	4.0	2.00	1.25
C	TTWW-m	MT20	5.0	6.0	2.25	2.00
D	TMVW-w	MT20	2.0	4.0		
E	TTWW-m	MT20	5.0	6.0	2.25	2.00
F	TMVW-1	MT20	4.0	4.0	2.00	1.25
G	BMV1-p	MT20	3.0	4.0		
H	BMVW-1	MT20	4.0	4.0		
I	BMVW-1	MT20	4.0	9.0		
J	BMVW-1	MT20	4.0	4.0		
K	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ
K	818	0	818	0
G	679	0	679	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 1-8.

UNFACTORED REACTIONS

	1ST CASE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
K	578	393	0	0	0	183	0
G	480	317	0	0	0	182	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD LC1 (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)	
FR-TO				FR-TO			
A-B	0 28	-91.8	-91.8 0.13 (1)	J-C	-307 0	0.08 (1)	
B-C	-427 0	-91.8	-91.8 0.13 (1)	C-I	0 438	0.11 (1)	
C-L	-702 0	-91.8	-91.8 0.26 (1)	I-D	-472 0	0.08 (1)	
L-M	-702 0	-91.8	-91.8 0.26 (1)	D-E	0 489	0.12 (1)	
M-D	-702 0	-91.8	-91.8 0.26 (1)	E-H	-373 0	0.07 (1)	
D-N	-702 0	-91.8	-91.8 0.26 (1)	H-J	0 523	0.13 (1)	
N-O	-702 0	-91.8	-91.8 0.26 (1)	J-F	0 556	0.14 (1)	
O-E	-702 0	-91.8	-91.8 0.26 (1)				
E-F	-379 0	-91.8	-91.8 0.04 (1)				
K-B	-812 0	0.0	0.0 0.10 (1)				
G-F	-877 0	0.0	0.0 0.08 (1)				

K-J	0 0	-18.5	-18.5 0.04 (4)	10.00
J-P	0 349	-18.5	-18.5 0.09 (1)	10.00
P-Q	0 349	-18.5	-18.5 0.09 (1)	10.00
Q-I	0 349	-18.5	-18.5 0.09 (1)	10.00
I-R	0 324	-18.5	-18.5 0.06 (1)	10.00
R-H	0 324	-18.5	-18.5 0.09 (1)	10.00
H-G	0 0	-18.5	-18.5 0.04 (4)	10.00

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX.	FACE	DIR.	TYPE	HEEL	CONN.
C	1-0-0	-53	-53		BACK	VERT	TOTAL		C1
E	9-0-0	-21	-21		FRONT	VERT	TOTAL		C1
H	8-7-4	-4	-4		BACK	VERT	TOTAL		C1
J	1-8-12	-4	-4		BACK	VERT	TOTAL		C1
L	2-7-4	-28	-28		BACK	VERT	TOTAL		C1
M	1-7-4	-25	-25		BACK	VERT	TOTAL		C1
N	6-7-4	-25	-25		BACK	VERT	TOTAL		C1
O	8-7-4	-53	-53		BACK	VERT	TOTAL		C1
P	2-7-4	-4	-4		BACK	VERT	TOTAL		C1
Q	4-7-4	-4	-4		BACK	VERT	TOTAL		C1
R	6-7-4	-4	-4		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. CC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.35")
CALCULATED VERT. DEFL. (LL) = L/999 (0.01")
ALLOWABLE DEFL. (TL) = L/360 (0.35")
CALCULATED VERT. DEFL. (TL) = L/999 (0.02")

CSI: TC=0.26/1.00 (D-E:1), BC=0.09/1.00 (I-J:1), WB=0.14/1.00 (F-H:1), SS=0.21/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP (DRY) SHEAR SECTION (FSL) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.77 (F) (INPUT = 0.90)
JSI METAL = 0.22 (F) (INPUT = 1.00)




Structural component only
DWG# T-2007674

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ORWG NO.
408224	T54S	1	2	GREEN PARK HOMES	
TRUSS DESC.					

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Apr 28 10:20:14 2020 Page 1
ID:DMCub\INVR6TstFoe31v8f zns11-T7ohqkQqpA3ZkEygYxgXoZB2uPsf_43dGWeCkqzME7V

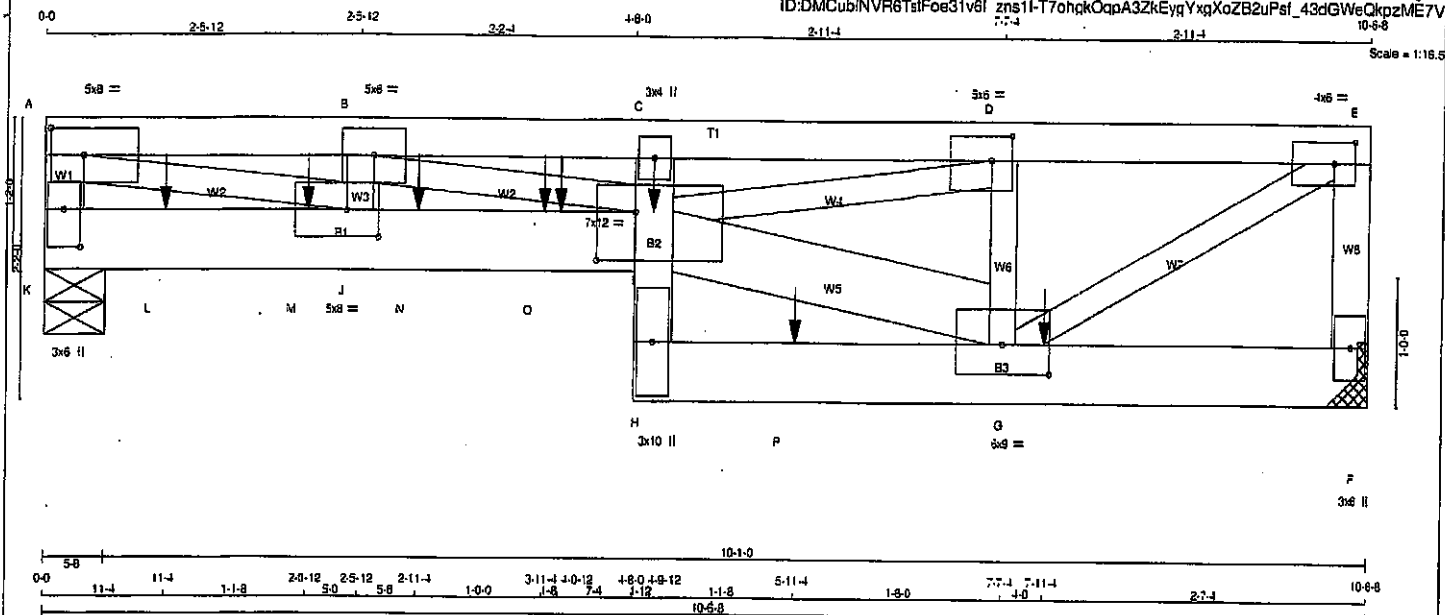

TOTAL WEIGHT = 2 X 49 = 98 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
K - A	2x4	DRY	No.2
A - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
K - I	2x6	DRY	No.2
H - C	2x4	DRY	No.2
H - F	2x6	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
I - G	2x6	DRY	No.2

DRY, SEASONED LUMBER.
DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122'X3') SPIRAL NAILS		
K-A	12	TOP
A-E	12	TOP
E-F	12	TOP
BOTTOM CHORDS : (0.122'X3') SPIRAL NAILS		
K-I	12	SIDE(61.0)
H-F	12	SIDE(183.1)
C-H	5	SIDE(89.6)
WEBS : (0.122'X3') SPIRAL NAILS		
2x3	6	
2x6	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.
GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED			MAXIMUM FACTORED			INPUT	REQD
GROSS REACTION			GROSS REACTION			BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
K	2804	0	2804	0	0	5-8	5-8
F	2255	0	2255	0	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F MINIMUM BEARING LENGTH AT JOINT F = 4-0.

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	1841	1212	0	0	0	0	0
F	1592	1081	0	0	0	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.36 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	FORCE (LBS)	MAX. CSI (LC)	MAX. CSI (LC)
FR-TO		FROM TO		FR-TO			
K-A	-2274	0	0.0 0.0 0.13 (1)	I-G	0	2869	0.19 (1)
A-B	-8694	0	-91.8 -91.8 0.22 (1)	I-D	0	5928	0.73 (1)
B-C	-10298	0	-91.8 -91.8 0.66 (1)	G-D	-2146	0	0.17 (1)
C-D	-9247	0	-91.8 -91.8 0.61 (1)	G-E	0	4043	0.50 (1)
D-E	-3416	0	-91.8 -91.8 0.16 (1)	J-B	-1577	0	0.12 (1)
F-E	-2242	0	0.0 0.0 0.13 (1)	A-J	0	7027	0.87 (1)
				B-I	0	3806	0.47 (1)
K-L	0	0	-18.5 -18.5 0.21 (1)				
L-M	0	0	-18.5 -18.5 0.21 (1)				
M-J	0	0	-18.5 -18.5 0.21 (1)				
J-N	0	8694	-18.5 -18.5 0.79 (1)				
N-O	0	8694	-18.5 -18.5 0.79 (1)				
O-I	0	8694	-18.5 -18.5 0.79 (1)				
H-I	0	384	0.0 0.0 0.65 (1)				
I-C	0	128	0.0 0.0 0.63 (1)				
H-P	0	832	-18.5 -18.5 0.20 (1)				
P-G	0	832	-18.5 -18.5 0.20 (1)				
G-F	0	0	-18.5 -18.5 0.01 (4)				

FACTORED CONCENTRATED LOADS (LBS)		FACE		DIR.		TYPE		HEEL		CONN.	
JT	LOC.	LC1	MAX.	MAX+	MAX-	VERT	TOTAL	MAX	MIN	MAX	MIN
G	7-11-4	-661	-661	---	---	BACK	TOTAL	---	---	C1	C1
I	4-9-12	-577	-577	---	---	FRONT	TOTAL	---	---	C1	C1
M	11-4	-72	-72	---	---	BACK	TOTAL	---	---	C1	C1
N	2-0-12	-352	-352	---	---	FRONT	TOTAL	---	---	C1	C1
O	2-11-4	-142	-142	---	---	BACK	TOTAL	---	---	C1	C1
P	3-11-4	-983	-983	---	---	BACK	TOTAL	---	---	C1	C1
	4-0-12	-354	-354	---	---	FRONT	TOTAL	---	---	C1	C1
	5-11-4	-556	-556	---	---	BACK	TOTAL	---	---	C1	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.35')
CALCULATED VERT. DEFL.(LL) = L/862 (0.15')
ALLOWABLE DEFL.(TL) = L/360 (0.35')
CALCULATED VERT. DEFL.(TL) = L/469 (0.27')

CSI: TC=0.66/1.00 (B-C:1), BC=0.79/1.00 (I-J:1), WB=0.87/1.00 (A-J:1), SSI=0.45/1.00 (C-I:1)

DOL LUMBER=1.00 NAIL=1.00 LB BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PS) (PL) (PL)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1957 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (E) (INPUT = 0.90)
JSI METAL = 0.73 (D) (INPUT = 1.00)



Structural component only
DWG# T-2007675


CONTINUED ON PAGE 2

JOB NAME 408224	TRUSS NAME T54S	QUANTITY 1	PLY 2	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.310 8 Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:20:14 2020 Page 2
ID:DMCubiNVR6TstFoe31v6l zns1I-T7ohpkQopA3ZkEvgYxgXoZB2uPef 43dGW6QkpzME7V

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	5.0	8.0	2.50	3.00
B	TMVW-t	MT20	5.0	6.0		
C	TMV+p	MT20	3.0	4.0		
D	TMVW-t	MT20	5.0	6.0	2.25	2.00
E	TMVW-t	MT20	4.0	6.0	2.00	2.00
F	BMV1+p	MT20	3.0	8.0		
G	BMVWW-t	MT20	6.0	9.0	2.75	4.50
H	BMV+p	MT20	3.0	10.0		
I	BVMWWH	MT20	7.0	12.0	4.50	3.75
J	BMVW-t	MT20	5.0	8.0	2.50	3.00
K	BMV1+p	MT20	3.0	8.0	3.50	1.50




Structural component only
DWG# T-2007675 *HL*

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	V1	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:14 2020 Page 1

ID:DMCubINVR6Tsf0e31v6I zns1l-0hm5FSlyDNJda?9MsYvGL0sMVq3LML6VkvQG0zMFIV

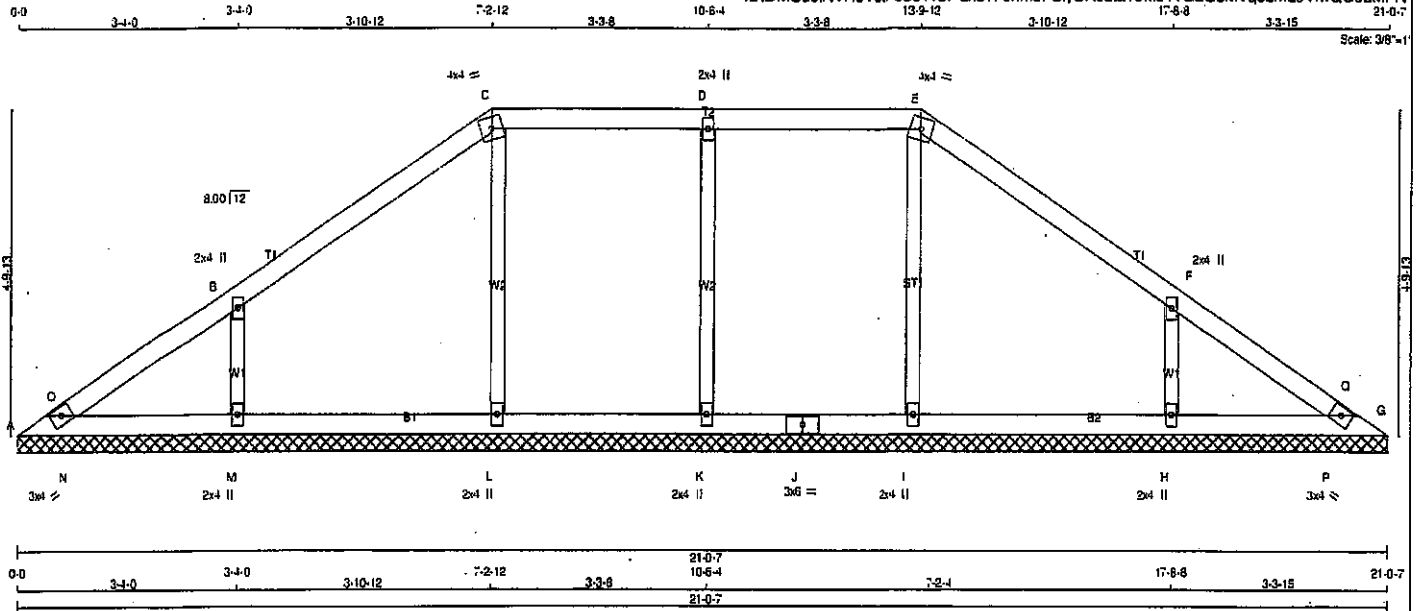

TOTAL WEIGHT = 63 lb

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4 DRY	No.2	SPF
C - E	2x4 DRY	No.2	SPF
E - G	2x4 DRY	No.2	SPF
A - J	2x4 DRY	No.2	SPF
J - G	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF
DRY: SEASONED LUMBER.			

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN Y	X
A	TBM1-h	MT20	3.0	4.0
B, D, F				
B	TMW+w	MT20	2.0	4.0
C	TTW-m	MT20	4.0	4.0
E	TTW-m	MT20	4.0	4.0
G	TBM1-h	MT20	3.0	4.0
H, I, K, L, M				
H	BMW1+w	MT20	2.0	4.0
J	BS-1	MT20	3.0	6.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
A	128	0	128	0	21-0-7 (11-11200-7	
G	128	0	128	0	21-0-7 (11-11200-7	
I	330	0	330	0	21-0-7 (11-11200-7	
L	330	0	330	0	21-0-7 (11-11200-7	
K	433	0	433	0	21-0-7 (11-11200-7	
H	485	0	485	0	21-0-7 (11-11200-7	
M	485	0	485	0	21-0-7 (11-11200-7	

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	1ST CASE COMBINED	MAX. MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	90	61	0	0	0	29	0
G	90	61	0	0	0	29	0
I	235	143	0	0	0	93	0
L	235	143	0	0	0	93	0
K	304	212	0	0	0	92	0
H	342	228	0	0	0	114	0
M	342	228	0	0	0	114	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, G, I, L, K, H, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CS (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CS (LC)
FR-TO		FROM TO			FR-TO		
A-O	-23 2	-91.8 -91.8	0.04 (1)	6.25	I-E	266 0	0.09 (1)
O-B	0 33	-91.8 -91.8	0.21 (1)	10.00	L-C	266 0	0.09 (1)
B-C	-8 8	-91.8 -91.8	0.20 (1)	10.00	K-D	-377 0	0.13 (1)
C-D	0 17	-91.8 -91.8	0.17 (1)	10.00	H-F	-393 0	0.06 (1)
D-E	0 17	-91.8 -91.8	0.17 (1)	10.00	M-B	-393 0	0.06 (1)
E-F	-8 8	-91.8 -91.8	0.20 (1)	10.00	N-O	-39 5	0.00 (1)
F-G	0 33	-91.8 -91.8	0.21 (1)	10.00	P-O	-39 5	0.00 (1)
Q-G	-23 2	-91.8 -91.8	0.04 (1)	6.25			
A-N	-9 0	-18.5 -18.5	0.05 (1)	10.00			
N-M	-7 7	-18.5 -18.5	0.06 (1)	10.00			
M-L	-11 0	-18.5 -18.5	0.06 (1)	6.25			
L-K	-17 0	-18.5 -18.5	0.05 (1)	6.25			
K-J	-17 0	-18.5 -18.5	0.05 (1)	6.25			
J-I	-17 0	-18.5 -18.5	0.05 (1)	6.25			
I-H	-11 0	-18.5 -18.5	0.06 (1)	6.25			
H-P	-7 7	-18.5 -18.5	0.06 (1)	10.00			
P-G	-9 0	-18.5 -18.5	0.05 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.21 1.00 (B-O:1) , SC=0.06 1.00 (L-M:4) , WB=0.13 1.00 (D-K:1) , SS=0.15 1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	618 354	1667 788	1987 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.81 (C) / INPUT = 0.90)
JSI METAL= 0.20 (F) / INPUT = 1.00)



Structural component only
DWG# T-2007616

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	V2	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington


Version 8.3.10 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:15 2020 Page 1

ID:DMCubINVR6TstFoe31v6I zns11-UkTTnJa hRUUKLwZ38oYw1qu824cpFkQszTzMFIL

10-3-12

18-0-7

Scale = 1/29.4

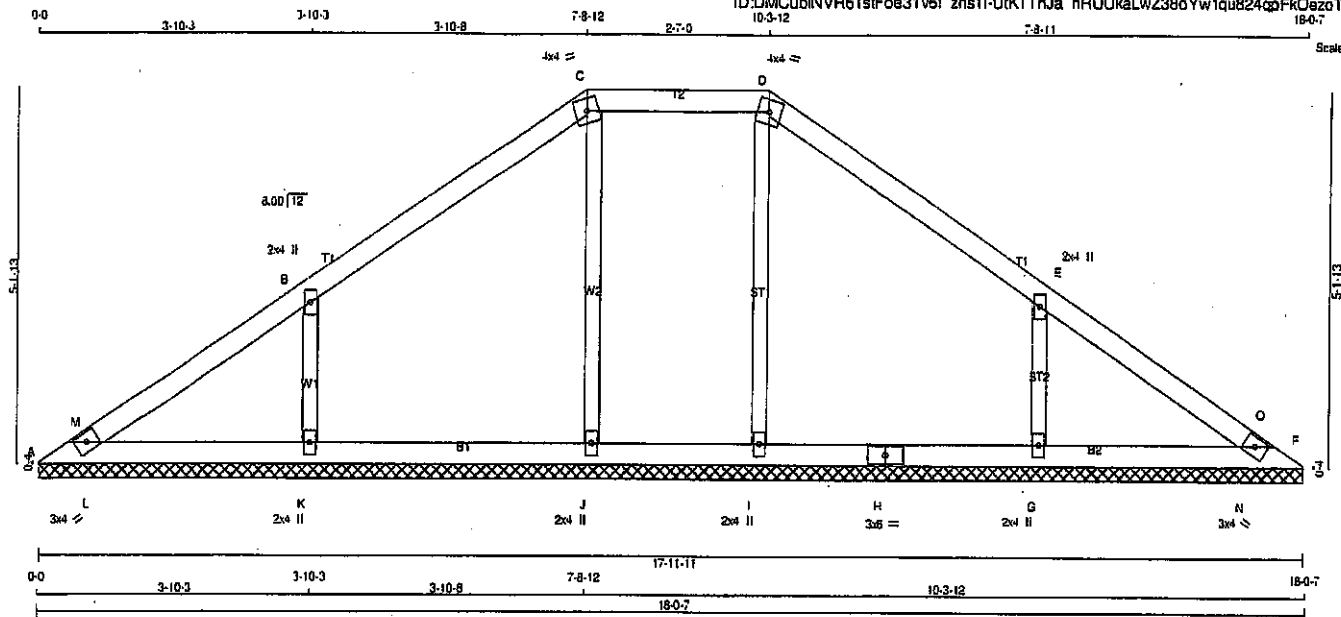

TOTAL WEIGHT = 54 lb

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
A - H	2x4	DRY	No.2
H - F	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y
A	TBM1-h	MT20	3.0	4.0	
B	TMW-w	MT20	2.0	4.0	
C	TTW-m	MT20	4.0	4.0	
D	TTW-m	MT20	4.0	4.0	
E	TMW-w	MT20	2.0	4.0	
F	TBM1-h	MT20	3.0	4.0	
G, I, J, K					
G	BMW1-w	MT20	2.0	4.0	
H	BS-1	MT20	3.0	6.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ		
A	136	0	136	0	17-11-11	11-17-12-11
F	135	0	135	0	17-11-11	11-17-12-11
I	344	0	344	0	17-11-11	11-17-12-11
G	513	0	513	0	17-11-11	11-17-12-11
J	342	0	342	0	17-11-11	11-17-12-11
K	513	0	513	0	17-11-11	11-17-12-11

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	1ST CASE COMBINED	MAX. MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	96	65	0	0	0	30	0
F	95	65	0	0	0	30	0
I	244	155	0	0	0	89	0
G	382	240	0	0	0	122	0
J	382	154	0	0	0	88	0
K	382	240	0	0	0	122	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, F, I, G, J, K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSF (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSF (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-M	0 20	-91.8 -91.8	0.04 (1)	I-D	-292 0	0.11 (1)	
M-B	0 71	-91.8 -91.8	0.22 (1)	G-E	-408 0	0.07 (1)	
B-C	0 33	-91.8 -91.8	0.22 (1)	J-C	-291 0	0.11 (1)	
C-D	0 52	-91.8 -91.8	0.11 (1)	K-B	-408 0	0.07 (1)	
D-E	0 33	-91.8 -91.8	0.22 (1)	L-M	-71 4	0.00 (1)	
E-O	0 71	-91.8 -91.8	0.22 (1)	N-O	-89 5	0.00 (1)	
Q-F	0 19	-91.8 -91.8	0.04 (1)				
A-L	-43 0	-18.5 -18.5	0.07 (1)				
L-K	-30 0	-18.5 -18.5	0.07 (1)				
K-J	-45 0	-18.5 -18.5	0.07 (4)				
J-I	-52 0	-18.5 -18.5	0.04 (4)				
I-H	-45 0	-18.5 -18.5	0.07 (4)				
H-G	-45 0	-18.5 -18.5	0.07 (4)				
G-N	-30 0	-18.5 -18.5	0.07 (1)				
N-F	-43 0	-18.5 -18.5	0.07 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.22/1.00 (E-O:1), BC=0.07/1.00 (K-L:1), WB=0.11/1.00 (D-I:1), SSI=0.14/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1858

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.61 (C) (INPUT = 0.90)
JSI METAL = 0.21 (E) (INPUT = 1.00)




Structural component only
DWG# T-2007617

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	V3	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 09:00:16 2020 Page 1
ID:DMCubINVR6TstFoa31v6I_zns11-y4trg7JCI_ZL6u9XTGaNLmTCiIVXpH4Oy2QWKvzMFIT
15-0-7

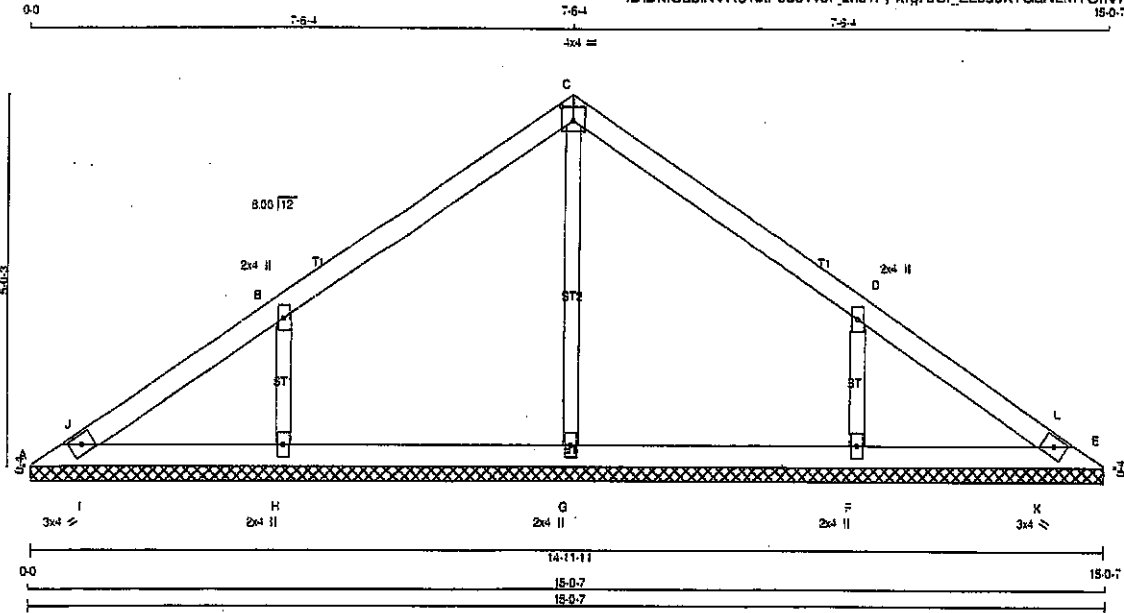

Scale = 1:28.8

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. SPF

A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
A - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY, SEASONED LUMBER.				

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TBM1-h	MT20	3.0	4.0		
B	TBM1-w	MT20	2.0	4.0		
C	TTW-p	MT20	4.0	4.0	2.25	2.00
D	TBM1-w	MT20	2.0	4.0		
E	TBM1-h	MT20	3.0	4.0		
F, G, H	BMW1-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ		
A	134	0	134	0	14-11-11	14-11-11
E	134	0	134	0	14-11-11	14-11-11
G	381	0	381	0	14-11-11	14-11-11
H	501	0	501	0	14-11-11	14-11-11
F	501	0	501	0	14-11-11	14-11-11

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	MAX. MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	95	65	0	0	0	30	0
E	95	65	0	0	0	30	0
G	272	162	0	0	0	110	0
H	353	237	0	0	0	116	0
F	353	237	0	0	0	116	0

BEARING MATERIAL TO BE SPF#NO.2 OR BETTER AT JOINT(S) A, E, G, H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. FURLIN SPACING = 8.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	FR-TO	(LBS)	(PLF)	CSI (LC)	UNBRAC	MEMB.	FR-TO	(LBS)	CSI (LC)	
			FROM	TO	LENGTH					
A-J	-20	4	-91.8	-91.8	0.04 (1)	6.25	G-C	-316	0	0.11 (1)
J-B	0	36	-91.8	-91.8	0.22 (1)	10.00	H-B	-406	0	0.06 (1)
B-C	-5	12	-91.8	-91.8	0.21 (1)	10.00	F-D	-406	0	0.06 (1)
C-D	-5	12	-91.8	-91.8	0.21 (1)	10.00	I-J	-46	6	0.00 (1)
D-L	0	36	-91.8	-91.8	0.22 (1)	10.00	K-L	-46	6	0.00 (1)
L-E	-20	4	-91.8	-91.8	0.04 (1)	6.25				
A-I	-13	0	-18.5	-18.5	0.06 (1)	6.25				
I-H	-10	3	-18.5	-18.5	0.06 (4)	6.25				
H-G	-13	0	-18.5	-18.5	0.06 (4)	6.25				
G-F	-13	0	-18.5	-18.5	0.06 (4)	6.25				
F-K	-10	3	-18.5	-18.5	0.06 (4)	6.25				
K-E	-13	0	-18.5	-18.5	0.06 (1)	6.25				

DESIGN CRITERIA

SPECIFIED LOADS:	
TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.22/1.00 (B-J:1) . BC=0.08/1.00 (G-H:1) . WB=0.11/1.00 (C-G:1) . SS=0.15/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1657 789 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.28 (D) (INPUT = 0.90)
JSI METAL = 0.21 (D) (INPUT = 1.00)




Structural component only
DWG# T-2007618

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408222	V4	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITak Industries, Inc. Tue Apr 28 11:37:42 2020 Page 1

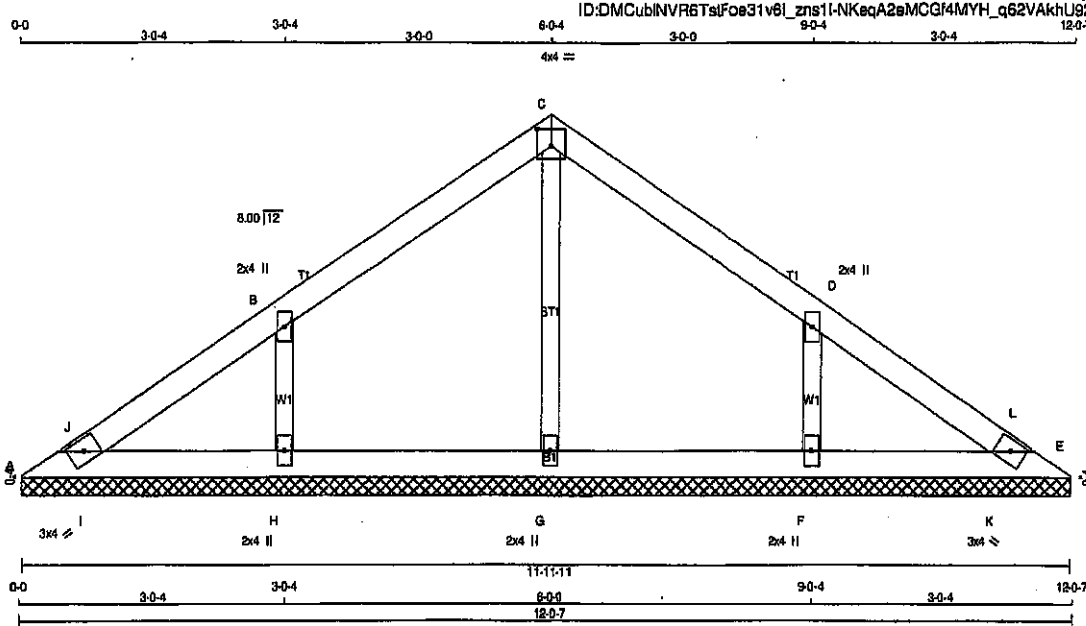

Scale = 1:23.7

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF		
C - E	2x4	DRY	No.2	SPF		
A - E	2x4	DRY	No.2	SPF		
ALL WEBS	2x3	DRY	No.2	SPF		
DRY: SEASONED LUMBER.						

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
A	TBMt-h	MT20	3.0	4.0		
B	TMW-w	MT20	2.0	4.0		
C	TTW-p	MT20	4.0	4.0	2.25	2.00
D	TMW-w	MT20	2.0	4.0		
E	TBMt-h	MT20	3.0	4.0		
F, G, H						
F	BMWt-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
JT	GROSS REACTION	GROSS REACTION	BRG	BRG
	VERT	DOWN	HORIZ	UPLIFT
A	117	0	117	0
E	117	0	117	0
G	290	0	290	0
F	398	0	398	0
H	398	0	398	0

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	83	56/0	0/0	0/0	0/0	26/0	0/0
E	83	56/0	0/0	0/0	0/0	26/0	0/0
G	207	125/0	0/0	0/0	0/0	82/0	0/0
F	281	188/0	0/0	0/0	0/0	93/0	0/0
H	281	188/0	0/0	0/0	0/0	93/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, E, G, F, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED	FACTORED	MAX.	WEBS	MEMB.	MAX. FACTORED	FACTORED	MAX.
		FORCE	VERT. LOAD	LC1			FORCE	VERT. LOAD	LC1
		(LBS)	(PLF)	(LC)			(LBS)	(PLF)	(LC)
PR-TO			FROM	TO	LENGTH	PR-TO			
A-J	-8/5	-91.8	-91.8	0.03 (1)	10.00	G-C	-248/0	0.08 (1)	
J-B	0/36	-91.8	-91.8	0.13 (1)	10.00	F-D	-314/0	0.05 (1)	
B-C	0/12	-91.8	-91.8	0.13 (1)	10.00	H-B	-314/0	0.05 (1)	
C-D	0/12	-91.8	-91.8	0.13 (1)	10.00	I-J	-47/4	0.00 (1)	
D-L	0/36	-91.8	-91.8	0.13 (1)	10.00	K-L	-47/4	0.00 (1)	
L-E	-8/5	-91.8	-91.8	0.03 (1)	10.00				
A-I	-13/0	-18.5	-18.5	0.05 (1)	8.25				
I-H	-10/0	-18.5	-18.5	0.05 (1)	10.00				
H-G	-20/0	-18.5	-18.5	0.04 (4)	8.25				
G-F	-20/0	-18.5	-18.5	0.04 (4)	8.25				
F-K	-10/0	-18.5	-18.5	0.05 (1)	10.00				
K-E	-13/0	-18.5	-18.5	0.05 (1)	8.25				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBC 2010, NBC 2012, ABC 2019
- PART 9 OF NBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.13/1.00 (B-J:1), BC=0.05/1.00 (A-I:1), WS=0.08/1.00 (C-G:1), SSI=0.11/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LB BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP (PS) SHEAR (PLI) SECTION (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1987 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.22 (D) (INPUT = 0.90)
JSI METAL = 0.16 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007619

Tamarack Roof Truss, Burlington

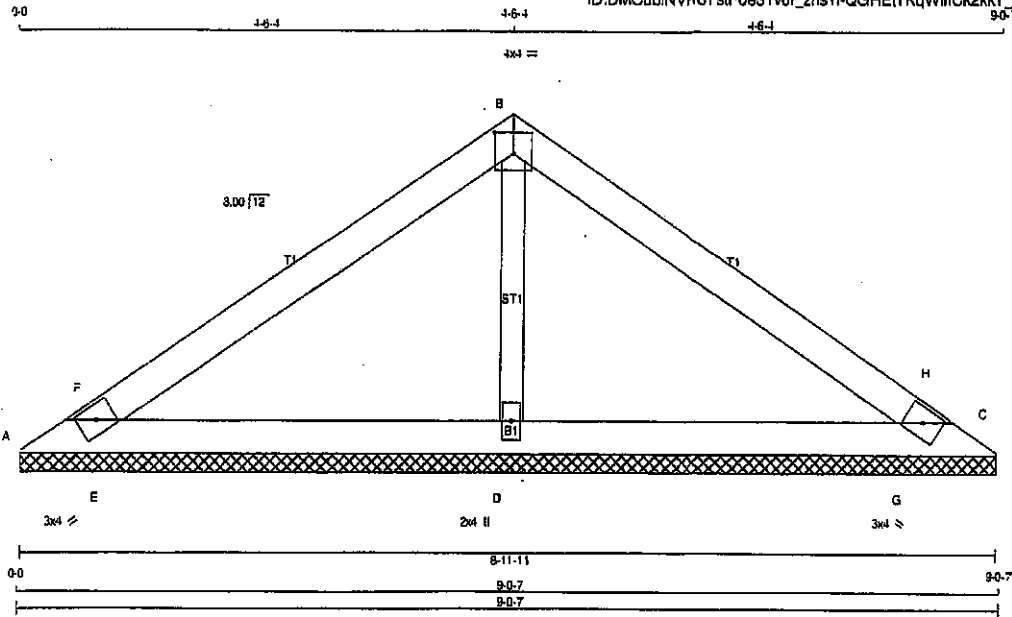

Scale = 1:19.0

TOTAL WEIGHT = 23 lb

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - B	2x4 DRY	No.2	SPF
B - C	2x4 DRY	No.2	SPF
A - C	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TBM1-h	MT20	3.0	4.0		
B	TTW-p	MT20	4.0	4.0	2.25	2.00
C	TBM1-h	MT20	3.0	4.0		
D	BMV1-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
	VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX	IN-SX	IN-SX
A	49	0	49	0	8-11-11	8-11-11	8-11-11	8-11-11
C	49	0	49	0	8-11-11	8-11-11	8-11-11	8-11-11
D	893	0	893	0	8-11-11	8-11-11	8-11-11	8-11-11

UNFACTORED REACTIONS

JT	1ST CASE		MAX/MIN COMPONENT REACTIONS		WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM.LIVE			
A	34	22.0	0.0	0.0	0.0	12.0	0.0
C	34	22.0	0.0	0.0	0.0	12.0	0.0
D	631	415.0	0.0	0.0	0.0	216.0	0.0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, C, D

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	UNBRACED LENGTH (FT)
FR-TO				FR-TO			
A-F	0 347	-91.8	-91.8 0.12 (1)	D-B	-698	0	0.12 (1)
F-B	0 341	-91.8	-91.8 0.23 (1)	E-F	-225	0	0.00 (1)
B-H	0 341	-91.8	-91.8 0.23 (1)	G-H	-225	0	0.00 (1)
H-C	0 347	-91.8	-91.8 0.12 (1)				
A-E	-321	0	-18.5 -18.5 0.16 (1)				
E-D	-290	0	-18.5 -18.5 0.17 (1)				
D-G	-290	0	-18.5 -18.5 0.17 (1)				
G-C	-321	0	-18.5 -18.5 0.16 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.23/1.00 (B-F:1), BC=0.17/1.00 (D-E:1), WB=0.12/1.00 (B-D:1), SSI=0.12/1.00 (A-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1867 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.59 (B) (INPUT = 0.90)
JSI METAL = 0.20 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007620

JOB NAME 408222	TRUSS NAME PB1	QUANTITY 2	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.3.10 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 09:00:02 2020 Page 1
ID:DMCubINVR6TstFoe31v6l zns11-MN1ZkL9C2hoKQk4rKK5mpuqJfFxyLks?nrj2MFIh
8-0-12 8-0-12 9-0-12

Scale = 1:16

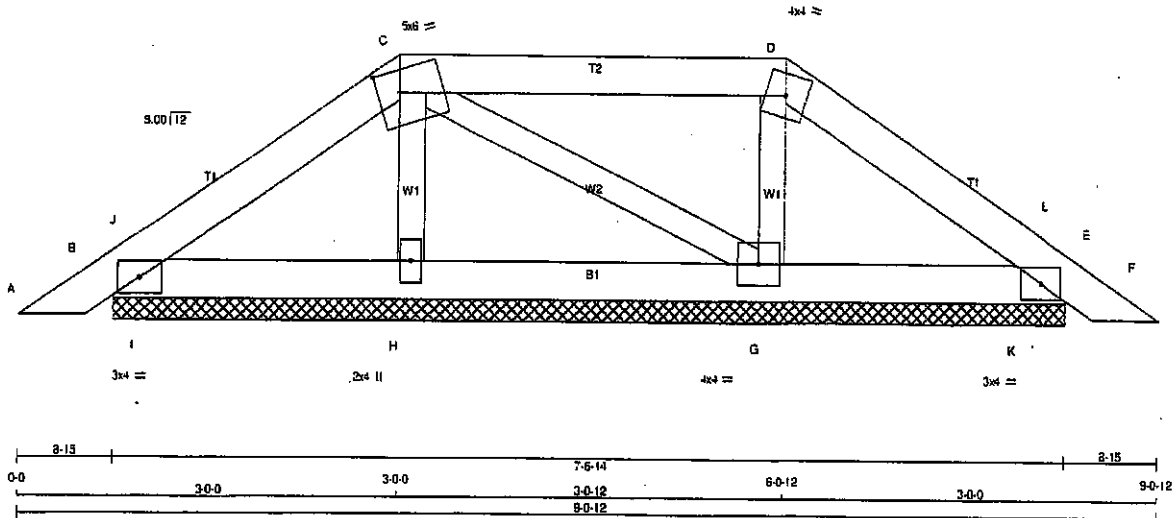

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	DRY	LUMBER
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
B - E	2x4	DRY	No.2
ALL WEBS 2x3 DRY			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	
C	TTWW-m	MT20	5.0	6.0	2.00 2.00
D	TTWW-m	MT20	4.0	4.0	
E	TMB1-I	MT20	3.0	4.0	
G	BMWW1-I	MT20	4.0	4.0	
H	BMWW1-w	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	GROSS REACTION	JT	GROSS REACTION	BRG	BRG	BRG	BRG
B	221 0	221 0	0 0	7-8-14	7-8-14		
E	209 0	209 0	0 0	7-8-14	7-8-14		
H	248 0	248 0	0 0	7-8-14	7-8-14		
G	280 0	280 0	0 0	7-8-14	7-8-14		

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	PERM. LIVE	WIND	DEAD	SOIL
B	154	113 0	0 0	0 0	41 0	0 0
E	146	106 0	0 0	0 0	39 0	0 0
H	178	109 0	0 0	0 0	67 0	0 0
G	198	127 0	0 0	0 0	71 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CS (LC)	MEMB.	FORCE (LBS)	MAX. CS (LC)	UNBRACED LENGTH (FT)
FR-TO				FR-TO			
A-B	0 15	-91.8	-91.8 0.03 (1)	H-C	-176 0	0.03 (1)	10.00
B-J	-63 0	-91.8	-91.8 0.01 (1)	C-G	-21 0	0.00 (1)	6.25
J-C	-75 0	-91.8	-91.8 0.05 (1)	G-D	-198 0	0.03 (1)	6.25
C-D	-30 0	-91.8	-91.8 0.15 (1)	D-J	-121 0	0.00 (1)	6.25
D-L	-54 0	-91.8	-91.8 0.05 (1)	K-L	-123 0	0.00 (1)	6.25
L-E	-41 0	-91.8	-91.8 0.01 (1)				
E-F	0 15	-91.8	-91.8 0.03 (1)				10.00
B-I	0 60	-18.5	-18.5 0.06 (1)				10.00
I-H	0 60	-18.5	-18.5 0.06 (1)				10.00
H-G	0 48	-18.5	-18.5 0.03 (1)				10.00
G-K	0 43	-18.5	-18.5 0.08 (1)				10.00
K-E	0 43	-18.5	-18.5 0.05 (1)				10.00

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.15 (C-D:1), BC=0.08 (B-I:1), WB=0.03 (D-G:1), SS=0.11 (C-D:1)
DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP (DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1658

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.18 (B) INPUT = 0.90
JSI METAL = 0.04 (B) INPUT = 1.00



Structural component only
DWG# T-2007600

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	PB2	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					
Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 26 09:00:03 2020 Page 1					
ID:DMCubiNVR6TgFoe31v6l_zns11-qabxxh92p?wB2ul2D2sKJQC?w31_GPEUzWkKN9zMFIq					

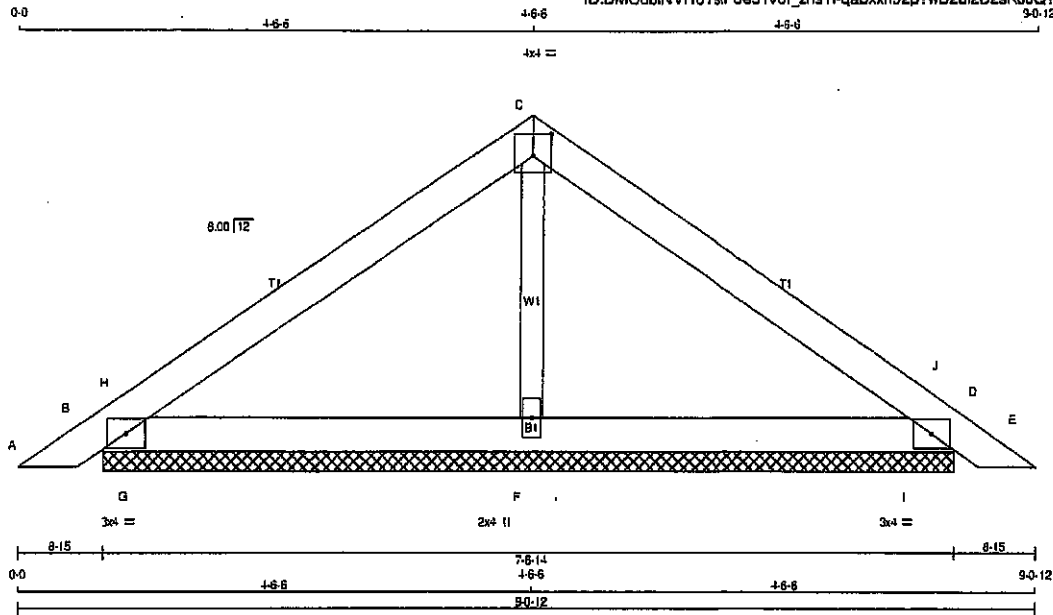

TOTAL WEIGHT = 2 X 23 = 46 lb

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
B - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
SPF			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TM51-I	MT20	3.0	4.0
C	TTW-p	MT20	4.0	4.0 2.25 2.00
D	TM51-I	MT20	3.0	4.0
F	BMW1-w	MT20	2.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	RECORD
JT	VERT	GROSS REACTION	GROSS REACTION	BRG	BRG
B	318	0	318	0	7-8-14
D	318	0	318	0	7-8-14
F	320	0	320	0	7-8-14

UNFACTORED REACTIONS

JT	1ST LOUSE	SNOW	MAX. MIN. COMPONENT REACTIONS	LIVE	PERM. LIVE	WIND	DEAD	SOIL
G	223	159	0	0	0	0	63	0
O	223	159	0	0	0	0	63	0
F	223	137	0	0	0	0	92	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD	LC1 MAX	MEMB.	FORCE (LBS)	MAX	CS1 (LC)
FR-TO				FR-TO			
A-B	0 15	-91.8	-91.8 0.03 (1)	F-C	-148 0	0.03 (1)	
B-H	-31 0	-91.8	-91.8 0.07 (1)	G-H	-349 0	0.00 (1)	
H-C	-135 0	-91.8	-91.8 0.16 (1)	I-J	-349 0	0.00 (1)	
C-J	-135 0	-91.8	-91.8 0.16 (1)				
J-D	-31 0	-91.8	-91.8 0.07 (1)				
D-E	0 15	-91.8	-91.8 0.03 (1)				
B-G	0 105	-18.5	-18.5 0.15 (1)				
G-F	0 105	-18.5	-18.5 0.15 (1)				
F-I	0 105	-18.5	-18.5 0.15 (1)				
I-D	0 105	-18.5	-18.5 0.15 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	8.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

15% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TC=0.16/1.00 (C-J-1), BC=0.15/1.00 (F-I-1), WB=0.03/1.00 (C-F-1), SS=0.26/1.00 (D-I-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	618	354	1687 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.28 (D) INPUT = 0.90
JSI METAL = 0.07 (D) INPUT = 1.00



Structural component only
DWG# T-2007601

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	PB20	4	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:03:56 2020 Page 1
ID:DMCubINVR6TstFos31v6I zns11-6 izPKYM7hrKOxBjFY7B9Jg2AAAFen9gNMkIPVzMEMn

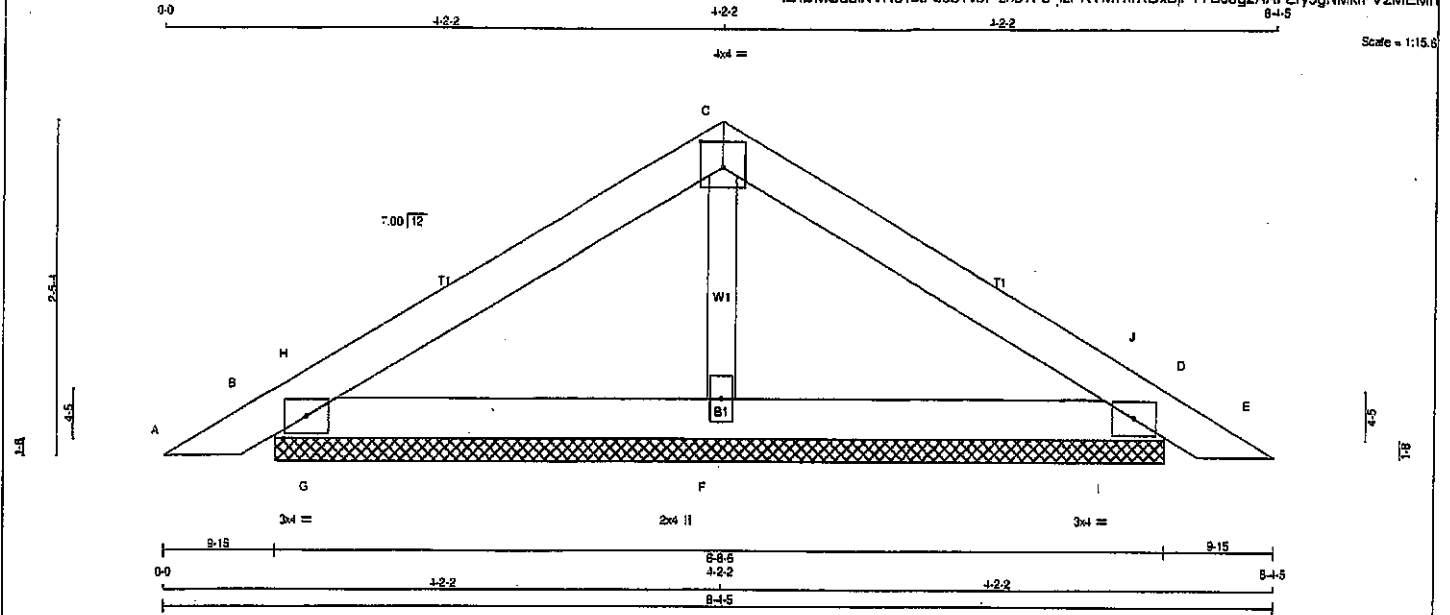

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
B - D	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMB1-J	MT20	3.0	4.0		
C	TTW-p	MT20	4.0	4.0	2.25	2.00
D	TMB1-I	MT20	3.0	4.0		
F	BMW1-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	REQD
GROSS REACTION	GROSS REACTION	BRG	BRG	
JT VERT HORZ	DOWN HORZ UPLIFT	IN-SX	IN-SX	
B	281 0	281 0	0 0	6-8-6
D	281 0	281 0	0 0	6-8-6
F	314 0	314 0	0 0	6-8-6

UNFACTORED REACTIONS

1ST CASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT COMBINED							
B	197	141 0	0 0	0 0	0 0	55 0	0 0
D	197	141 0	0 0	0 0	0 0	55 0	0 0
F	224	137 0	0 0	0 0	0 0	87 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: 14

CHORDS				WEBS			
MEMB.	MAX. FACTORED	FACTORED		MEMB.	MAX. FACTORED	FACTORED	
	FORCE	VERT. LOAD LC1	MAX. (PLP)		FORCE	MAX. (PLP)	
FR-TO	(LBS)	FROM TO	CS1 (LC)	FR-TO	(LBS)	CS1 (LC)	
A-B	0 16	-91.8 -91.8	0.04 (1)	10.00	F-C	-159 0	0.02 (1)
B-H	-44 0	-91.8 -91.8	0.05 (1)	6.25	G-H	-250 0	0.00 (1)
H-C	-98 0	-91.8 -91.8	0.12 (1)	8.25	I-J	-250 0	0.00 (1)
C-J	-98 0	-91.8 -91.8	0.12 (1)	8.25			
J-D	-44 0	-91.8 -91.8	0.05 (1)	6.25			
D-E	0 16	-91.8 -91.8	0.04 (1)	10.00			
B-G	0 81	-18.5 -18.5	0.12 (1)	10.00			
G-F	0 81	-18.5 -18.5	0.12 (1)	10.00			
F-I	0 81	-18.5 -18.5	0.12 (1)	10.00			
I-D	0 81	-18.5 -18.5	0.12 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

15% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD; EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TC=0.12/1.00 (C-H:1), BC=0.12/1.00 (B-G:1),
WB=0.02/1.00 (C-F:1), SS=0.18/1.00 (D-I:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1667 789	1997 1656


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.24 (D) (INPUT = 0.30)
JSI METAL = 0.06 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007627

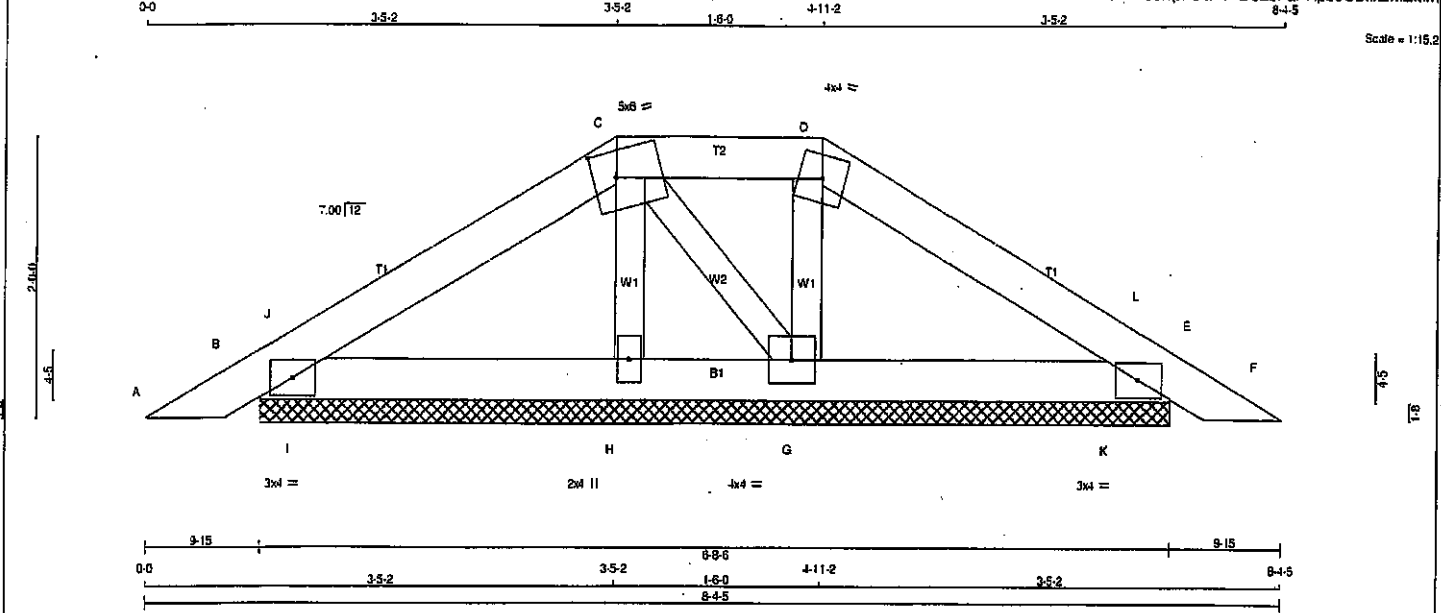

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	No.2
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
B - E	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0		
C	TTWW-m	MT20	5.0	6.0	2.25	2.00
D	TTWW-m	MT20	4.0	4.0		
E	TMB1-I	MT20	3.0	4.0		
G	BMW1-I	MT20	4.0	4.0		
H	BMW1-w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
B	241	0	241	0	0	6-8-6	6-8-6
E	228	0	228	0	0	6-8-6	6-8-6
H	170	0	170	0	0	6-8-6	6-8-6
G	238	0	238	0	0	6-8-6	6-8-6

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
B	169	121.0	0.0	0.0	0.0	48.0	0.0
E	160	114.0	0.0	0.0	0.0	46.0	0.0
H	122	74.0	0.0	0.0	0.0	48.0	0.0
G	168	111.0	0.0	0.0	0.0	57.0	0.0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	MAX. CS (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS (LC)	
FR-TO				FR-TO			
A-B	0 16	-91.8	-91.8 0.04 (1)	H-C	-107 0	0.02 (1)	
B-J	-59 0	-91.8	-91.8 0.01 (1)	C-G	-35 0	0.01 (1)	
J-C	-71 0	-91.8	-91.8 0.07 (1)	G-D	-147 0	0.02 (1)	
C-D	-28 0	-91.8	-91.8 0.04 (1)	I-J	-139 0	0.00 (1)	
D-L	-46 0	-91.8	-91.8 0.07 (1)	K-L	-141 0	0.00 (1)	
L-E	-33 0	-91.8	-91.8 0.01 (1)				
E-F	0 15	-91.8	-91.8 0.04 (1)				
B-I	0 59	-18.5	-18.5 0.07 (1)				
I-H	0 59	-18.5	-18.5 0.07 (1)				
H-G	0 52	-18.5	-18.5 0.04 (1)				
G-K	0 38	-18.5	-18.5 0.07 (1)				
K-E	0 38	-18.5	-18.5 0.07 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.07 1.00 (D-L:1), BC=0.07 1.00 (B-H:1), WB=0.02 1.00 (D-G:1), SS=0.11 1.00 (E-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.19 (B) (INPUT = 0.90)
JSI METAL= 0.05 (D) (INPUT = 1.00)



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	PB22	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 3.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:03:58 2020 Page 1
ID:DMCubINVR6TstFoe31v6l_zns1l-2Mojq?actlS2eFK5Nz9EkmQ2zyGJsPzqgDmTNzMEMI

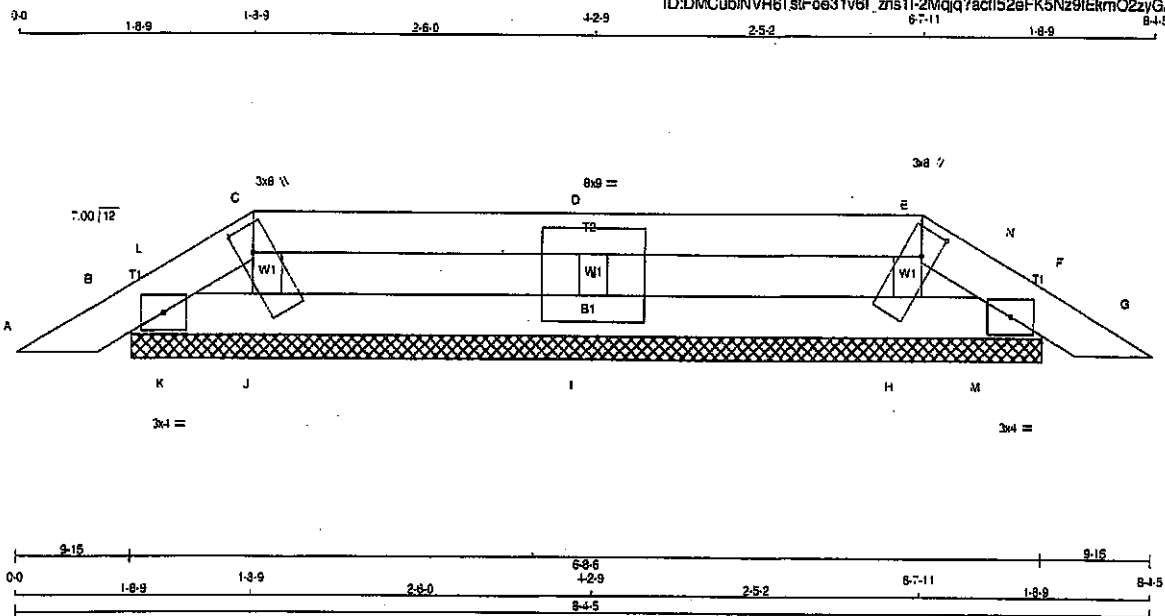

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
B - F	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0		
C	D. E. H. I. J					
C	TTBW1+H	MT20	3.0	8.0	2.25	1.25
D	TMBMW1-I	MT20	8.0	9.0		
E	TTBW1+H	MT20	3.0	8.0	2.25	1.25
F	TMB1-I	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
GROSS REACTION	DOWN	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
B	151	0	151	0
F	152	0	152	0
J	125	0	125	0
H	120	0	120	0
I	330	0	330	0

UNFACTORED REACTIONS	1ST LCASE	MAX-MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW
B	105	83 0
F	105	83 0
J	90	49 0
H	86	47 0
I	232	158 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, F, J, H, I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD LC1 MAX (PLF)	MEMB.	FORCE (LBS)
FR-TO		FROM TO	FR-TO	
A-B	0 16	-91.8 -91.8 0.04 (1)	J-C	-95 0
B-L	-53 0	-91.8 -91.8 0.04 (1)	H-E	-92 0
L-C	-22 0	-91.8 -91.8 0.01 (1)	I-D	-282 0
C-D	0 3	-91.8 -91.8 0.09 (1)	K-L	-1 12
D-E	0 3	-91.8 -91.8 0.09 (1)	M-N	0 13
E-N	-21 0	-91.8 -91.8 0.01 (1)		
N-F	-52 0	-91.8 -91.8 0.04 (1)		
F-G	0 16	-91.8 -91.8 0.04 (1)		
B-K	0 14	-18.5 -18.5 0.01 (1)		
K-J	0 14	-18.5 -18.5 0.02 (4)		
J-I	-3 0	-18.5 -18.5 0.02 (4)		
I-H	-3 0	-18.5 -18.5 0.02 (4)		
H-M	0 14	-18.5 -18.5 0.01 (4)		
M-F	0 14	-18.5 -18.5 0.01 (1)		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, A6C 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.09/1.00 (D-E:1), BC=0.02/1.00 (H:4), WB=0.04/1.00 (D-E:1), SS=0.11/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP (DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.13 (C) (INPUT = 0.90)
JSI METAL = 0.04 (C) (INPUT = 1.00)




Structural component only
DWG# T-2007629

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	GREEN PARK HOMES	DRWG NO.
408223	P20	17	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:03:55 2020 Page 1
ID:DMCubINVR6TstF0e31v6l zns11-an8bC XkMNIUnocWiqbyd66sgmus6Uhw6i76i2zMEMo

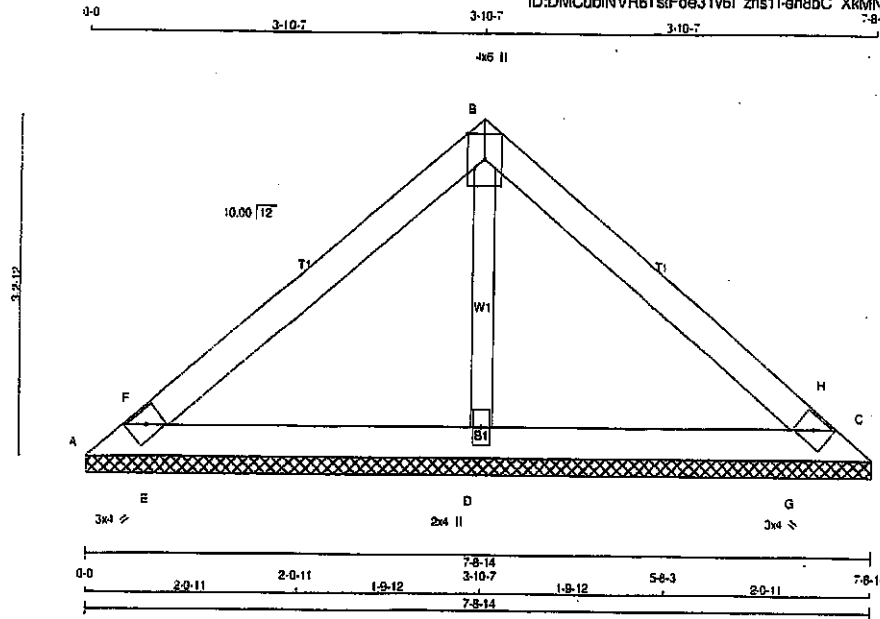

Scale = 1/20"

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER
		A - B	2x4	DRY	No.2
		B - C	2x4	DRY	No.2
		A - C	2x4	DRY	No.2
		ALL WEBS	2x3	DRY	No.2
		DRY: SEASONED LUMBER.			

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
	A	TBM1-h	MT20	3.0	4.0	
	B	TTW-p	MT20	4.0	6.0	Edge
	C	TBM1-h	MT20	3.0	4.0	
	D	BMW1-w	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ
A	60	0	60	0
C	60	0	60	0
D	733	0	733	0

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	43	28	0	0	0	0	14	0
C	42	28	0	0	0	0	14	0
D	518	339	0	0	0	0	179	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, C, D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS (LC)	MAX. UNBRACED LENGTH	WEBS	MAX. FACTORED FORCE (LBS)	MAX. CS (LC)
FR-TO					FR-TO		
A-F	0 227	-91.8	-91.8 0.09 (1)	10.00	D-B	-558 0	0.10 (1)
F-B	0 219	-91.8	-91.8 0.17 (1)	10.00	E-F	-199 0	0.00 (1)
B-H	0 219	-91.8	-91.8 0.17 (1)	10.00	G-H	-199 0	0.00 (1)
H-C	0 228	-91.8	-91.8 0.09 (1)	10.00			
A-E	-207 0	-18.5	-18.5 0.13 (1)	6.25			
E-D	-174 0	-18.5	-18.5 0.13 (1)	6.25			
D-G	-174 0	-18.5	-18.5 0.13 (1)	6.25			
G-C	-207 0	-18.5	-18.5 0.13 (1)	6.25			

TOTAL WEIGHT = 17 X 21 = 363 lb (M)

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.17 (B-F:1), BC=0.13/1.00 (D-E:1), WB=0.10/1.00 (B-D:1), SS=0.11-1.00 (C-G:1)
DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
PLATE GRIP (DRY) SHEAR SECTION (PSI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1657 788 1987 1658


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.29 (D) (INPUT = 0.90)
JSI METAL = 0.12 (D) (INPUT = 1.00)



Structural component only
DWG# T-2007626

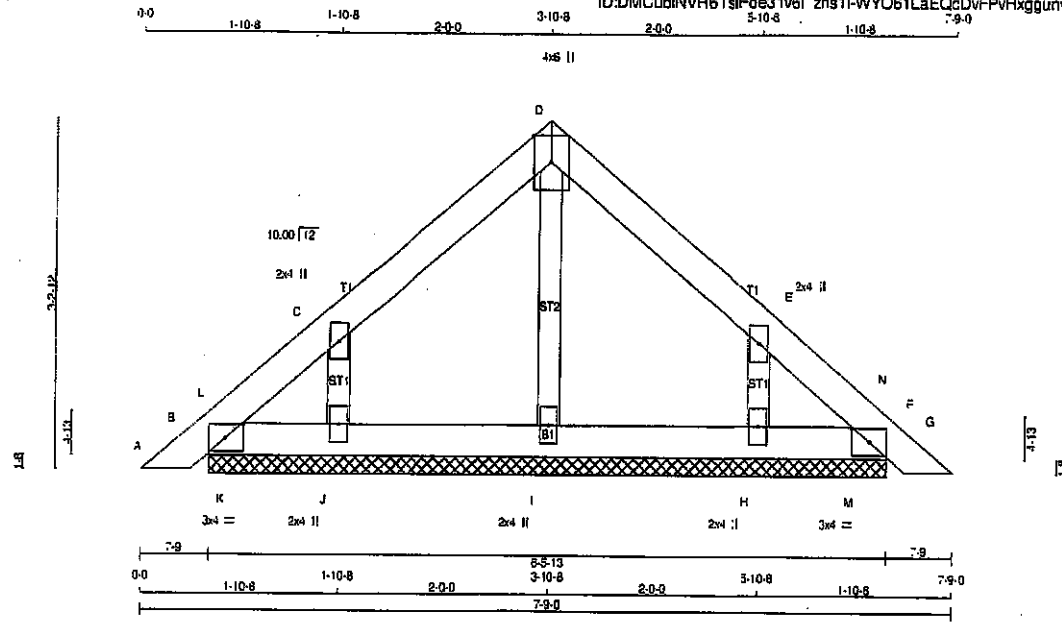

Scale = 1/19.7

LUMBER					
N L G A RULES	CHORDS	SIZE	DRY	LUMBER	DESCR
A - D	2x4	DRY	No.2		SPF
D - G	2x4	DRY	No.2		SPF
B - F	2x4	DRY	No.2		SPF
ALL WEBS	2x3	DRY	No.2		SPF
ALL GABLE WEBS					
	2x3	DRY	No.2		SPF
DRY: SEASONED LUMBER.					
GABLE STUDS SPACED AT 2-0-0 OC.					

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0	1.50	2.00
C	TMW+w	MT20	2.0	4.0		
D	TTW+p	MT20	4.0	6.0	Edge	
E	TMW+w	MT20	2.0	4.0		
F	TMB1-I	MT20	3.0	4.0	1.50	2.00
H, I, J	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	FACTORED LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED LC1 MAX CSI (LC)	UNBRAC LENGTH
FR-TO		FROM TO		FR-TO			
A-B	0 14	-91.8 -91.8 0.02 (1)	10.00	I-D	-111 0	0.02 (1)	
B-L	-71 0	-91.8 -91.8 0.00 (1)	6.25	J-C	-185 0	0.03 (1)	
L-C	-30 0	-91.8 -91.8 0.05 (1)	6.25	H-E	-185 0	0.03 (1)	
C-D	-47 0	-91.8 -91.8 0.05 (1)	6.25	K-L	0 9	0.00 (1)	
D-E	-47 0	-91.8 -91.8 0.05 (1)	6.25	M-N	0 9	0.00 (1)	
E-N	-30 0	-91.8 -91.8 0.05 (1)	6.25				
N-F	-71 0	-91.8 -91.8 0.00 (1)	6.25				
F-G	0 14	-91.8 -91.8 0.02 (1)	10.00				
B-K	0 44	-18.5 -18.5 0.01 (1)	10.00				
K-J	0 44	-18.5 -18.5 0.01 (4)	10.00				
J-I	0 27	-18.5 -18.5 0.02 (4)	10.00				
I-H	0 27	-18.5 -18.5 0.02 (4)	10.00				
H-M	0 44	-18.5 -18.5 0.01 (4)	10.00				
M-F	0 44	-18.5 -18.5 0.01 (1)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
 DL = 6.0 PSF

BOT CH. LL = 0.0 PSF
 DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

165% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.05/1.00 (C-D:1), BC=0.02/1.00 (H-I:4), WB=0.03/1.00 (C-J:1), SS=0.07/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)	(PL)
MAX	MIN	MAX	MIN
MT20	618	354	1667 788 1987 1658


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.14 (E) INPUT = 0.90
 JSI METAL = 0.10 (C) INPUT = 1.00



Structural component only
 DWG# T-2007630

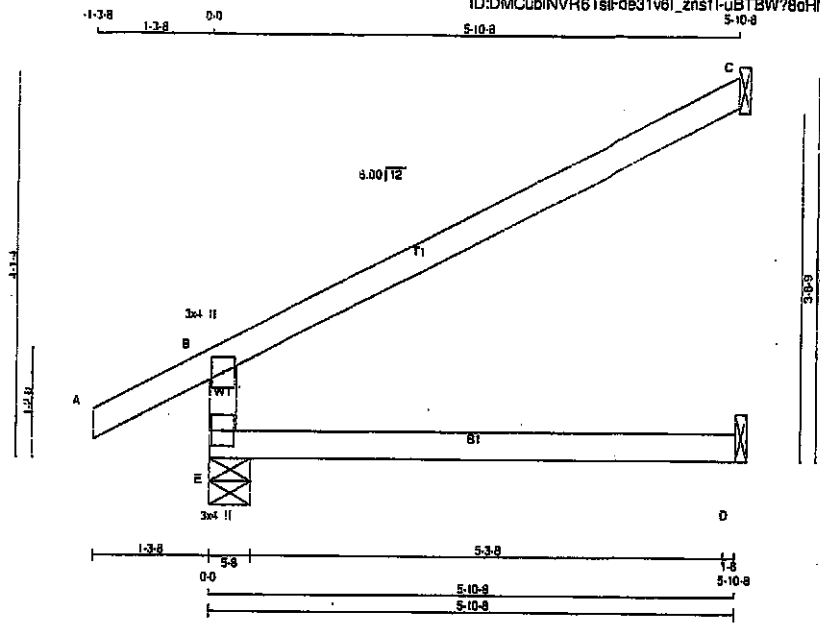

TOTAL WEIGHT = 21 X 17 = 353 lb

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - B	2x4	DRY	No. 2
A - C	2x4	DRY	No. 2
E - D	2x4	DRY	No. 2

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

DESCR.	SPF	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT		VERT	DOWN	UP/LIFT	IN-SX
E	525	0	525	0	5-8
C	202	0	202	0	1-8
D	45	0	50	0	1-8

DESIGN CRITERIA

SPECIFIED LOADS:	TOP CH.	LL	PSF
	LL	=	25.6
	DL	=	6.0
	BOT CH.	LL	= 0.0
		DL	= 7.4
	TOTAL LOAD	=	39.0

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
E	BMV1+p	MT20	3.0	4.0		

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	389	257	0	0	0	0	111	0
C	139	113	0	0	0	0	26	0
D	36	0	0	0	0	0	36	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
 TOTAL LOAD CASES: (4)

MEMB.	CHORDS		FACTORED		WEBS		MAX. FACTORED	
	MAX. FORCE	VERT. LOAD	LC1	MAX. CS1	MEMB. FORCE	MAX. CS1	MAX. FORCE	MAX. CS1
FR-TO								
E-B	-161	0	0.0	0.0	0.13	(4)	7.81	
A-B	0	28	-91.8	-91.8	0.12	(1)	10.00	
B-C	-30	0	-91.8	-91.8	0.54	(1)	6.25	
E-D	0	0	-18.5	-18.5	0.13	(4)	10.00	

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF BCBC 2018, CBC 2012, ABC 2019
 - PART 9 OF CBC 2012, (2019 AMENDMENT)
 - CSA 086-09, CSA 086-14
 - TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
 - OVERHANG NOT TO BE ALTERED OR CUT OFF.
 - 155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
 ALLOWABLE DEFL.(TL) = L/360 (0.20")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CS1: TC=0.54, 1.00 (B-C:1), BC=0.13, 1.00 (D-E:1), WB=0.00, 1.00 (max:0), SS1=0.24, 1.00 (B-C:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)	MAX MIN	MAX MIN	MAX MIN
MT20	618	354	1867	788	1987


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.19 (E), INPUT = 0.90
 JSI METAL=0.13 (B), INPUT = 1.00



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408222	J2S	4	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

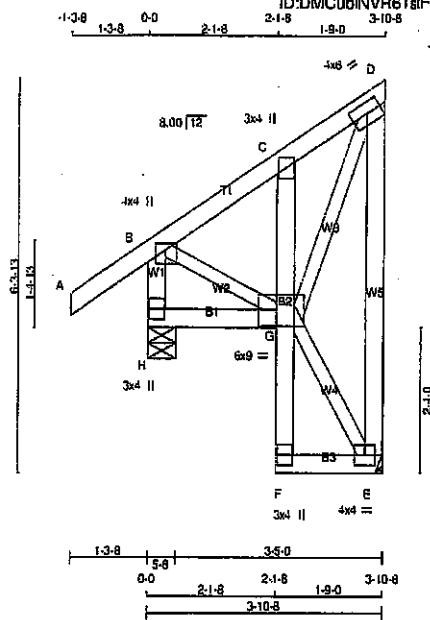

TOTAL WEIGHT = 4 X 31 = 125 lb

LUMBER	N.L.G.A. RULES	CHORDS	SIZE	LUMBER	DESCR.
H - B	2x4	DRY	No.2	SPF	
A - D	2x4	DRY	No.2	SPF	
H - G	2x4	DRY	No.2	SPF	
F - C	2x4	DRY	No.2	SPF	
F - E	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					
E - D	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.25	2.00
C	TMV+p	MT20	3.0	4.0		
D	TMVW-1	MT20	4.0	8.0	2.00	2.75
E	BMVW-1	MT20	4.0	4.0		
F	BMV+p	MT20	3.0	4.0		
G	BMVW-1	MT20	6.0	9.0	3.25	3.50
H	BMV-1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ
H	332	0	332	0
E	208	0	208	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
H	232	166	0	0	0	0	68	0
E	145	95	0	0	0	0	50	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LBS)	MAX. FACTORED HORIZ. LOAD (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED HORIZ. LOAD (LBS)
FR-TO						FR-TO		
H-B	-311	0	0.0	0.0	0.03 (1)	B-G	0	97
A-B	0	35	-91.8	-91.8	0.14 (1)	E-D	-188	0
B-C	-96	0	-91.8	-91.8	0.05 (1)	G-E	-7	0
C-D	-105	0	-91.8	-91.8	0.05 (1)	G-D	0	204
H-G	0	0	-18.5	-18.5	0.03 (1)			
F-G	0	15	0.0	0.0	0.01 (1)			
G-C	-202	0	0.0	0.0	0.01 (1)			
F-E	0	4	-18.5	-18.5	0.01 (1)			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. O.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.19")
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")
ALLOWABLE DEFL. (TL) = L/360 (0.19")
CALCULATED VERT. DEFL. (TL) = L/999 (0.00")

CSI: TC=0.14 (1.00 (A-B:5) .8C=0.03 (1.00 (G-H:4) .WS=0.08 (1.00 (D-E:1) .SSI=0.09 (1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.22 (B) INPUT = 0.50
JSI METAL= 0.07 (C) INPUT = 1.00



Structural component only
DWG# T-2007599

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	J20S	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Tue Apr 28 10:33:51 2020 Page 1
ID=DMCubINVR6TstFoe31v6l_zns1H0v4McUDJ8C2IAIT_X?SGzA59ZPAq_xD41uHHzMEIms

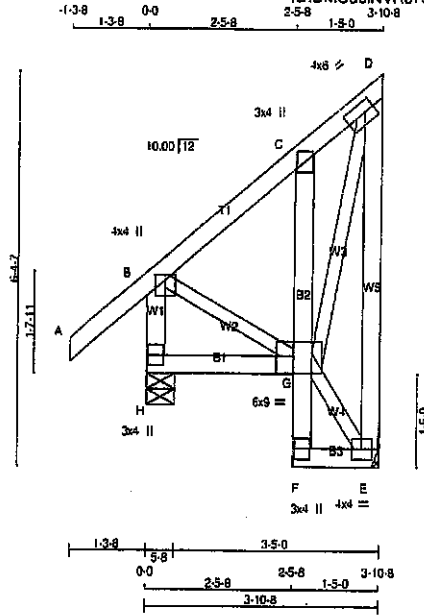

Scale = 1/32"

TOTAL WEIGHT = 2 X 33 = 66 lb [M]

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
H - B	2x4 DRY	No.2	SPF
A - D	2x4 DRY	No.2	SPF
H - G	2x4 DRY	No.2	SPF
F - C	2x4 DRY	No.2	SPF
F - E	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF
EXCEPT			
E - D	2x4 DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (Table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0 1.00 2.00
C	TMV+p	MT20	3.0	4.0
D	TMVW+p	MT20	4.0	8.0 2.00 2.00
E	BMVW1-i	MT20	4.0	4.0
F	BMV+p	MT20	3.0	4.0
G	BMVWW1-i	MT20	6.0	9.0 3.25 3.50
H	BMV1+p	MT20	3.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
JT	VERT	HORZ	MECHANICAL
H	333	0	333
E	206	0	206

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

1ST CASE		MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
H	233	166 0	0 0	0 0	0 0	67 0	0 0
E	145	95 0	0 0	0 0	0 0	50 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CS1 (LC)
FR-TO			
H-B	-309	0.0	0.03 (1)
A-B	0	-91.8	-91.8 0.14 (5)
B-C	-70	-91.8	-91.8 0.07 (1)
C-D	-92	-91.8	-91.8 0.06 (1)
H-G	0	-18.5	-18.5 0.04 (4)
F-G	0	0.0	0.0 0.02 (1)
G-C	-215	0.0	0.0 0.02 (1)
F-E	0	-18.5	-18.5 0.01 (4)

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. G.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.18")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.18")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B-5), BC=0.04/1.00 (G-H-4), WB=0.08/1.00 (D-E-1), SS=0.09/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.24 (B) (INPUT = 0.90)
JSI METAL = 0.06 (C) (INPUT = 1.00)



Structural component only
DWG# T-2007623

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	J21	4	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 10:03:53 2020 Page 1
ID:DMCubINVR6TslFoe31v6l_zns1KhP0qnIWUqmTmXUS8aPZUYh3VGyCuebnDgOW?oAzMEMo

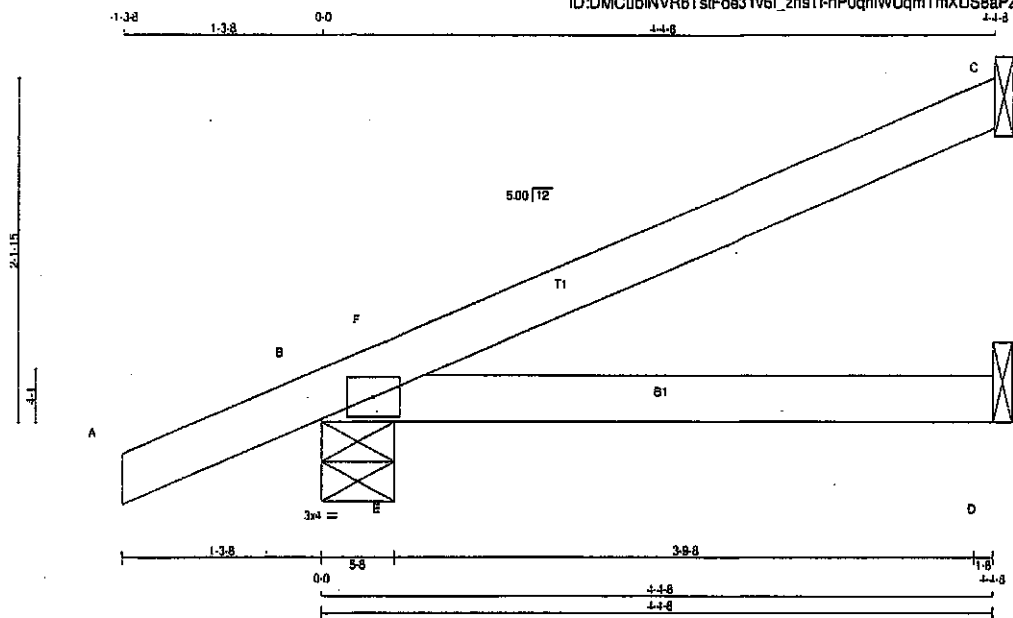

TOTAL WEIGHT = 4 X 12 = 48 lb

LUMBER	CHORDS	SIZE	DRY	LUMBER	DESCR.
N. L. G. A. RULES	A - C	2x4	DRY	No.2	SPF
	B - D	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
	B	TMB1-I	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED	MAXIMUM FACTORED	INPUT	RECORD
	GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	UPLIFT
			IN-SX	IN-SX
C	175	0	175	0
B	365	0	365	0
D	67	0	67	0

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS	1ST LCASE	MAX. MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW LIVE PERM. LIVE WIND DEAD SOIL
C	121	94 0 0 0 0 0 0 0 0 0 0
B	256	181 0 0 0 0 0 0 0 0 0 0
D	50	18 0 0 0 0 0 0 0 0 0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) C, B

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD LC1 MAX (PLF)	MEMB. FORCE (LBS)	MAX. FORCE (LBS)
		FROM TO		
FR-TO			FR-TO	
A-B	0 23	-91.8 -91.8 0.12 (1)	10.00	0.00 (1)
B-F	-17 13	-91.8 -91.8 0.04 (4)	6.25	
F-C	-1 2	-91.8 -91.8 0.23 (1)	10.00	
B-E	0 0	-18.5 -18.5 0.18 (1)	10.00	
E-D	0 0	-18.5 -18.5 0.18 (1)	10.00	

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TC=0.23/1.00 (C-F:1), BC=0.16/1.00 (D-E:1), WB=0.00/1.00 (E-F:1), SSI=0.19/1.00 (B-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.26 (B) (INPUT = 0.90)
JSI METAL = 0.07 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007624

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408223	J22	3	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 3.310 5 Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:03:54 2020 Page 1

ID:DMCubINVR6TstFoe31v8l zns1l-AbaD eX6b3bd9e1K8744ubgtMZPN21Nv2FYKczMEMp

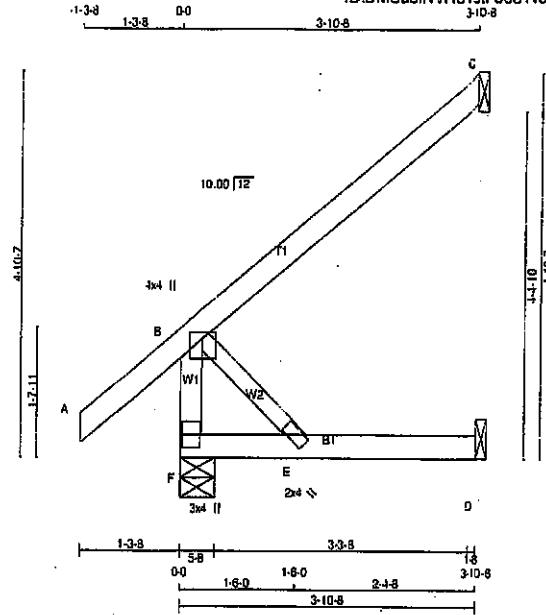

Scale = 1/2" = 1'-0"

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
F - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
F - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W.	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.00 2.00
E	BMV+w	MT20	2.0	4.0	
F	BMV1+p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG
F	341 0	341 0	5-8
C	178 0	178 0	1-8
D	36 0	40 0	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS							
JT	1ST CASE	MAX. MIN.	COMPONENT REACTIONS	PERM LIVE	WIND	DEAD	SOIL
F	239	170 0	0 0	0 0	0 0	89 0	0 0
C	122	99 0	0 0	0 0	0 0	23 0	0 0
D	29	0 0	0 0	0 0	0 0	29 0	0 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED LC1 (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (LBS)	FACTORED LC1 (LBS)
F-B	-305 0	0 0	0.03 (1)	F-E	0 0	0.00 (1)	
A-B	0 31	-91.8 -91.8	0.14 (5)				
B-C	0 0	-91.8 -91.8	0.23 (1)				
F-E	0 0	-18.5 -18.5	0.08 (4)				
E-D	0 0	-18.5 -18.5	0.08 (4)				

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24" IN CC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 085-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.23(1.00 (B-C:1) , BC=0.08(1.00 (D-E:4) , WB=0.00(1.00 (B-E:1) , SS=0.11 1.00 (B-C:1)

DOIL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1687 788 1987 1655

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.24 (B) (INPUT = 0.90)
JSI METAL = 0.06 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007625

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	J40	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:19:52 2020 Page 1
ID:DMCubINVR6TstFoe31v6l, zns11-6uTN2C71 PHh5sGSGJGMvwHM_XXOqKBNC5JFy4zME7r

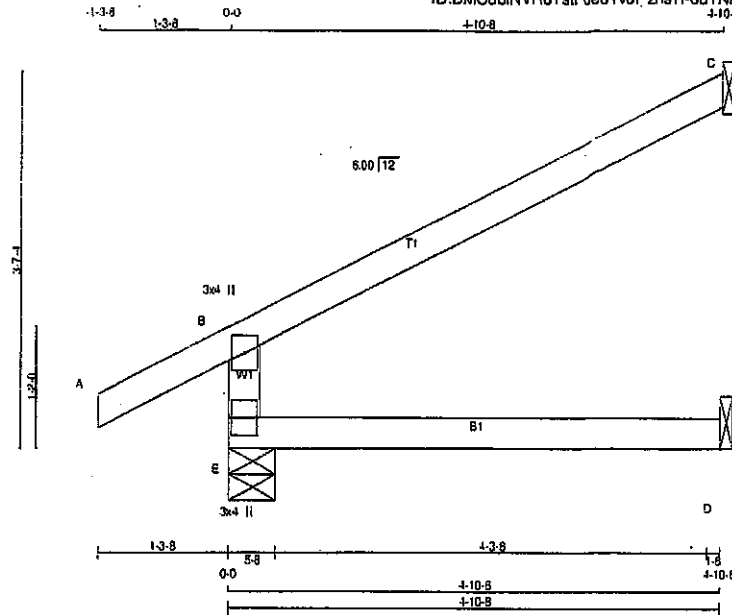

TOTAL WEIGHT = 2 X 14 = 28 lb

LUMBER		
N. L. G. A. RULES	SIZE	LUMBER
CHORDS	2x4	No.2
E - B	2x4	DRY
A - C	2x4	DRY
E - D	2x4	DRY

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0
E	BMV1+p	MT20	3.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
		GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	UP	IN-SX
E	456	0	456	0	5-8
C	168	0	168	0	1-8
D	38	0	42	0	1-8

SEE MITEK STANDARD DETAIL 897791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LOASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	320	225	0	0.0	0.0	0.0	95	0.0
C	116	94	0	0.0	0.0	0.0	22	0.0
D	30	0	0	0.0	0.0	0.0	30	0.0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO		FR-TO			
E-B	-404	0	0.0	0.0	0.09 (4)	7.81	
A-B	0	28	-91.8	-91.8	0.12 (1)	10.00	
B-C	-25	0	-91.8	-91.8	0.37 (1)	6.25	
E-D	0	0	-18.5	-18.5	0.09 (4)	10.00	

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

155% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.19")
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")
ALLOWABLE DEFL. (TL) = L/360 (0.19")
CALCULATED VERT. DEFL. (TL) = L/999 (0.02")

CSI: TC=0.37 (B-C:1), BC=0.09 (1.00 (D-E:1), WB=0.00 (1.00 (n.a.)), SS=0.20 (1.00 (B-C:1))

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PL)		(PL)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	618	354	1667	788	1987	1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.17 (E) (INPUT = 0.90)
JSI METAL = 0.11 (B) (INPUT = 1.00)




Structural component only
DWG# T-2007657

JOB NAME 408224	TRUSS NAME J41	QUANTITY 5	PLY 1	JOB DESC. GREEN PARK HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 5 Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:19:54 2020 Page 1
ID:DMCubINVR6TstFoe3iv6l zns11-3H-b7Tu8HW1XPKAQqNkLq LmMLemIEhgtPoM1zzME7p

Scale = 1:17.6

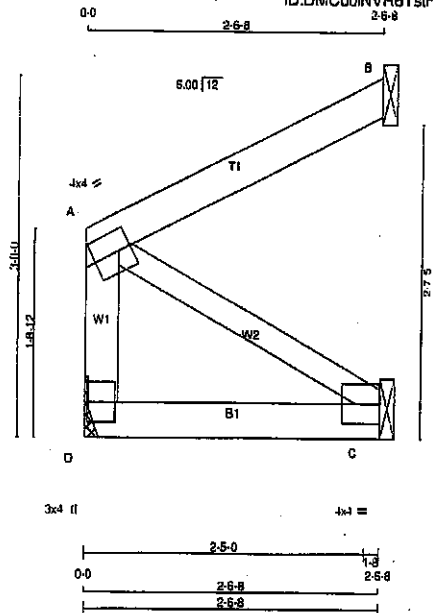

TOTAL WEIGHT = 5 X 10 = 49 lb

LUMBER				DESCR.	
N. L. G. A. RULES	CHORDS	SIZE	LUMBER		
D - A	2x4	DRY	No.2	SPF	
A - B	2x4	DRY	No.2	SPF	
D - C	2x4	DRY	No.2	SPF	
ALL WEBS 2x3 DRY No.2				SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
A - TMVW-1	MT20	4.0	4.0	2.00	1.25
C - BMW1-t	MT20	4.0	4.0	2.00	Edge
D - BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	HORZ	GROSS REACTION	DOWN	HORZ	BRG	BRG	IN-SX	IN-SX
D	139	0	139	0	0	1-8	1-8	1-8	1-8
B	117	0	117	0	0	1-8	1-8	1-8	1-8
C	23	0	25	0	0	1-8	1-8	1-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) B, C

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
D	98	85	0	0	0	33	0
B	80	65	0	0	0	15	0
C	18	0	0	0	0	18	0

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		MAX.		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (PLF)	CS1 (LC)	UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX (LBS)	CS1 (LC)
FR-TO		FROM	TO			FR-TO			
D-A	-117	0	0.0	0.0	0.01 (1)	7.81	A-C	0	0.00 (1)
A-B	0	0	-91.8	-91.8	0.10 (1)	10.00			
D-C	0	0	-18.5	-18.5	0.03 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

.55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CS1: TC=0.10/1.00 (A-B:1), BC=0.03/1.00 (C-D:4),
WB=0.00/1.00 (A-C:1), SS=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MAX	MIN	MAX
MT20	618	354
	1587	788
	1987	1658

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.07 (A) (INPUT = 0.90)
JSI METAL = 0.02 (A) (INPUT = 1.00)



Structural component only
DWG# T-2007658

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	J42	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 10:19:55 2020 Page 1
ID:DMCubINVR6TstFoe31v6I zns1I-XTBWgE9vHKIGyK?1xSq3XYumIX 1hxqu3YvZPzME7c

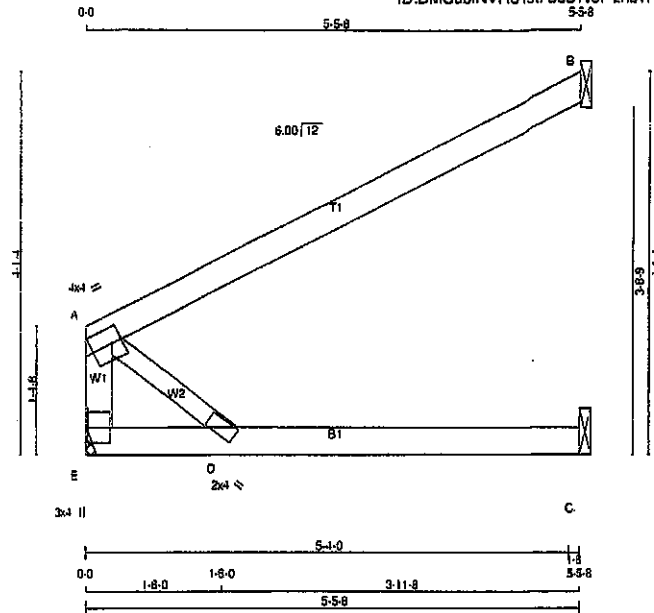

Scale = 1/22.5

TOTAL WEIGHT = 2 X 16 = 31 lb

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - A	2x4	DRY	No.2
A - B	2x4	DRY	No.2
E - C	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-1	MT20	4.0	4.0	2.00 1.25
D	BMVW-w	MT20	2.0	4.0	
E	BMV1-p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQ'D
JT	GROSS REACTION	GROSS REACTION	DOWN	UP	BRG
E	301	0	301	0	0
B	250	0	250	0	0
C	50	0	57	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

SEE MITEK STANDARD DETAIL 897791H FOR CONNECTION TO JOINTS B & C

UNFACTORED REACTIONS		1ST CASE	MAX. MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE
E	213	140	0
B	172	140	0
C	40	0	0

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)
CHORDS		WEBS
MEMB.	FORCE (LBS)	MAX. FACTORED
FR-TO	FROM TO	CS (LC)
E-A	-250 0	0.0 0.0 0.03 (1)
A-B	0 0	-91.8 -91.8 0.46 (1)
E-D	0 0	-18.5 -18.5 0.13 (4)
D-C	0 0	-18.5 -18.5 0.16 (4)

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 085-09, CSA 085-14
- TPIC 2011, TPIC 2014

55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CS: TC=0.46/1.00 (A-B:1), SC=0.16/1.00 (C-D:4), WB=0.00/1.00 (A-D:1), SS=0.17/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 818 354 1667 788 1987 1658

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.15 (A) (INPUT = 0.90)
JSI METAL = 0.04 (A) (INPUT = 1.00)




Structural component only
DWG# T-2007659

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C40	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 3 Oct 29 2019 Mitak Industries, Inc. Tue Apr 28 10:19:42 2020 Page 1
ID:DMCubINVR6TstFoe31v6I zns11-Pzsbv07ILL16uKVXgD50VpshpV5QUojvXujdfzME8?

Scale = 1:17.9

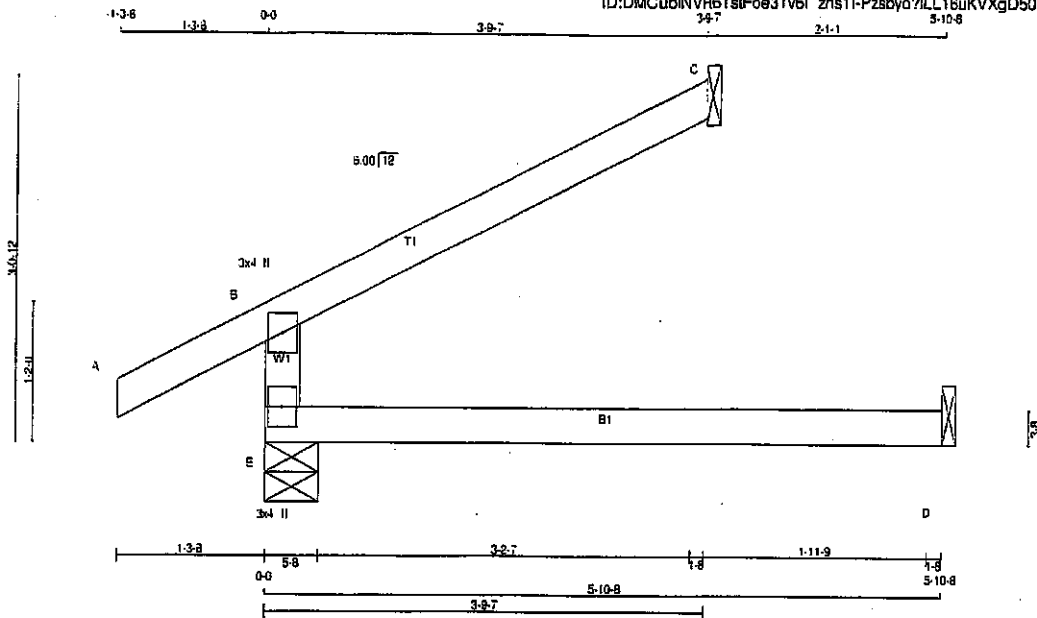

TOTAL WEIGHT = 2 X 14 = 28 lb
(M)

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	DRY	LUMBER
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

DESCR.
SPF
SPF
SPF

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED		MAXIMUM FACTORED		INPUT	RECORD
	GROSS REACTION	GROSS REACTION	DOWN	UP		
E	405	0	405	0	5-8	5-8
C	130	0	130	0	1-8	1-8
D	45	0	50	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE	MAX. MIN. COMPONENT REACTIONS						
	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	
E	288	190	0	0	0	0	96	0
C	90	73	0	0	0	0	17	0
D	36	0	0	0	0	0	36	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB. FR-TO	MAX. FORCE (LBS)	FACTORED MAX CSI (LC)
FR-TO		FROM TO					
E-B	-342 0	0.0 0.0	0.13 (4)	7.81			
A-B	0 28	-91.8 -91.8	0.12 (1)	10.00			
B-C	-19 0	-91.8 -91.8	0.22 (1)	6.25			
E-D	0 0	-18.5 -18.5	0.13 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.20")
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")
ALLOWABLE DEFL. (TL) = L/360 (0.20")
CALCULATED VERT. DEFL. (TL) = L/999 (0.03")

CSI: TC=0.22/1.00 (B-C:1), BC=0.13/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.15/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP (DRY)	SHEAR	SECTION
(PSI)	(PL)	(PL)
MAX	MIN	MAX
618	354	1657
788	1987	1658

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.14 (E) INPUT = 0.90
JSI METAL = 0.09 (B) INPUT = 1.00



Structural component only
DWG# T-2007648

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C42	3	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington		TRUSS DESC.		Version 8.310 5 Oct 20 2019 Mittek Industries, Inc. Tue Apr 28 10:19:45 2020 Page 1	

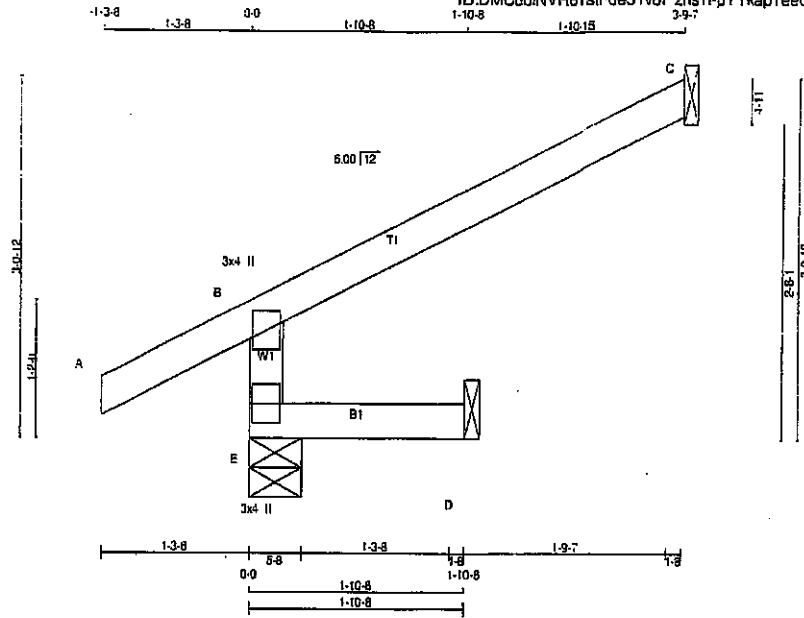

TOTAL WEIGHT = 3 X 10 = 29 lb
(A)

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMV+p	MT20	3.0	4.0
E	BMV1+p	MT20	3.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
	GROSS REACTION		GROSS REACTION		BRG		BRG	
E	361	0	361	0	5-8		5-8	
C	130	0	130	0	1-8		1-8	
D	16	0	17	0	1-8		1-8	

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST CASE		MAX. MIN. COMPONENT REACTIONS				WIND	DEAD	SOIL
	COMBINED	SNOW	LIVE	PERM. LIVE	UNBRAC	LENGTH			
E	250	190	0	0	0	0	0	60	0
C	90	73	0	0	0	0	0	17	0
D	12	0	0	0	0	0	0	12	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

MEMB.	CHORDS		WEBS			
	MAX. FACTORED	FACTORED	MAX. FACTORED	FACTORED	MAX. FACTORED	FACTORED
	FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED (LBS)	MAX. FACTORED (LBS)	MAX. FACTORED (LBS)	MAX. FACTORED (LBS)
FR-TO		FROM TO				
E-B	-342	0	0.0	0.0	0.01 (4)	7.81
A-B	0	28	-91.8	-91.8	0.13 (5)	10.00
B-C	-19	0	-91.8	-91.8	0.22 (1)	6.25
E-D	0	0	-18.5	-18.5	0.02 (4)	10.00

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 088-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.22(1.00) (B-C:1), BC=0.02(1.00) (D-E:4),
WB=0.00(1.00) (A-B:3), SSI=0.15(1.00) (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PS)	(PL)	(PL)	(PL)
MAX	MIN	MAX	MIN
MT20	818	354	1687
	728	1987	1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.14 (E) INPUT = 0.90
JSI METAL = 0.09 (B) INPUT = 1.00



Structural component only
DWG# T-2007650

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C43	3	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

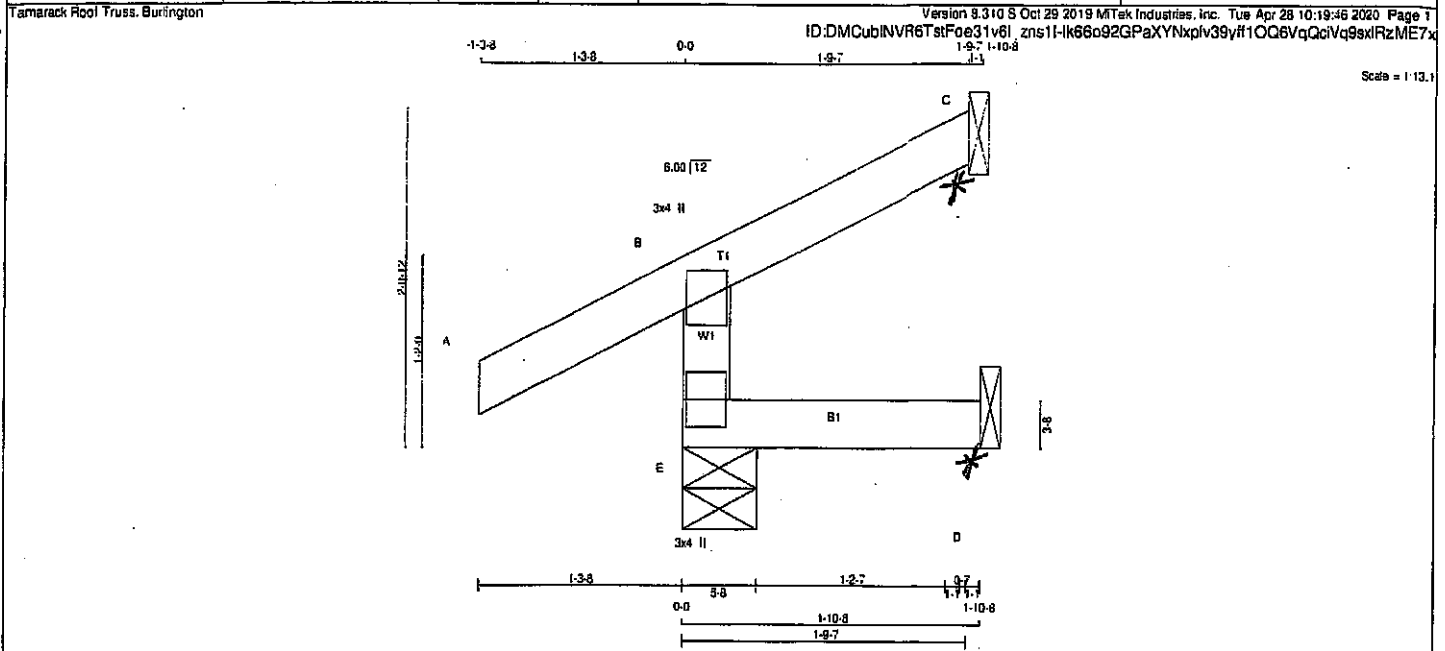

TOTAL WEIGHT = 3 X 7 = 21 lb

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			SPF
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y
B	TMV+P	MT20	3.0	4.0	
E	BMV1+P	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED		MAXIMUM FACTORED		INPUT		REQD	
GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	271	0	271	0	0	5-8	5-8
C	45	0	45	0	-23	1-8	1-8
D	8	0	17	0	-2	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS. FACTORED UPLIFT
PROVIDE ANCHORAGE AT BEARING JOINT D FOR 150 LBS. FACTORED UPLIFT

UNFACTORED REACTIONS		MAX. MIN. COMPONENT REACTIONS					
JT	1ST CASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD
E	188	141	0	0	0	0	47
C	31	24	-18	0	0	0	7
D	7	0	-8	0	0	0	12

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (LBS)	LC1 MAX (PLP)	MAX. (LC)	UNBRAC	MEMB.	FORCE (LBS)
FR-TO					LENGTH FR-TO		
E-B	-244	0	0.0	0.0	0.04 (5)	7.81	
A-B	0	28	-91.8	-91.8	0.12 (1)	10.00	
B-C	-17	0	-91.8	-91.8	0.09 (1)	6.25	
E-D	0	0	-18.5	-18.5	0.04 (5)	10.00	

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.8 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.12(1.00 (A-B:1), BC=0.04(1.00 (D-E:5), WB=0.00(1.00 (A-B:1), SS=0.09(1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.10 (E) (INPUT = 0.90)
JSI METAL= 0.07 (B) (INPUT = 1.00)



Structural component only
DWG# T-2007651

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C44	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Tue Apr 28 10:19:47 2020 Page 1
ID:DMCubINVR6TstFoe31y6I_zns1l-mxgU7V3uA8P_5OUTmhBCsZXYYWqD93ye2pcUHzME7w

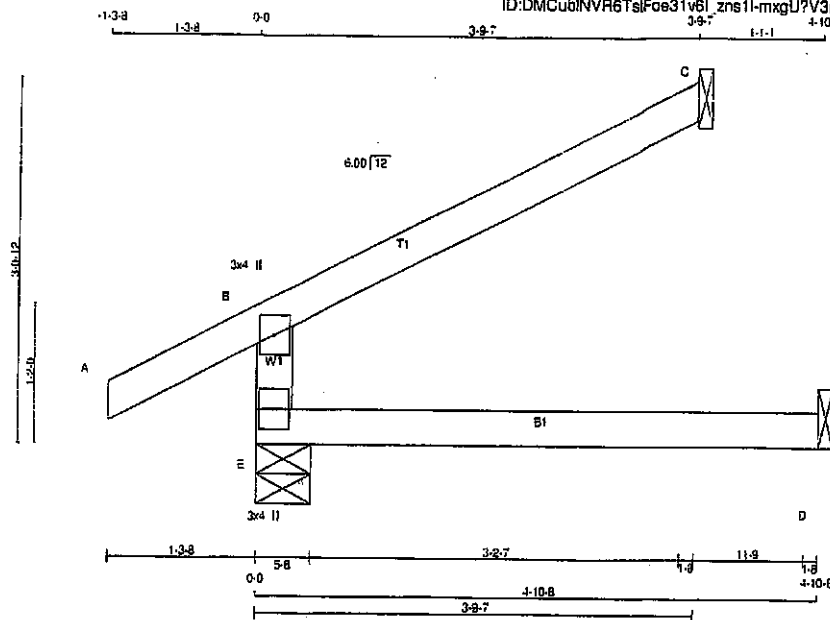

TOTAL WEIGHT = 2 X 13 = 26 lb

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMV+p	MT20	3.0	4.0
E	BMV1+p	MT20	3.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	BRG	BRG
E	394	0	394	0	0	5-8	5-8		
C	130	0	130	0	0	1-8	1-8		
D	38	0	42	0	0	1-8	1-8		

SEE MITEK STANDARD DETAIL B97791 H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS		1ST CASE		MAX. MIN. COMPONENT REACTIONS		LIVE		PERM. LIVE		WIND		DEAD		SOIL	
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	COMBINED
E	277	190	0	0	0	0	0	87	0	0	0	0	0	0	0
C	90	73	0	0	0	0	0	17	0	0	0	0	0	0	0
D	30	0	0	0	0	0	0	30	0	0	0	0	0	0	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		W E B S		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD LC1 (PLF)	MAX. CSI (LC)	MAX. UNBRACED LENGTH FR-TO	MEMB.	FORCE (LBS)	MAX. CSI (LC)
FR-TO							
E-B	-342	0	0.0	0.08 (4)	7.81		
A-B	0	28	-91.8	-91.8 0.12 (1)	10.03		
B-C	-19	0	-91.8	-91.8 0.22 (1)	8.25		
E-D	0	0	-18.5	-18.5 0.09 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.02")

CSI: TC=0.22/1.00 (B-C:1), BC=0.09/1.00 (D-E:4), WB=0.00/1.00 (max:0), SSI=0.15/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1867 788 1987 1856

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.14 (E) INPUT = 0.90 ;
JSI METAL= 0.09 (B) INPUT = 1.00 ;



Structural component only
DWG# T-2007652

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C45	2	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:19:48 2020 Page 1
ID:DMCubINVR6TstFoe31v6l_zns1l-E7DsCr3WxBnFcFyg1UCQI46kwwAMuWC0HTL1pJzME7v

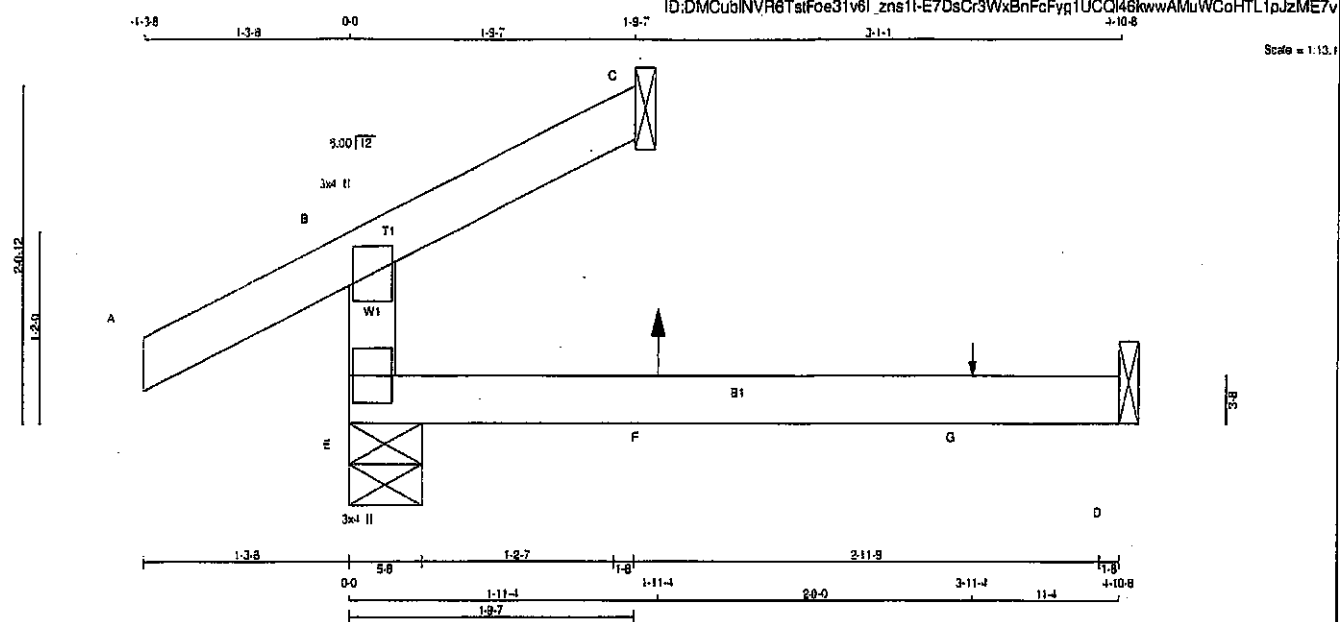

TOTAL WEIGHT = 2 X 10 = 21 lb

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y
B	TMV+p	MT20	3.0	4.0	
E	BMV1+p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED		MAXIMUM FACTORED		INPUT		REQD	
GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	282	0	282	0	0	5-8	5-8
C	55	0	55	0	0	1-8	1-8
D	35	0	44	0	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LOASE	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	198	137	0	0	0	61	0
C	39	21	0	0	0	18	0
D	29	0	4	0	0	31	0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (7)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CS1 (LC)	MEMB.	FORCE (LBS)	MAX. CS1 (LC)	
FR-TO		FROM	TO	FR-TO		FROM	TO
E-B	-235	0	0.0	0.0	0.0	0.0	7.81
A-B	0	28	-91.8	-91.8	0.12	(1)	10.00
B-C	-13	5	-91.8	-91.8	0.07	(5)	6.25
E-F	0	0	-18.5	-18.5	0.10	(4)	10.00
F-G	0	0	-18.5	-18.5	0.10	(4)	10.00
G-D	0	0	-18.5	-18.5	0.10	(4)	10.00

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
F	1-11-4	7	1	12	BACK	VERT	TOTAL	---	C1
G	3-11-4	1	1	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
DL	=	6.0	PSF	
BOT CH.	LL	=	0.0	PSF
DL	=	7.4	PSF	
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")

CALCULATED VERT. DEFL.(LL) = L/999 (0.00")

ALLOWABLE DEFL.(TL) = L/360 (0.19")

CALCULATED VERT. DEFL.(TL) = L/999 (0.02")

CS1: TC=0.12/1.00 (A-B:1) , BC=0.10/1.00 (D-E:4) ,

WB=0.00/1.00 (m/a:3) , SS1=0.09/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION

(PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN

MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.10 (E) INPUT = 0.90

JSI METAL= 0.07 (B) INPUT = 1.00




Structural component only
DWG# T-2007653

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C46	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 10:19:49 2020 Page 1
ID:DMCubINVR6TstFoe31v6i zns1f-iJnEQB48hLv6EPXtaBifH-HuKKVjdZSxW75oLizME7u

Scale = 1:18.2

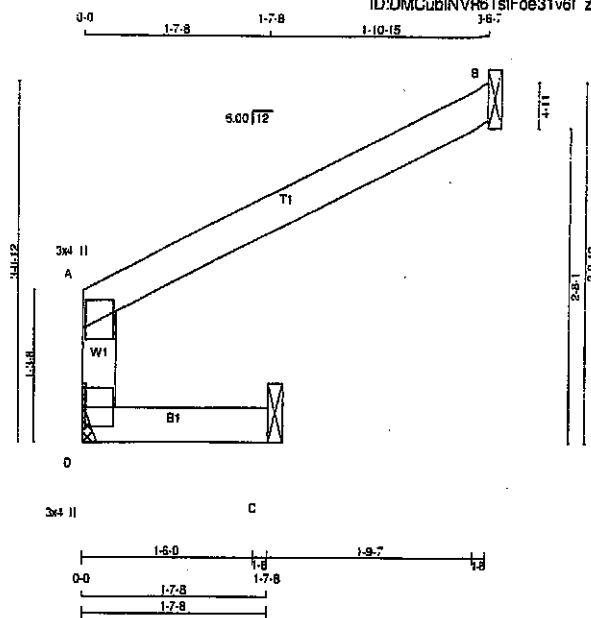

LUMBER			
N.L.G.A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
D - A	2x4	DRY	No.2
A - B	2x4	DRY	No.2
D - C	2x4	DRY	No.2

SPF

DRY, SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMV+p	MT20	3.0	4.0	
D	BMV1+p	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS					
JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	RECORD	
	VERT	HORZ	DOWN	HORZ	UPLIFT
D	156	0	156	0	0
B	144	0	144	0	0
C	55	0	55	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

SEE MITEK STANDARD DETAIL 897791H FOR CONNECTION TO JOINT(S) B, C.

UNFACTORED REACTIONS							
JT	1ST CASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD
D	109	78	0	0	0	0	31
B	99	80	0	0	0	0	19
C	40	23	0	0	0	0	17

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED (LC)	
FR-TO		FROM	TO	FR-TO		FROM	TO
D-A	-181	0	0.0	0.0	0.08	(1)	7.81
A-B	-8	0	-91.8	-91.8	0.14	(1)	10.00
D-C	0	0	-18.5	-18.5	0.09	(1)	10.00

TOTAL WEIGHT = 7 lb

(M/F)

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.8	PSF
DL	=	8.0	PSF	
BOT CH.	LL	=	0.0	PSF
DL	=	7.4	PSF	
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 086-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B:1), BC=0.09/1.00 (C-D:1), WB=0.00/1.00 (n/a:0), SS=0.13/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (D) INPUT = 0.80
JSI METAL = 0.05 (A) INPUT = 1.00



Structural component only
DWG# T-2007654


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
408224	C47	1	1	GREEN PARK HOMES	
Tamarack Roof Truss, Burlington					

Tamarack Roof Truss, Burlington

ID:DMCubINVR6TstFoe31v6l zns11-AWLddX5mSo1zrY638uEuqVB5eks7MQi5knq8uCzME7

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 23 10:19:50 2020 Page 1

Scale = 1:13.1

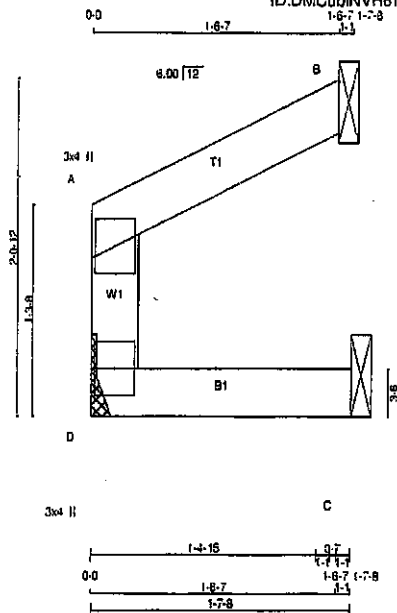

TOTAL WEIGHT = 5 lb

LUMBER				DESCR.	
N. L. G. A. RULES	SIZE	DRY	No.2	SPF	SPF
CHORDS					
D - A	2x4	DRY	No.2	SPF	SPF
A - B	2x4	DRY	No.2	SPF	SPF
D - C	2x4	DRY	No.2	SPF	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	3.0	4.0		
D	BMV1+p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED		MAXIMUM FACTORED		INPUT		REQD	
GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
D	86	0	86	0	0	MECHANICAL	
B	67	0	67	0	0	1-8	1-8
C	19	0	19	0	0	1-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINTS B & C

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
D	81	39 0	0 0	0 0	0 0	21 0	0 0
B	48	37 0	0 0	0 0	0 0	9 0	0 0
C	14	2 0	0 0	0 0	0 0	12 0	0 0

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)	
FR-TO				FR-TO			
D-A	-74 0	0.0	0.0 0.01 (1)	7.81			
A-B	-2 0	-91.8	-91.8 0.03 (1)	10.00			
D-C	0 0	-18.5	-18.5 0.01 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

155 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.19")
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")
ALLOWABLE DEFL. (TL) = L/360 (0.19")
CALCULATED VERT. DEFL. (TL) = L/999 (0.00")

CSI: TO=0.03, 1.00 (A-B:1), BC=0.01, 1.00 (C-D:4), WB=0.00, 1.00 (n/a:0), SS=0.05, 1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
	(PSH)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	618 354	1687 788	1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.03 (D) (INPUT = 0.90)
JSI METAL = 0.02 (A) (INPUT = 1.00)



Structural component only
DWG# T-2007655

LUL/LUS/LJS/HUS/HHUS/HGUS

Standard and Double-Shear Joist Hangers



This product is preferable to similar connectors because of a) easier installation, b) higher capacities, c) lower installed cost, or a combination of these features.

Most hangers in this series have double-shear nailing — an innovation that distributes the load through two points on each joist nail for greater strength. This allows for fewer nails, faster installation, and the use of all common nails for the same connection. (Do not bend or remove tabs)

Double-shear hangers range from the light capacity LUS hangers to the highest capacity HGUS hangers. For medium load truss applications, the HUS offers a lower cost alternative and easier installation than the HGUS hangers, while providing greater load capacity and bearing than the LUS.

Material: See table on pp. 258–259.


Finish: Galvanized. Some products available in stainless steel or ZMAX® coating; see Corrosion Information, pp. 20–24.

Installation:


- Use all specified fasteners; see General Notes.
- Nails must be driven at an angle through the joist or truss into the header to achieve the tabulated resistances (except LUL).
- Where 16d commons are specified, 10d commons may be used at 0.83 of the tabulated factored resistance.
- Not designed for welded or nailer applications.
- With single ply 2x carrying members, use 10d x 1 1/4" nails into the header and 10d commons into the joist, and reduce the resistance to 0.64 of the table value where 16d nails are specified and 0.77 where 10d nails are specified.

Options:


- LUS, LJS, LUL and HUS hangers cannot be modified.
- Other sizes available; consult your Simpson Strong-Tie representative.
- See Hanger Options information on p. 126.




LUS28




LU26L




HUS210
(HUS26, HUS28, and HHUS similar)




HGUS28-2



HHUS210-2



Double-Shear Nailing Top View





Double-Shear Nailing Side View; Do not bend tab



Dome Double-Shear Nailing Side View (available on some models)
U.S. Patent 5,603,580

Typical HUS26 Installation with Reduced Heel Height
(Truss Designer to provide fastener quantity for connecting multiple members together)

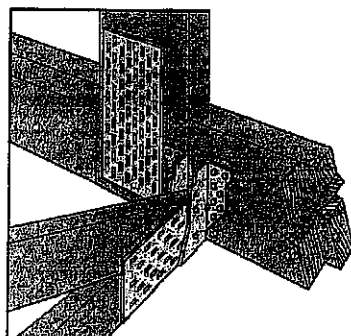

LJS26DS

Plated Truss Connectors

LUL/LUS/LJS/HUS/HHUS/HGUS**HHUS/HGUS**

See Hanger Options Information on pp. 125–127.



HHUS — Sloped and/or Skewed Seat

- HHUS hangers can be skewed to a maximum of 45° and/or sloped to a maximum of 45°
- For skew only, maximum factored down resistance is 0.85 of the table value
- For sloped only or sloped and skewed hangers, the maximum factored down resistance is 0.72 of the table value
- Uplift resistances for sloped/skewed conditions are 0.62 of the table value
- The joist must be bevel-cut to allow for double-shear nailing

HGUS — Skewed Seat

- HGUS hangers can be skewed only to a maximum of 45°. Factored resistances are:

HGUS Seat Width	Joist	Down Resistance	Uplift
$W < 2"$	Bevel or square cut	0.62 of table value	0.46 of table value
$2" < W < 6"$	Bevel cut	0.67 of table value	0.41 of table value
$2" < W < 6"$	Square cut	0.46 of table value	0.41 of table value
$W > 6"$	Bevel cut	0.75 of table value	0.41 of table value



Top View HHUS Hanger Skewed Right
(joist must be bevel cut)
All joist nails installed on the outside angle (non-acute side).

Standard and Double-Shear Joist Hangers (cont.)

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32–34 for more information.

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance			
		W	H	B	d _e ³	Header	Joist	D-Fir-L		S-P-F	
								Uplift	Normal	Uplift	Normal
								(K _D = 1.15)	(K _D = 1.00)	(K _D = 1.15)	(K _D = 1.00)
								lb.	lb.	lb.	lb.
								kN	kN	kN	kN
Single 2x Sizes											
LUS24	18	1 1/8	3 1/2	1 1/4	2 1/4	(4) 10d	(2) 10d	710	1625	645	1155
								3.18	7.23	2.87	5.14
LU24L	22	1 1/8	3	1 1/4	2 1/8	(4) 10d	(2) 10d x 1 1/2"	360	1020	320	725
								1.60	4.54	1.42	3.22
LU26L	22	1 1/8	5	1 1/4	4 1/8	(6) 10d	(4) 10d x 1 1/2"	720	1805	645	1140
								3.20	7.14	2.87	5.07
LUS26	18	1 1/8	4 1/4	1 1/4	3 3/4	(4) 10d	(4) 10d	1420	2170	1290	1630
								6.32	9.65	5.74	7.25
HUS26	18	1 1/8	5 1/4	3	3 3/8	(14) 16d	(6) 16d	2705	4940	2085	3875
								11.30	21.97	9.20	17.24
LJS26DS	18	1 1/8	5	3 1/2	4 1/4	(16) 16d	(6) 16d	2055	4265	1480	4115
								9.14	18.97	6.49	18.31
HGUS26	12	1 1/8	5 1/4	5	4 1/4	(20) 16d	(8) 16d	2685	6625	2685	5700
								11.96	29.51	11.96	25.35
LU28L	20	1 1/8	6 1/4	1 1/4	5 1/4	(8) 10d	(6) 10d x 1 1/2"	1140	2185	1020	1550
								5.07	9.72	4.54	6.89
LUS28	18	1 1/8	6 1/4	1 1/4	3 3/4	(6) 10d	(4) 10d	1420	2520	1290	1790
								6.32	11.21	5.74	7.96
HUS28	16	1 1/8	7 1/8	3	6 1/8	(22) 18d	(8) 18d	3805	5385	2675	4345
								16.04	23.86	11.90	19.33
HGUS28	12	1 1/8	7 1/8	5	6 1/4	(36) 16d	(12) 16d	3310	7675	3310	6900
								14.74	34.19	14.74	30.73
LU210L	20	1 1/8	8	1 1/4	7 1/4	(10) 10d	(6) 10d x 1 1/2"	1140	2495	1020	1770
								6.07	11.10	4.54	7.87
LUS210	18	1 1/8	7 1/8	1 1/4	3 3/4	(8) 10d	(4) 10d	1420	2785	1290	2210
								6.32	12.39	5.74	9.83


1. Factored uplift resistances have been increased 15% for wind or earthquake loading; no further increase is allowed.
2. Designer must ensure that hanger is compatible with truss when reduced heel height is used.
3. d_e is the distance from the bearing seat to the top joist nail.
4. Resistances shown require a minimum 2-ply girder truss. For fastening to single-ply truss request technical bulletin T-C-N10TRSSCN and/or see installation notes.
5. Nails: 16d = 0.162" dia. x 3 3/4" long. See pp. 27–28 for other nail sizes and information.

Face-Mount Hangers

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32-34 for more information.

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance			
		W	H	B	d ₀ ³	Header	Joist	D.Fir-L		S-P-F	
								Uplift	Normal	Uplift	Normal
								(K ₀ = 1.15) lb.	(K ₀ = 1.00) lb.	(K ₀ = 1.15) lb.	(K ₀ = 1.00) lb.
Double 2x Sizes											
LUS24-2	18	3 1/8	3 1/8	2	1 1/2	(4) 16d	(2) 16d	835	2020	590	1435
SS LUS26-2	18	3 1/8	4 1/8	2	4	(4) 16d	(4) 16d	3.71	8.99	2.62	6.38
HHUS26-2	14	3 1/8	5 1/8	3	3 1/8	(14) 16d	(6) 16d	1720	2595	1545	1920
HGUS26-2	12	3 1/8	5 1/8	4	4 1/8	(20) 16d	(8) 16d	7.65	11.54	6.87	8.54
SS LUS28-2	18	3 1/8	7	2	4	(6) 16d	(4) 16d	2850	7335	2065	5205
HHUS28-2	14	3 1/8	7 1/8	3	6 1/8	(22) 16d	(8) 16d	12.68	32.83	9.20	23.15
HGUS28-2	12	3 1/8	7 1/8	4	6 1/8	(36) 16d	(12) 16d	4385	8950	3110	6355
SS LUS210-2	18	3 1/8	9	2	6	(8) 16d	(6) 16d	19.51	39.81	13.83	28.27
HHUS210-2	14	3 1/8	9 1/8	3	8	(30) 16d	(10) 16d	1720	3325	1545	2675
HGUS210-2	12	3 1/8	9 1/8	4	8 1/8	(48) 16d	(16) 16d	7.65	14.79	6.87	11.45
								3785	8940	2675	6345
								16.75	39.77	11.90	28.22
								6070	12980	4310	9215
								27.00	57.74	19.17	40.99
SS LUS210-2	18	3 1/8	9	2	6	(8) 16d	(6) 16d	2580	4500	2320	3195
HHUS210-2	14	3 1/8	9 1/8	3	8	(30) 16d	(10) 16d	11.48	20.02	10.32	14.21
HGUS210-2	12	3 1/8	9 1/8	4	8 1/8	(48) 16d	(16) 16d	4670	9660	4235	7000
								20.77	42.97	18.84	31.14
								6840	14015	4855	10270
								30.43	62.34	21.60	45.69
Triple 2x Sizes											
HGUS26-3	12	4 1/8	5 1/8	4	4 1/8	(20) 16d	(8) 16d	4385	8950	3110	6355
								19.51	39.81	13.83	28.27
HGUS28-3	12	4 1/8	7 1/8	4	6 1/8	(36) 16d	(12) 16d	6070	12980	4310	9215
								27.00	57.74	19.17	40.99
HHUS210-3	14	4 1/8	9	3	7 1/8	(30) 16d	(10) 16d	4670	9670	4235	6865
								20.77	43.02	18.84	30.54
HGUS210-3	12	4 1/8	9 1/8	4	8 1/8	(48) 16d	(16) 16d	6840	14645	4855	10400
								30.43	65.14	21.60	46.26
Quadruple 2x Sizes											
HGUS26-4	12	6 1/8	5 1/8	4	4 1/8	(20) 16d	(8) 16d	4385	8950	3110	6355
								19.51	39.81	13.83	28.27
HGUS28-4	12	6 1/8	7 1/8	4	6 1/8	(36) 16d	(12) 16d	6070	12980	4310	9215
								27.00	57.74	19.17	40.99
HHUS210-4	14	6 1/8	8 1/8	3	7 1/8	(30) 16d	(10) 16d	4670	10155	4235	7210
								20.77	45.17	18.84	32.07
HGUS210-4	12	6 1/8	9 1/8	4	8 1/8	(48) 16d	(16) 16d	6840	14645	4855	10400
								30.43	65.14	21.60	46.26
HGUS212-4	12	6 1/8	10 1/8	4	10 1/8	(56) 16d	(20) 16d	7640	14995	5425	10645
								33.98	66.70	24.13	47.35
HGUS214-4	12	6 1/8	12 1/8	4	11 1/8	(66) 16d	(22) 16d	10130	16400	7195	11645
								45.06	72.95	32.00	51.80
4x Sizes											
LUS46	18	3 1/8	4 1/8	2	3 1/8	(4) 16d	(4) 16d	1720	2595	1545	1920
HHUS46	14	3 1/8	5 1/8	3	3 1/8	(14) 16d	(6) 16d	7.65	11.54	6.87	8.54
HGUS46	12	3 1/8	5 1/8	4	4 1/8	(20) 16d	(8) 16d	2540	7335	2065	5205
								11.30	32.83	9.20	23.15
LUS48	18	3 1/8	6 1/8	2	3 1/8	(6) 16d	(4) 16d	4385	8950	3110	6355
HHUS48	14	3 1/8	7 1/8	3	6 1/8	(22) 16d	(8) 16d	19.51	39.81	13.83	28.27
HGUS48	12	3 1/8	7 1/8	4	6 1/8	(36) 16d	(12) 16d	1720	3325	1545	2675
								7.65	14.79	6.87	11.45
								3785	8940	2675	6345
								16.75	39.77	11.90	28.22
								6070	12980	4310	9215
								27.00	57.74	19.17	40.99
LUS410	18	3 1/8	8 1/8	2	5 1/8	(8) 16d	(6) 16d	2580	4500	2320	3195
HGUS410	12	3 1/8	9	4	8 1/8	(48) 16d	(16) 16d	11.48	20.02	10.32	14.21
								6840	14015	4855	10270
								30.43	62.34	21.60	45.69
HGUS412	12	3 1/8	10 1/8	4	10 1/8	(56) 16d	(20) 16d	7640	14995	5425	10645
								33.98	66.70	24.13	47.35
HGUS414	12	3 1/8	12 1/8	4	11 1/8	(66) 16d	(22) 16d	10130	16400	7195	11645
								45.06	72.95	32.00	51.80



Plated Truss Connectors

See footnotes on p. 258.

TC - Truss Connectors

SIMPSON
Strong-Tie

The TC truss connector is an ideal connector for scissor trusses and can allow horizontal movement up to 1 1/4". The TC also attaches plated trusses to top plates or sill plates to resist uplift forces. Typically used on one or both ends of truss as determined by the building designer.

Material: 16 gauge

Finish: G90 galvanized


Design: Factored resistances are in accordance with CSA 086-14

Installation:


- Use all specified fasteners.
- Nails: 10d = 0.148" dia. x 3" long common wire, 10d x 1 1/2" = 0.148" dia. x 1 1/2" long.
- Drive 10d nails into the truss at the inside end of the slotted holes (inside end is towards the centre of the truss) and clinch on the back side. Do not seat these nails into the truss—allow room under the nail head for movement of the truss with respect to the wall.

Optional TC Installation:


- Bend one flange up 90°. Drive specified nails into the top and face of the top plates or install Titen® screws into the top and face of masonry wall. See optional load tables and installation details.




TC24
U.S. Patent 4,932,173




Typical TC24 Installation

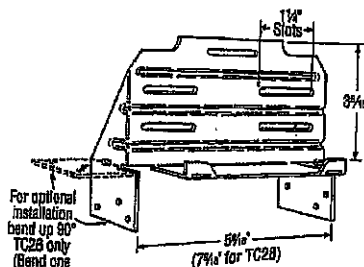

TC26
(TC28 Similar)



Optional TC26 Installation for Grouted Concrete Block using a Wood Nailer
(8", 10", 12" Wall Installation Similar)




Optional TC26 Installation for Grouted Concrete Block using Titen Screws

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift ($K_p=1.15$)	Uplift ($K_p=1.15$)
TC24	(4) 10d	(4) 10d	605	430
TC26	(5) 10d	(5) 10d	1015	720
TC28	(5) 10d	(5) 10d	1015	720

Optional TC Installation Table

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift ($K_p=1.15$)	Uplift ($K_p=1.15$)
TC26	(5) 10d	(6) 10d x 1 1/2"	810	660
	(5) 10d	(8) 10d	930	660

1. Factored resistances have been increased 15% for earthquake or wind loading; no further increase allowed; reduce where other loads govern.
2. Grout strength is 15 MPa minimum.
3. Optional TC26 installation with 10d nails requires minimum 3" top plate thickness.
4. TC28 fastened to grouted concrete block with (8) - 3/4" x 2 1/4" Titen screws has a factored uplift resistance of 275 lb.



DESIGN

For more information, visit strongtie.com or call 1-800-999-5099. This document is a technical specification and should be used in conjunction with the Strong-Tie Truss Connector Installation Manual. © 2017 Simpson Strong-Tie Company.

EXPIRATION DATE: 6/30/2018

(800) 999-5099
strongtie.com

H/TSP**SIMPSON****Strong-Tie®****Seismic and Hurricane Ties (cont.)**

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32–34 for more information.

Model No.	Ga.	Fasteners			Factored Resistance ($K_D = 1.15$)					
		To Rafters/Truss	To Plates	To Studs	D.Fir-L			S-P-F		
					Uplift	Lateral		Uplift	Lateral	
						F ₁	F ₂		F ₁	F ₂
					lb.	lb.	lb.	lb.	lb.	lb.
					kN	kN	kN	kN	kN	kN
H1	18	(5) 8d x 1½"	(4) 8d	—	740	585	300	680	485	215
					3.29	3.05	1.33	3.02	2.16	0.96
SS H2A	18	(5) 8d x 1½"	(2) 8d x 1½"	(5) 8d x 1½"	830	220	75	590	155	55
					3.69	0.98	0.33	2.62	0.69	0.24
SS H2.5A	18	(5) 8d	(5) 8d	—	805	160	160	755	160	160
					3.58	0.71	0.71	3.36	0.71	0.71
H2.5T	18	(5) 8d	(5) 8d	—	835	175	210	740	180	210
					3.71	0.78	0.93	3.29	0.71	0.93
SS H3	18	(4) 8d	(4) 8d	—	740	180	265	615	125	190
					3.29	0.80	1.18	2.74	0.56	0.85
H6	16	—	(8) 8d	(8) 8d	1585	1085	—	1125	770	—
					7.05	4.83	—	5.00	3.43	—
H7Z	16	(4) 8d	(2) 8d	(8) 8d	1390	670	—	990	475	—
					6.18	2.98	—	4.40	2.11	—
SS H8 ^a	18	(5) 10d x 1½"	(5) 10d x 1½"	—	1120	—	—	1025	—	—
					4.98	—	—	4.56	—	—
SS H10A ^b	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1735	795	410	1505	565	290
					7.72	3.54	1.82	6.69	2.51	1.29
H10AR	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1485	690	430	1220	570	305
					6.61	3.07	1.91	5.43	2.54	1.36
H10A-2	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1835	1275	430	1645	880	305
					8.16	5.67	1.91	7.32	3.91	1.36
H10S ^{7a}	18	(8) 8d x 1½"	(8) 8d x 1½"	(8) 8d	1465	795	315	1040	585	225
					6.52	3.54	1.40	4.63	2.51	1.00
H11Z	18	(6) 16d x 2½"	(6) 16d x 2½"	—	1095	920	545	780	655	390
					4.87	4.09	2.42	3.47	2.91	1.73
H14	18	[1] (12) 8d x 1½"	(13) 8d	—	2390	855	320	1805	610	230
		[2] (12) 8d x 1½"	(15) 8d	—	10.63	3.80	1.42	8.03	2.71	1.02
					2390	855	320	1805	610	230
TSP	16	(9) 10d x 1½"	(6) 10d x 1½"	—	1295	440	—	920	310	—
					5.76	1.98	—	4.09	1.38	—
		(9) 10d x 1½"	(8) 10d	—	1560	440	—	1105	310	—
					6.94	1.98	—	4.92	1.38	—

- Factored resistances have been increased 15% for short term loading; no further increase is allowed.
- Factored resistances are for one anchor. A minimum rafter thickness of 2½" must be used when framing anchors are installed on the same side of the plate (exception: H2.5A).
- H8 factored uplift resistances for stud-to-bottom plate installations are 595 lb. (2.65 kN) for D.Fir-L and 390 lb. (1.74 kN) for S-P-F.
- When cross-grain bending or cross-grain tension cannot be avoided, mechanical reinforcement to resist such forces should be considered.
- Hurricane ties are shown installed on the outside of the wall for clarity. Installation on the inside of the wall is acceptable. For a continuous load path, connections at the top and bottom of the wall must be on the same side of the wall (see technical bulletin T-HTIECONPATH).
- Factored resistances in the F₁ direction are not intended to replace diaphragm boundary members or prevent cross grain bending of the truss or rafter members. Additional shear transfer elements shall be considered where there may be effects of cross grain bending or tension.

- H10S can have the stud offset a maximum of 1" from the rafter (centre to centre) for a reduced uplift of 1435 lb. (6.38 kN) D.Fir-L and 1015 lb. (4.51 kN) S-P-F.
- H10S nails to plates are optional for uplift but required for lateral loads.
- H10A may be field-bent up to a slope of 6/12. Multiply the tabulated uplift value x 0.75. Full tabulated lateral resistances apply.
- The factored resistances of stainless-steel connectors match carbon-steel connectors when installed with Simpson Strong-Tie® stainless-steel, SCNR ring-shank nails. For more information, refer to engineering letter L-F-SSNAILS at strongtie.com.
- D.Fir-L/S-P-F factored uplift resistances for the H2.5A fastened to a 2x4 truss bottom chord and double top plates using (5) 8d x 1½" nails into the top plates and (3) 8d x 1½" nails into the lowest three flange holes into the truss bottom chord is 495 lb. (2.20 kN).
- Nails: 16d x 2½" = 0.162" dia. x 2½" long, 10d = 0.148" dia. x 3" long, 10d x 1½" = 0.148" dia. x 1½" long, 8d = 0.131" dia. x 2½" long, 8d x 1½" = 0.131" dia. x 1½" long. See pp. 27–28 for other nail sizes and information.



BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY

B97791H1

NAIL TYPE	LENGTH (IN)	DIAMETER (IN)	NAIL LATERAL CAPACITY (LB)	
			S-P-F	D. FIR
COMMON WIRE	3.00	0.144	132	147
	3.25	0.144	132	147
	3.50	0.160	159	177
COMMON SPIRAL	3.00	0.122	97	108
	3.25	0.122	97	108
	3.50	0.152	145	162

NOTES:

1. Rafter and ceiling members may be anchored to top and bottom chords of girder truss by toe-nailing rafter and ceiling members to girder chords provided the reaction does not exceed the lateral capacities in the table. Hangers (specified by others) are required for reactions higher than the maximum toe-nail capacity. Reactions are based on factored loads.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor J_A in CSA O86-14, section 12.9.4.1.
3. For 9-3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in tables below.
5. Nail values in table are based on the following relative lumber densities: $G = 0.42$ (SPF), $G = 0.49$ (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See next page for nailing on bearing plate).
7. For loads due to **wind** the nail lateral capacity in this table may be multiplied by 1.15 (K_D factor).
8. Lumber must be dry (< 19% moisture content) at the time of nail installation.
9. Nail values in this table comply with CSA O86-14, section 12.9.4
10. This design is not valid after March 31, 2021.

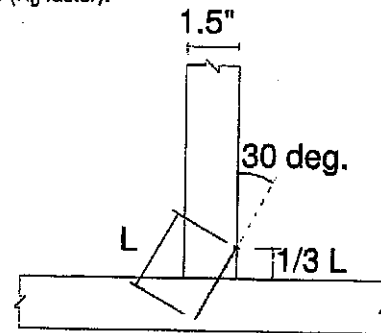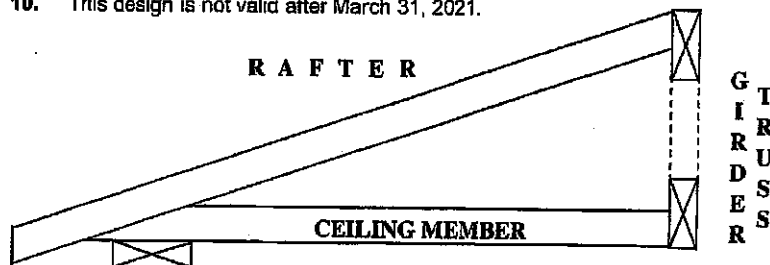


TOE-NAIL INSTALLATION

Nail type	Common wire	Common spiral	Common wire	Common spiral
Nail dia. (in)	0.160	0.152	0.144	0.122
	(3.5" nail)		(3" and 3.25" nail)	
LUMBER SIZE	MAXIMUM NUMBER OF TOE-NAILS			
2X4 SPF	2	2	3	3
2X4 D. Fir	2	2	2	2
2X6 SPF	4	4	4	5
2X6 D. Fir	3	3	3	4

MiTek® MiTek Canada Inc
100 Industrial Rd.
Bradford, Ontario L3Z 3G7

December 2, 2019



BEARING ANCHORAGE BY TOE-NAILS FOR WIND LOADING

B97791H2



NAIL TYPE	LENGTH (IN)	DIAMETER (IN)	NAIL WITHDRAWAL CAPACITY (LB)	
			S-P-F	D. FIR
COMMON WIRE	3.00	0.144	30	42
	3.25	0.144	32	45
	3.50	0.160	38	52
COMMON SPIRAL	3.00	0.122	26	36
	3.25	0.122	28	40
	3.50	0.152	36	50

Note: If using truss with D. Fir lumber and S-P-F bearing plate, use values in table for S-P-F.



NOTES:

1. Truss chord, rafter, or ceiling members may be anchored to bearing plate by toe-nails, provided that the actual factored uplift force due to **wind** or **earthquake** load does not exceed the withdrawal capacities in the table. Hangers (specified by others) are required for uplift forces that are higher than the maximum toe-nail withdrawal capacity.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor J_A in CSA O86-14, section 12.9.5.2.
3. For 9-3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in table above.
5. Nail values in table are based on the following relative lumber densities: $G = 0.42$ (SPF), $G = 0.49$ (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See drawing on detail B37579H1).
7. Lumber must be dry (< 19% moisture content) at the time of nail installation.
8. Nail values in this table comply with CSA O86-14, section 12.9.5
9. This design is not valid after March 31, 2021.

Toe-nailing on 2x6 Bearing Plate

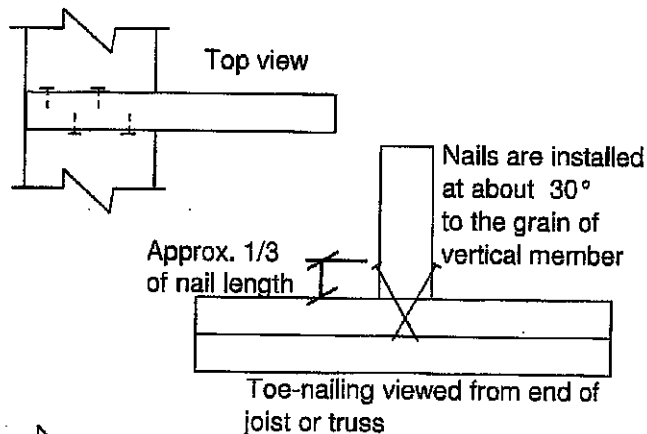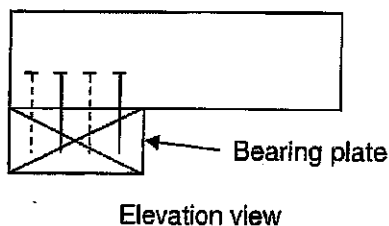


Toe-nailing on 2x4 Bearing Plate




MiTek® MiTek Canada Inc
100 Industrial Rd.
Bradford, Ontario L3Z 3G7

December 2, 2019




Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint, unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths or mm. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0-1/16" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

*Plate location details available in MiTek software or upon request.

PLATE SIZE

4 x 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T, I or Eliminator bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur.


Industry Standards:

TPIC: Truss Design Procedures and Specifications for Light Metal Plate Connected Wood Trusses
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System



dimensions shown in ft-in-sixteenths or mm (Drawings not to scale)

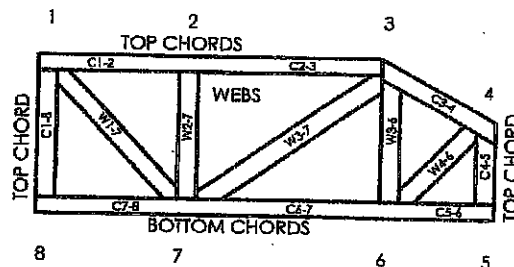

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

CCMC Reports:

11996-L, 10319-L, 13270-L, 12691-R

© 2007 MiTek® All Rights Reserved

MiTek
POWER TO PERFORM.™

MiTek Engineering Reference Sheet: Mit-7473C rev. 10-08



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury


1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T, I, or Eliminator bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane of joint locations are regulated by TPIC.
7. Design assumes trusses will be suitably protected from the environment in accord with TPIC.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with TPIC Quality Criteria.

Overview:

Where piggybacks are connected overtop of base trusses, 2x4 purlins must be first added to the flat portion of the base truss at a spacing no more than 24" o/c. These purlins not only provide support for the piggyback trusses above, but are required to laterally support the top chord of the base truss which will not have the sheathing directly connected to the flat portion of the base truss. This ensures the top chord, most often in compression, will not buckle laterally.

Further, the purlins in the plane of the flat portion require diagonal bracing to prevent lateral displacement of the purlins themselves where under certain conditions, the trusses may in fact all buckle in the same direction if this additional bracing is not added in the plane of the purlins.

Detail:

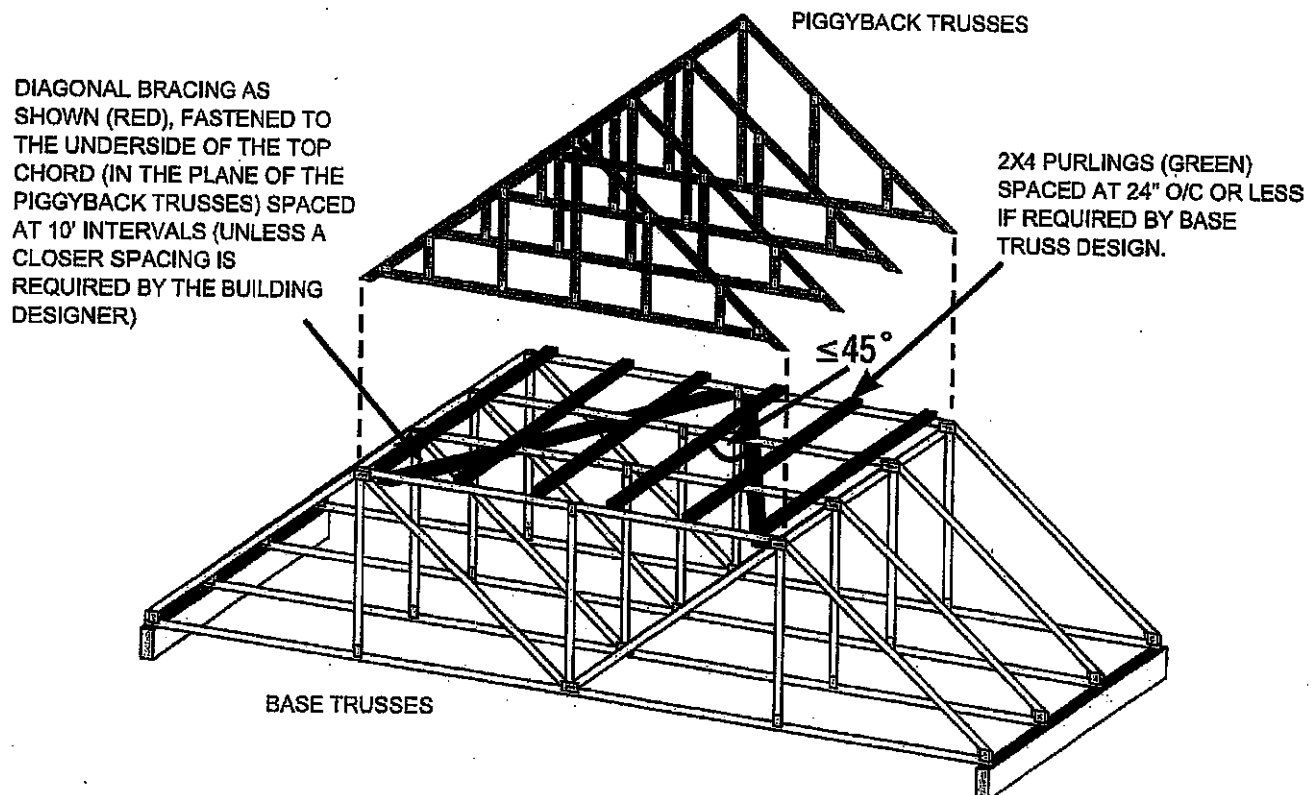


NOTE: THE SLOPED PORTION OF THE TOP CHORD OF THE BASE TRUSS AND PIGGYBACK TRUSS IN THIS SKETCH IS ASSUMED TO BE SHEATHED IN ACCORDANCE WITH THE OBC.

SKETCH FROM BCSI-CANADA 2013

Disclaimer:

OWTFA Tech Notes are intended to provide guidance to the design community both within the membership as well as to third party designers who might benefit from the information. The details have been developed by the OWTFA technical committee and although there may be professional engineers involved in development, the information contained in the tech note are not intended to be used without having a professional engineer review the information for a specific application. The OWTFA takes no responsibility with respect to the information provided but has developed this tech-note to offer guidance where it is not currently readily available.



Alves Engineering Services Inc.

5208 Easton road
Burlington, Ontario L7L 6N6
(289) 259 5455

RESPONSABILITIES

- 1-Alves Engineering Services Inc. is responsible for the design of trusses as individual components
- 2-It is the responsibility of others to ascertain that the design loads utilized on this drawing meet or exceed the actual dead load imposed by the structure and the live load imposed by the local building code or the authorities having jurisdictions.
- 3- All dimensions are to be verified by owner, contractor, architect or other authority before manufacture.
- 4- Alves Engineering Services Inc. bears no responsibility for the erection of the trusses. Persons erecting trusses are cautioned to seek professional advice regarding temporary and permanent bracing system. Bracing shown on Alves Engineering Services Inc. drawings is specified for the truss as a single component and forms an integral part of the truss design, but is not meant to represent the only required bracing for that truss when trusses are installed in a series of trusses forming a roof truss system.
- 5- It is the manufactures responsibility to ensure that the trusses are manufactured in conformance with Alves Engineering Services Inc. specifications outlined below.

SPECIFICATIONS

- 1-Truss components sealed by Alves Engineering Services Inc. conform to the relevant sections of the current Building Code of Ontario and Canada (part 4 or part 9) or the current Canadian code for Farm Buildings in accordance with the application specified on the sealed truss component drawing. All truss component design procedures must conform to the current design standard issued by the truss plate institute of Canada (TPIC). All lumber and nailing stresses to conform to the current CSA wood design standard identified on the current Building Code and TPIC.
- 2- Lumber is to be the sizes and grade specified on the truss drawing.
- 3- Moist content of lumber is not to exceed 19% in service unless otherwise specified.
- 4- Plates shall be applied to both faces of the each truss joint and shall be positioned as shown on the truss drawings
- 5- Lumber used on manufacture of trusses is not to be treated with chemicals unless otherwise specified on the truss drawings.
- 6- The top chord is assumed to be continuously laterally braced by the roof sheathing or purlins at intervals specified on the truss drawing but not exceeding 24" c/c for (part 9) and not exceeding 48" for (part 4 or farm design)
- 7- When rigid ceiling is not attached directly to the bottom chord, lateral bracing is required and it should not exceed more than 3m or 10' intervals.
- 8-Refer to Mitek sheet MII7473C REV.10-08 attached for information on symbols, numbering system and General Safety notes.

T-1800218

Feb 09, 2018