


8/12 roof pitch unless noted

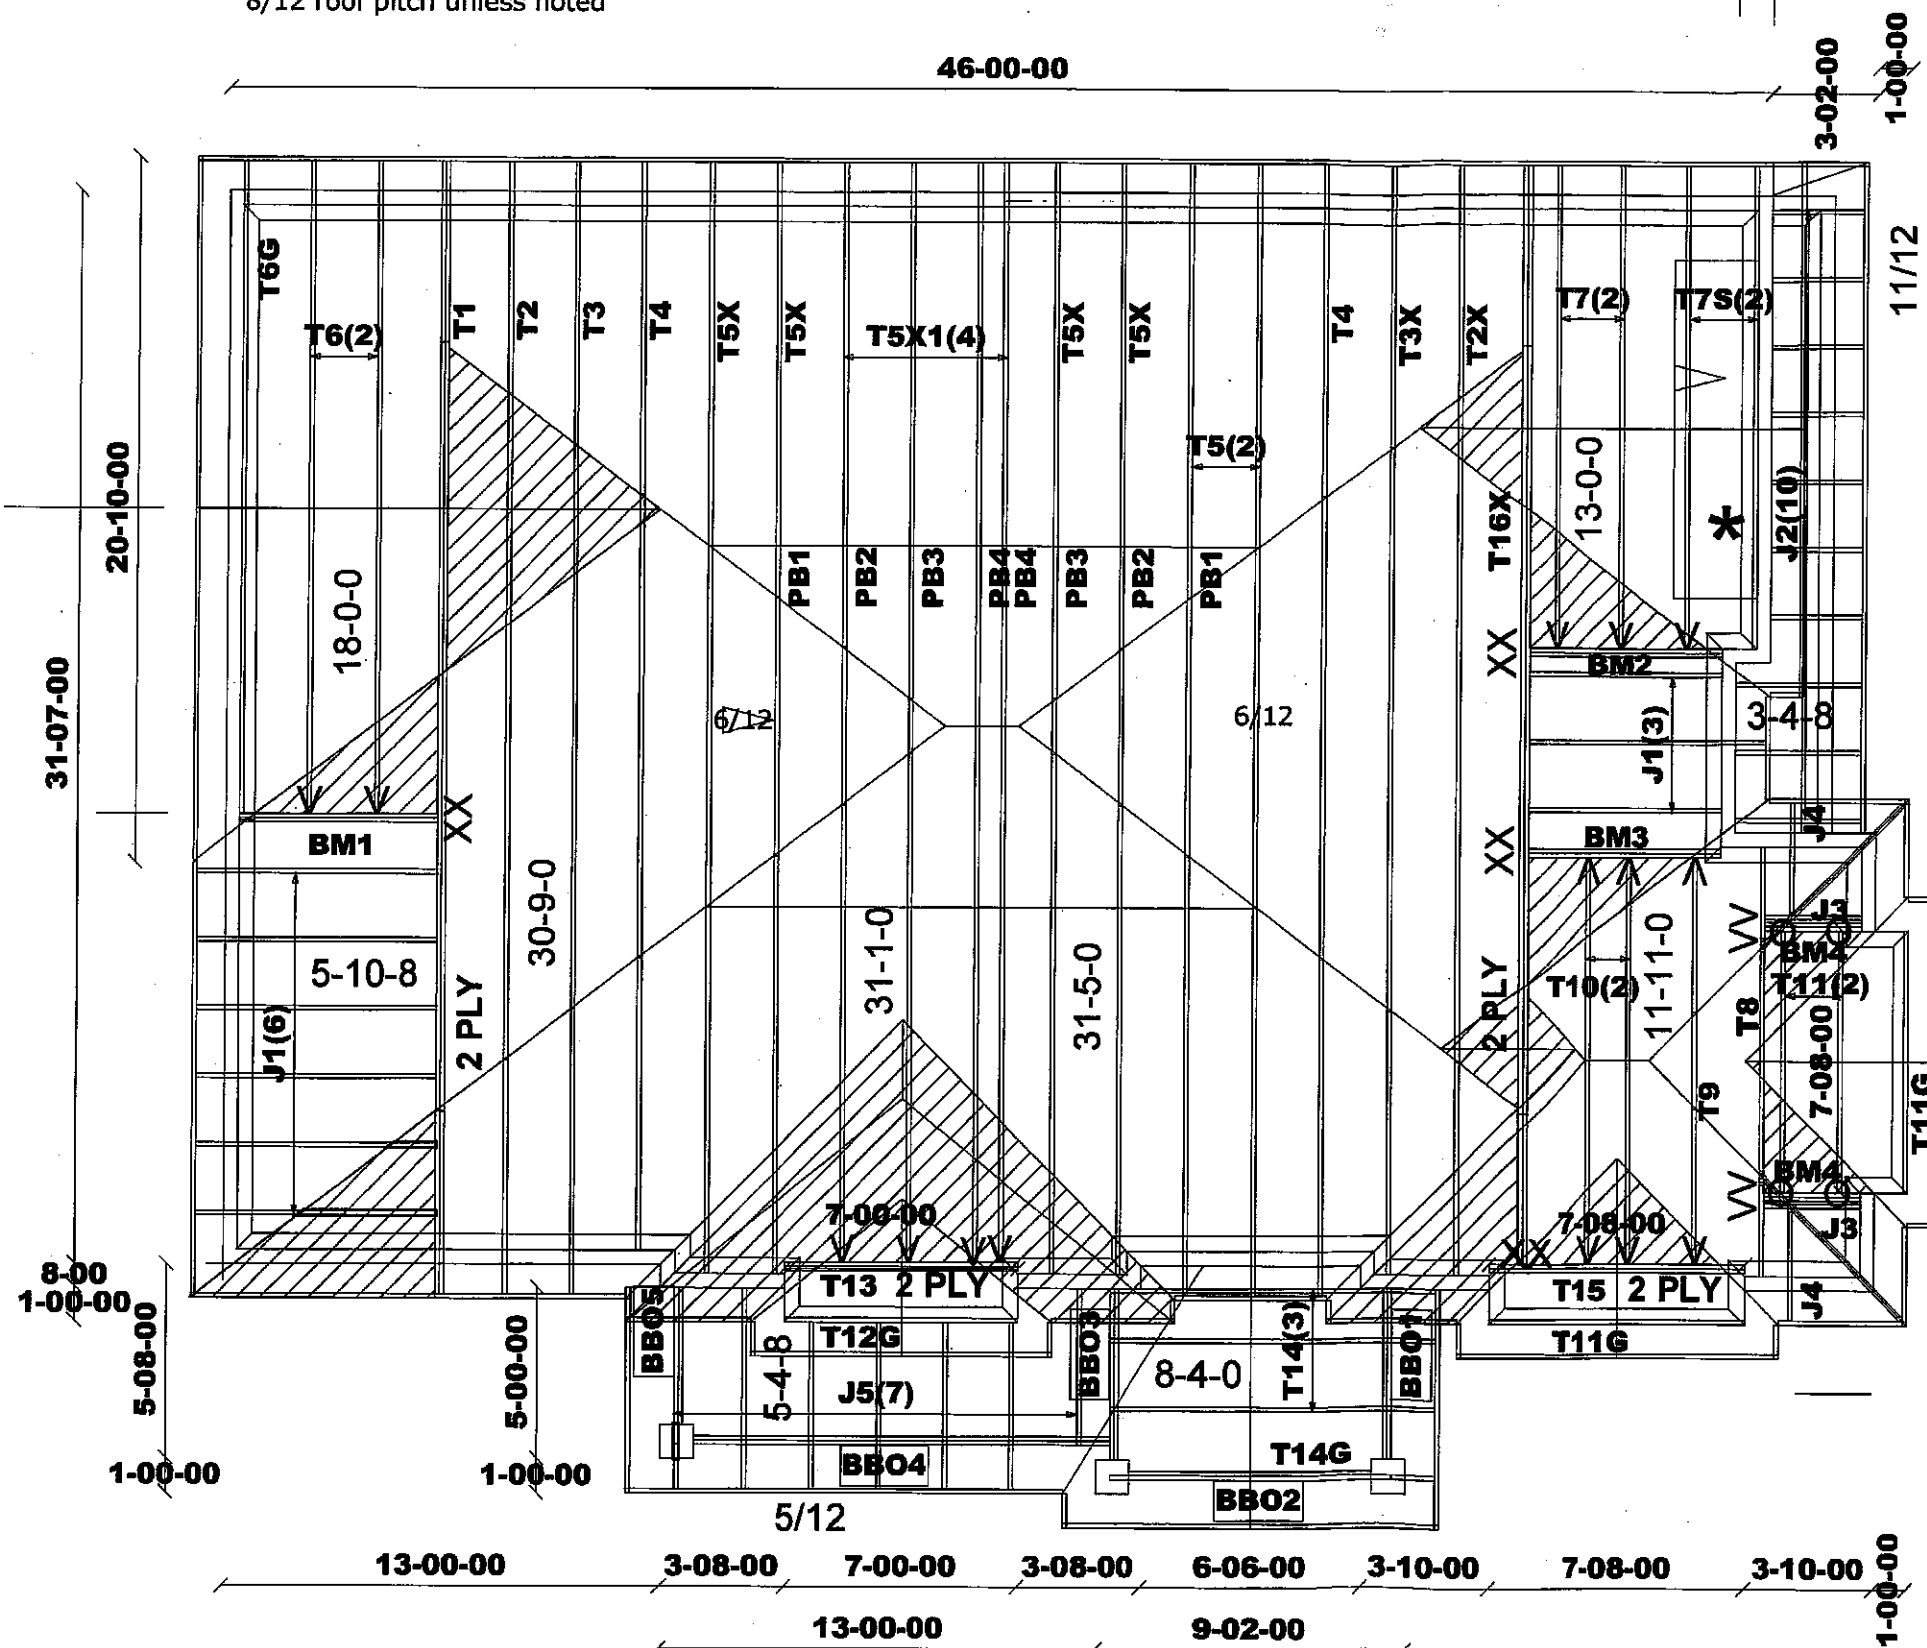

ASPHALT SHINGLES  
12"FINISHED OH.  
R.T.M.C.  
2X6 EXTERIOR WALLS  
2X6 FASCIA BOARD


HARDWARE:  
LUS24 - (O)  
LJS26DS - (V)  
LUS26-2 - (VV)  
HGUS26-2 - (XX)

DENOTES  
CONV.  
FRAMING

DESIGN CONFORMS  
WITH O.B.C.2012 PART 9  
(2019 AMENDMENT)  
DESIGN LOADS:  
SNOW LOAD 25.6 PSF  
TC DEAD 6 PSF  
BC LIVE 0 PSF  
BC DEAD 7.4 PSF

BM1, BM2, BM3, BM4 = 2-2X10

ALL CONV. FRAMING TO CONFORM WITH PART 9 OF O.B.C.2012  
(2019 AMENDMENT) ROOF RAFTERS THAT CROSS MEET OVER TRUSSES  
TO BE 2X4SPF @ 24"O.C. WITH A 2X4 VERT. POST TO THE TRUSS  
UNDER NEATH AT EACH CROSS PT. VERT. POST LONGER THAN 6"  
TO HAVE LATERAL BRACING SO THAT THE DISTANCE BETWEEN  
END PT. & BETWEEN ROWS OF BRACING DOES NOT EXCEED 6"



Job Track: **51225**  
Plan Log: **202427**  
Layout ID: **408263**

Builder / Location:  
**GREEN PARK HOMES / WATERDOWN**

Model / Elevation:  
**VALLEYCREEK 11/1**


Project: **RUSSELL GARDENS PH.3**

Date: 2020-04-27 Sales: **Mario DiCano**

Designer: **AC/IG**

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR  
REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY  
TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

Mitek ver 8.3.1.215

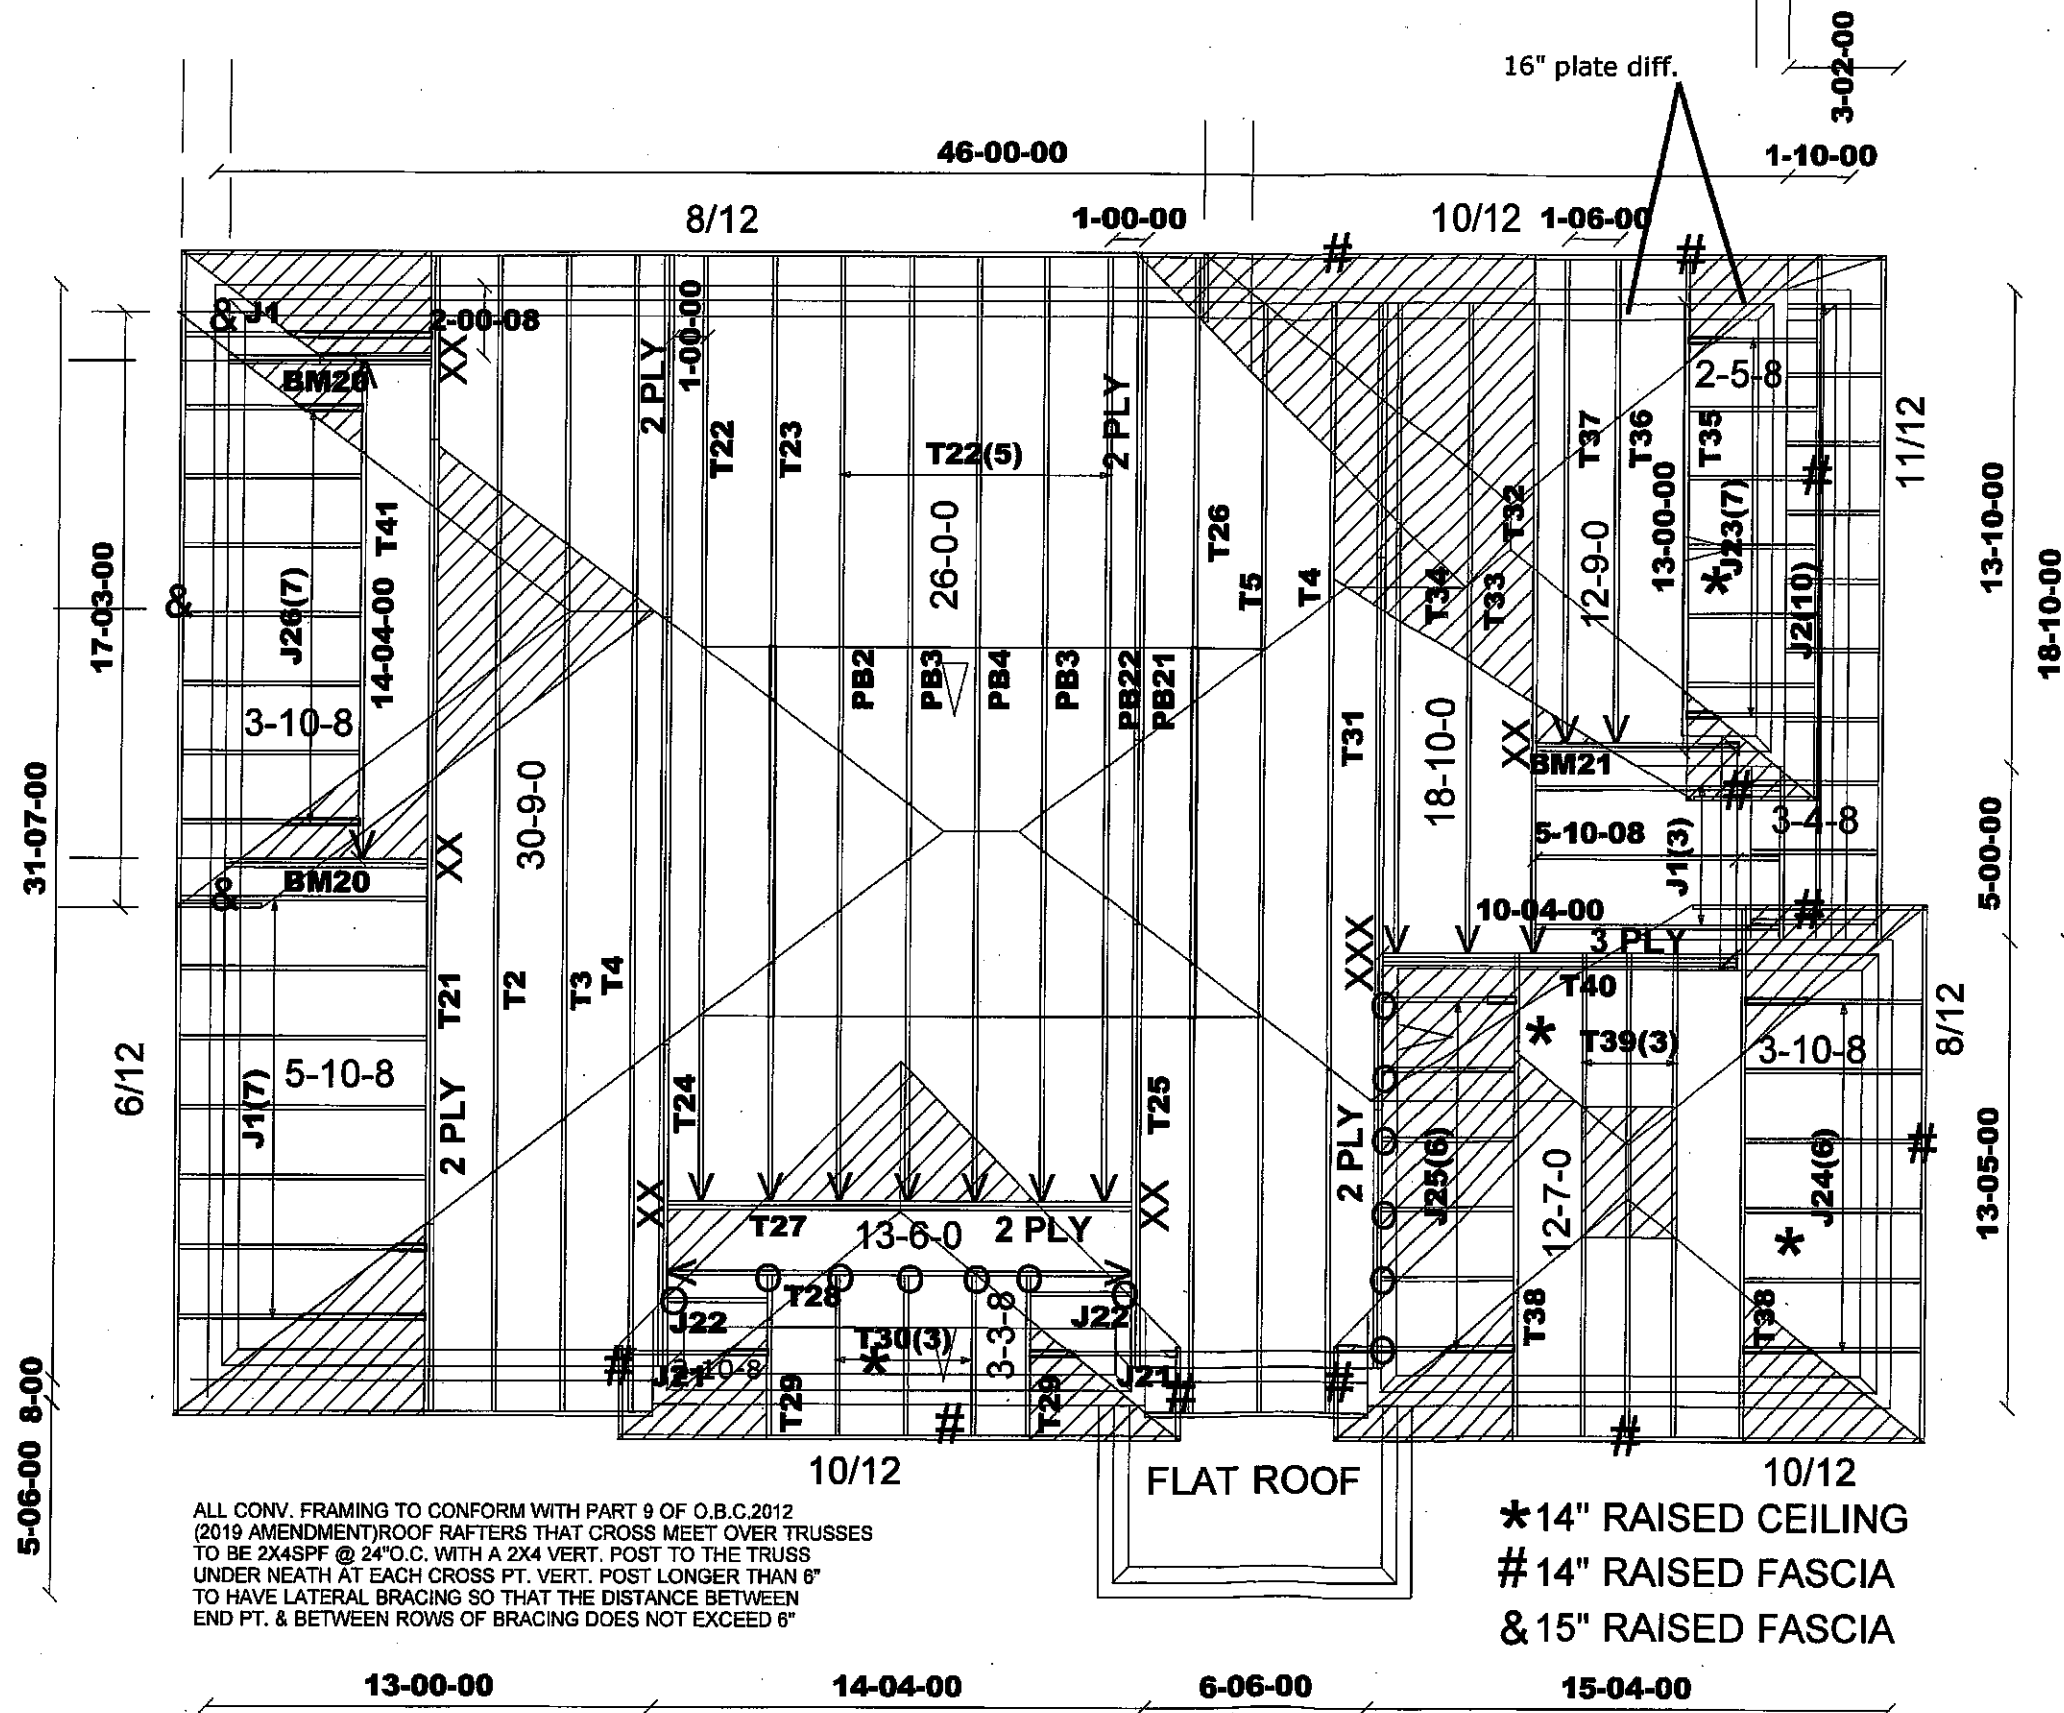

ASPHALT SHINGLES  
12" FINISHED OH.  
R.T.M.C.  
2X6 EXTERIOR WALLS  
2X6 FASCIA BOARD

HARDWARE:  
LUS24 - (O)  
LJS26DS - (V)  
HGUS26-2 - (XX)  
HGUS26-3 - (XXX)

DENOTES  
CONV.  
FRAMING

DESIGN CONFORMS  
WITH O.B.C.2012 PART 9  
(2019 AMENDMENT)  
DESIGN LOADS:  
SNOW LOAD 25.6 PSF  
TC DEAD 6 PSF  
BC LIVE 0 PSF  
BC DEAD 7.4 PSF

BM20 = BM21 =  
2-2X10

\*14" RAISED CEILING  
#14" RAISED FASCIA  
& 15" RAISED FASCIA

M13142




Job Track: **51225**  
Plan Log: **202427**  
Layout ID: **408264**

Builder / Location:  
**GREEN PARK HOMES / WATERDOWN**  
Project: **RUSSELL GARDENS PH.3**  
Date: 2020-04-27 Sales: **Mario DiCano**

Model / Elevation:  
**VALLEYCREEK 11/2**

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

**1-00-00** **2-02-00**



BM1, BM2 = 2-2X10





**TAMARACK**  
ROOF TRUSSES INC.

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.



|                                                                                                                                                                |                                                                                                                                                                      |                                                                                                                                                             |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| <br><b>TAMARACK</b><br>ROOF TRUSSES INC.<br><small>ALPHA LUMBER GROUP</small> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |  |  |
|                                                                                                                                                                | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 1 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408263<br>Ref #<br>Page: 1 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |  |

### Roof Trusses

| PROFILE                                                                            | QTY<br>PLY | MARK<br>TYPE              | PITCH  | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|------------------------------------------------------------------------------------|------------|---------------------------|--------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1<br>2-ply | T1<br>Hip Girder          | 8 / 12 | 30-09-00 | 4-01-04 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 279.28<br>171.33 |                     |                    |
|    | 1          | T2<br>Hip                 | 8 / 12 | 30-09-00 | 5-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 121.17<br>75.33  |                     |                    |
|    | 1          | T2X<br>Hip                | 8 / 12 | 30-09-00 | 5-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 121.46<br>75.67  |                     |                    |
|    | 1          | T3<br>Hip                 | 8 / 12 | 30-09-00 | 6-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 134.15<br>83.67  |                     |                    |
|   | 1          | T3X<br>Hip                | 8 / 12 | 30-09-00 | 6-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 134.53<br>84.00  |                     |                    |
|  | 2          | T4<br>Hip                 | 8 / 12 | 30-09-00 | 7-01-04 | 2 x 4          | 1-03-08                   | 1-04-13<br>1-04-13           | 262.38<br>165.67 |                     |                    |
|  | 2          | T5<br>Hip                 | 8 / 12 | 30-09-00 | 8-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 278.53<br>174.00 |                     |                    |
|  | 4          | T5X<br>Hip                | 8 / 12 | 30-09-00 | 8-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 558.21<br>354.00 |                     |                    |
|  | 4          | T5X1<br>Piggyback<br>Base | 8 / 12 | 30-09-00 | 8-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 556.49<br>349.33 |                     |                    |
|  | 2          | T6<br>Common              | 8 / 12 | 18-00-00 | 7-04-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 158.58<br>100.67 |                     |                    |
|  | 1          | T6G<br>GABLE              | 8 / 12 | 18-00-00 | 7-04-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 81.47<br>52.17   |                     |                    |
|  | 2          | T7<br>Common              | 8 / 12 | 13-00-00 | 5-08-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 113.51<br>72.67  |                     |                    |
|  | 2          | T7S<br>Roof Special       | 8 / 12 | 13-00-00 | 5-08-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 118.15<br>75.67  |                     |                    |
|  | 1          | T8<br>Hip Girder          | 8 / 12 | 12-07-00 | 3-03-13 | 2 x 4<br>2 x 6 |                           | 1-04-13<br>1-04-13           | 58.92<br>38.50   |                     |                    |


|                                                                                                                                                                     |                                                                                                                                                                      |                                                                                                                                                             |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
|  <p><b>TAMARACK</b><br/>ROOF TRUSSES INC.<br/><small>ALPA LUMBER GROUP</small></p> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |  |  |
|                                                                                                                                                                     | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 1 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408263<br>Ref #<br>Page: 2 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |  |

### Roof Trusses

| PROFILE                                                                             | QTY<br>PLY | MARK<br>TYPE            | PITCH  | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|-------------------------------------------------------------------------------------|------------|-------------------------|--------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1          | T9<br>Hip               | 8 / 12 | 11-11-00 | 4-07-13 | 2 x 4          |                           | 1-07-08<br>1-07-08           | 50.05<br>33.17   |                     |                    |
|    | 2          | T10<br>Common           | 8 / 12 | 11-11-00 | 5-07-02 | 2 x 4          |                           | 1-07-08<br>1-07-08           | 92.68<br>59.67   |                     |                    |
|    | 2          | T11<br>Common           | 8 / 12 | 7-08-00  | 3-09-03 | 2 x 4          | 1-03-08<br>1-03-08        | 1-01-08<br>1-01-08           | 65.9<br>44.00    |                     |                    |
|    | 2          | T11G<br>GABLE           | 8 / 12 | 7-08-00  | 3-09-03 | 2 x 4          | 1-03-08<br>1-03-08        | 1-01-08<br>1-01-08           | 60.27<br>40.00   |                     |                    |
|   | 1          | T12G<br>GABLE           | 8 / 12 | 7-00-00  | 3-06-09 | 2 x 4          | 1-03-08<br>1-03-08        | 1-01-08<br>1-01-08           | 27.92<br>17.50   |                     |                    |
|  | 1<br>2-ply | T13<br>Common<br>Girder | 8 / 12 | 7-00-00  | 3-05-08 | 2 x 4<br>2 x 6 |                           | 1-01-08<br>1-01-08           | 63.69<br>40.33   |                     |                    |
|  | 3          | T14<br>Common           | 8 / 12 | 8-04-00  | 3-11-14 | 2 x 4          | 1-03-08<br>1-03-08        | 8-05<br>8-05                 | 98.21<br>62.50   |                     |                    |
|  | 1          | T14G<br>GABLE           | 8 / 12 | 8-04-00  | 3-11-14 | 2 x 4          | 1-03-08<br>1-03-08        | 8-05<br>8-05                 | 30.31<br>20.17   |                     |                    |
|  | 1<br>2-ply | T15<br>Common<br>Girder | 8 / 12 | 7-08-00  | 3-08-02 | 2 x 4<br>2 x 6 |                           | 1-01-08<br>1-01-08           | 69.34<br>44.33   |                     |                    |
|  | 1<br>2-ply | T16X<br>Hip Girder      | 8 / 12 | 31-01-00 | 4-01-04 | 2 x 4<br>2 x 6 | 1-03-08                   | 1-04-13<br>1-02-02           | 277.51<br>172.00 |                     |                    |
|  | 2          | PB1<br>Piggyback        | 8 / 12 | 10-07-11 | 1-00-00 | 2 x 4          |                           |                              | 47.94<br>32.33   |                     |                    |
|  | 2          | PB2<br>Piggyback        | 8 / 12 | 10-07-11 | 2-00-00 | 2 x 4          |                           |                              | 59.3<br>39.67    |                     |                    |
|  | 2          | PB3<br>Piggyback        | 8 / 12 | 10-07-11 | 3-00-00 | 2 x 4          |                           |                              | 60.98<br>41.00   |                     |                    |
|  | 2          | PB4<br>Piggyback        | 8 / 12 | 10-07-11 | 3-06-09 | 2 x 4          |                           |                              | 54.56<br>35.00   |                     |                    |

|                                                                                                                                                               |                                                                                                                                                                      |                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>TAMARACK</b><br>ROOF TRUSSES INC.<br><small>ALFA LUMBER GROUP</small> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |
|                                                                                                                                                               | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 1 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408263<br>Ref #<br>Page: 3 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |

### Roof Trusses

| PROFILE                                                                            | QTY<br>PLY | MARK<br>TYPE    | PITCH  | SPAN    | HEIGHT  | LUMBER | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.    | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|------------------------------------------------------------------------------------|------------|-----------------|--------|---------|---------|--------|---------------------------|------------------------------|-----------------|---------------------|--------------------|
|   | 9          | J1<br>Jack-Open | 6 /12  | 5-10-08 | 4-01-04 | 2 x 4  | 1-03-08                   | 1-02-00<br>4-01-04           | 151.15<br>96.00 |                     |                    |
|   | 10         | J2<br>Jack-Open | 11 /12 | 3-04-08 | 4-08-01 | 2 x 4  | 1-03-08                   | 5-00<br>1-08-09              | 117.35<br>80.00 |                     |                    |
|   | 2          | J3<br>Jack-Open | 8 /12  | 2-10-08 | 2-08-02 | 2 x 4  | 1-03-08                   | 1-04-13<br>3-03-13           | 21.21<br>14.00  |                     |                    |
|   | 2          | J4<br>Jack-Open | 8 /12  | 1-10-15 | 2-08-02 | 2 x 4  | 1-03-08<br>1-01           | 1-04-13<br>2-08-02           | 19.15<br>12.67  |                     |                    |
|  | 7          | J5<br>Jack-Open | 5 /12  | 5-04-08 | 3-01-02 | 2 x 4  | 1-03-08                   | 4-01<br>1-09-15              | 101.52<br>65.33 |                     |                    |

TOTAL # TRUSS= 82

TOTAL BFT OF ALL TRUSSES= 2822.35

BFT.

TOTAL WEIGHT OF ALL TRSSES 4444.87 LBS

### HARDWARE






| QTY | TYPE     | MODEL    | LENGTH |
|-----|----------|----------|--------|
| 16  | Hardware | LJS26DS  |        |
| 4   | Hardware | LUS24    |        |
| 2   | Hardware | LUS26-2  |        |
| 3   | Hardware | HGUS26-2 |        |

TOTAL NUMBER OF  
ITEMS=

24



|                                                                                                                                                               |                   |  |  |  |                                                                                                                                                                      |  |                                                                                                                                                             |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <br><b>TAMARACK</b><br>ROOF TRUSSES INC.<br><small>ALPA LUMBER GROUP</small> | DELIVERY SHIPLIST |  |  |  | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 2 |  | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408264<br>Ref #<br>Page: 1 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |
|                                                                                                                                                               |                   |  |  |  |                                                                                                                                                                      |  |                                                                                                                                                             |  |

### Roof Trusses

| PROFILE                                                                             | QTY<br>PLY | MARK<br>TYPE                    | PITCH   | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|-------------------------------------------------------------------------------------|------------|---------------------------------|---------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1          | T2<br>Hip                       | 8 / 12  | 30-09-00 | 5-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 121.17<br>75.33  |                     |                    |
|    | 1          | T3<br>Hip                       | 8 / 12  | 30-09-00 | 6-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 131.19<br>82.00  |                     |                    |
|    | 2          | T4<br>Hip                       | 8 / 12  | 30-09-00 | 7-01-04 | 2 x 4          | 1-03-08                   | 1-04-13<br>1-04-13           | 262.38<br>165.67 |                     |                    |
|    | 1          | T5<br>Hip                       | 8 / 12  | 30-09-00 | 8-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 139.27<br>87.00  |                     |                    |
|  | 1<br>2-ply | T21<br>Hip Girder               | 8 / 12  | 30-09-00 | 4-01-04 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 279.28<br>173.33 |                     |                    |
|  | 6          | T22<br>Hip                      | 8 / 12  | 26-00-00 | 8-01-04 | 2 x 4          | 1-03-08                   | 1-04-13<br>4-06-13           | 731.03<br>464.00 |                     |                    |
|  | 1          | T23<br>Hip                      | 8 / 12  | 26-00-00 | 9-01-04 | 2 x 4          | 1-03-08                   | 1-04-13<br>4-06-13           | 128.27<br>80.00  |                     |                    |
|  | 1<br>2-ply | T24<br>Hip Girder               | 8 / 12  | 30-09-00 | 7-06-08 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 320.58<br>195.00 |                     |                    |
|  | 1<br>2-ply | T25<br>Piggyback<br>Base Girder | 8 / 12  | 30-09-00 | 8-01-04 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 318.59<br>195.67 |                     |                    |
|  | 1          | T26<br>Hip                      | 8 / 12  | 30-09-00 | 9-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 139.29<br>86.67  |                     |                    |
|  | 1<br>2-ply | T27<br>Common<br>Girder         | 8 / 12  | 13-06-00 | 7-02-13 | 2 x 4<br>2 x 6 |                           | 2-08-13<br>2-08-13           | 155.99<br>101.00 |                     |                    |
|  | 1          | T28<br>Hip Girder               | 8 / 12  | 13-06-00 | 5-08-10 | 2 x 4          |                           | 2-08-13<br>2-08-13           | 60<br>39.17      |                     |                    |
|  | 2          | T29<br>Half Hip<br>Girder       | 10 / 12 | 3-03-08  | 4-07-13 | 2 x 4          | 1-03-08                   | 1-07-11<br>4-07-13           | 53.85<br>38.33   |                     |                    |
|  | 3          | T30<br>Jack-Closed              | 10 / 12 | 3-03-08  | 5-08-10 | 2 x 4          | 1-03-08                   | 1-07-11<br>5-08-10           | 61.18<br>40.50   |                     |                    |


|                                                                                                                                                                      |                                                                                                                                                                      |                                                                                                                                                             |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
|  <p><b>TAMARACK</b><br/>ROOF TRUSSES INC.<br/><small>ALPHA LUMBER GROUP</small></p> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |  |  |
|                                                                                                                                                                      | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 2 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408264<br>Ref #<br>Page: 2 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |  |

### Roof Trusses

| PROFILE                                                                             | QTY<br>PLY | MARK<br>TYPE              | PITCH  | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|-------------------------------------------------------------------------------------|------------|---------------------------|--------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1<br>2-ply | T31<br>Hip Girder         | 8 /12  | 30-09-00 | 6-04-00 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-04-13<br>1-04-13           | 318.67<br>196.67 |                     |                    |
|    | 1          | T32<br>Half Hip<br>Girder | 8 /12  | 18-10-00 | 4-01-04 | 2 x 6          |                           | 1-04-13<br>4-01-04           | 97.1<br>61.00    |                     |                    |
|    | 1          | T33<br>Half Hip           | 8 /12  | 18-10-00 | 5-01-04 | 2 x 4          |                           | 1-04-13<br>5-01-04           | 75.03<br>48.67   |                     |                    |
|    | 1          | T34<br>Half Hip           | 8 /12  | 18-10-00 | 6-01-04 | 2 x 4          |                           | 1-04-13<br>6-01-04           | 81.42<br>50.33   |                     |                    |
|   | 1          | T35<br>Hip Girder         | 10 /12 | 13-00-00 | 3-00-08 | 2 x 4          | 1-03-08<br>1-03-08        | 1-07-11<br>1-07-11           | 55.32<br>37.17   |                     |                    |
|  | 1          | T36<br>Hip                | 10 /12 | 12-09-00 | 5-08-08 | 2 x 4          | 1-03-08                   | 2-11-11<br>3-02-03           | 64.15<br>41.33   |                     |                    |
|  | 1          | T37<br>Hip                | 10 /12 | 12-09-00 | 6-08-08 | 2 x 4          | 1-03-08                   | 2-11-11<br>3-02-03           | 64.26<br>41.33   |                     |                    |
|  | 2          | T38<br>Hip Girder         | 10 /12 | 12-07-00 | 3-11-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-07-11<br>1-07-11           | 116.45<br>76.00  |                     |                    |
|  | 3          | T39<br>Hip                | 10 /12 | 12-07-00 | 5-03-13 | 2 x 4          | 1-03-08<br>1-03-08        | 1-07-11<br>1-07-11           | 174.95<br>113.00 |                     |                    |
|  | 1<br>3-ply | T40<br>Flat Girder        | 0 /12  | 10-04-00 | 1-04-00 | 2 x 4<br>2 x 6 |                           | 1-04-00<br>1-04-00           | 131.82<br>86.00  |                     |                    |
|  | 1          | T41<br>Hip Girder         | 8 /12  | 14-04-00 | 4-04-04 | 2 x 4<br>2 x 6 |                           | 2-07-13<br>2-07-13           | 71.2<br>48.00    |                     |                    |
|  | 1          | PB2<br>Piggyback          | 8 /12  | 10-07-11 | 2-00-00 | 2 x 4          |                           |                              | 29.65<br>19.83   |                     |                    |
|  | 2          | PB3<br>Piggyback          | 8 /12  | 10-07-11 | 3-00-00 | 2 x 4          |                           |                              | 60.98<br>41.00   |                     |                    |
|  | 1          | PB4<br>Piggyback          | 8 /12  | 10-07-11 | 3-06-09 | 2 x 4          |                           |                              | 27.28<br>17.50   |                     |                    |

|                                                                                                                                                                     |                                                                                                                                                                      |                                                                                                                                                             |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
|  <p><b>TAMARACK</b><br/>ROOF TRUSSES INC.<br/><small>ALPA LUMBER GROUP</small></p> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |  |  |
|                                                                                                                                                                     | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 2 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408264<br>Ref #<br>Page: 3 of 3<br>Date: 04-27-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |  |

### Roof Trusses

| PROFILE                                                                            | QTY<br>PLY | MARK<br>TYPE      | PITCH  | SPAN     | HEIGHT  | LUMBER | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|------------------------------------------------------------------------------------|------------|-------------------|--------|----------|---------|--------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1<br>2-ply | PB21<br>Piggyback | 8 /12  | 10-07-11 | 1-09-04 | 2 x 4  |                           |                              | 59.22<br>42.00   |                     |                    |
|    | 1          | PB22<br>Piggyback | 8 /12  | 10-07-11 | 2-03-04 | 2 x 4  |                           |                              | 29.74<br>20.00   |                     |                    |
|    | 11         | J1<br>Jack-Open   | 6 /12  | 5-10-08  | 4-01-04 | 2 x 4  | 1-03-08                   | 1-02-00<br>4-01-04           | 184.74<br>117.33 |                     |                    |
|    | 10         | J2<br>Jack-Open   | 11 /12 | 3-04-08  | 4-08-01 | 2 x 4  | 1-03-08                   | 5-00<br>1-08-09              | 117.35<br>80.00  |                     |                    |
|   | 2          | J21<br>Jack-Open  | 8 /12  | 2-10-08  | 3-03-13 | 2 x 4  | 1-03-08                   | 1-04-13<br>3-03-13           | 23.32<br>15.33   |                     |                    |
|  | 2          | J22<br>Jack-Open  | 8 /12  | 2-10-08  | 4-07-13 | 2 x 4  |                           | 2-08-13<br>4-07-13           | 25.34<br>17.33   |                     |                    |
|  | 7          | J23<br>Jack-Open  | 8 /12  | 2-05-08  | 3-00-08 | 2 x 4  | 1-03-08                   | 1-04-13<br>3-00-08           | 74.29<br>49.00   |                     |                    |
|  | 6          | J24<br>Jack-Open  | 8 /12  | 3-10-08  | 3-11-13 | 2 x 4  | 1-03-08                   | 1-04-13<br>3-11-13           | 87.32<br>57.00   |                     |                    |
|  | 6          | J25<br>Jack-Open  | 8 /12  | 3-10-08  | 5-03-13 | 2 x 4  |                           | 1-04-13<br>3-11-13           | 102.97<br>66.00  |                     |                    |
|  | 7          | J26<br>Jack-Open  | 6 /12  | 3-10-08  | 4-04-04 | 2 x 4  | 1-03-08                   | 2-05-00<br>4-04-04           | 109.01<br>66.50  |                     |                    |

TOTAL # TRUSS= 102

TOTAL BFT OF ALL TRUSSES= 3229.99

BFT.

TOTAL WEIGHT OF ALL TRSSES 5081.62 LBS

### HARDWARE

| QTY | TYPE     | MODEL    | LENGTH |
|-----|----------|----------|--------|
| 15  | Hardware | LJS28DS  |        |
| 13  | Hardware | LUS24    |        |
| 5   | Hardware | HGUS26-2 |        |
| 1   | Hardware | HGUS26-3 |        |

TOTAL NUMBER OF  
ITEMS=

34



## DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER  
 Builder: GREEN PARK HOMES  
 Project: RUSSELL GARDENS PH.3  
 Location: WATERDOWN  
 Model: VALLEYCREEK 11  
 Lot #:   
 Elevation: 3






Job Track: 51225  
 PlanLog: 202427  
 Layout ID: 408265  
 Ref #  
 Page: 1 of 3  
 Date: 04-28-2020  
 Designer: Andrew Conway  
 Sales Rep: Mario DiCano

### Roof Trusses

| PROFILE | QTY<br>PLY | MARK<br>TYPE      | PITCH | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|---------|------------|-------------------|-------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|         | 1<br>2-ply | T61<br>Hip Girder | 6/12  | 31-05-00 | 4-01-04 | 2 x 6          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 337.31<br>208.00 |                     |                    |
|         | 1          | T62<br>Hip        | 6/12  | 31-05-00 | 5-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 125.05<br>78.50  |                     |                    |
|         | 1          | T63<br>Hip        | 6/12  | 31-05-00 | 6-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 127.69<br>80.00  |                     |                    |
|         | 1          | T64A<br>Hip       | 6/12  | 27-05-08 | 7-01-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-01-12           | 116.61<br>72.17  |                     |                    |
|         | 1          | T65A<br>Hip       | 6/12  | 27-05-08 | 8-01-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-01-12           | 118.67<br>75.00  |                     |                    |
|         | 2          | T66A<br>Common    | 6/12  | 27-05-08 | 9-00-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-01-12           | 228.7<br>143.00  |                     |                    |
|         | 1<br>2-ply | T67<br>Hip Girder | 6/12  | 30-09-00 | 4-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 242.36<br>154.67 |                     |                    |
|         | 1          | T68<br>Hip        | 6/12  | 30-09-00 | 5-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 117.3<br>73.17   |                     |                    |
|         | 1          | T69<br>Hip        | 6/12  | 30-09-00 | 6-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 125.79<br>78.67  |                     |                    |
|         | 1          | T70<br>Hip        | 6/12  | 30-09-00 | 7-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 127.26<br>78.87  |                     |                    |
|         | 1          | T71A<br>Hip       | 6/12  | 25-05-08 | 8-01-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-09-12           | 114.35<br>71.83  |                     |                    |
|         | 4          | T72A<br>Common    | 6/12  | 25-05-08 | 8-10-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-09-12           | 437.74<br>273.33 |                     |                    |
|         | 1<br>2-ply | T73<br>Hip Girder | 6/12  | 30-09-00 | 7-05-08 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 311.1<br>191.33  |                     |                    |
|         | 1<br>2-ply | T74<br>Hip Girder | 6/12  | 31-07-00 | 8-04-00 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 347.84<br>216.33 |                     |                    |

|                                                                                                                                                                     |                   |  |  |  |                                                                                                                                                                      |  |                                                                                                                                                             |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  <p><b>TAMARACK</b><br/>ROOF TRUSSES INC.<br/><small>ALUM LUMBER GROUP</small></p> | DELIVERY SHIPLIST |  |  |  | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 3 |  | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408265<br>Ref #<br>Page: 2 of 3<br>Date: 04-28-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |  |
|                                                                                                                                                                     |                   |  |  |  |                                                                                                                                                                      |  |                                                                                                                                                             |  |

### Roof Trusses

| PROFILE                                                                            | QTY<br>PLY | MARK<br>TYPE              | PITCH | SPAN     | HEIGHT  | LUMBER         | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.     | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|------------------------------------------------------------------------------------|------------|---------------------------|-------|----------|---------|----------------|---------------------------|------------------------------|------------------|---------------------|--------------------|
|    | 1<br>2-ply | T75<br>Hip Girder         | 6 /12 | 31-07-00 | 7-04-00 | 2 x 4<br>2 x 6 | 1-03-08                   | 1-02-00<br>1-02-00           | 328.25<br>206.67 |                     |                    |
|    | 1<br>2-ply | T76<br>Hip Girder         | 6 /12 | 31-05-00 | 6-04-08 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 294.4<br>182.00  |                     |                    |
|    | 1          | T77<br>Half Hip<br>Girder | 6 /12 | 10-09-00 | 4-11-04 | 2 x 4          |                           | 3-00-00<br>4-11-04           | 52.41<br>34.17   |                     |                    |
|    | 1<br>2-ply | T78<br>Half Hip<br>Girder | 6 /12 | 10-09-00 | 5-11-04 | 2 x 4<br>2 x 6 |                           | 3-00-00<br>5-11-04           | 116.75<br>75.00  |                     |                    |
|   | 1          | T79<br>Half Hip<br>Girder | 6 /12 | 3-10-08  | 3-11-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>3-11-04           | 25.08<br>17.83   |                     |                    |
|  | 1          | T80<br>Hip Girder         | 6 /12 | 8-08-00  | 4-05-04 | 2 x 4          |                           | 1-02-00<br>1-02-00           | 36.5<br>25.00    |                     |                    |
|  | 1<br>2-ply | T81<br>Common<br>Girder   | 6 /12 | 8-08-00  | 5-02-00 | 2 x 4<br>2 x 6 |                           | 3-00-00<br>3-00-00           | 86.69<br>56.33   |                     |                    |
|  | 1          | T82<br>Hip Girder         | 6 /12 | 19-06-00 | 4-01-04 | 2 x 4<br>2 x 6 | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 91.56<br>58.33   |                     |                    |
|  | 1          | T83<br>Hip Girder         | 6 /12 | 12-07-00 | 4-01-04 | 2 x 4          | 1-03-08<br>1-03-08        | 1-02-00<br>1-02-00           | 57.8<br>39.00    |                     |                    |
|  | 18         | J1<br>Jack-Open           | 6 /12 | 5-10-08  | 4-01-04 | 2 x 4          | 1-03-08                   | 1-02-00<br>4-01-04           | 302.3<br>192.00  |                     |                    |
|  | 6          | J61<br>Jack-Open          | 6 /12 | 1-10-15  | 2-01-08 | 2 x 4          | 1-03-08<br>3-11-09        | 1-02-00<br>2-01-08           | 70.45<br>44.00   |                     |                    |
|  | 6          | J62<br>Jack-Open          | 6 /12 | 3-10-15  | 3-01-08 | 2 x 4          | 1-03-08<br>1-11-09        | 1-02-00<br>3-01-08           | 85.75<br>52.00   |                     |                    |
|  | 7          | J63<br>Jack-Open          | 6 /12 | 1-10-15  | 2-01-08 | 2 x 4          | 1-03-08<br>1-01           | 1-02-00<br>2-01-08           | 51.26<br>32.67   |                     |                    |
|  | 6          | J64<br>Jack-Open          | 6 /12 | 2-00-00  | 3-01-08 | 2 x 4          | 1-03-08<br>1-10-15        | 1-02-00<br>2-02-00           | 59.24<br>36.00   |                     |                    |

|                                                                                                                                                                      |                                                                                                                                                                      |                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>TAMARACK</b><br/>ROOF TRUSSES INC.<br/><small>ALPHA LUMBER SPOON</small></p> | DELIVERY SHIPLIST                                                                                                                                                    |                                                                                                                                                             |
|                                                                                                                                                                      | Lumber Yard: TAMARACK LUMBER<br>Builder: GREEN PARK HOMES<br>Project: RUSSELL GARDENS PH.3<br>Location: WATERDOWN<br>Model: VALLEYCREEK 11<br>Lot #:<br>Elevation: 3 | Job Track: 51225<br>PlanLog: 202427<br>Layout ID: 408265<br>Ref #<br>Page: 3 of 3<br>Date: 04-28-2020<br>Designer: Andrew Conway<br>Sales Rep: Mario DiCano |

### Roof Trusses

| PROFILE                                                                             | QTY<br>PLY | MARK<br>TYPE      | PITCH | SPAN    | HEIGHT  | LUMBER | OVERHANG<br>LEFT<br>RIGHT | HEEL HEIGHT<br>LEFT<br>RIGHT | LBS.<br>BFT.   | BUNDLE #<br>STACK # | LOAD BY<br>REMARKS |
|-------------------------------------------------------------------------------------|------------|-------------------|-------|---------|---------|--------|---------------------------|------------------------------|----------------|---------------------|--------------------|
|    | 2          | J66<br>Jack-Open  | 6 /12 | 1-10-15 | 2-01-08 | 2 x 4  | 1-03-08<br>11-09          | 1-02-00<br>2-01-08           | 16.64<br>10.67 |                     |                    |
|    | 2          | J67<br>Jack-Open  | 6 /12 | 2-10-08 | 2-07-04 | 2 x 4  | 1-03-08                   | 1-02-00<br>2-07-04           | 19.1<br>12.00  |                     |                    |
|    | 1          | J68<br>Jack-Open  | 6 /12 | 1-10-08 | 3-11-04 | 2 x 4  |                           | 3-00-00<br>3-11-04           | 10.01<br>6.83  |                     |                    |
|    | 1          | J69<br>Jack-Open  | 6 /12 | 1-10-08 | 2-01-04 | 2 x 4  | 1-03-08                   | 1-02-00<br>2-01-04           | 7.13<br>4.67   |                     |                    |
|   | 4          | J70S<br>Jack-Open | 6 /12 | 3-10-08 | 4-11-04 | 2 x 4  | 1-03-08                   | 1-02-00<br>4-11-04           | 82.51<br>56.67 |                     |                    |
|  | 1          | J71<br>Jack-Open  | 6 /12 | 2-00-00 | 3-11-08 | 2 x 4  | 1-03-08                   | 1-02-00<br>2-02-00           | 10.92<br>7.00  |                     |                    |

TOTAL # TRUSS= 89

TOTAL BFT OF ALL TRUSSES= 2943.51

BFT.

TOTAL WEIGHT OF ALL TRSSES 4682.51 LBS

### HARDWARE


| QTY | TYPE     | MODEL    | LENGTH |
|-----|----------|----------|--------|
| 13  | Hardware | LJS26DS  |        |
| 9   | Hardware | LUS24    |        |
| 6   | Hardware | HGUS26-2 |        |

TOTAL NUMBER OF  
ITEMS=

28

| JOB NAME                        | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
|---------------------------------|------------|----------|-----|------------------|----------|
| 408263                          | T1         | 1        | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            |          |     | TRUSS DESC.      |          |

Version 8.310 S Oct 25 2019 Mitek Industries, Inc. Thu Apr 23 14:59:48 2020 Page 1  
 ID: d8N118s0ExSc8K00Orbmazjvel-C46NP1taMiaPbgA\_eC0tNIXMTAFMX5hke/ny2zNpVR  
 1-3-8 0-0 4-0-10 5-8-9 9-9-3 5-7-5 15-4-8 20-11-13 5-8-9 26-9-5 4-0-11 30-9-0 32-0-8  
 Scale = 1:50.9

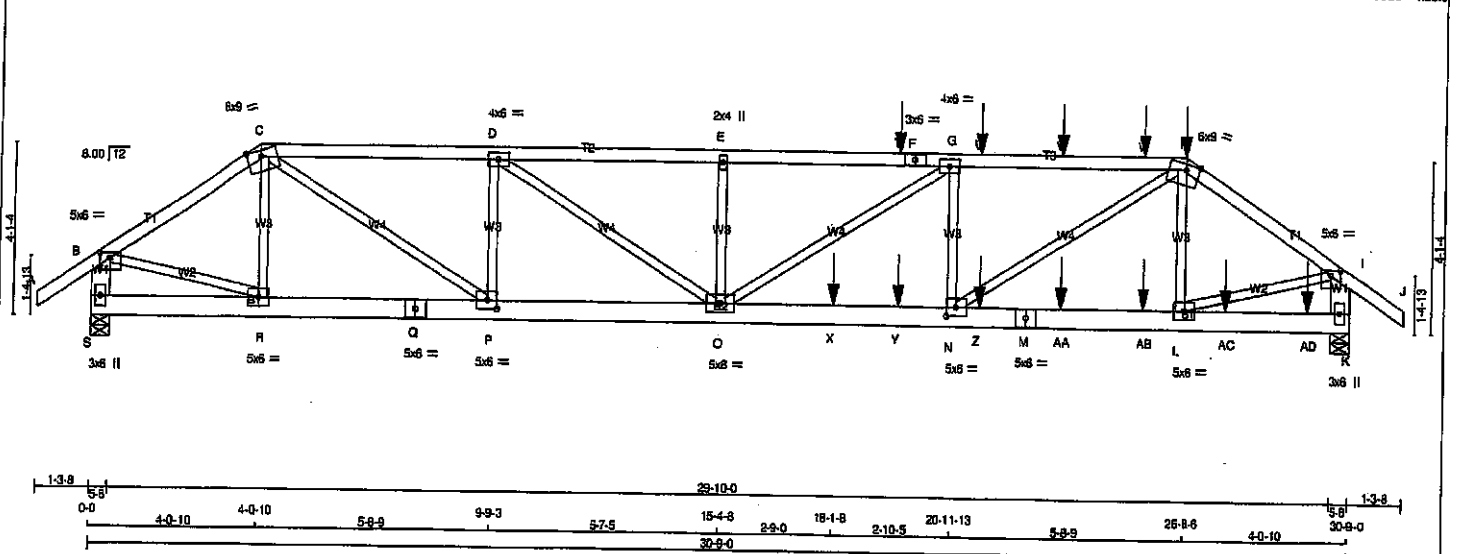

| LUMBER | N. L. G. A. RULES | CHORDS | SIZE       | LUMBER | DESCR. |
|--------|-------------------|--------|------------|--------|--------|
| A - C  | 2x4               | DRY    | No.2       | SPF    |        |
| C - F  | 2x4               | DRY    | No.2       | SPF    |        |
| F - H  | 2x4               | DRY    | No.2       | SPF    |        |
| H - J  | 2x4               | DRY    | No.2       | SPF    |        |
| S - B  | 2x6               | DRY    | No.2       | SPF    |        |
| K - I  | 2x6               | DRY    | No.2       | SPF    |        |
| S - Q  | 2x6               | DRY    | 1650F 1.5E | SPF    |        |
| Q - M  | 2x6               | DRY    | 1650F 1.5E | SPF    |        |
| M - K  | 2x6               | DRY    | 1650F 1.5E | SPF    |        |

ALL WEBS 2x3 DRY No.2  
 EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A-C 1                                    | 12                   | TOP        |
| C-F 1                                    | 12                   | SIDE(0.0)  |
| F-H 1                                    | 12                   | SIDE(61.0) |
| H-J 1                                    | 12                   | SIDE(61.0) |
| S-B 2                                    | 12                   | TOP        |
| K-I 1                                    | 12                   | TOP        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| S-Q 2                                    | 12                   | TOP        |
| Q-M 2                                    | 12                   | SIDE(0.0)  |
| M-K 2                                    | 12                   | SIDE(0.0)  |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3 1                                    | 6                    |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----------|-------------------------|---------------------------------|-----------|----------|
| JT       | VERT 2605               | DOWN 2605                       | 0         | 5-8      |
| S        | 0                       | 0                               | 0         | 5-8      |
| K        | 3401                    | 0                               | 0         | 5-8      |

| UNFACTORED REACTIONS | 1ST LOASE     | MAX. MIN. COMPONENT REACTIONS      |
|----------------------|---------------|------------------------------------|
| JT                   | COMBINED SNOW | LIVE PERM. LIVE WIND DEAD SOIL     |
| S                    | 1838          | 1234 / 0 0 / 0 0 / 0 604 / 0 0 / 0 |
| K                    | 2400          | 1605 / 0 0 / 0 0 / 0 795 / 0 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING  
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.20 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING  
 TOTAL LOAD CASES: (4)

| CHORDS | MEMB.     | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (FT) | WEBS  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (FT) |
|--------|-----------|---------------------------|---------------------------|---------------------------|-------|-------|---------------------------|---------------------------|
| A-B    | 0 / 35    | -91.8                     | -91.8                     | 0.07 (1)                  | 10.00 | R-C   | -431 / 0                  | 0.05 (1)                  |
| B-C    | -307 / 0  | -91.8                     | -91.8                     | 0.19 (1)                  | 5.13  | C-P   | 0 / 3123                  | 0.39 (1)                  |
| C-D    | -5112 / 0 | -91.8                     | -91.8                     | 0.40 (1)                  | 3.96  | P-D   | -1778 / 0                 | 0.23 (1)                  |
| D-E    | -6906 / 0 | -91.8                     | -91.8                     | 0.52 (1)                  | 3.38  | D-O   | 0 / 2154                  | 0.27 (1)                  |
| E-T    | -6906 / 0 | -91.8                     | -91.8                     | 0.66 (1)                  | 3.20  | O-E   | -461 / 0                  | 0.08 (1)                  |
| T-F    | -6906 / 0 | -91.8                     | -91.8                     | 0.68 (1)                  | 3.20  | G-G   | 0 / 427                   | 0.05 (1)                  |
| F-G    | -6906 / 0 | -91.8                     | -91.8                     | 0.66 (1)                  | 3.20  | N-G   | -1129 / 0                 | 0.14 (1)                  |
| G-U    | -6550 / 0 | -91.8                     | -91.8                     | 0.64 (1)                  | 3.30  | N-H   | 0 / 3896                  | 0.48 (1)                  |
| U-V    | -6550 / 0 | -91.8                     | -91.8                     | 0.64 (1)                  | 3.30  | L-H   | -765 / 0                  | 0.10 (1)                  |
| V-W    | -6550 / 0 | -91.8                     | -91.8                     | 0.64 (1)                  | 3.30  | B-R   | 0 / 2577                  | 0.32 (1)                  |
| W-H    | -6550 / 0 | -91.8                     | -91.8                     | 0.64 (1)                  | 3.30  | L-I   | 0 / 3399                  | 0.42 (1)                  |
| H-I    | -3979 / 0 | -91.8                     | -91.8                     | 0.22 (1)                  | 4.57  |       |                           |                           |
| I-J    | 0 / 35    | -91.8                     | -91.8                     | 0.07 (1)                  | 10.00 |       |                           |                           |
| S-B    | -2592 / 0 | 0.0                       | 0.0                       | 0.09 (1)                  | 7.81  |       |                           |                           |
| K-I    | -3320 / 0 | 0.0                       | 0.0                       | 0.12 (1)                  | 7.63  |       |                           |                           |
| S-R    | 0 / 0     | -18.5                     | -18.5                     | 0.03 (1)                  | 10.00 |       |                           |                           |
| R-Q    | 0 / 2494  | -18.5                     | -18.5                     | 0.15 (1)                  | 10.00 |       |                           |                           |
| Q-P    | 0 / 2494  | -18.5                     | -18.5                     | 0.15 (1)                  | 10.00 |       |                           |                           |
| P-O    | 0 / 5112  | -18.5                     | -18.5                     | 0.34 (1)                  | 10.00 |       |                           |                           |
| O-X    | 0 / 6550  | -18.5                     | -18.5                     | 0.67 (1)                  | 10.00 |       |                           |                           |
| X-Y    | 0 / 6550  | -18.5                     | -18.5                     | 0.67 (1)                  | 10.00 |       |                           |                           |
| Y-N    | 0 / 6550  | -18.5                     | -18.5                     | 0.67 (1)                  | 10.00 |       |                           |                           |
| N-Z    | 0 / 3284  | -18.5                     | -18.5                     | 0.27 (1)                  | 10.00 |       |                           |                           |
| Z-M    | 0 / 3284  | -18.5                     | -18.5                     | 0.27 (1)                  | 10.00 |       |                           |                           |
| M-AA   | 0 / 3284  | -18.5                     | -18.5                     | 0.27 (1)                  | 10.00 |       |                           |                           |
| AA-AB  | 0 / 3284  | -18.5                     | -18.5                     | 0.27 (1)                  | 10.00 |       |                           |                           |
| AB-L   | 0 / 3284  | -18.5                     | -18.5                     | 0.27 (1)                  | 10.00 |       |                           |                           |
| L-AC   | 0 / 0     | -18.5                     | -18.5                     | 0.03 (1)                  | 10.00 |       |                           |                           |
| AC-AD  | 0 / 0     | -18.5                     | -18.5                     | 0.03 (1)                  | 10.00 |       |                           |                           |
| AD-K   | 0 / 0     | -18.5                     | -18.5                     | 0.03 (1)                  | 10.00 |       |                           |                           |

| FACTORED CONCENTRATED LOADS (LBS) | LOC.   | LC1   | MAX.  | FACE  | DIF. | TYPE  | HEEL | CONN. |
|-----------------------------------|--------|-------|-------|-------|------|-------|------|-------|
| JT                                | 26-8-5 | -50   | -56   | FRONT | VERT | DEAD  | ---  | C1    |
| H                                 | 26-8-5 | -263  | -263  | FRONT | VERT | SNOW  | ---  | C1    |
| T                                 | 19-8-4 | -110  | -110  | FRONT | VERT | TOTAL | ---  | C1    |
| U                                 | 21-8-4 | -110  | -110  | FRONT | VERT | TOTAL | ---  | C1    |
| V                                 | 23-8-4 | -110  | -110  | FRONT | VERT | TOTAL | ---  | C1    |
| W                                 | 25-8-4 | -110  | -110  | FRONT | VERT | TOTAL | ---  | C1    |
| X                                 | 18-1-8 | -1452 | -1452 | FRONT | VERT | TOTAL | ---  | C1    |
| Y                                 | 19-8-4 | -26   | -26   | FRONT | VERT | TOTAL | ---  | C1    |
| Z                                 | 21-8-4 | -26   | -26   | FRONT | VERT | TOTAL | ---  | C1    |

TOTAL WEIGHT = 2 X 140 = 279 lb

DESIGN CRITERIA  
 \*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
 GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
 LOADS WERE DERIVED FROM USER INPUT  
 NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:  
 TOP CH. LL = 25.6 PSF  
 DL = 6.0 PSF  
 BOT CH. LL = 0.0 PSF  
 DL = 7.4 PSF  
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

\*\*\* NON STANDARD GIRDER \*\*\*  
 ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
 - PART 9 OF CBC 2018, OBC 2012, ABC 2019  
 - PART 9 OF OBC 2012 (2019 AMENDMENT)  
 - CSA 088-08, CSA 086-14  
 - TPIG 2011, TPIG 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.02")  
 CALCULATED VERT. DEFL.(LL) = L/899 (0.21")  
 ALLOWABLE DEFL.(TL) = L/360 (1.02")  
 CALCULATED VERT. DEFL.(TL) = L/970 (0.38")

CSI: TC=0.66/1.00 (E-G:1), BC=0.67/1.00 (N-O:1), WB=0.48/1.00 (H-N:1), SS=0.26/1.00 (N-O:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

| NAIL VALUES | PLATE GRIP (DRY) | SHEAR   | SECTION            |
|-------------|------------------|---------|--------------------|
|             | (PSI)            | (PLI)   | (PLI)              |
|             | MAX MIN          | MAX MIN | MAX MIN            |
| MT20        | 618              | 354     | 1667 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.85 (R) (INPUT = 0.90)  
 JSI METAL = 0.41 (R) (INPUT = 1.00)



Structural component only  
 DWG# T-2006760

|                                 |                  |               |          |                               |          |
|---------------------------------|------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408263              | TRUSS NAME<br>T1 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
| Tamarack Roof Truss, Burlington |                  |               |          | TRUSS DESC.                   |          |

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 14:59:46 2020 Page 2  
 ID:BN118c0ExSc8K0QOrbmazivl-C46NP11aMiaPbgA\_eC0tNXMTARMX5hKEINy2zNpVH

**PLATES (table is in inches)**


| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-p | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| C  | TTWW-m | MT20   | 6.0 | 9.0 | 1.75 | 4.00 |
| D  | TMWW-l | MT20   | 4.0 | 6.0 |      |      |
| E  | TMW-w  | MT20   | 2.0 | 4.0 |      |      |
| F  | TS-l   | MT20   | 3.0 | 6.0 |      |      |
| G  | TMWW-l | MT20   | 4.0 | 6.0 |      |      |
| H  | TTWW-m | MT20   | 6.0 | 9.0 | 1.75 | 4.00 |
| I  | TMVW-p | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| K  | BMV1+p | MT20   | 3.0 | 6.0 |      |      |
| L  | BMWW-l | MT20   | 5.0 | 6.0 |      |      |
| M  | BS-l   | MT20   | 5.0 | 6.0 |      |      |
| N  | BMWW-l | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |
| O  | BMWW-l | MT20   | 5.0 | 6.0 |      |      |
| P  | BMWW-l | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |
| Q  | BS-l   | MT20   | 5.0 | 6.0 |      |      |
| R  | BMWW-l | MT20   | 5.0 | 6.0 |      |      |
| S  | BMV1+p | MT20   | 3.0 | 6.0 |      |      |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| AA | 23-8-4 | -26 | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AB | 25-8-4 | -26 | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AC | 27-8-4 | -26 | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AD | 29-8-4 | -26 | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only  
 DWG# T-2006760

|                           |                         |                      |                 |                                      |             |          |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T2</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Thu Apr 23 14:59:47 2020 Page 1  
ID: d8N118o0ExSc8K000rbmazjvel-gGldDVLfgR11FNyLlFCaEqgIZM503ryuPwUVzNoVQ

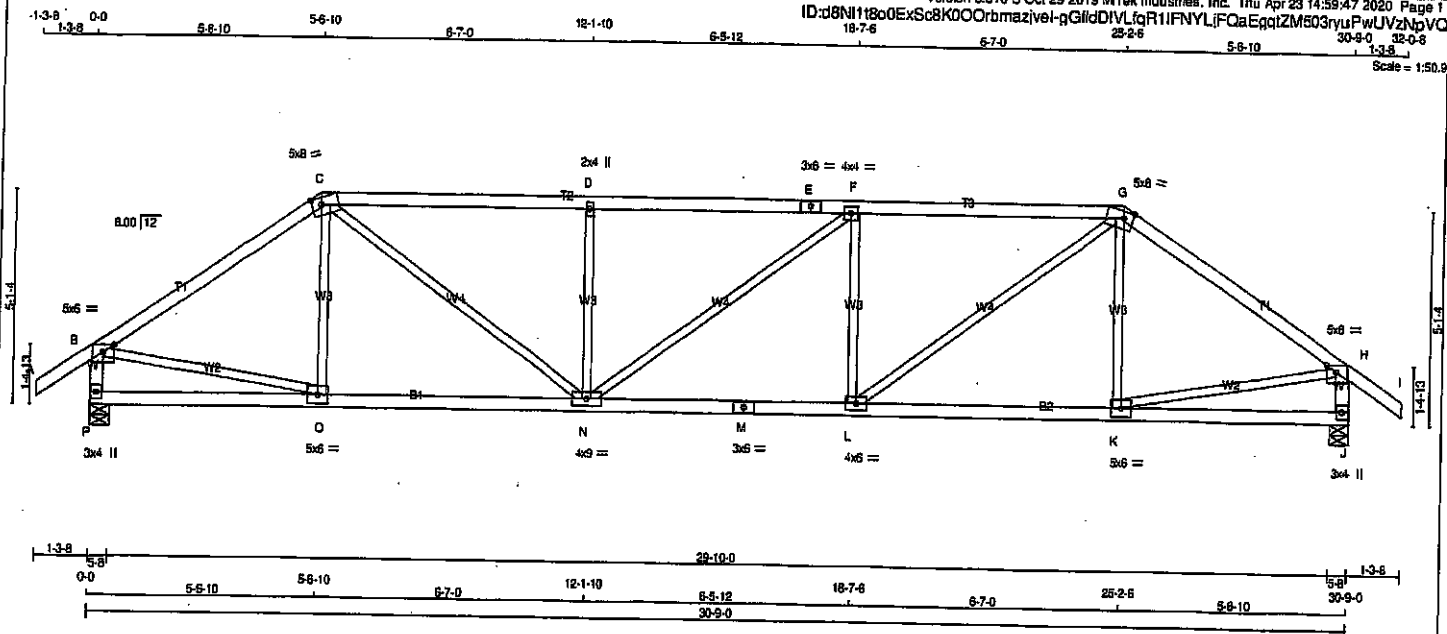

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR.   |
|--------|------|--------|----------|
| A - C  | 2x4  | DRY    | No.2 SPF |
| E - G  | 2x4  | DRY    | No.2 SPF |
| E - I  | 2x4  | DRY    | No.2 SPF |
| P - B  | 2x4  | DRY    | No.2 SPF |
| P - H  | 2x4  | DRY    | No.2 SPF |
| P - M  | 2x4  | DRY    | No.2 SPF |
| M - J  | 2x4  | DRY    | No.2 SPF |

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE     | PLATES | W   | LEN | Y    | X    |
|----|----------|--------|-----|-----|------|------|
| B  | TMVW-p   | MT20   | 5.0 | 8.0 | Edge |      |
| C  | TTWW-m   | MT20   | 5.0 | 8.0 | 2.00 | 2.75 |
| D  | TMVW-w   | MT20   | 2.0 | 4.0 |      |      |
| E  | TS-t     | MT20   | 3.0 | 6.0 |      |      |
| F  | TMVW-t   | MT20   | 4.0 | 4.0 |      |      |
| G  | TTWW-m   | MT20   | 5.0 | 8.0 | 2.00 | 2.75 |
| H  | TMVW-p   | MT20   | 5.0 | 8.0 | Edge |      |
| J  | BMV1+p   | MT20   | 3.0 | 4.0 |      |      |
| K  | BMVW-t   | MT20   | 5.0 | 6.0 |      |      |
| L  | BMVW-t   | MT20   | 4.0 | 6.0 |      |      |
| M  | BS-t     | MT20   | 3.0 | 6.0 |      |      |
| N  | BMVW-w-t | MT20   | 4.0 | 9.0 |      |      |
| O  | BMVW-t   | MT20   | 5.0 | 6.0 |      |      |
| P  | BMV1+p   | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ       |
| P  | 1821                    | 0                               | 1821      | 0          |
| J  | 1821                    | 0                               | 1821      | 0          |

##### UNFACTORED REACTIONS

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS |       |      |            |      |       |      |
|----------|-------------------------------|-------|------|------------|------|-------|------|
| JT       | COMBINED                      | SNOW  | LIVE | PERM. LIVE | WIND | DEAD  | SOIL |
| P        | 1285                          | 857.0 | 0.0  | 0.0        | 0.0  | 429.0 | 0.0  |
| J        | 1285                          | 857.0 | 0.0  | 0.0        | 0.0  | 429.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, J

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.42 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                           | WEBS  |                           |                           |          |
|--------|---------------------------|---------------------------|---------------------------|-------|---------------------------|---------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (LC) |          |
| FR-TO  |                           | FROM TO                   |                           | FR-TO |                           |                           |          |
| A-B    | 0 / 35                    | -91.8                     | -91.8 0.12 (1)            | 10.00 | O-C                       | -184 / 33                 | 0.07 (1) |
| B-C    | -1958 / 0                 | -91.8                     | -91.8 0.65 (1)            | 4.09  | C-N                       | 0 / 1302                  | 0.29 (1) |
| C-D    | -2677 / 0                 | -91.8                     | -91.8 0.80 (1)            | 3.43  | N-D                       | -850 / 0                  | 0.25 (1) |
| D-E    | -2677 / 0                 | -91.8                     | -91.8 0.80 (1)            | 3.42  | N-F                       | -2 / 0                    | 0.00 (1) |
| E-F    | -2677 / 0                 | -91.8                     | -91.8 0.80 (1)            | 3.42  | L-F                       | -650 / 0                  | 0.25 (1) |
| F-G    | -2677 / 0                 | -91.8                     | -91.8 0.81 (1)            | 3.42  | L-G                       | 0 / 1304                  | 0.29 (1) |
| G-H    | -1958 / 0                 | -91.8                     | -91.8 0.65 (1)            | 4.09  | K-G                       | -185 / 33                 | 0.07 (1) |
| H-I    | 0 / 35                    | -91.8                     | -91.8 0.12 (1)            | 10.00 | B-O                       | 0 / 1657                  | 0.37 (1) |
| P-B    | -1780 / 0                 | 0.0                       | 0.0 0.18 (1)              | 6.26  | K-H                       | 0 / 1656                  | 0.37 (1) |
| J-H    | -1780 / 0                 | 0.0                       | 0.0 0.18 (1)              | 6.26  |                           |                           |          |
| P-O    | 0 / 0                     | -18.5                     | -18.5 0.16 (4)            | 10.00 |                           |                           |          |
| O-N    | 0 / 1823                  | -18.5                     | -18.5 0.35 (1)            | 10.00 |                           |                           |          |
| N-M    | 0 / 2677                  | -18.5                     | -18.5 0.50 (1)            | 10.00 |                           |                           |          |
| M-L    | 0 / 2677                  | -18.5                     | -18.5 0.50 (1)            | 10.00 |                           |                           |          |
| L-K    | 0 / 1823                  | -18.5                     | -18.5 0.35 (1)            | 10.00 |                           |                           |          |
| K-J    | 0 / 0                     | -18.5                     | -18.5 0.16 (4)            | 10.00 |                           |                           |          |

TOTAL WEIGHT = 121 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |            |
|------------|----|------------|
| TOP CH.    | LL | = 25.6 PSF |
|            | DL | = 6.0 PSF  |
| BOT CH.    | LL | = 0.0 PSF  |
|            | DL | = 7.4 PSF  |
| TOTAL LOAD |    | = 39.0 PSF |

SPACING = 24.0 IN. O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(5% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (1.02")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.13")  
ALLOWABLE DEFL.(TL) =  $L/360$  (1.02")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.26")

CSI:  $TC=0.81/1.00$  (F-G:1),  $BC=0.50/1.00$  (L-N:1),  $WB=0.37/1.00$  (B-O:1),  $SS=0.28/1.00$  (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR (PSI) | SECTION (PLI)      |
|-------|-----------|-------------|--------------------|
| MT20  | 818       | 354         | 1687 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.88 (G) (INPUT = 0.90)  
JSI METAL = 0.87 (M) (INPUT = 1.00)



Structural component only  
DWG# T-2006761

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T2X</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:46 2020 Page 1  
ID:d8N118o0ExSc8K00O0bmazjvel-8TD8qZJ76zyfivqZ63EUzonrKHuOqSw\_BY9T0xzNpVP  
18-7-6 25-2-6 30-9-0 32-0-8 1-3-8  
Scale = 1:51.7

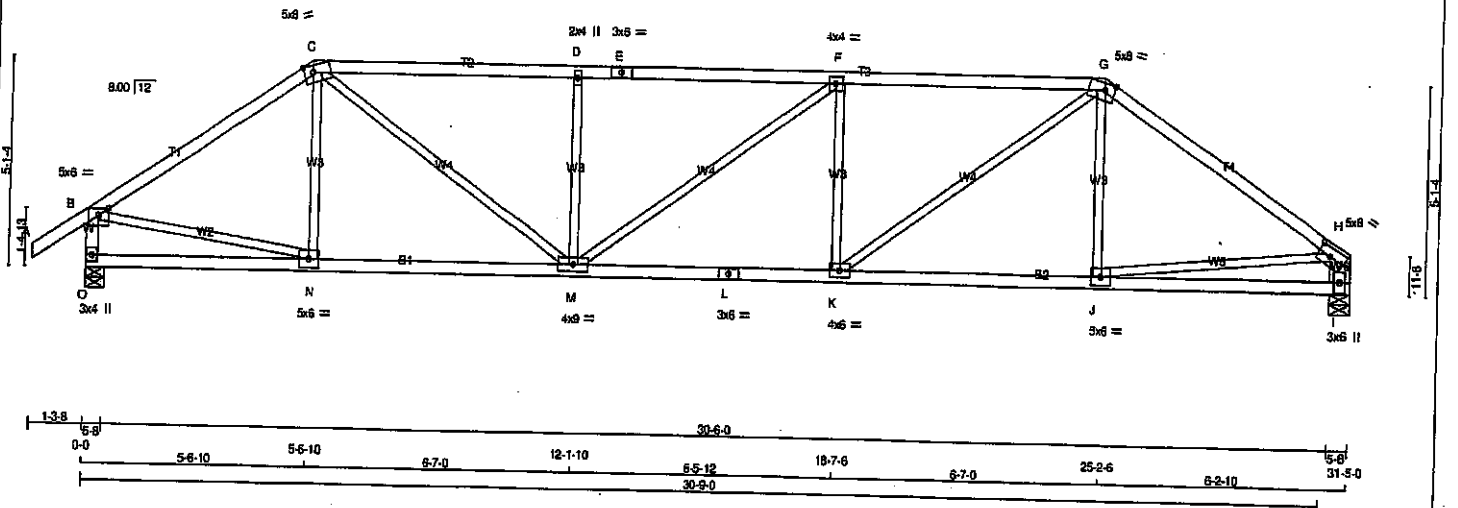

| LUMBER                |        |      |        |
|-----------------------|--------|------|--------|
| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER |
| A - C                 | 2x4    | DRY  | No.2   |
| C - E                 | 2x4    | DRY  | No.2   |
| E - G                 | 2x4    | DRY  | No.2   |
| G - H                 | 2x4    | DRY  | No.2   |
| O - B                 | 2x4    | DRY  | No.2   |
| O - L                 | 2x4    | DRY  | No.2   |
| L - I                 | 2x4    | DRY  | No.2   |
| ALL WEBS EXCEPT I - H | 2x3    | DRY  | No.2   |
| DRY: SEASONED LUMBER. |        |      |        |

| PLATES (table is in inches) |        |        |     |     |           |
|-----------------------------|--------|--------|-----|-----|-----------|
| JT                          | TYPE   | PLATES | W   | LEN | Y X       |
| B                           | TMVW-p | MT20   | 5.0 | 6.0 | Edge      |
| C                           | TTWW-m | MT20   | 5.0 | 8.0 | 2.00 2.75 |
| D                           | TMVW-w | MT20   | 2.0 | 4.0 |           |
| E                           | TS-i   | MT20   | 3.0 | 6.0 |           |
| F                           | TMVW-i | MT20   | 4.0 | 4.0 |           |
| G                           | TTWW-m | MT20   | 5.0 | 8.0 | 2.00 3.00 |
| H                           | TMVW-i | MT20   | 5.0 | 8.0 | 2.50 3.75 |
| I                           | BMVW-i | MT20   | 3.0 | 6.0 |           |
| J                           | BMVW-i | MT20   | 5.0 | 6.0 |           |
| K                           | BMVW-i | MT20   | 4.0 | 6.0 |           |
| L                           | BS-i   | MT20   | 3.0 | 6.0 |           |
| M                           | BMVW-i | MT20   | 4.0 | 9.0 |           |
| N                           | BMVW-i | MT20   | 5.0 | 6.0 |           |
| O                           | BMVW-i | MT20   | 3.0 | 4.0 |           |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| FACTORED       |      | MAXIMUM FACTORED |      | INPUT |        | RECORD |       |
|----------------|------|------------------|------|-------|--------|--------|-------|
| GROSS REACTION |      | GROSS REACTION   |      | BRG   |        | BRG    |       |
| JT             | VERT | HORZ             | DOWN | HORZ  | UPLIFT | IN-SX  | IN-SX |
| O              | 1845 | 0                | 1845 | 0     | 0      | 5-8    | 5-8   |
| I              | 1719 | 0                | 1719 | 0     | 0      | 5-8    | 5-8   |

| UNFACTORED REACTIONS |          | MAX./MIN. COMPONENT REACTIONS |       |
|----------------------|----------|-------------------------------|-------|
| JT                   | COMBINED | SNOW                          | LIVE  |
| O                    | 1303     | 868 / 0                       | 0 / 0 |
| I                    | 1216     | 798 / 0                       | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O, I

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.36 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           | FACTORED         |                | WEBS  |                           |
|--------|---------------------------|------------------|----------------|-------|---------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. CSI (LC)  | MEMB. | MAX. FACTORED FORCE (LBS) |
| FR-TO  |                           |                  |                | FR-TO |                           |
| A-B    | 0 / 35                    | -91.8            | -91.8 0.12 (1) | N-C   | -189 / 31                 |
| B-C    | -1992 / 0                 | -91.8            | -91.8 0.66 (1) | C-M   | 0 / 1343                  |
| C-D    | -2736 / 0                 | -91.8            | -91.8 0.81 (1) | M-D   | -650 / 0                  |
| D-E    | -2736 / 0                 | -91.8            | -91.8 0.81 (1) | M-F   | -42 / 0                   |
| E-F    | -2736 / 0                 | -91.8            | -91.8 0.81 (1) | K-F   | -826 / 0                  |
| F-G    | -2770 / 0                 | -91.8            | -91.8 0.83 (1) | K-G   | 0 / 1261                  |
| G-H    | -2109 / 0                 | -91.8            | -91.8 0.81 (1) | J-G   | -96 / 88                  |
| C-B    | -1804 / 0                 | 0.0              | 0.0 0.19 (1)   | B-N   | 0 / 1885                  |
|        |                           |                  |                | J-H   | 0 / 1787                  |
|        |                           |                  |                | H-H   | -1674 / 0                 |
| O-N    | 0 / 0                     | -18.5            | -18.5 0.16 (4) |       |                           |
| N-M    | 0 / 1651                  | -18.5            | -18.5 0.35 (1) |       |                           |
| M-L    | 0 / 2770                  | -18.5            | -18.5 0.51 (1) |       |                           |
| L-K    | 0 / 2770                  | -18.5            | -18.5 0.51 (1) |       |                           |
| K-J    | 0 / 1750                  | -18.5            | -18.5 0.38 (1) |       |                           |
| J-I    | 0 / 0                     | -18.5            | -18.5 0.17 (4) |       |                           |

#### DESIGN CRITERIA

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

**LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBC 2010, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 088-09, CSA 088-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.I. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

**ALLOWABLE DEFL. (LL) = L/360 (1.04")**  
**CALCULATED VERT. DEFL. (LL) = L/699 (0.14")**  
**ALLOWABLE DEFL. (TL) = L/360 (1.04")**  
**CALCULATED VERT. DEFL. (TL) = L/999 (0.28")**  
**CSI: TC=0.83/1.00 (F-G:1), EC=0.51/1.00 (K-M:1), WB=0.40/1.00 (H-J:1), SS=0.28/1.00 (F-G:1)**

**DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10**

**COMPANION LIVE LOAD FACTOR = 1.00**

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

| NAIL VALUES      |         |          |           |
|------------------|---------|----------|-----------|
| PLATE GRIP (DRY) | SHEAR   | SECTION  |           |
| (PSI)            | (PLI)   | (PLI)    |           |
| MAX MIN          | MAX MIN | MAX MIN  |           |
| MT20             | 618 354 | 1667 789 | 1987 1656 |

**PLATE PLACEMENT TOL = 0.250 inches**


**PLATE ROTATION TOL = 5.0 Deg.**

**JSI GRIP= 0.90 (C) (INPUT = 0.90)**  
**JSI METAL= 0.90 (L) (INPUT = 1.00)**



Structural component only  
DWG# T-2006762

|                                                                                                                    |                         |                      |                 |                                                                                    |             |          |
|--------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------|-----------------|------------------------------------------------------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b>                                                                                          | TRUSS NAME<br><b>T3</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b>                                               | TRUSS DESC. | DRWG NO. |
| Famerack Roof Truss, Burlington                                                                                    |                         |                      |                 | Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:49 2020 Page 1 |             |          |
| 1-3.8 0-0 3-7.9 3-7.9 3-5.1 7-9-10 5-7-0 12-7-10 5-5-12 18-1-6 5-7-0 23-8-6 3-5-1 27-1-7 3-7-9 30-9-0 32-0-8 1-3.8 |                         |                      |                 | ID: d8N1t8o0ExSc8K00Orbmazjel-cfnW2vKmtH49G3PlimlV?K55hGCZs18QCu1ZNzNpVO           |             |          |
|                                                                                                                    |                         |                      |                 | Scale = 1:50.8                                                                     |             |          |

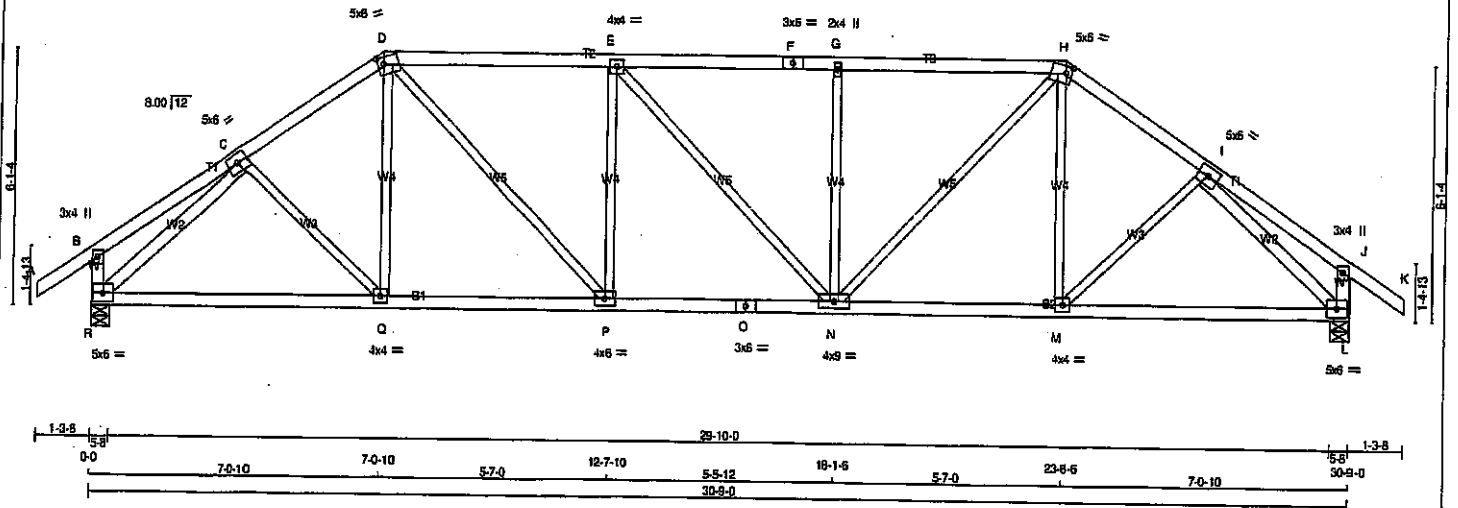

| LUMBER            |      |        |        |
|-------------------|------|--------|--------|
| N. L. G. A. RULES |      |        |        |
| CHORDS            | SIZE | LUMBER | DESCR. |
| A - D             | 2x4  | DRY    | No.2   |
| D - F             | 2x4  | DRY    | No.2   |
| F - H             | 2x4  | DRY    | No.2   |
| H - K             | 2x4  | DRY    | No.2   |
| K - L             | 2x4  | DRY    | No.2   |
| L - J             | 2x4  | DRY    | No.2   |
| J - O             | 2x4  | DRY    | No.2   |
| O - L             | 2x4  | DRY    | No.2   |
| ALL WEBS          | 2x3  | DRY    | No.2   |
| EXCEPT            |      |        |        |
| R - C             | 2x4  | DRY    | No.2   |
| I - L             | 2x4  | DRY    | No.2   |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| C  | TMWW-l | MT20   | 5.0 | 6.0 |      |      |
| D  | TTWW-m | MT20   | 5.0 | 6.0 | 2.00 | 1.75 |
| E  | TMWW-l | MT20   | 4.0 | 4.0 |      |      |
| F  | TS-l   | MT20   | 3.0 | 6.0 |      |      |
| G  | TMW+w  | MT20   | 2.0 | 4.0 |      |      |
| H  | TTWW-m | MT20   | 5.0 | 6.0 | 2.00 | 1.75 |
| I  | TMWW-l | MT20   | 5.0 | 6.0 |      |      |
| J  | TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| L  | BMVW-l | MT20   | 5.0 | 6.0 |      |      |
| M  | BMWW-l | MT20   | 4.0 | 4.0 |      |      |
| N  | BMWW-l | MT20   | 4.0 | 4.0 |      |      |
| O  | BS-l   | MT20   | 3.0 | 6.0 |      |      |
| P  | BMWW-l | MT20   | 4.0 | 6.0 |      |      |
| Q  | BMWW-l | MT20   | 4.0 | 4.0 |      |      |
| R  | BMVW-l | MT20   | 5.0 | 6.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                | FACTORED       | MAXIMUM FACTORED | INPUT | REQD |
|----------|----------------|----------------|------------------|-------|------|
| JT       | GROSS REACTION | GROSS REACTION | DOWN             | BRG   | BRG  |
| R        | 1821 0         | 1821 0         | 0 0              | 5-8   | 5-8  |
| L        | 1821 0         | 1821 0         | 0 0              | 5-8   | 5-8  |

#### UNFACTORED REACTIONS

| JT | 1ST LOASE | MAX./MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERMLIVE | WIND    | DEAD  | SOIL  |
|----|-----------|-------------------------------|-------|-------|----------|---------|-------|-------|
| R  | 1285      | 857 / 0                       | 0 / 0 | 0 / 0 | 0 / 0    | 429 / 0 | 0 / 0 | 0 / 0 |
| L  | 1285      | 857 / 0                       | 0 / 0 | 0 / 0 | 0 / 0    | 429 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, L

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.06 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |             | FACTORED         |                | WEBS  |             | FACTORED      |        |
|--------|-------------|------------------|----------------|-------|-------------|---------------|--------|
| MEMB.  | FORCE (LBS) | VERT. LOAD (PLF) | MAX. CSI (LC)  | MEMB. | FORCE (LBS) | MAX. CSI (LC) | UNBRAC |
| FR-TO  |             |                  |                | FR-TO |             |               |        |
| A-B    | 0 / 35      | -91.8            | -91.8 0.12 (1) | C-Q   | 0 / 71      | 0.02 (4)      |        |
| B-C    | 0 / 19      | -91.8            | -91.8 0.17 (1) | Q-D   | 0 / 108     | 0.04 (4)      |        |
| C-D    | -1949 / 0   | -91.8            | -91.8 0.22 (1) | D-P   | 0 / 891     | 0.20 (1)      |        |
| D-E    | -2223 / 0   | -91.8            | -91.8 0.50 (1) | E-P   | -549 / 0    | 0.32 (1)      |        |
| E-F    | -2221 / 0   | -91.8            | -91.8 0.50 (1) | F-N   | -2 / 0      | 0.09 (1)      |        |
| F-G    | -2221 / 0   | -91.8            | -91.8 0.50 (1) | G-N   | -549 / 0    | 0.32 (1)      |        |
| G-H    | -2221 / 0   | -91.8            | -91.8 0.50 (1) | H-M   | 0 / 889     | 0.20 (1)      |        |
| H-I    | -1950 / 0   | -91.8            | -91.8 0.22 (1) | I-M   | 0 / 107     | 0.04 (4)      |        |
| I-J    | 0 / 19      | -91.8            | -91.8 0.17 (1) | M-I   | 0 / 71      | 0.02 (4)      |        |
| J-K    | 0 / 35      | -91.8            | -91.8 0.12 (1) | R-C   | -2169 / 0   | 0.60 (1)      |        |
| R-B    | -253 / 0    | 0.0              | 0.0 0.03 (1)   | L-L   | -2170 / 0   | 0.60 (1)      |        |
| L-J    | -253 / 0    | 0.0              | 0.0 0.03 (1)   |       |             |               |        |
| R-Q    | 0 / 1554    | -18.5            | -18.5 0.36 (1) |       |             |               |        |
| Q-P    | 0 / 1605    | -18.5            | -18.5 0.37 (1) |       |             |               |        |
| P-O    | 0 / 2223    | -18.5            | -18.5 0.41 (1) |       |             |               |        |
| O-N    | 0 / 2223    | -18.5            | -18.5 0.41 (1) |       |             |               |        |
| N-M    | 0 / 1605    | -18.5            | -18.5 0.37 (1) |       |             |               |        |
| M-L    | 0 / 1554    | -18.5            | -18.5 0.36 (1) |       |             |               |        |

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
BOT CH. LL = 6.0 PSF  
DL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 8, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.09")  
ALLOWABLE DEFL.(TL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.50/1.00 (D-E), BC=0.41/1.00 (N-P), WB=0.80/1.00 (H-L), SS=0.24/1.00 (D-E)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1967 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (I) (INPUT = 0.90)  
JSI METAL= 0.73 (O) (INPUT = 1.00)



Structural component only  
DWG# T-2006763

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T3X</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 | TRUSS DESC.                          |          |

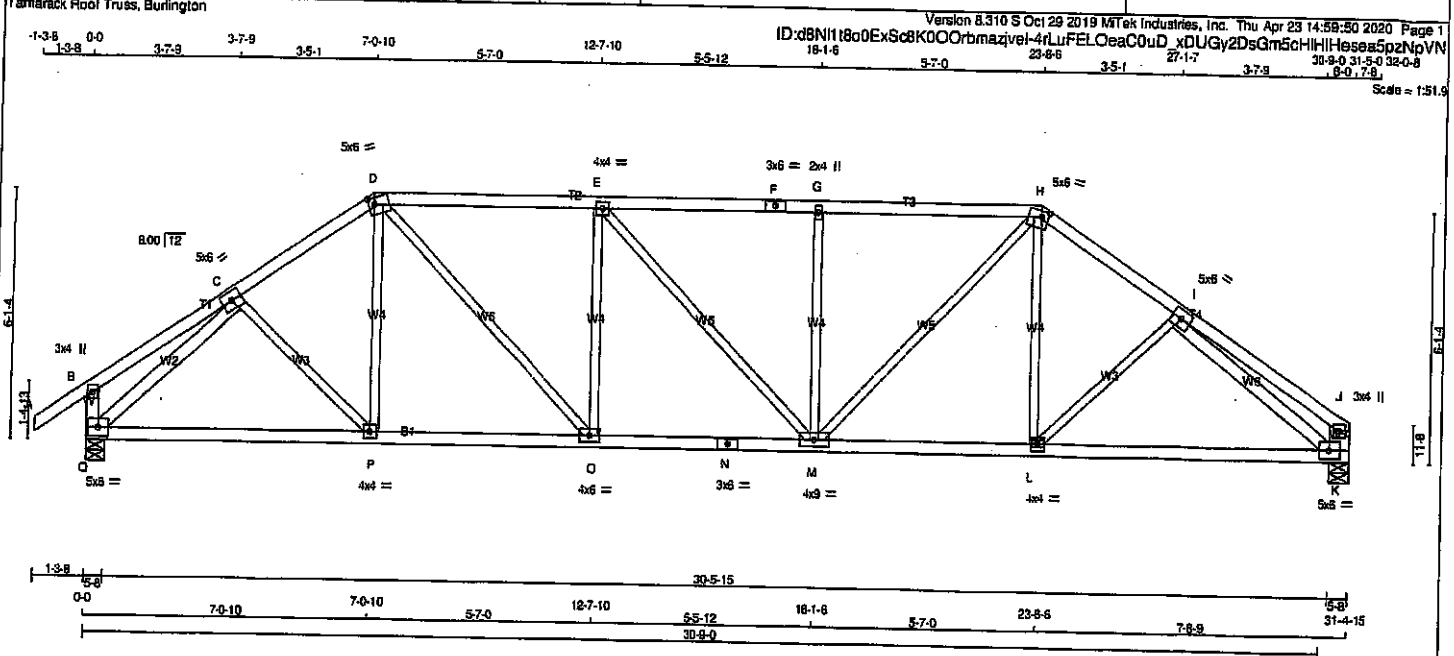

**LUMBER**  
N. L. G. A. RULES

| CHORDS          | SIZE | DRY | LUMBER |
|-----------------|------|-----|--------|
| A - D           | 2x4  | DRY | No.2   |
| D - F           | 2x4  | DRY | No.2   |
| F - H           | 2x4  | DRY | No.2   |
| H - J           | 2x4  | DRY | No.2   |
| J - L           | 2x4  | DRY | No.2   |
| L - N           | 2x4  | DRY | No.2   |
| N - K           | 2x4  | DRY | No.2   |
| ALL WEBS EXCEPT | 2x3  | DRY | No.2   |
| Q - C           | 2x4  | DRY | No.2   |
| I - K           | 2x4  | DRY | No.2   |
| K - J           | 2x6  | DRY | No.2   |

DRY: SEASONED LUMBER.

**PLATES (tablets in inches)**

| JT TYPE | PLATES  | W    | LEN | Y   | X         |
|---------|---------|------|-----|-----|-----------|
| B       | TMV+p   | MT20 | 3.0 | 4.0 |           |
| C       | TMVW-1  | MT20 | 5.0 | 8.0 |           |
| D       | TTWW-m  | MT20 | 5.0 | 8.0 | 2.00 1.75 |
| E       | TMVW-1  | MT20 | 4.0 | 4.0 |           |
| F       | TS-1    | MT20 | 3.0 | 6.0 |           |
| G       | TMVW-w  | MT20 | 2.0 | 4.0 |           |
| H       | TTWW-m  | MT20 | 5.0 | 8.0 | 1.75 2.00 |
| I       | TMVW-1  | MT20 | 5.0 | 6.0 |           |
| J       | TMVW-w  | MT20 | 3.0 | 4.0 |           |
| K       | BMVW-1  | MT20 | 5.0 | 6.0 |           |
| L       | BMVW-1  | MT20 | 4.0 | 4.0 |           |
| M       | BMVWW-1 | MT20 | 4.0 | 9.0 |           |
| N       | BS-1    | MT20 | 3.0 | 6.0 |           |
| O       | BMVW-1  | MT20 | 4.0 | 6.0 |           |
| P       | BMVW-1  | MT20 | 4.0 | 4.0 |           |
| Q       | BMVW-1  | MT20 | 5.0 | 6.0 |           |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | DOWN                            | 5-8       | 5-8        |
| Q  | HORZ                    | UP/LIFT                         | 5-8       | 5-8        |
| K  |                         |                                 |           |            |

**UNFACTORED REACTIONS**

| 1ST LCASE   | MAX/MIN COMPONENT REACTIONS            |
|-------------|----------------------------------------|
| JT COMBINED | SNOW LIVE PERM.LIVE WIND DEAD SOIL     |
| Q           | 1303 888 / 0 0 / 0 0 / 0 0 434.0 0 / 0 |
| K           | 1221 802 / 0 0 / 0 0 / 0 0 419.0 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, K

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                           | WEBS                      |                           |                           |
|--------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS) |
| FR-TO  |                           |                           | FR-TO                     |                           |                           |
| A-B    | 0 / 35                    | -91.8 -91.8 0.12 (1)      | C-P                       | 0 / 74                    | 0.03 (4)                  |
| B-C    | 0 / 19                    | -91.8 -91.8 0.17 (1)      | P-D                       | 0 / 105                   | 0.04 (4)                  |
| C-D    | -1985 / 0                 | -91.8 -91.8 0.22 (1)      | D-O                       | 0 / 925                   | 0.21 (1)                  |
| D-E    | -2275 / 0                 | -91.8 -91.8 0.51 (1)      | O-E                       | -573 / 0                  | 0.34 (1)                  |
| E-F    | -2268 / 0                 | -91.8 -91.8 0.51 (1)      | E-M                       | 0 / 30                    | 0.01 (1)                  |
| F-G    | -2268 / 0                 | -91.8 -91.8 0.51 (1)      | M-G                       | -548 / 0                  | 0.32 (1)                  |
| G-H    | -2268 / 0                 | -91.8 -91.8 0.51 (1)      | M-H                       | 0 / 852                   | 0.19 (1)                  |
| H-I    | -2071 / 0                 | -91.8 -91.8 0.28 (1)      | L-H                       | 0 / 181                   | 0.05 (4)                  |
| I-J    | 0 / 38                    | -91.8 -91.8 0.20 (1)      | L-I                       | -67 / 31                  | 0.03 (1)                  |
| Q-B    | -253 / 0                  | 0.0 0.0 0.03 (1)          | Q-C                       | -2204 / 0                 | 0.61 (1)                  |
|        |                           |                           | I-K                       | -2338 / 0                 | 0.78 (1)                  |
|        |                           |                           | K-J                       | -140 / 0                  | 0.01 (1)                  |
| Q-P    | 0 / 1579                  | -18.5 -18.5 0.37 (1)      |                           |                           |                           |
| P-O    | 0 / 1834                  | -18.5 -18.5 0.37 (1)      |                           |                           |                           |
| O-N    | 0 / 2275                  | -18.5 -18.5 0.42 (1)      |                           |                           |                           |
| N-M    | 0 / 2275                  | -18.5 -18.5 0.42 (1)      |                           |                           |                           |
| M-L    | 0 / 1705                  | -18.5 -18.5 0.40 (1)      |                           |                           |                           |
| L-K    | 0 / 1750                  | -18.5 -18.5 0.41 (1)      |                           |                           |                           |

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. O.C.**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2010, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.04')  
CALCULATED VERT. DEFL.(LL) = L/999 (0.10')  
ALLOWABLE DEFL.(TL) = L/360 (1.04')  
CALCULATED VERT. DEFL.(TL) = L/999 (0.20')

CSI: TC=0.51/1.00 (D-E-1), BC=0.42/1.00 (M-O-1), WB=0.78/1.00 (H-K-1), SS=0.24/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LB BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.




Structural component only  
DWG# T-2006764

|                           |                         |                      |                 |                                      |             |          |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T4</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:52 2020 Page 1

ID:dbN11800ExSc8K0C0rOmazivl-1ETegwMeACSK7W8KLvJQ7eyaOul2mCca6A7h9izNpVL  
30-9-0  
Scale = 1:49.6

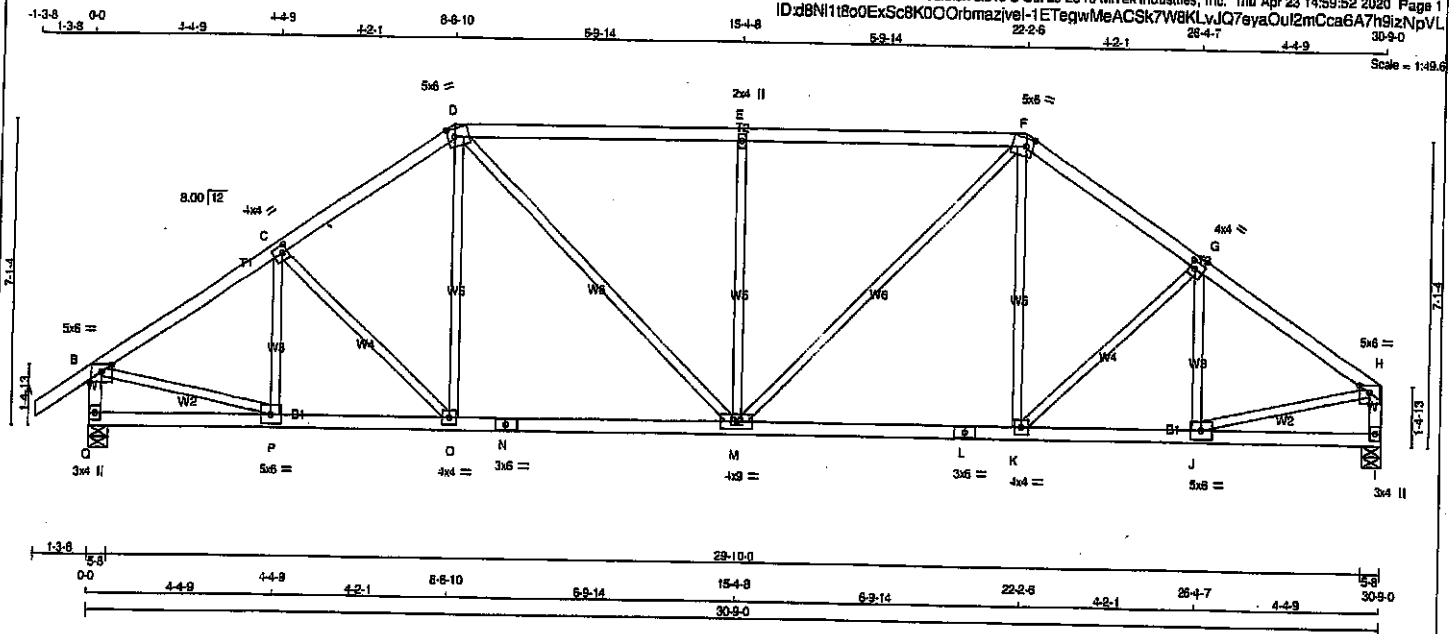

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - D  | 2x4  | DRY | No.2   |
| D - F  | 2x4  | DRY | No.2   |
| F - H  | 2x4  | DRY | No.2   |
| O - B  | 2x4  | DRY | No.2   |
| J - H  | 2x4  | DRY | No.2   |
| Q - N  | 2x4  | DRY | No.2   |
| N - L  | 2x4  | DRY | No.2   |
| L - I  | 2x4  | DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y         | X |
|----|---------|--------|-----|-----|-----------|---|
| B  | TMWV-p  | MT20   | 5.0 | 8.0 | Edge      |   |
| C  | TMWV-t  | MT20   | 4.0 | 4.0 | 2.00 1.50 |   |
| D  | TTWV-m  | MT20   | 5.0 | 6.0 | 2.25 2.00 |   |
| E  | TMWV-w  | MT20   | 2.0 | 4.0 |           |   |
| F  | TTWV-m  | MT20   | 5.0 | 8.0 | 2.25 2.00 |   |
| G  | TMWV-t  | MT20   | 4.0 | 4.0 | 2.00 1.50 |   |
| H  | TMWV-p  | MT20   | 5.0 | 8.0 | Edge      |   |
| I  | BMV1-p  | MT20   | 3.0 | 4.0 |           |   |
| J  | BMWV-t  | MT20   | 5.0 | 8.0 |           |   |
| K  | BMWV-t  | MT20   | 4.0 | 4.0 |           |   |
| L  | BS-1    | MT20   | 3.0 | 6.0 |           |   |
| M  | BMWVW-t | MT20   | 4.0 | 9.0 |           |   |
| N  | BS-1    | MT20   | 3.0 | 6.0 |           |   |
| O  | BMWV-t  | MT20   | 4.0 | 4.0 |           |   |
| P  | BMWV-t  | MT20   | 5.0 | 8.0 |           |   |
| Q  | BMV1-p  | MT20   | 3.0 | 4.0 |           |   |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

##### BUILDING DESIGNER

##### BEARINGS

|    | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
| JT | VERT           | HORZ             | DOWN  | HORZ   |
| Q  | 1821           | 0                | 1821  | 0      |
| I  | 1895           | 0                | 1895  | 0      |

##### UNFACTORED REACTIONS

|    | 1ST CASE | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |
|----|----------|-------------------------------|-------|-----------|-------|---------|-------|
| JT | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
| Q  | 1285     | 857 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 429 / 0 | 0 / 0 |
| I  | 1199     | 787 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 412 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, I

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.03 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |               |            |                | WEBS  |               |          |          |
|--------|---------------|------------|----------------|-------|---------------|----------|----------|
| MEMB.  | MAX. FACTORED | FACTORED   | MAX.           | MEMB. | MAX. FACTORED | FACTORED | MAX.     |
|        | FORCE         | VERT. LOAD | CS1 (LC)       |       | FORCE         | CS1 (LC) |          |
| FR-TO  | (LBS)         | (PLF)      | (LC)           | FR-TO | (LBS)         | (LC)     |          |
| A-B    | 0 / 35        | -91.8      | -91.8 0.12 (1) | 10.00 | P-C           | -332 / 0 | 0.09 (1) |
| B-C    | -1950 / 0     | -91.8      | -91.8 0.26 (1) | 4.60  | C-O           | -133 / 0 | 0.08 (1) |
| C-D    | -1886 / 0     | -91.8      | -91.8 0.25 (1) | 4.67  | O-D           | 0 / 201  | 0.05 (4) |
| D-E    | -1999 / 0     | -91.8      | -91.8 0.63 (1) | 4.03  | O-M           | 0 / 635  | 0.14 (1) |
| E-F    | -1999 / 0     | -91.8      | -91.8 0.63 (1) | 4.03  | M-E           | -789 / 0 | 0.67 (1) |
| F-G    | -1886 / 0     | -91.8      | -91.8 0.25 (1) | 4.67  | M-F           | 0 / 635  | 0.14 (1) |
| G-H    | -1950 / 0     | -91.8      | -91.8 0.26 (1) | 4.60  | K-F           | 0 / 201  | 0.05 (4) |
| H-I    | -1783 / 0     | 0.0        | 0.0 0.18 (1)   | 6.26  | K-G           | -133 / 0 | 0.08 (1) |
| I-H    | -1657 / 0     | 0.0        | 0.0 0.17 (1)   | 8.44  | J-G           | -332 / 0 | 0.09 (1) |
|        |               |            |                |       | B-P           | 0 / 1892 | 0.38 (1) |
|        |               |            |                |       | J-H           | 0 / 1892 | 0.38 (1) |
| Q-P    | 0 / 0         | -18.5      | -18.5 0.08 (4) | 10.00 |               |          |          |
| P-O    | 0 / 1843      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| O-N    | 0 / 1549      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| N-M    | 0 / 1549      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| M-L    | 0 / 1549      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| L-K    | 0 / 1549      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| K-J    | 0 / 1643      | -18.5      | -18.5 0.34 (1) | 10.00 |               |          |          |
| J-I    | 0 / 0         | -18.5      | -18.5 0.08 (4) | 10.00 |               |          |          |

TOTAL WEIGHT = 2 X 131 = 262 lb

(M.F.)

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.6 | PSF |
|            | DL | = 6.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD |    | = 39.0 | PSF |

SPACING = 24.0 IN.C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (1.02")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.08")  
ALLOWABLE DEFL.(TL) =  $L/360$  (1.02")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.16")

CS1: TC=0.63/1.00 (D-E:1), BC=0.34/1.00 (M-O:1), WB=0.67/1.00 (E-M:1), SS=0.30/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE   | GRIP(DRY) | SHEAR   | SECTION |
|---------|-----------|---------|---------|
| (PSI)   | (PLI)     | (PLI)   | (PLI)   |
| MAX MIN | MAX MIN   | MAX MIN | MAX MIN |
| MT20    | 618       | 354     | 1887    |
|         | 788       | 1887    | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (H) (INPUT = 0.90)  
JSI METAL = 0.46 (N) (INPUT = 1.00)



Structural component only  
DWG# T-2006765

|                                 |                         |                      |                 |                                      |          |
|---------------------------------|-------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T5</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                         |                      |                 |                                      |          |

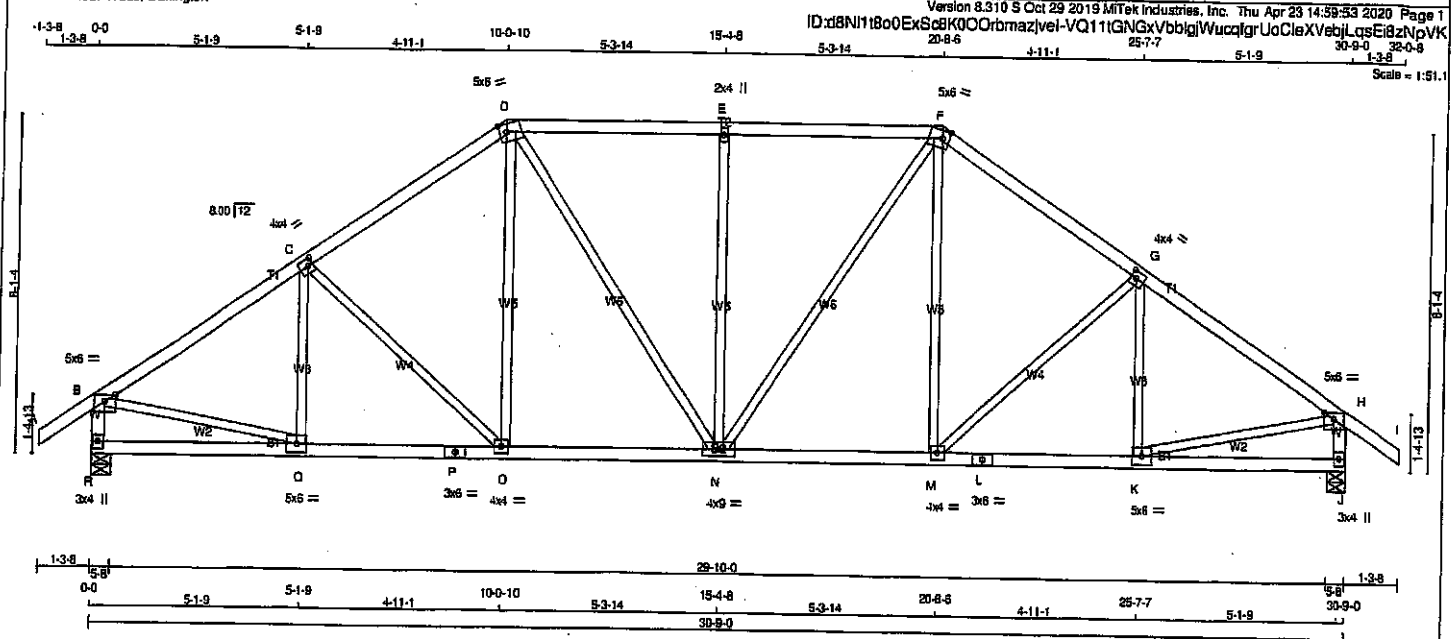

| LUMBER            |        |      |        |
|-------------------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
| A - D             | 2x4    | DRY  | No.2   |
| D - F             | 2x4    | DRY  | No.2   |
| F - I             | 2x4    | DRY  | No.2   |
| R - B             | 2x4    | DRY  | No.2   |
| J - H             | 2x4    | DRY  | No.2   |
| R - P             | 2x4    | DRY  | No.2   |
| P - L             | 2x4    | DRY  | No.2   |
| L - J             | 2x4    | DRY  | No.2   |
| ALL WEBS EXCEPT   | 2x3    | DRY  | No.2   |

DRY: SEASONED LUMBER.

| PLATES (table in inches) |        |        |     |     |           |
|--------------------------|--------|--------|-----|-----|-----------|
| JT                       | TYPE   | PLATES | W   | LEN | Y X       |
| B                        | TMVW-p | MT20   | 5.0 | 6.0 | Edge      |
| C                        | TMVW-t | MT20   | 4.0 | 4.0 | 2.00 1.50 |
| D                        | TTVW-m | MT20   | 5.0 | 6.0 | 2.25 2.00 |
| E                        | TMVW-w | MT20   | 2.0 | 4.0 |           |
| F                        | TTVW-m | MT20   | 5.0 | 6.0 | 2.25 2.00 |
| G                        | TMVW-t | MT20   | 4.0 | 4.0 | 2.00 1.50 |
| H                        | TMVW-p | MT20   | 5.0 | 6.0 | Edge      |
| J                        | BMV1-p | MT20   | 3.0 | 4.0 |           |
| K                        | BMVW-t | MT20   | 5.0 | 6.0 |           |
| L                        | BS-t   | MT20   | 3.0 | 6.0 |           |
| M                        | BMVW-t | MT20   | 4.0 | 4.0 |           |
| N                        | BMVW-t | MT20   | 4.0 | 4.0 |           |
| O                        | BMVW-t | MT20   | 4.0 | 4.0 |           |
| P                        | BS-t   | MT20   | 3.0 | 6.0 |           |
| Q                        | BMVW-t | MT20   | 5.0 | 6.0 |           |
| R                        | BMV1-p | MT20   | 3.0 | 4.0 |           |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                         |                                 |            |
|----------|-------------------------|---------------------------------|------------|
| JT       | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT RECD |
| R        | VERT 1821               | DOWN 1821                       | BRG 5-8    |
| J        | HORIZ 1821              | UP 1821                         | IN-SX 5-8  |

| UNFACTORED REACTIONS |                   |                               |       |       |            |         |       |
|----------------------|-------------------|-------------------------------|-------|-------|------------|---------|-------|
| JT                   | 1ST CASE COMBINED | MAX. MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM. LIVE | WIND    | DEAD  |
| R                    | 1285              | 857 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 429 / 0 | 0 / 0 |
| J                    | 1285              | 857 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 429 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J  
BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.46 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

| LOADING               |                           |                           |                           |
|-----------------------|---------------------------|---------------------------|---------------------------|
| TOTAL LOAD CASES: (4) |                           |                           |                           |
| CHORDS                |                           |                           |                           |
| MEMB.                 | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) |
| FR-TO                 |                           |                           |                           |
| A-B                   | 0 / 35                    | -91.8                     | -91.8 0.12 (1)            |
| B-C                   | -1987 / 0                 | -91.8                     | -91.8 0.34 (1)            |
| C-D                   | -1804 / 0                 | -91.8                     | -91.8 0.34 (1)            |
| D-E                   | -1712 / 0                 | -91.8                     | -91.8 0.37 (1)            |
| E-F                   | -1712 / 0                 | -91.8                     | -91.8 0.37 (1)            |
| F-G                   | -1804 / 0                 | -91.8                     | -91.8 0.34 (1)            |
| G-H                   | -1987 / 0                 | -91.8                     | -91.8 0.34 (1)            |
| H-I                   | 0 / 35                    | -91.8                     | -91.8 0.12 (1)            |
| R-B                   | -1780 / 0                 | 0.0                       | 0.0 0.18 (1)              |
| J-H                   | -1780 / 0                 | 0.0                       | 0.0 0.18 (1)              |
| R-Q                   | 0 / 0                     | -18.5                     | -18.5 0.10 (4)            |
| Q-P                   | 0 / 1678                  | -18.5                     | -18.5 0.32 (1)            |
| P-O                   | 0 / 1678                  | -18.5                     | -18.5 0.32 (1)            |
| O-N                   | 0 / 1477                  | -18.5                     | -18.5 0.29 (1)            |
| N-M                   | 0 / 1477                  | -18.5                     | -18.5 0.29 (1)            |
| M-L                   | 0 / 1678                  | -18.5                     | -18.5 0.32 (1)            |
| L-K                   | 0 / 1678                  | -18.5                     | -18.5 0.32 (1)            |
| K-J                   | 0 / 0                     | -18.5                     | -18.5 0.10 (4)            |

TOTAL WEIGHT = 2 X 139 = 279 lb [M/F]

| DESIGN CRITERIA  |           |     |  |
|------------------|-----------|-----|--|
| SPECIFIED LOADS: |           |     |  |
| TOP CH.          | LL = 25.6 | PSF |  |
| DL = 8.0         | PSF       |     |  |
| BOT CH.          | LL = 0.0  | PSF |  |
| DL = 7.4         | PSF       |     |  |
| TOTAL LOAD       | = 39.0    | PSF |  |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBC 2018, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")  
ALLOWABLE DEFL.(TL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.14")  
CSI: TC=0.37/1.00 (D-E:1), BC=0.32/1.00 (K-M:1), WB=0.75/1.00 (E-N:1), SSI=0.24/1.00 (D-E:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PLI)  
(PS)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1567 788 1987 1658

PLATE PLACEMENT TOL = 0.250 inches


PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.88 (B) (INPUT = 0.90)  
JSI METAL = 0.49 (P) (INPUT = 1.00)



Structural component only  
DWG# T-2006766

|                                 |                          |                      |                 |                                                                                                                                                                                                            |             |          |
|---------------------------------|--------------------------|----------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T5X</b> | QUANTITY<br><b>4</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b>                                                                                                                                                                       | TRUSS DESC. | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 | Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:54 2020 Page 1<br>ID: dBN11800ExSc8K00Orbmazjvel-zdaP5CoupjISNqjISJLUC31y7i_RE5tZUcoEbzNpVJ<br>30-9-0 31-5-0 32-0-8<br>8-0, 7-8, 1-3-8 |             |          |

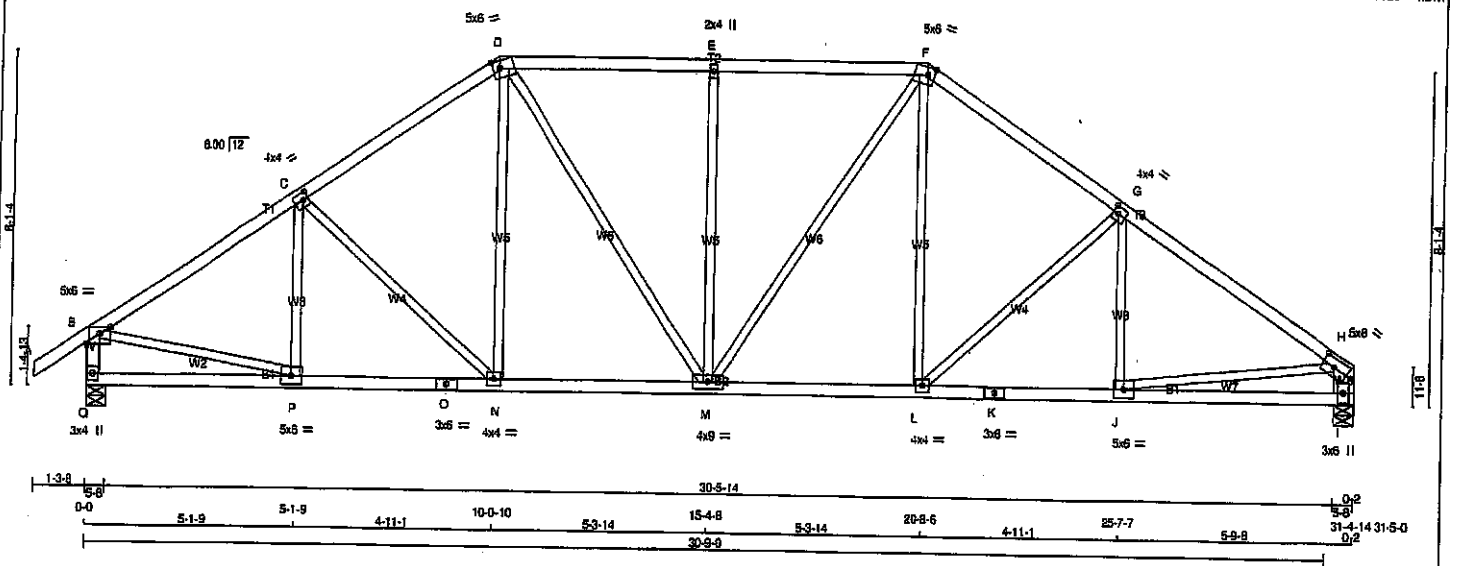

# **LUMBER**

## **N. L. G. A. RULES**

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - D  | 2x4  | DRY | No.2   |
| D - F  | 2x4  | DRY | No.2   |
| F - H  | 2x4  | DRY | No.2   |
| O - B  | 2x4  | DRY | No.2   |
| O - O  | 2x4  | DRY | No.2   |
| O - K  | 2x4  | DRY | No.2   |
| K - I  | 2x4  | DRY | No.2   |

|          |     |     |      |
|----------|-----|-----|------|
| ALL WEBS | 2x3 | DRY | No.2 |
| EXCEPT   |     |     |      |
| I - H    | 2x6 | DRY | No.2 |

DRY: SEASONED LUMBER.

## **PLATES (table is in inches)**

| JT TYPE    | PLATES | W   | LEN | Y    | X    |
|------------|--------|-----|-----|------|------|
| B TMVW-p   | MT20   | 5.0 | 8.0 | Edge |      |
| C TMVW-t   | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| D TTWW-m   | MT20   | 5.0 | 6.0 | 2.25 | 2.00 |
| E TMVW-w   | MT20   | 2.0 | 4.0 |      |      |
| F TTWW-m   | MT20   | 5.0 | 6.0 | 2.25 | 2.00 |
| G TMVW-t   | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| H TMVW-t   | MT20   | 5.0 | 8.0 | 2.50 | 3.75 |
| I BMVW-w   | MT20   | 3.0 | 8.0 |      |      |
| J BMVW-t   | MT20   | 5.0 | 8.0 |      |      |
| K BS-t     | MT20   | 3.0 | 6.0 |      |      |
| L BMVW-t   | MT20   | 4.0 | 4.0 |      |      |
| M BMVW-w-t | MT20   | 4.0 | 9.0 |      |      |
| N BMVW-t   | MT20   | 4.0 | 4.0 |      |      |
| O BS-t     | MT20   | 3.0 | 6.0 |      |      |
| P BMVW-w   | MT20   | 5.0 | 6.0 |      |      |
| Q BMVW-p   | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

## **DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

### **BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | DOWN                            | IN-SX     | IN-SX    |
| Q  | 1845                    | 0                               | 5-8       | 5-8      |
| I  | 1719                    | 0                               | 5-8       | 5-8      |

### **UNFACTORED REACTIONS**

| JT | COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|-----------|-------|---------|-------|
| Q  | 1303     | 888 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 434 / 0 | 0 / 0 |
| I  | 1216     | 798 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 418 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, I

### **BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.24 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

### **LOADING**

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS    | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MEMB. | WEBS      | MAX. FACTORED FORCE (LBS) | MAX. FACTORED VERT. LOAD (LBS) |
|-------|-----------|---------------------------|---------------------------|--------------------------------|--------------------------------|-------|-----------|---------------------------|--------------------------------|
| FR-TO |           |                           |                           |                                |                                | FR-TO |           |                           |                                |
| A-B   | 0 / 35    | -91.8                     | -91.8                     | 0.12 (1)                       | 10.00                          | P-C   | -280 / 0  | 0.09 (1)                  |                                |
| B-C   | -2020 / 0 | -91.8                     | -91.8                     | 0.36 (1)                       | 4.43                           | C-N   | -270 / 0  | 0.23 (1)                  |                                |
| C-D   | -1841 / 0 | -91.8                     | -91.8                     | 0.34 (1)                       | 4.61                           | N-D   | 0 / 277   | 0.06 (1)                  |                                |
| D-E   | -1760 / 0 | -91.8                     | -91.8                     | 0.37 (1)                       | 4.64                           | D-M   | 0 / 447   | 0.10 (1)                  |                                |
| E-F   | -1760 / 0 | -91.8                     | -91.8                     | 0.37 (1)                       | 4.64                           | M-E   | -595 / 0  | 0.75 (1)                  |                                |
| F-G   | -1882 / 0 | -91.8                     | -91.8                     | 0.38 (1)                       | 4.52                           | M-F   | 0 / 389   | 0.09 (1)                  |                                |
| G-H   | -2160 / 0 | -91.8                     | -91.8                     | 0.43 (1)                       | 4.24                           | L-F   | 0 / 352   | 0.08 (1)                  |                                |
| H-I   | -1804 / 0 | 0.0                       | 0.0                       | 0.19 (1)                       | 6.23                           | L-G   | -384 / 0  | 0.32 (1)                  |                                |
|       |           |                           |                           |                                |                                | J-G   | -154 / 36 | 0.05 (1)                  |                                |
| Q-P   | 0 / 0     | -18.5                     | -18.5                     | 0.10 (4)                       | 10.00                          | B-P   | 0 / 1743  | 0.39 (1)                  |                                |
| P-O   | 0 / 1705  | -18.5                     | -18.5                     | 0.33 (1)                       | 10.00                          | J-H   | 0 / 1840  | 0.41 (1)                  |                                |
| O-N   | 0 / 1705  | -18.5                     | -18.5                     | 0.33 (1)                       | 10.00                          | I-H   | -1674 / 0 | 0.11 (1)                  |                                |
| N-M   | 0 / 1508  | -18.5                     | -18.5                     | 0.30 (1)                       | 10.00                          |       |           |                           |                                |
| M-L   | 0 / 1541  | -18.5                     | -18.5                     | 0.30 (1)                       | 10.00                          |       |           |                           |                                |
| L-K   | 0 / 1822  | -18.5                     | -18.5                     | 0.34 (1)                       | 10.00                          |       |           |                           |                                |
| K-J   | 0 / 1822  | -18.5                     | -18.5                     | 0.34 (1)                       | 10.00                          |       |           |                           |                                |
| J-I   | 0 / 0     | -18.5                     | -18.5                     | 0.12 (4)                       | 10.00                          |       |           |                           |                                |

TOTAL WEIGHT = 4 X 140 = 560 lb

## **DESIGN CRITERIA**

### **SPECIFIED LOADS:**

|         |    |        |     |
|---------|----|--------|-----|
| TOP CH. | LL | = 25.6 | PSF |
|         | DL | = 8.0  | PSF |
| BOT CH. | LL | = 0.0  | PSF |
|         | DL | = 7.4  | PSF |
| TOTAL   | DL | = 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

### **THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 086-14
- TPC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.04")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.08")  
ALLOWABLE DEFL.(TL) = L/360 (1.04")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CSI: TC=0.43/1.00 (G-H-1), BC=0.34/1.00 (J-L-1),  
WB=0.75/1.00 (E-M-1), SS=0.24/1.00 (D-E-1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


### **NAIL VALUES**

| PLATE GRIP(DRY) | SHEAR   | SECTION |
|-----------------|---------|---------|
| (PSI)           | (PLI)   | (PLI)   |
| MAX MIN         | MAX MIN | MAX MIN |
| MT20            | 618     | 354     |
|                 | 1667    | 789     |
|                 | 1987    | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP=0.89 (S) (INPUT = 0.80)  
JSI METAL=0.56 (K) (INPUT = 1.00)



Structural component only  
DWG# T-2006787



|                                 |                         |                      |                 |                                      |          |
|---------------------------------|-------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T6</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                         |                      |                 |                                      |          |

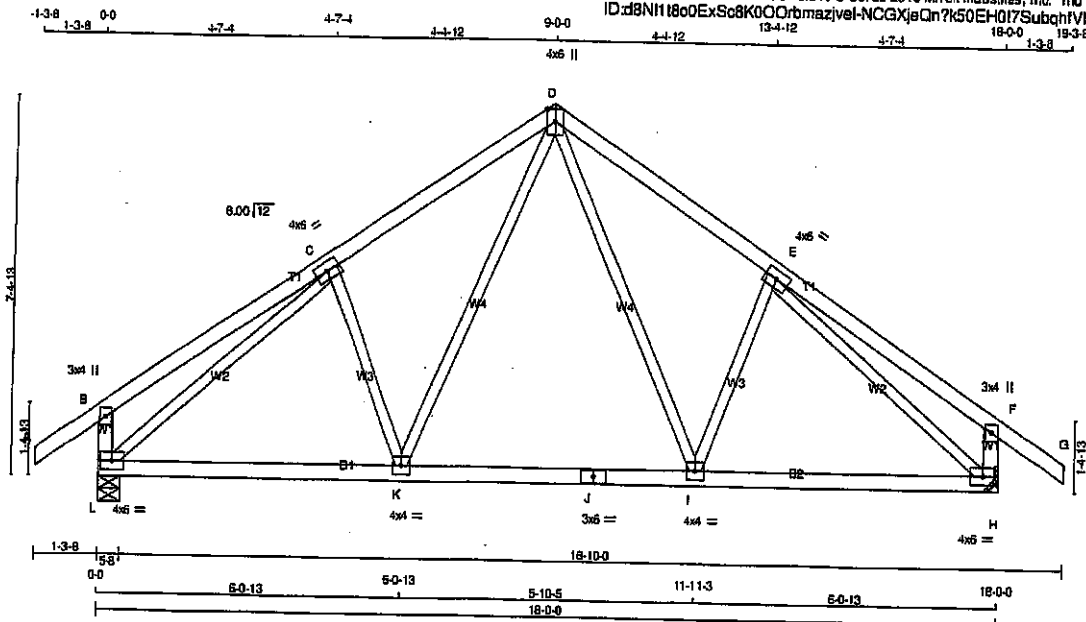

#### LUMBER

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
|-------------------|--------|------|--------|
| A - D             | 2x4    | DRY  | No. 2  |
| D - G             | 2x4    | DRY  | No. 2  |
| L - B             | 2x4    | DRY  | No. 2  |
| H - F             | 2x4    | DRY  | No. 2  |
| L - H             | 2x4    | DRY  | No. 2  |
| J - H             | 2x4    | DRY  | No. 2  |

ALL WEBS 2x3 DRY EXCEPT

DRY: SEASONED LUMBER.

| DESCR. | SPF |
|--------|-----|
| JT     | SPF |
| L      | SPF |
| H      | SPF |
| JT     | SPF |
| L      | SPF |
| H      | SPF |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| FACTORED       | MAXIMUM FACTORED | INPUT | REQD  |
|----------------|------------------|-------|-------|
| GROSS REACTION | GROSS REACTION   | BRG   | BRG   |
| VERT           | DOWN             | UP    | IN-SX |
| JT 1118        | 0                | 1118  | 0     |
| L 1118         | 0                | 1118  | 0     |
| H 1118         | 0                | 1118  | 0     |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3'-8".

##### UNFACTORED REACTIONS

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS |
|----------|-------------------------------|
| JT       | COMBINED                      |
| L 788    | 531/0                         |
| H 788    | 531/0                         |

BEARING MATERIAL TO BE SPF NO. 2 OR BETTER AT JOINT(S) L

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.05 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (FT) | CS1 (LC) | WEBS | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (FT) | CS1 (LC) |
|--------|--------|---------------------------|------------------|---------------------------|----------|------|---------|---------------------------|---------------------------|----------|
| A-B    | 0/35   | -91.8                     | -91.8            | 0.12 (1)                  | 10.00    | D-I  | 0/387   | 0.09 (1)                  | 10.00                     | 0.09 (1) |
| B-C    | 0/27   | -91.8                     | -91.8            | 0.30 (1)                  | 10.00    | E-E  | -255/0  | 0.08 (1)                  | 10.00                     | 0.08 (1) |
| C-D    | -959/0 | -91.8                     | -91.8            | 0.24 (1)                  | 6.05     | K-D  | 0/387   | 0.09 (1)                  | 10.00                     | 0.09 (1) |
| D-E    | -959/0 | -91.8                     | -91.8            | 0.24 (1)                  | 6.05     | C-K  | -255/0  | 0.08 (1)                  | 10.00                     | 0.08 (1) |
| E-F    | 0/27   | -91.8                     | -91.8            | 0.30 (1)                  | 10.00    | L-C  | -1174/0 | 0.73 (1)                  | 10.00                     | 0.73 (1) |
| F-G    | 0/35   | -91.8                     | -91.8            | 0.12 (1)                  | 10.00    | E-H  | -1174/0 | 0.73 (1)                  | 10.00                     | 0.73 (1) |
| L-B    | -283/0 | 0.0                       | 0.0              | 0.03 (1)                  | 7.81     |      |         |                           |                           |          |
| H-F    | -283/0 | 0.0                       | 0.0              | 0.03 (1)                  | 7.81     |      |         |                           |                           |          |
| L-K    | 0/889  | -18.5                     | -18.5            | 0.22 (4)                  | 10.00    |      |         |                           |                           |          |
| K-J    | 0/628  | -18.5                     | -18.5            | 0.20 (4)                  | 10.00    |      |         |                           |                           |          |
| J-I    | 0/628  | -18.5                     | -18.5            | 0.20 (4)                  | 10.00    |      |         |                           |                           |          |
| I-H    | 0/869  | -18.5                     | -18.5            | 0.22 (4)                  | 10.00    |      |         |                           |                           |          |

TOTAL WEIGHT = 2 X 79 = 158 lb

##### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.8 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBCC 2010, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.60")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.03")  
ALLOWABLE DEFL. (TL) = L/360 (0.60")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.03")

CS1: TC=0.30/1.00 (E-F:1), BC=0.22/1.00 (H-I:4), WB=0.73/1.00 (E-H:1), SS1=0.17/1.00 (C-O:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP (DRY) SHEAR SECTION  
(FSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.82 (E) (INPUT = 0.90)  
JSI METAL = 0.30 (C) (INPUT = 1.00)

#### PLATES (table in inches)


| JT TYPE   | PLATES | W   | LEN | Y    | X |
|-----------|--------|-----|-----|------|---|
| B TMV-p   | MT20   | 3.0 | 4.0 |      |   |
| C TMWW-t  | MT20   | 4.0 | 8.0 |      |   |
| D TTWW-p  | MT20   | 4.0 | 8.0 | Edge |   |
| E TMWW-t  | MT20   | 4.0 | 8.0 |      |   |
| F TMV-p   | MT20   | 3.0 | 4.0 |      |   |
| H BMVW1-t | MT20   | 4.0 | 8.0 |      |   |
| I BMVW1-t | MT20   | 4.0 | 8.0 |      |   |
| J BS-t    | MT20   | 3.0 | 6.0 |      |   |
| K BMVW1-t | MT20   | 4.0 | 8.0 |      |   |
| L BMVW1-t | MT20   | 4.0 | 8.0 |      |   |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.



Structural component only  
DWG# T-2006769

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>T6G</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

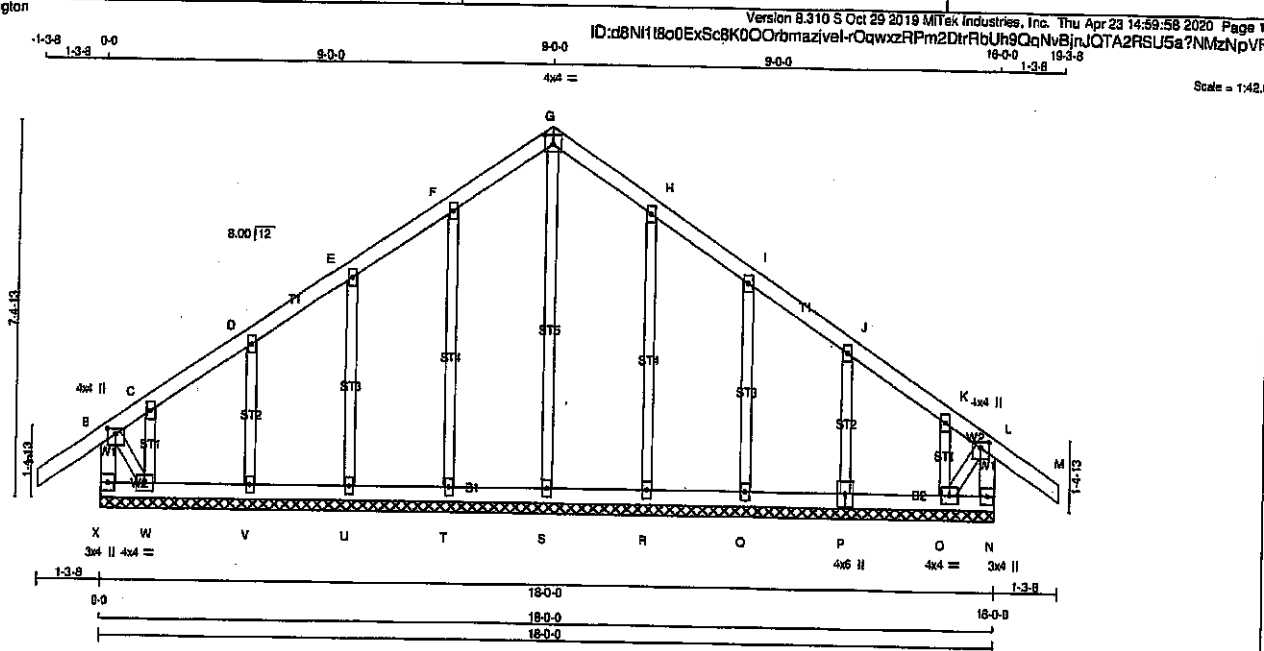

#### LUMBER

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| X - B             | 2x4    | DRY  | No.2   | SPF    |
| A - G             | 2x4    | DRY  | No.2   | SPF    |
| G - M             | 2x4    | DRY  | No.2   | SPF    |
| N - L             | 2x4    | DRY  | No.2   | SPF    |
| X - P             | 2x4    | DRY  | No.2   | SPF    |
| P - N             | 2x4    | DRY  | No.2   | SPF    |

|                       |     |     |      |     |
|-----------------------|-----|-----|------|-----|
| ALL WEBS              | 2x3 | DRY | No.2 | SPF |
| ALL GABLE WEBS        | 2x3 | DRY | No.2 | SPF |
| DRY: SEASONED LUMBER. |     |     |      |     |

GABLE STUDS SPACED AT 2'-0" OC.

#### PLATES (table is in inches)

| JT                     | TYPE    | PLATES | W   | LEN | Y    | X    |
|------------------------|---------|--------|-----|-----|------|------|
| B                      | TMW+p   | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| C, D, E, F, H, I, J, K |         |        |     |     |      |      |
| C                      | TMW+w   | MT20   | 2.0 | 4.0 |      |      |
| G                      | TTW-p   | MT20   | 4.0 | 4.0 | 2.25 | 2.00 |
| L                      | TMW+p   | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| N                      | BMW1+p  | MT20   | 3.0 | 4.0 |      |      |
| O                      | BMWV1-t | MT20   | 4.0 | 4.0 |      |      |
| P                      | BSW1-t  | MT20   | 4.0 | 6.0 |      |      |
| Q, R, S, T, U, V       |         |        |     |     |      |      |
| Q                      | BMW1+w  | MT20   | 2.0 | 4.0 |      |      |
| W                      | BMWV1-t | MT20   | 4.0 | 4.0 |      |      |
| X                      | BMW1+p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                  |                          | WEBS  |                           |                          |          |
|--------|---------------------------|------------------|--------------------------|-------|---------------------------|--------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | LC1 MAX. UNBRACED LENGTH |          |
| FR-TO  |                           |                  |                          | FR-TO |                           |                          |          |
| X-B    | -282 / 0                  | 0.0              | 0.0 0.03 (1)             | S-G   | -148 / 0                  | 7.81                     | 0.14 (1) |
| A-B    | 0 / 35                    | -91.8            | -91.8 0.12 (1)           | T-F   | -209 / 0                  | 10.00                    | 0.12 (1) |
| B-C    | -88 / 0                   | -91.8            | -91.8 0.12 (1)           | U-E   | -173 / 0                  | 6.25                     | 0.06 (1) |
| C-D    | -15 / 0                   | -91.8            | -91.8 0.05 (1)           | V-D   | -194 / 0                  | 6.25                     | 0.04 (1) |
| D-E    | -18 / 0                   | -91.8            | -91.8 0.05 (1)           | W-C   | -41 / 0                   | 6.25                     | 0.01 (1) |
| E-F    | -8 / 0                    | -91.8            | -91.8 0.05 (1)           | R-H   | -209 / 0                  | 10.00                    | 0.12 (1) |
| F-G    | -18 / 0                   | -91.8            | -91.8 0.05 (1)           | Q-I   | -173 / 0                  | 6.25                     | 0.06 (1) |
| G-H    | -18 / 0                   | -91.8            | -91.8 0.05 (1)           | P-J   | -194 / 0                  | 6.25                     | 0.04 (1) |
| H-I    | -8 / 0                    | -91.8            | -91.8 0.05 (1)           | O-K   | -41 / 0                   | 6.25                     | 0.01 (1) |
| I-J    | -16 / 0                   | -91.8            | -91.8 0.05 (1)           | B-W   | 0 / 28                    | 6.25                     | 0.01 (1) |
| J-K    | -15 / 0                   | -91.8            | -91.8 0.05 (1)           | O-L   | 0 / 29                    | 6.25                     | 0.01 (1) |
| K-L    | -88 / 0                   | -91.8            | -91.8 0.12 (1)           |       |                           |                          |          |
| L-M    | 0 / 35                    | -91.8            | -91.8 0.12 (1)           |       |                           |                          |          |
| N-L    | -282 / 0                  | 0.0              | 0.0 0.03 (1)             |       |                           |                          |          |
| X-W    | 0 / 0                     | -18.5            | -18.5 0.01 (4)           |       |                           |                          |          |
| W-V    | 0 / 17                    | -18.5            | -18.5 0.02 (4)           |       |                           |                          |          |
| V-U    | 0 / 12                    | -18.5            | -18.5 0.01 (4)           |       |                           |                          |          |
| U-T    | 0 / 9                     | -18.5            | -18.5 0.01 (4)           |       |                           |                          |          |
| T-S    | 0 / 6                     | -18.5            | -18.5 0.01 (4)           |       |                           |                          |          |
| S-R    | 0 / 8                     | -18.5            | -18.5 0.01 (4)           |       |                           |                          |          |
| R-Q    | 0 / 9                     | -18.5            | -18.5 0.02 (4)           |       |                           |                          |          |
| Q-P    | 0 / 12                    | -18.5            | -18.5 0.02 (4)           |       |                           |                          |          |
| P-O    | 0 / 17                    | -18.5            | -18.5 0.02 (4)           |       |                           |                          |          |
| O-N    | 0 / 0                     | -18.5            | -18.5 0.02 (4)           |       |                           |                          |          |

TOTAL WEIGHT = 81 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.12/1.00 (A-B:1), BC=0.02/1.00 (P-Q:4), WB=0.14/1.00 (G-S:1), SS=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR | SECTION                |
|-----------------|-------|------------------------|
| (PSI)           | (PL)  | (PL)                   |
| MT20            | 618   | 354 1667 788 1987 1656 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.48 (W) (INPUT = 0.90)  
JSI METAL= 0.11 (H) (INPUT = 1.00)



Structural component only  
DWG# T-2006770

Structural component only  
DWG# T-2006771

| PLATES (tablets in inches) |         |        |     |      |      |      |
|----------------------------|---------|--------|-----|------|------|------|
| J                          | TYPE    | PLATES | W   | LEN  | Y    | X    |
| B                          | TVWV-p  | MT20   | 5.0 | 6.0  | Edge |      |
| C                          | TVWV+p  | MT20   | 4.0 | 4.0  | 2.25 | 2.00 |
| D                          | TTW-p   | MT20   | 4.0 | 4.0  | 1.25 | 2.00 |
| E                          | TVWV+p  | MT20   | 4.0 | 4.0  | 1.25 | 2.00 |
| F                          | TVWV-p  | MT20   | 5.0 | 6.0  |      |      |
| H                          | BWVW1-t | MT20   | 4.0 | 4.0  | Edge |      |
| I                          | BVW+p   | MT20   | 3.0 | 4.0  |      |      |
| J                          | BWVWV-1 | MT20   | 5.0 | 12.0 | 4.50 | 7.50 |
| K                          | BWVWV-1 | MT20   | 4.0 | 9.0  |      |      |
| L                          | BWVWV-1 | MT20   | 5.0 | 12.0 | 4.50 | 7.50 |
| M                          | BVW+p   | MT20   | 3.0 | 4.0  |      |      |
| N                          | BWVW1-t | MT20   | 4.0 | 4.0  |      |      |

SI GRIP= 0.63 (B) (INPUT = 0.90 )  
SI METAL= 0.29 (L) (INPUT = 1.00 )






|                           |                         |                      |                 |                                      |             |          |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T9</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Thu Apr 23 15:00:03 2020 Page 1  
ID:8BNH18o0ExSc8K00Ormazjvet-CLdp\_hvYarAyDURUj?74yvYck7BrKGBenHm2ZzNpVA

Scale = 1:25.7

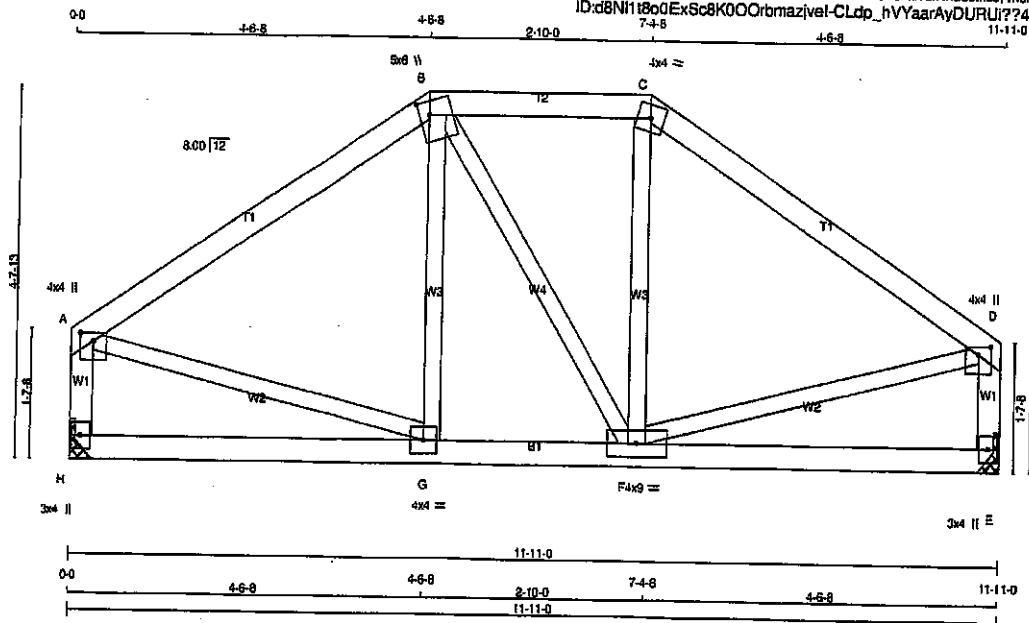

#### LUMBER

| N L G A RULES | CHORDS | SIZE | LUMBER |
|---------------|--------|------|--------|
| A - B         | 2x4    | DRY  | No.2   |
| B - C         | 2x4    | DRY  | No.2   |
| C - D         | 2x4    | DRY  | No.2   |
| H - A         | 2x4    | DRY  | No.2   |
| E - D         | 2x4    | DRY  | No.2   |
| H - E         | 2x4    | DRY  | No.2   |

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| A  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| B  | TTWW+m  | MT20   | 5.0 | 6.0 | 2.00 | 1.50 |
| C  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| D  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| E  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |
| F  | BMVWW-t | MT20   | 4.0 | 9.0 |      |      |
| G  | BMVWW-t | MT20   | 4.0 | 4.0 |      |      |
| H  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS       | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD |
|----------------|----------------|------------------|-------|--------|
| GROSS REACTION | GROSS REACTION | BRG              | BRG   |        |
| JT             | VERT           | HORZ             | DOWN  | HORZ   |
| H              | 657            | 0                | 657   | 0      |
| E              | 657            | 0                | 657   | 0      |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H, E. MINIMUM BEARING LENGTH AT JOINT H = 3-8, JOINT E = 3-8.

#### UNFACTORED REACTIONS

| 1ST LOASE | MAX/MIN. COMPONENT REACTIONS |
|-----------|------------------------------|
| JT        | COMBINED                     |
| H         | 465                          |
| E         | 465                          |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB.    | MAX. FACTORED | FORCE (LBS) | VERT. LOAD | LC1 | MAX. FACTORED | FORCE (LBS) | UNBRAC   | LENGTH   | FR-TO | MEMB. | MAX. FACTORED | FORCE (LBS) | UNBRAC | LENGTH | FR-TO |
|--------|----------|---------------|-------------|------------|-----|---------------|-------------|----------|----------|-------|-------|---------------|-------------|--------|--------|-------|
| A-B    | -521 / 0 | -91.8         | -91.8       | 0.25 (1)   |     | 6.25          | G-B         | -49 / 39 | 0.02 (1) |       |       |               |             |        |        |       |
| B-C    | -432 / 0 | -91.8         | -91.8       | 0.10 (1)   |     | 6.25          | B-F         | 0 / 2    | 0.00 (4) |       |       |               |             |        |        |       |
| C-D    | -523 / 0 | -91.8         | -91.8       | 0.25 (1)   |     | 6.25          | F-C         | -48 / 40 | 0.02 (1) |       |       |               |             |        |        |       |
| H-A    | -620 / 0 | 0.0           | 0.0         | 0.07 (1)   |     | 7.81          | A-G         | 0 / 450  | 0.10 (1) |       |       |               |             |        |        |       |
| E-D    | -619 / 0 | 0.0           | 0.0         | 0.07 (1)   |     | 7.81          | F-D         | 0 / 450  | 0.10 (1) |       |       |               |             |        |        |       |
| H-G    | 0 / 0    | -18.5         | -18.5       | 0.08 (4)   |     | 10.00         |             |          |          |       |       |               |             |        |        |       |
| G-F    | 0 / 432  | -18.5         | -18.5       | 0.11 (4)   |     | 10.00         |             |          |          |       |       |               |             |        |        |       |
| F-E    | 0 / 0    | -18.5         | -18.5       | 0.09 (4)   |     | 10.00         |             |          |          |       |       |               |             |        |        |       |

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.8 PSF  
DL = 6.0 PSF  
BOT CH. LL = 6.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.40")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.01")  
ALLOWABLE DEFL. (TL) = L/360 (0.40")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.02")

CSI: TC=0.25/1.00 (C-D:1), BC=0.11/1.00 (F-G:4), WB=0.10/1.00 (D-F:1), SS=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1687 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.54 (G) (INPUT = 0.90)  
JSI METAL= 0.16 (G) (INPUT = 1.00)



Structural component only  
DWG# T-2006774

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T10</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

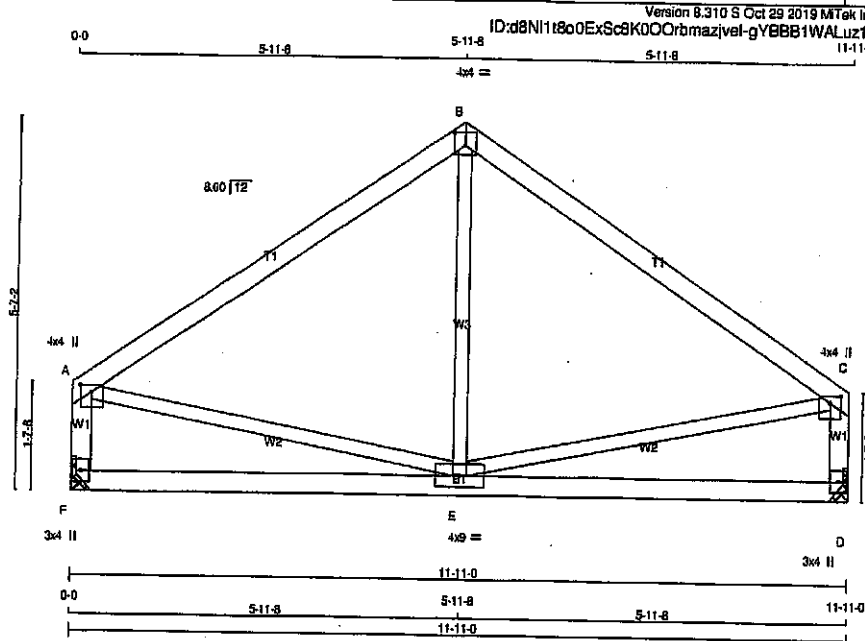

Version 8.310 S Oct 29 2019 MTK Industries, Inc. Thu Apr 23 15:00:04 2020 Page 1  
ID:d9NI1t8o0ExSc8K00Orbmazivel-gVBBB1WALuz1ZM3e2QWec9RgdkSEanjLs11Jb0zNpV9

Scale: 3/8"=1'

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER |
|--------|---------|--------|
| A - B  | 2x4 DRY | No.2   |
| B - C  | 2x4 DRY | No.2   |
| F - A  | 2x4 DRY | No.2   |
| D - C  | 2x4 DRY | No.2   |
| F - D  | 2x4 DRY | No.2   |

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| A  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| B  | TTW+p   | MT20   | 4.0 | 4.0 | 2.25 | 2.00 |
| C  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| D  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |
| E  | BMVWW-1 | MT20   | 4.0 | 9.0 |      |      |
| F  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ       |
| F  | 657                     | 0                               | 657       | 0          |
| D  | 657                     | 0                               | 657       | 0          |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F, D. MINIMUM BEARING LENGTH AT JOINT F = 3-8, JOINT D = 3-8.

##### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX MIN. COMPONENT REACTIONS | PERM. LIVE | WIND       | DEAD  | SOIL    |
|----|----------|------------------------------|------------|------------|-------|---------|
| F  | COMBINED | SNOW                         | LIVE       | PERM. LIVE | WIND  | DEAD    |
| F  | 485      | 305 / 0                      | 0 / 0      | 0 / 0      | 0 / 0 | 160 / 0 |
| D  | 485      | 305 / 0                      | 0 / 0      | 0 / 0      | 0 / 0 | 160 / 0 |

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS   | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS) | MEMB. | WEBS     | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS) |
|-------|----------|---------------------------|------------------|---------------------------|---------------------------|-------|----------|---------------------------|---------------------------|
| FR-TO |          |                           |                  |                           |                           | FR-TO |          |                           |                           |
| A-B   | -463 / 0 | -91.8                     | -91.8            | 0.42 (1)                  | 6.25                      | E-B   | -33 / 91 | 0.03 (4)                  | 0.03 (4)                  |
| B-C   | -463 / 0 | -91.8                     | -91.8            | 0.42 (1)                  | 6.25                      | A-E   | 0 / 395  | 0.09 (1)                  | 0.09 (1)                  |
| F-A   | -815 / 0 | 0.0                       | 0.0              | 0.07 (1)                  | 7.81                      | E-C   | 0 / 395  | 0.09 (1)                  | 0.09 (1)                  |
| D-C   | -815 / 0 | 0.0                       | 0.0              | 0.07 (1)                  | 7.81                      |       |          |                           |                           |
| F-E   | 0 / 0    | -18.5                     | -18.5            | 0.19 (4)                  | 10.00                     |       |          |                           |                           |
| E-D   | 0 / 0    | -18.5                     | -18.5            | 0.19 (4)                  | 10.00                     |       |          |                           |                           |

TOTAL WEIGHT = 2 X 48 = 96 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.6 PSF |
| DL = 6.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

SPACING = 24.0 IN. C.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.40")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")  
ALLOWABLE DEFL.(TL) = L/360 (0.40")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.42/1.00 (B-C:1), BC=0.19/1.00 (E-F:4), WB=0.09/1.00 (A-E:1), SS=0.18/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PL)      | (PL)  | (PL)    |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 618       | 354   | 1867    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.49 (C) (INPUT = 0.90)  
JSI METAL = 0.14 (A) (INPUT = 1.00)




Structural component only  
DWG# T-2006775

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T11</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Thu Apr 23 15:00:05 2020 Page 1

ID:d8N118o0ExSc8K00Orbmazve)-8kuZPNW6B5uBWdq72T9N\_vD8oDJERUShmt7S2NpV8

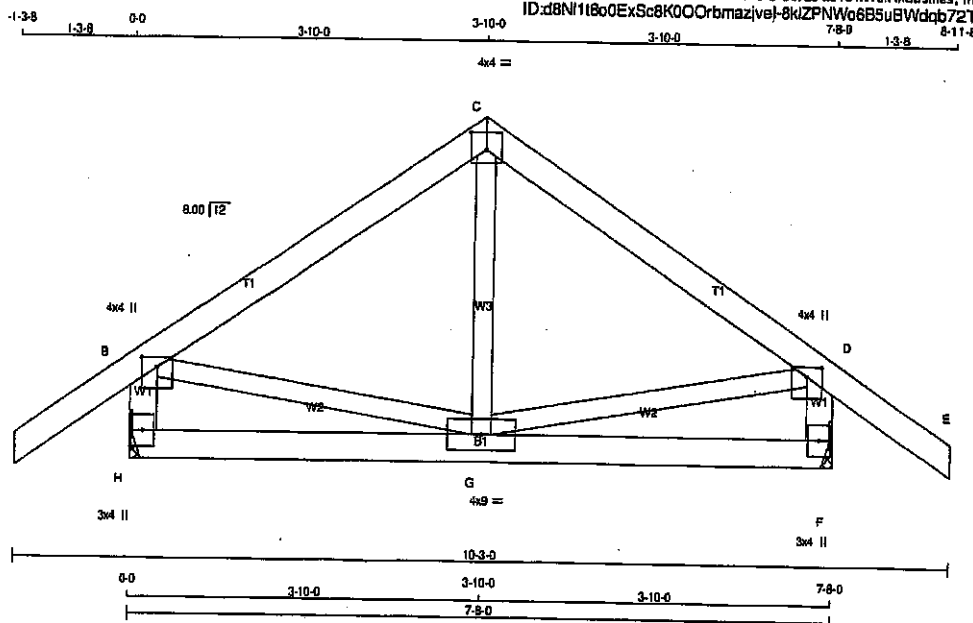

TOTAL WEIGHT = 2 X 33 = 66 lb  
(M/F)

#### LUMBER

N.L.G.A. RULES

CHORDS SIZE

A - C 2x4 DRY No.2

C - E 2x4 DRY No.2

H - B 2x4 DRY No.2

F - D 2x4 DRY No.2

H - F 2x4 DRY No.2

ALL WEBS 2x3 DRY No.2

EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table in inches)

JT TYPE PLATES

B TMVW+p MT20 4.0 4.0 1.25 2.00

C TTW+p MT20 4.0 4.0 2.25 2.00

D TMVW+p MT20 4.0 4.0 1.25 2.00

F BMV1+p MT20 3.0 4.0

G BMVWW-t MT20 4.0 9.0

H BMV1+p MT20 3.0 4.0

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     |
| H  | 549                     | 0                               | 549       | 0        |
| F  | 549                     | 0                               | 549       | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H, F. MINIMUM BEARING LENGTH AT JOINT H = 1-8, JOINT F = 1-8.

##### UNFACTORED REACTIONS

| 1ST CASE    | MAX/MIN. COMPONENT REACTIONS            |
|-------------|-----------------------------------------|
| JT COMBINED | SNOW LIVE PERM.LIVE WIND DEAD SOIL      |
| H           | 388 288 / 0 0 / 0 0 / 0 0 119 / 0 0 / 0 |
| F           | 388 288 / 0 0 / 0 0 / 0 0 119 / 0 0 / 0 |

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB. | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX | MAX. UNBRACED LENGTH | WEBS  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |
|--------|-------|---------------------------|------------------|---------|----------------------|-------|-------|---------------------------|---------------|
| A-B    | FR-TO | 0 / 35                    | -91.8            | -91.8   | 0.12 (1)             | 10.00 | G-C   | -19 / 59                  | 0.02 (4)      |
| B-C    | FR-TO | -300 / 0                  | -91.8            | -91.8   | 0.17 (1)             | 6.25  | B-G   | 0 / 255                   | 0.06 (1)      |
| C-D    | FR-TO | -300 / 0                  | -91.8            | -91.8   | 0.17 (1)             | 6.25  | G-D   | 0 / 255                   | 0.06 (1)      |
| D-E    | FR-TO | 0 / 35                    | -91.8            | -91.8   | 0.12 (1)             | 10.00 |       |                           |               |
| H-B    | FR-TO | -521 / 0                  | 0.0              | 0.0     | 0.05 (1)             | 7.81  |       |                           |               |
| F-D    | FR-TO | -521 / 0                  | 0.0              | 0.0     | 0.05 (1)             | 7.81  |       |                           |               |
| H-G    | FR-TO | 0 / 0                     | -18.5            | -18.5   | 0.07 (4)             | 10.00 |       |                           |               |
| G-F    | FR-TO | 0 / 0                     | -18.5            | -18.5   | 0.07 (4)             | 10.00 |       |                           |               |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |            |
|------------|----|------------|
| TOP CH.    | LL | = 25.6 PSF |
| BOT CH.    | LL | = 6.0 PSF  |
|            | LL | = 0.0 PSF  |
|            | DL | = 7.4 PSF  |
| TOTAL LOAD |    | = 39.0 PSF |

SPACING = 24.0 IN C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(85 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.28")  
CALCULATED VERT. DEFL.(LL) = L/899 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.28")  
CALCULATED VERT. DEFL.(TL) = L/899 (0.01")

CSI: TC=0.17/1.00 (B-C:1), BC=0.07/1.00 (G-H:4),  
WB=0.06/1.00 (B-G:1), SSI=0.11/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) | (PLI) |
|-------|-----------|-------------|---------------|-------|
| MT20  | 618       | 354         | 1667          | 788   |
|       |           |             | 1987          | 1656  |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.38 (B) (INPUT = 0.90 )  
JSI METAL= 0.11 (B) (INPUT = 1.00 )




Structural component only  
DWG# T-2006776

|                    |                    |               |          |                               |             |          |
|--------------------|--------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408263 | TRUSS NAME<br>T11G | QUANTITY<br>2 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|--------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:00:06 2020 Page 1  
ID: d8N1t18o0ExSc8K00Orbmazivcl-cwJxcIXQtVDlpgC09rZjhaX5IX9Q2hleKLWQfuzNpV7

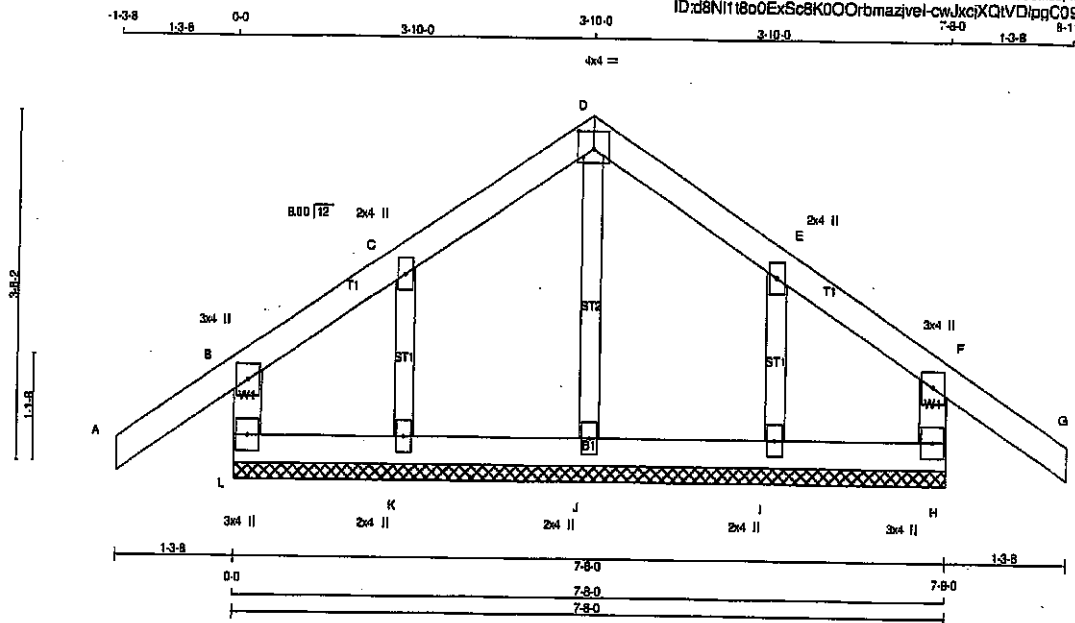

Scale = 1:22.4

#### LUMBER

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
|-------------------|--------|------|--------|
| L - B             | 2x4    | DRY  | No.2   |
| A - D             | 2x4    | DRY  | No.2   |
| D - G             | 2x4    | DRY  | No.2   |
| H - F             | 2x4    | DRY  | No.2   |
| L - H             | 2x4    | DRY  | No.2   |

ALL WEBS 2x3 DRY No.2  
ALL GABLE WEBS 2x3 DRY No.2  
DRY: SEASONED LUMBER.

GABLE STUDS SPACED AT 2'-0" OC.

#### PLATES (table is in inches)

| JT TYPE  | PLATES | W   | LEN | Y    | X    |
|----------|--------|-----|-----|------|------|
| B TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| C TMW+w  | MT20   | 2.0 | 4.0 |      |      |
| D TTW+p  | MT20   | 4.0 | 4.0 | 2.25 | 2.00 |
| E TMW+w  | MT20   | 2.0 | 4.0 |      |      |
| F TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| H BMV1+p | MT20   | 3.0 | 4.0 |      |      |
| I, J, K  |        |     |     |      |      |
| I BMW1+w | MT20   | 2.0 | 4.0 |      |      |
| L BMV1+p | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.  
THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.  
BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.  
ALL RITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                | WEBS  |                           |               |  |
|--------|---------------------------|---------------------------|----------------|-------|---------------------------|---------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CS1 (LC)  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CS1 (LC) |  |
| FR-TO  |                           | FROM TO                   |                | FR-TO |                           |               |  |
| L-B    | -204 / 0                  | 0.0                       | 0.0 0.05 (1)   | J-D   | -252 / 0                  | 0.05 (1)      |  |
| A-B    | 0 / 35                    | -91.8                     | -91.8 0.12 (1) | K-C   | -148 / 0                  | 0.02 (1)      |  |
| B-C    | 0 / 27                    | -91.8                     | -91.8 0.08 (1) | I-E   | -148 / 0                  | 0.02 (1)      |  |
| C-D    | 0 / 47                    | -91.8                     | -91.8 0.06 (1) |       |                           |               |  |
| D-E    | 0 / 47                    | -91.8                     | -91.8 0.06 (1) |       |                           |               |  |
| E-F    | 0 / 27                    | -91.8                     | -91.8 0.08 (1) |       |                           |               |  |
| F-G    | 0 / 35                    | -91.8                     | -91.8 0.12 (1) |       |                           |               |  |
| H-F    | -204 / 0                  | 0.0                       | 0.0 0.05 (1)   |       |                           |               |  |
| L-K    | -30 / 0                   | -18.5                     | -18.5 0.01 (4) |       |                           |               |  |
| K-J    | -36 / 0                   | -18.5                     | -18.5 0.01 (4) |       |                           |               |  |
| J-I    | -36 / 0                   | -18.5                     | -18.5 0.01 (4) |       |                           |               |  |
| I-H    | -30 / 0                   | -18.5                     | -18.5 0.01 (4) |       |                           |               |  |

TOTAL WEIGHT = 2 X 30 = 60 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.6 PSF |
| DL         | = 5.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TC=0.12/1.00 (A-B:1), BC=0.01/1.00 (J-K:4), WB=0.05/1.00 (D-J:1), SS1=0.08/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) | (PLI)     |
|-----------------|-------------|---------------|-----------|
| MAX MIN         | MAX MIN     | MAX MIN       | MAX MIN   |
| MT20            | 618 354     | 1567 788      | 1967 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.21 (D) (INPUT = 0.50)  
JSI METAL= 0.08 (D) (INPUT = 1.00)




Structural component only  
DWG# T-2006777

|                           |                           |                      |                 |                                      |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T12G</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:00:08 2020 Page 1  
ID:d0N1t18o0ExSc8K00Orbmazivel-ZJRh1OZgP6UT2\_MPHGbn?cRFLrWbGxnf?XkmzNpV5

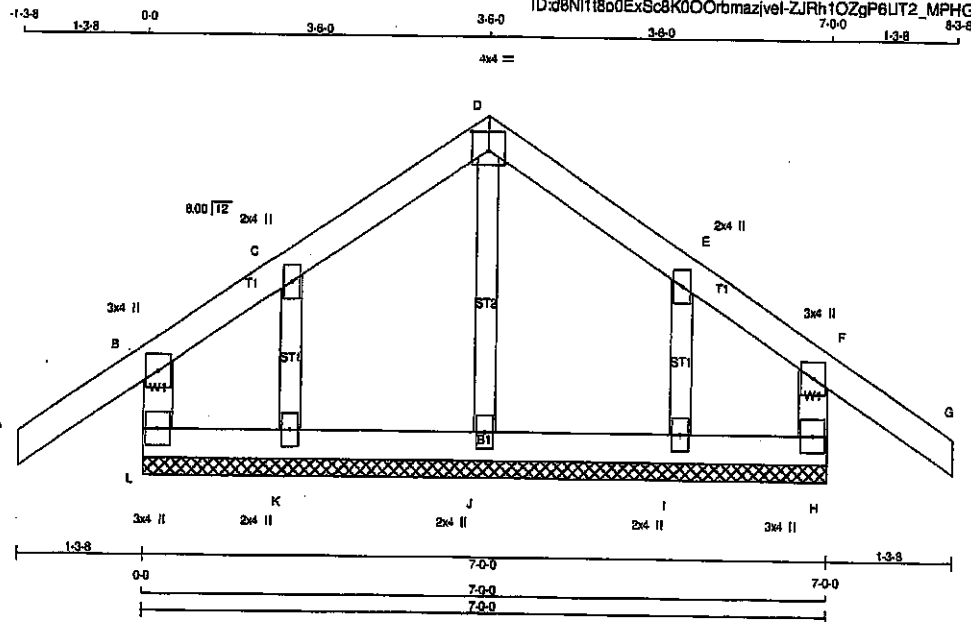

Scale = 1/2" = 1'-0"

TOTAL WEIGHT = 28 lb

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER | DESCR. |
|--------|------|-----|--------|--------|
| L - B  | 2x4  | DRY | No.2   | SPF    |
| A - D  | 2x4  | DRY | No.2   | SPF    |
| D - G  | 2x4  | DRY | No.2   | SPF    |
| H - F  | 2x4  | DRY | No.2   | SPF    |
| L - H  | 2x4  | DRY | No.2   | SPF    |

|                       |     |     |      |     |
|-----------------------|-----|-----|------|-----|
| ALL WEBS              | 2x3 | DRY | No.2 | SPF |
| ALL GABLE WEBS        | 2x3 | DRY | No.2 | SPF |
| DRY: SEASONED LUMBER. |     |     |      |     |

GABLE STUDS SPACED AT 2'-0" OC.

#### PLATES (table is in inches)

| JT TYPE | PLATES | W    | LEN | Y   | X         |
|---------|--------|------|-----|-----|-----------|
| B       | TMV+p  | MT20 | 3.0 | 4.0 |           |
| C       | TMW+w  | MT20 | 2.0 | 4.0 |           |
| D       | TTW+p  | MT20 | 4.0 | 4.0 | 2.25 2.00 |
| E       | TMW+w  | MT20 | 2.0 | 4.0 |           |
| F       | TMV+p  | MT20 | 3.0 | 4.0 |           |
| H       | BMV1+p | MT20 | 3.0 | 4.0 |           |
| I, J, K |        |      |     |     |           |
| I       | BMW1+w | MT20 | 2.0 | 4.0 |           |
| L       | BMV1+p | MT20 | 3.0 | 4.0 |           |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                  |                        | WEBS  |                           |                        |               |
|--------|---------------------------|------------------|------------------------|-------|---------------------------|------------------------|---------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. FACTORED CSF (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSF (LC) | UNBRAC LENGTH |
| FR-TO  |                           | FROM TO          |                        | FR-TO |                           |                        |               |
| L-B    | -189 / 0                  | 0.0              | 0.0 0.05 (1)           | J-D   | -283 / 0                  | 0.05 (1)               |               |
| A-B    | 0 / 35                    | -91.8            | -91.8 0.12 (1)         | K-C   | -127 / 0                  | 0.02 (1)               |               |
| B-C    | 0 / 30                    | -91.8            | -91.8 0.07 (1)         | I-E   | -127 / 0                  | 0.02 (1)               |               |
| C-D    | 0 / 54                    | -91.8            | -91.8 0.06 (1)         |       |                           |                        |               |
| D-E    | 0 / 54                    | -91.8            | -91.8 0.06 (1)         |       |                           |                        |               |
| E-F    | 0 / 30                    | -91.8            | -91.8 0.07 (1)         |       |                           |                        |               |
| F-G    | 0 / 35                    | -91.8            | -91.8 0.12 (1)         |       |                           |                        |               |
| H-F    | -189 / 0                  | 0.0              | 0.0 0.05 (1)           |       |                           |                        |               |
| L-K    | -35 / 0                   | -18.5            | -18.5 0.01 (4)         |       |                           |                        |               |
| K-J    | -41 / 0                   | -18.5            | -18.5 0.02 (4)         |       |                           |                        |               |
| J-I    | -41 / 0                   | -18.5            | -18.5 0.02 (4)         |       |                           |                        |               |
| I-H    | -35 / 0                   | -18.5            | -18.5 0.01 (4)         |       |                           |                        |               |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |      |      |     |
|------------|------|------|-----|
| TOP CH.    | LL = | 25.6 | PSF |
|            | DL = | 8.0  | PSF |
| BOT CH.    | LL = | 0.0  | PSF |
|            | DL = | 7.4  | PSF |
| TOTAL LOAD | =    | 39.0 | PSF |

##### SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSF: TC=0.12/1.00 (F-G:1), BC=0.02/1.00 (J-K:4), WB=0.05/1.00 (D-J:1), SS=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PL)  | (PL)    |
|       | MAX       | MIN   | MAX     |
| MT20  | 618       | 354   | 1987    |
|       | 788       | 1987  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.22 (D) (INPUT = 0.90)  
JSI METAL= 0.08 (D) (INPUT = 1.00)




Structural component only  
DWG# T-2006778

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | TRUSS DESC. | DRWG NO. |
|----------|------------|----------|-----|------------------|-------------|----------|
| 408263   | T13        | 1        | 2   | GREEN PARK HOMES |             |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Thu Apr 23 15:00:09 2020 Page 1  
ID: d8NH1B00ExSc8K00Orbmazjel-1V 4EkZIAQcJg8xbqz6QJD9ail2AFza40Jk4GDzNpV4

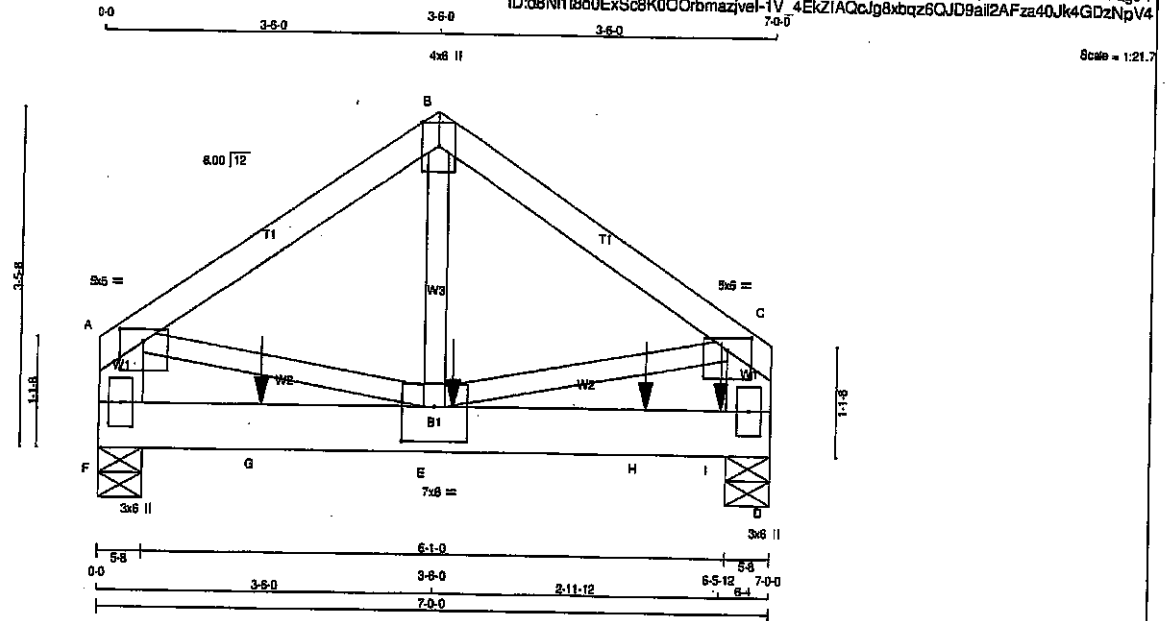

| LUMBER | N. L. G. A. RULES | CHORDS | SIZE | DRY | LUMBER | DESCR. |
|--------|-------------------|--------|------|-----|--------|--------|
| A - B  | 2x4               | DRY    | No.2 | SPF |        |        |
| B - C  | 2x4               | DRY    | No.2 | SPF |        |        |
| F - A  | 2x6               | DRY    | No.2 | SPF |        |        |
| D - C  | 2x6               | DRY    | No.2 | SPF |        |        |
| F - D  | 2x6               | DRY    | No.2 | SPF |        |        |

ALL WEBS 2x3 DRY No.2 SPF EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A - B 1 12                               |                      | TOP        |
| B - C 1 12                               |                      | TOP        |
| F - A 2 12                               |                      | TOP        |
| D - C 2 12                               |                      | TOP        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| F - D 2 12                               |                      | TOP        |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3 1 6                                  |                      |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

PLATES (table is in inches)

| JT TYPE   | PLATES | W   | LEN | Y    | X    |
|-----------|--------|-----|-----|------|------|
| A TMVW-p  | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| B TTW-p   | MT20   | 4.0 | 6.0 | Edge |      |
| C TMVW-p  | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| D BMV1-p  | MT20   | 3.0 | 6.0 |      |      |
| E BMVWW-1 | MT20   | 7.0 | 8.0 | 4.25 | 4.00 |
| F BMV1-p  | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| F  | 2945                    | 0    | 2945                            | 0    | 5-8       | 5-8      |
| D  | 4561                    | 0    | 4561                            | 0    | 5-8       | 5-8      |

#### UNFACTORED REACTIONS

| JT | 1ST LCASE |          | MAX/MIN COMPONENT REACTIONS |           | WIND  | DEAD     | SOIL  |
|----|-----------|----------|-----------------------------|-----------|-------|----------|-------|
|    | COMBINED  | SNOW     | LIVE                        | PERM.LIVE |       |          |       |
| F  | 2080      | 1380 / 0 | 0 / 0                       | 0 / 0     | 0 / 0 | 700 / 0  | 0 / 0 |
| D  | 3221      | 2136 / 0 | 0 / 0                       | 0 / 0     | 0 / 0 | 1085 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, D

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.21 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS        |             |                  |                  |                    | WEBS          |              |          |          |  |
|---------------|-------------|------------------|------------------|--------------------|---------------|--------------|----------|----------|--|
| MAX. FACTORED |             | FACTORED         |                  | MAX. UNBRAC LENGTH | MAX. FACTORED |              | MEMB.    | FACTORED |  |
| MEMB.         | FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX CSI (LC) |                    | FORCE (LBS)   | MAX CSI (LC) |          |          |  |
| FR-TO         |             | FROM             | TO               |                    | FR-TO         |              |          |          |  |
| A-B           | -2975 / 0   | -91.8            | -91.8            | 0.14 (1)           | 5.21          | E-B          | 0 / 2980 | 0.37 (1) |  |
| B-C           | -2975 / 0   | -91.8            | -91.8            | 0.14 (1)           | 5.21          | A-E          | 0 / 2527 | 0.31 (1) |  |
| F-A           | -2319 / 0   | 0.0              | 0.0              | 0.08 (1)           | 7.81          | E-C          | 0 / 2527 | 0.31 (1) |  |
| D-C           | -2319 / 0   | 0.0              | 0.0              | 0.08 (1)           | 7.81          |              |          |          |  |
|               |             |                  |                  |                    |               |              |          |          |  |
| F-G           | 0 / 0       | -18.5            | -18.5            | 0.38 (1)           | 10.00         |              |          |          |  |
| G-E           | 0 / 0       | -18.5            | -18.5            | 0.38 (1)           | 10.00         |              |          |          |  |
| E-H           | 0 / 0       | -18.5            | -18.5            | 0.59 (1)           | 10.00         |              |          |          |  |
| H-I           | 0 / 0       | -18.5            | -18.5            | 0.59 (1)           | 10.00         |              |          |          |  |
| I-D           | 0 / 0       | -18.5            | -18.5            | 0.58 (1)           | 10.00         |              |          |          |  |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1   | MAX-  | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-------|-------|------|------|------|-------|------|-------|
| E  | 3-8-4  | -1682 | -1682 | ---  | TOP  | VERT | TOTAL | ---  | C1    |
| G  | 1-8-4  | -1682 | -1682 | ---  | TOP  | VERT | TOTAL | ---  | C1    |
| H  | 5-8-4  | -1682 | -1682 | ---  | TOP  | VERT | TOTAL | ---  | C1    |
| I  | 6-5-12 | -1687 | -1687 | ---  | TOP  | VERT | TOTAL | ---  | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 32 = 64 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 8.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.23")  
CALCULATED VERT. DEFL.(LL) =  $L/989$  (0.03")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.23")  
CALCULATED VERT. DEFL.(TL) =  $L/989$  (0.05")

CSI: TC=0.14/1.00 (A-B:1), SC=0.59/1.00 (D-E:1),  
WB=0.37/1.00 (B-E:1), SS=0.74/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES


| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
|       | (PSI)     | (PLI) | (PLI)              |
| MT20  | 618       | 354   | 1667 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.83 (E) (INPUT = 0.90)

JSI METAL= 0.35 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006779

|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408263   | T14        | 3        | 1   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Thu Apr 23 15:00:10 2020 Page 1  
ID: d9N118c0ExSc8K00Orbmazjvel-VIYSS4axkkAIHWnOndfsQhIV9Vs\_V0DFzUaofzNpV3

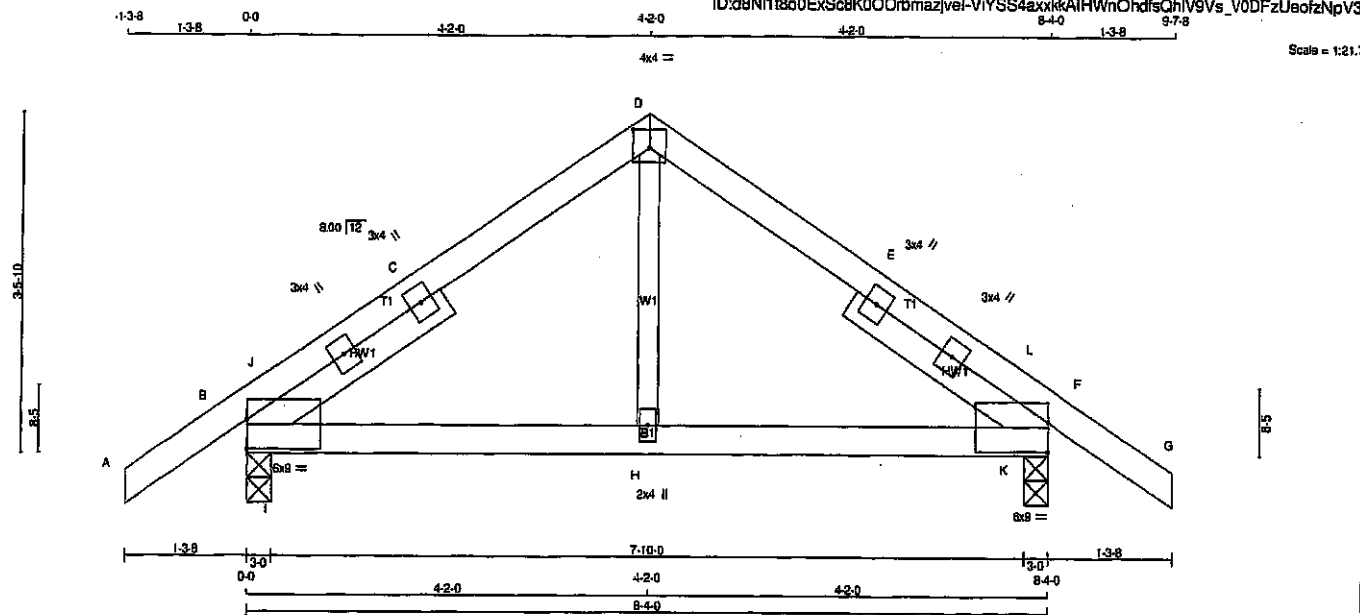

TOTAL WEIGHT = 3 X 33 = 99 lb  
(M/F)

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR. |
|--------|------|--------|--------|
| A - D  | 2x4  | DRY    | No.2   |
| D - G  | 2x4  | DRY    | No.2   |
| B - F  | 2x4  | DRY    | No.2   |

#### REINFORCING MEMBERS

|     |     |     |      |
|-----|-----|-----|------|
| HW1 | 2x4 | DRY | No.2 |
| HW2 | 2x4 | DRY | No.2 |

ALL WEBS 2x3 DRY, SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE    | PLATES | W   | LEN | Y    | X    |
|------------|--------|-----|-----|------|------|
| B TMBMR1-I | MT20   | 6.0 | 9.0 | 3.50 |      |
| B, B, F, F |        |     |     |      |      |
| B RT-I     | MT20   | 3.0 | 4.0 |      |      |
| D TTW-p    | MT20   | 4.0 | 4.0 | 2.25 | 2.00 |
| F TMBMR1-I | MT20   | 6.0 | 9.0 | 3.50 |      |
| H BMW-w    | MT20   | 2.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | UP/LIFT   | IN-SX    |
| B  | 585                     | 0                               | 585       | 0        |
| F  | 585                     | 0                               | 585       | 0        |

##### UNFACTORED REACTIONS

| JT | 1ST LCASE | MAX./MIN. COMPONENT REACTIONS | PERM/LIVE | WIND  | DEAD    | SOIL  |
|----|-----------|-------------------------------|-----------|-------|---------|-------|
| B  | 412       | 283 / 0                       | 0 / 0     | 0 / 0 | 128 / 0 | 0 / 0 |
| F  | 412       | 283 / 0                       | 0 / 0     | 0 / 0 | 128 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, F

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                        | WEBS  |                           |                        |  |
|--------|---------------------------|---------------------------|------------------------|-------|---------------------------|------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CS1 (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CS1 (LC) |  |
| FR-TO  |                           | FROM TO                   |                        | FR-TO |                           |                        |  |
| A-B    | 0 / 23                    | -91.8 -91.8               | 0.12 (1)               | H-D   | 0 / 162                   | 0.04 (1)               |  |
| B-J    | -245 / 0                  | -91.8 -91.8               | 0.05 (1)               | I-J   | -97 / 52                  | 0.00 (1)               |  |
| J-C    | -306 / 0                  | -91.8 -91.8               | 0.14 (1)               | I-C   | -230 / 0                  | 0.03 (1)               |  |
| C-D    | -306 / 0                  | -91.8 -91.8               | 0.14 (1)               | K-L   | -97 / 52                  | 0.00 (1)               |  |
| D-E    | -306 / 0                  | -91.8 -91.8               | 0.14 (1)               | K-E   | -230 / 0                  | 0.03 (1)               |  |
| E-L    | -306 / 0                  | -91.8 -91.8               | 0.14 (1)               |       |                           |                        |  |
| L-F    | -245 / 0                  | -91.8 -91.8               | 0.05 (1)               |       |                           |                        |  |
| F-G    | 0 / 23                    | -91.8 -91.8               | 0.12 (1)               |       |                           |                        |  |
| B-I    | 0 / 175                   | -18.5 -18.5               | 0.15 (1)               |       |                           |                        |  |
| I-H    | 0 / 332                   | -18.5 -18.5               | 0.17 (1)               |       |                           |                        |  |
| H-K    | 0 / 332                   | -18.5 -18.5               | 0.17 (1)               |       |                           |                        |  |
| K-F    | 0 / 175                   | -18.5 -18.5               | 0.15 (1)               |       |                           |                        |  |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.6 | PSF |
|            | DL | = 8.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD |    | = 39.0 | PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.28")  
CALCULATED VERT. DEFL.(LL) =  $L/399$  (0.01")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.28")  
CALCULATED VERT. DEFL.(TL) =  $L/399$  (0.02")

CS1: TC=0.14/1.00 (D-J:1), BC=0.17/1.00 (H-K:1), WB=0.04/1.00 (D-H:1), SS=0.20/1.00 (B-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP (DRY) | SHEAR                      | SECTION |
|------------------|----------------------------|---------|
| (PSI)            | (PLI)                      | (PLI)   |
| MAX MIN          | MAX MIN                    | MAX MIN |
| MT20             | 618 354 1667 788 1987 1656 |         |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.27 (D) (INPUT = 0.80)  
JSI METAL= 0.17 (F) (INPUT = 1.00)




Structural component only  
DWG# T-2006780

|                           |                           |                      |                 |                                      |             |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T14G</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Thu Apr 23 15:00:11 2020 Page 1  
ID: d8N1t8o0ExSc8K00Orbmazvel-zu6qfQbZ1s1vR5\_y08u0eExVysUjyLNTdDBK6zNpV2

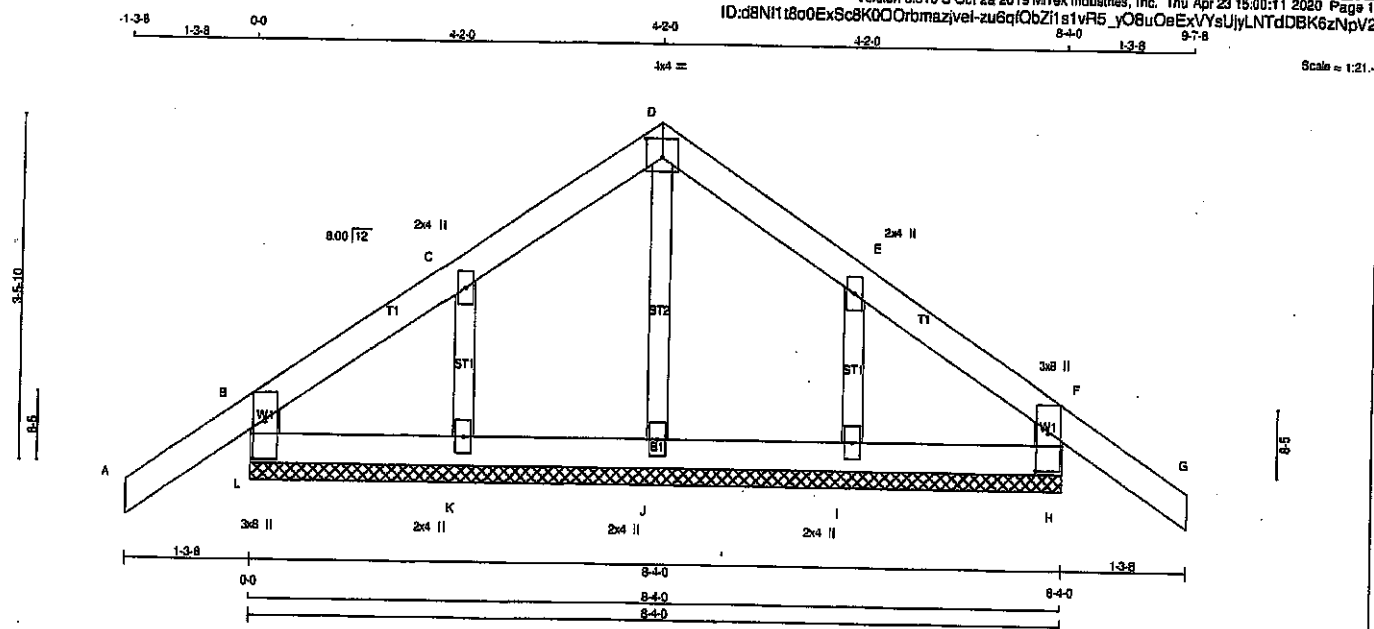

TOTAL WEIGHT = 30 lb

#### LUMBER

N. L. G. A. RULES  
CHORDS SIZE  
L - B 2x4 DRY No.2  
A - D 2x4 DRY No.2  
D - G 2x4 DRY No.2  
H - F 2x4 DRY No.2  
L - H 2x4 DRY No.2

ALL WEBS 2x3 DRY No.2  
ALL GABLE WEBS 2x3 DRY No.2  
DRY: SEASONED LUMBER.

GABLE STUDS SPACED AT 2'-0" OC.

DESCR.  
SPF  
SPF  
SPF  
SPF  
SPF

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER  
**BEARINGS**

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

#### PLATES (table is in inches)

| JT TYPE    | PLATES  | W    | LEN | Y   | X         |
|------------|---------|------|-----|-----|-----------|
| B, F, H, L |         |      |     |     |           |
| C          | TMW-w   | MT20 | 2.0 | 4.0 |           |
| D          | TTW-p   | MT20 | 4.0 | 4.0 | 2.25 2.00 |
| E          | TMW-w   | MT20 | 2.0 | 4.0 |           |
| F          | TBMV1+p | MT20 | 3.0 | 8.0 | 4.50 1.50 |
| I, J, K    |         |      |     |     |           |
| I          | BMW1-w  | MT20 | 2.0 | 4.0 |           |
| L          | TBMV1+p | MT20 | 3.0 | 8.0 | 4.50 1.50 |

| CHORDS |                           |                  |                   | WEBS  |                           |               |                      |
|--------|---------------------------|------------------|-------------------|-------|---------------------------|---------------|----------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX. CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) | UNBRACED LENGTH (FT) |
| FR-TO  |                           |                  |                   | FR-TO |                           |               |                      |
| L-B    | -247 / 0                  | 0.0              | 0.0 0.01 (4)      | J-D   | -183 / 0                  | 0.03 (1)      | 7.81                 |
| A-B    | 0 / 35                    | -91.8            | -91.8 0.12 (1)    | K-C   | -185 / 0                  | 0.03 (1)      | 10.00                |
| B-C    | -45 / 0                   | -91.8            | -91.8 0.05 (1)    | I-E   | -185 / 0                  | 0.03 (1)      | 6.25                 |
| C-D    | -34 / 0                   | -91.8            | -91.8 0.04 (1)    |       |                           |               | 6.25                 |
| D-E    | -34 / 0                   | -91.8            | -91.8 0.04 (1)    |       |                           |               | 6.25                 |
| E-F    | -45 / 0                   | -91.8            | -91.8 0.05 (1)    |       |                           |               | 6.25                 |
| F-G    | 0 / 35                    | -91.8            | -91.8 0.12 (1)    |       |                           |               | 10.00                |
| H-F    | -247 / 0                  | 0.0              | 0.0 0.01 (4)      |       |                           |               | 7.81                 |
| L-K    | 0 / 37                    | -18.5            | -18.5 0.02 (4)    |       |                           |               | 10.00                |
| K-J    | 0 / 28                    | -18.5            | -18.5 0.02 (4)    |       |                           |               | 10.00                |
| J-I    | 0 / 28                    | -18.5            | -18.5 0.02 (4)    |       |                           |               | 10.00                |
| I-H    | 0 / 37                    | -18.5            | -18.5 0.02 (4)    |       |                           |               | 10.00                |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.12/1.00 (F-G:1), BC=0.02/1.00 (K-L:4), WB=0.03/1.00 (D-J:1), SSI=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP (DRY) | SHEAR (PSI) | SECTION (PLI) | (PLI) | (PLI)     |
|-------|------------|-------------|---------------|-------|-----------|
|       |            |             |               |       |           |
| MT20  | 618        | 354         | 1667          | 788   | 1987 1856 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.23 (F) (INPUT = 0.90)

JSI METAL= 0.10 (L) (INPUT = 1.00)




Structural component only  
DWG# T-2006781

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | TRUSS DESC. | DRWG NO. |
|----------|------------|----------|-----|------------------|-------------|----------|
| 408263   | T15        | 1        | 2   | GREEN PARK HOMES |             |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Thu Apr 23 15:00:13 2020 Page 1  
ID:18N11t8o0ExSc8K00Orbmazivel-vHEa46dpE6I9IFM3pBMU3JGaMMeBpMgxxilP\_zNpV0

Scale = 1:22.4

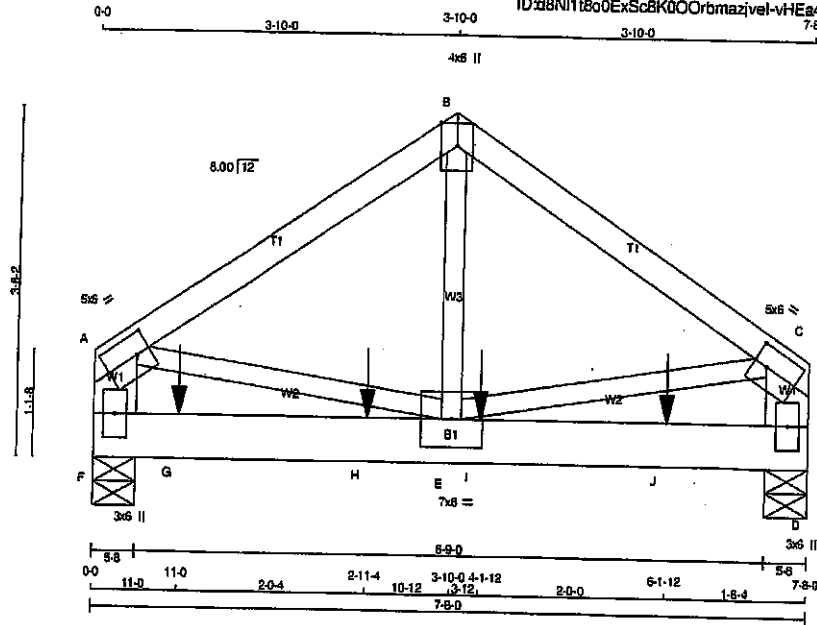

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER |
|--------|---------|--------|
| A - B  | 2x4 DRY | No.2   |
| B - C  | 2x4 DRY | No.2   |
| F - A  | 2x6 DRY | No.2   |
| D - C  | 2x6 DRY | No.2   |
| F - D  | 2x6 DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD(PLF)   |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| A-B 1                                    | 12                   | TOP         |
| B-C 1                                    | 12                   | TOP         |
| F-A 2                                    | 12                   | TOP         |
| D-C 2                                    | 12                   | TOP         |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| F-D 2                                    | 12                   | SIDE(183.1) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| 2x3 1                                    | 6                    |             |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

#### PLATES (table is in inches)

| JT TYPE  | PLATES | W   | LEN | Y    | X    |
|----------|--------|-----|-----|------|------|
| A TMVW-1 | MT20   | 5.0 | 8.0 | 2.50 | 1.75 |
| B TTW-up | MT20   | 4.0 | 8.0 | Edge |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----------|-------------------------|---------------------------------|-----------|------------|
| JT       | VERT                    | DOWN                            | UPLIFT    | IN-SX      |
| F        | 4115                    | 0                               | 5-8       | 5-8        |
| D        | 1915                    | 0                               | 5-8       | 5-8        |

#### UNFACTORED REACTIONS

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS |          |       |            |       |         |       |
|----------|-------------------------------|----------|-------|------------|-------|---------|-------|
| JT       | COMBINED                      | SNOW     | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
| F        | 2902                          | 1951 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 951 / 0 | 0 / 0 |
| D        | 1351                          | 908 / 0  | 0 / 0 | 0 / 0      | 0 / 0 | 443 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, D

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.88 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC) | MAX. FACTORED VERT. LOAD (LC) | WEBS  | MAX. FACTORED FORCE (LBS) | MAX. FACTORED VERT. LOAD (LC) |
|--------|---------------------------|---------------------------|-------------------------------|-------------------------------|-------|---------------------------|-------------------------------|
| FR-TO  |                           |                           |                               |                               | FR-TO |                           |                               |
| A-B    | -2163 / 0                 | -91.8                     | -91.8                         | 0.15 (1)                      | E-B   | 0 / 2047                  | 0.25 (1)                      |
| B-C    | -2163 / 0                 | -91.8                     | -91.8                         | 0.15 (1)                      | A-E   | 0 / 1831                  | 0.23 (1)                      |
| F-A    | -1713 / 0                 | 0.0                       | 0.0                           | 0.06 (1)                      | E-C   | 0 / 1831                  | 0.23 (1)                      |
| D-C    | -1713 / 0                 | 0.0                       | 0.0                           | 0.06 (1)                      |       |                           |                               |
| F-G    | 0 / 0                     | -18.5                     | -18.5                         | 0.81 (1)                      |       |                           |                               |
| G-H    | 0 / 0                     | -18.5                     | -18.5                         | 0.81 (1)                      |       |                           |                               |
| H-E    | 0 / 0                     | -18.5                     | -18.5                         | 0.81 (1)                      |       |                           |                               |
| E-I    | 0 / 0                     | -18.5                     | -18.5                         | 0.38 (1)                      |       |                           |                               |
| I-J    | 0 / 0                     | -18.5                     | -18.5                         | 0.38 (1)                      |       |                           |                               |
| J-D    | 0 / 0                     | -18.5                     | -18.5                         | 0.38 (1)                      |       |                           |                               |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1   | MAX.  | FACE | DIR. | TYPE | HEEL  | CONN. |
|----|--------|-------|-------|------|------|------|-------|-------|
| G  | 11-0   | -3270 | -3270 | ---  | BACK | VERT | TOTAL | C1    |
| H  | 2-11-4 | -638  | -638  | ---  | BACK | VERT | TOTAL | C1    |
| I  | 4-1-12 | -638  | -638  | ---  | BACK | VERT | TOTAL | C1    |
| J  | 6-1-12 | -638  | -638  | ---  | BACK | VERT | TOTAL | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 35 = 69 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.8 PSF |
|            | DL = 8.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.28")  
CALCULATED VERT. DEFL.(LL) = 1/999 (0.04")  
ALLOWABLE DEFL.(TL) = L/360 (0.28")  
CALCULATED VERT. DEFL.(TL) = 1/999 (0.07")

CSI: TC=0.15/1.00 (B-C:1), BC=0.81/1.00 (E-F:1),  
WB=0.25/1.00 (B-E:1), SS=0.80/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR                      | SECTION |
|-----------------|----------------------------|---------|
| (PSI)           | (PLI)                      | (PLI)   |
| MAX MIN         | MAX MIN                    | MAX MIN |
| MT20            | 618 354 1667 788 1987 1655 |         |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.76 (C) (INPUT = 0.90)  
JSI METAL= 0.28 (C) (INPUT = 1.00)



Structural component only  
DWG# T-2006782 1/2

CONTINUED ON PAGE 2

|                                 |            |             |     |                  |          |
|---------------------------------|------------|-------------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY    | PLY | JOB DESC.        | DRWG NO. |
| 408263                          | T15        | 1           | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            | TRUSS DESC. |     |                  |          |

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Thu Apr 23 15:00:13 2020 Page 2  
ID:d8N1t8p0ExSc8K00Qrbmazivel-vHEa46dcE6i8FM3p8MU3JGaMMe8pMoxilP zNoV0

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| C  | TMVW-1  | MT20   | 5.0 | 8.0 | 2.50 | 1.75 |
| D  | BMV1+p  | MT20   | 3.0 | 6.0 |      |      |
| E  | BMVWW-1 | MT20   | 7.0 | 8.0 |      |      |
| F  | BMV1+p  | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.




Structural component only  
DWG# T-2006782 212

|                           |                           |                      |                 |                                      |             |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>T16X</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:00:14 2020 Page 1  
ID:8N118c0ExSc8K00Orbmazjvel-NT0zHSdR\_yEcmvpZdWb0GsHdmkwAGpAbSrxOzNpV?

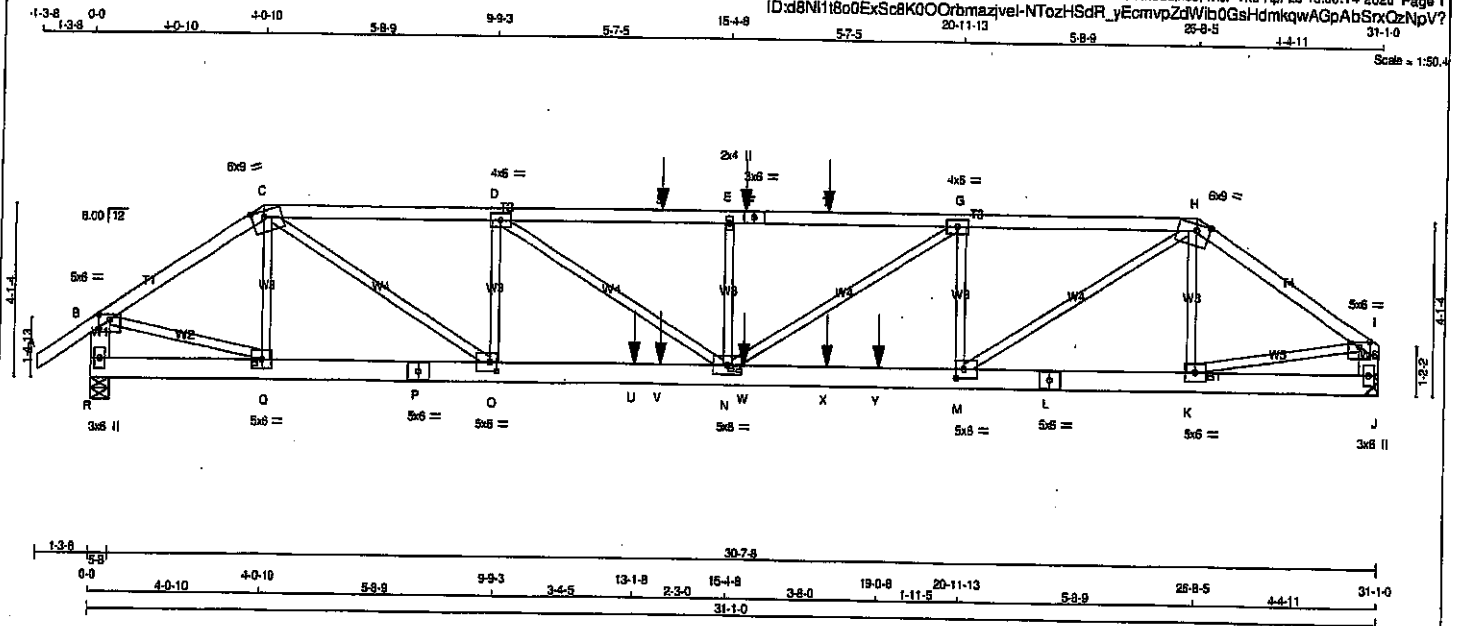

| LUMBER            |      |        |            |
|-------------------|------|--------|------------|
| N. L. G. A. RULES | SIZE | LUMBER | DESCR.     |
| CHORDS            |      |        |            |
| A - C             | 2x4  | DRY    | No.2       |
| C - F             | 2x4  | DRY    | No.2       |
| F - H             | 2x4  | DRY    | No.2       |
| H - I             | 2x4  | DRY    | No.2       |
| R - B             | 2x6  | DRY    | No.2       |
| J - I             | 2x6  | DRY    | No.2       |
| R - P             | 2x6  | DRY    | 1850F 1.5E |
| P - L             | 2x6  | DRY    | 1850F 1.5E |
| L - J             | 2x6  | DRY    | 1850F 1.5E |
| ALL WEBS EXCEPT   | 2x3  | DRY    | No.2       |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                            | SURFACE SPACING (IN) | LOAD(PLF) |
|-----------------------------------------|----------------------|-----------|
| TOP CHORDS: (0.122"x3") SPIRAL NAILS    |                      |           |
| A-C                                     | 12                   | TOP       |
| C-F                                     | 12                   | SIDE(0.0) |
| F-H                                     | 12                   | SIDE(0.0) |
| H-I                                     | 12                   | TOP       |
| R-B                                     | 12                   | TOP       |
| J-I                                     | 12                   | TOP       |
| BOTTOM CHORDS: (0.122"x3") SPIRAL NAILS |                      |           |
| R-P                                     | 12                   | TOP       |
| P-L                                     | 12                   | SIDE(0.0) |
| L-J                                     | 12                   | TOP       |
| WEBS: (0.122"x3") SPIRAL NAILS          |                      |           |
| 2x3                                     | 6                    | TOP       |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

| DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER |                |                  |       |        |        |            |       |
|-----------------------------------------------------------------------------------------------|----------------|------------------|-------|--------|--------|------------|-------|
| BEARINGS                                                                                      |                |                  |       |        |        |            |       |
|                                                                                               | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD |        |            |       |
|                                                                                               | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |        |            |       |
| JT                                                                                            | VERT           | HORZ             | DOWN  | HORZ   | UPLIFT | IN-SX      | IN-SX |
| R                                                                                             | 3395           | 0                | 3395  | 0      | 0      | 5-8        | 5-8   |
| J                                                                                             | 3288           | 0                | 3288  | 0      | 0      | MECHANICAL |       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J. MINIMUM BEARING LENGTH AT JOINT J = 4'-0".

| UNFACTORED REACTIONS |          |          |                     |           |       |         |       |
|----------------------|----------|----------|---------------------|-----------|-------|---------|-------|
| 1ST CASE             | MAX.     | MIN.     | COMPONENT REACTIONS |           |       |         |       |
| JT                   | COMBINED | SNOW     | LIVE                | PERM.LIVE | WIND  | DEAD    | SOIL  |
| R                    | 2393     | 1815 / 0 | 0 / 0               | 0 / 0     | 0 / 0 | 778 / 0 | 0 / 0 |
| J                    | 2320     | 1552 / 0 | 0 / 0               | 0 / 0     | 0 / 0 | 768 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R

BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.73 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

| LOADING               |                           |                           |                        |                    |       |                           |               |  |  |
|-----------------------|---------------------------|---------------------------|------------------------|--------------------|-------|---------------------------|---------------|--|--|
| TOTAL LOAD CASES: (4) |                           |                           |                        |                    |       |                           |               |  |  |
| CHORDS                |                           |                           |                        |                    | WEBS  |                           |               |  |  |
| MEMB.                 | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. LC1 MAX. CSI (LC) | MAX. UNBRAC LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |  |  |
| FR-TO                 |                           |                           |                        |                    | FR-TO |                           |               |  |  |
| A-B                   | 0 / 35                    | -91.8                     | -91.8 0.07 (1)         | 10.00              | C-C   | -803 / 0                  | 0.10 (1)      |  |  |
| B-C                   | -4012 / 0                 | -91.8                     | -91.8 0.22 (1)         | 4.55               | C-O   | 0 / 4808                  | 0.80 (1)      |  |  |
| C-D                   | -7341 / 0                 | -91.8                     | -91.8 0.58 (1)         | 3.28               | O-D   | -1883 / 0                 | 0.24 (1)      |  |  |
| D-S                   | -9289 / 0                 | -91.8                     | -91.8 0.74 (1)         | 2.78               | D-N   | 0 / 2340                  | 0.29 (1)      |  |  |
| S-E                   | -9289 / 0                 | -91.8                     | -91.8 0.74 (1)         | 2.78               | N-E   | -742 / 0                  | 0.09 (1)      |  |  |
| E-F                   | -9289 / 0                 | -91.8                     | -91.8 0.77 (1)         | 2.73               | N-G   | 0 / 2085                  | 0.26 (1)      |  |  |
| F-T                   | -9289 / 0                 | -91.8                     | -91.8 0.77 (1)         | 2.73               | M-G   | -1778 / 0                 | 0.23 (1)      |  |  |
| T-G                   | -9289 / 0                 | -91.8                     | -91.8 0.77 (1)         | 2.73               | M-H   | 0 / 4724                  | 0.58 (1)      |  |  |
| G-H                   | -7553 / 0                 | -91.8                     | -91.8 0.61 (1)         | 3.17               | K-H   | -585 / 0                  | 0.07 (1)      |  |  |
| H-I                   | -4344 / 0                 | -91.8                     | -91.8 0.27 (1)         | 4.35               | B-Q   | 0 / 3427                  | 0.42 (1)      |  |  |
| R-B                   | -3344 / 0                 | 0.0                       | 0.0 0.12 (1)           | 7.61               | K-I   | 0 / 3562                  | 0.45 (1)      |  |  |
| J-I                   | -3241 / 0                 | 0.0                       | 0.0 0.11 (1)           | 7.70               |       |                           |               |  |  |
| R-O                   | 0 / 0                     | -18.5                     | -18.5 0.02 (1)         | 10.00              |       |                           |               |  |  |
| Q-P                   | 0 / 3310                  | -18.5                     | -18.5 0.24 (1)         | 10.00              |       |                           |               |  |  |
| P-O                   | 0 / 3310                  | -18.5                     | -18.5 0.24 (1)         | 10.00              |       |                           |               |  |  |
| O-U                   | 0 / 7341                  | -18.5                     | -18.5 0.68 (1)         | 10.00              |       |                           |               |  |  |
| U-V                   | 0 / 7341                  | -18.5                     | -18.5 0.68 (1)         | 10.00              |       |                           |               |  |  |
| V-N                   | 0 / 7341                  | -18.5                     | -18.5 0.68 (1)         | 10.00              |       |                           |               |  |  |
| N-W                   | 0 / 7553                  | -18.5                     | -18.5 0.58 (1)         | 10.00              |       |                           |               |  |  |
| W-X                   | 0 / 7553                  | -18.5                     | -18.5 0.58 (1)         | 10.00              |       |                           |               |  |  |
| X-Y                   | 0 / 7553                  | -18.5                     | -18.5 0.58 (1)         | 10.00              |       |                           |               |  |  |
| Y-M                   | 0 / 7553                  | -18.5                     | -18.5 0.58 (1)         | 10.00              |       |                           |               |  |  |
| M-L                   | 0 / 3592                  | -18.5                     | -18.5 0.21 (1)         | 10.00              |       |                           |               |  |  |
| L-K                   | 0 / 3592                  | -18.5                     | -18.5 0.21 (1)         | 10.00              |       |                           |               |  |  |
| K-J                   | 0 / 0                     | -18.5                     | -18.5 0.02 (4)         | 10.00              |       |                           |               |  |  |

| FACTORED CONCENTRATED LOADS (LBS) |        |       |       |      |      |      |       |      |       |
|-----------------------------------|--------|-------|-------|------|------|------|-------|------|-------|
| JT                                | LOC.   | LC1   | MAX-  | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
| F                                 | 15-9-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| S                                 | 13-9-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| T                                 | 17-9-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| U                                 | 13-1-8 | -1578 | -1578 | ---  | BACK | VERT | TOTAL | ---  | C1    |
| V                                 | 13-9-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| W                                 | 15-9-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| X                                 | 17-9-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| Y                                 | 19-0-8 | -1141 | -1141 | ---  | BACK | VERT | TOTAL | ---  | C1    |

| DESIGN CRITERIA  |                |
|------------------|----------------|
| SPECIFIED LOADS: |                |
| TOP CH. LL       | = 25.6 PSF     |
| DL               | = 6.0 PSF      |
| BOT CH. LL       | = 0.0 PSF      |
| DL               | = 7.4 PSF      |
| TOTAL LOAD       | = 39.0 PSF     |
| SPACING          | = 24.0 IN. C/C |

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBCC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 088-08, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.04")  
CALCULATED VERT. DEFL.(LL) = L/989 (0.28")  
ALLOWABLE DEFL.(TL) = L/360 (1.04")  
CALCULATED VERT. DEFL.(TL) = L/805 (0.46")

CSI: TC=0.77/1.00 (E-G:1), BC=0.68/1.00 (N-O:1), WB=0.60/1.00 (C-O:1), SS=0.37/1.00 (N-O:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


| NAIL VALUES |           |       |         |     |      |
|-------------|-----------|-------|---------|-----|------|
| PLATE       | GRIP(DRY) | SHEAR | SECTION |     |      |
| (PSI)       | (PLI)     | (PLI) |         |     |      |
| MAX         | MIN       | MAX   | MIN     | MAX | MIN  |
| MT20        | 618       | 354   | 1687    | 788 | 1987 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (M) (INPUT = 0.90)

JSI METAL = 0.50 (O) (INPUT = 1.00)



Structural component only  
DWG# T-2006783 1/2

CONTINUED ON PAGE 2

|          |            |          |     |                  |          |
|----------|------------|----------|-----|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408263   | T16X       | 1        | 2   | GREEN PARK HOMES |          |

Tamarack Roof Truss, Burlington

Version 8.310 8 Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:00:14 2020 Page 2  
ID: d8N118p0ExSc8K00Orbmazivel-NTozHSdR vEcmvpZdWi50GstHdmkqWAGoAbSrxOzNgV?

| PLATES (table is in inches) |        |        |     |     |           |
|-----------------------------|--------|--------|-----|-----|-----------|
| JT                          | TYPE   | PLATES | W   | LEN | Y X       |
| B                           | TMVW-p | MT20   | 5.0 | 6.0 | 1.50 3.00 |
| C                           | TTWW-m | MT20   | 6.0 | 9.0 | 1.75 3.50 |
| D                           | TMWW-t | MT20   | 4.0 | 6.0 |           |
| E                           | TMW-w  | MT20   | 2.0 | 4.0 |           |
| F                           | TS-t   | MT20   | 3.0 | 6.0 |           |
| G                           | TMWW-t | MT20   | 4.0 | 6.0 |           |
| H                           | TTWW-m | MT20   | 6.0 | 9.0 | 1.75 3.50 |
| I                           | TMVW-p | MT20   | 5.0 | 6.0 | 1.50 3.00 |
| J                           | BMV1+p | MT20   | 3.8 | 6.0 |           |
| K                           | BMWW-t | MT20   | 5.0 | 6.0 |           |
| L                           | BS-t   | MT20   | 5.0 | 6.0 |           |
| M                           | BMWW-t | MT20   | 5.0 | 6.0 | 2.50 2.25 |
| N                           | BMWW-t | MT20   | 5.0 | 6.0 |           |
| O                           | BMWW-t | MT20   | 5.0 | 6.0 | 2.50 2.00 |
| P                           | BS-t   | MT20   | 5.0 | 6.0 |           |
| Q                           | BMWW-t | MT20   | 5.0 | 6.0 |           |
| R                           | BMV1+p | MT20   | 3.0 | 6.0 |           |

#### CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only  
DWG# T-2006783

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | TRUSS DESC. | DRWG NO. |
|----------|------------|----------|-----|------------------|-------------|----------|
| 408264   | T21        | 1        | 2   | GREEN PARK HOMES |             |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Thu Apr 23 15:13:59 2020 Page 1  
ID: SgJMMpjrEgZE5VLzZMvKzJdJd-kB8rRYcxIRAYFhO6SH72yFXH1KJ8JLpRdO06zNpI6

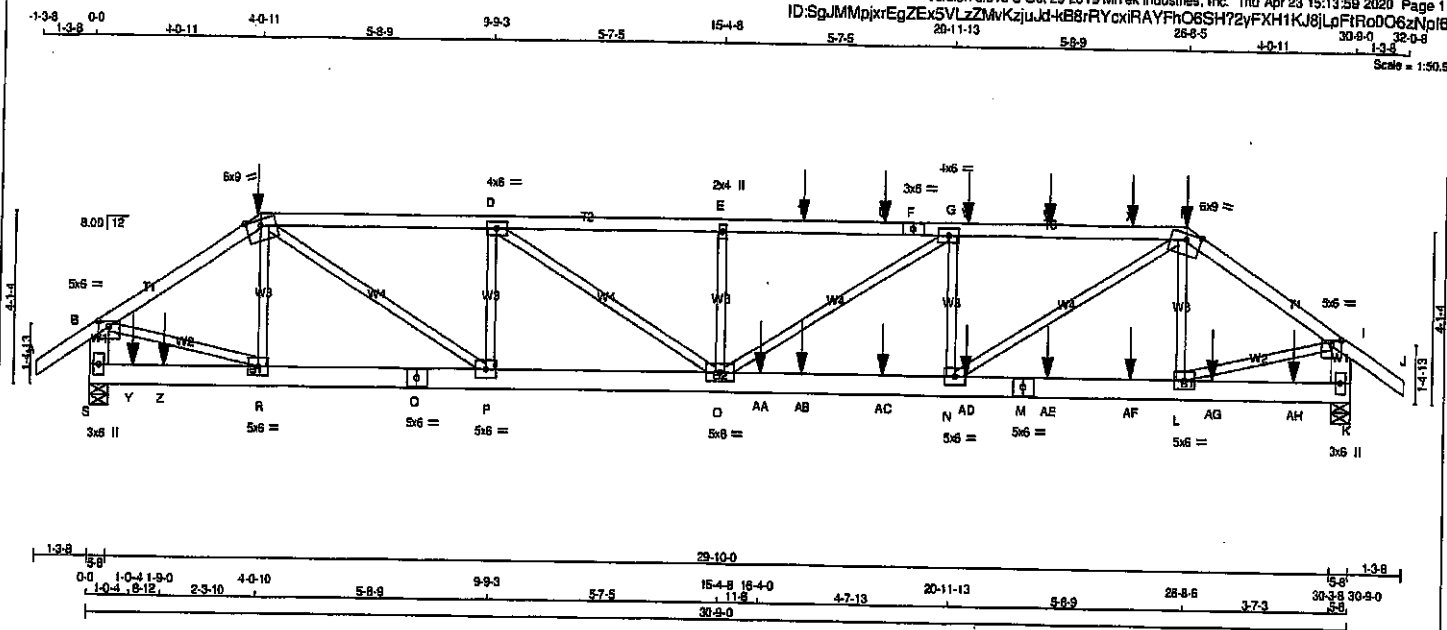

#### LUMBER

##### N. L. G. A. RULES

| CHORDS          | SIZE | DRY | LUMBER | DESCR. |
|-----------------|------|-----|--------|--------|
| A - C           | 2x4  | DRY | No.2   | SPF    |
| C - F           | 2x4  | DRY | No.2   | SPF    |
| F - H           | 2x4  | DRY | No.2   | SPF    |
| H - J           | 2x4  | DRY | No.2   | SPF    |
| S - B           | 2x6  | DRY | No.2   | SPF    |
| K - I           | 2x6  | DRY | No.2   | SPF    |
| S - Q           | 2x6  | DRY | No.2   | SPF    |
| Q - M           | 2x6  | DRY | No.2   | SPF    |
| M - K           | 2x6  | DRY | No.2   | SPF    |
| ALL WEBS EXCEPT | 2x3  | DRY | No.2   | SPF    |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                            | SURFACE SPACING (IN) | LOAD (PLF) |
|-----------------------------------------|----------------------|------------|
| TOP CHORDS: (0.122"x3") SPIRAL NAILS    |                      |            |
| A-G 1 12                                | SIDE(61.0)           |            |
| C-F 1 12                                | SIDE(61.0)           |            |
| F-H 1 12                                | SIDE(61.0)           |            |
| H-J 1 12                                | SIDE(61.0)           |            |
| S-B 2 12                                | TOP                  |            |
| K-I 2 12                                | TOP                  |            |
| BOTTOM CHORDS: (0.122"x3") SPIRAL NAILS |                      |            |
| S-Q 2 12                                | SIDE(0.0)            |            |
| Q-M 2 12                                | SIDE(0.0)            |            |
| M-K 2 12                                | SIDE(0.0)            |            |
| WEBS: (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3 1 6                                 |                      |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP: COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | DOWN                            | UPLIFT    | IN-SX      |
| S  | 3933                    | 0                               | 0         | 5-8        |
| K  | 3308                    | 0                               | 0         | 5-8        |

##### UNFACTORED REACTIONS

|    | 1ST CASE | MAX. MIN. COMPONENT REACTIONS |      |            |      |       |      |
|----|----------|-------------------------------|------|------------|------|-------|------|
| JT | COMBINED | SNOW                          | LIVE | PERM. LIVE | WIND | DEAD  | SOIL |
| S  | 2771     | 1875.0                        | 0.0  | 0.0        | 0.0  | 886.0 | 0.0  |
| K  | 2335     | 1558.0                        | 0.0  | 0.0        | 0.0  | 777.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.05 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED MEMB. FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | WEBS  | MAX. FACTORED MEMB. FORCE (LBS) | MAX. FACTORED VERT. LOAD (LBS) |
|--------|---------------------------------|---------------------------|--------------------------------|--------------------------------|-------|---------------------------------|--------------------------------|
| FR-TO  |                                 |                           |                                |                                | FR-TO |                                 |                                |
| A-B    | 0 / 35                          | -91.8                     | -91.8                          | 0.07 (1)                       | R-C   | -26 / 74                        | 0.01 (4)                       |
| B-C    | -3995 / 0                       | -91.8                     | -91.8                          | 0.22 (1)                       | C-P   | 0 / 2798                        | 0.35 (1)                       |
| C-D    | -5663 / 0                       | -91.8                     | -91.8                          | 0.42 (1)                       | P-D   | -1615 / 0                       | 0.20 (1)                       |
| D-E    | -7238 / 0                       | -91.8                     | -91.8                          | 0.54 (1)                       | D-O   | 0 / 1891                        | 0.23 (1)                       |
| E-T    | -7238 / 0                       | -91.8                     | -91.8                          | 0.73 (1)                       | O-E   | -954 / 0                        | 0.07 (1)                       |
| T-U    | -7238 / 0                       | -91.8                     | -91.8                          | 0.73 (1)                       | O-G   | 0 / 1188                        | 0.15 (1)                       |
| U-F    | -7238 / 0                       | -91.8                     | -91.8                          | 0.73 (1)                       | G-H   | -1808 / 0                       | 0.20 (1)                       |
| F-G    | -7238 / 0                       | -91.8                     | -91.8                          | 0.73 (1)                       | H-H   | 0 / 3615                        | 0.45 (1)                       |
| G-V    | -8249 / 0                       | -91.8                     | -91.8                          | 0.65 (1)                       | V-H   | -630 / 0                        | 0.08 (1)                       |
| V-W    | -8249 / 0                       | -91.8                     | -91.8                          | 0.65 (1)                       | B-R   | 0 / 3413                        | 0.42 (1)                       |
| W-X    | -8249 / 0                       | -91.8                     | -91.8                          | 0.65 (1)                       | L-I   | 0 / 3328                        | 0.41 (1)                       |
| X-H    | -8249 / 0                       | -91.8                     | -91.8                          | 0.65 (1)                       |       |                                 |                                |
| H-I    | -3698 / 0                       | -91.8                     | -91.8                          | 0.22 (1)                       |       |                                 |                                |
| I-J    | 0 / 35                          | -91.8                     | -91.8                          | 0.07 (1)                       |       |                                 |                                |
| S-B    | -3332 / 0                       | 0.0                       | 0.0                            | 0.12 (1)                       |       |                                 |                                |
| K-I    | -3257 / 0                       | 0.0                       | 0.0                            | 0.12 (1)                       |       |                                 |                                |
| S-Y    | 0 / 0                           | -18.5                     | -18.5                          | 0.37 (1)                       |       |                                 |                                |
| Y-Z    | 0 / 0                           | -18.5                     | -18.5                          | 0.37 (1)                       |       |                                 |                                |
| Z-R    | 0 / 0                           | -18.5                     | -18.5                          | 0.37 (1)                       |       |                                 |                                |
| R-Q    | 0 / 3318                        | -18.5                     | -18.5                          | 0.36 (1)                       |       |                                 |                                |
| Q-P    | 0 / 3318                        | -18.5                     | -18.5                          | 0.36 (1)                       |       |                                 |                                |
| P-O    | 0 / 5663                        | -18.5                     | -18.5                          | 0.46 (1)                       |       |                                 |                                |
| O-AA   | 0 / 8249                        | -18.5                     | -18.5                          | 0.66 (1)                       |       |                                 |                                |
| AA-AB  | 0 / 8249                        | -18.5                     | -18.5                          | 0.66 (1)                       |       |                                 |                                |
| AB-AC  | 0 / 8249                        | -18.5                     | -18.5                          | 0.66 (1)                       |       |                                 |                                |
| AC-N   | 0 / 8249                        | -18.5                     | -18.5                          | 0.66 (1)                       |       |                                 |                                |
| N-AD   | 0 / 3219                        | -18.5                     | -18.5                          | 0.66 (1)                       |       |                                 |                                |
| AD-M   | 0 / 3219                        | -18.5                     | -18.5                          | 0.26 (1)                       |       |                                 |                                |
| MAE    | 0 / 3219                        | -18.5                     | -18.5                          | 0.26 (1)                       |       |                                 |                                |
| AE-AF  | 0 / 3219                        | -18.5                     | -18.5                          | 0.26 (1)                       |       |                                 |                                |
| AF-L   | 0 / 3219                        | -18.5                     | -18.5                          | 0.26 (1)                       |       |                                 |                                |
| L-AG   | 0 / 0                           | -18.5                     | -18.5                          | 0.04 (4)                       |       |                                 |                                |
| AG-AH  | 0 / 0                           | -18.5                     | -18.5                          | 0.04 (4)                       |       |                                 |                                |
| AH-K   | 0 / 0                           | -18.5                     | -18.5                          | 0.04 (4)                       |       |                                 |                                |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1  | MAX. | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|------|------|------|-------|------|-------|------|-------|
| C  | 4-0-11 | -50  | -56  | ---  | FRONT | VERT | DEAD  | ---  | C1    |
| C  | 4-0-11 | -263 | -263 | ---  | FRONT | VERT | SNOW  | ---  | C1    |
| H  | 26-8-5 | -50  | -56  | ---  | FRONT | VERT | DEAD  | ---  | C1    |
| H  | 26-8-5 | -263 | -263 | ---  | FRONT | VERT | SNOW  | ---  | C1    |
| T  | 17-4-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |

TOTAL WEIGHT = 2 X 140 = 279 b

#### DESIGN CRITERIA

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.6 PSF |
| DL         | = 6.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

\*\*\* NON STANDARD GIRDER \*\*\*  
ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-08, CSA 088-14
- TPIC 2010, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (1.03")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.19")  
ALLOWABLE DEFL. (TL) = L/360 (1.03")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.35")

CSI: TC=0.73;1.00 (E-G:1), BC=0.66;1.00 (N-C:1), WB=0.45;1.00 (H-N:1), SS=0.34;1.00 (N-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE GRIP (DRY) | SHEAR | SECTION                |
|------------------|-------|------------------------|
| (PSI)            | (PLI) | (PLI)                  |
| MAX              | MIN   | MAX MIN                |
| MT20             | 518   | 354 1687 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (H) (INPUT = 0.90)  
JSI METAL = 0.41 (R) (INPUT = 1.00)



Structural component only  
DWG# T-2006792

CONTINUED ON PAGE 2

|          |            |          |     |             |                  |           |
|----------|------------|----------|-----|-------------|------------------|-----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRAWG NO. |
| 408264   | T21        | 1        | 2   | TRUSS DESC. |                  |           |

Tamarack Roof Truss, Burlington

Version 6.310 9 Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:59 2020 Page 2  
ID: SqJMMpJxrEqZE5VLzZMKZiJd-kB8rRYcxIRAYFhO6SH72vFXH1KJ8LpFRa006zNp16

**PLATES** (table is in inches)

| JT         | TYPE   | PLATES | W   | LEN | Y    | X    |
|------------|--------|--------|-----|-----|------|------|
| B          | TMWW-p | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| C          | TTWW-m | MT20   | 6.0 | 9.0 | Edge | 4.25 |
| D          | TMWW-t | MT20   | 4.0 | 6.0 |      |      |
| E          | TMWW-w | MT20   | 2.0 | 4.0 |      |      |
| F          | TS-t   | MT20   | 3.0 | 6.0 |      |      |
| G          | TMWW-t | MT20   | 4.0 | 6.0 |      |      |
| H          | TTWW-m | MT20   | 6.0 | 9.0 | Edge | 4.25 |
| I          | TMWW-p | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| K          | BMV1+p | MT20   | 3.0 | 6.0 |      |      |
| L, N, P, R |        |        |     |     |      |      |
| L          | BMWW-t | MT20   | 5.0 | 6.0 |      |      |
| M          | BS-t   | MT20   | 5.0 | 6.0 |      |      |
| O          | BMWW-t | MT20   | 5.0 | 6.0 |      |      |
| Q          | BS-t   | MT20   | 5.0 | 6.0 |      |      |
| S          | BMV1+p | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1   | MAX-  | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-------|-------|------|-------|------|-------|------|-------|
| U  | 19-4-4 | -110  | -110  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| V  | 21-4-4 | -110  | -110  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| W  | 23-4-4 | -110  | -110  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| X  | 25-4-4 | -110  | -110  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| Y  | 1-0-4  | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| Z  | 1-9-0  | -1105 | -1105 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AA | 16-4-0 | -1105 | -1105 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AB | 17-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AC | 19-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AD | 21-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AE | 23-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AF | 25-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AG | 27-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AH | 29-4-4 | -26   | -26   | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only  
DWG# T-2006792

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Thu Apr 23 15:14:00 2020 Page 1  
ID:SgJMMpjxrEgZEx5VLzZMvKzjwJd-CNIdEudZTIIPsrzJ0?WHV53WPkkQ8jCO65XZxYzNpI5




Structural component only  
DWG# T-2006793

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b>       | TRUSS NAME<br><b>T23</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 | TRUSS DESC.                          |          |

Version 8.310 S Oct 29 2019 Mittek Industries, Inc. Thu Apr 23 15:14:01 2020 Page 1

ID: SgJMMpkrEgZEx5VLzZMvKzjwd-g2GcsEeBE3QGU?YYai1W1gch73xBD2YKIH6T?zNp14

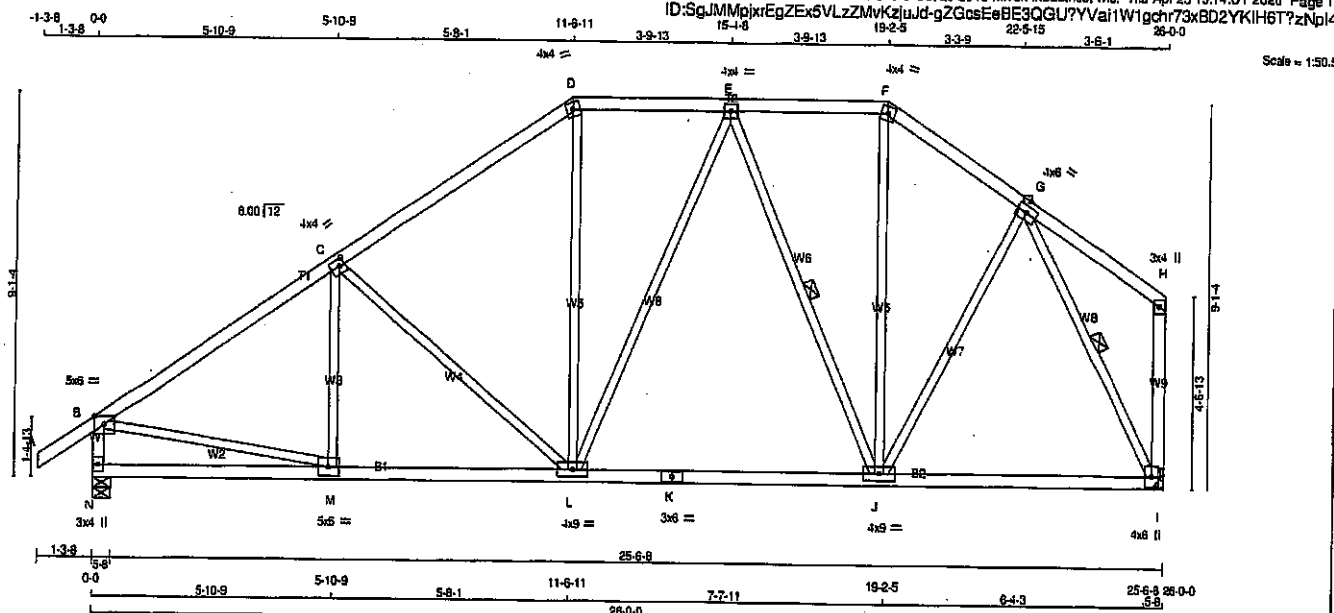

TOTAL WEIGHT = 126 lb

| LUMBER            |      |        |        |
|-------------------|------|--------|--------|
| N. L. G. A. RULES | SIZE | LUMBER | DESCR. |
| CHORDS            |      |        |        |
| A - D             | 2x4  | DRY    | No.2   |
| D - F             | 2x4  | DRY    | No.2   |
| F - H             | 2x4  | DRY    | No.2   |
| N - B             | 2x4  | DRY    | No.2   |
| I - H             | 2x4  | DRY    | No.2   |
| N - K             | 2x4  | DRY    | No.2   |
| K - I             | 2x4  | DRY    | No.2   |
| ALL WEBS EXCEPT   | 2x3  | DRY    | No.2   |

DRY: SEASONED LUMBER.

| PLATES (tablets in inches) |         |        |     |     |           |
|----------------------------|---------|--------|-----|-----|-----------|
| JT                         | TYPE    | PLATES | W   | LEN | Y X       |
| B                          | TMWV-p  | MT20   | 5.0 | 6.0 | Edge      |
| C                          | TMWV-l  | MT20   | 4.0 | 4.0 | 2.00 1.50 |
| D                          | TTW-m   | MT20   | 4.0 | 4.0 |           |
| E                          | TMWV-l  | MT20   | 4.0 | 4.0 |           |
| F                          | TTW-m   | MT20   | 4.0 | 4.0 |           |
| G                          | TMWV-l  | MT20   | 4.0 | 6.0 |           |
| H                          | TMV-p   | MT20   | 3.0 | 4.0 |           |
| I                          | BMVW1-p | MT20   | 4.0 | 8.0 |           |
| J                          | BMVWV-l | MT20   | 4.0 | 9.0 |           |
| K                          | BS-l    | MT20   | 3.0 | 6.0 |           |
| L                          | BMVWV-l | MT20   | 4.0 | 9.0 |           |
| M                          | BMVWV-l | MT20   | 5.0 | 6.0 |           |
| N                          | BMV1-p  | MT20   | 3.0 | 4.0 |           |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS |      | FACTORED       |                | MAXIMUM FACTORED |       | INPUT      |     | REQD  |       |
|----------|------|----------------|----------------|------------------|-------|------------|-----|-------|-------|
| JT       | VERT | GROSS REACTION | GROSS REACTION | DOWN             | HORIZ | BRG        | BRG | IN-SX | IN-SX |
| N        | 1559 | 0              | 1559           | 0                | 0     | 5-8        | 5-8 |       |       |
| I        | 1433 | 0              | 1433           | 0                | 0     | MECHANICAL |     |       |       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3-8.

**UNFACTORED REACTIONS**

| 1ST CASE |          | MAX./MIN. COMPONENT REACTIONS |      |            |      |       |      |
|----------|----------|-------------------------------|------|------------|------|-------|------|
| JT       | COMBINED | SNOW                          | LIVE | PERM. LIVE | WIND | DEAD  | SOIL |
| N        | 1100     | 735.0                         | 0.0  | 0.0        | 0.0  | 365.0 | 0.0  |
| I        | 1014     | 685.0                         | 0.0  | 0.0        | 0.0  | 348.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.69 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-J, G-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                          |                        | WEBS  |                           |                        |          |
|--------|---------------------------|--------------------------|------------------------|-------|---------------------------|------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PL) | MAX. FACTORED CS1 (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CS1 (LC) |          |
| FR-TO  |                           | FROM TO                  | LENGTH                 | FR-TO |                           |                        |          |
| A-B    | 0:35                      | -91.8                    | -91.8 0.12 (1)         | 10.00 | M-C                       | -141.45                | 0.06 (1) |
| B-C    | -1633.0                   | -91.8                    | -91.8 0.46 (1)         | 4.69  | C-L                       | -449.0                 | 0.53 (1) |
| C-D    | -1298.0                   | -91.8                    | -91.8 0.42 (1)         | 5.16  | L-D                       | 0.368                  | 0.08 (1) |
| D-E    | -1053.0                   | -91.8                    | -91.8 0.17 (1)         | 5.94  | L-E                       | 0.50                   | 0.02 (4) |
| E-F    | -936.0                    | -91.8                    | -91.8 0.17 (1)         | 6.25  | E-J                       | -510.0                 | 0.33 (1) |
| F-G    | -1022.0                   | -91.8                    | -91.8 0.14 (1)         | 8.05  | J-F                       | 0.301                  | 0.07 (1) |
| G-H    | 0.19                      | -91.8                    | -91.8 0.16 (1)         | 10.00 | J-G                       | 0.362                  | 0.08 (1) |
| H-I    | -1513.0                   | 0.0                      | 0.0 0.16 (1)           | 6.58  | B-M                       | 0.1411                 | 0.32 (1) |
| I-H    | -124.0                    | 0.0                      | 0.0 0.04 (1)           | 7.81  | G-I                       | -1424.0                | 0.51 (1) |
| N-M    | 0.0                       | -18.5                    | -18.5 0.14 (4)         | 10.00 |                           |                        |          |
| M-L    | 0.1388                    | -18.5                    | -18.5 0.31 (1)         | 10.00 |                           |                        |          |
| L-K    | 0.1034                    | -18.5                    | -18.5 0.32 (4)         | 10.00 |                           |                        |          |
| K-J    | 0.1034                    | -18.5                    | -18.5 0.32 (4)         | 10.00 |                           |                        |          |
| J-I    | 0.663                     | -18.5                    | -18.5 0.29 (4)         | 10.00 |                           |                        |          |

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLES WITH:  
- PART 9 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2018 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.87")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.04")  
ALLOWABLE DEFL.(TL) = L/360 (0.87")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.10")

CS1: TC=0.46/1.00 (B-C:1), BC=0.32/1.00 (J-L:4), WB=0.53/1.00 (C-L:1), SS1=0.22/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION (PS) (PL) (PL)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1867 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (B) (INPUT = 0.90)  
JSI METAL= 0.39 (K) (INPUT = 1.00)



Structural component only  
DWG# T-2006794



|                    |                   |               |          |                               |          |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>T24 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|


Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 28 2019 Mitek Industries, Inc. Thu Apr 23 15:14:02 2020 Page 2  
ID:SoJMMpkrEoZEx5VLzZMvKziJd-8mq\_3Zfp?MY7687h8QZlat9coXlAwdShZP0q?RzNol3

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 6.0 | 9.0 | 2.75 | 4.50 |
| C  | TMVW-t | MT20   | 5.0 | 6.0 | 2.25 | 1.75 |
| D  | TTWW-m | MT20   | 5.0 | 8.0 | Edge |      |
| E  | TMVW-w | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m | MT20   | 5.0 | 8.0 | Edge |      |
| G  | TMVW-t | MT20   | 5.0 | 8.0 | 2.25 | 1.75 |
| H  | TMVW-t | MT20   | 6.0 | 9.0 | 2.75 | 4.50 |
| J  | BMV1-t | MT20   | 8.0 | 9.0 | Edge | 0.50 |
| K  | BMVW-t | MT20   | 8.0 | 9.0 |      |      |
| L  | BMVW-t | MT20   | 5.0 | 8.0 | 3.00 | 2.00 |
| M  | BS-t   | MT20   | 5.0 | 8.0 |      |      |
| N  | BMVW-t | MT20   | 5.0 | 8.0 |      |      |
| O  | BMVW-t | MT20   | 5.0 | 6.0 | 3.00 | 2.00 |
| P  | BMVW-t | MT20   | 8.0 | 9.0 |      |      |
| Q  | BMV1-t | MT20   | 6.0 | 8.0 | 5.50 |      |


Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.



Structural component only  
DWG# T-2006795 42

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>T25</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Version 5.310 5 Oct 29 2019 MTEK Industries, Inc. Thu Apr 23 15:14:04 2020 Page 1  
 ID: SqJMM0jxRqZE5VLzZMvKzJd48ykUFp4Xz0rLSG4FqbDHE9IL1KOVH\_1Vm4KzNp17  
 30-1-1 30-9-0 32-0-8  
 +12 3-3 1  
 Scale = 1:50.9

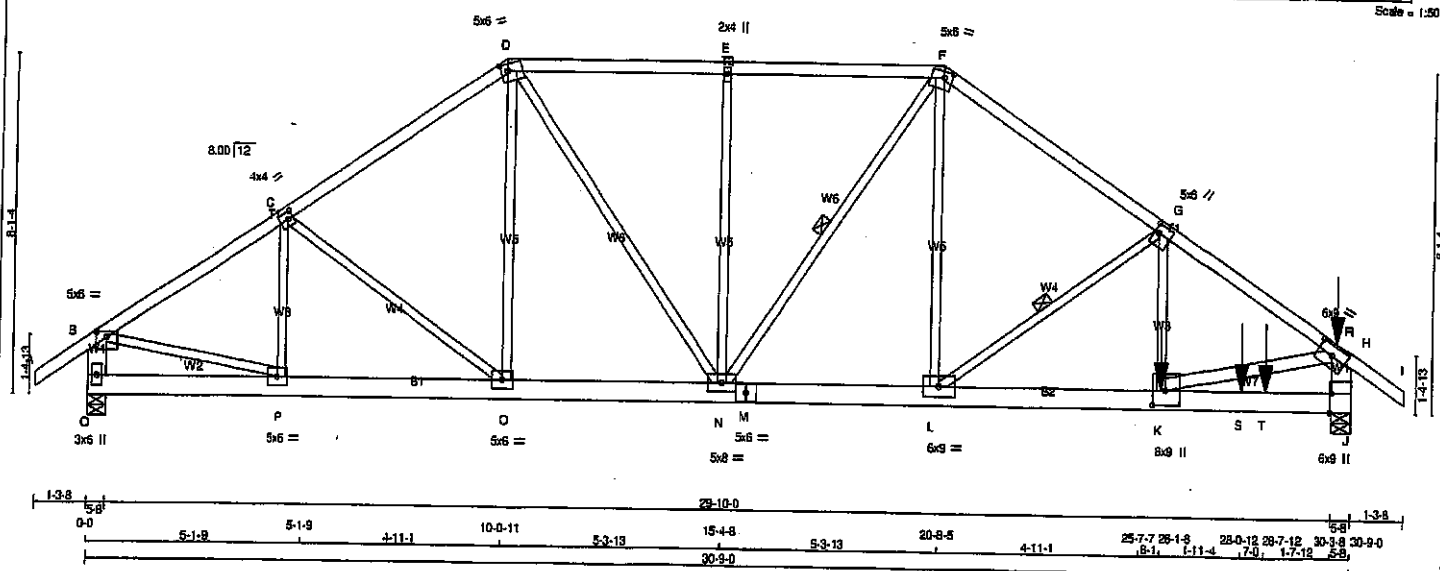

**LUMBER**  
 N.L.G.A. RULES  
 CHORDS SIZE DRY LUMBER DESCR.  
 A - D 2x4 DRY No.2 SPF  
 D - F 2x4 DRY No.2 SPF  
 F - I 2x4 DRY No.2 SPF  
 Q - B 2x6 DRY No.2 SPF  
 J - H 2x6 DRY No.2 SPF  
 Q - M 2x6 DRY No.2 SPF  
 M - J 2x6 DRY No.2 SPF

ALL WEBS 2x3 DRY No.2 SPF  
 EXCEPT  
 K - H 2x4 DRY No.2 SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)    |
|------------------------------------------|----------------------|---------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |               |
| A-D 1                                    | 12                   | TOP           |
| D-F 1                                    | 12                   | TOP           |
| F-I 1                                    | 12                   | TOP           |
| Q-B 2                                    | 12                   | TOP           |
| J-H 2                                    | 12                   | TOP           |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |               |
| Q-M 2                                    | 12                   | TOP           |
| M-J 2                                    | 8                    | SIDE (427.3)  |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |               |
| G-K 1                                    | 2                    | SIDE (1078.1) |
| 2x3 1                                    | 6                    |               |
| 2x4 1                                    | 6                    |               |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.  
 GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.  
 TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG IN-SX | REQD BRG IN-SX |
|----|-------------------------|------|---------------------------------|------|-----------------|----------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |                 |                |
| Q  | 2809                    | 0    | 2809                            | 0    | 5-8             | 5-8            |
| J  | 8189                    | 0    | 8189                            | 0    | 5-8             | 5-8            |

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED |          | MAX. MIN. COMPONENT REACTIONS |       | WIND DEAD | SOIL  |
|----|--------------------|----------|-------------------------------|-------|-----------|-------|
|    | SNOW               | LIVE     | PERM. LIVE                    | WIND  |           |       |
| Q  | 1902               | 1325 / 0 | 0 / 0                         | 0 / 0 | 658 / 0   | 0 / 0 |
| J  | 5773               | 3889 / 0 | 0 / 0                         | 0 / 0 | 1884 / 0  | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, J

**BRACING**  
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.74 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF F-N, G-L  
 END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                   |                      | WEBS  |                           |               |          |  |
|--------|---------------------------|---------------------------|-------------------|----------------------|-------|---------------------------|---------------|----------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX. CSI (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |          |  |
| FR-TO  |                           | FROM TO                   |                   |                      | FR-TO |                           |               |          |  |
| A-B    | 0 / 35                    | -91.8                     | -91.8             | 0.07 (1)             | 10.00 | P-C                       | -544 / 0      | 0.08 (1) |  |
| B-C    | -3339 / 0                 | -91.8                     | -91.8             | 0.28 (1)             | 4.83  | C-D                       | -30 / 0       | 0.01 (1) |  |
| C-D    | -3375 / 0                 | -91.8                     | -91.8             | 0.30 (1)             | 4.82  | D-E                       | 0 / 143       | 0.02 (4) |  |
| D-E    | -3896 / 0                 | -91.8                     | -91.8             | 0.31 (1)             | 4.60  | D-N                       | 0 / 1607      | 0.20 (1) |  |
| E-F    | -3896 / 0                 | -91.8                     | -91.8             | 0.31 (1)             | 4.60  | N-E                       | -582 / 0      | 0.35 (1) |  |
| F-G    | -4950 / 0                 | -91.8                     | -91.8             | 0.36 (1)             | 4.10  | N-F                       | -772 / 0      | 0.24 (1) |  |
| G-H    | -8897 / 0                 | -91.8                     | -91.8             | 0.67 (1)             | 2.74  | L-F                       | 0 / 2972      | 0.37 (1) |  |
| H-I    | -8897 / 0                 | -91.8                     | -91.8             | 0.67 (1)             | 2.74  | L-G                       | -4915 / 0     | 0.82 (1) |  |
| I-J    | 0 / 35                    | -91.8                     | -91.8             | 0.07 (1)             | 10.00 | K-G                       | 0 / 4971      | 0.82 (1) |  |
| Q-B    | -2754 / 0                 | 0.0                       | 0.0               | 0.10 (1)             | 7.81  | B-P                       | 0 / 2870      | 0.36 (1) |  |
| J-H    | -7587 / 0                 | 0.0                       | 0.0               | 0.27 (1)             | 5.45  | K-H                       | 0 / 8235      | 0.73 (1) |  |
| Q-P    | 0 / 0                     | -18.5                     | -18.5             | 0.03 (1)             | 10.00 |                           |               |          |  |
| P-O    | 0 / 2806                  | -18.5                     | -18.5             | 0.21 (1)             | 10.00 |                           |               |          |  |
| O-N    | 0 / 2783                  | -18.5                     | -18.5             | 0.20 (1)             | 10.00 |                           |               |          |  |
| N-M    | 0 / 4134                  | -18.5                     | -18.5             | 0.29 (1)             | 10.00 |                           |               |          |  |
| M-L    | 0 / 4134                  | -18.5                     | -18.5             | 0.29 (1)             | 10.00 |                           |               |          |  |
| L-K    | 0 / 8050                  | -18.5                     | -18.5             | 0.58 (1)             | 10.00 |                           |               |          |  |
| K-S    | 0 / 0                     | -18.5                     | -18.5             | 0.54 (1)             | 10.00 |                           |               |          |  |
| S-T    | 0 / 0                     | -18.5                     | -18.5             | 0.54 (1)             | 10.00 |                           |               |          |  |
| T-J    | 0 / 0                     | -18.5                     | -18.5             | 0.54 (1)             | 10.00 |                           |               |          |  |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.    | LC1   | MAX-  | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|---------|-------|-------|------|-------|------|-------|------|-------|
| K  | 26-1-8  | -5771 | -5771 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| R  | 30-4-4  | -216  | -216  | ---  | TOP   | VERT | TOTAL | ---  | C1    |
| S  | 28-0-12 | -1229 | -1229 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| T  | 28-7-12 | -140  | -140  | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**  
 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
 TOP CH. LL = 25.6 PSF  
 BOT CH. DL = 6.0 PSF  
 BOT CH. LL = 0.0 PSF  
 DL = 7.4 PSF  
 TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
 - PART 9 OF CBC 2015, CBC 2012, ABC 2019  
 - PART 9 OF CBC 2012 (2019 AMENDMENT)  
 - CSA 086-09, CSA 086-14  
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (1.02")  
 CALCULATED VERT. DEFL. (LL) = L/999 (0.10")  
 ALLOWABLE DEFL. (TL) = L/360 (1.02")  
 CALCULATED VERT. DEFL. (TL) = L/999 (0.19")

CSI: TC=0.67/1.00 (G-H:1), BC=0.58/1.00 (K-L:1), WB=0.62/1.00 (G-L:1), SS=0.28/1.00 (J-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

**NAIL VALUES**  
 PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLB)  
 MAX MIN MAX MIN MAX MIN  
 MT20 618 354 1667 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (G) (INPUT = 0.90)  
 JSI METAL= 0.91 (K) (INPUT = 1.00)



Structural component only  
 DWG# T-2006796 1/2

|                                 |                   |               |          |                               |          |
|---------------------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408264              | TRUSS NAME<br>T25 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
| Tamarack Roof Truss, Burlington |                   | TRUSS DESC.   |          |                               |          |

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Thu Apr 23 15:14:04 2020 Page 2  
ID: SqJMMoixEgZE5VLzZMvKziJd-48ykUFq4XzorL SG4FcbDIE9IL1IOVH 1IVm4KzNp11

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-p  | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| C  | TMWW-l  | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| D  | TTWW-m  | MT20   | 5.0 | 6.0 | 2.00 | 2.00 |
| E  | TMW-w   | MT20   | 2.0 | 4.0 |      |      |
| F  | ITWW-m  | MT20   | 5.0 | 6.0 | 1.75 | 2.25 |
| G  | TMWW-l  | MT20   | 5.0 | 6.0 | 2.50 | 1.25 |
| H  | TMVW-l  | MT20   | 6.0 | 9.0 | 2.75 | 4.50 |
| J  | BMV1-l  | MT20   | 6.0 | 9.0 | Edge | 0.50 |
| K  | BMWW-l  | MT20   | 8.0 | 9.0 | 4.25 | 3.75 |
| L  | BMWW-l  | MT20   | 6.0 | 9.0 |      |      |
| M  | BS-l    | MT20   | 5.0 | 6.0 |      |      |
| N  | BMWWW-l | MT20   | 5.0 | 8.0 |      |      |
| O  | BMWW-l  | MT20   | 5.0 | 6.0 |      |      |
| P  | BMWW-l  | MT20   | 5.0 | 6.0 |      |      |
| Q  | BMV1-p  | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.




Structural component only  
DWG# T-2006796 42

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>T26</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:14:05 2020 Page 1

ID:SpJMMpkrEgZEx5VLzZMvKZjUjd-YLV6ibhIHxizcGpY6SCWnNNR871z7FNFKcmzNp0

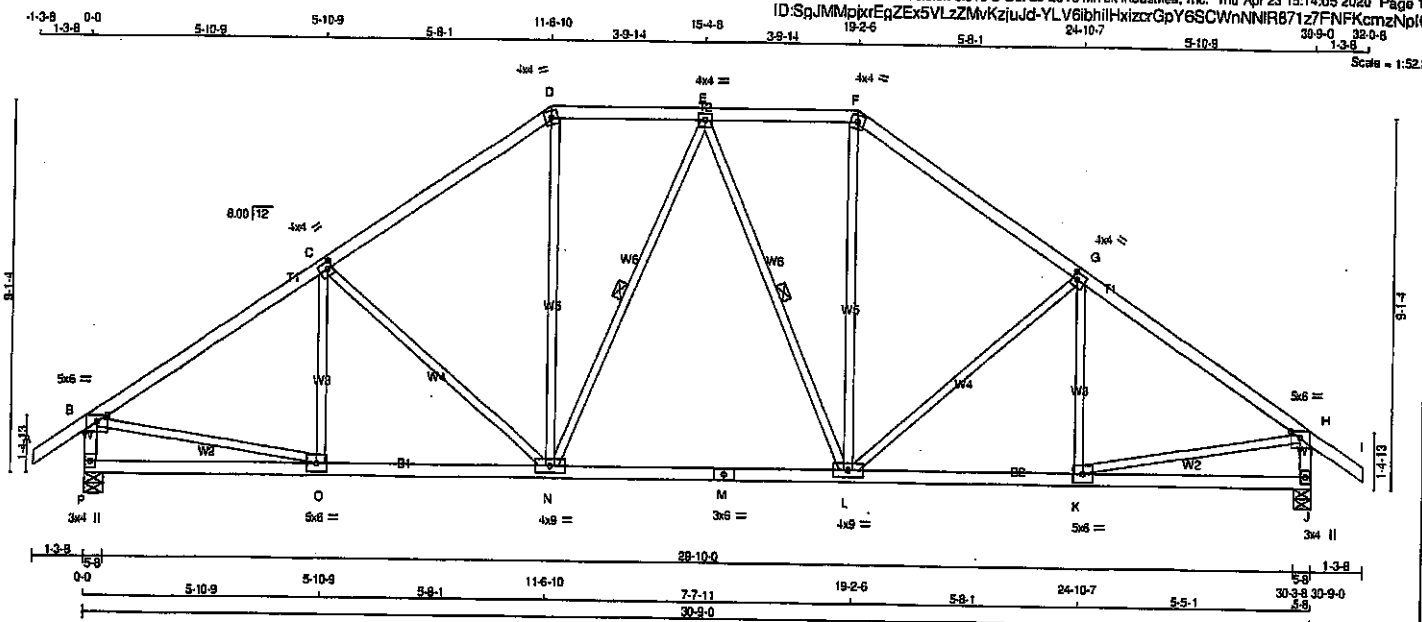

TOTAL WEIGHT = 139 lb

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER | DESCR. |
|--------|------|-----|--------|--------|
| A - D  | 2x4  | DRY | No.2   | SPF    |
| D - F  | 2x4  | DRY | No.2   | SPF    |
| F - I  | 2x4  | DRY | No.2   | SPF    |
| P - B  | 2x4  | DRY | No.2   | SPF    |
| J - H  | 2x4  | DRY | No.2   | SPF    |
| P - M  | 2x4  | DRY | No.2   | SPF    |
| M - J  | 2x4  | DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT  
DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-p | MT20   | 5.0 | 6.0 | Edge |      |
| C  | TMVW-1 | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| D  | TTW-m  | MT20   | 4.0 | 4.0 |      |      |
| E  | TMVW-1 | MT20   | 4.0 | 4.0 |      |      |
| F  | TTW-m  | MT20   | 4.0 | 4.0 |      |      |
| G  | TMVW-1 | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| H  | TMVW-p | MT20   | 5.0 | 6.0 | Edge |      |
| J  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |
| K  | BMVW-1 | MT20   | 5.0 | 6.0 |      |      |
| L  | BMVW-1 | MT20   | 4.0 | 9.0 |      |      |
| M  | BS-1   | MT20   | 3.0 | 6.0 |      |      |
| N  | BMVW-1 | MT20   | 4.0 | 9.0 |      |      |
| O  | BMVW-1 | MT20   | 5.0 | 6.0 |      |      |
| P  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD  |
|----|----------------|------------------|-------|---------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG     |
| JT | VERT           | HORZ             | DOWN  | UP/LIFT |
| P  | 1821           | 0                | 1821  | 0       |
| J  | 1821           | 0                | 1821  | 0       |

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|-----------|-------|---------|-------|
| P  | 1285     | 857 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 429 / 0 | 0 / 0 |
| J  | 1285     | 857 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 429 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, J

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.29 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N, E-L

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

##### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | FR-TO     | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | LC1      | MAX   | UNBRAC LENGTH | MEMB.     | FR-TO    | MAX. FACTORED FORCE (LBS) | MAX |
|-------|-----------|---------------------------|------------------|----------|-------|---------------|-----------|----------|---------------------------|-----|
|       |           |                           |                  |          |       |               |           |          |                           |     |
| A-B   | 0 / 35    | -91.8                     | -91.8            | 0.12 (1) | 10.00 | C-C           | -201 / 23 | 0.08 (1) |                           |     |
| B-C   | -2002 / 0 | -91.8                     | -91.8            | 0.48 (1) | 4.29  | C-N           | -397 / 0  | 0.47 (1) |                           |     |
| C-D   | -1713 / 0 | -91.8                     | -91.8            | 0.45 (1) | 4.80  | N-D           | 0 / 598   | 0.13 (1) |                           |     |
| D-E   | -1401 / 0 | -91.8                     | -91.8            | 0.18 (1) | 5.33  | N-E           | -226 / 0  | 0.15 (1) |                           |     |
| E-F   | -1401 / 0 | -91.8                     | -91.8            | 0.18 (1) | 5.33  | E-L           | -226 / 0  | 0.15 (1) |                           |     |
| F-G   | -1713 / 0 | -91.8                     | -91.8            | 0.45 (1) | 4.80  | L-F           | 0 / 596   | 0.13 (1) |                           |     |
| G-H   | -2002 / 0 | -91.8                     | -91.8            | 0.48 (1) | 4.29  | L-G           | -397 / 0  | 0.47 (1) |                           |     |
| H-I   | 0 / 35    | -91.8                     | -91.8            | 0.12 (1) | 10.00 | K-G           | -201 / 23 | 0.08 (1) |                           |     |
| P-B   | -1774 / 0 | 0.0                       | 0.0              | 0.18 (1) | 6.27  | B-O           | 0 / 1723  | 0.39 (1) |                           |     |
| J-H   | -1774 / 0 | 0.0                       | 0.0              | 0.18 (1) | 6.27  | K-H           | 0 / 1723  | 0.39 (1) |                           |     |
| P-O   | 0 / 0     | -18.5                     | -18.5            | 0.13 (4) | 10.00 |               |           |          |                           |     |
| O-N   | 0 / 1894  | -18.5                     | -18.5            | 0.37 (1) | 10.00 |               |           |          |                           |     |
| N-M   | 0 / 1489  | -18.5                     | -18.5            | 0.34 (1) | 10.00 |               |           |          |                           |     |
| M-L   | 0 / 1489  | -18.5                     | -18.5            | 0.34 (1) | 10.00 |               |           |          |                           |     |
| L-K   | 0 / 1894  | -18.5                     | -18.5            | 0.37 (1) | 10.00 |               |           |          |                           |     |
| K-J   | 0 / 0     | -18.5                     | -18.5            | 0.13 (4) | 10.00 |               |           |          |                           |     |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.6 | PSF |
|            | DL = 6.0  | PSF |
| BOT CH.    | LL = 0.0  | PSF |
|            | DL = 7.4  | PSF |
| TOTAL LOAD | = 39.0    | PSF |

SPACING = 24.0 IN. O.C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-08, CSA 086-14  
- TRC 2011, TRC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.02')  
CALCULATED VERT. DEFL.(LL) = L/999 (0.07')  
ALLOWABLE DEFL.(TL) = L/360 (1.02')  
CALCULATED VERT. DEFL.(TL) = L/999 (0.17')

CSI: TC=0.48/1.00 (B-C:1), EC=0.37/1.00 (K-L:1), WS=0.47/1.00 (G-L:1), SS=0.22/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE   | GRIP(DRY) | SHEAR   | SECTION            |
|---------|-----------|---------|--------------------|
| (PSI)   | (PLI)     | (PLI)   |                    |
| MAX MIN | MAX MIN   | MAX MIN |                    |
| MT20    | 618       | 354     | 1867 788 1987 1656 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.87 (B) (INPUT = 0.90)  
JSI METAL= 0.59 (M) (INPUT = 1.00)




Structural component only  
DWG# T-2006797

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b>       | TRUSS NAME<br><b>T27</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:14:06 2020 Page 1

ID: SqJMMpxrEgZEx5VLzZMvKziUjd-0X3VvxiK2b3ZamQTNFdhkUcH8jssUsHU1\_18CzNpI?

Scale = 1:40.8

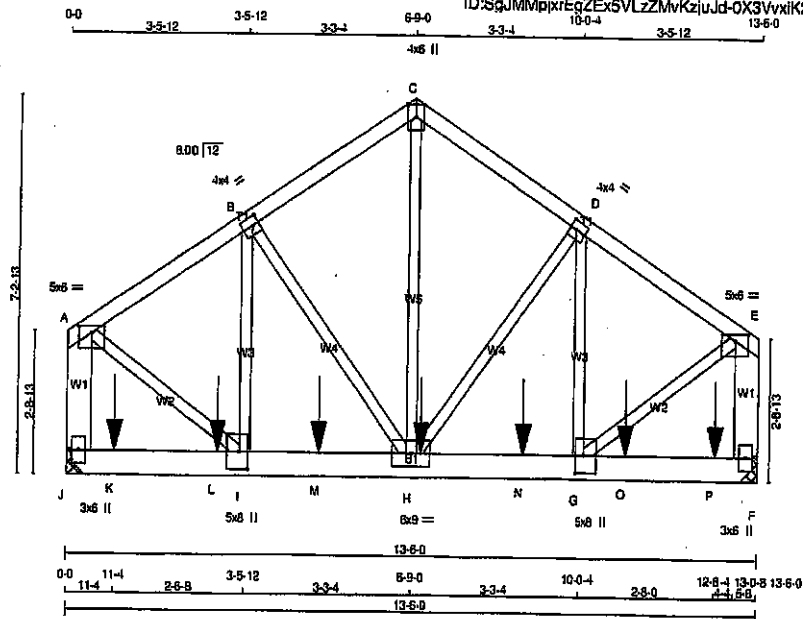

| LUMBER            |     |      |        |      |       |
|-------------------|-----|------|--------|------|-------|
| N. L. G. A. RULES |     |      |        |      |       |
| CHORDS            |     | SIZE | LUMBER |      | DESCR |
| A - C             | 2x4 | DRY  | No.2   |      | SPF   |
| C - E             | 2x4 | DRY  | No.2   |      | SPF   |
| J - A             | 2x6 | DRY  | No.2   |      | SPF   |
| F - E             | 2x6 | DRY  | No.2   |      | SPF   |
| J - F             | 2x6 | DRY  | No.2   |      | SPF   |
| ALL WEBS          |     | 2x3  | DRY    | No.2 | SPF   |
| EXCEPT            |     |      |        |      |       |

ALL WEBS 2x3 DRY No.2

EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)  |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| A-C 1                                    | 12                   | TOP         |
| C-E 1                                    | 12                   | TOP         |
| J-A 2                                    | 12                   | TOP         |
| F-E 2                                    | 12                   | TOP         |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| J-F 2                                    | 12                   | SIDE(183.1) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| H-C 1                                    | 6                    | SIDE(186.0) |
| 2x3 1                                    | 6                    |             |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

| JT TYPE | PLATES | W    | LEN | Y   | X         |
|---------|--------|------|-----|-----|-----------|
| A       | TMWV-p | MT20 | 5.0 | 6.0 | 1.50 3.00 |

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

#### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG  | REQD BRG   |
|----|-------------------------|---------------------------------|------------|------------|
| JT | VERT                    | DOWN                            | MECHANICAL | MECHANICAL |
| J  | 5805                    | 0                               | 5805       | 0          |
| F  | 5789                    | 0                               | 5789       | 0          |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J, F. MINIMUM BEARING LENGTH AT JOINT J = 4-0, JOINT F = 4-0.

#### UNFACTORED REACTIONS

|    | 1ST CASE | MAX/MIN. COMPONENT REACTIONS |      |            |      |        |      |
|----|----------|------------------------------|------|------------|------|--------|------|
| JT | COMBINED | SNOW                         | LIVE | PERM. LIVE | WIND | DEAD   | SOIL |
| J  | 3958     | 2631.0                       | 0.0  | 0.0        | 0.0  | 1327.0 | 0.0  |
| F  | 4088     | 2717.0                       | 0.0  | 0.0        | 0.0  | 1371.0 | 0.0  |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.86 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) |
|--------|---------------------------|---------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| PR-TO  |                           |                           |                                |                                |                                |                                |                                |                                |                                |
| A-B    | -3952.0                   | -91.8                     | -91.8                          | 0.14 (1)                       | 4.66                           | H-C                            | 0.73535                        | 0.44 (1)                       |                                |
| B-C    | -3431.0                   | -91.8                     | -91.8                          | 0.11 (1)                       | 4.96                           | H-D                            | -786.0                         | 0.21 (1)                       |                                |
| C-D    | -3431.0                   | -91.8                     | -91.8                          | 0.11 (1)                       | 4.96                           | G-D                            | 0.594                          | 0.07 (1)                       |                                |
| D-E    | -3952.0                   | -91.8                     | -91.8                          | 0.14 (1)                       | 4.66                           | S-H                            | -787.0                         | 0.21 (1)                       |                                |
| J-A    | -4546.0                   | 0.0                       | 0.0                            | 0.22 (1)                       | 6.76                           | I-B                            | 0.585                          | 0.07 (1)                       |                                |
| F-E    | -4546.0                   | 0.0                       | 0.0                            | 0.22 (1)                       | 6.76                           | A-I                            | 0.73969                        | 0.49 (1)                       |                                |
| J-K    | 0.0                       | -18.5                     | -18.5                          | 0.36 (1)                       | 10.00                          | G-E                            | 0.3968                         | 0.49 (1)                       |                                |
| K-L    | 0.0                       | -18.5                     | -18.5                          | 0.36 (1)                       | 10.00                          |                                |                                |                                |                                |
| L-I    | 0.0                       | -18.5                     | -18.5                          | 0.36 (1)                       | 10.00                          |                                |                                |                                |                                |
| I-M    | 0.3297                    | -18.5                     | -18.5                          | 0.51 (1)                       | 10.00                          |                                |                                |                                |                                |
| M-H    | 0.3297                    | -18.5                     | -18.5                          | 0.51 (1)                       | 10.00                          |                                |                                |                                |                                |
| H-N    | 0.3297                    | -18.5                     | -18.5                          | 0.53 (1)                       | 10.00                          |                                |                                |                                |                                |
| N-G    | 0.3297                    | -18.5                     | -18.5                          | 0.53 (1)                       | 10.00                          |                                |                                |                                |                                |
| G-O    | 0.0                       | -18.5                     | -18.5                          | 0.37 (1)                       | 10.00                          |                                |                                |                                |                                |
| O-P    | 0.0                       | -18.5                     | -18.5                          | 0.37 (1)                       | 10.00                          |                                |                                |                                |                                |
| P-F    | 0.0                       | -18.5                     | -18.5                          | 0.37 (1)                       | 10.00                          |                                |                                |                                |                                |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.    | LC1   | MAX.  | FACE | DIR. | TYPE | HEEL  | CONN. |
|----|---------|-------|-------|------|------|------|-------|-------|
| J  | 5-11-4  | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| K  | 11-4    | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| L  | 2-11-4  | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| M  | 4-11-4  | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| N  | 8-11-4  | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| O  | 10-11-4 | -1415 | -1415 | ---  | BACK | VERT | TOTAL | C1    |
| P  | 12-8-4  | -1417 | -1417 | ---  | BACK | VERT | TOTAL | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 78 = 156 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |        |     |
|------------|--------|-----|
| TOP CH. LL | = 25.6 | PSF |
| DL         | = 6.0  | PSF |
| BOT CH. LL | = 0.0  | PSF |
| DL         | = 7.4  | PSF |
| TOTAL LOAD | = 39.0 | PSF |

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")  
ALLOWABLE DEFL.(TL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.06")

CSI: TO=0.22/1.00 (A-J:1), BC=0.53/1.00 (G-H:1), WB=0.49/1.00 (A-I:1), SS=0.61/1.00 (I-J:1)

DOE LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI)      |
|-----------------|-------------|--------------------|
| MAX MIN         | MAX MIN     | MAX MIN            |
| MT20            | 618 354     | 1697 798 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.88 (H) (INPUT = 0.90)

JSI METAL=0.59 (I) (INPUT = 1.00)



Structural component only  
DWG# T-2006798 1/2

CONTINUED ON PAGE 2

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
|----------|------------|----------|-----|------------------|----------|
| 408264   | T27        | 1        | 2   | GREEN PARK HOMES |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Thu Apr 23 15:14:06 2020 Page 2  
ID: SqJMMpikrEqZE5VLzZMvKziJd-0X3VvxiK2b3ZamQTNFdhkiJcH8issUsHU1 18CzNoI?

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMWW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| C  | TTW-p  | MT20   | 4.0 | 6.0 | Edge |      |
| D  | TMWW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| E  | TMWW-p | MT20   | 5.0 | 6.0 | 1.50 | 3.00 |
| F  | BMV1-p | MT20   | 3.0 | 6.0 |      |      |
| G  | BMWW-t | MT20   | 5.0 | 8.0 | 4.00 | 2.00 |
| H  | BMWW-t | MT20   | 6.0 | 9.0 |      |      |
| I  | BMWW-t | MT20   | 5.0 | 8.0 | 4.00 | 2.00 |
| J  | BMV1-p | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.




Structural component only  
DWG# T-2006798 42

|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408264   | T28        | 1        | 1   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Thu Apr 23 15:14:07 2020 Page 1  
ID: SgJMMpjrEgZE5VLZMvKzJd-Vjd6HlypuBQCw?fwz8whxslXY5kb?KQjnkRgezNpl

Scale: 3/8"=1'

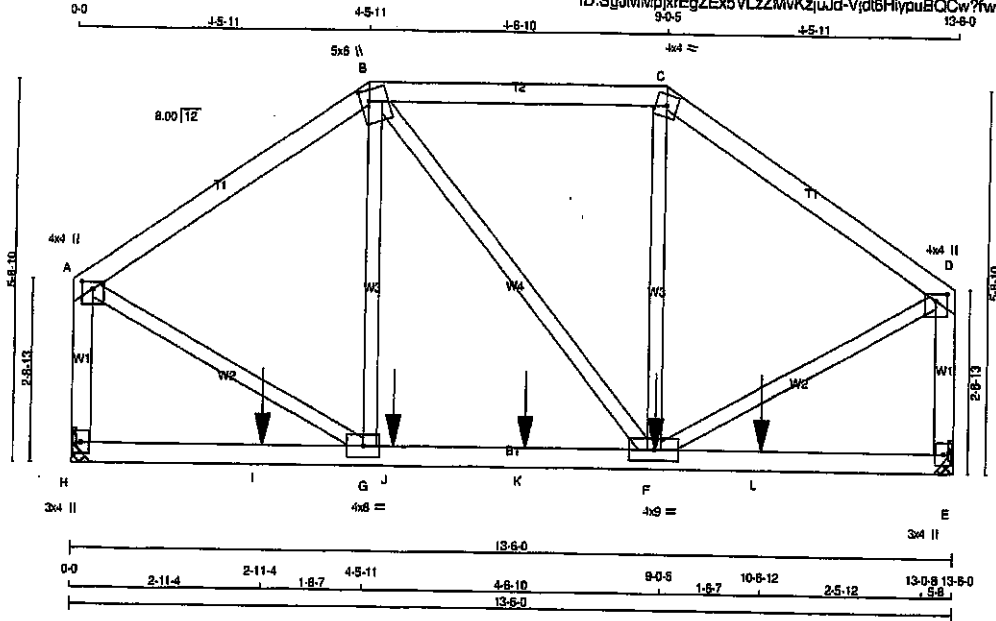

TOTAL WEIGHT = 60 lb

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER | DESCR. |
|--------|---------|--------|--------|
| A - B  | 2x4 DRY | No.2   | SPF    |
| B - C  | 2x4 DRY | No.2   | SPF    |
| C - D  | 2x4 DRY | No.2   | SPF    |
| H - A  | 2x4 DRY | No.2   | SPF    |
| E - D  | 2x4 DRY | No.2   | SPF    |
| H - E  | 2x4 DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE | PLATES  | W    | LEN | Y   | X         |
|---------|---------|------|-----|-----|-----------|
| A - B   | TMVW+p  | MT20 | 4.0 | 4.0 | 1.25 2.00 |
| B - C   | TTWW+m  | MT20 | 5.0 | 6.0 | 2.00 1.50 |
| C - D   | TTW-m   | MT20 | 4.0 | 4.0 |           |
| D - E   | TMVW+p  | MT20 | 4.0 | 4.0 | 1.25 2.00 |
| E - F   | BMV1+p  | MT20 | 3.0 | 4.0 |           |
| F - G   | BMVWW-t | MT20 | 4.0 | 9.0 |           |
| G - H   | BMVWW-t | MT20 | 4.0 | 6.0 |           |
| H - I   | BMV1+p  | MT20 | 3.0 | 4.0 |           |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | VERT | HORZ | MAXIMUM FACTORED GROSS REACTION | DOWN | HORZ | UP | BRG        | BRG        |
|----|------|------|---------------------------------|------|------|----|------------|------------|
| H  | 1235 | 0    | 1235                            | 0    | 0    | 0  | IN-SX      | IN-SX      |
| E  | 1248 | 0    | 1248                            | 0    | 0    | 0  | MECHANICAL | MECHANICAL |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H, E. MINIMUM BEARING LENGTH AT JOINT H = 3-8, JOINT E = 3-8.

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|-----------|-------|---------|-------|
| H  | 869      | 594 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 274 / 0 | 0 / 0 |
| E  | 878      | 601 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 277 / 0 | 0 / 0 |

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.80 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                        | WEBS  |                           |                        |  |
|--------|---------------------------|---------------------------|------------------------|-------|---------------------------|------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |  |
| FR-TO  |                           | FROM TO                   |                        | FR-TO |                           |                        |  |
| A-B    | -944 / 0                  | -91.8 -91.8               | 0.38 (1)               | G-B   | 0 / 99                    | 0.03 (4)               |  |
| B-C    | -796 / 0                  | -91.8 -91.8               | 0.38 (1)               | B-F   | 0 / 15                    | 0.00 (1)               |  |
| C-D    | -958 / 0                  | -91.8 -91.8               | 0.38 (1)               | F-C   | 0 / 117                   | 0.03 (4)               |  |
| H-A    | -1144 / 0                 | 0.0 0.0                   | 0.18 (1)               | A-G   | 0 / 896                   | 0.22 (1)               |  |
| E-D    | -1155 / 0                 | 0.0 0.0                   | 0.18 (1)               | F-D   | 0 / 897                   | 0.22 (1)               |  |
| H-I    | 0 / 0                     | -18.5 -18.5               | 0.29 (1)               |       |                           |                        |  |
| I-G    | 0 / 0                     | -18.5 -18.5               | 0.29 (1)               |       |                           |                        |  |
| G-J    | 0 / 786                   | -18.5 -18.5               | 0.43 (1)               |       |                           |                        |  |
| J-K    | 0 / 786                   | -18.5 -18.5               | 0.43 (1)               |       |                           |                        |  |
| K-F    | 0 / 786                   | -18.5 -18.5               | 0.43 (1)               |       |                           |                        |  |
| F-L    | 0 / 0                     | -18.5 -18.5               | 0.29 (1)               |       |                           |                        |  |
| L-E    | 0 / 0                     | -18.5 -18.5               | 0.29 (1)               |       |                           |                        |  |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.    | LC1  | MAX. | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|---------|------|------|------|-------|------|-------|------|-------|
| F  | 8-11-4  | -163 | -163 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| I  | 2-11-4  | -253 | -253 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| J  | 4-11-4  | -163 | -163 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| K  | 6-11-4  | -163 | -163 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| L  | 10-6-12 | -253 | -253 | ---  | FRONT | VERT | TOTAL | ---  | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. C.C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.45')

CALCULATED VERT. DEFL.(LL) = L/999 (0.04')

ALLOWABLE DEFL.(TL) = L/360 (0.45')

CALCULATED VERT. DEFL.(TL) = L/998 (0.08')

CSK TC=0.38/1.00 (C-D:1), BC=0.43/1.00 (F-G:1), WB=0.22/1.00 (D-F:1), SS=0.23/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00

COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
|       | (PSI)     | (PLI) | (PLI)              |
| MT20  | 618       | 354   | 1667 788 1987 1656 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.84 (D) (INPUT = 0.90)


JSI METAL= 0.25 (D) (INPUT = 1.00)



Structural component only  
DWG# T-2006799

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
|----------|------------|----------|-----|------------------|----------|
| 408264   | T29        | 2        | 1   | GREEN PARK HOMES |          |

Tamarack Roof Truss, Burlington

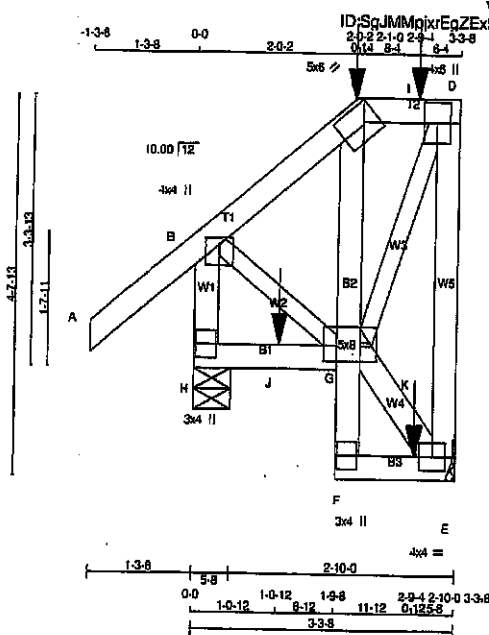

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Thu Apr 23 15:14:08 2020 Page 1  
ID: SgJMMqjxrEgZEx5VLzZMVKzjJd-zwBfKdjaCjHq3arUgt9p8PzPyX5KVQaxLT\_CSzNpHz

Scale = 1/25.0

| LUMBER                |        |      |        |
|-----------------------|--------|------|--------|
| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER |
| A - C                 | 2x4    | DRY  | No.2   |
| C - D                 | 2x4    | DRY  | No.2   |
| E - D                 | 2x4    | DRY  | No.2   |
| H - B                 | 2x4    | DRY  | No.2   |
| H - G                 | 2x4    | DRY  | No.2   |
| F - C                 | 2x4    | DRY  | No.2   |
| F - E                 | 2x4    | DRY  | No.2   |
| ALL WEBS              | 2x4    | DRY  | No.2   |
| EXCEPT                |        |      |        |
| G - D                 | 2x3    | DRY  | No.2   |
| B - G                 | 2x3    | DRY  | No.2   |
| DRY: SEASONED LUMBER. |        |      |        |

| PLATES (table is in inches) |          |        |     |     |           |
|-----------------------------|----------|--------|-----|-----|-----------|
| JT                          | TYPE     | PLATES | W   | LEN | Y X       |
| B                           | TMVW+p   | MT20   | 4.0 | 4.0 | 1.00 2.00 |
| C                           | TTV-h    | MT20   | 5.0 | 6.0 | 2.50 Edge |
| D                           | TMVW+p   | MT20   | 4.0 | 6.0 |           |
| E                           | BMVW1-i  | MT20   | 4.0 | 4.0 |           |
| F                           | BMV+p    | MT20   | 3.0 | 4.0 |           |
| G                           | BMVWW1-i | MT20   | 5.0 | 8.0 | 2.25 2.00 |
| H                           | BMV1+p   | MT20   | 3.0 | 4.0 |           |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED |      | MAXIMUM FACTORED |        | INPUT |     | REQD  |       |
|----------|------|----------|------|------------------|--------|-------|-----|-------|-------|
| JT       | VERT | HORZ     | DOWN | HORZ             | UPLIFT | BRG   | BRG | IN-SX | IN-SX |
| E        | 271  | 0        | 271  | 0                | 0      | 5-8   | 5-8 |       |       |
| H        | 335  | 0        | 335  | 0                | 0      | 5-8   | 5-8 |       |       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

#### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|----------|---------|-------|------------|-------|--------|-------|
| E  | 192      | 125 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 68 / 0 | 0 / 0 |
| H  | 235      | 166 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 70 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |             | FACTORED         |                | WEBS  |             | FACTORED      |  |
|--------|-------------|------------------|----------------|-------|-------------|---------------|--|
| MEMB.  | FORCE (LBS) | VERT. LOAD (PLF) | MAX. CSI (LC)  | MEMB. | FORCE (LBS) | MAX. CSI (LC) |  |
| FR-TO  |             | FROM             | TO             | FR-TO |             |               |  |
| A-B    | 0 / 41      | -91.8            | -91.8 0.18 (5) | G-E   | -7 / 0      | 0.00 (1)      |  |
| B-C    | -79 / 0     | -91.8            | -91.8 0.07 (1) | G-D   | 0 / 180     | 0.04 (1)      |  |
| C-I    | -65 / 0     | -90.8            | -90.8 0.06 (1) | B-G   | 0 / 73      | 0.02 (1)      |  |
| I-D    | -65 / 0     | -80.8            | -80.8 0.08 (1) |       |             |               |  |
| E-D    | -245 / 0    | 0.0              | 0.0 0.09 (1)   |       |             |               |  |
| H-B    | -314 / 0    | 0.0              | 0.0 0.04 (1)   |       |             |               |  |
| H-J    | 0 / 0       | -18.3            | -18.3 0.03 (4) |       |             |               |  |
| J-G    | 0 / 0       | -18.3            | -18.3 0.03 (4) |       |             |               |  |
| F-G    | 0 / 20      | 0.0              | 0.0 0.01 (1)   |       |             |               |  |
| G-C    | -151 / 0    | 0.0              | 0.0 0.01 (1)   |       |             |               |  |
| F-K    | 0 / 5       | -18.3            | -18.3 0.02 (4) |       |             |               |  |
| K-E    | 0 / 5       | -18.3            | -18.3 0.02 (4) |       |             |               |  |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| C  | 2-1-0  | -19 | -19  |      | FRONT | VERT | TOTAL |      | C1    |
| I  | 2-9-4  | -78 | -78  |      | FRONT | VERT | TOTAL |      | C1    |
| J  | 1-0-12 | -9  | -9   |      | FRONT | VERT | TOTAL |      | C1    |
| K  | 2-9-4  | -14 | -14  |      | FRONT | VERT | TOTAL |      | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 2 X 27 = 54 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

\*\*\* NON STANDARD GIRDER \*\*\*

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.18')  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00')  
ALLOWABLE DEFL.(TL) = L/360 (0.18')  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00')

CSI: TC=0.18/1.00 (A-B-5), BC=0.03/1.00 (G-H-4),  
WB=0.04/1.00 (D-G-1), SS=0.11/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE   | GRIP(DRY) | SHEAR    | SECTION   |
|---------|-----------|----------|-----------|
| (PSI)   | (PLI)     | (PLI)    | (PLI)     |
| MAX MIN | MAX MIN   | MAX MIN  | MAX MIN   |
| MT20    | 818 354   | 1687 788 | 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.23 (B) (INPUT = 0.90 )  
JSI METAL = 0.05 (B) (INPUT = 1.00 )




Structural component only  
DWG# T-2006800

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b>       | TRUSS NAME<br><b>T30</b> | QUANTITY<br><b>3</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:14:10 2020 Page 1

ID:SpUMMpjxrEqZEx5VLzZMVKzjuJd-vU7ilq6pZ\_3NkEc5idvZUJ2mDAoPWsPfy5GzzNpHx

Scale = 1:31.4

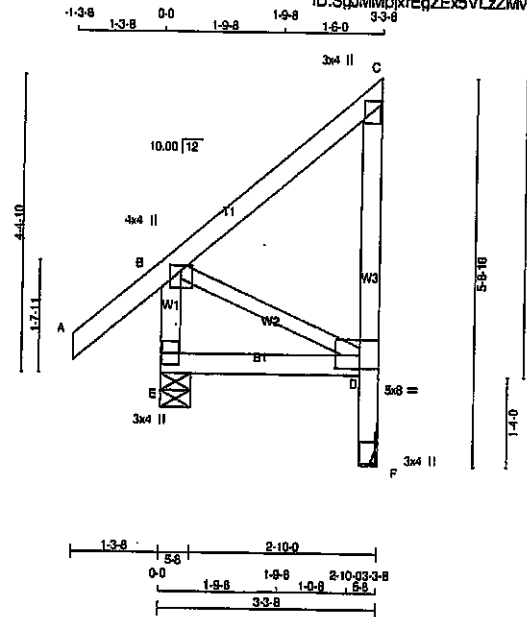

#### LUMBER

N. L. G. A. RULES

| CHORDS                | SIZE | LUMBER   | DESCR. |
|-----------------------|------|----------|--------|
| E - B                 | 2x4  | DRY No.2 | SPF    |
| A - C                 | 2x4  | DRY No.2 | SPF    |
| F - C                 | 2x4  | DRY No.2 | SPF    |
| E - D                 | 2x4  | DRY No.2 | SPF    |
| ALL WEBS              | 2x3  | DRY No.2 | SPF    |
| DRY: SEASONED LUMBER. |      |          |        |

#### PLATES (tablets in inches)

| JT TYPE | PLATES | W    | LEN | Y   | X         |
|---------|--------|------|-----|-----|-----------|
| B       | TMVW+p | MT20 | 4.0 | 4.0 | 1.00 2.00 |
| C       | TMV+p  | MT20 | 3.0 | 4.0 |           |
| D       | BVMW-I | MT20 | 5.0 | 8.0 | 2.25 4.50 |
| D       | TP+p   | MT20 | 3.0 | 4.0 | 15.250.25 |
| E       | BMV+p  | MT20 | 3.0 | 4.0 |           |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| FACTORED |      | MAXIMUM FACTORED |      | INPUT |     | REQRD      |       |
|----------|------|------------------|------|-------|-----|------------|-------|
| JT       | VERT | JT               | DOWN | BRG   | BRG | IN-SX      | IN-SX |
| E        | 309  | 0                | 309  | 0     | 0   | 5-8        | 5-8   |
| F        | 181  | 0                | 181  | 0     | 0   | MECHANICAL |       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

#### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX/MIN | COMPONENT REACTIONS |
|----|----------|---------|---------------------|
| E  | COMBINED | SNOW    | LIVE                |
| F  | 128      | 84.0    | 0.0                 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHOROS        |             |                  |                  | WEBS               |       |             |              |
|---------------|-------------|------------------|------------------|--------------------|-------|-------------|--------------|
| MAX. FACTORED |             | FACTORED         |                  | FACTORED           |       | FACTORED    |              |
| MEMB.         | FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX CSI (LC) | MAX. UNBRAC LENGTH | MEMB. | FORCE (LBS) | MAX CSI (LC) |
| FR-TO         |             | FROM TO          |                  |                    | FR-TO |             |              |
| E-B           | -278 / 0    | 0.0              | 0.0 0.03 (1)     | 7.81               | B-D   | 0.0         | 0.00 (1)     |
| A-B           | 0 / 41      | -91.8            | -91.8 0.14 (5)   | 10.00              |       |             |              |
| B-C           | 0 / 0       | -91.8            | -91.8 0.17 (1)   | 10.00              |       |             |              |
| F-D           | -181 / 0    | 0.0              | 0.0 0.02 (1)     | 7.81               |       |             |              |
| D-C           | -151 / 0    | 0.0              | 0.0 0.05 (1)     | 7.81               |       |             |              |
| E-D           | 0 / 0       | -18.5            | -18.5 0.08 (4)   | 10.00              |       |             |              |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 3 X 20 = 61 lb

#### DESIGN CRITERIA

|                  |            |
|------------------|------------|
| SPECIFIED LOADS: |            |
| TOP CH. LL       | = 25.6 PSF |
| DL               | = 6.0 PSF  |
| BOT CH. LL       | = 0.0 PSF  |
| DL               | = 7.4 PSF  |
| TOTAL LOAD       | = 39.0 PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.00")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.01")

CSI: TC=0.17/1.00 (B-C:1), BC=0.08/1.00 (D-E:4), WB=0.00/1.00 (B-D:1), SS=0.09/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


#### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
|       | (PSI)     | (PLI) | (PLI)              |
| MT20  | 618       | 354   | 1687 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.21 (B) (INPUT = 0.90)  
JSI METAL = 0.06 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2006801

|                                                                                                                                   |                          |                      |                 |                                                                                    |             |          |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------|-----------------|------------------------------------------------------------------------------------|-------------|----------|
| JOB NAME<br><b>408264</b>                                                                                                         | TRUSS NAME<br><b>T31</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b>                                               | TRUSS DESC. | DRWG NO. |
| Tamarack Roof Truss, Burlington                                                                                                   |                          |                      |                 | Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:11 2020 Page 1 |             |          |
| 1-3-8 0-0 3-9-10 3-9-10 3-7-2 7-4-12 5-4-4 12-9-0 2-7-8 15-4-8 2-7-8 18-0-0 5-4-4 23-4-4 3-7-2 25-11-5 3-9-10 30-9-0 1-3-8 1-4-13 |                          |                      |                 | ID: SqJMMpJxRgZEx5VLzZMvKzjUld-NuKtOyemT17hrhXJC8pDsRn0P19QIXhs0eJleoQZnpHw        |             |          |
|                                                                                                                                   |                          |                      |                 | Scale = 1:50.9                                                                     |             |          |

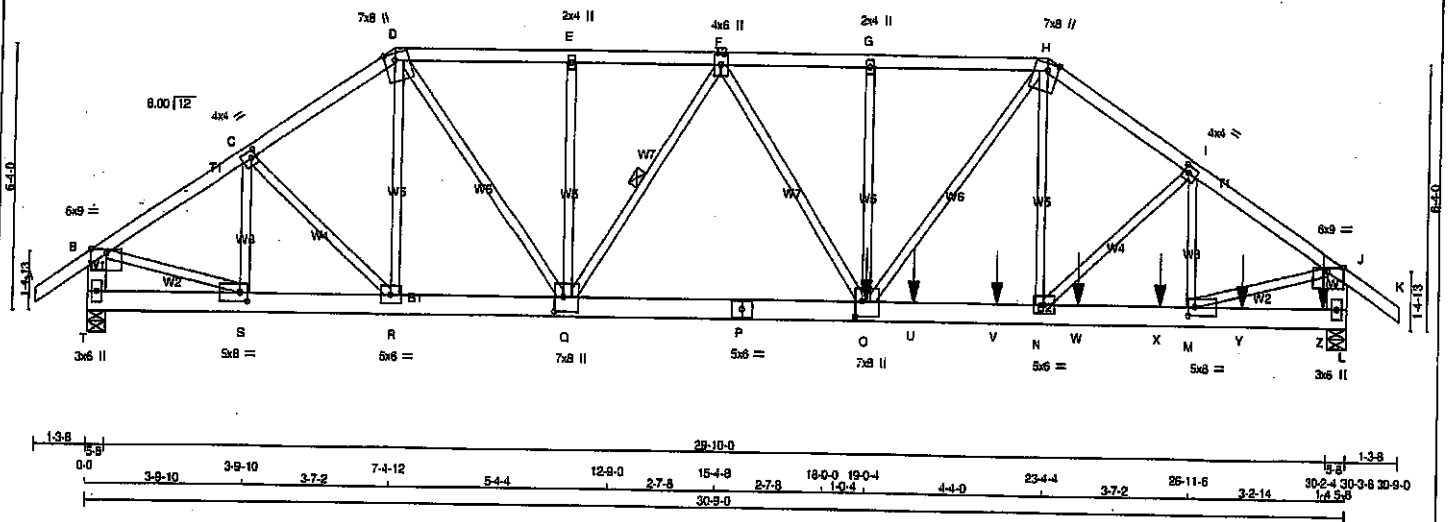

| LUMBER | N. L. G. A. RULES | CHORDS | SIZE | DRY | LUMBER | DESCR. |
|--------|-------------------|--------|------|-----|--------|--------|
| A - D  | 2x4               | DRY    | No.2 | SPF |        |        |
| D - H  | 2x4               | DRY    | No.2 | SPF |        |        |
| H - K  | 2x4               | DRY    | No.2 | SPF |        |        |
| T - B  | 2x6               | DRY    | No.2 | SPF |        |        |
| L - J  | 2x6               | DRY    | No.2 | SPF |        |        |
| T - P  | 2x6               | DRY    | No.2 | SPF |        |        |
| P - L  | 2x6               | DRY    | No.2 | SPF |        |        |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A-D 1 12                                 | TOP                  |            |
| D-H 1 12                                 | TOP                  |            |
| H-K 1 12                                 | TOP                  |            |
| T-B 2 12                                 | TOP                  |            |
| L-J 2 12                                 | TOP                  |            |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| T-P 2 12                                 | TOP                  |            |
| P-L 2 12                                 | TOP                  |            |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| G-O 1 3                                  | SIDE(183.1)          |            |
| 2x3 1 3                                  | SIDE(1134.2)         |            |
| E-Q 1 3                                  | SIDE(1134.2)         |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----------|-------------------------|---------------------------------|-----------|----------|
| JT       | VERT 4013               | DOWN 4013                       | 0         | 5-8      |
| L        | HORZ 6137               | HORZ 6137                       | 0         | 5-8      |

#### UNFACTORED REACTIONS

| 1ST LOASE | MAX. MIN. COMPONENT REACTIONS |          |       |            |       |          |
|-----------|-------------------------------|----------|-------|------------|-------|----------|
| JT        | COMBINED                      | SNOW     | LIVE  | PERM. LIVE | WIND  | DEAD     |
| T         | 2838                          | 1874 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 952 / 0  |
| L         | 4346                          | 2819 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 1527 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T, L

BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.95 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF F-Q.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB.     | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX CSI (LC) | MAX. UNBRACED LENGTH | WEBS  | MEMB.     | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH |
|--------|-----------|---------------------------|---------------------------|------------------|----------------------|-------|-----------|---------------------------|----------------------|
| FR-TO  |           |                           |                           |                  |                      | FR-TO |           |                           |                      |
| A-B    | 0 / 35    | -91.8                     | -91.8                     | 0.07 (1)         | 10.00                | S-C   | 0 / 1064  | 0                         | 0.13 (1)             |
| B-C    | -4737 / 0 | -91.8                     | -91.8                     | 0.19 (1)         | 4.29                 | C-R   | 0 / 546   | 0                         | 0.07 (1)             |
| C-D    | -5258 / 0 | -91.8                     | -91.8                     | 0.20 (1)         | 4.08                 | R-D   | -225 / 0  | 0                         | 0.07 (1)             |
| D-E    | -8404 / 0 | -91.8                     | -91.8                     | 0.28 (1)         | 3.67                 | D-Q   | 0 / 3493  | 0                         | 0.43 (1)             |
| E-F    | -8404 / 0 | -91.8                     | -91.8                     | 0.28 (1)         | 3.69                 | Q-E   | -390 / 0  | 0                         | 0.12 (1)             |
| F-G    | -9054 / 0 | -91.8                     | -91.8                     | 0.36 (1)         | 3.04                 | G-Q   | -351 / 0  | 0                         | 0.11 (1)             |
| G-H    | -9054 / 0 | -91.8                     | -91.8                     | 0.47 (1)         | 2.95                 | Q-H   | 0 / 4471  | 0                         | 0.55 (1)             |
| H-I    | -7740 / 0 | -91.8                     | -91.8                     | 0.31 (1)         | 3.34                 | N-H   | 0 / 341   | 0                         | 0.04 (4)             |
| I-J    | -7146 / 0 | -91.8                     | -91.8                     | 0.30 (1)         | 3.49                 | N-I   | 0 / 633   | 0                         | 0.08 (1)             |
| J-K    | 0 / 35    | -91.8                     | -91.8                     | 0.07 (1)         | 10.00                | M-I   | -1161 / 0 | 0                         | 0.14 (1)             |
| T-B    | -3942 / 0 | 0.0                       | 0.0                       | 0.14 (1)         | 7.14                 | B-S   | 0 / 4089  | 0                         | 0.51 (1)             |
| L-J    | -5808 / 0 | 0.0                       | 0.0                       | 0.21 (1)         | 6.12                 | M-J   | 0 / 6159  | 0                         | 0.76 (1)             |
|        |           |                           |                           |                  |                      | Q-F   | -2727 / 0 | 0                         | 0.46 (1)             |
|        |           |                           |                           |                  |                      | F-O   | 0 / 2350  | 0                         | 0.29 (1)             |
| T-S    | 0 / 0     | -18.5                     | -18.5                     | 0.05 (1)         | 10.00                |       |           |                           |                      |
| S-R    | 0 / 3956  | -18.5                     | -18.5                     | 0.31 (1)         | 10.00                |       |           |                           |                      |
| R-Q    | 0 / 4347  | -18.5                     | -18.5                     | 0.32 (1)         | 10.00                |       |           |                           |                      |
| Q-P    | 0 / 7825  | -18.5                     | -18.5                     | 0.58 (1)         | 10.00                |       |           |                           |                      |
| P-O    | 0 / 7828  | -18.5                     | -18.5                     | 0.58 (1)         | 10.00                |       |           |                           |                      |
| O-U    | 0 / 8421  | -43.5                     | -43.5                     | 0.55 (1)         | 10.00                |       |           |                           |                      |
| U-V    | 0 / 8421  | -43.5                     | -43.5                     | 0.55 (1)         | 10.00                |       |           |                           |                      |
| V-W    | 0 / 8421  | -43.5                     | -43.5                     | 0.55 (1)         | 10.00                |       |           |                           |                      |
| W-X    | 0 / 5958  | -43.5                     | -43.5                     | 0.52 (1)         | 10.00                |       |           |                           |                      |
| X-M    | 0 / 5958  | -43.5                     | -43.5                     | 0.52 (1)         | 10.00                |       |           |                           |                      |
| M-Y    | 0 / 0     | -43.5                     | -43.5                     | 0.11 (1)         | 10.00                |       |           |                           |                      |
| Y-Z    | 0 / 0     | -43.5                     | -43.5                     | 0.11 (1)         | 10.00                |       |           |                           |                      |
| Z-L    | 0 / 0     | -43.5                     | -43.5                     | 0.11 (1)         | 10.00                |       |           |                           |                      |

| FACTORED CONCENTRATED LOADS (LBS) | JT     | LOC.  | LC1   | MAX. | FACE  | DIR. | TYPE  | HEEL | CONN. |
|-----------------------------------|--------|-------|-------|------|-------|------|-------|------|-------|
| O                                 | 19-0-4 | -5050 | -5050 |      | BACK  | VERT | TOTAL |      | C1    |
| U                                 | 20-2-4 | -193  | -193  |      | BACK  | VERT | TOTAL |      | C1    |
| V                                 | 22-2-3 | -193  | -193  |      | BACK  | VERT | TOTAL |      | C1    |
| W                                 | 24-2-4 | -193  | -193  |      | BACK  | VERT | TOTAL |      | C1    |
| X                                 | 26-2-4 | -193  | -193  |      | BACK  | VERT | TOTAL |      | C1    |
| Y                                 | 28-2-4 | -193  | -193  |      | BACK  | VERT | TOTAL |      | C1    |
| Z                                 | 30-2-4 | -193  | -193  |      | FRONT | VERT | TOTAL |      | C1    |

#### DESIGN CRITERIA

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 8.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

\*\*\* NON STANDARD GIRDER \*\*\*  
ADDTL. USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 088-08, CSA 088-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")  
ALLOWABLE DEFL.(TL) = L/360 (1.02")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.29")

CSI: TC=0.47/1.00 (G-H:1), BC=0.58/1.00 (O-Q:1), WB=0.78/1.00 (J-M:1), SS=0.13/1.00 (N-Q:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1867 798 1987 1659

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.88 (S) (INPUT = 0.80)  
JSI METAL=0.75 (P) (INPUT = 1.00)



Structural component only  
DWG# T-2006802 1/2

|                                 |                   |               |          |                               |          |
|---------------------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408264              | TRUSS NAME<br>T31 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
| Tamarack Roof Truss, Burlington |                   | TRUSS DESC.   |          |                               |          |

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Thu Apr 23 15:14:11 2020 Page 2  
ID:SoJMMpdxrEgZE5VLzZMvKziJd-NUiOyemTt7hrhXJQ9pDsRnQP19QIXhs0eJleqQzNpHw

PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-p  | MT20   | 6.0 | 9.0 | Edge |      |
| C  | TMWW-t  | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| D  | TTWW+m  | MT20   | 7.0 | 8.0 | 2.00 | 3.00 |
| E  | TMW-w   | MT20   | 2.0 | 4.0 |      |      |
| F  | TMWW-t  | MT20   | 4.0 | 6.0 |      |      |
| G  | TMW-w   | MT20   | 2.0 | 4.0 |      |      |
| H  | TTWW+m  | MT20   | 7.0 | 8.0 | 2.00 | 3.00 |
| I  | TMWW-t  | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| J  | TMVW-p  | MT20   | 6.0 | 9.0 | Edge |      |
| L  | BMVt-p  | MT20   | 3.0 | 6.0 |      |      |
| M  | BMWW-t  | MT20   | 5.0 | 8.0 | 2.50 | 2.00 |
| N  | BMWW-t  | MT20   | 5.0 | 6.0 |      |      |
| O  | BMWWW-t | MT20   | 7.0 | 8.0 | 4.25 | 2.00 |
| P  | BS-t    | MT20   | 5.0 | 6.0 |      |      |
| Q  | BMWWW-t | MT20   | 7.0 | 8.0 | 4.25 | 2.50 |
| R  | BMWW-t  | MT20   | 5.0 | 6.0 |      |      |
| S  | BMWW-t  | MT20   | 5.0 | 8.0 | 2.50 | 2.00 |
| T  | BMVt-p  | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only  
DWG# T-2006802 *42*

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>T32</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:12 2020 Page 1  
ID:SpjMMpjxEqZE5VLzZMvKzjuJd-rhQmA\_m5eRpiJhuGjWk5\_ZWZYNG5P9szRCLszNpHv  
11-3-13 2-8-15 14-0-12 2-0-0 16-0-12 2-0-0 18-0-12 18-10-0  
Scale = 1:25.5

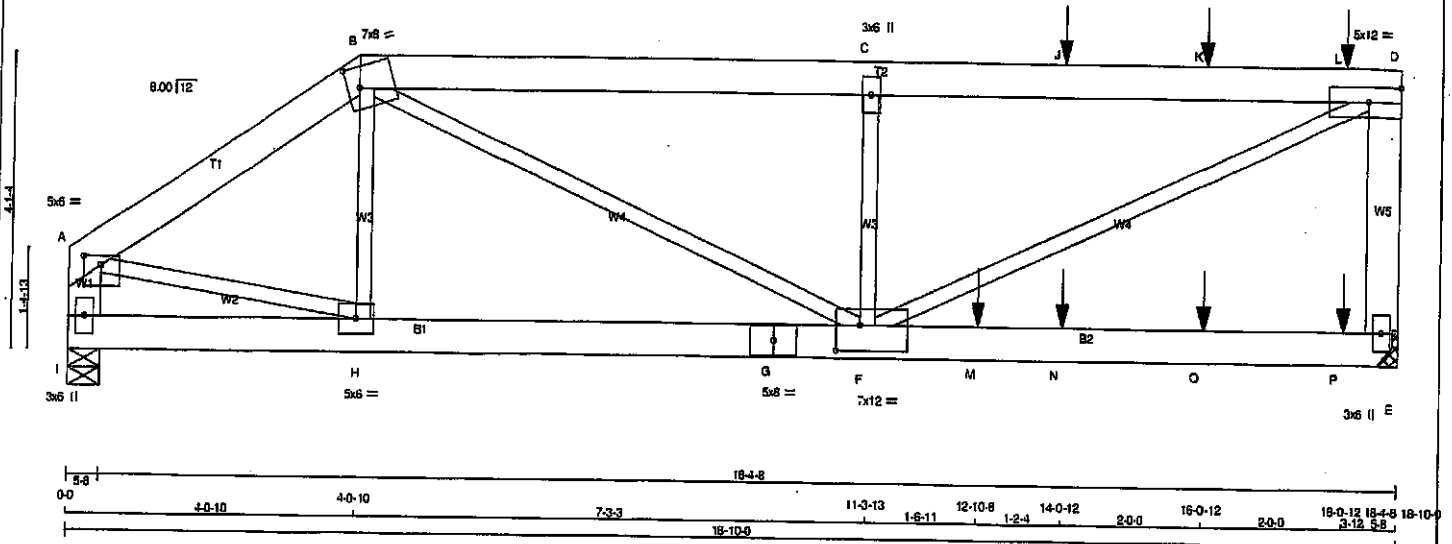

#### LUMBER

N.L.G.A. RULES

| CHORDS | SIZE | LUMBER   |
|--------|------|----------|
| A - B  | 2x6  | DRY No.2 |
| B - D  | 2x6  | DRY No.2 |
| E - D  | 2x6  | DRY No.2 |
| I - A  | 2x6  | DRY No.2 |
| I - G  | 2x6  | DRY No.2 |
| G - E  | 2x6  | DRY No.2 |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE     | PLATES | W   | LEN  | Y    | X    |
|-------------|--------|-----|------|------|------|
| A - TMVW-p  | MT20   | 5.0 | 6.0  | 1.50 | 3.00 |
| B - TTVW-m  | MT20   | 7.0 | 8.0  | 3.50 | 2.00 |
| C - TMVW-w  | MT20   | 3.0 | 6.0  |      |      |
| D - TMVW-t  | MT20   | 5.0 | 12.0 |      | Edge |
| E - BMV1-p  | MT20   | 3.0 | 6.0  |      |      |
| F - BMVWV-t | MT20   | 7.0 | 12.0 | 4.25 | 4.00 |
| G - BS-t    | MT20   | 5.0 | 6.0  |      |      |
| H - BMVW-t  | MT20   | 5.0 | 6.0  |      |      |
| I - BMV1-p  | MT20   | 3.0 | 6.0  |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----------|-------------------------|---------------------------------|-----------|----------|
| JT       | VERT                    | HORZ                            | DOWN      | HORZ     |
| E        | 2449                    | 0                               | 2449      | 0        |
| I        | 1584                    | 0                               | 1584      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 3-8.

#### UNFACTORED REACTIONS

| 1ST LCASE | COMBINED | SNOW     | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|-----------|----------|----------|-------|-----------|-------|---------|-------|
| JT        | 1730     | 1146 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 584 / 0 | 0 / 0 |
| E         | 1119     | 741 / 0  | 0 / 0 | 0 / 0     | 0 / 0 | 378 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.77 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. FACTORED HORIZ. LOAD (LBS) | MAX. FACTORED LENGTH (FT) | WEBS  | MAX. FACTORED FORCE (LBS) | MAX. FACTORED HORIZ. LOAD (LBS) | MAX. FACTORED LENGTH (FT) |
|--------|---------------------------|---------------------------|---------------------------------|---------------------------|-------|---------------------------|---------------------------------|---------------------------|
| FR-TO  |                           |                           |                                 |                           | FR-TO |                           |                                 |                           |
| A-B    | -1788 / 0                 | -91.8                     | -91.8                           | 0.16 (1)                  | 5.76  | H-B                       | -411 / 0                        | 0.10 (1)                  |
| B-C    | -3401 / 0                 | -91.8                     | -91.8                           | 0.58 (1)                  | 3.94  | A-H                       | 0 / 1516                        | 0.38 (1)                  |
| C-J    | -3401 / 0                 | -91.8                     | -91.8                           | 0.88 (1)                  | 3.77  | F-D                       | 0 / 3780                        | 0.94 (1)                  |
| J-K    | -3401 / 0                 | -91.8                     | -91.8                           | 0.88 (1)                  | 3.77  | B-F                       | 0 / 2158                        | 0.53 (1)                  |
| K-L    | -3401 / 0                 | -91.8                     | -91.8                           | 0.88 (1)                  | 3.77  | F-C                       | -959 / 0                        | 0.23 (1)                  |
| L-D    | -3401 / 0                 | -91.8                     | -91.8                           | 0.88 (1)                  | 3.77  |                           |                                 |                           |
| E-D    | -2131 / 0                 | 0.0                       | 0.0                             | 0.31 (1)                  | 6.93  |                           |                                 |                           |
| I-A    | -1502 / 0                 | 0.0                       | 0.0                             | 0.11 (1)                  | 7.81  |                           |                                 |                           |
| I-H    | 0 / 0                     | -18.5                     | -18.5                           | 0.13 (1)                  | 10.00 |                           |                                 |                           |
| H-G    | 0 / 1470                  | -18.5                     | -18.5                           | 0.86 (1)                  | 10.00 |                           |                                 |                           |
| G-F    | 0 / 1470                  | -18.5                     | -18.5                           | 0.86 (1)                  | 10.00 |                           |                                 |                           |
| F-M    | 0 / 0                     | -18.5                     | -18.5                           | 0.96 (1)                  | 10.00 |                           |                                 |                           |
| M-N    | 0 / 0                     | -18.5                     | -18.5                           | 0.96 (1)                  | 10.00 |                           |                                 |                           |
| N-O    | 0 / 0                     | -18.5                     | -18.5                           | 0.96 (1)                  | 10.00 |                           |                                 |                           |
| O-P    | 0 / 0                     | -18.5                     | -18.5                           | 0.96 (1)                  | 10.00 |                           |                                 |                           |
| P-E    | 0 / 0                     | -18.5                     | -18.5                           | 0.96 (1)                  | 10.00 |                           |                                 |                           |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.    | LC1   | MAX.  | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|---------|-------|-------|------|------|------|-------|------|-------|
| J  | 14-0-12 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| K  | 16-0-12 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| L  | 18-0-12 | -121  | -121  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| M  | 12-10-8 | -1534 | -1534 | ---  | BACK | VERT | TOTAL | ---  | C1    |
| N  | 14-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| O  | 16-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| P  | 18-0-12 | -29   | -29   | ---  | BACK | VERT | TOTAL | ---  | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 97 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.6 | PSF |
|            | DL | = 6.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD |    | = 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.63")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.22")  
ALLOWABLE DEFL.(TL) = L/360 (0.63")  
CALCULATED VERT. DEFL.(TL) = L/531 (0.43")

CSI: TC=0.88/1.00 (C-D-1), BC=0.98/1.00 (E-F-1), WB=0.94/1.00 (D-F-1), SS=0.95/1.00 (E-F-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR SECTION (PSI) | (PLI)   | (PLI)   |
|-----------------|---------------------|---------|---------|
| MAX MIN         | MAX MIN             | MAX MIN | MAX MIN |
| MT20            | 618                 | 354     | 1667    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.90 (B) (INPUT = 0.90)  
JSI METAL = 0.85 (G) (INPUT = 1.00)




Structural component only  
DWG# T-2006803

|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>T33 | QUANTITY<br>1 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version B.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:13 2020 Page 1  
ID: SgJMMpjrEgZE5VLzZMvKzJd-Jt\_8NKnjPtoZwrSpHDFKWC6g8zAe7kJsdluzNpHu  
12-2-5 18-10-0

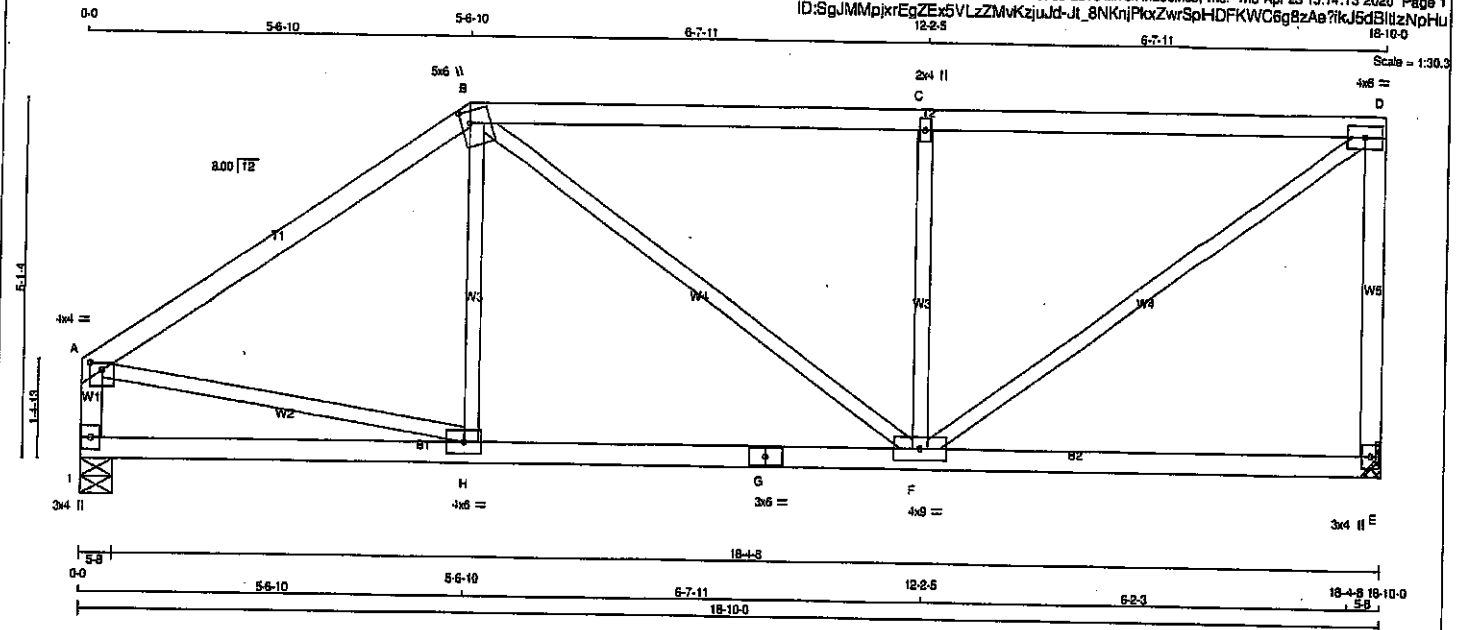

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR. |
|--------|------|--------|--------|
| A - B  | 2x4  | DRY    | No.2   |
| B - C  | 2x4  | DRY    | No.2   |
| C - D  | 2x4  | DRY    | No.2   |
| D - E  | 2x4  | DRY    | No.2   |
| F - G  | 2x4  | DRY    | No.2   |
| G - H  | 2x4  | DRY    | No.2   |
| H - I  | 2x4  | DRY    | No.2   |
| I - J  | 2x4  | DRY    | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| A  | TMWV-p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| B  | TTWV-m  | MT20   | 5.0 | 6.0 | 2.00 | 1.50 |
| C  | TMWV-m  | MT20   | 2.0 | 4.0 |      |      |
| D  | TMWV-l  | MT20   | 4.0 | 6.0 |      |      |
| E  | BMV1-p  | MT20   | 3.0 | 4.0 |      |      |
| F  | BMWVW-l | MT20   | 4.0 | 9.0 |      |      |
| G  | BS-l    | MT20   | 3.0 | 6.0 |      |      |
| H  | BMWV-l  | MT20   | 4.0 | 6.0 |      |      |
| I  | BMV1-p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

##### BUILDING DESIGNER

##### BEARINGS

| JT | VERT | HORZ | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|------|------|-------------------------|---------------------------------|-----------|------------|
| E  | 1038 | 0    | 1038                    | 0                               | 0         | MECHANICAL |
| I  | 1038 | 0    | 1038                    | 0                               | 0         | 5-8        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 3-8.

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|------------|-------|---------|-------|
| E  | 734      | 482 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 252 / 0 | 0 / 0 |
| I  | 734      | 482 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 252 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.81 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS    | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | FACTORED HORIZ. LOAD (LC1) | MAX. MEMB. FORCE (LBS) | WEBS  | MAX. FACTORED FORCE (LBS) | MAX. MEMB. FORCE (LC) |
|-------|-----------|---------------------------|---------------------------|----------------------------|------------------------|-------|---------------------------|-----------------------|
| FR-TO |           |                           | FROM                      | TO                         |                        | FR-TO |                           |                       |
| A-B   | -1038 / 0 | -91.8                     | -91.8                     | 0.55 (1)                   | 5.36                   | H-B   | -43 / 77                  | 0.03 (4)              |
| B-C   | -1047 / 0 | -91.8                     | -91.8                     | 0.75 (1)                   | 4.81                   | B-F   | 0 / 230                   | 0.05 (1)              |
| C-D   | -1047 / 0 | -91.8                     | -91.8                     | 0.75 (1)                   | 4.81                   | F-C   | -755 / 0                  | 0.29 (1)              |
| D-E   | -987 / 0  | 0.0                       | 0.0                       | 0.44 (1)                   | 7.81                   | F-D   | 0 / 1291                  | 0.29 (1)              |
| E-F   | -987 / 0  | 0.0                       | 0.0                       | 0.10 (1)                   | 7.81                   | A-H   | 0 / 878                   | 0.20 (1)              |
| H-I   | 0 / 0     | -18.5                     | -18.5                     | 0.15 (4)                   | 10.00                  |       |                           |                       |
| H-G   | 0 / 881   | -18.5                     | -18.5                     | 0.27 (4)                   | 10.00                  |       |                           |                       |
| G-F   | 0 / 881   | -18.5                     | -18.5                     | 0.27 (4)                   | 10.00                  |       |                           |                       |
| F-E   | 0 / 0     | -18.5                     | -18.5                     | 0.19 (4)                   | 10.00                  |       |                           |                       |

TOTAL WEIGHT = 75 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |        |     |
|------------|--------|-----|
| TOP CH. LL | = 25.6 | PSF |
| DL         | = 8.0  | PSF |
| BOT CH. LL | = 0.0  | PSF |
| DL         | = 7.4  | PSF |
| TOTAL LOAD | = 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, NBC 2012, ABC 2019
- PART 9 OF NBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 088-14
- TPC 2011, TPC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.83")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")  
ALLOWABLE DEFL.(TL) = L/360 (0.83")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.08")

CSI: TC=0.75/1.00 (C-D:1), BC=0.27/1.00 (F-H:4), WB=0.29/1.00 (D-F:1), SS=0.30/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) |
|-----------------|-------------|---------------|
| MT20            | 518         | 354           |
|                 | 1867        | 788           |
|                 | 1987        | 1656          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.80 (A) (INPUT = 0.80)  
JSI METAL= 0.31 (A) (INPUT = 1.00)




Structural component only  
DWG# T-2006804

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>T34</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:14 2020 Page 1  
ID: SgJMMpxrEgZEx5VLzZMvKzjuId-n3YWbqoLA23QY\_1?rxmZ3PeryNWsk68SKHwIPkzNpHt

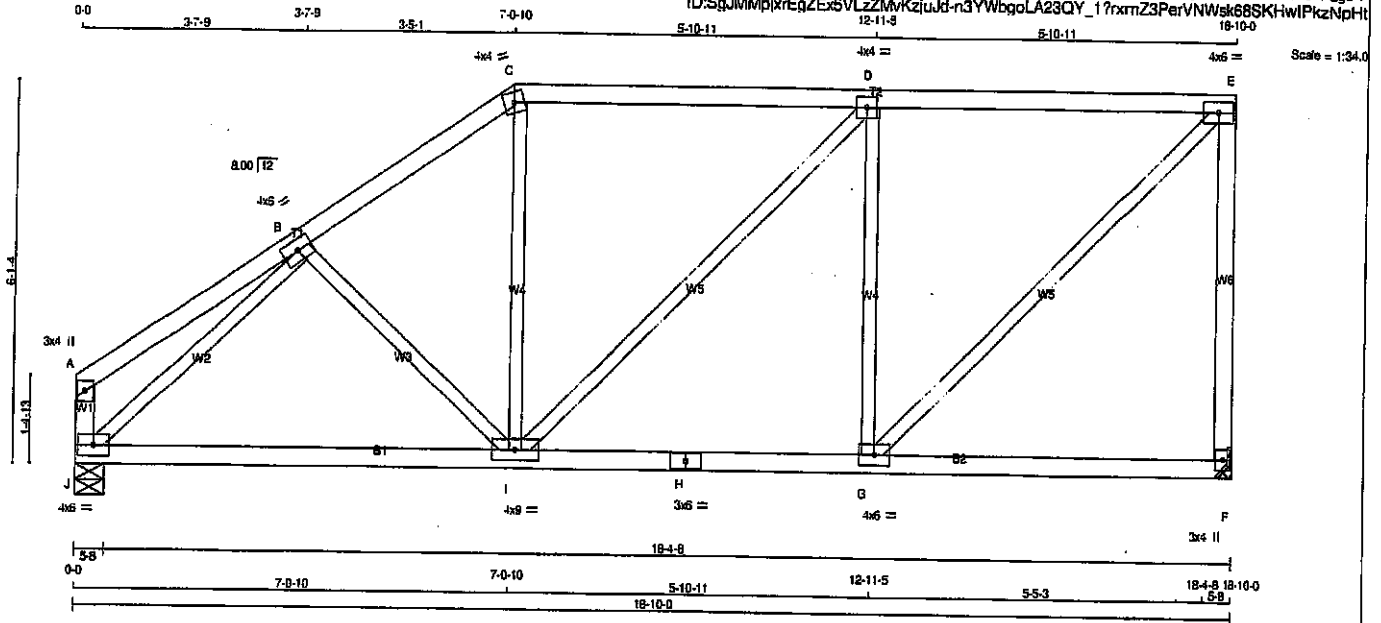

TOTAL WEIGHT = 81 lb

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - C  | 2x4  | DRY | No.2   |
| C - E  | 2x4  | DRY | No.2   |
| F - E  | 2x4  | DRY | No.2   |
| J - A  | 2x4  | DRY | No.2   |
| J - H  | 2x4  | DRY | No.2   |
| H - F  | 2x4  | DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y | X |
|----|---------|--------|-----|-----|---|---|
| A  | TMV+p   | MT20   | 3.0 | 4.0 |   |   |
| B  | TMVW-t  | MT20   | 4.0 | 6.0 |   |   |
| C  | TTW-m   | MT20   | 4.0 | 4.0 |   |   |
| D  | TMVW-t  | MT20   | 4.0 | 4.0 |   |   |
| E  | TMVW-t  | MT20   | 4.0 | 6.0 |   |   |
| F  | BMV-t+p | MT20   | 3.0 | 4.0 |   |   |
| G  | BMVW-t  | MT20   | 4.0 | 6.0 |   |   |
| H  | BS-t    | MT20   | 3.0 | 6.0 |   |   |
| I  | BMVW-t  | MT20   | 4.0 | 9.0 |   |   |
| J  | BMVW-t  | MT20   | 4.0 | 6.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | DOWN                            | 0         | 0        |
| F  | HORIZ                   | UP                              | 0         | 0        |
| J  | HORIZ                   | DOWN                            | 0         | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 3-8.

#### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|------------|-------|---------|-------|
| F  | 734      | 482 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 252 / 0 | 0 / 0 |
| J  | 734      | 482 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 252 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.80 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                               | WEBS  |                           |                           |                               |
|--------|---------------------------|---------------------------|-------------------------------|-------|---------------------------|---------------------------|-------------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC) |
| FR-TO  |                           |                           |                               | FR-TO |                           |                           |                               |
| A-B    | 0 / 20                    | -91.8                     | -91.8 0.17 (1)                | B-I   | -109 / 11                 | 0.05 (1)                  | 0.05 (1)                      |
| B-C    | -984 / 0                  | -91.8                     | -91.8 0.19 (1)                | I-C   | 0 / 207                   | 0.05 (1)                  | 0.05 (1)                      |
| C-D    | -805 / 0                  | -91.8                     | -91.8 0.57 (1)                | D-E   | 0 / 24                    | 0.01 (4)                  | 0.01 (4)                      |
| D-E    | -801 / 0                  | -91.8                     | -91.8 0.57 (1)                | E-F   | -674 / 0                  | 0.39 (1)                  | 0.39 (1)                      |
| F-E    | -992 / 0                  | 0.0                       | 0.0 0.72 (1)                  | G-E   | 0 / 1122                  | 0.25 (1)                  | 0.25 (1)                      |
| J-A    | -126 / 0                  | 0.0                       | 0.0 0.01 (1)                  | J-B   | -1229 / 0                 | 0.47 (1)                  | 0.47 (1)                      |
| J-I    | 0 / 881                   | -18.5                     | -18.5 0.27 (4)                |       |                           |                           |                               |
| I-H    | 0 / 801                   | -18.5                     | -18.5 0.27 (4)                |       |                           |                           |                               |
| H-G    | 0 / 801                   | -18.5                     | -18.5 0.27 (4)                |       |                           |                           |                               |
| G-F    | 0 / 0                     | -18.5                     | -18.5 0.13 (4)                |       |                           |                           |                               |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2010, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.83")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.03")  
ALLOWABLE DEFL. (TL) = L/360 (0.83")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.10")

CSK TC=0.72/1.00 (E-F:1), BC=0.27/1.00 (I-J:4),  
WB=0.47/1.00 (B-J:1), SG=0.28/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


#### NAIL VALUES

| PLATE GRIP (DRY) | SHEAR (PSI)                | SECTION (PLI) |
|------------------|----------------------------|---------------|
| MT20             | 618 354 1657 785 1987 1656 |               |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.78 (G) (INPUT = 0.90)  
JSI METAL = 0.30 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006805



|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b>       | TRUSS NAME<br><b>T36</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:17 2020 Page 1  
ID: SgUMMpxrEgZEx5VLzZMMKzjuJd-CeEfDqDTzR?PSmaW3KhH2GVEaaMxYpuOF9y03zNpHq

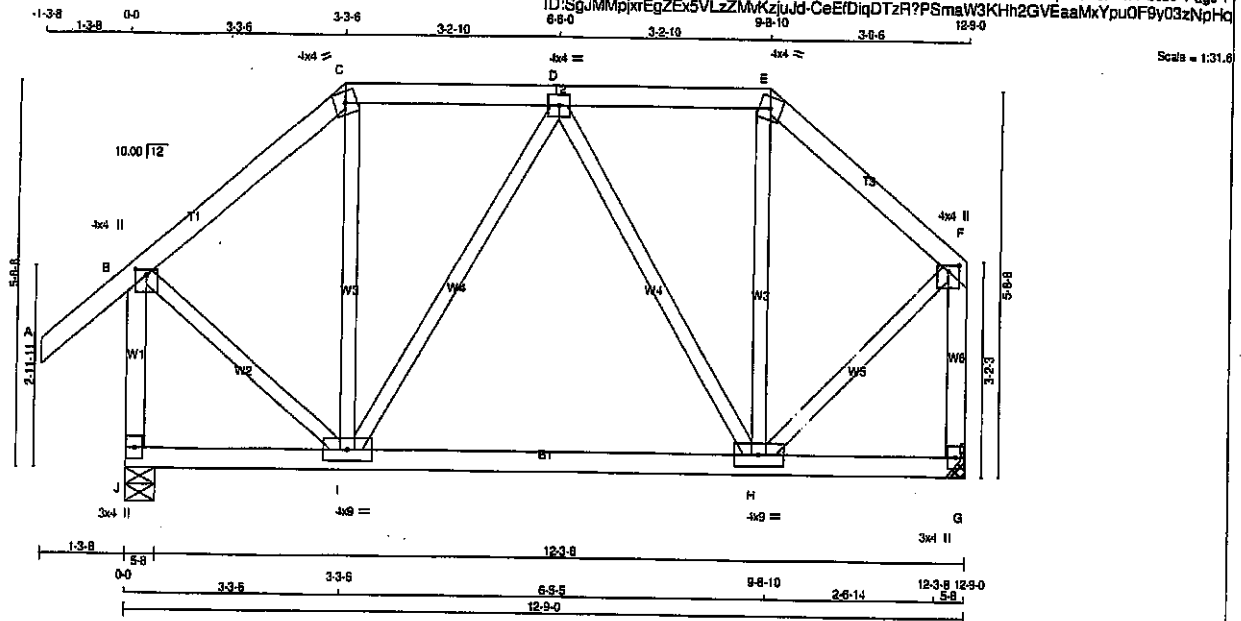

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER | DESCR. |
|--------|---------|--------|--------|
| A - C  | 2x4 DRY | No.2   | SPF    |
| C - E  | 2x4 DRY | No.2   | SPF    |
| E - F  | 2x4 DRY | No.2   | SPF    |
| J - B  | 2x4 DRY | No.2   | SPF    |
| G - F  | 2x4 DRY | No.2   | SPF    |
| J - G  | 2x4 DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| C  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| D  | TMVW-i  | MT20   | 4.0 | 4.0 |      |      |
| E  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| F  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| G  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |
| H  | BMVWW-i | MT20   | 4.0 | 9.0 |      |      |
| I  | BMVWW-i | MT20   | 4.0 | 9.0 |      |      |
| J  | BMV1+p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG   |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | DOWN                            | UPLIFT    | IN-SX      |
| J  | 830                     | 0                               | 0         | 5-8        |
| G  | 703                     | 0                               | 0         | MECHANICAL |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3-8.

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW  | LIVE | PERM.LIVE | WIND | DEAD  | SOIL |
|----|----------|-------|------|-----------|------|-------|------|
| J  | 585      | 387.0 | 0.0  | 0.0       | 0.0  | 187.0 | 0.0  |
| G  | 497      | 328.0 | 0.0  | 0.0       | 0.0  | 171.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                        | WEBS  |                           |                        |  |
|--------|---------------------------|---------------------------|------------------------|-------|---------------------------|------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |  |
| FR-TO  |                           | FROM TO                   |                        | FR-TO |                           |                        |  |
| A-B    | 0.41                      | -91.8 -91.8               | 0.13 (1)               | I-C   | 0.51                      | 0.02 (4)               |  |
| B-C    | -432.0                    | -91.8 -91.8               | 0.17 (1)               | I-D   | -192.0                    | 0.13 (1)               |  |
| C-D    | -330.0                    | -91.8 -91.8               | 0.16 (1)               | D-H   | -224.0                    | 0.16 (1)               |  |
| D-E    | -314.0                    | -91.8 -91.8               | 0.16 (1)               | H-E   | 0.48                      | 0.02 (4)               |  |
| E-F    | -411.0                    | -91.8 -91.8               | 0.15 (1)               | B-I   | 0.419                     | 0.09 (1)               |  |
| J-B    | -813.0                    | 0.0 0.0                   | 0.13 (1)               | H-F   | 0.425                     | 0.10 (1)               |  |
| G-F    | -889.0                    | 0.0 0.0                   | 0.12 (1)               |       |                           |                        |  |
| J-I    | 0.0                       | -18.5 -18.5               | 0.12 (4)               |       |                           |                        |  |
| I-H    | 0.427                     | -18.5 -18.5               | 0.15 (4)               |       |                           |                        |  |
| H-G    | 0.0                       | -18.5 -18.5               | 0.12 (4)               |       |                           |                        |  |

TOTAL WEIGHT = 64 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN. C.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCG 2010, NBCG 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.43")  
CALCULATED VERT. DEFL.(LL) = L/989 (0.01")  
ALLOWABLE DEFL.(TL) = L/360 (0.43")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.17/1.00 (B-C:1), BC=0.15/1.00 (H-I:4), WB=0.16/1.00 (D-H:1), SS=0.14/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PS) | SECTION (PL) |
|-----------------|------------|--------------|
|                 | MAX MIN    | MAX MIN      |
| MT20            | 618 354    | 1657 788     |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.58 (B) (INPUT = 0.30)  
JSI METAL = 0.17 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006807

|                    |                   |               |          |                               |          |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>T37 | QUANTITY<br>1 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTEK Industries, Inc. Thu Apr 23 15:14:18 2020 Page 1  
ID: SgUMMpjxEgZE5VLzZmVKzJd-gro1Q2rsEHZstclm4nrWDFply\_xGg0A2FvuWYwZnpHp

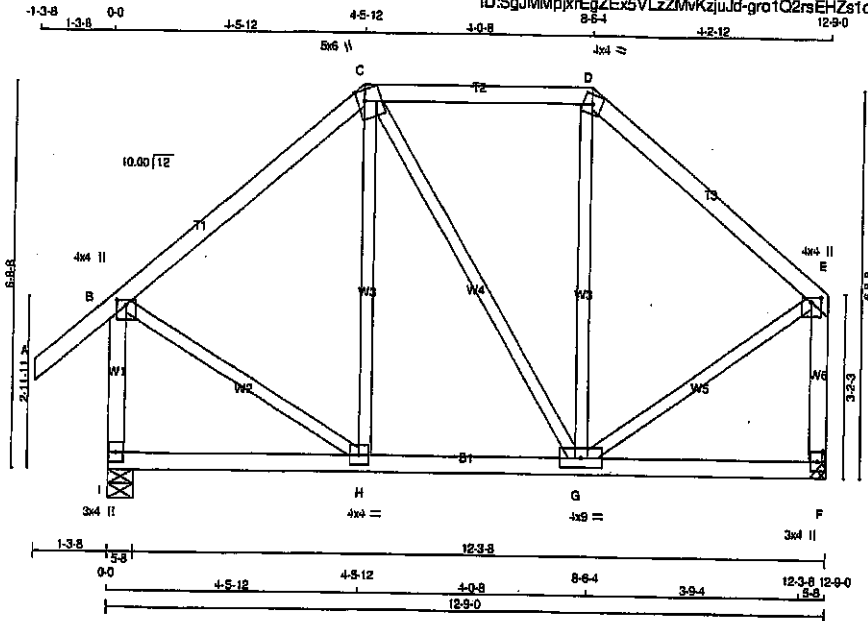

Scale = 1:37.0

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - C  | 2x4  | DRY | No.2   |
| C - D  | 2x4  | DRY | No.2   |
| D - E  | 2x4  | DRY | No.2   |
| E - F  | 2x4  | DRY | No.2   |
| F - G  | 2x4  | DRY | No.2   |
| G - H  | 2x4  | DRY | No.2   |
| H - I  | 2x4  | DRY | No.2   |
| I - J  | 2x4  | DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (tables in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW+P  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| C  | TTWW+m  | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| D  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| E  | TMVW+P  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| F  | BMV1+P  | MT20   | 3.0 | 4.0 |      |      |
| G  | BMVWW+T | MT20   | 4.0 | 9.0 |      |      |
| H  | BMVW+T  | MT20   | 4.0 | 4.0 |      |      |
| I  | BMV1+P  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|         | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG IN-SX | REQD BRG IN-SX |
|---------|-------------------------|---------------------------------|-----------------|----------------|
| JT VERT | 830                     | 830                             | 0               | 5-8            |
| F VERT  | 703                     | 703                             | 0               | MECHANICAL     |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 3-8.

##### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX. MIN. COMPONENT REACTIONS       |
|----|----------|-------------------------------------|
|    | COMBINED | SNOW LIVE PERM. LIVE WIND DEAD SOIL |
| I  | 585      | 397 0 0 0 0 0 0                     |
| F  | 497      | 326 0 0 0 0 0 0                     |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | FACTORED LC1 MAX CSI (LC) | UNBRAC LENGTH | WEBS  | MEMB.   | MAX. FACTORED FORCE (LBS) | FACTORED MAX. CSI (LC) |
|--------|--------|---------------------------|---------------------------|---------------------------|---------------|-------|---------|---------------------------|------------------------|
| FR-TO  |        |                           |                           |                           |               | FR-TO |         |                           |                        |
| A-B    | 0:41   | -91.8                     | -91.8                     | 0.13 (1)                  | 10.00         | H-C   | -102:30 | 0.08 (1)                  |                        |
| B-C    | -426:0 | -91.8                     | -91.8                     | 0.24 (1)                  | 6.25          | C-G   | -18:0   | 0.02 (1)                  |                        |
| C-D    | -318:0 | -91.8                     | -91.8                     | 0.19 (1)                  | 6.25          | G-D   | -113:24 | 0.08 (1)                  |                        |
| D-E    | -415:0 | -91.8                     | -91.8                     | 0.21 (1)                  | 6.25          | B-H   | 0:377   | 0.08 (1)                  |                        |
| E-F    | -795:0 | 0.0                       | 0.0                       | 0.13 (1)                  | 7.81          | G-E   | 0:380   | 0.09 (1)                  |                        |
| F-G    | -689:0 | 0.0                       | 0.0                       | 0.12 (1)                  | 7.81          |       |         |                           |                        |
| I-H    | 0:0    | -18.5                     | -18.5                     | 0.08 (4)                  | 10.00         |       |         |                           |                        |
| H-G    | 0:325  | -18.5                     | -18.5                     | 0.11 (4)                  | 10.00         |       |         |                           |                        |
| G-F    | 0:0    | -18.5                     | -18.5                     | 0.07 (4)                  | 10.00         |       |         |                           |                        |

TOTAL WEIGHT = 64 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.8 PSF |
| DL         | = 6.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.42")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.01")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.42")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.02")

CSI: TC=0.24/1.00 (B-C:1), BC=0.11/1.00 (G-H:4), WB=0.09/1.00 (E-G:1), SS=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) SHEAR SECTION (PSI) | (PLJ)                      | (PLJ) |
|-------------------------------------|----------------------------|-------|
| MAX MIN MAX MIN MAX MIN             |                            |       |
| MT20                                | 518 354 1567 788 1987 1655 |       |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.62 (B) (INPUT = 0.90)  
JSI METAL = 0.17 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006808

| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
|----------|------------|----------|-----|------------------|----------|
| 408264   | T38        | 2        | 1   | GREEN PARK HOMES |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:19 2020 Page 1  
ID: SqJMMpxrEgZExSVLzZMvKzJd-81MPeNsU?ahjemwydUMmTmPSQFePRIBTZe34yzNpHo

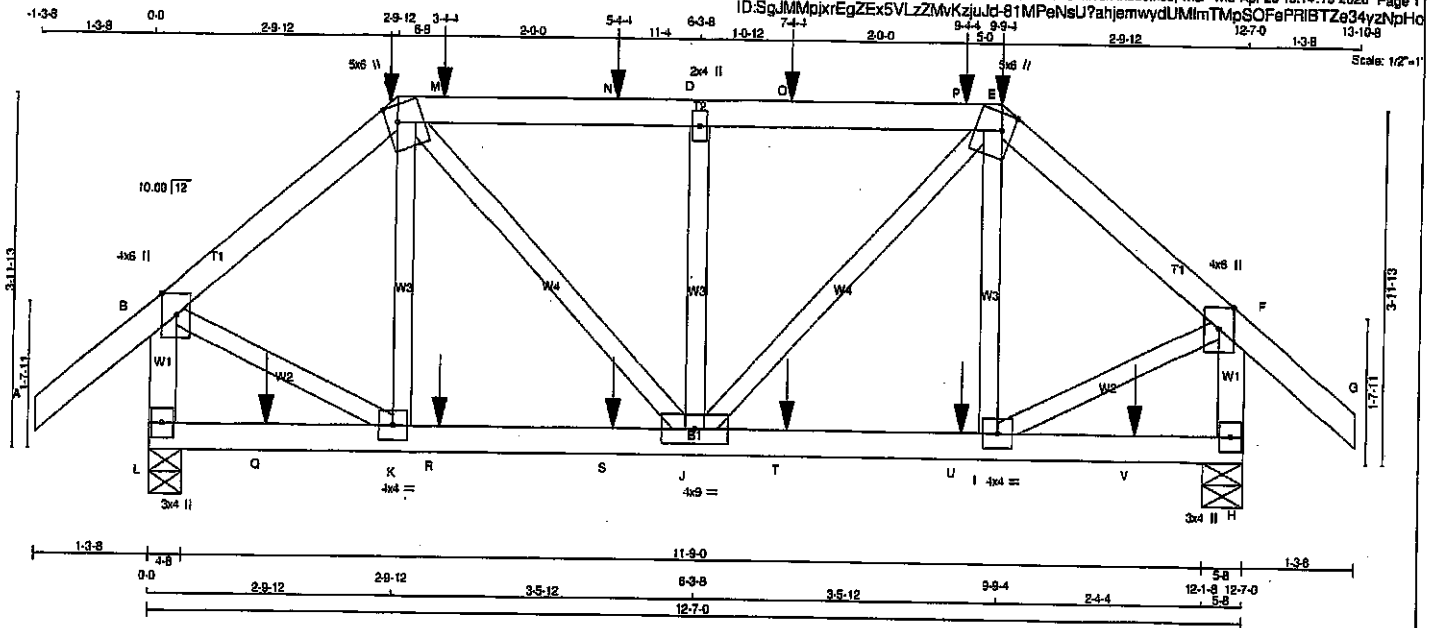

#### LUMBER

N. L. G. A. RULES

| CHORDS   | SIZE | LUMBER | DESCR |
|----------|------|--------|-------|
| A - C    | 2x4  | DRY    | No.2  |
| C - E    | 2x4  | DRY    | No.2  |
| E - G    | 2x4  | DRY    | No.2  |
| L - B    | 2x4  | DRY    | No.2  |
| H - F    | 2x4  | DRY    | No.2  |
| L - H    | 2x4  | DRY    | No.2  |
| ALL WEBS | 2x3  | DRY    | No.2  |
| EXCEPT   |      |        | SPF   |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE   | PLATES | W   | LEN | Y    | X    |
|-----------|--------|-----|-----|------|------|
| B TMVW+p  | MT20   | 4.0 | 6.0 | Edge |      |
| C TTWW+m  | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| D TMVW+w  | MT20   | 2.0 | 4.0 |      |      |
| E TTWW+m  | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| F TMVW+p  | MT20   | 4.0 | 6.0 | Edge |      |
| H BMV1+p  | MT20   | 3.0 | 4.0 |      |      |
| I BMVW-1  | MT20   | 4.0 | 4.0 |      |      |
| J BMVWV-1 | MT20   | 4.0 | 9.0 |      |      |
| K BMVW-1  | MT20   | 4.0 | 4.0 |      |      |
| L BMV1+p  | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORIZ                           | UPLIFT    | IN-SX    |
| L  | 1190                    | 0                               | 1190      | 0        |
| H  | 1198                    | 0                               | 1198      | 0        |

##### UNFACTORED REACTIONS

| 1ST CASE | MAX/MIN COMPONENT REACTIONS |         |       |           |       |         |       |
|----------|-----------------------------|---------|-------|-----------|-------|---------|-------|
| JT       | COMBINED                    | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
| L        | 838                         | 570 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 269 / 0 | 0 / 0 |
| H        | 843                         | 574 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 269 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.76 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                | WEBS  |                           |               |  |
|--------|---------------------------|---------------------------|----------------|-------|---------------------------|---------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC)  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |  |
| FR-TO  |                           | FROM TO                   |                | FR-TO |                           |               |  |
| A-B    | 0 / 41                    | -91.8                     | -91.8 0.14 (1) | K-C   | -218 / 1                  | 0.06 (1)      |  |
| B-C    | -920 / 0                  | -91.8                     | -91.8 0.15 (1) | C-J   | 0 / 453                   | 0.11 (1)      |  |
| C-M    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) | J-D   | -573 / 0                  | 0.15 (1)      |  |
| M-N    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) | J-E   | 0 / 445                   | 0.11 (1)      |  |
| N-D    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) | I-E   | -220 / 0                  | 0.06 (1)      |  |
| D-O    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) | B-K   | 0 / 772                   | 0.19 (1)      |  |
| O-P    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) | I-F   | 0 / 777                   | 0.19 (1)      |  |
| P-E    | -1009 / 0                 | -91.8                     | -91.8 0.32 (1) |       |                           |               |  |
| E-F    | -927 / 0                  | -91.8                     | -91.8 0.15 (1) |       |                           |               |  |
| F-G    | 0 / 41                    | -91.8                     | -91.8 0.14 (1) |       |                           |               |  |
| L-B    | -1184 / 0                 | 0.0                       | 0.0 0.14 (1)   |       |                           |               |  |
| H-F    | -1170 / 0                 | 0.0                       | 0.0 0.14 (1)   |       |                           |               |  |
| L-Q    | 0 / 0                     | -18.5                     | -18.5 0.07 (4) |       |                           |               |  |
| Q-K    | 0 / 0                     | -18.5                     | -18.5 0.07 (4) |       |                           |               |  |
| K-R    | 0 / 698                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| R-S    | 0 / 698                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| S-J    | 0 / 703                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| J-T    | 0 / 703                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| T-U    | 0 / 703                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| U-I    | 0 / 703                   | -18.5                     | -18.5 0.16 (1) |       |                           |               |  |
| I-V    | 0 / 0                     | -18.5                     | -18.5 0.07 (4) |       |                           |               |  |
| V-H    | 0 / 0                     | -18.5                     | -18.5 0.07 (4) |       |                           |               |  |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1  | MAX. | MAX. | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|------|------|------|-------|------|-------|------|-------|
| JT | 2-9-12 | -25  | -25  |      | FRONT | VERT | DEAD  |      | C1    |
| C  | 2-9-12 | -105 | -105 |      | FRONT | VERT | SNOW  |      | C1    |
| E  | 9-9-4  | -25  | -25  |      | FRONT | VERT | DEAD  |      | C1    |
| E  | 9-9-4  | -105 | -105 |      | FRONT | VERT | SNOW  |      | C1    |
| M  | 3-4-4  | -107 | -107 |      | FRONT | VERT | TOTAL |      | C1    |
| N  | 5-4-4  | -86  | -86  |      | FRONT | VERT | TOTAL |      | C1    |
| O  | 7-4-4  | -86  | -86  |      | FRONT | VERT | TOTAL |      | C1    |
| P  | 9-4-4  | -113 | -113 |      | FRONT | VERT | TOTAL |      | C1    |
| Q  | 1-4-4  | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |
| R  | 3-4-4  | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |
| S  | 5-4-4  | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |
| T  | 7-4-4  | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |
| U  | 9-4-4  | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |
| V  | 11-4-4 | -18  | -18  |      | FRONT | VERT | TOTAL |      | C1    |

TOTAL WEIGHT = 2 X 58 = 116 lb

#### DESIGN CRITERIA

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.6 | PSF |
|            | DL | = 6.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD | =  | 39.0   | PSF |

SPACING = 24.0 IN. C/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

##### \*\*\* NON STANDARD GIRDER \*\*\*

ADDTL. USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 088-03, CSA 088-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.42")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")  
ALLOWABLE DEFL.(TL) = L/360 (0.42")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.32/1.00 (D-E:1), BC=0.16/1.00 (J-K:1),  
WB=0.19/1.00 (F-I:1), SS=0.25/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES


| PLATE GRIP(DRY) | SHEAR (PSI)                | SECTION (PL) |
|-----------------|----------------------------|--------------|
| MT20            | 618 354 1667 788 1987 1658 |              |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.82 (I) (INPUT = 0.90)  
JSI METAL = 0.45 (B) (INPUT = 1.00)

CONTINUED ON PAGE 2




Structural component only  
DWG# T-2006809

|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>T39 | QUANTITY<br>3 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:20 2020 Page 1  
ID: SgJMMpJxrEgZE5VLzZMvKzjwJd-cDvn7i6lupaGvV9BCt Jgu?Xncj8wXLCNddOzNpHn

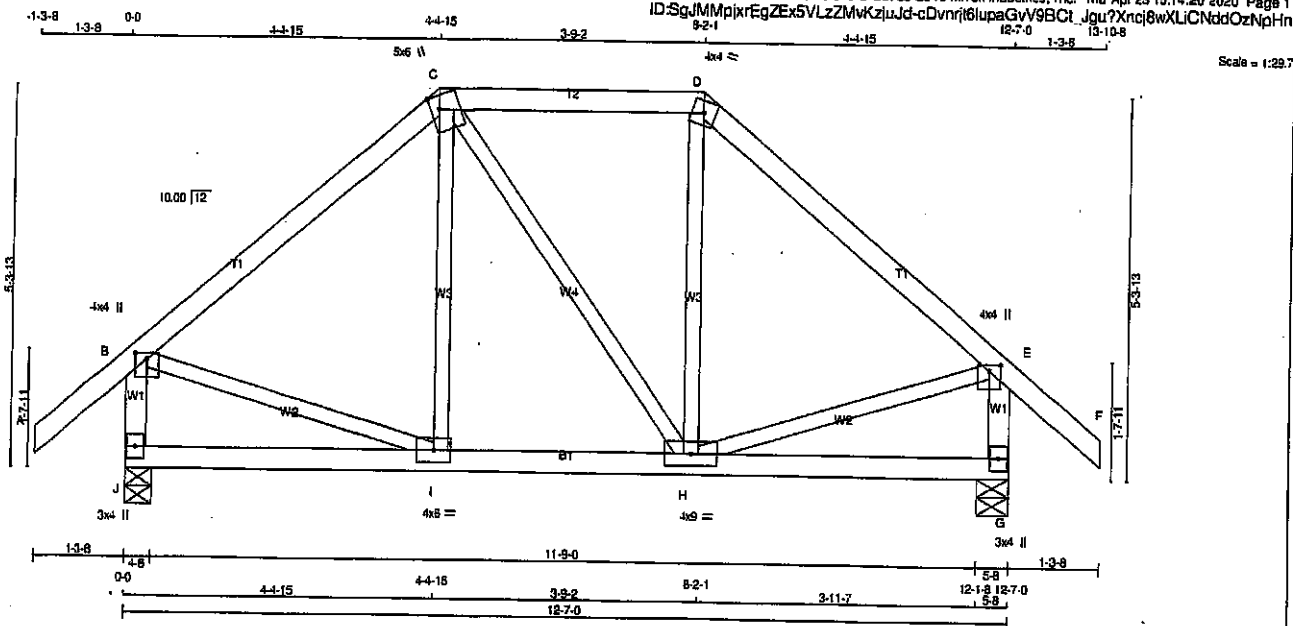

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR. |
|--------|------|--------|--------|
| A - C  | 2x4  | DRY    | No.2   |
| C - D  | 2x4  | DRY    | No.2   |
| D - F  | 2x4  | DRY    | No.2   |
| J - B  | 2x4  | DRY    | No.2   |
| G - E  | 2x4  | DRY    | No.2   |
| J - G  | 2x4  | DRY    | No.2   |

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT DRY: SEASONED LUMBER.

#### PLATES (table in inches)

| JT TYPE   | PLATES | W   | LEN | Y    | X    |
|-----------|--------|-----|-----|------|------|
| B TMWV-p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| C TTWW-m  | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| D TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| E TMWV-p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| G BMV1-p  | MT20   | 3.0 | 4.0 |      |      |
| H BMWWV-t | MT20   | 4.0 | 9.0 |      |      |
| I BMWW-t  | MT20   | 4.0 | 6.0 |      |      |
| J BMV1-p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
| JT | VERT           | HCRZ             | DOWN  | UPLIFT |
| J  | 821            | 0                | 821   | 0      |
| G  | 821            | 0                | 821   | 0      |

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|-----------|-------|---------|-------|
| J  | 578      | 393 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 185 / 0 | 0 / 0 |
| G  | 578      | 393 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 185 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J, G

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                        | WEBS  |                           |                        |  |
|--------|---------------------------|---------------------------|------------------------|-------|---------------------------|------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED LC1 (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED LC1 (LC) |  |
| FR-TO  |                           | FROM TO                   |                        | FR-TO |                           |                        |  |
| A-B    | 0 / 41                    | -91.8                     | -91.8 0.13 (1)         | I-C   | -36 / 50                  | 0.02 (4)               |  |
| B-C    | -528 / 0                  | -91.8                     | -91.8 0.23 (1)         | C-H   | 0 / 0                     | 0.00 (1)               |  |
| C-D    | -408 / 0                  | -91.8                     | -91.8 0.17 (1)         | H-D   | -38 / 50                  | 0.02 (4)               |  |
| D-E    | -527 / 0                  | -91.8                     | -91.8 0.23 (1)         | B-I   | 0 / 421                   | 0.09 (1)               |  |
| E-F    | 0 / 41                    | -91.8                     | -91.8 0.13 (1)         | H-E   | 0 / 421                   | 0.09 (1)               |  |
| J-B    | -785 / 0                  | 0.0                       | 0.0 0.08 (1)           |       |                           |                        |  |
| G-E    | -785 / 0                  | 0.0                       | 0.0 0.08 (1)           |       |                           |                        |  |
| J-I    | 0 / 0                     | -18.5                     | -18.5 0.08 (4)         |       |                           |                        |  |
| I-H    | 0 / 404                   | -18.5                     | -18.5 0.11 (4)         |       |                           |                        |  |
| H-G    | 0 / 0                     | -18.5                     | -18.5 0.08 (4)         |       |                           |                        |  |

TOTAL WEIGHT = 3 X 58 = 175 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.6 PSF |
| DL         | = 6.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 086-14
- TPIC 2011, TPIC 2014

85% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.42")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")  
ALLOWABLE DEFL.(TL) = L/360 (0.42")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.02")

CSI: TC=0.23/1.00 (B-C:1), BC=0.11/1.00 (H-I:4), WB=0.09/1.00 (B-I:1), SS=0.13/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR   | SECTION            |
|-----------------|---------|--------------------|
| (PSI)           | (PL)    | (PL)               |
| MAX MIN         | MAX MIN | MAX MIN            |
| MT20            | 618 354 | 1667 788 1987 1856 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.71 (B) (INPUT = 0.90)  
JSI METAL= 0.20 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006810

|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>T40</b> | QUANTITY<br><b>1</b> | PLY<br><b>3</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Thu Apr 23 15:21 2020 Page 1  
ID: SgJMMpxrEgZE5VLzZMvKzjuJd-4QTA33IKWCyRu34LvODruR6wBs5tDEUxs7A9qzNpHm

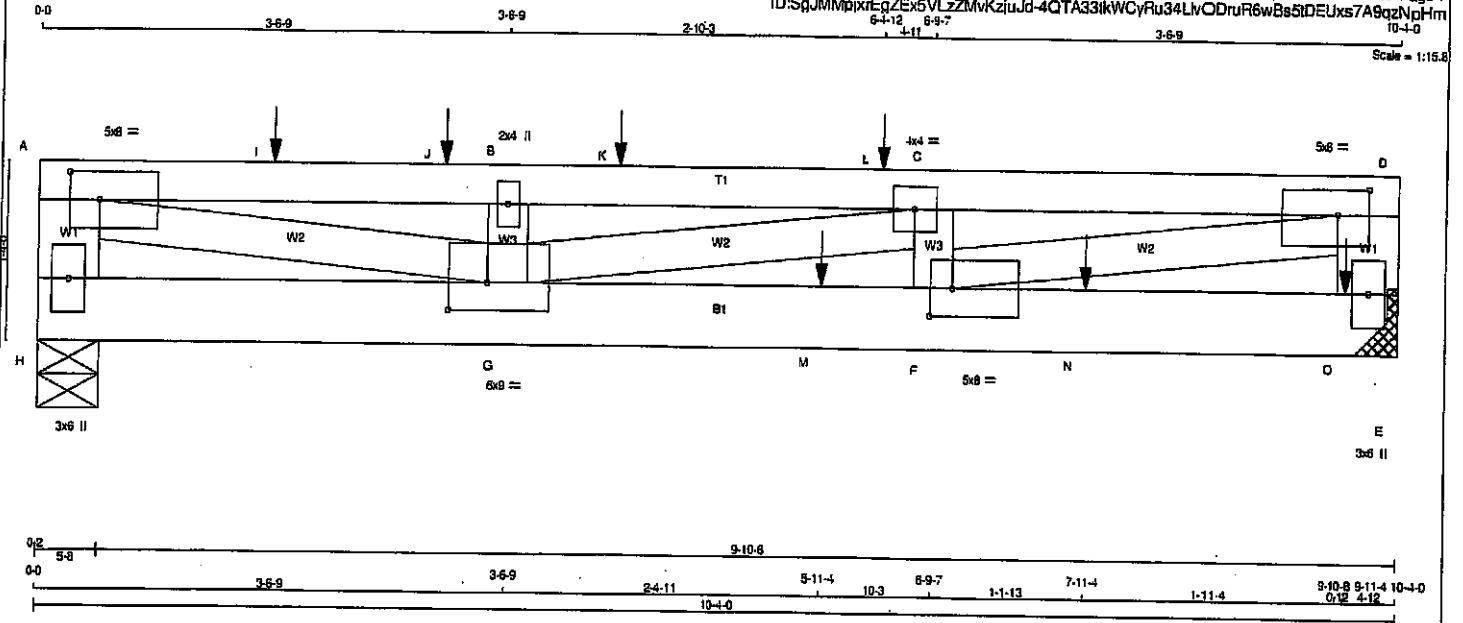

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR.         |
|--------|------|--------|----------------|
| H - A  | 2x6  | DRY    | No.2 SPF       |
| A - D  | 2x4  | DRY    | No.2 SPF       |
| E - D  | 2x6  | DRY    | No.2 SPF       |
| H - E  | 2x6  | DRY    | 2100F 1.8E SPF |

ALL WEBS 2x4 DRY No.2 SPF  
DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 3 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)  |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| H-A 2 12                                 |                      | TOP         |
| D-E 2 12                                 |                      | TOP         |
| A-D 1 5                                  |                      | SIDE(570.5) |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| H-E 2 6                                  |                      | SIDE(634.1) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| 2x4 1 6                                  |                      |             |

STAGGER NAILS BY HALF THE SURFACE SPACING IN ADJACENT PLIES.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UOL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

#### PLATES (table in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| A  | TMWV-1 | MT20   | 5.0 | 8.0 | 2.50 | 2.75 |
| B  | TMWV-1 | MT20   | 2.0 | 4.0 |      |      |
| C  | TMWV-1 | MT20   | 4.0 | 4.0 |      |      |
| D  | TMWV-1 | MT20   | 5.0 | 8.0 | 2.25 | 2.75 |
| E  | BMV1-p | MT20   | 3.0 | 6.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORIZ                           | DOWN      | HORIZ    |
| H  | 3832                    | 0                               | 3832      | 0        |
| E  | 5068                    | 0                               | 5068      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 4-0.

##### UNFACTORED REACTIONS

|    | 1ST CASE | MAX/MIN. COMPONENT REACTIONS |      |            |      |        |      |
|----|----------|------------------------------|------|------------|------|--------|------|
| JT | COMBINED | SNOW                         | LIVE | PERM. LIVE | WIND | DEAD   | SOIL |
| H  | 2706     | 1789.0                       | 0.0  | 0.0        | 0.0  | 907.0  | 0.0  |
| E  | 3578     | 2384.0                       | 0.0  | 0.0        | 0.0  | 1194.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.18 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS        |             |                  |               | WEBS          |             |               |         |
|---------------|-------------|------------------|---------------|---------------|-------------|---------------|---------|
| MAX. FACTORED |             | FACTORED         |               | MAX. FACTORED |             | MAX. FACTORED |         |
| MEMB.         | FORCE (LBS) | VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB.         | FORCE (LBS) | MAX. CSI (LC) |         |
| FR-TO         |             | FROM TO          |               | FR-TO         |             |               |         |
| H-A           | -3454.0     | 0.0              | 0.0           | 0.07 (1)      | 7.81        | F-D           | 0.13174 |
| A-I           | -10970.0    | -91.8            | -91.8         | 0.51 (1)      | 3.18        | A-G           | 0.11363 |
| I-J           | -10970.0    | -91.8            | -91.8         | 0.51 (1)      | 3.18        | F-C           | -785.0  |
| J-B           | -10970.0    | -91.8            | -91.8         | 0.51 (1)      | 3.18        | G-B           | -2277.0 |
| B-K           | -10970.0    | -91.8            | -91.8         | 0.39 (1)      | 3.33        | G-C           | -1823.0 |
| K-L           | -10970.0    | -91.8            | -91.8         | 0.39 (1)      | 3.33        |               |         |
| L-C           | -10970.0    | -91.8            | -91.8         | 0.39 (1)      | 3.33        |               |         |
| C-D           | -12719.0    | -91.8            | -91.8         | 0.30 (1)      | 3.23        |               |         |
| E-D           | -3617.0     | 0.0              | 0.0           | 0.08 (1)      | 7.81        |               |         |

|     |         |       |       |          |       |
|-----|---------|-------|-------|----------|-------|
| H-G | 0.0     | -18.5 | -18.5 | 0.15 (1) | 10.00 |
| G-M | 0.12719 | -18.5 | -18.5 | 0.48 (1) | 10.00 |
| M-F | 0.12719 | -18.5 | -18.5 | 0.48 (1) | 10.00 |
| F-N | 0.0     | -18.5 | -18.5 | 0.17 (1) | 10.00 |
| N-O | 0.0     | -18.5 | -18.5 | 0.17 (1) | 10.00 |
| O-E | 0.0     | -18.5 | -18.5 | 0.17 (1) | 10.00 |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1   | MAX.  | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-------|-------|------|-------|------|-------|------|-------|
| I  | 1-9-4  | -729  | -729  |      | FRONT | VERT | TOTAL |      | C1    |
| J  | 3-1-0  | -729  | -729  |      | FRONT | VERT | TOTAL |      | C1    |
| K  | 4-4-12 | -729  | -729  |      | FRONT | VERT | TOTAL |      | C1    |
| L  | 6-4-12 | -1098 | -1098 |      | FRONT | VERT | TOTAL |      | C1    |
| M  | 5-11-4 | -2431 | -2431 |      | FRONT | VERT | TOTAL |      | C1    |
| N  | 7-11-4 | -1020 | -1020 |      | FRONT | VERT | TOTAL |      | C1    |
| O  | 9-11-4 | -1025 | -1025 |      | FRONT | VERT | TOTAL |      | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 3 X 44 = 132 b

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |   |      |     |
|------------|---|------|-----|
| TOP CH. LL | = | 25.6 | PSF |
| DL         | = | 6.0  | PSF |
| BOT CH. LL | = | 0.0  | PSF |
| DL         | = | 7.4  | PSF |
| TOTAL LOAD | = | 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.34")  
CALCULATED VERT. DEFL.(LL) = L/849 (0.13")  
ALLOWABLE DEFL.(TL) = L/360 (0.34")  
CALCULATED VERT. DEFL.(TL) = L/517 (0.24")

CSI: TC=0.51/1.00 (A-B:1), BC=0.48/1.00 (F-G:1), WB=0.71/1.00 (D-F:1), SS=0.40/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) |
|-----------------|-------------|---------------|
| MT20            | 818         | 354           |
|                 | 1667        | 786           |
|                 | 1987        | 1665          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP=0.90 (F) (INPUT = 0.90)  
JSI METAL=0.79 (D) (INPUT = 1.00)

CONTINUED ON PAGE 2



Structural component only  
DWG# T-2006811 1/2

|                                 |            |          |     |                  |          |
|---------------------------------|------------|----------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408264                          | T40        | 1        | 3   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            |          |     | TRUSS DESC.      |          |


Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:14:21 2020 Page 2  
ID: SqJMMpikrEgZE5VLzZMvKziJg-4QTA33kWCvRu34LvODruR6wBs5tDEUxs7A9gzNpHm

**PLATES** (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| F  | BMWW-t  | MT20   | 5.0 | 8.0 | 2.50 | 2.00 |
| G  | BMWWW-t | MT20   | 8.0 | 9.0 | 2.50 | 3.50 |
| H  | BMV1-p  | MT20   | 3.0 | 6.0 |      |      |



Structural component only  
DWG# T-2006811 7/2

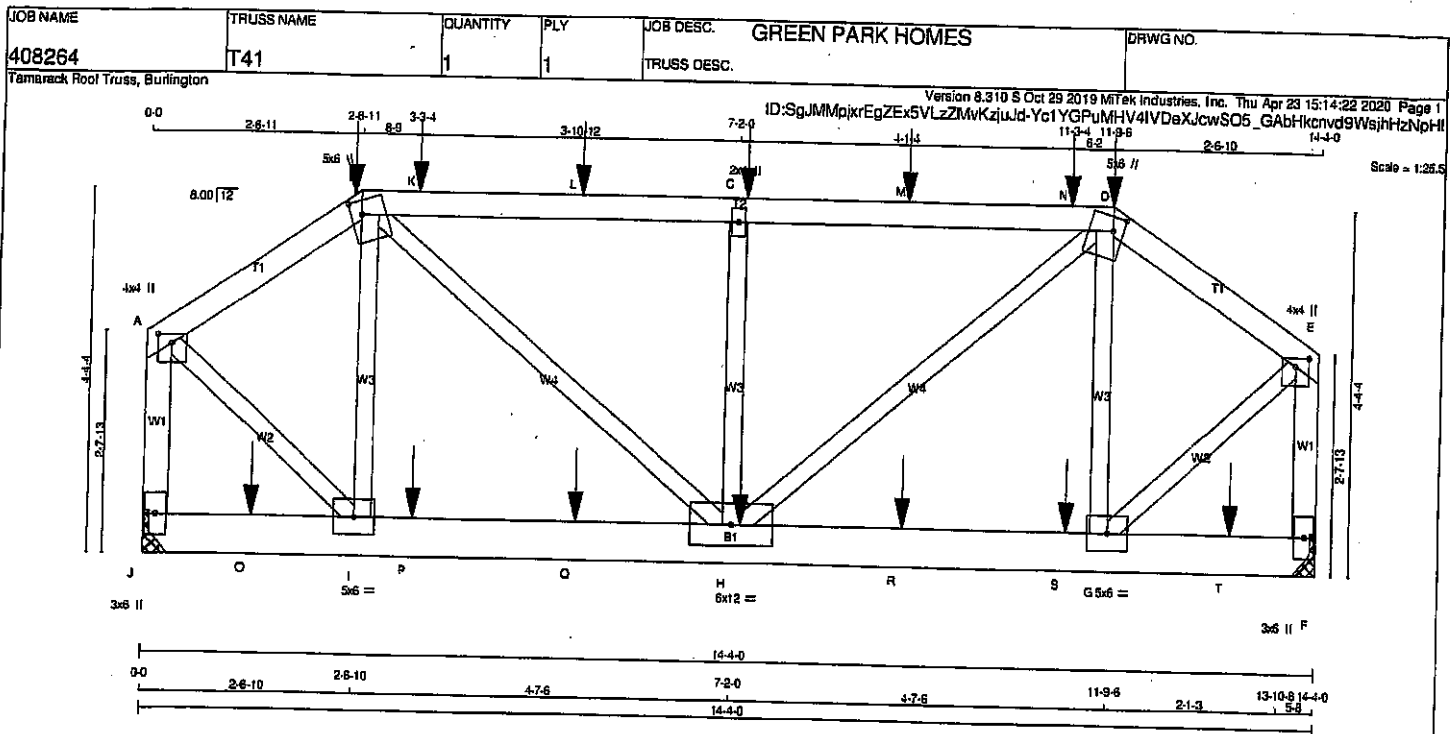

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - B  | 2x4  | DRY | No.2   |
| B - D  | 2x4  | DRY | No.2   |
| D - E  | 2x4  | DRY | No.2   |
| J - A  | 2x4  | DRY | No.2   |
| F - E  | 2x4  | DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table in inches)**

| JT TYPE | PLATES | W   | LEN  | Y    | X    |
|---------|--------|-----|------|------|------|
| A       | TMVW+p | 4.0 | 4.0  | 1.25 | 2.00 |
| B       | TTWW+m | 5.0 | 6.0  | 2.00 | 1.50 |
| C       | TMVW+w | 2.0 | 4.0  |      |      |
| D       | TTWW+m | 5.0 | 6.0  | 2.00 | 1.50 |
| E       | TMVW+p | 4.0 | 4.0  | 1.25 | 2.00 |
| F       | BMV1+p | 3.0 | 6.0  |      |      |
| G       | BMVW-i | 5.0 | 8.0  |      |      |
| H       | BMVW-i | 8.0 | 12.0 |      |      |
| I       | BMVW-i | 5.0 | 6.0  |      |      |
| J       | BMV1+p | 3.0 | 6.0  |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT 1200               | DOWN 1200                       | 0         | 0        |
| F  | VERT 1212               | DOWN 1212                       | 0         | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J, F. MINIMUM BEARING LENGTH AT JOINT J = 3-8, JOINT F = 3-8.

**UNFACTORED REACTIONS**

| 1ST LCASE   | MAX. MIN. COMPONENT REACTIONS         |
|-------------|---------------------------------------|
| JT COMBINED | SNOW LIVE PERM. LIVE WIND DEAD SOIL   |
| J           | 847 582 / 0 0 / 0 0 0 0 286 / 0 0 / 0 |
| F           | 856 588 / 0 0 / 0 0 0 0 288 / 0 0 / 0 |

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.99 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                                 |                                     |                  | WEBS           |       |                                 |                  |
|--------|---------------------------------|-------------------------------------|------------------|----------------|-------|---------------------------------|------------------|
| MEMB.  | MAX. FACTORED<br>FORCE<br>(LBS) | FACTORED<br>VERT. LOAD LC1<br>(PLF) | MAX.<br>CSI (LC) | MAX.<br>UNBRAC | MEMB. | MAX. FACTORED<br>FORCE<br>(LBS) | MAX.<br>CSI (LC) |
| FR-TO  |                                 | FROM<br>TO                          |                  | LENGTH         | FR-TO |                                 |                  |
| A-B    | -848 / 0                        | -91.8                               | -91.8 0.12 (1)   | 6.25           | I-B   | -460 / 0                        | 0.13 (1)         |
| B-K    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | B-H   | 0 / 863                         | 0.16 (1)         |
| K-L    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | H-C   | -770 / 0                        | 0.21 (1)         |
| L-C    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | H-D   | 0 / 854                         | 0.16 (1)         |
| C-M    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | G-D   | -467 / 0                        | 0.13 (1)         |
| M-N    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | A-I   | 0 / 922                         | 0.23 (1)         |
| N-D    | -1194 / 0                       | -91.8                               | -91.8 0.54 (1)   | 4.99           | G-E   | 0 / 931                         | 0.23 (1)         |
| D-E    | -857 / 0                        | -91.8                               | -91.8 0.12 (1)   | 6.25           |       |                                 |                  |
| J-A    | -1186 / 0                       | 0.0                                 | 0.0 0.17 (1)     | 7.30           |       |                                 |                  |
| F-E    | -1186 / 0                       | 0.0                                 | 0.0 0.17 (1)     | 7.28           |       |                                 |                  |
| J-O    | 0 / 0                           | -18.5                               | -18.5 0.05 (4)   | 10.00          |       |                                 |                  |
| O-I    | 0 / 0                           | -18.5                               | -18.5 0.05 (4)   | 10.00          |       |                                 |                  |
| I-P    | 0 / 692                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| P-Q    | 0 / 692                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| Q-H    | 0 / 692                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| H-R    | 0 / 699                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| R-S    | 0 / 699                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| S-G    | 0 / 699                         | -18.5                               | -18.5 0.14 (1)   | 10.00          |       |                                 |                  |
| G-T    | 0 / 0                           | -18.5                               | -18.5 0.05 (4)   | 10.00          |       |                                 |                  |
| T-F    | 0 / 0                           | -18.5                               | -18.5 0.05 (4)   | 10.00          |       |                                 |                  |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1  | MAX. | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|------|------|------|-------|------|-------|------|-------|
| B  | 2-6-11 | -20  | -22  |      | FRONT | VERT | DEAD  |      | C1    |
| B  | 2-6-11 | -102 | -102 |      | FRONT | VERT | SNOW  |      | C1    |
| C  | 7-3-4  | -86  | -86  |      | FRONT | VERT | TOTAL |      | C1    |
| D  | 11-9-6 | -20  | -22  |      | FRONT | VERT | DEAD  |      | C1    |
| D  | 11-9-6 | -102 | -102 |      | FRONT | VERT | SNOW  |      | C1    |
| H  | 7-3-4  | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| K  | 3-3-4  | -99  | -99  |      | FRONT | VERT | TOTAL |      | C1    |
| L  | 5-3-4  | -86  | -86  |      | FRONT | VERT | TOTAL |      | C1    |
| M  | 9-3-4  | -86  | -86  |      | FRONT | VERT | TOTAL |      | C1    |
| N  | 11-3-4 | -109 | -109 |      | FRONT | VERT | TOTAL |      | C1    |
| O  | 1-3-4  | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| P  | 3-3-4  | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| Q  | 5-3-4  | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| R  | 9-3-4  | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| S  | 11-3-4 | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |
| T  | 13-3-4 | -17  | -17  |      | FRONT | VERT | TOTAL |      | C1    |

**DESIGN CRITERIA**

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

**SPECIFIED LOADS:**

|            |    |            |
|------------|----|------------|
| TOP CH.    | LL | = 25.8 PSF |
|            | DL | = 6.0 PSF  |
| BOT CH.    | LL | = 0.0 PSF  |
|            | DL | = 7.4 PSF  |
| TOTAL LOAD |    | = 39.0 PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

\*\*\* NON STANDARD GIRDER \*\*\*

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 085-09, CSA 085-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.48")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.02")  
ALLOWABLE DEFL. (TL) = L/360 (0.48")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.04")

CSI: TC=0.54/1.00 (C-D:1), BC=0.14/1.00 (H-I:1),  
WB=0.23/1.00 (E-G:1), SS=0.50/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE GRIP (DRY) | SHEAR (PSI)  | SECTION (PLI) |
|------------------|--------------|---------------|
| MAX MIN          | MAX MIN      | MAX MIN       |
| MT20             | 618 354 1657 | 788 1987 1658 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (A) (INPUT = 0.90)  
JSI METAL= 0.24 (A) (INPUT = 1.00)


CONTINUED ON PAGE 2



Structural component only  
DWG# T-2006812

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>T61</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 M/Tek Industries, Inc. Tue Apr 26 11:18:56 2020 Page 1  
 ID1v307gsCyJh1IsHbR45BVzjesS-Lic9s1?22NjorGVCaldrSYH3?Q8zxC2918TpnLgzMDGT  
 Scale = 1:51.9

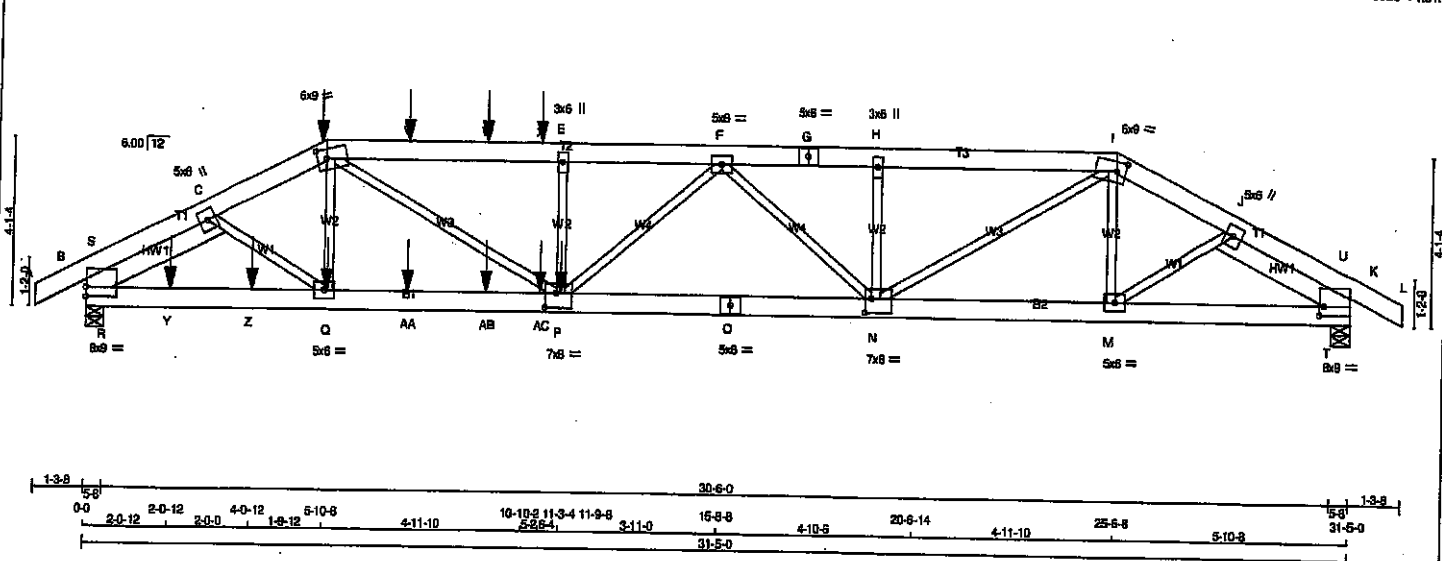

| LUMBER            |      |        |        |
|-------------------|------|--------|--------|
| N. L. G. A. RULES |      |        |        |
| CHORDS            | SIZE | LUMBER | DESCR. |
| A - D             | 2x6  | DRY    | No.2   |
| D - G             | 2x6  | DRY    | No.2   |
| G - I             | 2x6  | DRY    | No.2   |
| I - L             | 2x6  | DRY    | No.2   |
| L - O             | 2x6  | DRY    | No.2   |
| O - K             | 2x6  | DRY    | No.2   |

| REINFORCING MEMBERS   |     |     |      |
|-----------------------|-----|-----|------|
| HW1                   | 2x6 | DRY | No.2 |
| HW2                   | 2x6 | DRY | No.2 |
| ALL WEBS              | 2x3 | DRY | No.2 |
| DRY: SEASONED LUMBER. |     |     |      |

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (#) | LOAD(PLF) |
|------------------------------------------|---------------------|-----------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                     |           |
| A-D                                      | 2                   | 12        |
| D-G                                      | 2                   | 12        |
| G-I                                      | 2                   | 12        |
| I-L                                      | 2                   | 12        |
| L-O                                      | 2                   | 12        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                     |           |
| B-D                                      | 2                   | 12        |
| D-G                                      | 2                   | 12        |
| G-I                                      | 2                   | 12        |
| I-L                                      | 2                   | 12        |
| L-O                                      | 2                   | 12        |
| WEBS : (0.122"x3") SPIRAL NAILS          |                     |           |
| 2x3                                      | 1                   | 8         |
| E-P                                      | 1                   | 4         |
| H-N                                      | 1                   | 4         |
| 2x6                                      | 2                   | 8         |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

# DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED       |                | MAXIMUM FACTORED |                | INPUT |     | REQD  |       |
|----------|------|----------------|----------------|------------------|----------------|-------|-----|-------|-------|
| JT       | VERT | GROSS REACTION | GROSS REACTION | GROSS REACTION   | GROSS REACTION | BRG   | BRG | IN-SX | IN-SX |
| B        | 4103 | 0              | 4103           | 0                | 0              | 5-8   | 5-8 | 5-8   | 5-8   |
| K        | 2995 | 0              | 2995           | 0                | 0              | 5-8   | 5-8 | 5-8   | 5-8   |

| UNFACTORED REACTIONS |          |                               |       |            |       |         |       |
|----------------------|----------|-------------------------------|-------|------------|-------|---------|-------|
|                      | 1ST CASE | MAX./MIN. COMPONENT REACTIONS |       |            |       |         |       |
| JT                   | COMBINED | SNOW                          | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
| B                    | 2893     | 1949 / 0                      | 0 / 0 | 0 / 0      | 0 / 0 | 943 / 0 | 0 / 0 |
| K                    | 2111     | 1425 / 0                      | 0 / 0 | 0 / 0      | 0 / 0 | 686 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, K

BRACING  
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.66 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING  
 TOTAL LOAD CASES: (4)

| CHORDS |                           |                               |               | WEBS  |                           |               |          |
|--------|---------------------------|-------------------------------|---------------|-------|---------------------------|---------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD LC1 (PLF) | MAX. CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |          |
| FR-TO  |                           | FROM TO                       |               | FR-TO |                           |               |          |
| A-B    | 0 / 0                     | -91.8 -91.8                   | 0.03 (1)      | 10.00 | C-Q                       | 0 / 999       | 0.12 (1) |
| B-S    | -4222 / 0                 | -91.8 -91.8                   | 0.12 (1)      | 5.45  | Q-D                       | -300 / 40     | 0.04 (1) |
| S-C    | -2498 / 0                 | -91.8 -91.8                   | 0.11 (1)      | 6.25  | D-P                       | 0 / 4341      | 0.54 (1) |
| C-D    | -8817 / 0                 | -91.8 -91.8                   | 0.12 (1)      | 4.56  | P-E                       | -728 / 0      | 0.09 (1) |
| D-V    | -5518 / 0                 | -91.8 -91.8                   | 0.38 (1)      | 3.66  | N-H                       | -508 / 0      | 0.06 (1) |
| V-W    | -5518 / 0                 | -91.8 -91.8                   | 0.38 (1)      | 3.66  | M-I                       | 0 / 3592      | 0.44 (1) |
| W-X    | -5518 / 0                 | -91.8 -91.8                   | 0.38 (1)      | 3.66  | M-J                       | -207 / 0      | 0.02 (1) |
| X-E    | -5518 / 0                 | -91.8 -91.8                   | 0.38 (1)      | 3.66  | M-J                       | 0 / 622       | 0.08 (1) |
| E-F    | -5518 / 0                 | -91.8 -91.8                   | 0.21 (1)      | 3.82  | P-F                       | 0 / 1458      | 0.18 (1) |
| F-G    | -7206 / 0                 | -91.8 -91.8                   | 0.14 (1)      | 4.40  | F-N                       | -1841 / 0     | 0.44 (1) |
| G-H    | -7206 / 0                 | -91.8 -91.8                   | 0.14 (1)      | 4.40  | R-S                       | 0 / 2245      | 0.00 (1) |
| H-I    | -7206 / 0                 | -91.8 -91.8                   | 0.22 (1)      | 4.33  | R-C                       | -3899 / 0     | 0.23 (1) |
| I-J    | -4638 / 0                 | -91.8 -91.8                   | 0.08 (1)      | 5.30  | J-T                       | -2757 / 0     | 0.16 (1) |
| J-U    | -1793 / 0                 | -91.8 -91.8                   | 0.08 (1)      | 6.25  | T-U                       | 0 / 1574      | 0.00 (1) |
| U-K    | -3028 / 0                 | -91.8 -91.8                   | 0.08 (1)      | 6.23  |                           |               |          |
| K-L    | 0 / 0                     | -91.8 -91.8                   | 0.03 (1)      | 10.00 |                           |               |          |

|       |          |                      |       |
|-------|----------|----------------------|-------|
| B-R   | 0 / 2169 | -18.5 -18.5 0.20 (1) | 10.00 |
| R-Y   | 0 / 5129 | -18.5 -18.5 0.40 (1) | 10.00 |
| Y-Z   | 0 / 5129 | -18.5 -18.5 0.40 (1) | 10.00 |
| Z-Q   | 0 / 5129 | -18.5 -18.5 0.40 (1) | 10.00 |
| Q-AA  | 0 / 5919 | -18.5 -18.5 0.45 (1) | 10.00 |
| AA-AB | 0 / 5919 | -18.5 -18.5 0.45 (1) | 10.00 |
| AB-AC | 0 / 5919 | -18.5 -18.5 0.45 (1) | 10.00 |
| AC-P  | 0 / 5919 | -18.5 -18.5 0.45 (1) | 10.00 |
| P-O   | 0 / 8553 | -18.5 -18.5 0.64 (1) | 10.00 |
| O-N   | 0 / 8553 | -18.5 -18.5 0.64 (1) | 10.00 |
| N-M   | 0 / 4145 | -18.5 -18.5 0.31 (1) | 10.00 |
| M-T   | 0 / 3653 | -18.5 -18.5 0.28 (1) | 10.00 |
| T-K   | 0 / 1560 | -18.5 -18.5 0.14 (1) | 10.00 |

| FACTORED CONCENTRATED LOADS (LBS) |        | FACE  |       | DIR. |      | TYPE |       | HEEL |       | CONN. |       |
|-----------------------------------|--------|-------|-------|------|------|------|-------|------|-------|-------|-------|
| JT                                | LOC.   | LC1   | MAX.  | MAX. | FACE | DIR. | TYPE  | HEEL | CONN. | HEEL  | CONN. |
| D                                 | 5-10-8 | -459  | -459  | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| P                                 | 11-8-8 | -2430 | -2430 | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| Q                                 | 5-11-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| V                                 | 7-11-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| W                                 | 9-11-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| X                                 | 11-3-4 | -110  | -110  | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| Y                                 | 2-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| Z                                 | 4-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| AA                                | 7-11-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |
| AB                                | 9-11-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    | ---   | C1    |

TOTAL WEIGHT = 2 X 189 = 377 LB

DESIGN CRITERIA

SPECIFIED LOADS:  
 TOP CH. LL = 25.8 PSF  
 DL = 6.0 PSF  
 BOT CH. LL = 0.0 PSF  
 DL = 7.4 PSF  
 TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
 - PART 9 OF NBCC 2015, CBC 2012, ABC 2019  
 - PART 9 OF CBC 2012 (2019 AMENDMENT)  
 - CSA 086-09, CSA 086-14  
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.05")  
 CALCULATED VERT. DEFL.(LL) = L/999 (0.18")  
 ALLOWABLE DEFL.(TL) = L/360 (1.05")  
 CALCULATED VERT. DEFL.(TL) = L/999 (0.33")

CSK: TC=0.38/1.50 (D-E-1), BC=0.84/1.00 (M-P-1), WB=0.54/1.00 (D-P-1), SS=0.17/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
 PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
 MAX MIN MAX MIN MAX MIN  
 MT20 618 354 1867 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (1) (INPUT = 0.90)

JSI METAL= 0.83 (0) (INPUT = 1.00)



Structural component only  
 DWG# T-2007750 1/2

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>T61</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 | TRUSS DESC.                          |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:56 2020 Page 2  
ID:Lv307qsCvJh1shbR4r5BVziesS-Lic9s1?2NJorGVCaldtSYH37Q8zxC2918TmLqzMDGT

**PLATES (table is in inches)**

| JT | TYPE      | PLATES | W   | LEN | Y    | X    |
|----|-----------|--------|-----|-----|------|------|
| B  | TMBMW1-I  | MT20   | 8.0 | 9.0 | 2.75 |      |
| C  | TMBWW-H   | MT20   | 5.0 | 8.0 |      |      |
| D  | TTWW-m    | MT20   | 6.0 | 9.0 | 2.75 | 2.75 |
| E  | TMBW-w    | MT20   | 3.0 | 6.0 |      |      |
| F  | TMBWW-I   | MT20   | 5.0 | 6.0 |      |      |
| G  | TS-I      | MT20   | 5.0 | 6.0 |      |      |
| H  | TMBW-w    | MT20   | 3.0 | 6.0 |      |      |
| I  | TTWW-m    | MT20   | 6.0 | 9.0 | 2.75 | 2.75 |
| J  | TMBWW-H   | MT20   | 5.0 | 8.0 |      |      |
| K  | TMBMW1-I  | MT20   | 8.0 | 9.0 | 2.75 | 1.50 |
| M  | BMBW-W-I  | MT20   | 5.0 | 6.0 |      |      |
| N  | BMBWW-W-I | MT20   | 7.0 | 8.0 | 4.25 | 2.00 |
| O  | BS-I      | MT20   | 5.0 | 6.0 |      |      |
| P  | BMBWW-W-I | MT20   | 7.0 | 8.0 | 4.25 | 3.50 |
| Q  | BMBW-W-I  | MT20   | 5.0 | 6.0 |      |      |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|------|------|-------|------|-------|
| AC | 11-3-4 | -28 | -28  |      | BACK | VERT | TOTAL |      | C1    |

**CONNECTION REQUIREMENTS**

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only  
DWG# T-2007750 *4/2*

|             |            |          |     |                  |          |
|-------------|------------|----------|-----|------------------|----------|
| JOB NAME    | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408265      | T62        | 1        | 1   | GREEN PARK HOMES |          |
| TRUSS DESC. |            |          |     |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2018 Mitek Industries, Inc. Tue Apr 28 11:18:57 2020 Page 1  
ID: 1v307gsCyJh1stHbR4r5BVziesS-puAX3N0p8awhufmmRKNh4U68RYK9xOBAN7YKu6zMDGS  
Scale = 1:51.9

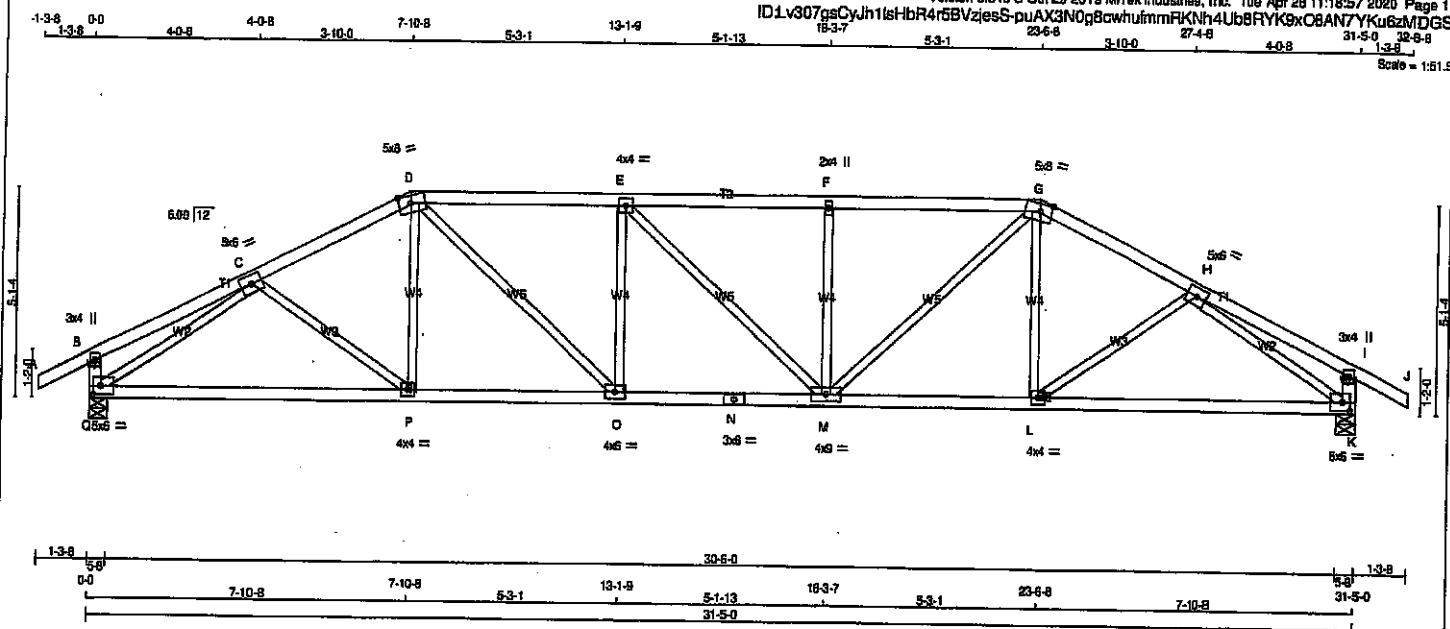

| LUMBER                |        |      |        |
|-----------------------|--------|------|--------|
| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER |
| A - D                 | 2x4    | DRY  | No.2   |
| D - G                 | 2x4    | DRY  | No.2   |
| G - J                 | 2x4    | DRY  | No.2   |
| O - B                 | 2x4    | DRY  | No.2   |
| K - I                 | 2x4    | DRY  | No.2   |
| O - N                 | 2x4    | DRY  | No.2   |
| N - K                 | 2x4    | DRY  | No.2   |
| ALL WEBS              | 2x3    | DRY  | No.2   |
| EXCEPT                |        |      |        |
| DRY: SEASONED LUMBER. |        |      |        |

| PLATES (table is in inches) |        |     |     |           |
|-----------------------------|--------|-----|-----|-----------|
| JT TYPE                     | PLATES | W   | LEN | Y X       |
| B TMV-p                     | MT20   | 3.0 | 4.0 |           |
| C TMVW-v                    | MT20   | 5.0 | 6.0 |           |
| D TMVW-v                    | MT20   | 5.0 | 8.0 | 2.25 3.50 |
| E TMVW-v                    | MT20   | 4.0 | 4.0 |           |
| F TMVW-v                    | MT20   | 2.0 | 4.0 |           |
| G TMVW-v                    | MT20   | 5.0 | 8.0 | 2.25 3.50 |
| H TMVW-v                    | MT20   | 5.0 | 6.0 |           |
| I TMV-p                     | MT20   | 3.0 | 4.0 |           |
| K BMVW-v                    | MT20   | 5.0 | 6.0 | 2.50 2.25 |
| L BMVW-v                    | MT20   | 4.0 | 4.0 |           |
| M BMVW-v                    | MT20   | 4.0 | 6.0 |           |
| N BS-v                      | MT20   | 3.0 | 6.0 |           |
| O BMVW-v                    | MT20   | 4.0 | 6.0 |           |
| P BMVW-v                    | MT20   | 4.0 | 4.0 |           |
| Q BMVW-v                    | MT20   | 5.0 | 6.0 | 2.50 2.25 |

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                | FACTORED | MAXIMUM FACTORED | INPUT | REQD |
|----------|----------------|----------|------------------|-------|------|
| JT       | GROSS REACTION | DOWN     | DOWN             | BRG   | BRG  |
| Q        | 1856           | 0        | 1856             | 0     | 5-8  |
| K        | 1856           | 0        | 1856             | 0     | 5-8  |

| UNFACTORED REACTIONS |          | 1ST CASE | MAX MIN. COMPONENT REACTIONS |            |      |       |      |  |
|----------------------|----------|----------|------------------------------|------------|------|-------|------|--|
| JT                   | COMBINED | SNOW     | LIVE                         | PERM. LIVE | WIND | DEAD  | SOIL |  |
| Q                    | 1310     | 873/0    | 0/0                          | 0/0        | 0/0  | 437/0 | 0/0  |  |
| K                    | 1310     | 873/0    | 0/0                          | 0/0        | 0/0  | 437/0 | 0/0  |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, K

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.70 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |               | WEBS  |               |
|--------|---------------|-------|---------------|
| MEMB.  | MAX. FACTORED | MEMB. | MAX. FACTORED |
| FR-TO  | FORCE (LBS)   | FR-TO | FORCE (LBS)   |
| A-B    | 0/28          | C-P   | 0/72          |
| B-C    | 0/16          | P-D   | 0/134         |
| C-D    | -2417/0       | D-O   | 0/887         |
| D-E    | -2803/0       | O-E   | -517/0        |
| E-F    | -2802/0       | E-M   | -2/0          |
| F-G    | -2802/0       | M-G   | 0/885         |
| G-H    | -2417/0       | H-G   | 0/135         |
| H-I    | 0/16          | I-H   | 0/72          |
| I-J    | 0/28          | L-H   | 0/135         |
| Q-B    | -270/0        | Q-C   | -2616/0       |
| K-I    | -270/0        | H-K   | -2616/0       |
| Q-P    | 0/2126        |       |               |
| P-O    | 0/2149        |       |               |
| O-N    | 0/2803        |       |               |
| N-M    | 0/2803        |       |               |
| M-L    | 0/2149        |       |               |
| L-K    | 0/2126        |       |               |

#### DESIGN CRITERIA

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
BOT CH. LL = 8.0 PSF  
DL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-08, CSA 086-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.05")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")  
ALLOWABLE DEFL.(TL) = L/360 (1.05")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.29")

CSI: TC=0.48/1.00 (D-E:1), BC=0.51/1.00 (M-O:1), WB=1.00/1.00 (H-K:1), SS=0.22/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION  
(PSB) (PLJ) (PLJ)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 788 1987 1666

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (K) (INPUT = 0.90)  
JSI METAL= 0.91 (N) (INPUT = 1.00)



Structural component only  
DWG# T-2007751


|                                 |                          |                                                                                   |                 |                                                                       |          |
|---------------------------------|--------------------------|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>T63</b> | QUANTITY<br><b>1</b>                                                              | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b>                                  | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          | Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Tue Apr 28 11:18:58 2020 Page 1 |                 | ID:Lv307gsCyJh1sHbR4r5BVzjesS-15kvH1Jw2YVpLy_2uwl8JHyngx1KonluQYzMDGR |          |
|                                 |                          | 31-5-0 32-8-8 1-3-8                                                               |                 | Scale = 1:31.8                                                        |          |

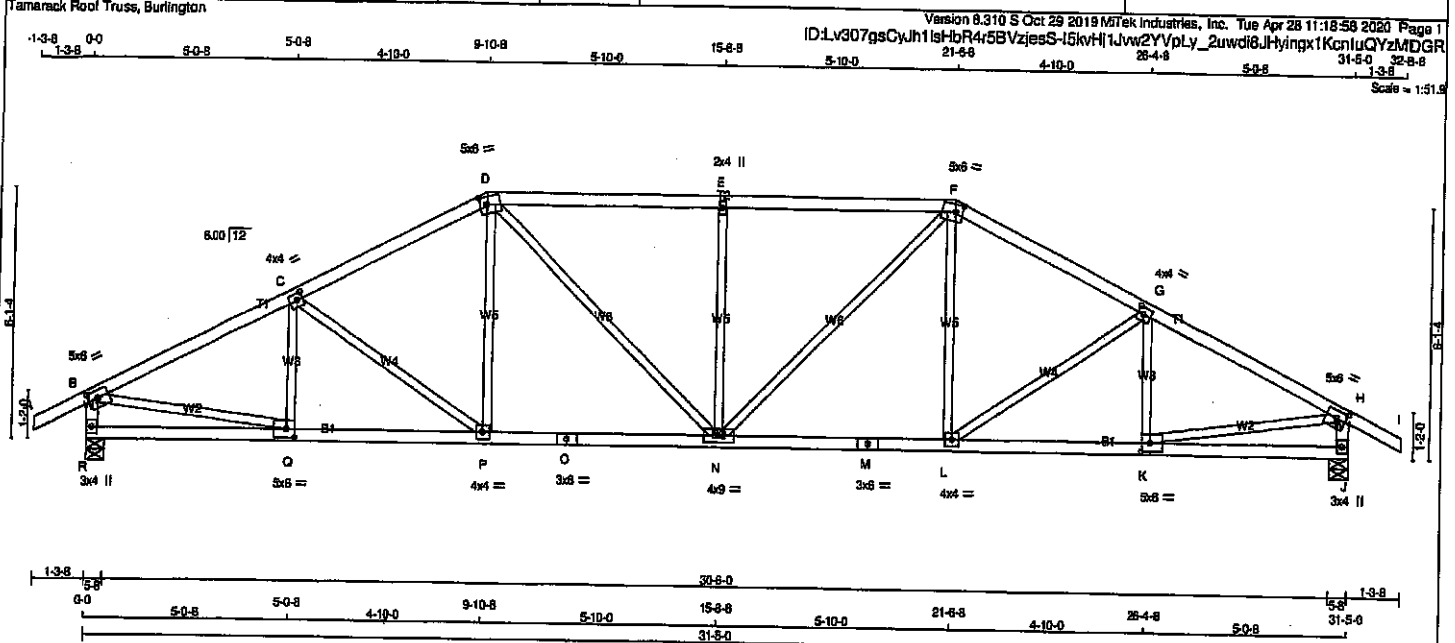

|                           |                           |                      |                 |                                      |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T64A</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| TRUSS DESC.               |                           |                      |                 |                                      |          |

Tamworth Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:59 2020 Page 1  
ID:LV307gsCylh1sHbR4r5BVz88S-mHlIU22xgEAP7y9YIP9AugUIM1APKKTqR1Ry?zMDGO

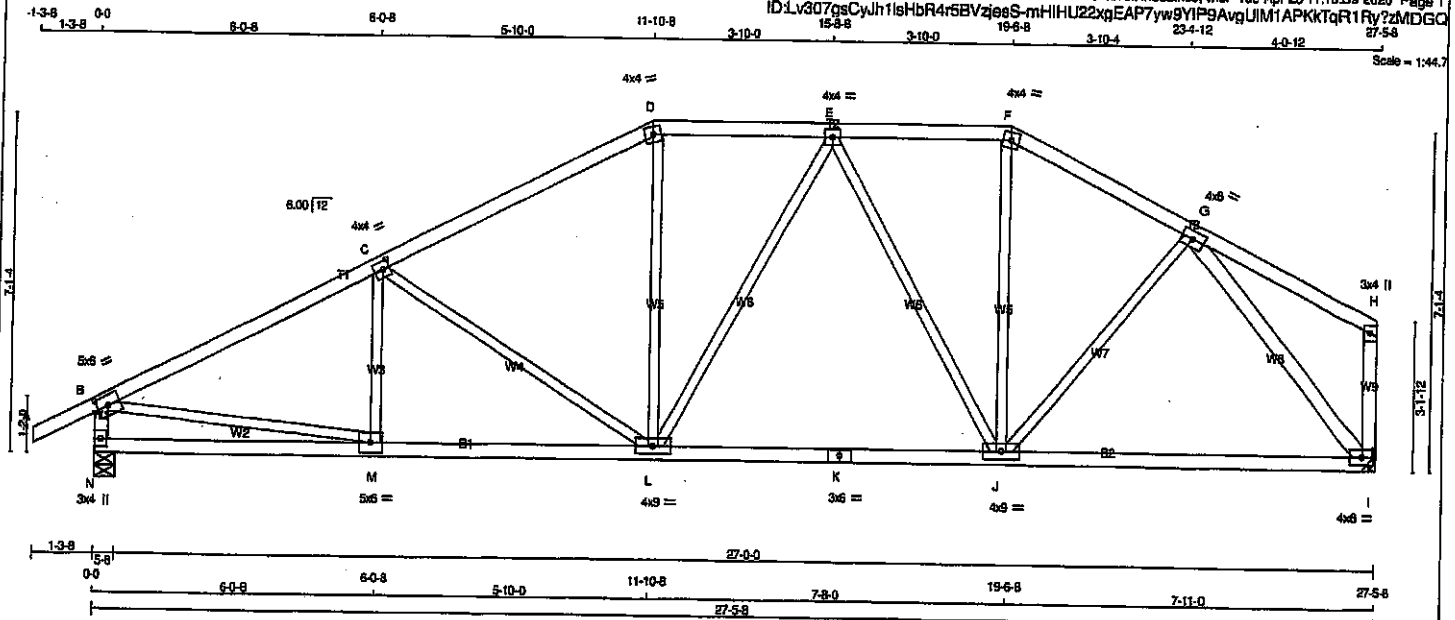

| LUMBER            |        |      |        |
|-------------------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
| A - D             | 2x4    | DRY  | No.2   |
| D - F             | 2x4    | DRY  | No.2   |
| F - H             | 2x4    | DRY  | No.2   |
| H - I             | 2x4    | DRY  | No.2   |
| I - K             | 2x4    | DRY  | No.2   |
| K - L             | 2x4    | DRY  | No.2   |
| L - M             | 2x3    | DRY  | No.2   |
| M - N             | 2x4    | DRY  | No.2   |
| N - O             | 2x4    | DRY  | No.2   |
| O - P             | 2x4    | DRY  | No.2   |
| P - Q             | 2x4    | DRY  | No.2   |
| Q - R             | 2x4    | DRY  | No.2   |
| R - S             | 2x4    | DRY  | No.2   |
| S - T             | 2x4    | DRY  | No.2   |
| T - U             | 2x4    | DRY  | No.2   |
| U - V             | 2x4    | DRY  | No.2   |
| V - W             | 2x4    | DRY  | No.2   |
| W - X             | 2x4    | DRY  | No.2   |
| X - Y             | 2x4    | DRY  | No.2   |
| Y - Z             | 2x4    | DRY  | No.2   |
| Z - A             | 2x4    | DRY  | No.2   |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |         |        |     |     |           |
|-----------------------------|---------|--------|-----|-----|-----------|
| JT                          | TYPE    | PLATES | W   | LEN | Y X       |
| B                           | TMVW-1  | MT20   | 5.0 | 6.0 | 2.50 2.75 |
| C                           | TMVW-1  | MT20   | 4.0 | 4.0 | 2.00 1.75 |
| D                           | TTW-m   | MT20   | 4.0 | 4.0 |           |
| E                           | TMVW-1  | MT20   | 4.0 | 4.0 |           |
| F                           | TTW-m   | MT20   | 4.0 | 4.0 |           |
| G                           | TMVW-1  | MT20   | 4.0 | 6.0 |           |
| H                           | TMV-p   | MT20   | 3.0 | 4.0 |           |
| I                           | BMVW1-1 | MT20   | 4.0 | 6.0 |           |
| J                           | BMVW1-1 | MT20   | 4.0 | 9.0 |           |
| K                           | BS-1    | MT20   | 3.0 | 6.0 |           |
| L                           | BMVW1-1 | MT20   | 4.0 | 9.0 |           |
| M                           | BMVW1-1 | MT20   | 5.0 | 6.0 |           |
| N                           | BMV1-p  | MT20   | 3.0 | 4.0 |           |

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                         |                                 |                |
|----------|-------------------------|---------------------------------|----------------|
| JT       | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT REQD BRG |
| N        | 1838                    | 0                               | 5-8            |
| I        | 1514                    | 0                               | 5-8            |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3'-8".

UNFACTORED REACTIONS

| JT | 1ST CASE | MAX MIN. COMPONENT REACTIONS | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|----------|------------------------------|------------|-------|---------|-------|
| N  | 1156     | 772 / 0                      | 0 / 0      | 0 / 0 | 384 / 0 | 0 / 0 |
| I  | 1070     | 703 / 0                      | 0 / 0      | 0 / 0 | 368 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.13 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                           |
|--------|---------------------------|---------------------------|---------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) |
| A-B    | 0 / 28                    | -91.8                     | 10.00                     |
| B-C    | -2151 / 0                 | -91.8                     | 4.13                      |
| C-D    | -1710 / 0                 | -91.8                     | 4.58                      |
| D-E    | -1509 / 0                 | -91.8                     | 5.16                      |
| E-F    | -1278 / 0                 | -91.8                     | 5.51                      |
| F-G    | -1443 / 0                 | -91.8                     | 5.24                      |
| G-H    | 0 / 19                    | -91.8                     | 10.00                     |
| H-I    | -1590 / 0                 | 0.0                       | 6.55                      |
| I-H    | -140 / 0                  | 0.0                       | 7.81                      |
| N-M    | 0 / 0                     | -18.5                     | 10.00                     |
| M-L    | 0 / 1949                  | -18.5                     | 10.00                     |
| L-K    | 0 / 1510                  | -18.5                     | 10.00                     |
| K-J    | 0 / 1510                  | -18.5                     | 10.00                     |
| J-I    | 0 / 1091                  | -18.5                     | 10.00                     |

TOTAL WEIGHT = 119 lb

DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 38.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN PLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(85 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.92")  
CALCULATED VERT. DEFL.(LL) = L/898 (0.07")  
ALLOWABLE DEFL.(TL) = L/360 (0.92")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.14")

CSI: TC=0.51/1.00 (B-C:1), SC=0.41/1.00 (J-L:4),  
WB=0.80/1.00 (G-I:1), SS=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

| NAIL VALUES |           |             |               |
|-------------|-----------|-------------|---------------|
| PLATE       | GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) |
| MT20        | 618       | 354         | 1667          |


PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.87 (M) (INPUT = 0.90)  
JSI METAL = 0.58 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2007753

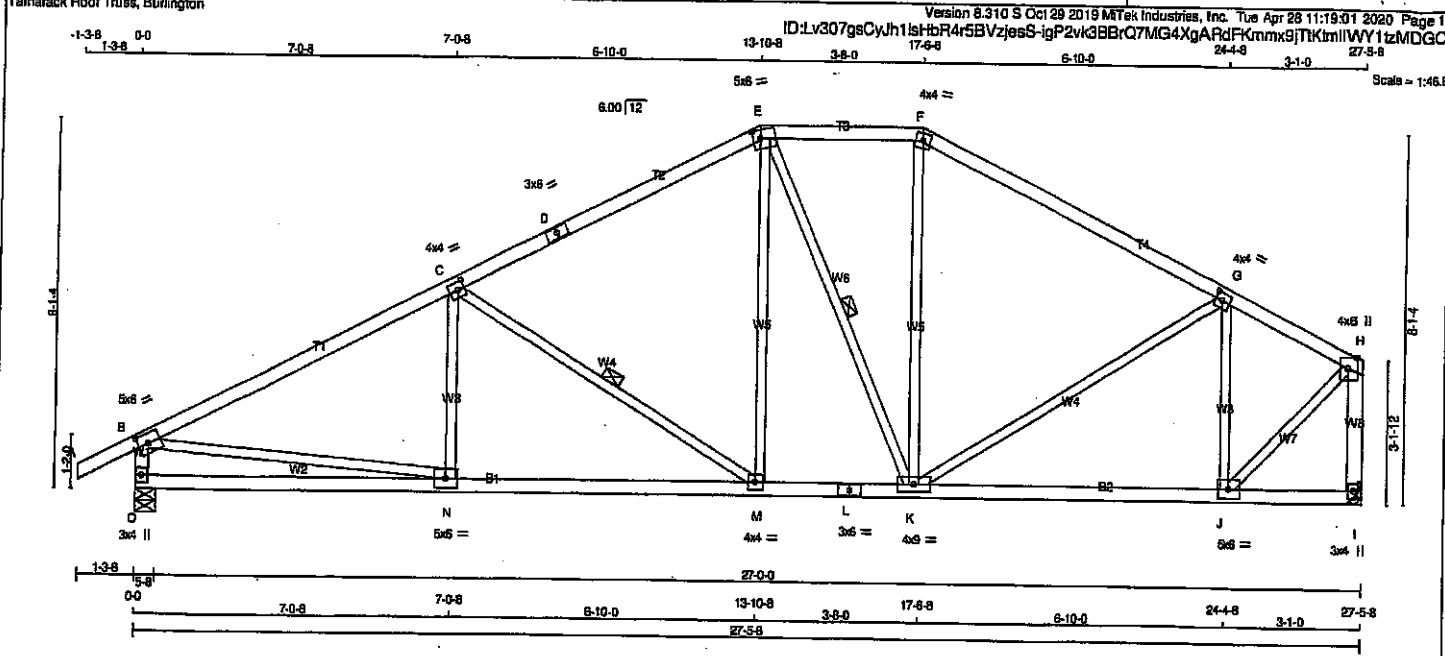

**LUMBER**

N. L. G. A. RULES

| CHORDS   | SIZE | DRY | LUMBER | DESCR. |
|----------|------|-----|--------|--------|
| A - D    | 2x4  | DRY | No.2   | SPF    |
| D - F    | 2x4  | DRY | No.2   | SPF    |
| F - H    | 2x4  | DRY | No.2   | SPF    |
| H - J    | 2x4  | DRY | No.2   | SPF    |
| J - L    | 2x4  | DRY | No.2   | SPF    |
| L - N    | 2x4  | DRY | No.2   | SPF    |
| N - I    | 2x4  | DRY | No.2   | SPF    |
| ALL WEBS | 2x3  | DRY | No.2   | SPF    |

EXCEPT

DRY: SEASONED LUMBER.

**PLATES** (Table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 5.0 | 8.0 | 2.50 | 2.75 |
| C  | TMVW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| D  | TS-t   | MT20   | 3.0 | 6.0 |      |      |
| E  | TTW-w  | MT20   | 5.0 | 8.0 | 2.25 | 2.00 |
| F  | TTW-w  | MT20   | 4.0 | 4.0 |      |      |
| G  | TMVW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| H  | TMVW-w | MT20   | 4.0 | 6.0 | Edge |      |
| I  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |
| J  | BMVW-t | MT20   | 5.0 | 8.0 |      |      |
| K  | BMVW-w | MT20   | 4.0 | 9.0 |      |      |
| L  | BS-t   | MT20   | 3.0 | 6.0 |      |      |
| M  | BMVW-t | MT20   | 4.0 | 4.0 |      |      |
| N  | BMVW-t | MT20   | 5.0 | 8.0 |      |      |
| O  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | DOWN                            | IN-SX     | IN-SX    |
| O  | 1838                    | 0                               | 1638      | 0        |
| I  | 1514                    | 0                               | 1514      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3-8.

**UNFACTORED REACTIONS**

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS |
|----------|-------------------------------|
| JT       | COMBINED                      |
| O        | 1158                          |
| I        | 1070                          |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.82 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-M, E-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**

TOTAL LOAD CASES: (4)

| MEMB. |         | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) |       | MAX. CSI (LC) | MAX. UNBRAC LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |
|-------|---------|---------------------------|---------------------------|-------|---------------|--------------------|-------|---------------------------|---------------|
| FR-TO |         |                           | FROM                      | TO    |               |                    | FR-TO |                           |               |
| A-B   | 0/28    |                           | -91.8                     | -91.8 | 0.12 (1)      | 10.00              | N-C   | -91/89                    | 0.03 (4)      |
| B-C   | -2147/0 |                           | -91.8                     | -91.8 | 0.72 (1)      | 3.82               | C-M   | -734/0                    | 0.34 (1)      |
| C-D   | -1523/0 |                           | -91.8                     | -91.8 | 0.83 (1)      | 4.50               | M-E   | 0/476                     | 0.11 (1)      |
| D-E   | -1523/0 |                           | -91.8                     | -91.8 | 0.83 (1)      | 4.50               | E-K   | -234/0                    | 0.12 (1)      |
| E-F   | -1238/0 |                           | -91.8                     | -91.8 | 0.17 (1)      | 5.58               | K-F   | 0/198                     | 0.05 (4)      |
| F-G   | -1409/0 |                           | -91.8                     | -91.8 | 0.56 (1)      | 4.79               | G-G   | 0/223                     | 0.05 (1)      |
| G-H   | -1115/0 |                           | -91.8                     | -91.8 | 0.42 (1)      | 5.43               | J-G   | -854/0                    | 0.28 (1)      |
| H-I   | -1585/0 |                           | 0.0                       | 0.0   | 0.16 (1)      | 6.58               | N-N   | 0/1985                    | 0.44 (1)      |
| I-H   | -1503/0 |                           | 0.0                       | 0.0   | 0.26 (1)      | 6.70               | J-H   | 0/1424                    | 0.32 (1)      |
|       |         |                           |                           |       |               |                    |       |                           |               |
| O-N   | 0/0     |                           | -18.5                     | -18.5 | 0.23 (4)      | 10.00              |       |                           |               |
| N-M   | 0/1951  |                           | -18.5                     | -18.5 | 0.42 (1)      | 10.00              |       |                           |               |
| M-L   | 0/1337  |                           | -18.5                     | -18.5 | 0.29 (1)      | 10.00              |       |                           |               |
| L-K   | 0/1337  |                           | -18.5                     | -18.5 | 0.29 (1)      | 10.00              |       |                           |               |
| K-J   | 0/1048  |                           | -18.5                     | -18.5 | 0.25 (1)      | 10.00              |       |                           |               |
| J-I   | 0/0     |                           | -18.5                     | -18.5 | 0.14 (4)      | 10.00              |       |                           |               |

TOTAL WEIGHT = 119 lb (M/F)

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
TOP CH. LL = 25.8 PSF  
DL = 8.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.92")  
CALCULATED VERT. DEFL.(LL) = L/899 (0.08")  
ALLOWABLE DEFL.(TL) = L/360 (0.92")  
CALCULATED VERT. DEFL.(TL) = L/899 (0.17")

CSI: TC=0.72/1.00 (B-C:1), BC=0.42/1.00 (M-N:1),

WB=0.44/1.00 (B-N:1), SSI=0.28/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PL) (PL)  
MAX MIN MAX MIN  
MT20 618 354 1667 799 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (H) (INPUT = 0.90)

JSI METAL = 0.59 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007754

|                           |                           |                      |                 |                                      |             |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T66A</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:02 2020 Page 1  
ID1.v307gsCyJh1sHbR4r5BVzjesS-AszC644py9Y\_QikDtyynYI\_gZ37ciMvWPG5ZJzMDGN

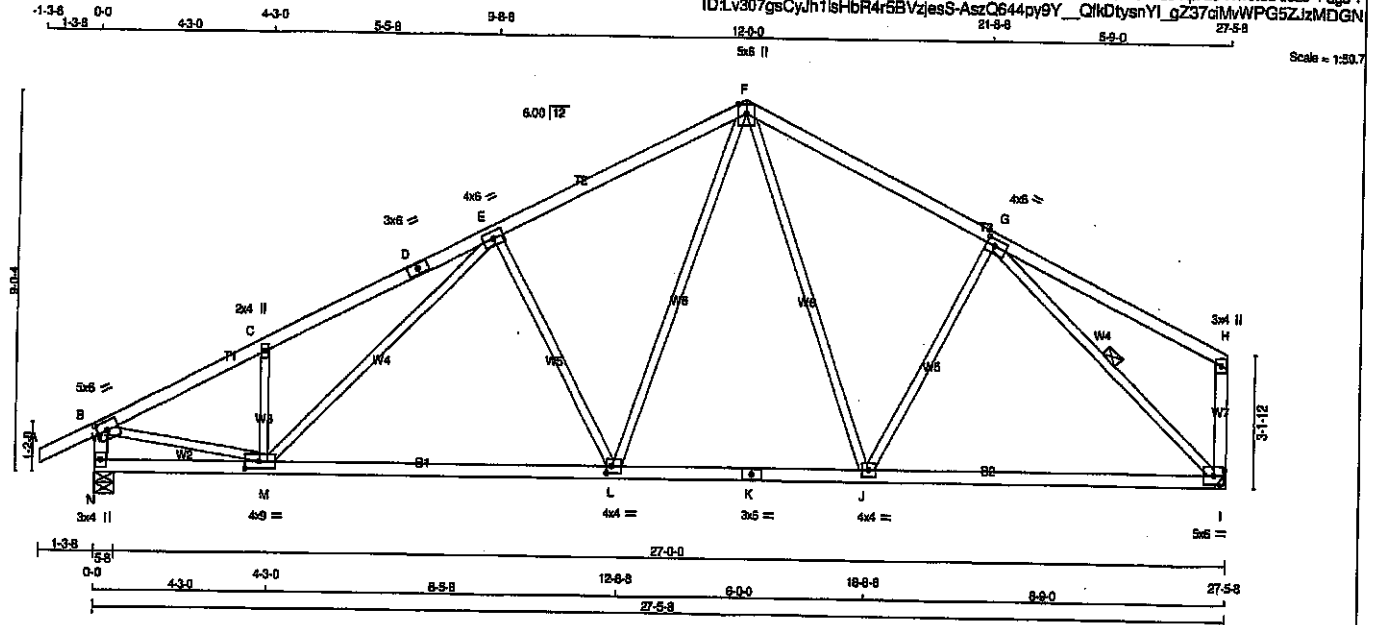

Scale = 1:50.7

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER | DESCR. |
|--------|------|-----|--------|--------|
| A - D  | 2x4  | DRY | No.2   | SPF    |
| D - F  | 2x4  | DRY | No.2   | SPF    |
| F - H  | 2x4  | DRY | No.2   | SPF    |
| N - B  | 2x4  | DRY | No.2   | SPF    |
| I - H  | 2x4  | DRY | No.2   | SPF    |
| N - K  | 2x4  | DRY | No.2   | SPF    |
| K - I  | 2x4  | DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY  
DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-1 | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |
| C  | TMVW-1 | MT20   | 2.0 | 4.0 |      |      |
| D  | TS-1   | MT20   | 3.0 | 6.0 |      |      |
| E  | TMVW-1 | MT20   | 4.0 | 6.0 |      |      |
| F  | TTVW-1 | MT20   | 5.0 | 6.0 | Edge |      |
| G  | TMVW-1 | MT20   | 4.0 | 6.0 | 2.00 | 2.50 |
| H  | TMVW-1 | MT20   | 3.0 | 4.0 |      |      |
| I  | BMVW-1 | MT20   | 5.0 | 6.0 |      |      |
| J  | BMVW-1 | MT20   | 4.0 | 4.0 |      |      |
| K  | BS-1   | MT20   | 3.0 | 6.0 |      |      |
| L  | BMVW-1 | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| M  | BMVW-1 | MT20   | 4.0 | 4.0 | 2.00 | 4.25 |
| N  | BMV1-1 | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED       | MAXIMUM FACTORED | INPUT | REQD   |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
|    | VERT           | DOWN             | HORIZ | UPLIFT |
| N  | 1838           | 0                | 1838  | 0      |
| I  | 1514           | 0                | 1514  | 0      |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3'-8".

##### UNFACTORED REACTIONS

##### 1ST CASE MAX./MIN. COMPONENT REACTIONS

| JT | COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|----------|---------|-------|-----------|-------|---------|-------|
| N  | 1156     | 772 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 384 / 0 | 0 / 0 |
| I  | 1070     | 703 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 368 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF G-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                          | WEBS  |                           |                          |  |
|--------|---------------------------|---------------------------|--------------------------|-------|---------------------------|--------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. FACTORED (PLF) (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED (PLF) (LC) |  |
| FR-TO  |                           |                           |                          | FR-TO |                           |                          |  |
| A-B    | 0 / 28                    | -91.8                     | -91.8 0.12 (1)           | L-F   | 0 / 739                   | 0.17 (1)                 |  |
| B-C    | -2117 / 0                 | -91.8                     | -91.8 0.23 (1)           | F-J   | 0 / 201                   | 0.05 (1)                 |  |
| C-D    | -2098 / 0                 | -91.8                     | -91.8 0.44 (1)           | J-G   | -39 / 72                  | 0.03 (1)                 |  |
| D-E    | -2095 / 0                 | -91.8                     | -91.8 0.44 (1)           | E-L   | -643 / 0                  | 0.48 (1)                 |  |
| E-F    | -1805 / 0                 | -91.8                     | -91.8 0.45 (1)           | G-I   | -1773 / 0                 | 0.75 (1)                 |  |
| F-G    | -1410 / 0                 | -91.8                     | -91.8 0.45 (1)           | M-E   | 0 / 251                   | 0.06 (1)                 |  |
| G-H    | 0 / 30                    | -91.8                     | -91.8 0.53 (1)           | M-C   | -437 / 0                  | 0.08 (1)                 |  |
| H-I    | -1616 / 0                 | 0.0                       | 0.0 0.16 (1)             | B-M   | 0 / 1948                  | 0.44 (1)                 |  |
| I-H    | -193 / 0                  | 0.0                       | 0.0 0.03 (1)             |       |                           |                          |  |
| N-M    | 0 / 0                     | -18.5                     | -18.5 0.21 (4)           |       |                           |                          |  |
| M-L    | 0 / 1715                  | -18.5                     | -18.5 0.40 (1)           |       |                           |                          |  |
| L-K    | 0 / 1169                  | -18.5                     | -18.5 0.38 (4)           |       |                           |                          |  |
| K-J    | 0 / 1169                  | -18.5                     | -18.5 0.38 (4)           |       |                           |                          |  |
| J-I    | 0 / 1254                  | -18.5                     | -18.5 0.38 (4)           |       |                           |                          |  |

TOTAL WEIGHT = 2 X 114 = 229 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

##### SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPC 2011, TPC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = 1/380 (0.92")  
CALCULATED VERT. DEFL.(LL) = 1/899 (0.07")  
ALLOWABLE DEFL.(TL) = 1/380 (0.92")  
CALCULATED VERT. DEFL.(TL) = 1/899 (0.22")

CSI: TC=0.53/1.00 (G-H:1), BC=0.40/1.00 (L-M:1),  
WB=0.75/1.00 (G-I:1), SS=0.24/1.00 (FG:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PS)  | (PL)      | (PL)  | (PL)    |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 618       | 354   | 1657    |
|       | 788       | 1957  | 1655    |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.89 (M) (INPUT = 0.90)  
JSI METAL= 0.58 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2007755


|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T67</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| TRUSS DESC.               |                          |                      |                 |                                      |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 11:19:04 2020 Page 1

ID:lv307gsCyJh19HbR4r5BvzjesS-6E5AXn64UmoIDkp6LI7KtzOMeNjM4tG\_jICdCZMDGL

Scale = 1:50.9

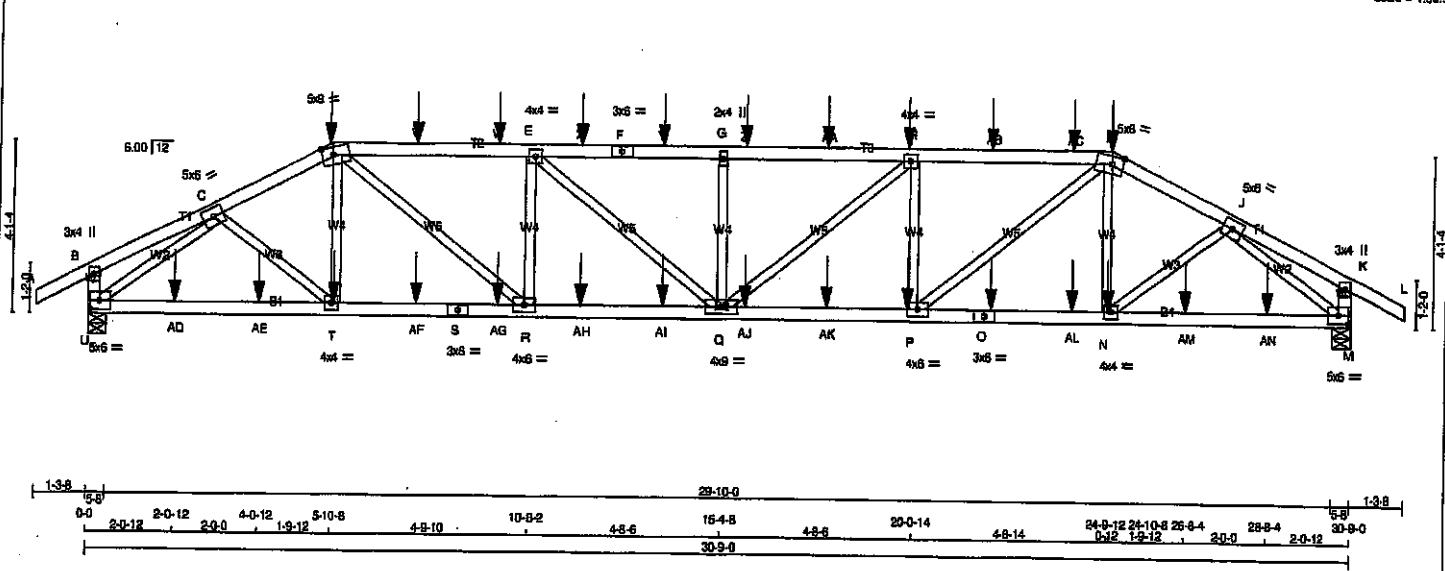

| LUMBER            |      |     |      |
|-------------------|------|-----|------|
| N. L. G. A. RULES | SIZE | DRY | NO.2 |
| CHORDS            | 2x4  | DRY | No.2 |
| A - D             | 2x4  | DRY | No.2 |
| D - F             | 2x4  | DRY | No.2 |
| F - I             | 2x4  | DRY | No.2 |
| I - L             | 2x4  | DRY | No.2 |
| U - B             | 2x4  | DRY | No.2 |
| M - K             | 2x4  | DRY | No.2 |
| U - S             | 2x4  | DRY | No.2 |
| S - O             | 2x4  | DRY | No.2 |
| O - M             | 2x4  | DRY | No.2 |
| ALL WEBS          | 2x3  | DRY | No.2 |
| EXCEPT            |      |     |      |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)  |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| A-D                                      | 12                   | SIDE (61.0) |
| D-F                                      | 12                   | SIDE (61.0) |
| F-I                                      | 12                   | SIDE (61.0) |
| I-L                                      | 12                   | SIDE (61.0) |
| U-B                                      | 12                   | TOP         |
| M-K                                      | 12                   | TOP         |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| U-S                                      | 12                   | SIDE (61.0) |
| S-O                                      | 12                   | SIDE (61.0) |
| O-M                                      | 12                   | SIDE (61.0) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| 2x3                                      | 6                    |             |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PILES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED       |      | MAXIMUM FACTORED |      | INPUT |       | RECORD |       |
|----------|------|----------------|------|------------------|------|-------|-------|--------|-------|
| JT       | VERT | GROSS REACTION | HORZ | GROSS REACTION   | DOWN | BRG   | IN-SX | BRG    | IN-SX |
| U        | 2951 | 0              | 2951 | 0                | 0    | 5-8   | 5-8   | 5-8    | 5-8   |
| M        | 2999 | 0              | 2999 | 0                | 0    | 5-8   | 5-8   | 5-8    | 5-8   |

| UNFACTORED REACTIONS |          | MAX./MIN. COMPONENT REACTIONS |       |
|----------------------|----------|-------------------------------|-------|
| JT                   | COMBINED | SNOW                          | LIVE  |
| U                    | 2086     | 1375 / 0                      | 0 / 0 |
| M                    | 2119     | 1387 / 0                      | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.61 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

| LOADING |                           | TOTAL LOAD CASES: (4) |                           |
|---------|---------------------------|-----------------------|---------------------------|
| CHORDS  |                           | WEBS                  |                           |
| MEMB.   | MAX. FACTORED FORCE (LBS) | MEMB.                 | MAX. FACTORED FORCE (LBS) |
| FR-TO   |                           | PR-TO                 |                           |
| A-B     | 0 / 28                    | C-T                   | 0 / 681                   |
| B-C     | 0 / 5                     | D-R                   | -205 / 60                 |
| C-D     | -4322 / 0                 | E-S                   | 0 / 2127                  |
| D-V     | -5519 / 0                 | F-T                   | -1188 / 0                 |
| V-W     | -5518 / 0                 | G-Q                   | 0 / 653                   |
| W-E     | -5518 / 0                 | Q-G                   | -635 / 0                  |
| E-X     | -6025 / 0                 | H-H                   | 0 / 596                   |
| X-F     | -6025 / 0                 | I-I                   | -1162 / 0                 |
| F-Y     | -6025 / 0                 | J-J                   | 0 / 2069                  |
| Y-G     | -6025 / 0                 | K-K                   | -203 / 71                 |
| G-Z     | -6025 / 0                 | L-L                   | 0 / 679                   |
| Z-AA    | -6025 / 0                 | U-C                   | -4248 / 0                 |
| AA-H    | -6025 / 0                 | J-M                   | -4325 / 0                 |
| H-AB    | -5563 / 0                 |                       |                           |
| AB-AC   | -5563 / 0                 |                       |                           |
| AC-I    | -5563 / 0                 |                       |                           |
| I-J     | -4404 / 0                 |                       |                           |
| J-K     | 0 / 5                     |                       |                           |
| K-L     | 0 / 28                    |                       |                           |
| L-B     | -249 / 0                  |                       |                           |
| M-K     | -249 / 0                  |                       |                           |
| U-AD    | 0 / 3332                  |                       |                           |
| AD-AE   | 0 / 3332                  |                       |                           |
| AE-T    | 0 / 3332                  |                       |                           |
| T-AF    | 0 / 3851                  |                       |                           |
| AF-S    | 0 / 3851                  |                       |                           |
| S-AG    | 0 / 3851                  |                       |                           |
| AG-R    | 0 / 3851                  |                       |                           |
| R-AH    | 0 / 5518                  |                       |                           |
| AH-AI   | 0 / 5518                  |                       |                           |
| AI-Q    | 0 / 5518                  |                       |                           |
| Q-AJ    | 0 / 5563                  |                       |                           |
| AJ-AK   | 0 / 5563                  |                       |                           |
| AK-P    | 0 / 5563                  |                       |                           |
| P-O     | 0 / 3925                  |                       |                           |
| O-AL    | 0 / 3925                  |                       |                           |
| AL-N    | 0 / 3925                  |                       |                           |
| N-AM    | 0 / 3392                  |                       |                           |
| AM-AN   | 0 / 3392                  |                       |                           |
| AN-M    | 0 / 3392                  |                       |                           |

### DESIGN CRITERIA

**SPECIFIED LOADS:**  
TOP CH. LL = 25.8 PSF  
BOT CH. DL = 6.0 PSF  
LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ASB 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.03")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.16")  
ALLOWABLE DEFL.(TL) = L/360 (1.03")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.30")

CSI: TO=0.43/1.00 (E-Q), 6C=0.54/1.00 (P-Q-1), WB=0.56/1.00 (J-M-1), SSI=0.18/1.00 (D-E-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00

COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1857 788 1857 1686

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (D) (INPUT = 0.90)

JSI METAL= 0.61 (S) (INPUT = 1.00)



Structural component only  
DWG# T-2007756 1/2

|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408265   | T67        | 1        | 2   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 11:19:04 2020 Page 2  
ID: L307csCwJh1IsHbR4r5BVziesS-6E5AXm84UmoIDko8L17KizOMeNiM4fc ICdCzMDGL

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMV-p   | MT20   | 3.0 | 4.0 |      |      |
| C  | TMWW-t  | MT20   | 5.0 | 6.0 |      |      |
| D  | TTWW-m  | MT20   | 5.0 | 8.0 | 2.25 | 3.25 |
| E  | TMWW-l  | MT20   | 4.0 | 4.0 |      |      |
| F  | TS-l    | MT20   | 3.0 | 6.0 |      |      |
| G  | TMW-w   | MT20   | 2.0 | 4.0 |      |      |
| H  | TMWW-t  | MT20   | 4.0 | 4.0 |      |      |
| I  | TTWW-m  | MT20   | 5.0 | 8.0 | 2.25 | 3.25 |
| J  | TMWW-l  | MT20   | 5.0 | 6.0 |      |      |
| K  | TMV-p   | MT20   | 3.0 | 4.0 |      |      |
| M  | BMVW1-t | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |
| N  | BMWW-t  | MT20   | 4.0 | 4.0 |      |      |
| O  | BS-l    | MT20   | 3.0 | 6.0 |      |      |
| P  | BMWW-t  | MT20   | 4.0 | 6.0 |      |      |
| Q  | BMWWW-t | MT20   | 4.0 | 9.0 |      |      |
| R  | BMWW-t  | MT20   | 4.0 | 6.0 |      |      |
| S  | BS-l    | MT20   | 3.0 | 6.0 |      |      |
| T  | BMWW-t  | MT20   | 4.0 | 4.0 |      |      |
| U  | BMVW1-t | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.    | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|---------|------|------|------|-------|------|-------|------|-------|
| D  | 5-10-8  | -459 | -459 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| H  | 19-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| I  | 24-10-8 | -459 | -459 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| N  | 24-9-12 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| O  | 21-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| P  | 19-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| T  | 5-11-4  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| V  | 7-11-4  | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| W  | 9-11-4  | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| X  | 11-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| Y  | 13-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| Z  | 15-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AA | 17-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AB | 21-11-4 | -110 | -110 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AC | 23-11-4 | -113 | -113 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AD | 2-0-12  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AE | 4-0-12  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AF | 7-11-4  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AG | 9-11-4  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AH | 11-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AI | 13-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AJ | 15-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AK | 17-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AL | 23-11-4 | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AM | 26-8-4  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| AN | 28-8-4  | -26  | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only  
DWG# T-2007756 *42*


|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T68</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| TRUSS DESC.               |                          |                      |                 |                                      |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:05 2020 Page 1

ID:lv307gsCyJh1IsHbR4r5BVzjesS-aRIZ166iF4wZrOJvQWZPAwQPm3Pp7TMDNUlAezMDGK

Scale = 1:50.0

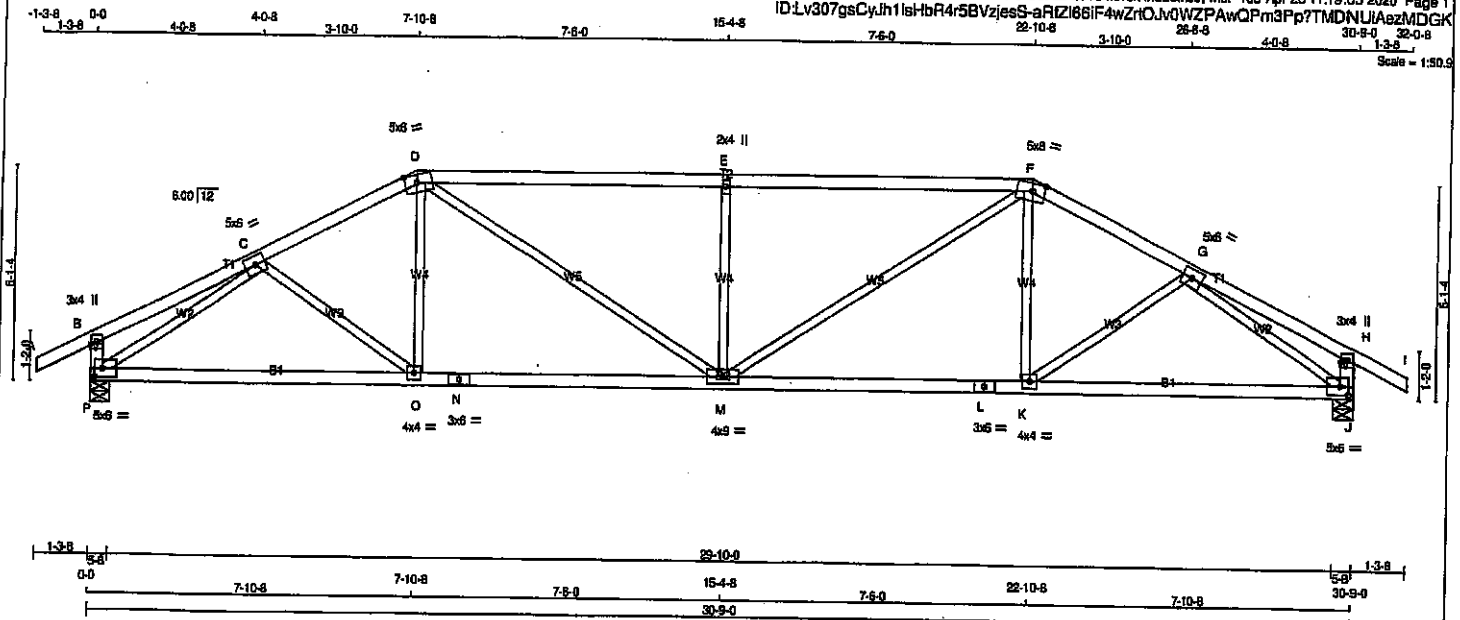

#### LUMBER

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| A - D             | 2x4    | DRY  | No.2   | SPF    |
| D - F             | 2x4    | DRY  | No.2   | SPF    |
| F - I             | 2x4    | DRY  | No.2   | SPF    |
| P - B             | 2x4    | DRY  | No.2   | SPF    |
| J - H             | 2x4    | DRY  | No.2   | SPF    |
| P - N             | 2x4    | DRY  | No.2   | SPF    |
| N - L             | 2x4    | DRY  | No.2   | SPF    |
| L - J             | 2x4    | DRY  | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| C  | TMVW-1 | MT20   | 5.0 | 6.0 |      |      |
| D  | TTWW-m | MT20   | 5.0 | 8.0 | 2.25 | 3.50 |
| E  | TMVW-m | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m | MT20   | 5.0 | 8.0 | 2.25 | 3.50 |
| G  | TMVW-1 | MT20   | 5.0 | 6.0 |      |      |
| H  | TMV+p  | MT20   | 3.0 | 4.0 |      |      |
| J  | BMVW-1 | MT20   | 5.0 | 6.0 | 2.50 | 2.25 |
| K  | BMVW-1 | MT20   | 4.0 | 4.0 |      |      |
| L  | BS-1   | MT20   | 3.0 | 6.0 |      |      |
| M  | BMVW-1 | MT20   | 4.0 | 9.0 |      |      |
| N  | BS-1   | MT20   | 3.0 | 6.0 |      |      |
| O  | BMVW-1 | MT20   | 4.0 | 4.0 |      |      |
| P  | BMVW-1 | MT20   | 5.0 | 6.0 | 2.50 | 2.25 |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----------|-------------------------|---------------------------------|-----------|------------|
| JT       | VERT                    | HORZ                            | UPLIFT    | IN-SX      |
| P        | 1820                    | 0                               | 0         | 5-8        |
| J        | 1820                    | 0                               | 0         | 5-8        |

#### UNFACTORED REACTIONS

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS | DEAD    | SOIL  |
|----------|-------------------------------|---------|-------|
| JT       | COMBINED                      | SNOW    | LIVE  |
| P        | 1284                          | 858 / 0 | 0 / 0 |
| J        | 1284                          | 858 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, J

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.06 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.08 FT. OR RIGID CEILING DIRECTLY APPLIED.  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MEMB.     | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. FACTORED FORCE (LBS) | WEBS  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS) |
|--------|-----------|---------------------------|------------------|---------------------------|-------|-------|---------------------------|---------------------------|
| FR-TO  |           |                           |                  |                           | FR-TO |       |                           |                           |
| A-B    | 0 / 28    | -91.8                     | -91.8            | 0.12 (1)                  | 10.00 | C-O   | 0 / 69                    | 0.02 (4)                  |
| B-C    | 0 / 16    | -91.8                     | -91.8            | 0.20 (1)                  | 10.00 | C-D   | 0 / 157                   | 0.05 (4)                  |
| C-D    | -2354 / 0 | -91.8                     | -91.8            | 0.22 (1)                  | 4.30  | D-M   | 0 / 897                   | 0.20 (1)                  |
| D-E    | -2848 / 0 | -91.8                     | -91.8            | 0.88 (1)                  | 3.08  | M-E   | -848 / 0                  | 0.33 (1)                  |
| E-F    | -2848 / 0 | -91.8                     | -91.8            | 0.88 (1)                  | 3.08  | M-F   | 0 / 897                   | 0.20 (1)                  |
| F-G    | -2354 / 0 | -91.8                     | -91.8            | 0.22 (1)                  | 4.30  | K-F   | 0 / 157                   | 0.05 (4)                  |
| G-H    | 0 / 16    | -91.8                     | -91.8            | 0.20 (1)                  | 10.00 | K-G   | 0 / 69                    | 0.02 (4)                  |
| H-I    | 0 / 28    | -91.8                     | -91.8            | 0.12 (1)                  | 10.00 | P-C   | -2557 / 0                 | 0.98 (1)                  |
| P-B    | -270 / 0  | 0.0                       | 0.0              | 0.03 (1)                  | 7.81  | G-J   | -2557 / 0                 | 0.98 (1)                  |
| J-H    | -270 / 0  | 0.0                       | 0.0              | 0.03 (1)                  | 7.81  |       |                           |                           |
| P-O    | 0 / 2078  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |
| O-N    | 0 / 2082  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |
| N-M    | 0 / 2092  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |
| M-L    | 0 / 2092  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |
| L-K    | 0 / 2092  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |
| K-J    | 0 / 2078  | -18.5                     | -18.5            | 0.49 (1)                  | 10.00 |       |                           |                           |

TOTAL WEIGHT = 117 lb

[M/F]

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.6 PSF |
| DL = 5.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

SPACING = 24.0 IN. C.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) =  $L/360$  (1.03")  
CALCULATED VERT. DEFL. (LL) =  $L/999$  (0.14")  
ALLOWABLE DEFL. (TL) =  $L/360$  (1.03")  
CALCULATED VERT. DEFL. (TL) =  $L/999$  (0.27")

CSI: TC=0.88/1.00 (D-E:1), BC=0.48/1.00 (M-C:1),  
WB=0.98/1.00 (C-P:1), SS=0.39/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR | SECTION |
|-----------------|-------|---------|
| (PSI)           | (PLI) | (PLI)   |
| MAX             | MIN   | MAX     |
| 618             | 354   | 1857    |
| 788             | 1987  | 1856    |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.86 (P) (INPUT = 0.90)  
JSI METAL= 0.71 (N) (INPUT = 1.00)



Structural component only  
DWG# T-2007757


Structural component only  
DWG# T-2007758

Structural component only  
DWG# T-2007759

|                           |                           |                      |                 |                                      |             |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T71A</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2018 Mtek Industries, Inc. Tue Apr 28 11:19:09 2020 Page 1  
ID:Lv307gsCyJh1stHbR4r5BVjesS-TCu3aTACJIR7KVh48saVZ059IOSilyUx77SzJPzMDGG

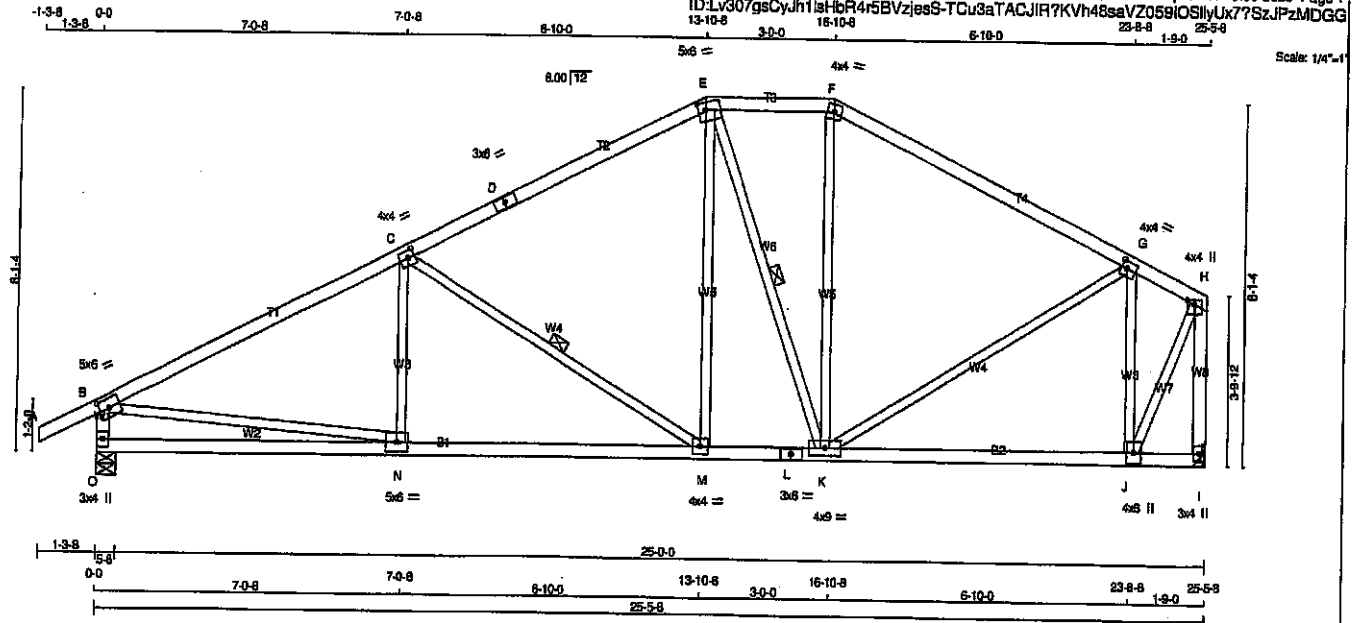

Scale: 1/4"=1'

| LUMBER | N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|--------|-------------------|--------|------|--------|--------|
| A - D  | 2x4 DRY           | No.2   | SPF  |        |        |
| D - E  | 2x4 DRY           | No.2   | SPF  |        |        |
| E - F  | 2x4 DRY           | No.2   | SPF  |        |        |
| F - H  | 2x4 DRY           | No.2   | SPF  |        |        |
| O - B  | 2x4 DRY           | No.2   | SPF  |        |        |
| I - H  | 2x4 DRY           | No.2   | SPF  |        |        |
| O - L  | 2x4 DRY           | No.2   | SPF  |        |        |
| L - I  | 2x4 DRY           | No.2   | SPF  |        |        |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE  | PLATES | W   | LEN | Y    | X    |
|----|-------|--------|-----|-----|------|------|
| B  | TMW-t | MT20   | 5.0 | 6.0 | 2.50 | 2.75 |
| C  | TMW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| D  | TS-I  | MT20   | 3.0 | 6.0 |      |      |
| E  | TTW-m | MT20   | 5.0 | 6.0 | 2.00 | 2.00 |
| F  | TTW-m | MT20   | 4.0 | 4.0 |      |      |
| G  | TMW-t | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| H  | TMW-t | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| I  | BMV-t | MT20   | 3.0 | 4.0 |      |      |
| J  | BMV-t | MT20   | 4.0 | 6.0 |      |      |
| K  | BMV-t | MT20   | 4.0 | 6.0 |      |      |
| L  | BS-I  | MT20   | 3.0 | 6.0 |      |      |
| M  | BMV-t | MT20   | 4.0 | 4.0 |      |      |
| N  | BMV-t | MT20   | 5.0 | 6.0 |      |      |
| O  | BMV-t | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG  | REQD BRG |
|----|-------------------------|------|---------------------------------|------|------------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |            |          |
| O  | 1528                    | 0    | 1528                            | 0    | 5-8        | 5-8      |
| I  | 1403                    | 0    | 1403                            | 0    | MECHANICAL |          |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3-8.

#### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX. MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM. LIVE | WIND    | DEAD  | SOIL  |
|----|----------|-------------------------------|-------|-------|------------|---------|-------|-------|
| O  | 1078     | 721 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 357 / 0 | 0 / 0 | 0 / 0 |
| I  | 992      | 651 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 341 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-M, E-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                      | WEBS  |                           |                      |          |
|--------|---------------------------|---------------------------|----------------------|-------|---------------------------|----------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH | MEMB.    |
| FR-TO  |                           |                           |                      | FR-TO |                           |                      |          |
| A-B    | 0 / 28                    | -91.8                     | -91.8 0.12 (1)       | 10.00 | N-C                       | -68 / 98             | 0.03 (4) |
| B-C    | -1948 / 0                 | -91.8                     | -91.8 0.09 (1)       | 4.00  | C-M                       | -757 / 0             | 0.35 (1) |
| C-D    | -1303 / 0                 | -91.8                     | -91.8 0.01 (1)       | 4.81  | M-E                       | 0 / 480              | 0.11 (1) |
| D-E    | -1303 / 0                 | -91.8                     | -91.8 0.01 (1)       | 4.81  | E-K                       | -303 / 0             | 0.14 (1) |
| E-F    | -1035 / 0                 | -91.8                     | -91.8 0.12 (1)       | 6.05  | K-F                       | 0 / 128              | 0.04 (4) |
| F-G    | -1183 / 0                 | -91.8                     | -91.8 0.54 (1)       | 5.15  | G-K                       | 0 / 477              | 0.11 (1) |
| G-H    | -588 / 0                  | -91.8                     | -91.8 0.44 (1)       | 6.25  | J-G                       | -1150 / 0            | 0.37 (1) |
| O-B    | -1475 / 0                 | 0.0                       | 0.0 0.15 (1)         | 6.74  | B-N                       | 0 / 1787             | 0.40 (1) |
| I-H    | -1418 / 0                 | 0.0                       | 0.0 0.34 (1)         | 6.85  | J-H                       | 0 / 1410             | 0.32 (1) |
| C-N    | 0 / 0                     | -18.5                     | -18.5 0.23 (4)       | 10.00 |                           |                      |          |
| N-M    | 0 / 1774                  | -18.5                     | -18.5 0.40 (1)       | 10.00 |                           |                      |          |
| M-L    | 0 / 1140                  | -18.5                     | -18.5 0.28 (1)       | 10.00 |                           |                      |          |
| L-K    | 0 / 1140                  | -18.5                     | -18.5 0.26 (1)       | 10.00 |                           |                      |          |
| K-J    | 0 / 630                   | -18.5                     | -18.5 0.20 (4)       | 10.00 |                           |                      |          |
| J-I    | 0 / 0                     | -18.5                     | -18.5 0.15 (4)       | 10.00 |                           |                      |          |

TOTAL WEIGHT = 114 lb [M/F]

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.8 PSF  
DL = 8.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, CBC 2012, ABC 2018  
- PART 9 OF CBC 2012 (2018 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.85")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")  
ALLOWABLE DEFL.(TL) = L/360 (0.85")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CS1: TC=0.69/1.00 (B-C:1), BC=0.40/1.00 (M-N:1), WB=0.40/1.00 (B-N:1), SS1=0.28/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1957 789 1987 1658

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.89 (H) (INPUT = 0.90)  
JSI METAL= 0.54 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007760

|                           |                           |                      |                 |                                      |          |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T72A</b> | QUANTITY<br><b>4</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
|---------------------------|---------------------------|----------------------|-----------------|--------------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 11:19:10 2020 Page 1  
ID:Lv307psCyJh1sHbR4r5BVzesS-xOSSopAq4czYfGGhZ8k6EeMsnp8UHq5McWrszMDGF

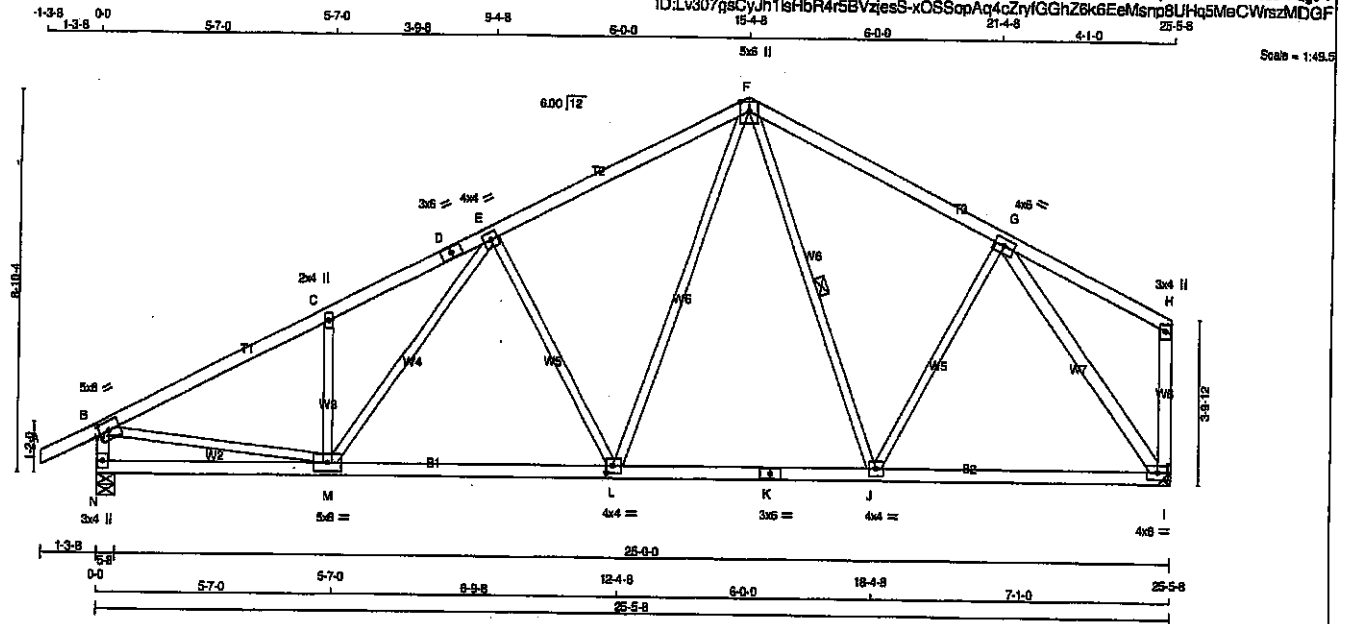

Scale = 1:49.5

| LUMBER            |        |      |        |
|-------------------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
| A - D             | 2x4    | DRY  | No.2   |
| D - F             | 2x4    | DRY  | No.2   |
| F - H             | 2x4    | DRY  | No.2   |
| N - B             | 2x4    | DRY  | No.2   |
| I - H             | 2x4    | DRY  | No.2   |
| N - K             | 2x4    | DRY  | No.2   |
| K - I             | 2x4    | DRY  | No.2   |
| ALL WEBS          | 2x3    | DRY  | No.2   |
| EXCEPT            |        |      |        |
| G - I             | 2x4    | DRY  | No.2   |

DRY: SEASONED LUMBER.

PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-1  | MT20   | 5.0 | 8.0 | 2.50 | 2.75 |
| C  | TMVW-w  | MT20   | 2.0 | 4.0 |      |      |
| D  | TS-1    | MT20   | 3.0 | 6.0 |      |      |
| F  | TMVW-1  | MT20   | 4.0 | 4.0 |      |      |
| G  | TTWVW-p | MT20   | 5.0 | 8.0 | Edge |      |
| H  | TMVW-1  | MT20   | 4.0 | 6.0 |      |      |
| I  | TMVW-p  | MT20   | 3.0 | 4.0 |      |      |
| J  | BMVW-1  | MT20   | 4.0 | 6.0 |      |      |
| K  | BS-1    | MT20   | 4.0 | 4.0 |      |      |
| L  | BMVW-1  | MT20   | 3.0 | 6.0 |      |      |
| M  | BMVW-w  | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| N  | BMV-1-p | MT20   | 5.0 | 8.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

#### BEARINGS

|    | FACTORED       | MAXIMUM FACTORED | INPUT | RECORD |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
| JT | VERT           | HORZ             | DOWN  | HORZ   |
| N  | 1528           | 0                | 1528  | 0      |
| I  | 1403           | 0                | 1403  | 0      |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 3'-8".

#### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX/MIN | COMPONENT REACTIONS |           |      |       |      |  |
|----|----------|---------|---------------------|-----------|------|-------|------|--|
|    | COMBINED | SNOW    | LIVE                | PERMUTIVE | WIND | DEAD  | SOIL |  |
| N  | 1078     | 721/0   | 0/0                 | 0/0       | 0/0  | 357/0 | 0/0  |  |
| I  | 992      | 651/0   | 0/0                 | 0/0       | 0/0  | 341/0 | 0/0  |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.43 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF F-J.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                               | WEBS  |                           |                               |  |
|--------|---------------------------|---------------------------|-------------------------------|-------|---------------------------|-------------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED VERT. LOAD (LC) |  |
| FR-TO  |                           | FROM TO                   | CSI (LC)                      | FR-TO |                           |                               |  |
| A-B    | 0/28                      | -91.8                     | -91.8 0.12 (1)                | L-F   | 0/716                     | 0.16 (1)                      |  |
| B-C    | -1944/0                   | -91.8                     | -91.8 0.41 (1)                | F-J   | -18/44                    | 0.02 (4)                      |  |
| C-D    | -1930/0                   | -91.8                     | -91.8 0.34 (1)                | J-G   | 0/177                     | 0.05 (4)                      |  |
| D-E    | -1930/0                   | -91.8                     | -91.8 0.34 (1)                | G-I   | -1541/0                   | 0.91 (1)                      |  |
| E-F    | -1406/0                   | -91.8                     | -91.8 0.45 (1)                | E-L   | -638/0                    | 0.45 (1)                      |  |
| F-G    | -1133/0                   | -91.8                     | -91.8 0.41 (1)                | M-C   | -428/0                    | 0.10 (1)                      |  |
| G-H    | 0/35                      | -91.8                     | -91.8 0.44 (1)                | M-E   | 0/338                     | 0.08 (1)                      |  |
| H-I    | -1486/0                   | 0.0                       | 0.0 0.15 (1)                  | B-M   | 0/1773                    | 0.40 (1)                      |  |
| I-H    | -105/0                    | 0.0                       | 0.0 0.02 (1)                  |       |                           |                               |  |
| N-M    | 0/0                       | -18.5                     | -18.5 0.16 (4)                |       |                           |                               |  |
| M-L    | 0/1548                    | -18.5                     | -18.5 0.32 (1)                |       |                           |                               |  |
| L-K    | 0/998                     | -18.5                     | -18.5 0.29 (4)                |       |                           |                               |  |
| K-J    | 0/998                     | -18.5                     | -18.5 0.29 (4)                |       |                           |                               |  |
| J-I    | 0/907                     | -18.5                     | -18.5 0.28 (4)                |       |                           |                               |  |

TOTAL WEIGHT = 4 X 112 = 448 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, NBC 2012, ABC 2019
- PART 9 OF NBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPC 2011, TPC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.85)  
CALCULATED VERT. DEF.(LL) =  $L/999$  (0.08)  
ALLOWABLE VERT. DEF.(TL) =  $L/360$  (0.85)  
CALCULATED VERT. DEF.(TL) =  $L/999$  (0.14)

CSI: TC=0.45/1.00 (E-F-1), BC=0.32/1.00 (L-M-1), WB=0.91/1.00 (G-I-1), SG=0.23/1.00 (F-G-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MT20  | 618       | 354   | 1667    |
|       | 788       | 1987  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.89 (L) (INPUT = 0.80)  
JSI METAL= 0.53 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2007761

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>T73</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310.5 Oct 29 2019 MTek Industries, Inc. Tue Apr 28 11:19:11 2020 Page 1  
ID:Lv307gsCyJh1stHbR4r5BVziesS-Pb0q79BTrwhZorSFGdzrAR6B53DWebIx4NizMDGE  
1-3-8 0-0 4-4-0 4-4-0 4-1-8 5-5-8 4-1-8 12-7-0 2-9-8 15-4-8 18-2-0 22-3-8 4-1-8 23-5-0 4-1-8 4-4-0 30-0-0 32-0-8  
Scale = 1:50.8

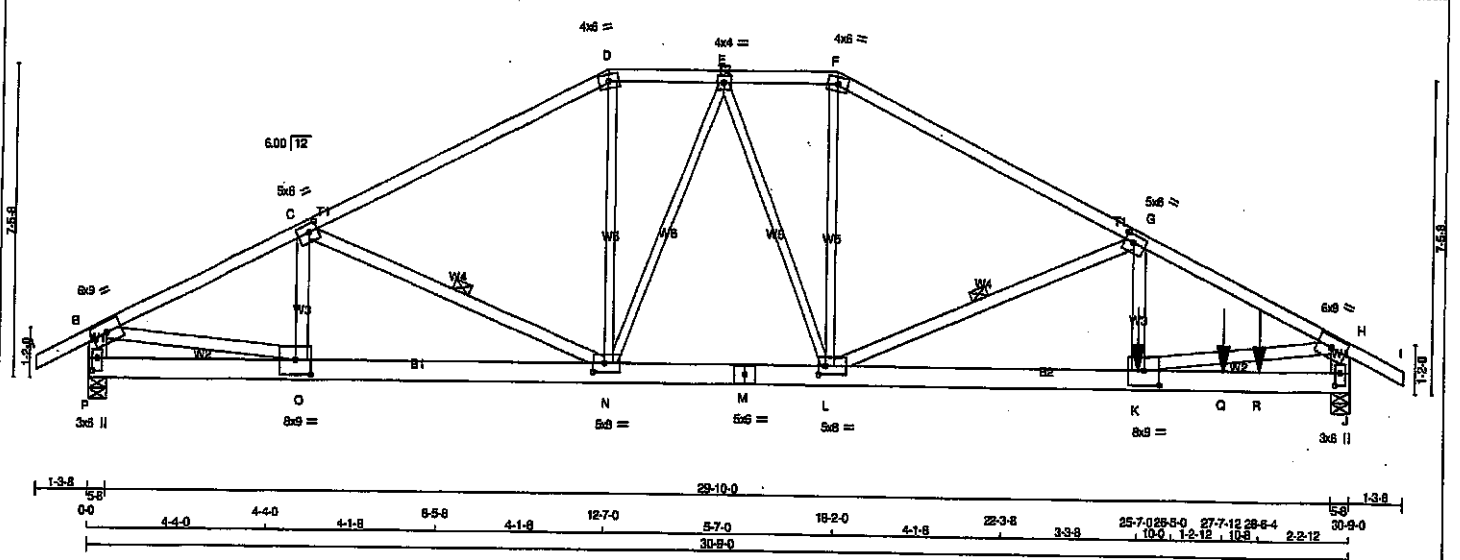

| LUMBER          |      |        |        |
|-----------------|------|--------|--------|
| N.L.G.A. RULES  | SIZE | LUMBER | DESCR. |
| CHORDS          |      |        |        |
| A - D           | 2x4  | DRY    | No.2   |
| D - F           | 2x4  | DRY    | No.2   |
| F - I           | 2x4  | DRY    | No.2   |
| P - B           | 2x8  | DRY    | No.2   |
| J - H           | 2x6  | DRY    | No.2   |
| P - M           | 2x6  | DRY    | No.2   |
| M - J           | 2x6  | DRY    | No.2   |
| ALL WEBS EXCEPT | 2x4  | DRY    | No.2   |
| N - D           | 2x3  | DRY    | No.2   |
| N - E           | 2x3  | DRY    | No.2   |
| E - L           | 2x3  | DRY    | No.2   |
| L - F           | 2x3  | DRY    | No.2   |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                            | SURFACE SPACING (IN) | LOAD (PLF) |
|-----------------------------------------|----------------------|------------|
| TOP CHORDS: (0.122"x3") SPIRAL NAILS    |                      |            |
| A-D                                     | 1                    | 12         |
| D-F                                     | 1                    | 12         |
| F-I                                     | 1                    | 12         |
| P-B                                     | 2                    | 12         |
| J-H                                     | 2                    | 12         |
| BOTTOM CHORDS: (0.122"x3") SPIRAL NAILS |                      |            |
| P-M                                     | 2                    | 12         |
| M-J                                     | 2                    | 12         |
| WEBS: (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3                                     | 1                    | 6          |
| G-K                                     | 2                    | 3          |
| 2x4                                     | 2                    | 3          |
| N-C                                     | 1                    | 6          |
| L-Q                                     | 1                    | 6          |
| O-B                                     | 1                    | 6          |
| K-H                                     | 1                    | 6          |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

| DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER |                |                                 |           |          |          |
|-----------------------------------------------------------------------------------------------|----------------|---------------------------------|-----------|----------|----------|
| BEARINGS                                                                                      |                |                                 |           |          |          |
| JT                                                                                            | GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |          |
| P                                                                                             | 2828           | 0                               | 2828      | 0        | 5-8      |
| J                                                                                             | 6261           | 0                               | 6261      | 0        | 5-8      |
| UNFACTORED REACTIONS                                                                          |                |                                 |           |          |          |
| JT                                                                                            | 1ST LCASE      | MAX. MIN. COMPONENT REACTIONS   |           |          |          |
| P                                                                                             | 1853           | 1239 / 0                        | 0 / 0     | 0 / 0    | 614 / 0  |
| J                                                                                             | 4414           | 2975 / 0                        | 0 / 0     | 0 / 0    | 1439 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, J.  
BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.58 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-N, G-L.  
END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

| CHORDS |                           |                           |                                | WEBS     |                           |                                |                                |
|--------|---------------------------|---------------------------|--------------------------------|----------|---------------------------|--------------------------------|--------------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LBS) | MEMB.    | MAX. FACTORED FORCE (LBS) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LBS) |
| FR-TO  |                           |                           |                                | FR-TO    |                           |                                |                                |
| A-B    | 0 / 28                    | -91.8                     | -91.8                          | 0.07 (1) | 10.00                     | O-C                            | -440 / 0                       |
| B-C    | -3912 / 0                 | -91.8                     | -91.8                          | 0.47 (1) | 4.29                      | C-N                            | -341 / 0                       |
| C-D    | -3635 / 0                 | -91.8                     | -91.8                          | 0.58 (1) | 4.44                      | N-D                            | 0 / 1215                       |
| D-E    | -3242 / 0                 | -91.8                     | -91.8                          | 0.09 (1) | 5.10                      | N-E                            | -990 / 0                       |
| E-F    | -3844 / 0                 | -91.8                     | -91.8                          | 0.10 (1) | 4.75                      | E-L                            | 0 / 708                        |
| F-G    | -4300 / 0                 | -91.8                     | -91.8                          | 0.63 (1) | 4.14                      | L-F                            | 0 / 1506                       |
| G-H    | -9440 / 0                 | -91.8                     | -91.8                          | 0.86 (1) | 2.58                      | K-G                            | -5095 / 0                      |
| H-I    | 0 / 28                    | -91.8                     | -91.8                          | 0.07 (1) | 10.00                     | K-G                            | 0 / 9686                       |
| P-B    | -2589 / 0                 | 0.0                       | 0.0                            | 0.09 (1) | 7.81                      | B-O                            | 0 / 3575                       |
| J-H    | -5789 / 0                 | 0.0                       | 0.0                            | 0.20 (1) | 6.13                      | K-H                            | 0 / 6570                       |
| P-O    | 0 / 0                     | -18.5                     | -18.5                          | 0.03 (1) | 10.00                     |                                |                                |
| C-N    | 0 / 3535                  | -18.5                     | -18.5                          | 0.27 (1) | 10.00                     |                                |                                |
| N-M    | 0 / 3593                  | -18.5                     | -18.5                          | 0.27 (1) | 10.00                     |                                |                                |
| M-L    | 0 / 3593                  | -18.5                     | -18.5                          | 0.27 (1) | 10.00                     |                                |                                |
| L-K    | 0 / 8475                  | -18.5                     | -18.5                          | 0.60 (1) | 10.00                     |                                |                                |
| K-Q    | 0 / 0                     | -18.5                     | -18.5                          | 0.48 (1) | 10.00                     |                                |                                |
| Q-R    | 0 / 0                     | -18.5                     | -18.5                          | 0.48 (1) | 10.00                     |                                |                                |
| R-J    | 0 / 0                     | -18.5                     | -18.5                          | 0.48 (1) | 10.00                     |                                |                                |

| FACTORED CONCENTRATED LOADS (LBS) |         |       |       |      |      |      |       |
|-----------------------------------|---------|-------|-------|------|------|------|-------|
| JT                                | LOC.    | LC1   | MAX.  | MAX+ | FACE | DIR. | TYPE  |
| K                                 | 25-7-0  | -4158 | -4158 | --   | BACK | VERT | TOTAL |
| Q                                 | 27-7-12 | -1003 | -1003 | --   | BACK | VERT | TOTAL |
| R                                 | 28-6-4  | -87   | -87   | --   | BACK | VERT | TOTAL |

CONNECTION REQUIREMENTS  
1) C1: A SUITABLE HANGER/MOECHAN CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 157 = 315 lb

| DESIGN CRITERIA  |           |     |  |
|------------------|-----------|-----|--|
| SPECIFIED LOADS: |           |     |  |
| TOP CH.          | LL = 25.8 | PSF |  |
|                  | DL = 6.0  | PSF |  |
| BOT CH.          | LL = 0.0  | PSF |  |
|                  | DL = 7.4  | PSF |  |
| TOTAL LOAD       | = 38.0    | PSF |  |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.03")  
CALCULATED VERT. DEFL.(LL) = L/899 (0.12")  
ALLOWABLE DEFL.(TL) = L/800 (1.03")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.22")

CSI: TC=0.88/1.00 (G-H-I), BC=0.80/1.00 (K-L-I), WB=0.88/1.00 (G-L-T), SSI=0.24/1.00 (J-K-T)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN  
MT20 618 354 1667 708 1887 1658

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (B) (INPUT = 0.80)  
JSI METAL= 0.80 (H) (INPUT = 1.00)



Structural component only  
DWG# T-2007762 1/2

CONTINUED ON PAGE 2

|                                 |            |             |     |                  |          |
|---------------------------------|------------|-------------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY    | PLY | JOB DESC.        | DRWG NO. |
| 408265                          | T73        | 1           | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            | TRUSS DESC. |     |                  |          |


Version 8.310 S Oct 29 2019 Mtek Industries, Inc. Tue Apr 23 11:19:11 2020 Page 2  
ID:Lv307asCjJh1slbR4r5BVziasS-Pb0g79BTwnhZorSF-GdzfRAR6B53DvEplk4NlzMDGE

**PLATES (table is in inches)**

| JT TYPE   | PLATES | W   | LEN | Y    | X    |
|-----------|--------|-----|-----|------|------|
| B TMVW-t  | MT20   | 6.0 | 9.0 |      |      |
| C TMVW-t  | MT20   | 6.0 | 6.0 | 2.25 | 2.50 |
| D TTW-m   | MT20   | 4.0 | 6.0 |      |      |
| E TMVW-t  | MT20   | 4.0 | 4.0 |      |      |
| F TTW-m   | MT20   | 4.0 | 6.0 |      |      |
| G TMVW-t  | MT20   | 6.0 | 6.0 | 2.25 | 2.50 |
| H TMVW-t  | MT20   | 6.0 | 9.0 |      |      |
| J BMV1-p  | MT20   | 3.0 | 6.0 | 3.50 | 1.50 |
| K BMVW-t  | MT20   | 8.0 | 9.0 | 4.25 | 4.50 |
| L BMVWW-t | MT20   | 6.0 | 8.0 | 2.50 | 2.00 |
| M BS-t    | MT20   | 6.0 | 6.0 |      |      |
| N BMVWW-t | MT20   | 6.0 | 8.0 | 2.50 | 3.50 |
| O BMVW-t  | MT20   | 8.0 | 9.0 | 4.25 | 4.50 |
| P BMV1-p  | MT20   | 3.0 | 6.0 | 3.50 | 1.50 |



Structural component only  
DWG# T-2007762 72



**GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.**

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

JSI GRIP= 0.90 (B) (INPUT = 0.90 )  
JSI METAL= 0.82 (P) (INPUT = 1.00



|                                 |            |             |     |                  |          |
|---------------------------------|------------|-------------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY    | PLY | JOB DESC.        | DRWG NO. |
| 408265                          | T74        | 1           | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            | TRUSS DESC. |     |                  |          |

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 11:19:13 2020 Page 2  
ID:Lv307qsCyJh1sHbR4r5BVziesS-Lz8aCrDjNXxQp6?rNhrRksGvH7pPhfX2cQBSBzMDGC

**PLATES (tablets in inches)**

| JT | TYPE   | PLATES | W    | LEN  | Y    | X    |
|----|--------|--------|------|------|------|------|
| B  | TMVW-p | MT20   | 5.0  | 6.0  | 2.00 | 3.00 |
| C  | TMWW-t | MT20   | 4.0  | 4.0  | 2.00 | 1.75 |
| D  | TMWW-t | MT20   | 4.0  | 4.0  | 2.00 | 1.75 |
| E  | TS-t   | MT20   | 3.0  | 6.0  |      |      |
| F  | TTW-m  | MT20   | 4.0  | 4.0  |      |      |
| G  | TMWW-t | MT20   | 4.0  | 4.0  |      |      |
| H  | TTW-m  | MT20   | 4.0  | 6.0  |      |      |
| I  | TMWW-t | MT20   | 4.0  | 9.0  |      |      |
| J  | TMV-p  | MT20   | 3.0  | 4.0  |      |      |
| K  | TMVW-p | MT20   | 5.0  | 8.0  | Edge |      |
| M  | BMV1-p | MT20   | 3.0  | 6.0  |      |      |
| N  | BMWW-t | MT20   | 10.0 | 12.0 | 5.00 | 4.00 |
| O  | BMV-p  | MT20   | 3.0  | 6.0  |      |      |
| P  | BMWW-t | MT20   | 6.0  | 9.0  | 4.50 | 2.00 |
| Q  | BMWW-t | MT20   | 5.0  | 6.0  |      |      |
| R  | BS-t   | MT20   | 5.0  | 6.0  |      |      |
| S  | BMWW-t | MT20   | 5.0  | 8.0  |      |      |
| T  | BMWW-t | MT20   | 5.0  | 8.0  |      |      |
| U  | BMWW-t | MT20   | 5.0  | 6.0  |      |      |
| V  | BMV1-p | MT20   | 3.0  | 6.0  |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.




Structural component only  
DWG# T-2007763 2/2

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T75</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 25 11:19:14 2020 Page 1  
ID:lv307gsCylh1shbR4r5BVzjesS-qAiyBdL7r3HQGa1wPAGG4o0VPBdCAaGHAk dzMDGB  
17-7-8 22-11-0 3-2-4 26-1-4 27-7-0 29-3-8 31-1-8 31-7-0  
Scale = 1:50.0

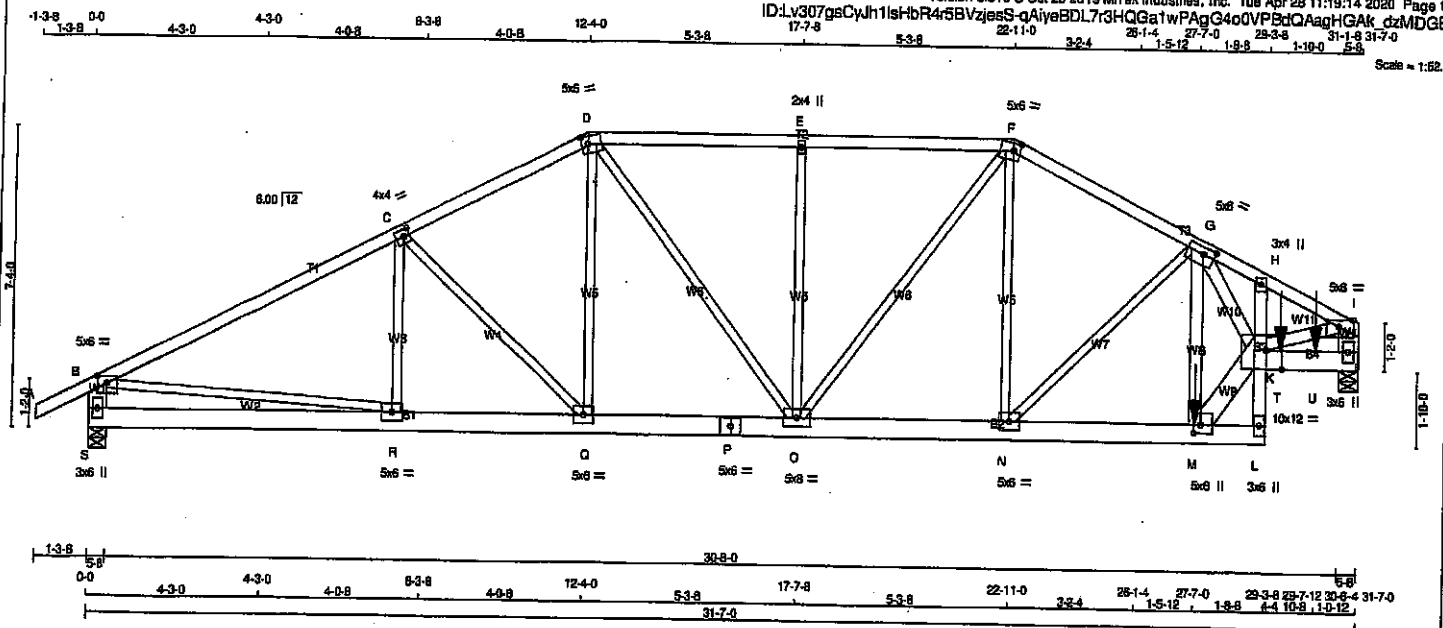

| CHORDS          | SIZE | DRY | NO.2 | DESCR |
|-----------------|------|-----|------|-------|
| A - D           | 2x4  | DRY | No.2 | SPF   |
| D - F           | 2x4  | DRY | No.2 | SPF   |
| F - I           | 2x4  | DRY | No.2 | SPF   |
| S - B           | 2x6  | DRY | No.2 | SPF   |
| J - I           | 2x6  | DRY | No.2 | SPF   |
| S - P           | 2x6  | DRY | No.2 | SPF   |
| P - L           | 2x6  | DRY | No.2 | SPF   |
| L - H           | 2x4  | DRY | No.2 | SPF   |
| K - J           | 2x6  | DRY | No.2 | SPF   |
| ALL WEBS EXCEPT | 2x3  | DRY | No.2 | SPF   |
| K - I           | 2x4  | DRY | No.2 | SPF   |
| M - G           | 2x4  | DRY | No.2 | SPF   |
| G - K           | 2x4  | DRY | No.2 | SPF   |
| M - K           | 2x6  | DRY | No.2 | SPF   |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                            | SURFACE SPACING (IN) | LOAD (PLF)   |
|-----------------------------------------|----------------------|--------------|
| TOP CHORDS: (0.122"x3") SPIRAL NAILS    |                      |              |
| A-D 1                                   | 12                   | TOP          |
| D-F 1                                   | 12                   | TOP          |
| F-I 1                                   | 12                   | TOP          |
| S-B 2                                   | 12                   | TOP          |
| J-I 2                                   | 12                   | TOP          |
| BOTTOM CHORDS: (0.122"x3") SPIRAL NAILS |                      |              |
| S-P 2                                   | 12                   | TOP          |
| P-L 2                                   | 12                   | SIDE (183.1) |
| K-J 2                                   | 12                   | SIDE (0.0)   |
| L-H 1                                   | 12                   | TOP          |
| WEBS: (0.122"x3") SPIRAL NAILS          |                      |              |
| 2x3 1                                   | 6                    | SIDE (705.6) |
| G-M 1                                   | 3                    |              |
| 2x4 1                                   | 8                    |              |
| 2x6 2                                   | 6                    |              |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----------|-------------------------|---------------------------------|-----------|----------|
| JT       | VERT                    | DOWN                            | UPLIFT    | IN-SX    |
| S        | 2343                    | 0                               | 2343      | 0        |
| J        | 5533                    | 0                               | 5533      | 0        |

#### UNFACTORED REACTIONS

| 1ST CASE | MAX. MIN. COMPONENT REACTIONS | PERM. LIVE | WIND  | DEAD       | SOIL     |
|----------|-------------------------------|------------|-------|------------|----------|
| JT       | COMBINED                      | SNOW       | LIVE  | PERM. LIVE | WIND     |
| S        | 1854                          | 1104 / 0   | 0 / 0 | 0 / 0      | 550 / 0  |
| J        | 3902                          | 2821 / 0   | 0 / 0 | 0 / 0      | 1280 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, J

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.49 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) |
|--------|---------------------------|---------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| MEMB.  | FR-TO                     | FROM                      | TO                             | FROM                           | TO                             | FROM                           | TO                             | FROM                           | TO                             |
| A-B    | 0 / 28                    | -91.8                     | -91.8                          | 0.07 (1)                       | 10.00                          | B-R                            | 0 / 3105                       | 0.38 (1)                       |                                |
| B-C    | -3428 / 0                 | -91.8                     | -91.8                          | 0.80 (1)                       | 4.53                           | R-C                            | -212 / 42                      | 0.04 (1)                       |                                |
| C-D    | -3102 / 0                 | -91.8                     | -91.8                          | 0.43 (1)                       | 4.73                           | C-Q                            | -499 / 0                       | 0.20 (1)                       |                                |
| D-E    | -3205 / 0                 | -91.8                     | -91.8                          | 0.29 (1)                       | 4.89                           | Q-D                            | 0 / 455                        | 0.05 (1)                       |                                |
| E-F    | -3205 / 0                 | -91.8                     | -91.8                          | 0.29 (1)                       | 4.89                           | D-O                            | 0 / 772                        | 0.10 (1)                       |                                |
| F-G    | -3525 / 0                 | -91.8                     | -91.8                          | 0.21 (1)                       | 4.81                           | O-E                            | -589 / 0                       | 0.27 (1)                       |                                |
| G-H    | -6738 / 0                 | -91.8                     | -91.8                          | 0.28 (1)                       | 3.53                           | O-F                            | 0 / 88                         | 0.01 (1)                       |                                |
| H-I    | -6861 / 0                 | -91.8                     | -91.8                          | 0.29 (1)                       | 3.49                           | N-F                            | 0 / 1139                       | 0.14 (1)                       |                                |
| S-B    | -2270 / 0                 | 0.0                       | 0.0                            | 0.08 (1)                       | 7.81                           | N-G                            | -1519 / 0                      | 0.60 (1)                       |                                |
| J-I    | -5248 / 0                 | 0.0                       | 0.0                            | 0.18 (1)                       | 6.38                           | K-I                            | 0 / 6503                       | 0.57 (1)                       |                                |
| S-R    | 0 / 0                     | -18.5                     | -18.5                          | 0.07 (4)                       | 10.00                          | M-G                            | -1359 / 0                      | 0.18 (1)                       |                                |
| R-Q    | 0 / 3089                  | -18.5                     | -18.5                          | 0.22 (1)                       | 10.00                          | G-K                            | 0 / 3843                       | 0.34 (1)                       |                                |
| Q-P    | 0 / 2738                  | -18.5                     | -18.5                          | 0.19 (1)                       | 10.00                          | M-K                            | 0 / 6368                       | 0.41 (1)                       |                                |
| P-O    | 0 / 2738                  | -18.5                     | -18.5                          | 0.19 (1)                       | 10.00                          |                                |                                |                                |                                |
| O-N    | 0 / 3152                  | -18.5                     | -18.5                          | 0.22 (1)                       | 10.00                          |                                |                                |                                |                                |
| N-M    | 0 / 4227                  | -18.5                     | -18.5                          | 0.29 (1)                       | 10.00                          |                                |                                |                                |                                |
| M-L    | 0 / 96                    | -18.5                     | -18.5                          | 0.02 (4)                       | 10.00                          |                                |                                |                                |                                |
| L-K    | -2 / 0                    | 0.0                       | 0.0                            | 0.13 (1)                       | 10.00                          |                                |                                |                                |                                |
| K-H    | 0 / 147                   | 0.0                       | 0.0                            | 0.15 (1)                       | 10.00                          |                                |                                |                                |                                |
| K-T    | 0 / 0                     | -18.5                     | -18.5                          | 0.11 (1)                       | 10.00                          |                                |                                |                                |                                |
| T-U    | 0 / 0                     | -18.5                     | -18.5                          | 0.11 (1)                       | 10.00                          |                                |                                |                                |                                |
| U-J    | 0 / 0                     | -18.5                     | -18.5                          | 0.11 (1)                       | 10.00                          |                                |                                |                                |                                |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.    | LC1   | MAX-  | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|---------|-------|-------|------|------|------|-------|------|-------|
| M  | 27-7-0  | -3407 | -3407 | ---  | BACK | VERT | TOTAL | ---  | C1    |
| T  | 29-7-12 | -624  | -624  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| U  | 30-6-4  | -238  | -238  | ---  | TOP  | VERT | TOTAL | ---  | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 167 = 334 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|                   |           |     |
|-------------------|-----------|-----|
| TOP CH.           | LL = 25.8 | PSF |
| DL = 6.0          | PSF       |     |
| BOT CH.           | LL = 0.0  | PSF |
| DL = 7.4          | PSF       |     |
| TOTAL LOAD = 38.0 | PSF       |     |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) =  $L/360$  (1.05')

CALCULATED VERT. DEFL. (LL) =  $L/999$  (0.08')

ALLOWABLE DEFL. (TL) =  $L/360$  (1.05')

CALCULATED VERT. DEFL. (TL) =  $L/999$  (0.14')

CSI: TC=0.80/1.00 (B-C:1), BC=0.29/1.00 (M-N:1),

WB=0.60/1.00 (G-N:1), SS=0.21/1.00 (J-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00

COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE GRIP (DRY) | SHEAR | SECTION |
|------------------|-------|---------|
| (PSI)            | (PL)  | (PL)    |
| MAX              | MIN   | MAX     |
| MT20             | 618   | 354     |
|                  | 1687  | 788     |
|                  | 1987  | 1686    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (M) (INPUT = 0.80)

JSI METAL= 0.73 (M) (INPUT = 1.00)



Structural component only  
DWG# T-2007764

CONTINUED ON PAGE 2

|                                 |            |          |     |                  |          |
|---------------------------------|------------|----------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408265                          | T75        | 1        | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            |          |     | TRUSS DESC.      |          |

Version 8.310 S Oct 28 2018 MITek Industries, Inc. Tue Apr 28 11:19:14 2020 Page 2

ID:Lv307qsCwJh1sHbR4r5BVziesS-qAiveBDL7r3HQGa1wPAqG4c0VP8dQAagHGAK dzMDGB

**PLATES (table is in inches)**

| JT      | TYPE    | PLATES | W    | LEN  | Y         | X    |
|---------|---------|--------|------|------|-----------|------|
| B       | TMVW-p  | MT20   | 5.0  | 6.0  | 2.00      | 3.00 |
| C       | TMWW-l  | MT20   | 4.0  | 4.0  | 2.00      | 1.75 |
| D       | TTWW-m  | MT20   | 5.0  | 6.0  | 2.25      | 2.00 |
| E       | TMW-w   | MT20   | 2.0  | 4.0  |           |      |
| F       | TTWW-l  | MT20   | 5.0  | 6.0  | 2.25      | 2.00 |
| G       | TMWWW-l | MT20   | 5.0  | 8.0  | 2.00      | 3.00 |
| H       | TMV-p   | MT20   | 3.0  | 4.0  |           |      |
| I       | TMVW-p  | MT20   | 5.0  | 8.0  | Edge      |      |
| J       | BMV-l-p | MT20   | 3.0  | 6.0  |           |      |
| K       | BMVWW-l | MT20   | 10.0 | 12.0 | Edge 4.75 |      |
| L       | BMV-p   | MT20   | 3.0  | 6.0  |           |      |
| M       | BMVW-l  | MT20   | 5.0  | 6.0  | 2.50      | 2.00 |
| N, Q, R |         |        |      |      |           |      |
| N       | BMVW-l  | MT20   | 5.0  | 8.0  |           |      |
| O       | BMVWW-l | MT20   | 5.0  | 8.0  |           |      |
| P       | BS-l    | MT20   | 5.0  | 6.0  |           |      |
| S       | BMV-l-p | MT20   | 3.0  | 6.0  |           |      |


Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.



Structural component only  
DWG# T-2007764

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>T76</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:15 2020 Page 1  
 ID:Lv307gsCylh1IsHbR4r5BVzesS-lmFLrXEzu8B82Q9EU6hvpHLDioT19ZVqWwvHW3zMDGA  
 Scale = 1:51.8

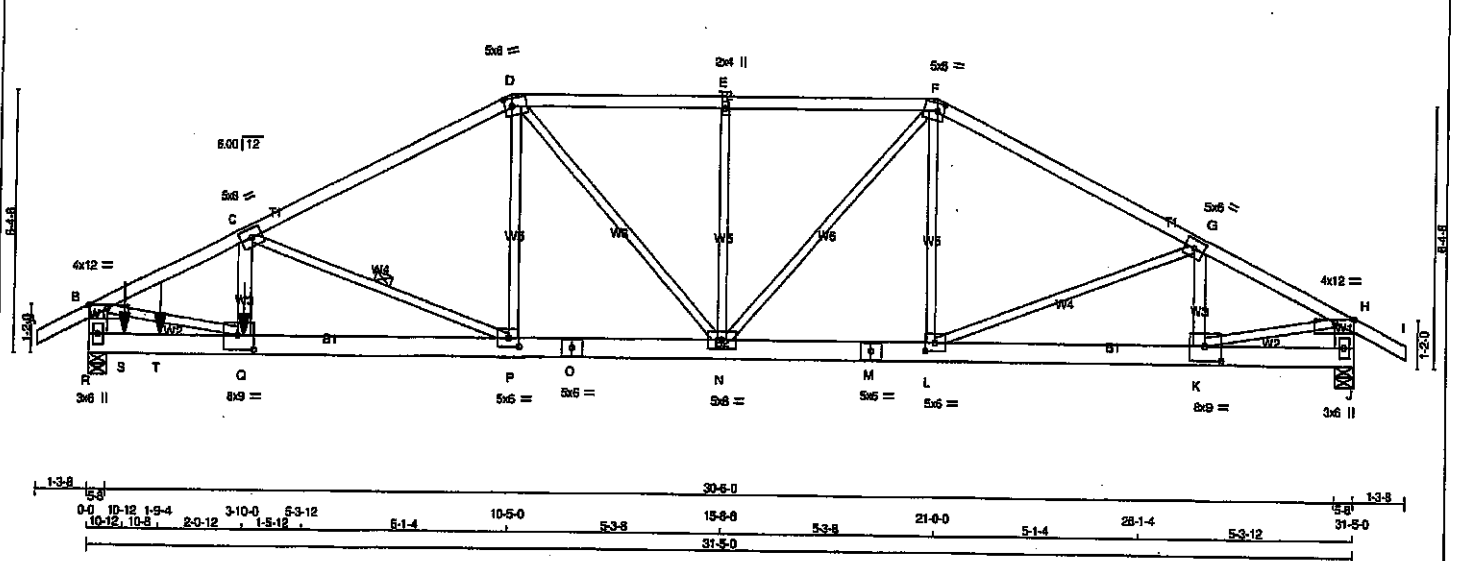

| LUMBER            |        |      |        |
|-------------------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
| A - D             | 2x4    | DRY  | No.2   |
| D - F             | 2x4    | DRY  | No.2   |
| F - I             | 2x4    | DRY  | No.2   |
| R - B             | 2x6    | DRY  | No.2   |
| J - H             | 2x6    | DRY  | No.2   |
| R - O             | 2x6    | DRY  | No.2   |
| O - M             | 2x6    | DRY  | No.2   |
| M - J             | 2x6    | DRY  | No.2   |
| ALL WEBS EXCEPT   | 2x3    | DRY  | No.2   |
| Q - C             | 2x4    | DRY  | No.2   |
| K - G             | 2x4    | DRY  | No.2   |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)  |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| A-D                                      | 12                   | TOP         |
| D-F                                      | 12                   | TOP         |
| F-I                                      | 12                   | TOP         |
| R-B                                      | 12                   | TOP         |
| J-H                                      | 12                   | TOP         |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| R-O                                      | 12                   | SIDE(183.1) |
| O-M                                      | 12                   | TOP         |
| M-J                                      | 12                   | TOP         |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| 2x3                                      | 6                    | SIDE(728.0) |
| C-Q                                      | 2                    |             |
| 2x4                                      | 3                    |             |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                | FACTORED |      | MAXIMUM FACTORED |      | INPUT |       | REQ'D |       |
|----------|----------------|----------|------|------------------|------|-------|-------|-------|-------|
| JT       | GROSS REACTION | VERT     | HORZ | GROSS REACTION   | DOWN | BRG   | IN-SX | BRG   | IN-SX |
| R        | 5710           | 0        | 0    | 5710             | 0    | 0     | 5-8   | 5-8   | 5-8   |
| J        | 2323           | 0        | 0    | 2323             | 0    | 0     | 5-8   | 5-8   | 5-8   |

#### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX. MIN. COMPONENT REACTIONS | LIVE  | PERM. LIVE | WIND  | DEAD     | SOIL  |
|----|----------|-------------------------------|-------|------------|-------|----------|-------|
| R  | 4024     | 2720 / 0                      | 0 / 0 | 0 / 0      | 0 / 0 | 1304 / 0 | 0 / 0 |
| J  | 1840     | 1055 / 0                      | 0 / 0 | 0 / 0      | 0 / 0 | 545 / 0  | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.16 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |             | FACTORED |            | MAX. FACTORED |             | WEBS  |             | FACTORED      |             |
|--------|-------------|----------|------------|---------------|-------------|-------|-------------|---------------|-------------|
| MEMB.  | FORCE (LBS) | VERT.    | LOC1 (PLF) | MAX. CSI (LC) | MAX. UNBRAC | MEMB. | FORCE (LBS) | MAX. CSI (LC) | MAX. UNBRAC |
| FR-TO  |             |          |            |               |             | FR-TO |             |               |             |
| A-B    | 0 / 28      | -91.8    | -91.8      | 0.07 (1)      | 10.00       | C-Q   | 0 / 2407    | 0.21 (1)      | 0.21 (1)    |
| B-C    | -7764 / 0   | -91.8    | -91.8      | 0.48 (1)      | 3.16        | C-P   | -3588 / 0   | 0.65 (1)      | 0.65 (1)    |
| C-D    | -4096 / 0   | -91.8    | -91.8      | 0.47 (1)      | 4.32        | P-D   | 0 / 1533    | 0.19 (1)      | 0.19 (1)    |
| D-E    | -3533 / 0   | -91.8    | -91.8      | 0.30 (1)      | 4.69        | D-N   | -209 / 0    | 0.13 (1)      | 0.13 (1)    |
| E-F    | -3533 / 0   | -91.8    | -91.8      | 0.30 (1)      | 4.69        | N-E   | -587 / 0    | 0.18 (1)      | 0.18 (1)    |
| F-G    | -3198 / 0   | -91.8    | -91.8      | 0.38 (1)      | 4.85        | N-F   | 0 / 1045    | 0.13 (1)      | 0.13 (1)    |
| G-H    | -3234 / 0   | -91.8    | -91.8      | 0.31 (1)      | 4.82        | L-F   | 0 / 198     | 0.03 (4)      | 0.03 (4)    |
| H-I    | 0 / 28      | -91.8    | -91.8      | 0.07 (1)      | 10.00       | L-G   | -97 / 0     | 0.05 (1)      | 0.05 (1)    |
| R-B    | -5124 / 0   | 0.0      | 0.0        | 0.18 (1)      | 8.44        | K-G   | -542 / 0    | 0.04 (1)      | 0.04 (1)    |
| J-H    | -2268 / 0   | 0.0      | 0.0        | 0.08 (1)      | 7.81        | B-Q   | 0 / 7115    | 0.88 (1)      | 0.88 (1)    |
| R-S    | 0 / 0       | -18.5    | -18.5      | 0.30 (1)      | 10.00       | K-H   | 0 / 2987    | 0.37 (1)      | 0.37 (1)    |
| S-T    | 0 / 0       | -18.5    | -18.5      | 0.30 (1)      | 10.00       |       |             |               |             |
| T-Q    | 0 / 0       | -18.5    | -18.5      | 0.30 (1)      | 10.00       |       |             |               |             |
| C-P    | 0 / 6974    | -18.5    | -18.5      | 0.53 (1)      | 10.00       |       |             |               |             |
| P-O    | 0 / 3672    | -18.5    | -18.5      | 0.28 (1)      | 10.00       |       |             |               |             |
| O-N    | 0 / 3672    | -18.5    | -18.5      | 0.28 (1)      | 10.00       |       |             |               |             |
| N-M    | 0 / 2841    | -18.5    | -18.5      | 0.22 (1)      | 10.00       |       |             |               |             |
| M-L    | 0 / 2841    | -18.5    | -18.5      | 0.22 (1)      | 10.00       |       |             |               |             |
| L-K    | 0 / 2928    | -18.5    | -18.5      | 0.23 (1)      | 10.00       |       |             |               |             |
| K-J    | 0 / 0       | -18.5    | -18.5      | 0.03 (1)      | 10.00       |       |             |               |             |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC    | LC1   | MAX-  | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-------|-------|------|------|------|-------|------|-------|
| Q  | 3-10-0 | -3483 | -3483 | ---  | BACK | VERT | TOTAL | ---  | C1    |
| S  | 10-12  | -212  | -212  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| T  | 1-9-4  | -616  | -616  | ---  | BACK | VERT | TOTAL | ---  | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 149 = 297 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.6 | PSF |
|            | DL = 6.0  | PSF |
| BOT CH.    | LL = 0.0  | PSF |
|            | DL = 7.4  | PSF |
| TOTAL LOAD | = 39.0    | PSF |

SPACING = 24.0 IN. OC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
 - PART 9 OF BCBC 2018, CBC 2012, ABC 2018  
 - PART 9 OF CBC 2012 (2019 AMENDMENT)  
 - CSA 088-09, CSA 086-14  
 - TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.08")  
 CALCULATED VERT. DEFL.(LL) = L/999 (0.10")  
 ALLOWABLE DEFL.(TL) = L/360 (1.08")  
 CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.47/1.00 (C-D:1), BC=0.53/1.00 (P-Q:1), WB=0.88/1.00 (B-Q:1), SS=0.19/1.00 (Q-R:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOBOLIVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

| NAIL VALUES | PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI)  |
|-------------|-----------------|-------------|----------------|
| MT20        | 618             | 354         | 1887 1887 1886 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.87 (L) (INPUT = 0.90)  
 JSI METAL = 0.83 (B) (INPUT = 1.00)



Structural component only  
 DWG# T-2007765 1/2

|                    |                   |               |          |                               |          |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408265 | TRUSS NAME<br>T76 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2018 Mittek Industries, Inc. Tue Apr 28 11:18:15 2020 Page 2  
ID1.v307qsCvJh1IsHbR4r5BVzies-IMFLrXEzu8B82Q9EU8hvpHLDloT19ZVqWwvHW3zMDGA

| PLATES (table is in inches) |          |        |     |      |           |
|-----------------------------|----------|--------|-----|------|-----------|
| JT                          | TYPE     | PLATES | W   | LEN  | Y X       |
| B                           | TMVW-p   | MT20   | 4.0 | 12.0 | 1.00 5.50 |
| C                           | TMVW-t   | MT20   | 5.0 | 6.0  |           |
| D                           | TTWW-m   | MT20   | 5.0 | 6.0  | 2.25 2.00 |
| E                           | TMVW-w   | MT20   | 2.0 | 4.0  |           |
| F                           | TTWW-m   | MT20   | 5.0 | 6.0  | 2.25 2.00 |
| G                           | TMVW-t   | MT20   | 5.0 | 6.0  |           |
| H                           | TMVW-p   | MT20   | 4.0 | 12.0 | 1.00 5.50 |
| J                           | BMV1+p   | MT20   | 3.0 | 8.0  |           |
| K                           | BMVW-t   | MT20   | 8.0 | 9.0  | 4.25 4.50 |
| L                           | BMVW-t   | MT20   | 5.0 | 6.0  | 2.50 2.75 |
| M                           | BS-t     | MT20   | 5.0 | 6.0  |           |
| N                           | BMVWVW-t | MT20   | 5.0 | 8.0  |           |
| O                           | BS-t     | MT20   | 5.0 | 6.0  |           |
| P                           | BMVW-t   | MT20   | 5.0 | 6.0  | 2.50 2.75 |
| Q                           | BMVW-t   | MT20   | 8.0 | 9.0  | 4.25 4.50 |
| R                           | BMV1+p   | MT20   | 3.0 | 8.0  |           |




Structural component only  
DWG# T-2007765 1/2

|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T77</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| TRUSS DESC.               |                          |                      |                 |                                      |          |

Temareck Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:16 2020 Page 1  
ID:Lv307gsCyJh1stHbR4r5BVziesG-mYpJ2sFbISJ7gaQ2qC8MVuPHCl\_u9azkafr3VzMDGS  
7-3-12 10-8-0

Scale = 1:28.2

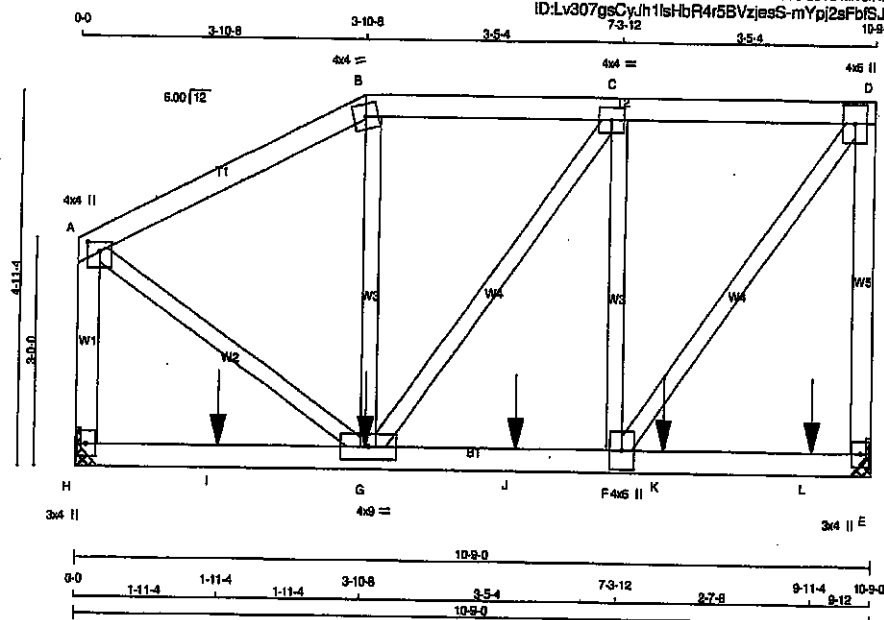

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER |
|--------|---------|--------|
| A - B  | 2x4 DRY | No.2   |
| B - D  | 2x4 DRY | No.2   |
| E - D  | 2x4 DRY | No.2   |
| H - A  | 2x4 DRY | No.2   |
| H - E  | 2x4 DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| A  | TMVW-p | MT20   | 4.0 | 4.0 | 1.50 | 2.00 |
| B  | TTW-m  | MT20   | 4.0 | 4.0 |      |      |
| C  | TMVW-t | MT20   | 4.0 | 4.0 |      |      |
| D  | TMVW-p | MT20   | 4.0 | 4.0 |      |      |
| E  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |
| F  | BMVW-t | MT20   | 4.0 | 4.0 |      |      |
| G  | BMVW-t | MT20   | 4.0 | 4.0 |      |      |
| H  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| SPF | FACTORED       | MAXIMUM FACTORED | INPUT | REQ'D   |
|-----|----------------|------------------|-------|---------|
| SPF | GROSS REACTION | GROSS REACTION   | BRG   | BRG     |
| JT  | VERT           | HORZ             | DOWN  | UP/LIFT |
| E   | 1114           | 0                | 1114  | 0       |
| H   | 1022           | 0                | 1022  | 0       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E, H. MINIMUM BEARING LENGTH AT JOINT E = 3-8, JOINT H = 3-8.

##### UNFACTORED REACTIONS

| 1ST LOASE |          | MAX. MIN. COMPONENT REACTIONS |       |            |       |         |       |
|-----------|----------|-------------------------------|-------|------------|-------|---------|-------|
| JT        | COMBINED | SNOW                          | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
| E         | 783      | 540 / 0                       | 0 / 0 | 0 / 0      | 0 / 0 | 243 / 0 | 0 / 0 |
| H         | 719      | 493 / 0                       | 0 / 0 | 0 / 0      | 0 / 0 | 226 / 0 | 0 / 0 |

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED | FACTORED   | VERT. LOAD | LC1      | MAX   | MAX.  | MEMB.    | MAX. FACTORED |
|--------|---------------|------------|------------|----------|-------|-------|----------|---------------|
| MEMB.  | FORCE         | VERT. LOAD | LC1        | MAX      | MAX.  | MEMB. | FORCE    | MAX           |
| FR-TO  | FROM          | TO         | FROM       | TO       | FROM  | TO    | FROM     | TO            |
| A-B    | -687 / 0      | -91.8      | -91.8      | 0.27 (1) | 6.25  | G-B   | 0 / 42   | 0.02 (4)      |
| B-C    | -623 / 0      | -91.8      | -91.8      | 0.19 (1) | 6.25  | G-C   | 0 / 25   | 0.01 (4)      |
| C-D    | -609 / 0      | -91.8      | -91.8      | 0.19 (1) | 6.25  | F-C   | -405 / 0 | 0.15 (1)      |
| E-D    | -637 / 0      | 0.0        | 0.0        | 0.39 (1) | 7.81  | F-D   | 0 / 1015 | 0.25 (1)      |
| H-A    | -912 / 0      | 0.0        | 0.0        | 0.15 (1) | 7.81  | A-G   | 0 / 752  | 0.19 (1)      |
| H-I    | 0 / 0         | -18.5      | -18.5      | 0.27 (1) | 10.00 |       |          |               |
| I-G    | 0 / 0         | -18.5      | -18.5      | 0.27 (1) | 10.00 |       |          |               |
| G-J    | 0 / 809       | -18.5      | -18.5      | 0.30 (1) | 10.00 |       |          |               |
| J-F    | 0 / 809       | -18.5      | -18.5      | 0.30 (1) | 10.00 |       |          |               |
| F-K    | 0 / 0         | -18.5      | -18.5      | 0.21 (1) | 10.00 |       |          |               |
| K-L    | 0 / 0         | -18.5      | -18.5      | 0.21 (1) | 10.00 |       |          |               |
| L-E    | 0 / 0         | -18.5      | -18.5      | 0.21 (1) | 10.00 |       |          |               |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1  | MAX. | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|------|------|------|-------|------|-------|------|-------|
| G  | 3-11-4 | -187 | -187 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| I  | 1-11-4 | -200 | -200 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| J  | 5-11-4 | -187 | -187 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| K  | 7-11-4 | -187 | -187 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| L  | 9-11-4 | -189 | -189 | ---  | FRONT | VERT | TOTAL | ---  | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 52 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |      |      |     |
|--------------|------|------|-----|
| TOP CH.      | LL = | 25.8 | PSF |
| DL =         | 8.0  | PSF  |     |
| BOT CH.      | LL = | 0.0  | PSF |
| DL =         | 7.4  | PSF  |     |
| TOTAL LOAD = | 39.0 | PSF  |     |

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.36")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")  
ALLOWABLE DEFL.(TL) = L/360 (0.36")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TC=0.39/1.00 (D-E:1), BC=0.30/1.00 (F-G:1),  
WB=0.25/1.00 (D-F:1), SS=0.23/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR   | SECTION |
|-----------------|---------|---------|
| (PSI)           | (PLI)   | (PLI)   |
| MAX MIN         | MAX MIN | MAX MIN |
| MT20            | 618     | 354     |
|                 | 1667    | 788     |
|                 | 1987    | 1665    |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.61 (A) (INPUT = 0.90)  
JSI METAL= 0.27 (D) (INPUT = 1.00)




Structural component only  
DWG# T-2007766

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>T78</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:18 2020 Page 1  
ID:Lv307gsCyJh1shBR4r5BVjesS-ixTtYHsB3Zjvt09EFcRwzo60UXMzaGCu8y7OzMDG7

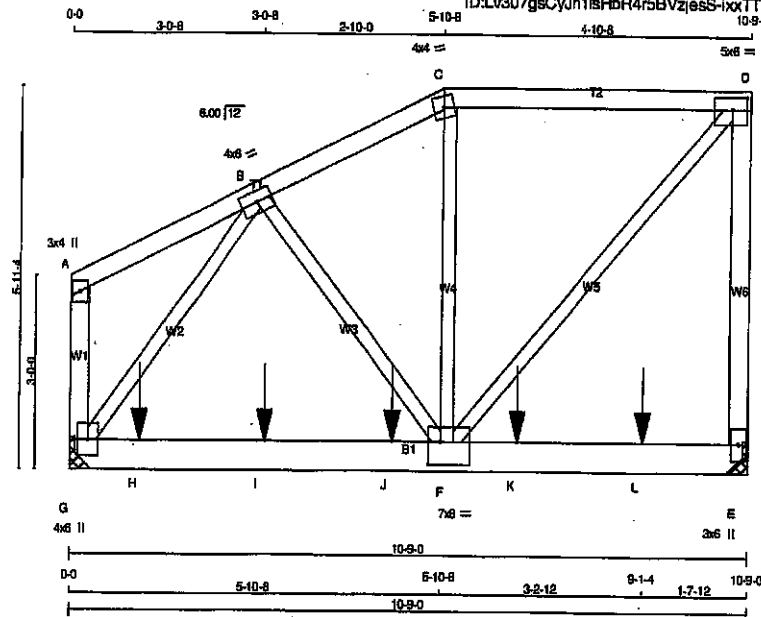

TOTAL WEIGHT = 2 X 56 = 112 lb

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER     | DESCR. |
|--------|---------|------------|--------|
| A - C  | 2x4 DRY | No.2       | SPF    |
| C - D  | 2x4 DRY | No.2       | SPF    |
| G - A  | 2x4 DRY | No.2       | SPF    |
| G - E  | 2x6 DRY | 2100F 1.8E | SPF    |

|          |     |     |      |
|----------|-----|-----|------|
| ALL WEBS | 2x3 | DRY | No.2 |
| EXCEPT   |     |     |      |
| E - D    | 2x4 | DRY | No.2 |

DRY, SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A - C                                    | 12                   | TOP        |
| C - D                                    | 12                   | TOP        |
| G - A                                    | 12                   | TOP        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| G - E                                    | 12                   | SIDE (0.0) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3                                      | 6                    |            |
| 2x4                                      | 6                    |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

#### PLATES (table in inches)

| JT | TYPE  | PLATES | W   | LEN | Y | X |
|----|-------|--------|-----|-----|---|---|
| A  | TMV+p | MT20   | 3.0 | 4.0 |   |   |
| B  | TMW+1 | MT20   | 4.0 | 6.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| FACTORED       | MAXIMUM FACTORED | INPUT | REQD  |
|----------------|------------------|-------|-------|
| GROSS REACTION | GROSS REACTION   | BRG   | BRG   |
| JT VERT        | DOWN             | UP    | IN-SX |
| E 3931         | 0                | 3931  | 0     |
| G 4176         | 0                | 4176  | 0     |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E, G. MINIMUM BEARING LENGTH AT JOINT E = 4-0, JOINT G = 4-0.

#### UNFACTORED REACTIONS

| 1ST CASE |          | MAX/MIN. COMPONENT REACTIONS |       |            |       |         |       |
|----------|----------|------------------------------|-------|------------|-------|---------|-------|
| JT       | COMBINED | SNOW                         | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
| E        | 2776     | 1848 / 0                     | 0 / 0 | 0 / 0      | 0 / 0 | 929 / 0 | 0 / 0 |
| G        | 2949     | 1950 / 0                     | 0 / 0 | 0 / 0      | 0 / 0 | 988 / 0 | 0 / 0 |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.47 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED | FACTORED             | WEBS                       | MAX. FACTORED     |
|--------|---------------|----------------------|----------------------------|-------------------|
| MEMB.  | FORCE (LBS)   | VERT. LOAD LC1 (PLF) | MAX. UNBRACED LENGTH FR-TO | MEMB. FORCE (LBS) |
| FR-TO  |               |                      |                            |                   |
| A-B    | 0 / 10        | -91.8 -91.8 0.05 (1) | 10.00                      | E-D -3159 / 0     |
| B-C    | -2721 / 0     | -91.8 -91.8 0.08 (1) | 5.47                       | B-F 0 / 1117      |
| C-D    | -2438 / 0     | -91.8 -91.8 0.24 (1) | 5.50                       | F-C 0 / 878       |
| G-A    | -113 / 0      | 0.0 0.0 0.01 (1)     | 7.81                       | F-D 0 / 3872      |
| G-B    | -2998 / 0     |                      |                            |                   |
| G-H    | 0 / 1756      | -18.5 -18.5 0.55 (1) | 10.00                      |                   |
| H-I    | 0 / 1756      | -18.5 -18.5 0.55 (1) | 10.00                      |                   |
| I-J    | 0 / 1756      | -18.5 -18.5 0.55 (1) | 10.00                      |                   |
| J-F    | 0 / 1756      | -18.5 -18.5 0.55 (1) | 10.00                      |                   |
| F-K    | -83 / 0       | -18.5 -18.5 0.50 (1) | 6.25                       |                   |
| K-L    | -83 / 0       | -18.5 -18.5 0.50 (1) | 6.25                       |                   |
| L-E    | -83 / 0       | -18.5 -18.5 0.50 (1) | 6.25                       |                   |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.  | LC1   | MAX-  | MAX+ | FACE | DIF. | TYPE  | HEEL | CONN. |
|----|-------|-------|-------|------|------|------|-------|------|-------|
| H  | 1-1-4 | -1385 | -1385 |      | BACK | VERT | TOTAL |      | C1    |
| I  | 3-1-4 | -1385 | -1385 |      | BACK | VERT | TOTAL |      | C1    |
| J  | 5-1-4 | -1385 | -1385 |      | BACK | VERT | TOTAL |      | C1    |
| K  | 7-1-4 | -1385 | -1385 |      | BACK | VERT | TOTAL |      | C1    |
| L  | 9-1-4 | -1385 | -1385 |      | BACK | VERT | TOTAL |      | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|                       |               |
|-----------------------|---------------|
| TOP CH.               | LL = 25.8 PSF |
| DL = 6.0 PSF          |               |
| BOT CH.               | LL = 0.0 PSF  |
| DL = 7.4 PSF          |               |
| TOTAL LOAD = 39.0 PSF |               |

SPACING = 2x0 N.C.C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.35")  
CALCULATED VERT. DEFL. (LL) = L/989 (0.08")  
ALLOWABLE DEFL. (TL) = L/360 (0.35")  
CALCULATED VERT. DEFL. (TL) = L/805 (0.16")

CSI: TC=0.24/1.00 (C-D:1), BC=0.55/1.00 (F-G:1), WB=0.60/1.00 (B-G:1), SSI=0.87/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE   | GRIP (DRY) | SHEAR   | SECTION |
|---------|------------|---------|---------|
| (PSI)   | (PL)       | (PL)    | (PL)    |
| MAX MIN | MAX MIN    | MAX MIN | MAX MIN |
| MT20    | 618        | 354     | 1667    |
|         | 788        | 1997    | 1658    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (D) (INPUT = 0.90)  
JSI METAL = 0.40 (G) (INPUT = 1.00)



Structural component only  
DWG# T-2007767 1/2

CONTINUED ON PAGE 2

|                                 |            |             |     |                  |          |
|---------------------------------|------------|-------------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY    | PLY | JOB DESC.        | DRWG NO. |
| 408265                          | T78        | 1           | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            | TRUSS DESC. |     |                  |          |

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Apr 28 11:19:18 2020 Page 2


ID:lv307qsCwJh1gHbR4r5BVziesS-ix:TTYHsB3Zvito9EFcRwza60UXMzaGCu8v7OzMDG7

**PLATES** (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| C  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| D  | TMWW-t  | MT20   | 5.0 | 6.0 | 2.25 | 2.75 |
| E  | BMW1-w  | MT20   | 3.0 | 6.0 |      |      |
| F  | BMWWW-t | MT20   | 7.0 | 8.0 | 4.25 | 2.25 |
| G  | BMWW1-p | MT20   | 4.0 | 6.0 |      |      |



Structural component only  
DWG# T-2007767 32

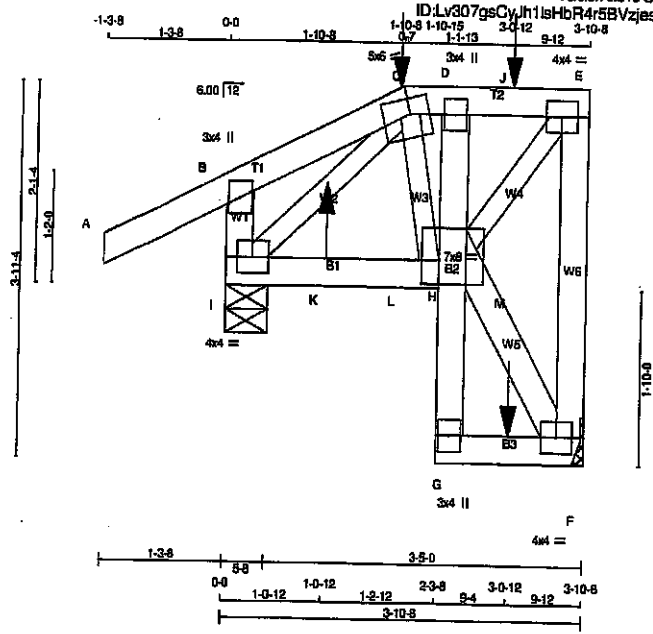

**LUMBER**

N. L. G. A. RULES

| CHORDS          | SIZE | LUMBER | DESCR. |
|-----------------|------|--------|--------|
| A - C           | 2x4  | DRY    | No.2   |
| C - E           | 2x4  | DRY    | No.2   |
| E - G           | 2x4  | DRY    | No.2   |
| G - I           | 2x4  | DRY    | No.2   |
| I - K           | 2x4  | DRY    | No.2   |
| K - L           | 2x4  | DRY    | No.2   |
| L - M           | 2x4  | DRY    | No.2   |
| M - N           | 2x4  | DRY    | No.2   |
| N - O           | 2x4  | DRY    | No.2   |
| O - P           | 2x4  | DRY    | No.2   |
| P - Q           | 2x4  | DRY    | No.2   |
| Q - R           | 2x4  | DRY    | No.2   |
| R - S           | 2x4  | DRY    | No.2   |
| S - T           | 2x4  | DRY    | No.2   |
| T - U           | 2x4  | DRY    | No.2   |
| U - V           | 2x4  | DRY    | No.2   |
| V - W           | 2x4  | DRY    | No.2   |
| W - X           | 2x4  | DRY    | No.2   |
| X - Y           | 2x4  | DRY    | No.2   |
| Y - Z           | 2x4  | DRY    | No.2   |
| ALL WEBS EXCEPT | 2x3  | DRY    | No.2   |
| H - F           | 2x4  | DRY    | No.2   |

DRY: SEASONED LUMBER.

**PLATES (tablets in inches)**

| JT | TYPE     | PLATES | W   | LEN | Y    | X    |
|----|----------|--------|-----|-----|------|------|
| B  | TMV+p    | MT20   | 3.0 | 4.0 |      |      |
| C  | TTW+m    | MT20   | 5.0 | 8.0 | 2.00 | 2.50 |
| D  | TMV+p    | MT20   | 3.0 | 4.0 |      |      |
| E  | TMVW-t   | MT20   | 4.0 | 4.0 |      |      |
| F  | BMVW-t   | MT20   | 4.0 | 4.0 |      |      |
| G  | BMV+p    | MT20   | 3.0 | 4.0 |      |      |
| H  | BMVWVW-t | MT20   | 7.0 | 8.0 | 3.00 | 2.25 |
| I  | BMVW-t   | MT20   | 4.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| F  | 219                     | 0    | 219                             | 0    | 5-8       | 5-8      |
| I  | 340                     | 0    | 340                             | 0    | 5-8       | 5-8      |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

**UNFACTORED REACTIONS**

| JT       | COMBINED | SNOW  | LIVE | PERM. LIVE | WIND | DEAD | SOIL |
|----------|----------|-------|------|------------|------|------|------|
| F        | 155      | 101/0 | 0/0  | 0/0        | 0/0  | 54/0 | 0/0  |
| 07582145 | 238/26   | 0/0   | 0/0  | 0/0        | 0/0  | 89/0 | 0/0  |

**HORIZONTAL REACTIONS**

| JT | COMBINED | SNOW | LIVE | PERM. LIVE | WIND | DEAD | SOIL   |
|----|----------|------|------|------------|------|------|--------|
| F  | 6205     | 1622 | 486  | 625        | 734  | 810  | 88 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (8)

|     |        |       |       |          |       |  |  |  |  |  |  |  |  |  |  |
|-----|--------|-------|-------|----------|-------|--|--|--|--|--|--|--|--|--|--|
| J-E | -110/0 | 88.9  | -88.9 | 0.03 (1) | 6.25  |  |  |  |  |  |  |  |  |  |  |
| F-E | -200/0 | 0.0   | 0.0   | 0.05 (1) | 7.81  |  |  |  |  |  |  |  |  |  |  |
| I-B | -212/0 | 0.0   | 0.0   | 0.02 (1) | 7.81  |  |  |  |  |  |  |  |  |  |  |
|     |        |       |       |          |       |  |  |  |  |  |  |  |  |  |  |
| I-K | 0/115  | -17.9 | -17.9 | 0.04 (4) | 10.00 |  |  |  |  |  |  |  |  |  |  |
| K-L | 0/115  | -17.9 | -17.9 | 0.04 (4) | 10.00 |  |  |  |  |  |  |  |  |  |  |
| L-H | 0/115  | -17.9 | -17.9 | 0.04 (4) | 10.00 |  |  |  |  |  |  |  |  |  |  |
| G-H | 0/17   | 0.0   | 0.0   | 0.01 (1) | 10.00 |  |  |  |  |  |  |  |  |  |  |
| H-D | -105/0 | 0.0   | 0.0   | 0.01 (1) | 7.81  |  |  |  |  |  |  |  |  |  |  |
| G-M | 0/3    | -17.9 | -17.9 | 0.02 (4) | 10.00 |  |  |  |  |  |  |  |  |  |  |
| M-F | 0/3    | -17.9 | -17.9 | 0.02 (4) | 10.00 |  |  |  |  |  |  |  |  |  |  |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.    | LC1 | MAX. | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|---------|-----|------|------|-------|------|-------|------|-------|
| C  | 1-10-15 | -15 | -15  |      | FRONT | VERT | TOTAL |      | C1    |
| J  | 3-0-12  | -3  | -3   |      | BACK  | VERT | TOTAL |      | C1    |
| K  | 1-0-12  | 6   | 1    | 12   | BACK  | VERT | TOTAL |      | C1    |
| M  | 3-0-12  | -3  | -3   |      | BACK  | VERT | TOTAL |      | C1    |

**CONNECTION REQUIREMENTS**

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

**SPACING = 24.0 IN. OC**

**LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM**

\*\*\* NON STANDARD GIRDER \*\*\*  
THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 8, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 8 OF CBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.17/1.00 (A-B-5), BC=0.04/1.00 (H-I-4), WB=0.04/1.00 (E-F-1), SS=0.12/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1887 788 1987 1888

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.25 (H) (INPUT = 0.90)  
JSI METAL = 0.05 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007768

|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408265   | T80        | 1        | 1   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:20 2020 Page 1  
ID:lv307gsCyJh1shHr4r5BVjesS-eJ3EuE(6)hpR8B1BHH4WL29ppHqg\_2Z(Cd2CHzMDGS

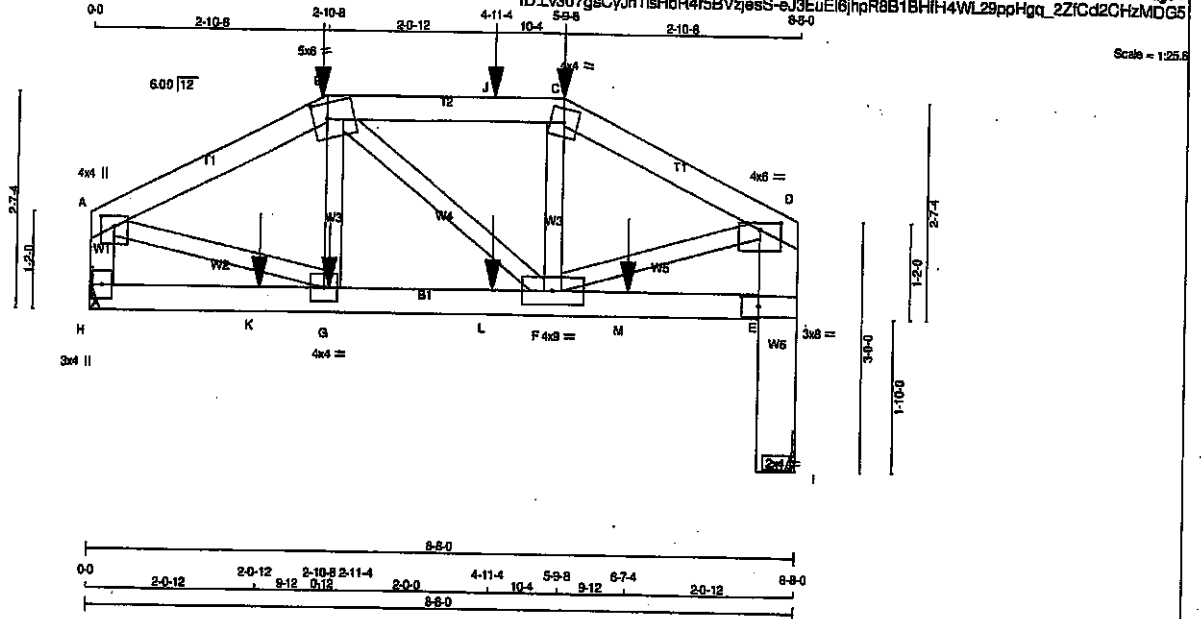

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - B  | 2x4  | DRY | No.2   |
| B - C  | 2x4  | DRY | No.2   |
| C - D  | 2x4  | DRY | No.2   |
| H - A  | 2x4  | DRY | No.2   |
| I - D  | 2x6  | DRY | No.2   |
| H - E  | 2x4  | DRY | No.2   |

ALL WEBS  
EXCEPT

DRY, SEASONED LUMBER.

#### PLATES (table in (inches))

| JT TYPE     | PLATES | W   | LEN | Y    | X    |
|-------------|--------|-----|-----|------|------|
| A - TMVW-p  | MT20   | 4.0 | 4.0 | 1.50 | 2.00 |
| A - TP-p    | MT20   | 2.0 | 4.0 |      |      |
| B - TTWW-m  | MT20   | 5.0 | 6.0 | 2.25 | 2.00 |
| C - TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| D - TMVW-p  | MT20   | 4.0 | 6.0 | 1.00 | 3.00 |
| E - BVW     | MT20   | 3.0 | 8.0 | 1.50 | 2.50 |
| F - BMVWV-I | MT20   | 4.0 | 8.0 |      |      |
| G - BMVWV-I | MT20   | 4.0 | 4.0 |      |      |
| H - BMV1-p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

##### BUILDING DESIGNER

| BEARINGS | FACTORED       | MAXIMUM FACTORED | INPUT      | REQD       |
|----------|----------------|------------------|------------|------------|
|          | GROSS REACTION | GROSS REACTION   | BRG        | BRG        |
| JT       | VERT           | DOWN             | HORIZ      | IN-SX      |
| H        | 838            | 0                | 638        | 0          |
| I        | 635            | 0                | 635        | 0          |
|          |                |                  | MECHANICAL | MECHANICAL |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H, I. MINIMUM BEARING LENGTH AT JOINT H = 1-8, JOINT I = 1-8.

#### UNFACTORED REACTIONS

| 1ST CASE     | MAX/MIN. COMPONENT REACTIONS |       |            |      |       |      |  |
|--------------|------------------------------|-------|------------|------|-------|------|--|
| JT: COMBINED | SNOW                         | LIVE  | PERM. LIVE | WIND | DEAD  | SOIL |  |
| I            | 450                          | 303/0 | 0/0        | 0/0  | 147/0 | 0/0  |  |
| I            | 447                          | 303/0 | 0/0        | 0/0  | 144/0 | 0/0  |  |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED | FACTORED       | MAX.           | WEBS  | MAX. FACTORED | MAX.     |
|--------|---------------|----------------|----------------|-------|---------------|----------|
| MEMB.  | FORCE         | VERT. LOAD LC1 | MAX            | MEMB. | FORCE         | MAX      |
|        | (LBS)         | (PLF)          | CSI (LC)       |       | (LBS)         | CSI (LC) |
| FR-TO  |               | FROM TO        | LENGTH         | FR-TO |               |          |
| A-B    | -679/0        | -91.8          | -91.8 0.15 (1) | 6.25  | G-B           | -111/17  |
| B-J    | -588/0        | -91.8          | -91.8 0.15 (1) | 6.25  | B-F           | -4/0     |
| J-C    | -588/0        | -91.8          | -91.8 0.15 (1) | 6.25  | F-C           | -106/21  |
| C-D    | -679/0        | -91.8          | -91.8 0.15 (1) | 6.25  | A-G           | 0/631    |
| H-A    | -812/0        | 0.0            | 0.0 0.07 (1)   | 7.81  | F-D           | 0/630    |
| I-E    | -835/0        | 0.0            | 0.0 0.08 (1)   | 7.81  |               |          |
| E-D    | -807/0        | 0.0            | 0.0 0.04 (1)   | 7.81  |               |          |
| H-K    | 0/0           | -18.5          | -18.5 0.04 (4) | 10.00 |               |          |
| K-G    | 0/0           | -18.5          | -18.5 0.04 (4) | 10.00 |               |          |
| G-L    | 0/802         | -18.5          | -18.5 0.12 (1) | 10.00 |               |          |
| L-F    | 0/802         | -18.5          | -18.5 0.12 (1) | 10.00 |               |          |
| F-M    | 0/0           | -18.5          | -18.5 0.04 (4) | 10.00 |               |          |
| M-E    | 0/0           | -18.5          | -18.5 0.04 (4) | 10.00 |               |          |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.    | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|---------|------|------|------|-------|------|-------|------|-------|
| B  | 2-10-8  | -149 | -149 | -    | FRONT | VERT | TOTAL | -    | C1    |
| C  | 5-9-8   | -135 | -135 | -    | FRONT | VERT | TOTAL | -    | C1    |
| G  | 2-11-4  | -5   | -5   | -    | FRONT | VERT | TOTAL | -    | C1    |
| J  | 4-11-4  | -14  | -14  | -    | FRONT | VERT | TOTAL | -    | C1    |
| K  | 2-10-12 | -5   | -5   | -    | FRONT | VERT | TOTAL | -    | C1    |
| L  | 4-11-4  | -5   | -5   | -    | FRONT | VERT | TOTAL | -    | C1    |
| M  | 6-7-4   | -5   | -5   | -    | FRONT | VERT | TOTAL | -    | C1    |

#### CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 36 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |      |      |     |
|------------|------|------|-----|
| TOP CH.    | LL = | 25.6 | PSF |
|            | DL = | 6.0  | PSF |
| BOT CH.    | LL = | 0.0  | PSF |
|            | DL = | 7.4  | PSF |
| TOTAL LOAD | =    | 39.0 | PSF |

SPACING = 24" O.C.

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.29")

CALCULATED VERT. DEFL.(LL) = L/898 (0.01")

ALLOWABLE DEFL.(TL) = L/360 (0.29")

CALCULATED VERT. DEFL.(TL) = L/898 (0.01")

CS1: TC=0.18/1.00 (B-C:1), SC=0.12/1.00 (F-G:1),

WB=0.18/1.00 (A-G:1), SS=0.12/1.00 (B-C:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.00

COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION

(PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN

MT20 818 354 1567 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.75 (G) (INPUT = 0.90)

JSI METAL = 0.23 (G) (INPUT = 1.00)




Structural component only  
DWG# T-2007769

|                           |                          |                      |                 |                                      |             |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>TB1</b> | QUANTITY<br><b>1</b> | PLY<br><b>2</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:21 2020 Page 1  
ID1v307gsCyJh1shbR4r5BVzfesS-6Wdc8aJkU\_ximLcNNoJ3YbJ2DUY2P6iusMckjzMDG4

Scale = 1:30.3

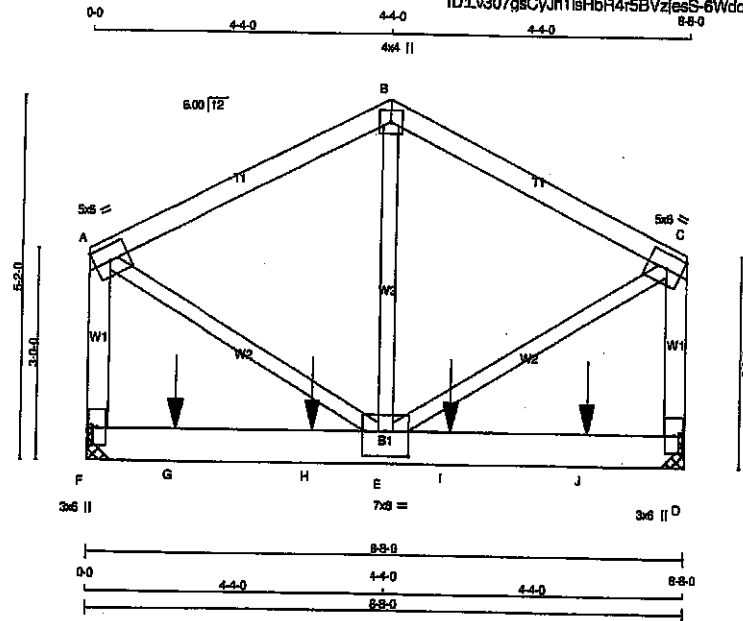

#### LUMBER

| N. L. G. A. RULES | SIZE | LUMBER | DESCR. |
|-------------------|------|--------|--------|
| CHORDS            |      |        |        |
| A - B             | 2x4  | DRY    | No.2   |
| B - C             | 2x4  | DRY    | No.2   |
| F - A             | 2x4  | DRY    | No.2   |
| D - C             | 2x4  | DRY    | No.2   |
| F - D             | 2x6  | DRY    | No.2   |

ALL WEBS 2x3 DRY No.2 SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A-B 1                                    | 12                   | TOP        |
| B-C 1                                    | 12                   | TOP        |
| F-A 1                                    | 12                   | TOP        |
| D-C 1                                    | 12                   | TOP        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| F-D 2                                    | 12                   | SIDE(0.0)  |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3 1                                    | 6                    |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y | X    |
|----|--------|--------|-----|-----|---|------|
| A  | TMVW-1 | MT20   | 5.0 | 8.0 |   | Edge |
| B  | TTW+p  | MT20   | 4.0 | 4.0 |   |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | DOWN                            | UP        | IN-SX    |
| F  | 3511                    | 0                               | 3511      | 0        |
| D  | 3425                    | 0                               | 3425      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F, D. MINIMUM BEARING LENGTH AT JOINT F = 4'-0, JOINT D = 4'-0.

##### UNFACTORED REACTIONS

| JT | COMBINED | SNOW | LIVE | PERM. LIVE | WIND | DEAD | SOIL |
|----|----------|------|------|------------|------|------|------|
| F  | 2480     | 1847 | 0    | 0          | 0    | 833  | 0    |
| D  | 2419     | 1807 | 0    | 0          | 0    | 812  | 0    |

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.66 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED | FACTORED | VERT. LOAD | LC1   | MAX  | CS1 | LC    | WEBS  | MAX. FACTORED | MEMB. | FORCE | MAX | CS1 | LC |
|--------|---------------|----------|------------|-------|------|-----|-------|-------|---------------|-------|-------|-----|-----|----|
| FR-TO  |               |          |            |       |      |     |       | FR-TO |               |       |       |     |     |    |
| A-B    | -2294         | 0        | -91.8      | -91.8 | 0.19 | (1) | 5.69  | E-B   | 0             | 1854  | 0.20  | (1) |     |    |
| B-C    | -2294         | 0        | -91.8      | -91.8 | 0.19 | (1) | 5.69  | A-E   | 0             | 2394  | 0.30  | (1) |     |    |
| F-A    | -2459         | 0        | 0.0        | 0.0   | 0.19 | (1) | 7.20  | E-C   | 0             | 2394  | 0.30  | (1) |     |    |
| D-C    | -2459         | 0        | 0.0        | 0.0   | 0.19 | (1) | 7.20  |       |               |       |       |     |     |    |
| F-G    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |
| G-H    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |
| H-E    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |
| E-I    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |
| I-J    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |
| J-D    | 0             | 0        | -18.5      | -18.5 | 0.68 | (1) | 10.00 |       |               |       |       |     |     |    |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.  | LC1   | MAX.  | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|-------|-------|-------|------|-------|------|-------|------|-------|
| G  | 1-3-4 | -1495 | -1495 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| H  | 3-3-4 | -1495 | -1495 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| I  | 5-3-4 | -1495 | -1495 | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| J  | 7-3-4 | -1495 | -1495 | ---  | FRONT | VERT | TOTAL | ---  | C1    |

##### CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 43 = 87 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.8 | PSF |
|            | DL | = 8.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD |    | = 39.0 | PSF |

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) =  $L/360$  (0.29")  
CALCULATED VERT. DEFL. (LL) =  $L/999$  (0.03")  
ALLOWABLE DEFL. (TL) =  $L/360$  (0.29")  
CALCULATED VERT. DEFL. (TL) =  $L/999$  (0.06")

CS1: TC=0.19/1.00 (A-F:1), BC=0.68/1.00 (D-E:1), WB=0.30/1.00 (A-E:1), SS=0.70/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PLI) | (PLI)   |
|       | MAX       | MIN   | MAX     |
| MT20  | 618       | 354   | 1987    |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.74 (B) (INPUT = 0.90)  
JSI METAL = 0.29 (A) (INPUT = 1.00)

CONTINUED ON PAGE 2



Structural component only  
DWG# T-2007770

|                                 |                   |               |          |                               |          |
|---------------------------------|-------------------|---------------|----------|-------------------------------|----------|
| JOB NAME<br>408265              | TRUSS NAME<br>T81 | QUANTITY<br>1 | PLY<br>2 | JOB DESC.<br>GREEN PARK HOMES | DRWG NO. |
| Tamarack Roof Truss, Burlington |                   |               |          | TRUSS DESC.                   |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:21 2020 Page 2  
 ID:lv307qsCwJh1IsHbR4r5BVzfasS-6Wdc8sJkU xlmLcNrNoJ3YbJ2DUYZP8iusMckizMDG4

**PLATES** (table is in inches)


| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| C  | TMVW-t  | MT20   | 5.0 | 6.0 |      | Edge |
| D  | BMV1-p  | MT20   | 3.0 | 6.0 |      |      |
| E  | BMVWW-t | MT20   | 7.0 | 6.0 | 4.25 | 4.00 |
| F  | BMV1-p  | MT20   | 3.0 | 6.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.



Structural component only  
 DWG# T-2007770 2/2

|                                                                                                        |                          |                                                                          |                 |                                                                                    |          |
|--------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------------|----------|
| JOB NAME<br><b>408265</b>                                                                              | TRUSS NAME<br><b>T82</b> | QUANTITY<br><b>1</b>                                                     | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b>                                               | DRWG NO. |
| Tamarack Roof Truss, Burlington                                                                        |                          | TRUSS DESC.                                                              |                 | Version 8.310 S Oct 29 2018 Mitek Industries, Inc. Tue Apr 28 11:19:23 2020 Page 1 |          |
| 1-3-8 0-0 3-0-8 3-0-8 2-10-0 5-10-8 3-10-8 9-9-0 2-10-8 13-7-8 2-10-9 16-5-8 3-0-8 19-6-0 1-3-8 20-9-8 |                          | ID1.v307qsCyJh1sfHbR4r5BVZesS-3ukMXGK 0cB??emmyoqn8zgd116J1AY?LAr1ozMDG2 |                 |                                                                                    |          |
| Scale = 1:32.7                                                                                         |                          |                                                                          |                 |                                                                                    |          |

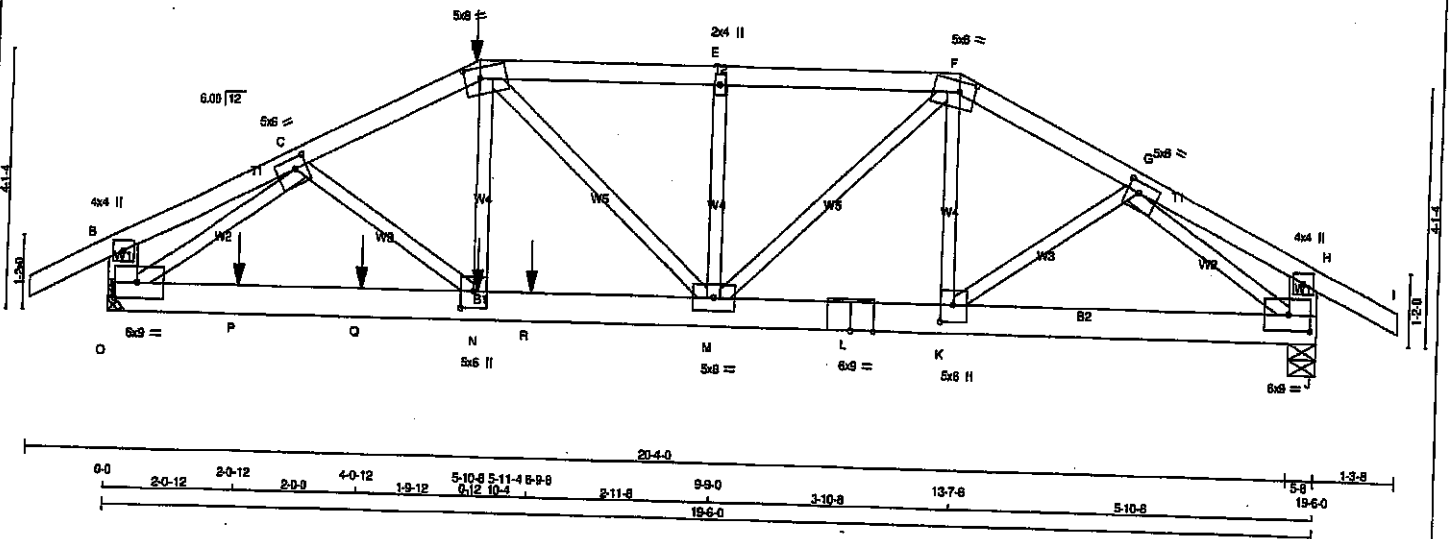

| LUMBER            |        |      |        |
|-------------------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |
| A - D             | 2x4    | DRY  | No.2   |
| D - F             | 2x4    | DRY  | No.2   |
| F - I             | 2x4    | DRY  | No.2   |
| O - B             | 2x6    | DRY  | No.2   |
| J - H             | 2x6    | DRY  | No.2   |
| O - L             | 2x6    | DRY  | No.2   |
| L - J             | 2x6    | DRY  | No.2   |

ALL WEBS 2x3 DRY No.2  
EXCEPT

DRY: SEASONED LUMBER.

#### PLATES (Table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMV+p  | MT20   | 4.0 | 4.0 |      |      |
| C  | TMWV-t | MT20   | 5.0 | 6.0 | 2.00 | 2.25 |
| D  | TTWW-m | MT20   | 5.0 | 8.0 | 2.00 | 3.00 |
| E  | TMWV-w | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m | MT20   | 5.0 | 8.0 | 2.00 | 3.00 |
| G  | TMWV-t | MT20   | 5.0 | 6.0 | 2.00 | 2.25 |
| H  | TMV+p  | MT20   | 4.0 | 4.0 |      |      |
| J  | BMWV-t | MT20   | 8.0 | 8.0 | 3.00 | 4.25 |
| K  | BMWV-t | MT20   | 5.0 | 6.0 | 3.25 | 2.50 |
| L  | BS-t   | MT20   | 6.0 | 9.0 |      |      |
| M  | BMWV-t | MT20   | 5.0 | 8.0 |      |      |
| N  | BMWV-t | MT20   | 5.0 | 6.0 | 3.25 | 2.50 |
| O  | BMWV-t | MT20   | 6.0 | 9.0 | 3.00 | 4.25 |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                         |                                 |                    |
|----------|-------------------------|---------------------------------|--------------------|
| JT       | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT RECORD       |
| O        | 2518 0                  | 2518 0                          | BRG IN-SX          |
| J        | 1854 0                  | 1854 0                          | MECHANICAL 5-8 5-8 |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT O. MINIMUM BEARING LENGTH AT JOINT O = 3-8.

#### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX. MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|----------|-------------------------------|-------|-------|------------|-------|---------|-------|
| O  | 1774     | 1204 / 0                      | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 570 / 0 | 0 / 0 |
| J  | 1305     | 890 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 415 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.38 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                                    |
|--------|---------------------------|---------------------------|------------------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. FACTORED UNBRACED LENGTH (FT) |
| FR-TO  |                           |                           |                                    |
| A-B    | 0 / 28                    | -91.8                     | 10.00                              |
| B-C    | 0 / 6                     | -91.8                     | 10.00                              |
| C-D    | -3689 / 0                 | -91.8                     | 10.00                              |
| D-E    | -3197 / 0                 | -91.8                     | 10.00                              |
| E-F    | -3197 / 0                 | -91.8                     | 10.00                              |
| F-G    | -2493 / 0                 | -91.8                     | 10.00                              |
| G-H    | 0 / 9                     | -91.8                     | 10.00                              |
| H-I    | 0 / 28                    | -91.8                     | 10.00                              |
| O-B    | -246 / 0                  | 0.0                       | 10.00                              |
| J-H    | -239 / 0                  | 0.0                       | 10.00                              |
| O-P    | 0 / 2927                  | -18.5                     | 10.00                              |
| P-Q    | 0 / 2927                  | -18.5                     | 10.00                              |
| Q-N    | 0 / 2927                  | -18.5                     | 10.00                              |
| N-R    | 0 / 3327                  | -18.5                     | 10.00                              |
| R-M    | 0 / 3327                  | -18.5                     | 10.00                              |
| M-L    | 0 / 2216                  | -18.5                     | 10.00                              |
| L-K    | 0 / 2216                  | -18.5                     | 10.00                              |
| K-J    | 0 / 2044                  | -18.5                     | 10.00                              |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1   | MAX.  | MAX. | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-------|-------|------|------|------|-------|------|-------|
| D  | 5-10-8 | -459  | -459  | ---  | BACK | VERT | TOTAL | ---  | C1    |
| N  | 5-11-4 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| P  | 2-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| Q  | 4-0-12 | -26   | -26   | ---  | BACK | VERT | TOTAL | ---  | C1    |
| R  | 6-9-8  | -1435 | -1435 | ---  | BACK | VERT | TOTAL | ---  | C1    |

#### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 92 lb

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, OBC 2012, ABC 2019  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TFC 2011, TFC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.85")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")  
ALLOWABLE DEFL.(TL) = L/360 (0.85")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.38/1.00 (E-F:1), BC=0.96/1.00 (M-N:1), WB=0.98/1.00 (C-O:1), SS=0.78/1.00 (M-N:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1657 788 1987 1858

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (C) (INPUT = 0.90)  
JSI METAL = 0.96 (C) (INPUT = 1.00)



Structural component only  
DWG# T-2007771


|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408265   | T83        | 1        | 1   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:19:24 2020 Page 1

ID:Lv307gsCyJh1lsHbR4r5BVzlesS-X5tkbLcnvJsd0LyWVM0gBDI\_Rbvmk9aqbGL2zMDG1

Scale = 1/24.7

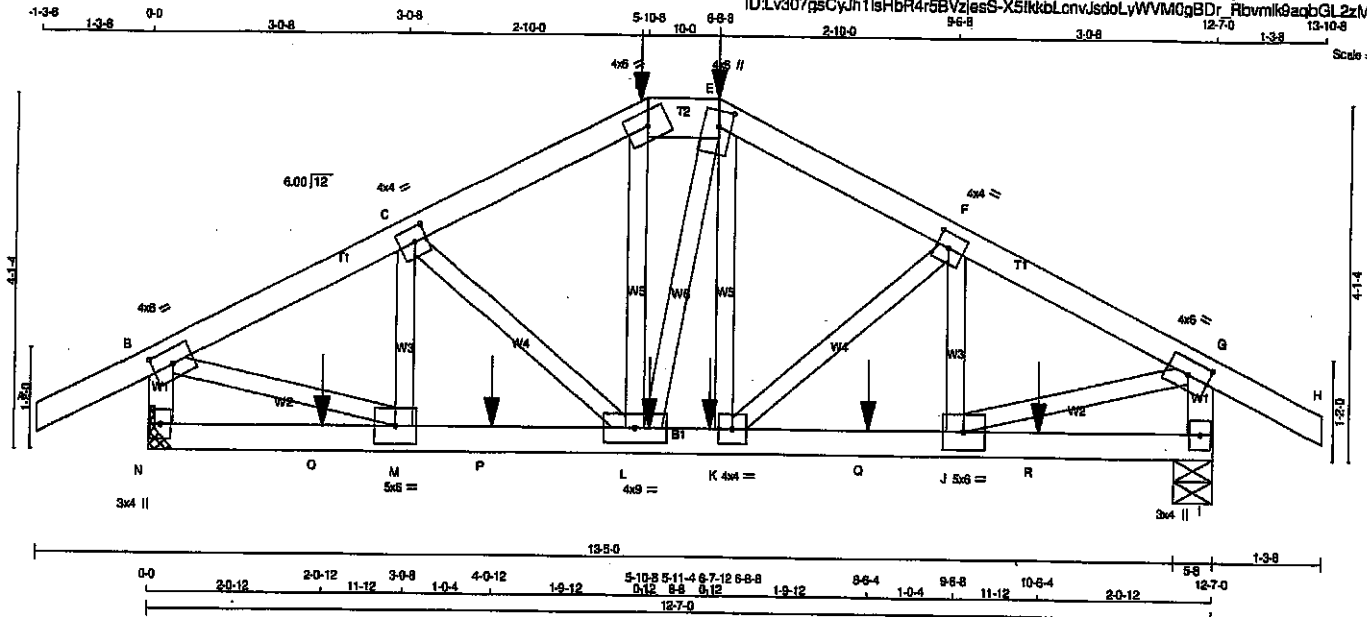

TOTAL WEIGHT = 58 lb

#### LUMBER

##### N. L. G. A. RULES

| CHORDS          | SIZE | DRY | LUMBER | DESCR. |
|-----------------|------|-----|--------|--------|
| A - D           | 2x4  | DRY | No.2   | SPF    |
| D - E           | 2x6  | DRY | No.2   | SPF    |
| E - H           | 2x4  | DRY | No.2   | SPF    |
| N - B           | 2x4  | DRY | No.2   | SPF    |
| I - G           | 2x4  | DRY | No.2   | SPF    |
| N - I           | 2x4  | DRY | No.2   | SPF    |
| ALL WEBS EXCEPT | 2x3  | DRY | No.2   | SPF    |

DRY: SEASONED LUMBER.

#### PLATES (table in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-1  | MT20   | 4.0 | 6.0 | 2.00 | 3.00 |
| C  | TMVW-1  | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| D  | TTW-h   | MT20   | 4.0 | 8.0 |      |      |
| E  | TTWV+m  | MT20   | 4.0 | 8.0 | 2.25 | 1.75 |
| F  | TMVW-1  | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| G  | TMVW-1  | MT20   | 4.0 | 6.0 | 2.00 | 3.00 |
| I  | BMV1-p  | MT20   | 3.0 | 4.0 |      |      |
| J  | BMVW-1  | MT20   | 5.0 | 6.0 |      |      |
| K  | BMVW-1  | MT20   | 4.0 | 4.0 |      |      |
| L  | BMVWV-1 | MT20   | 4.0 | 9.0 |      |      |
| M  | BMVW-1  | MT20   | 5.0 | 6.0 |      |      |
| N  | BMV1-p  | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG   |
|----|-------------------------|---------------------------------|-----------|------------|
| N  | 1393 0                  | 1393 0                          | 0         | MECHANICAL |
| I  | 1393 0                  | 1393 0                          | 5-8       | 5-8        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT N. MINIMUM BEARING LENGTH AT JOINT N = 3-8.

##### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX. MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|----------|-------------------------------|-------|-------|------------|-------|---------|-------|
| N  | 982      | 684 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 318 / 0 | 0 / 0 |
| I  | 982      | 684 / 0                       | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 318 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.04 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| FR-TO | MEMB.     | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED UNBRAC. LENGTH (L) | WEBS  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED UNBRAC. LENGTH (L) |
|-------|-----------|---------------------------|---------------------------|----------------------------------|-------|-------|---------------------------|----------------------------------|
| A-B   | 0 / 28    | -91.8                     | -91.8                     | 0.13 (1)                         | 10.00 | M-C   | -314 / 0                  | 0.06 (1)                         |
| B-C   | -1590 / 0 | -91.8                     | -91.8                     | 0.15 (1)                         | 5.07  | C-L   | -29 / 10                  | 0.01 (4)                         |
| C-D   | -1513 / 0 | -91.8                     | -91.8                     | 0.15 (1)                         | 5.04  | L-D   | 0 / 94                    | 0.04 (4)                         |
| D-E   | -1437 / 0 | -91.8                     | -91.8                     | 0.02 (1)                         | 5.25  | L-E   | 0 / 8                     | 0.00 (4)                         |
| E-F   | -1612 / 0 | -91.8                     | -91.8                     | 0.15 (1)                         | 5.04  | K-E   | 0 / 87                    | 0.03 (4)                         |
| F-G   | -1590 / 0 | -91.8                     | -91.8                     | 0.15 (1)                         | 5.07  | K-F   | -32 / 7                   | 0.01 (4)                         |
| G-H   | 0 / 28    | -91.8                     | -91.8                     | 0.13 (1)                         | 10.00 | J-F   | -312 / 0                  | 0.08 (1)                         |
| N-B   | -1359 / 0 | 0.0                       | 0.0                       | 0.15 (1)                         | 5.93  | B-M   | 0 / 1488                  | 0.37 (1)                         |
| I-G   | -1359 / 0 | 0.0                       | 0.0                       | 0.15 (1)                         | 5.93  | J-G   | 0 / 1488                  | 0.37 (1)                         |
| N-O   | 0 / 0     | -18.5                     | -18.5                     | 0.06 (4)                         | 10.00 |       |                           |                                  |
| O-M   | 0 / 0     | -18.5                     | -18.5                     | 0.06 (4)                         | 10.00 |       |                           |                                  |
| M-P   | 0 / 1432  | -18.5                     | -18.5                     | 0.29 (1)                         | 10.00 |       |                           |                                  |
| P-L   | 0 / 1432  | -18.5                     | -18.5                     | 0.29 (1)                         | 10.00 |       |                           |                                  |
| L-K   | 0 / 1436  | -18.5                     | -18.5                     | 0.27 (1)                         | 10.00 |       |                           |                                  |
| K-Q   | 0 / 1432  | -18.5                     | -18.5                     | 0.29 (1)                         | 10.00 |       |                           |                                  |
| Q-J   | 0 / 1432  | -18.5                     | -18.5                     | 0.29 (1)                         | 10.00 |       |                           |                                  |
| J-R   | 0 / 0     | -18.5                     | -18.5                     | 0.06 (4)                         | 10.00 |       |                           |                                  |
| R-I   | 0 / 0     | -18.5                     | -18.5                     | 0.06 (4)                         | 10.00 |       |                           |                                  |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LOC1 | MAX- | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|------|------|------|------|------|-------|------|-------|
| D  | 5-10-8 | -496 | -496 |      | BACK | VERT | TOTAL |      | C1    |
| E  | 6-8-8  | -496 | -496 |      | BACK | VERT | TOTAL |      | C1    |
| K  | 6-7-12 | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |
| L  | 5-11-4 | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |
| O  | 2-0-12 | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |
| P  | 4-0-12 | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |
| Q  | 8-8-4  | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |
| R  | 10-6-4 | -26  | -26  |      | BACK | VERT | TOTAL |      | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 35.0 PSF    |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(65 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/280$  (0.42")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.03")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.42")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.05")

CSI: TC=0.15/1.00 (F-G-1), BC=0.29/1.00 (J-K-1),  
WB=0.37/1.00 (G-J-1), SS=0.13/1.00 (F-G-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI)                | SECTION (PL) |
|-----------------|----------------------------|--------------|
| MT20            | 618 354 1657 789 1987 1658 |              |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.84 (G) (INPUT = 0.80)  
JSI METAL= 0.43 (G) (INPUT = 1.00)



Structural component only  
DWG# T-2007772

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>PB1</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 5 Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:41 2020 Page 1  
ID: d8N118o0ExSc8K00Orbmazvel-r7UM9Ekmp4LJqoDB5crBJ\_nRSdwhORyayychHzpVW  
10-7-11 1-6-0 10-7-11  
Scale = 1:16.8

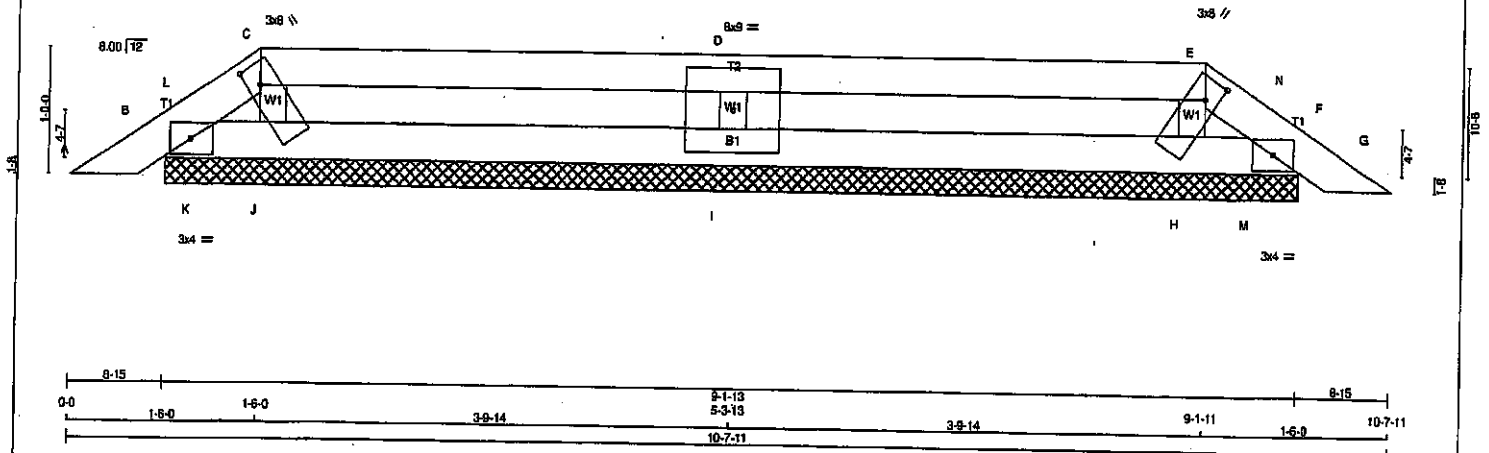

#### LUMBER

| N L G A RULES         | SIZE | LUMBER   |
|-----------------------|------|----------|
| CHORDS                |      |          |
| A - C                 | 2x4  | DRY No.2 |
| C - E                 | 2x4  | DRY No.2 |
| E - G                 | 2x4  | DRY No.2 |
| B - F                 | 2x4  | DRY No.2 |
| ALL WEBS              | 2x3  | DRY No.2 |
| DRY: SEASONED LUMBER. |      |          |

#### PLATES (tablets in inches)

| JT               | TYPE     | PLATES | W   | LEN | Y    | X    |
|------------------|----------|--------|-----|-----|------|------|
| B                | TMB1-I   | MT20   | 3.0 | 4.0 |      |      |
| C, D, E, H, I, J |          |        |     |     |      |      |
| C                | TTBW1+h  | MT20   | 3.0 | 8.0 | 2.00 | 1.25 |
| D                | TMBMW1-I | MT20   | 8.0 | 9.0 |      |      |
| E                | TTBW1+h  | MT20   | 3.0 | 8.0 | 2.00 | 1.25 |
| F                | TMB1-I   | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| B  | 127                     | 0    | 127                             | 0    | 9-1-13    | 9-1-13   |
| F  | 127                     | 0    | 127                             | 0    | 9-1-13    | 9-1-13   |
| J  | 184                     | 0    | 184                             | 0    | 9-1-13    | 9-1-13   |
| H  | 184                     | 0    | 184                             | 0    | 9-1-13    | 9-1-13   |
| I  | 510                     | 0    | 510                             | 0    | 9-1-13    | 9-1-13   |

##### UNFACTORED REACTIONS

| JT | 1ST LCASE |       | MAX. MIN. COMPONENT REACTIONS |            |      |       |      |
|----|-----------|-------|-------------------------------|------------|------|-------|------|
|    | COMBINED  | SNOW  | LIVE                          | PERM. LIVE | WIND | DEAD  | SOIL |
| B  | 85        | 78/0  | 0/0                           | 0/0        | 0/0  | 8/0   | 0/0  |
| F  | 85        | 78/0  | 0/0                           | 0/0        | 0/0  | 8/0   | 0/0  |
| J  | 133       | 68/0  | 0/0                           | 0/0        | 0/0  | 65/0  | 0/0  |
| H  | 133       | 68/0  | 0/0                           | 0/0        | 0/0  | 65/0  | 0/0  |
| I  | 359       | 244/0 | 0/0                           | 0/0        | 0/0  | 115/0 | 0/0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, F, J, H, I

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRAIDED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                      |                           |                | WEBS               |       |                      |               |
|--------|----------------------|---------------------------|----------------|--------------------|-------|----------------------|---------------|
| MEMB.  | FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. CS1 (LC)  | MAX. UNBRAC LENGTH | MEMB. | FACTORED FORCE (LBS) | MAX. CS1 (LC) |
| FR-TO  |                      | FROM TO                   |                |                    | FR-TO |                      |               |
| A-B    | 0/15                 | -91.8                     | -91.8 0.03 (1) | 10.00              | J-C   | -120/0               | 0.02 (1)      |
| B-L    | -51/0                | -91.8                     | -91.8 0.03 (1) | 6.25               | H-E   | -120/0               | 0.02 (1)      |
| L-C    | -37/0                | -91.8                     | -91.8 0.01 (1) | 6.25               | I-D   | -438/0               | 0.06 (1)      |
| C-D    | 0/0                  | -91.8                     | -91.8 0.23 (1) | 10.00              | K-L   | -23/0                | 0.00 (1)      |
| D-E    | 0/0                  | -91.8                     | -91.8 0.23 (1) | 10.00              | M-N   | -23/0                | 0.00 (1)      |
| E-N    | -37/0                | -91.8                     | -91.8 0.01 (1) | 6.25               |       |                      |               |
| N-F    | -51/0                | -91.8                     | -91.8 0.03 (1) | 6.25               |       |                      |               |
| F-G    | 0/15                 | -91.8                     | -91.8 0.03 (1) | 10.00              |       |                      |               |
|        |                      |                           |                |                    |       |                      |               |
| B-K    | 0/21                 | -18.5                     | -18.5 0.01 (1) | 10.00              |       |                      |               |
| K-J    | 0/21                 | -18.5                     | -18.5 0.04 (4) | 10.00              |       |                      |               |
| J-I    | 0/0                  | -18.5                     | -18.5 0.05 (4) | 10.00              |       |                      |               |
| I-H    | 0/0                  | -18.5                     | -18.5 0.05 (4) | 10.00              |       |                      |               |
| H-M    | 0/21                 | -18.5                     | -18.5 0.04 (4) | 10.00              |       |                      |               |
| M-F    | 0/21                 | -18.5                     | -18.5 0.01 (1) | 10.00              |       |                      |               |

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 8.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 085-09, CSA 085-14
- TPIC 2011, TPIC 2014

#### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TC=0.23/1.00 (C-D-1), BC=0.05/1.00 (I-J-4),  
WB=0.08/1.00 (D-L-1), SSI=0.17/1.00 (C-D-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

PLATE GRIP (DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1687 788 1987 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.21 (E) (INPUT = 0.99)  
JSI METAL = 0.06 (E) (INPUT = 1.00)




Structural component only  
DWG# T-2006756

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>PB2</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          | TRUSS DESC.          |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:42 2020 Page 1  
ID:d8NH18o0ExSc8K00Orbmazjvel-JJssaVFNX7C9x\_NPIo74jXxwUay\_Qr26pchs9pHzNpVv  
7-7-11 10-7-11

Scale = 1:16.8

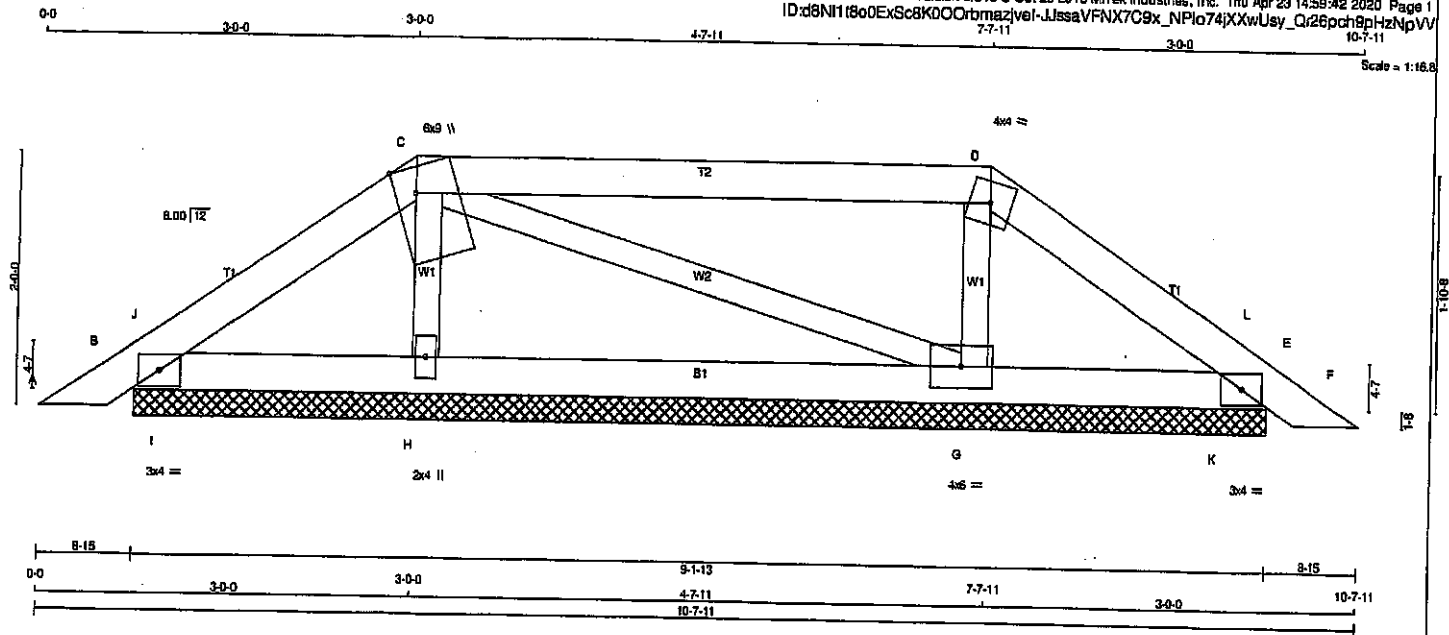

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER |
|--------|---------|--------|
| A - C  | 2x4 DRY | No.2   |
| C - D  | 2x4 DRY | No.2   |
| D - F  | 2x4 DRY | No.2   |
| B - E  | 2x4 DRY | No.2   |

ALL WEBS 2x3 DRY  
DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| C  | TTWW+m  | MT20   | 6.0 | 9.0 | Edge | 2.00 |
| D  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| E  | TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| G  | BMWW1-t | MT20   | 4.0 | 6.0 |      |      |
| H  | BMW1-w  | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| B  | 217                     | 217                             | 0         | 0        |
| E  | 208                     | 208                             | 0         | 0        |
| H  | 343                     | 343                             | 0         | 0        |
| G  | 362                     | 362                             | 0         | 0        |

##### UNFACTORED REACTIONS

| JT | 1ST CASE COMBINED | MAX. MIN. COMPONENT REACTIONS | SNOW | LIVE | PERM. LIVE | WIND | DEAD | SOIL |
|----|-------------------|-------------------------------|------|------|------------|------|------|------|
| B  | 151               | 115.0                         | 0.0  | 0.0  | 0.0        | 0.0  | 36.0 | 0.0  |
| E  | 144               | 110.0                         | 0.0  | 0.0  | 0.0        | 0.0  | 34.0 | 0.0  |
| H  | 244               | 150.0                         | 0.0  | 0.0  | 0.0        | 0.0  | 94.0 | 0.0  |
| G  | 258               | 161.0                         | 0.0  | 0.0  | 0.0        | 0.0  | 97.0 | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LBS) | MAX. FACTORED VERT. LOAD (LBS) | MEMB. | WEBS MAX. FACTORED FORCE (LBS) | MAX. FACTORED VERT. LOAD (LBS) |
|-------|----------------------------------|---------------------------|--------------------------------|--------------------------------|-------|--------------------------------|--------------------------------|
| FR-TO |                                  |                           |                                |                                | FR-TO |                                |                                |
| A-B   | 0/15                             | -91.8                     | -91.8                          | 0.03 (1)                       | H-C   | -250/0                         | 0.04 (1)                       |
| B-J   | -59/0                            | -91.8                     | -91.8                          | 0.01 (1)                       | C-G   | -15/0                          | 0.01 (1)                       |
| J-C   | -78/0                            | -91.8                     | -91.8                          | 0.05 (1)                       | G-D   | -265/0                         | 0.04 (1)                       |
| C-D   | -32/0                            | -91.8                     | -91.8                          | 0.34 (1)                       | I-J   | -134/0                         | 0.00 (1)                       |
| D-L   | -82/0                            | -91.8                     | -91.8                          | 0.06 (1)                       | K-L   | -135/0                         | 0.00 (1)                       |
| L-E   | -42/0                            | -91.8                     | -91.8                          | 0.01 (1)                       |       |                                |                                |
| E-F   | 0/15                             | -91.8                     | -91.8                          | 0.03 (1)                       |       |                                |                                |
| B-I   | 0/82                             | -18.5                     | -18.5                          | 0.08 (1)                       |       |                                |                                |
| I-H   | 0/82                             | -18.5                     | -18.5                          | 0.07 (4)                       |       |                                |                                |
| H-G   | 0/48                             | -18.5                     | -18.5                          | 0.08 (4)                       |       |                                |                                |
| G-K   | 0/49                             | -18.5                     | -18.5                          | 0.08 (4)                       |       |                                |                                |
| K-E   | 0/49                             | -18.5                     | -18.5                          | 0.06 (1)                       |       |                                |                                |

TOTAL WEIGHT = 2 X 30 = 59 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.6 PSF |
| DL = 6.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 085-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TO=0.34/1.00 (C-D:1), BC=0.07/1.00 (H-I:4), WB=0.04/1.00 (D-G:1), SS=0.17/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
|       | (FSI)     | (PLI) | (PLI)              |
| MT20  | 618       | 354   | 1667 788 1987 1658 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.18 (B) (INPUT = 0.90)  
JSI METAL= 0.06 (H) (INPUT = 1.00)



Structural component only  
DWG# T-2006757



|                                 |            |             |     |                                                                                    |          |
|---------------------------------|------------|-------------|-----|------------------------------------------------------------------------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY    | PLY | JOB DESC.                                                                          | DRWG NO. |
| 408263                          | PB4        | 2           | 1   | GREEN PARK HOMES                                                                   |          |
| Tamarack Roof Truss, Burlington |            | TRUSS DESC. |     | Version 8.310 S Oct 29 2019 Mitex Industries, Inc. Thu Apr 23 14:59:44 2020 Page 1 |          |

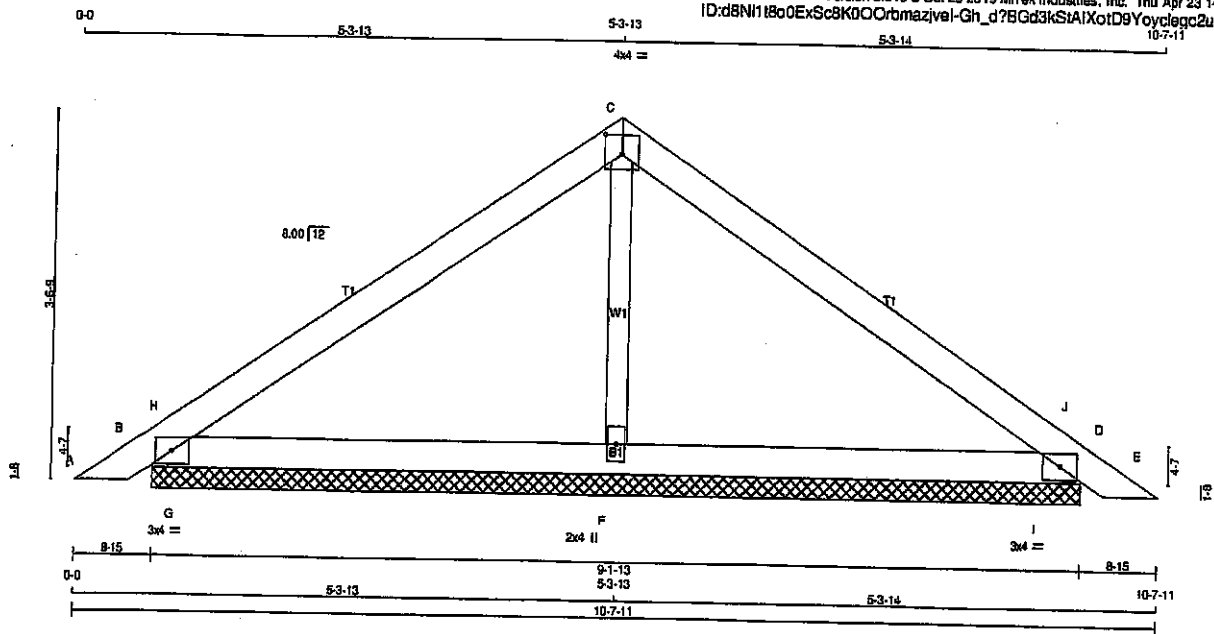

#### LUMBER

##### N. L. G. A. RULES

| CHORDS                | SIZE | LUMBER | DESCR. |
|-----------------------|------|--------|--------|
| A - C                 | 2x4  | DRY    | SPF    |
| C - E                 | 2x4  | DRY    | SPF    |
| B - D                 | 2x4  | DRY    | SPF    |
| ALL WEBS              | 2x3  | DRY    | SPF    |
| DRY: SEASONED LUMBER. |      | No.2   |        |

#### PLATES (table in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMB1-I | MT20   | 3.0 | 4.0 |      |      |
| C  | TTW-p  | MT20   | 4.0 | 4.0 | 2.25 | 2.00 |
| D  | TMB1-I | MT20   | 3.0 | 4.0 |      |      |
| F  | BMW1-w | MT20   | 2.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| B  | 382                     | 382                             | 0         | 0        |
| D  | 382                     | 382                             | 0         | 0        |
| F  | 367                     | 367                             | 0         | 0        |

##### UNFACTORED REACTIONS

| JT | 1ST LCASE | MAX./MIN. COMPONENT REACTIONS | PERM. LIVE | WIND | DEAD  | SOIL |
|----|-----------|-------------------------------|------------|------|-------|------|
| B  | COMBINED  | SNOW                          | 0/0        | 0/0  | 77/0  | 0/0  |
| D  | COMBINED  | SNOW                          | 0/0        | 0/0  | 77/0  | 0/0  |
| F  | COMBINED  | SNOW                          | 0/0        | 0/0  | 107/0 | 0/0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D, F

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS  |                           |               |          |
|--------|---------------------------|---------------------------|---------------|-------|---------------------------|---------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |          |
| FR-TO  |                           | FROM TO                   |               | FR-TO |                           |               |          |
| A-B    | 0/15                      | -91.8 -91.8               | 0.03 (1)      | 10.00 | F-C                       | -182/0        | 0.03 (1) |
| B-H    | -38/0                     | -91.8 -91.8               | 0.12 (1)      | 6.25  | G-H                       | -495/0        | 0.00 (1) |
| H-C    | -182/0                    | -91.8 -91.8               | 0.23 (1)      | 6.25  | I-J                       | -495/0        | 0.00 (1) |
| C-J    | -182/0                    | -91.8 -91.8               | 0.23 (1)      | 6.25  |                           |               |          |
| J-D    | -38/0                     | -91.8 -91.8               | 0.12 (1)      | 6.25  |                           |               |          |
| D-E    | 0/15                      | -91.8 -91.8               | 0.03 (1)      | 10.00 |                           |               |          |
| B-G    | 0/142                     | -18.5 -18.5               | 0.22 (1)      | 10.00 |                           |               |          |
| G-F    | 0/142                     | -18.5 -18.5               | 0.22 (1)      | 10.00 |                           |               |          |
| F-I    | 0/142                     | -18.5 -18.5               | 0.22 (1)      | 10.00 |                           |               |          |
| I-D    | 0/142                     | -18.5 -18.5               | 0.22 (1)      | 10.00 |                           |               |          |

TOTAL WEIGHT = 2 X 27 = 54 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.6 PSF |
| DL         | = 6.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 38.0 PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-08, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.23/1.00 (C-J:1), BC=0.22/1.00 (F-I:1), WB=0.03/1.00 (C-F:1), SSI=0.37/1.00 (B-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) SHEAR SECTION | (PSI) | (PLI) | (PLI)              |
|-------------------------------|-------|-------|--------------------|
| MAX MIN MAX MIN MAX MIN       |       |       |                    |
| MT20                          | 618   | 354   | 1687 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.34 (B) (INPUT = 0.90)  
JSI METAL= 0.09 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006759

|                                 |            |          |     |                  |          |
|---------------------------------|------------|----------|-----|------------------|----------|
| JOB NAME                        | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408264                          | PB21       | 1        | 2   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington |            |          |     |                  |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:56 2020 Page 1  
ID: SgJMMpjrEgZE5VLzZMvKzjuJdJcTpWa2PW0\_ODfXn9SLKvum8R8W4lpBUZLnzNp19

Scale = 1:18.8

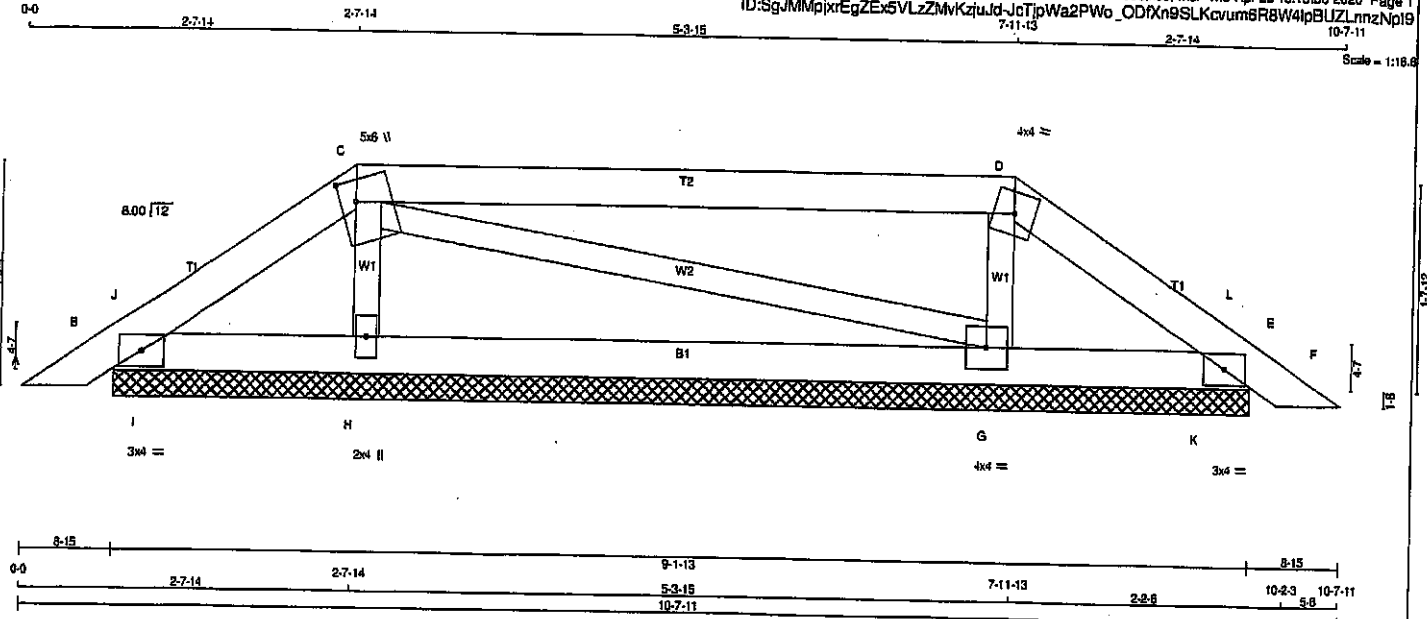

#### LUMBER

##### N. L. G. A. RULES

| CHORDS                | SIZE | LUMBER | DESCR. |
|-----------------------|------|--------|--------|
| A - C                 | 2x4  | DRY    | No.2   |
| C - D                 | 2x4  | DRY    | No.2   |
| D - F                 | 2x4  | DRY    | No.2   |
| B - E                 | 2x4  | DRY    | No.2   |
| ALL WEBS              | 2x3  | DRY    | No.2   |
| DRY: SEASONED LUMBER. |      |        |        |

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF) |
|------------------------------------------|----------------------|------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |            |
| A-C 1                                    | 12                   | TOP        |
| C-D 1                                    | 12                   | TOP        |
| D-F 1                                    | 12                   | TOP        |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |            |
| B-E 1                                    | 12                   | TOP        |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |            |
| 2x3 1                                    | 6                    |            |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| C  | TTWW+m  | MT20   | 5.0 | 6.0 | 2.00 | 1.50 |
| D  | TTW-m   | MT20   | 4.0 | 4.0 |      |      |
| E  | TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| G  | BMWW1-I | MT20   | 4.0 | 4.0 |      |      |
| H  | BMW1-w  | MT20   | 2.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| B  | 188                     | 0    | 188                             | 0    | 9-1-13    | 9-1-13   |
| E  | 182                     | 0    | 182                             | 0    | 9-1-13    | 9-1-13   |
| H  | 375                     | 0    | 375                             | 0    | 9-1-13    | 9-1-13   |
| G  | 366                     | 0    | 366                             | 0    | 9-1-13    | 9-1-13   |

##### UNFACTORED REACTIONS

| JT | 1ST CASE |         | MAX. MIN. COMPONENT REACTIONS |            |       |         |       |
|----|----------|---------|-------------------------------|------------|-------|---------|-------|
|    | COMBINED | SNOW    | LIVE                          | PERM. LIVE | WIND  | DEAD    | SOIL  |
| B  | 130      | 105 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 25 / 0  | 0 / 0 |
| E  | 125      | 101 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 24 / 0  | 0 / 0 |
| H  | 267      | 182 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 105 / 0 | 0 / 0 |
| G  | 275      | 188 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 107 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS                 |       |                           |                   |
|--------|---------------------------|---------------------------|---------------|----------------------|-------|---------------------------|-------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CS1 (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CS1 (LC)     |
| FR-TO  |                           | FROM TO                   |               |                      | FR-TO |                           |                   |
| A-B    | 0 / 15                    | -91.8                     | -91.8         | 0.01 (1)             | 10.00 | H-C                       | -274 / 0 0.02 (1) |
| B-J    | -52 / 0                   | -91.8                     | -91.8         | 0.01 (1)             | 6.25  | C-G                       | -10 / 0 0.00 (1)  |
| J-C    | -70 / 0                   | -91.8                     | -91.8         | 0.02 (1)             | 6.25  | G-D                       | -282 / 0 0.02 (1) |
| C-D    | -24 / 0                   | -91.8                     | -91.8         | 0.22 (1)             | 6.25  | I-J                       | -115 / 0 0.00 (1) |
| D-L    | -59 / 0                   | -91.8                     | -91.8         | 0.02 (1)             | 6.25  | K-L                       | -115 / 0 0.00 (1) |
| L-E    | -41 / 3                   | -91.8                     | -91.8         | 0.01 (1)             | 6.25  |                           |                   |
| E-F    | 0 / 15                    | -91.8                     | -91.8         | 0.01 (1)             | 10.00 |                           |                   |
|        |                           |                           |               |                      |       |                           |                   |
| B-I    | 0 / 55                    | -18.5                     | -18.5         | 0.02 (1)             | 10.00 |                           |                   |
| I-H    | 0 / 55                    | -18.5                     | -18.5         | 0.04 (4)             | 10.00 |                           |                   |
| H-G    | 0 / 34                    | -18.5                     | -18.5         | 0.04 (4)             | 10.00 |                           |                   |
| G-K    | 0 / 46                    | -18.5                     | -18.5         | 0.04 (4)             | 10.00 |                           |                   |
| K-E    | 0 / 46                    | -18.5                     | -18.5         | 0.02 (1)             | 10.00 |                           |                   |

TOTAL WEIGHT = 2 X 30 = 59 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.8 | PSF |
| DL = 8.0   | PSF       |     |
| BOT CH.    | LL = 0.0  | PSF |
| DL = 7.4   | PSF       |     |
| TOTAL LOAD | = 39.0    | PSF |

SPACING = 24.0 IN/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-08, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TO=0.22/1.00 (C-D:1), BC=0.04/1.00 (H-I:4), WB=0.02/1.00 (D-G:1), SS=0.10/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP (DRY) | SHEAR | SECTION |
|-------|------------|-------|---------|
|       | (PSI)      | (PL)  | (PL)    |
| MT20  | 618        | 354   | 1987    |
|       | 1657       | 788   | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.10 (D) (INPUT = 0.90)  
JSI METAL = 0.03 (H) (INPUT = 1.00)



Structural component only  
DWG# T-2006790

|                                                                                    |            |          |     |                  |          |
|------------------------------------------------------------------------------------|------------|----------|-----|------------------|----------|
| JOB NAME                                                                           | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408264                                                                             | PB22       | 1        | 1   | GREEN PARK HOMES |          |
| Tamarack Roof Truss, Burlington                                                    |            |          |     |                  |          |
| Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:57 2020 Page 1 |            |          |     |                  |          |
| ID: SgJMMpjrEgZE5VLzZMvKzjuJd-no050sbhAqwr?NEKlszatqR3PWmqFXlyQ7JvKEZnp18          |            |          |     |                  |          |

Scale = 1:16.8

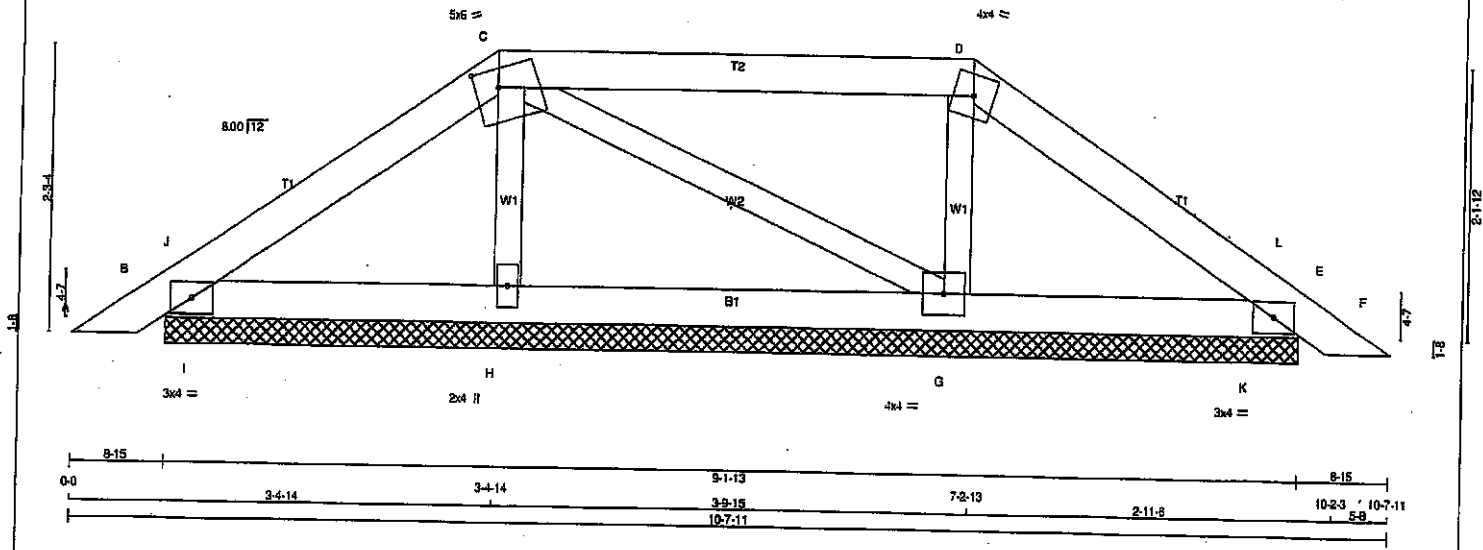

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - C  | 2x4  | DRY | No.2   |
| C - D  | 2x4  | DRY | No.2   |
| D - F  | 2x4  | DRY | No.2   |
| B - E  | 2x4  | DRY | No.2   |

ALL WEBS 2x3 DRY No.2  
DRY: SEASONED LUMBER.

#### PLATES (tables in inches)

| JT TYPE   | PLATES | W   | LEN | Y    | X    |
|-----------|--------|-----|-----|------|------|
| B TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| C TTWW-m  | MT20   | 5.0 | 6.0 | 1.75 | 2.25 |
| D TTWW-m  | MT20   | 4.0 | 4.0 |      |      |
| E TMB1-I  | MT20   | 3.0 | 4.0 |      |      |
| G BMWW1-I | MT20   | 4.0 | 4.0 |      |      |
| H BMWW1-w | MT20   | 2.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | RECORD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |            |
| B  | 250                     | 0    | 250                             | 0    | 9-1-13    | 9-1-13     |
| E  | 237                     | 0    | 237                             | 0    | 9-1-13    | 9-1-13     |
| H  | 305                     | 0    | 305                             | 0    | 9-1-13    | 9-1-13     |
| G  | 339                     | 0    | 339                             | 0    | 9-1-13    | 9-1-13     |

##### UNFACTORED REACTIONS

| JT | 1ST LCASE |         | MAX. MIN. COMPONENT REACTIONS |            |       |        |       |
|----|-----------|---------|-------------------------------|------------|-------|--------|-------|
|    | COMBINED  | SNOW    | LIVE                          | PERM. LIVE | WIND  | DEAD   | SOIL  |
| B  | 175       | 128 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 46 / 0 | 0 / 0 |
| E  | 165       | 121 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 45 / 0 | 0 / 0 |
| H  | 217       | 134 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 83 / 0 | 0 / 0 |
| G  | 240       | 153 / 0 | 0 / 0                         | 0 / 0      | 0 / 0 | 87 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, E, H, G

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 8.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                | WEBS               |       |                           |               |
|--------|---------------------------|---------------------------|----------------|--------------------|-------|---------------------------|---------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CS1 (LC)  | MAX. UNBRAC LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CS1 (LC) |
| FR-TO  |                           | FROM TO                   |                |                    | FR-TO |                           |               |
| A-B    | 0 / 15                    | -91.8                     | -91.8 0.03 (1) | 10.00              | H-C   | -218 / 0                  | 0.03 (1)      |
| B-J    | -65 / 0                   | -91.8                     | -91.8 0.02 (1) | 6.25               | C-G   | -23 / 0                   | 0.01 (1)      |
| J-C    | -83 / 0                   | -91.8                     | -91.8 0.08 (1) | 6.25               | G-D   | -241 / 0                  | 0.04 (1)      |
| C-D    | -41 / 0                   | -91.8                     | -91.8 0.23 (1) | 6.25               | I-J   | -165 / 0                  | 0.00 (1)      |
| D-L    | -89 / 0                   | -91.8                     | -91.8 0.08 (1) | 6.25               | K-L   | -167 / 0                  | 0.00 (1)      |
| L-E    | -41 / 0                   | -91.8                     | -91.8 0.02 (1) | 6.25               |       |                           |               |
| E-F    | 0 / 15                    | -91.8                     | -91.8 0.03 (1) | 10.00              |       |                           |               |
| B-I    | 0 / 74                    | -18.5                     | -18.5 0.08 (1) | 10.00              |       |                           |               |
| I-H    | 0 / 74                    | -18.5                     | -18.5 0.08 (1) | 10.00              |       |                           |               |
| H-G    | 0 / 62                    | -18.5                     | -18.5 0.05 (4) | 10.00              |       |                           |               |
| G-K    | 0 / 55                    | -18.5                     | -18.5 0.08 (1) | 10.00              |       |                           |               |
| K-E    | 0 / 55                    | -18.5                     | -18.5 0.08 (1) | 10.00              |       |                           |               |

TOTAL WEIGHT = 30 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCO 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2018
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CS1: TC=0.23/1.00 (C-D:1), BC=0.08/1.00 (H-I:1), WB=0.04/1.00 (D-G:1), SS=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE | GRIP (DRY) | SHEAR | SECTION |
|-------|------------|-------|---------|
| (FS)  | (PL)       | (PL)  | (PL)    |
| MAX   | MIN        | MAX   | MIN     |
| MT20  | 618        | 354   | 1667    |
|       | 788        | 1987  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.20 (B) (INPUT = 0.30)  
JSI METAL= 0.05 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006791

|                           |                         |                      |                 |                                      |             |          |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|
| JOB NAME<br><b>408263</b> | TRUSS NAME<br><b>J1</b> | QUANTITY<br><b>9</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | TRUSS DESC. | DRWG NO. |
|---------------------------|-------------------------|----------------------|-----------------|--------------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:34 2020 Page 1  
ID:d8N11t8o0ExSc8K000rbmazivel-YmNrum8LPgBHziimtH7\_C0rCWKeC5ZDfwzMKkXizNpVd

Scale = 1:22.5

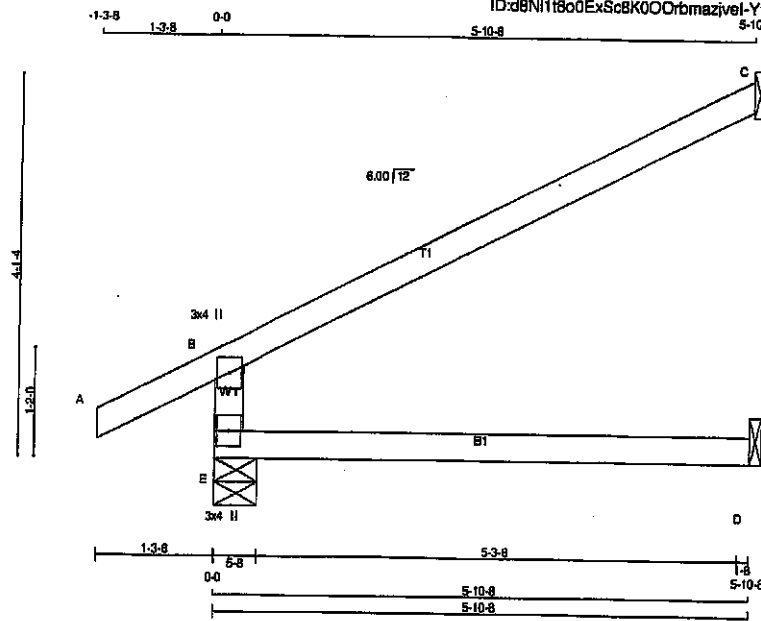

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER |
|--------|---------|--------|
| E - B  | 2x4 DRY | No.2   |
| A - C  | 2x4 DRY | No.2   |
| E - D  | 2x4 DRY | No.2   |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 3.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 3.0 | 4.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----------|-------------------------|------|---------------------------------|------|-----------|----------|
|          | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| JT       | 525                     | 0    | 525                             | 0    | 5-8       | 5-8      |
| E        | 202                     | 0    | 202                             | 0    | 1-8       | 1-8      |
| C        | 45                      | 0    | 50                              | 0    | 1-8       | 1-8      |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| 1ST CASE |          | MAX/MIN. COMPONENT REACTIONS |       |           |       |         |       |
|----------|----------|------------------------------|-------|-----------|-------|---------|-------|
| JT       | COMBINED | SNOW                         | LIVE  | PERM LIVE | WIND  | DEAD    | SOIL  |
| E        | 369      | 257 / 0                      | 0 / 0 | 0 / 0     | 0 / 0 | 111 / 0 | 0 / 0 |
| C        | 139      | 113 / 0                      | 0 / 0 | 0 / 0     | 0 / 0 | 26 / 0  | 0 / 0 |
| D        | 36       | 0 / 0                        | 0 / 0 | 0 / 0     | 0 / 0 | 38 / 0  | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS               |       |                           |              |
|--------|---------------------------|---------------------------|---------------|--------------------|-------|---------------------------|--------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX (LBS) | MAX. UNBRAC LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX GSI (LC) |
| FR-TO  |                           | FROM TO                   | CS1 (LC)      | FR-TO              |       |                           |              |
| E-B    | -461 / 0                  | 0.0                       | 0.0           | 0.13 (4)           | 7.81  |                           |              |
| A-B    | 0 / 28                    | -91.8                     | -91.8         | 0.12 (1)           | 10.00 |                           |              |
| B-C    | -30 / 0                   | -91.8                     | -91.8         | 0.54 (1)           | 6.25  |                           |              |
| E-D    | 0 / 0                     | -18.5                     | -18.5         | 0.13 (4)           | 10.00 |                           |              |

TOTAL WEIGHT = 9 X 17 = 151 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |      |          |
|------------|------|----------|
| TOP CH.    | LL = | 25.6 PSF |
|            | DL = | 6.0 PSF  |
| BOT CH.    | LL = | 0.0 PSF  |
|            | DL = | 7.4 PSF  |
| TOTAL LOAD | =    | 39.0 PSF |

SPACING = 24.0 IN. C.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA D88-09, CSA D88-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(65 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")

CALCULATED VERT. DEFL.(LL) = L/999 (0.00")

ALLOWABLE DEFL.(TL) = L/360 (0.20")

CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.54/1.00 (B-C:1), BC=0.13/1.00 (D-E:4), WB=0.00/1.00 (W:0), SS=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PLI) | (PLI)   |
|       | MAX       | MIN   | MAX     |
| MT20  | 618       | 354   | 1667    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.19 (E) (INPUT = 0.90)

JSI METAL= 0.13 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2008751

|                    |                  |                |          |                               |             |          |
|--------------------|------------------|----------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408263 | TRUSS NAME<br>J2 | QUANTITY<br>10 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|------------------|----------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MTek Industries, Inc. Thu Apr 23 14:59:35 2020 Page 1  
ID: d8N118o0ExSc8K0OOrbmazjvel-1zxD669\_Az/8bvL3rqV/Rx2knK2Zbtqv4C0VH3BzNpVc

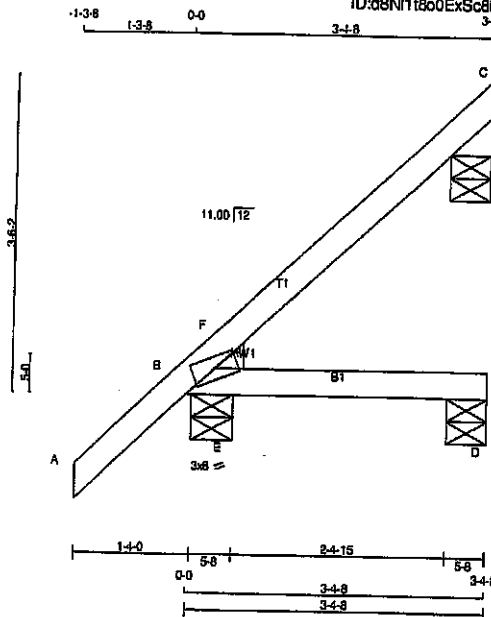

Scale = 1:22.6

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| A - C  | 2x4  | DRY | No.2   |
| B - D  | 2x4  | DRY | No.2   |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y | X |
|----|---------|--------|-----|-----|---|---|
| B  | TMBH1-m | MT20   | 3.0 | 6.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG | HEEL WEDGE |
|----|-------------------------|------|---------------------------------|------|-----------|----------|------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |            |
| A  | 131                     | 0    | 131                             | 0    | 5-8       | 5-8      |            |
| B  | 314                     | 0    | 314                             | 0    | 5-8       | 5-8      | 2x4 L      |
| D  | 58                      | 0    | 58                              | 0    | 5-8       | 5-8      |            |

BEVELED PLATE OR SHIM REQUIRED TO PROVIDE FULL BEARING SURFACE WITH TRUSS CHORD AT JT(S): C

##### UNFACTORED REACTIONS

| JT | 1ST LCASE |         | MAX/MIN. COMPONENT REACTIONS |            | WIND  | DEAD   | SOIL  |
|----|-----------|---------|------------------------------|------------|-------|--------|-------|
|    | COMBINED  | SNOW    | LIVE                         | PERM. LIVE |       |        |       |
| A  | 80        | 70 / 0  | 0 / 0                        | 0 / 0      | 0 / 0 | 20 / 0 | 0 / 0 |
| B  | 219       | 157 / 0 | 0 / 0                        | 0 / 0      | 0 / 0 | 62 / 0 | 0 / 0 |
| D  | 41        | 16 / 0  | 0 / 0                        | 0 / 0      | 0 / 0 | 25 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) C, B, D

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                           |                           |                  | WEBS                 |       |                           |              |
|--------|---------------------------|---------------------------|------------------|----------------------|-------|---------------------------|--------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX CSI (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX CSI (LC) |
| FR-TO  |                           | FROM TO                   |                  |                      | FR-TO |                           |              |
| A-B    | 0 / 42                    | -91.8 -91.8               | 0.14 (5)         | 10.00                | E-F   | -178 / 0                  | 0.00 (1)     |
| B-F    | -16 / 15                  | -91.8 -91.8               | 0.02 (4)         | 8.25                 |       |                           |              |
| F-C    | -2 / 2                    | -91.8 -91.8               | 0.13 (1)         | 10.00                |       |                           |              |
| B-E    | 0 / 0                     | -18.5 -18.5               | 0.11 (1)         | 10.00                |       |                           |              |
| E-D    | 0 / 0                     | -18.5 -18.5               | 0.11 (1)         | 10.00                |       |                           |              |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 10 X 12 = 117 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.6 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

##### SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015.

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 088-14
- TPIC 2011, TPIC 2014

(85% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(LL) =  $L/899$  (0.01")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(TL) =  $L/899$  (0.02")

CSI: TC=0.14/1.00 (A-B:5), BC=0.11/1.00 (B-E:1), WB=0.00/1.00 (E-F:1), SSI=0.14/1.00 (B-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
| (PSI) | (PLI)     | (PLI) | (PLI)              |
| MT20  | 618       | 354   | 1687 788 1987 1655 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.15 (B) (INPUT = 0.90)

JSI METAL = 0.04 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006752

|                    |                  |               |          |                               |             |          |
|--------------------|------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408263 | TRUSS NAME<br>J3 | QUANTITY<br>2 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:37 2020 Page 1  
ID: d8N118o0ExSc8K00Orbmazjvel-zL3zWoBebasqDUSyFXv0Tq6rG7iaPNIK\_074zNpVa

Scale: 3/4"=1'

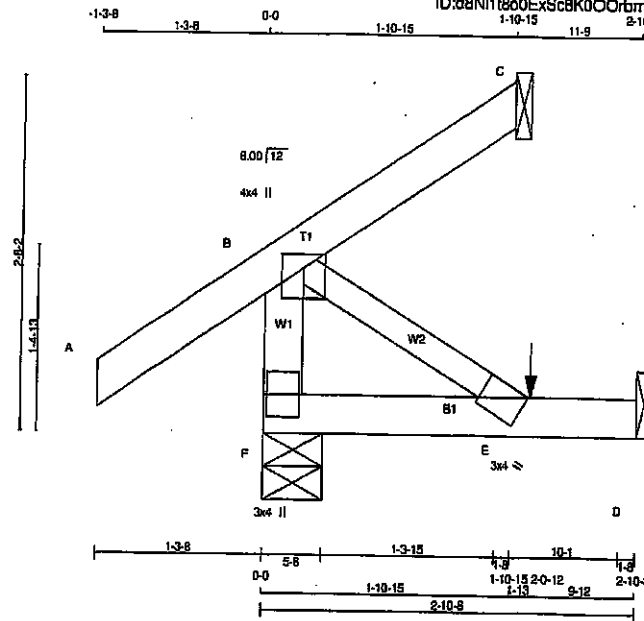

#### LUMBER

N. L. G. A. RULES

| CHORDS | SIZE | LUMBER   |
|--------|------|----------|
| F - B  | 2x4  | DRY No.2 |
| A - C  | 2x4  | DRY No.2 |
| F - D  | 2x4  | DRY No.2 |

ALL WEBS 2x3 DRY  
DRY: SEASONED LUMBER.

DESCR.  
SPF  
SPF  
SPF  
SPF

#### PLATES (table is in inches)

| JT TYPE  | PLATES | W   | LEN | Y    | X    |
|----------|--------|-----|-----|------|------|
| B TMVW+p | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| E BMVW+p | MT20   | 3.0 | 4.0 |      | Edge |
| F BMV1+p | MT20   | 3.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| F  | 286                     | 0    | 286                             | 0    | 5-8       | 5-8      |
| C  | 42                      | 0    | 42                              | 0    | 1-8       | 1-8      |
| D  | 27                      | 0    | 30                              | 0    | 1-8       | 1-8      |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS. FACTORED UPLIFT

##### UNFACTORED REACTIONS

| 1ST CASE |          | MAX. MIN. COMPONENT REACTIONS |       |            |       |        |       |
|----------|----------|-------------------------------|-------|------------|-------|--------|-------|
| JT       | COMBINED | SNOW                          | LIVE  | PERM. LIVE | WIND  | DEAD   | SOIL  |
| F        | 200      | 144 / 0                       | 0 / 0 | 0 / 0      | 0 / 0 | 55 / 0 | 0 / 0 |
| C        | 29       | 24 / -25                      | 0 / 0 | 0 / 0      | 0 / 0 | 0 / 0  | 0 / 0 |
| D        | 22       | 0 / 0                         | 0 / 0 | 0 / 0      | 0 / 0 | 22 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                                 |                                 |       |                 | WEBS                       |       |                                 |                 |  |
|--------|---------------------------------|---------------------------------|-------|-----------------|----------------------------|-------|---------------------------------|-----------------|--|
| MEMB.  | MAX. FACTORED<br>FORCE<br>(LBS) | FACTORED<br>VERT. LOAD<br>(PLF) | LC1   | MAX<br>CSI (LC) | MAX.<br>UNBRACED<br>LENGTH | MEMB. | MAX. FACTORED<br>FORCE<br>(LBS) | MAX<br>CSI (LC) |  |
| FR-TO  |                                 | FROM                            | TO    |                 |                            | FR-TO |                                 |                 |  |
| F-B    | -259 / 0                        | 0.0                             | 0.0   | 0.03 (1)        | 7.81                       | B-E   | 0 / 0                           | 0.00 (1)        |  |
| A-B    | 0 / 35                          | -91.8                           | -91.8 | 0.14 (5)        | 10.00                      |       |                                 |                 |  |
| B-C    | -25 / 0                         | -91.8                           | -91.8 | 0.13 (5)        | 8.25                       |       |                                 |                 |  |
| F-E    | 0 / 0                           | -18.5                           | -18.5 | 0.05 (4)        | 10.00                      |       |                                 |                 |  |
| E-D    | 0 / 0                           | -18.5                           | -18.5 | 0.04 (4)        | 10.00                      |       |                                 |                 |  |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|------|------|-------|------|-------|
| E  | 2-0-12 | -1  | -1   | --   | BACK | VERT | TOTAL | --   | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 2 X 11 = 21 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.6 | PSF |
|            | DL = 6.0  | PSF |
| BOT. CH.   | LL = 0.0  | PSF |
|            | DL = 7.4  | PSF |
| TOTAL LOAD | = 38.0    | PSF |

SPACING = 24.0 IN/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = L/360 (0.18")  
CALCULATED VERT. DEFL. (LL) = L/999 (0.00")  
ALLOWABLE DEFL. (TL) = L/360 (0.18")  
CALCULATED VERT. DEFL. (TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B-5), BC=0.05/1.00 (E-F-4),  
WB=0.00/1.00 (B-E-1), SSI=0.09/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP (DRY) | SHEAR | SECTION |
|------------------|-------|---------|
| (PSI)            | (PL)  | (FL)    |
| MAX              | MIN   | MAX     |
| MIN              | MAX   | MIN     |
| MT20             | 618   | 354     |
|                  | 1667  | 768     |
|                  | 1987  | 1856    |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.18 (B) (INPUT = 0.90)  
JSI METAL = 0.05 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2006753

|                                 |                         |                      |                 |                                      |          |
|---------------------------------|-------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>J4</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                         |                      |                 |                                      |          |

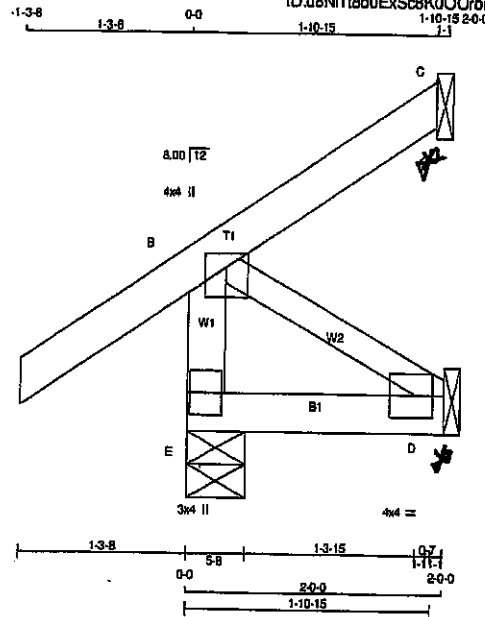

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 14:59:38 2020 Page 1  
ID:8N118a0ExSc8K00Orbmazjvel-RYdMk8BsTuijSN3eWy38ZhmIqFcmU11WU\_jxgWzNpVZ  
1-10-15 2-0-0  
Scale = 1:16.2

#### LUMBER

N.L.G.A. RULES  
CHORDS SIZE  
E - B 2x4 DRY  
A - C 2x4 DRY  
E - D 2x4 DRY

LUMBER  
No.2  
No.2  
No.2

DESCR.  
SPF  
SPF  
SPF

ALL WEBS 2x3 DRY  
DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW+p | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| D  | BMV1-i | MT20   | 4.0 | 4.0 | 2.00 | 1.50 |
| E  | BMV1+p | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| E  | 276                     | 276                             | 0         | 0          |
| C  | 42                      | 42                              | 0         | 0          |
| D  | 18                      | 20                              | 0         | 0          |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS. FACTORED UPLIFT

##### UNFACTORED REACTIONS

| JT | 1ST CASE | MAX/MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|----------|------------------------------|-------|-------|------------|-------|--------|-------|
| E  | 192      | 144 / 0                      | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 48 / 0 | 0 / 0 |
| C  | 29       | 24 / -25                     | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 8 / 0  | 0 / 0 |
| D  | 14       | 0 / 0                        | 0 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 14 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (5)

| CHORDS | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PL) | FACTORED VERT. LOAD (PL) | MAX. FACTORED CSI (LC) | MAX. FACTORED UNBRACED LENGTH | WEBS  | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |
|--------|---------------------------|-----------------|--------------------------|------------------------|-------------------------------|-------|---------------------------|------------------------|
| FR-TO  |                           |                 |                          |                        |                               | FR-TO |                           |                        |
| E-B    | -259 / 0                  | 0.0             | 0.0                      | 0.03 (1)               | 7.81                          | B-D   | 0 / 0                     | 0.00 (1)               |
| A-B    | 0 / 35                    | -91.8           | -91.8                    | 0.12 (1)               | 10.00                         |       |                           |                        |
| B-C    | -25 / 0                   | -91.8           | -91.8                    | 0.12 (1)               | 8.25                          |       |                           |                        |
| E-D    | 0 / 0                     | -18.5           | -18.5                    | 0.02 (4)               | 10.00                         |       |                           |                        |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 2 X 10 = 19 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.0 PSF |
| DL         | = 8.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.12/1.00 (A-B:1), BC=0.02/1.00 (D-E:4),  
WB=0.00/1.00 (B-D:1), SS=0.08/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) |
|-------|-----------|-------------|---------------|
| MT20  | 818       | 354         | 1657          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (B) (INPUT = 0.90)  
JSI METAL= 0.05 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006754

|                                 |                         |                      |                 |                                      |          |
|---------------------------------|-------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408263</b>       | TRUSS NAME<br><b>J5</b> | QUANTITY<br><b>7</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                         |                      |                 |                                      |          |

Version 8.310 S Oct 28 2019 MTek Industries, Inc. Thu Apr 23 14:59:39 2020 Page 1  
ID:d8N118o0ExSc8K00Orbmazjvel-vkAloxUCUECqa3Weg4gaN5uvP6fuZDUuf7eTVCyzNpVY

Scale = 1:15.4

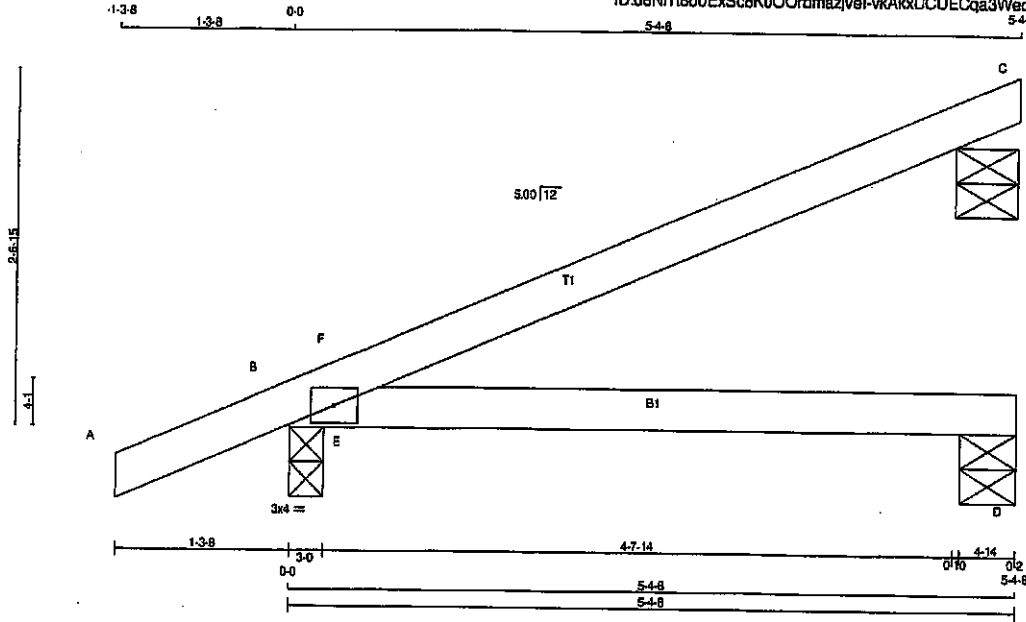

TOTAL WEIGHT = 7 X 15 = 102 lb (M)

#### LUMBER

N. L. G. A. RULES  
CHORDS SIZE  
A - C 2x4 DRY  
B - D 2x4 DRY

LUMBER  
No.2  
No.2

DESCR.  
SPF  
SPF

DRY, SEASONED LUMBER.

#### PLATES (table is in inches)

JT TYPE PLATES W LEN Y X  
B TMB1-1 MT20 3.0 4.0

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG IN-SX |       | REQD BRG IN-SX |       |
|----|-------------------------|------|---------------------------------|------|-----------------|-------|----------------|-------|
|    | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT          | IN-SX | IN-SX          | IN-SX |
| C  | 216                     | 0    | 216                             | 0    | 0               | 5-8   | 5-8            |       |
| B  | 420                     | 0    | 420                             | 0    | 0               | 3-0   | 3-0            |       |
| D  | 81                      | 0    | 81                              | 0    | 0               | 5-0   | 5-0            |       |

BEVELED PLATE OR SHIM REQUIRED TO PROVIDE FULL BEARING SURFACE WITH TRUSS CHORD AT JT(S): C

##### UNFACTORED REACTIONS

| JT | 1ST LCASE COMBINED |         | MAX/MIN. COMPONENT REACTIONS |       | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|---------|------------------------------|-------|------------|-------|--------|-------|
|    | SNOW               | LIVE    | SNOW                         | LIVE  |            |       |        |       |
| C  | 149                | 116 / 0 | 0 / 0                        | 0 / 0 | 0 / 0      | 0 / 0 | 33 / 0 | 0 / 0 |
| B  | 295                | 208 / 0 | 0 / 0                        | 0 / 0 | 0 / 0      | 0 / 0 | 66 / 0 | 0 / 0 |
| D  | 80                 | 21 / 0  | 0 / 0                        | 0 / 0 | 0 / 0      | 0 / 0 | 39 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) C, B, D

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS MAX. FACTORED FORCE (LBS) |         | FACTORED VERT. LOAD LC1 MAX (PLF) |         | MAX. UNBRACED LENGTH |         | WEBS MAX. FACTORED FORCE (LBS) |           | MAX. UNBRACED LENGTH |         |
|-------|----------------------------------|---------|-----------------------------------|---------|----------------------|---------|--------------------------------|-----------|----------------------|---------|
|       | FR-TO                            | FROM TO | FR-TO                             | FROM TO | FR-TO                | FROM TO | FR-TO                          | FROM TO   | FR-TO                | FROM TO |
| A-B   | 0 / 23                           |         | -91.8                             | -91.8   | 0.12 (1)             | 10.00   |                                |           |                      |         |
| B-F   | -22 / 38                         |         | -91.8                             | -91.8   | 0.08 (1)             | 8.25    | E-F                            | -341 / 11 | 0.00 (1)             |         |
| F-C   | -3 / 2                           |         | -91.8                             | -91.8   | 0.34 (1)             | 10.00   |                                |           |                      |         |
| B-E   | 0 / 0                            |         | -18.5                             | -18.5   | 0.24 (1)             | 10.00   |                                |           |                      |         |
| E-D   | 0 / 0                            |         | -18.5                             | -18.5   | 0.24 (1)             | 10.00   |                                |           |                      |         |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF  
DL = 8.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

##### SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(LL) =  $L/899$  (0.05")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(TL) =  $L/641$  (0.10")

CSI: TC=0.34/1.00 (C-F:1), BC=0.24/1.00 (D-E:1), WB=0.00/1.00 (E-F:1), SSI=0.28/1.00 (B-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1687 788 1987 1856

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.31 (B) (INPUT = 0.90)  
JSI METAL= 0.08 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006755

|          |            |          |     |             |                  |          |
|----------|------------|----------|-----|-------------|------------------|----------|
| JOB NAME | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | GREEN PARK HOMES | DRWG NO. |
| 408264   | J21        | 2        | 1   | TRUSS DESC. |                  |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Thu Apr 23 15:13:49 2020 Page 1  
ID:SgJMMpikrEgZEx5VLzZMvKzjUd-0GY3L7V13Nwz29dBtBqY86x12TNvKnaU2hzNpIG

Scale = 1:19.3

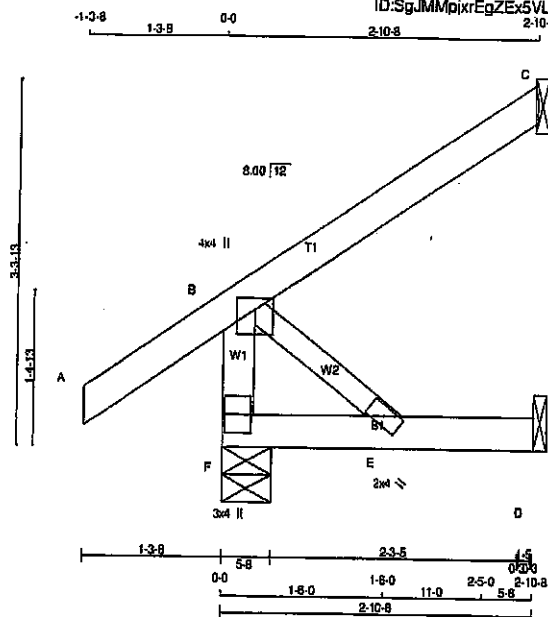

| LUMBER                |      |        |      | DESCR. |  |
|-----------------------|------|--------|------|--------|--|
| N. L. G. A. RULES     | SIZE | LUMBER |      | SPF    |  |
| CHORDS                |      |        |      | SPF    |  |
| F - B                 | 2x4  | DRY    | No.2 | SPF    |  |
| A - C                 | 2x4  | DRY    | No.2 | SPF    |  |
| F - D                 | 2x4  | DRY    | No.2 | SPF    |  |
| ALL WEBS              | 2x3  | DRY    | No.2 | SPF    |  |
| DRY: SEASONED LUMBER. |      |        |      |        |  |

| PLATES (table is in inches) |       |        |     |     |           |
|-----------------------------|-------|--------|-----|-----|-----------|
| JT                          | TYPE  | PLATES | W   | LEN | Y X       |
| B                           | TMW+p | MT20   | 4.0 | 4.0 | 1.25 2.00 |
| E                           | BMW+p | MT20   | 2.0 | 4.0 |           |
| F                           | BMW+p | MT20   | 3.0 | 4.0 |           |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED       |      | MAXIMUM FACTORED |      | INPUT |       | REQ'D |       |
|----------|------|----------------|------|------------------|------|-------|-------|-------|-------|
| JT       | VERT | GROSS REACTION | HORZ | GROSS REACTION   | HORZ | BRG   | IN-SX | BRG   | IN-SX |
| F        | 284  | 0              | 284  | 0                | 0    | 5-8   | 5-8   | 5-8   | 5-8   |
| C        | 132  | 0              | 132  | 0                | 0    | 1-8   | 1-8   | 1-8   | 1-8   |
| D        | 27   | 0              | 30   | 0                | 0    | 1-8   | 1-8   | 1-8   | 1-8   |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX. MIN. COMPONENT REACTIONS |      | SNOW       |      | LIVE |      | PERM. LIVE |      | WIND       |      | DEAD |      | SOIL |      |
|-----------|----------|-------------------------------|------|------------|------|------|------|------------|------|------------|------|------|------|------|------|
| JT        | COMBINED | SNOW                          | LIVE | PERM. LIVE | WIND | DEAD | SOIL | SNOW       | LIVE | PERM. LIVE | WIND | DEAD | SOIL | SNOW | LIVE |
| F         | 199      | 144.0                         | 0.0  | 0.0        | 0.0  | 55.0 | 0.0  | 0.0        | 0.0  | 0.0        | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| C         | 91       | 74.0                          | 0.0  | 0.0        | 0.0  | 17.0 | 0.0  | 0.0        | 0.0  | 0.0        | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |
| D         | 21       | 0.0                           | 0.0  | 0.0        | 0.0  | 21.0 | 0.0  | 0.0        | 0.0  | 0.0        | 0.0  | 0.0  | 0.0  | 0.0  | 0.0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |             | FACTORED       |                | WEBS  |             | FACTORED      |               |
|--------|-------------|----------------|----------------|-------|-------------|---------------|---------------|
| MEMB.  | FORCE (LBS) | VERT. LOAD LC1 | MAX. CS1 (LC)  | MEMB. | FORCE (LBS) | MAX. CS1 (LC) | MAX. CS1 (LC) |
| FR-TO  |             | FROM           | TO             | FR-TO |             | FROM          | TO            |
| F-B    | -258 / 0    | 0.0            | 0.0 0.03 (1)   | 7.81  | B-E         | 0 0           | 0.00 (1)      |
| A-B    | 0 / 35      | -91.8          | -91.8 0.13 (5) | 10.00 |             |               |               |
| B-C    | 0 / 0       | -91.8          | -91.8 0.13 (1) | 10.00 |             |               |               |
| F-E    | 0 / 0       | -18.5          | -18.5 0.04 (4) | 10.00 |             |               |               |
| E-D    | 0 / 0       | -18.5          | -18.5 0.04 (4) | 10.00 |             |               |               |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 2 X 12 = 23 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.8 | PSF |
|            | DL = 6.0  | PSF |
| BOT CH.    | LL = 0.0  | PSF |
|            | DL = 7.4  | PSF |
| TOTAL LOAD | = 39.0    | PSF |

SPACING = 24.0 IN. O.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2010, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2018 AMENDMENT)  
- CSA 086-08, CSA 088-14  
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B-S), BC=0.04/1.00 (E-F-4), WB=0.00/1.00 (B-E-1), SS=0.09/1.00 (A-B-S)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

#### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PS)  | (PL)      | (PL)  | (PL)    |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 618       | 354   | 1667    |
|       | 788       | 1567  | 1656    |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.18 (B) (INPUT = 0.90)  
JSI METAL = 0.05 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2006784

|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>J22 | QUANTITY<br>2 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 5 Oct 2019 Mitek Industries, Inc. Thu Apr 23 15:13:50 2020 Page 1  
ID: SqJMMpkrEgZE5VLzZMvKzuJd-US5RYTVHqg2qgICORuLx5LfuKIO6MawpY61a7zNpIF

Scale = 1/25.1

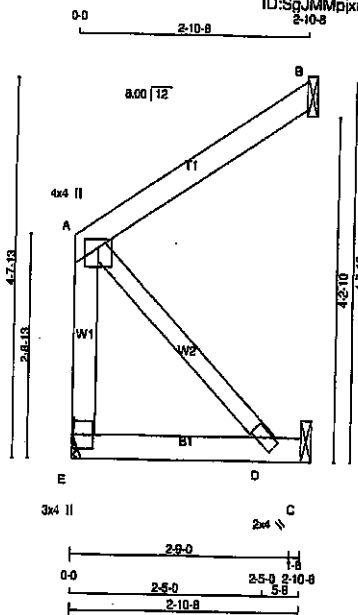

#### LUMBER

##### N. L. G. A. RULES

| CHORDS | SIZE | DRY | No.2 |
|--------|------|-----|------|
| E - A  | 2x4  | DRY | No.2 |
| A - B  | 2x4  | DRY | No.2 |
| E - C  | 2x4  | DRY | No.2 |

ALL WEBS 2x3 DRY SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| A  | TMW-w  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| D  | BMW-w  | MT20   | 2.0 | 4.0 |      |      |
| E  | BMV1-p | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG  | RECORD BRG |
|----|-------------------------|------|---------------------------------|------|------------|------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |            |            |
| E  | 158                     | 0    | 158                             | 0    | MECHANICAL |            |
| B  | 132                     | 0    | 132                             | 0    | 1-8        | 1-8        |
| C  | 27                      | 0    | 30                              | 0    | 1-8        | 1-8        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

SEE MITEK STANDARD DETAIL B97781H FOR CONNECTION TO JOINT(S) B, C

#### UNFACTORED REACTIONS

| JT | 1ST LCASE COMBINED | MAX./MIN. COMPONENT REACTIONS |       |           |       |        |       |
|----|--------------------|-------------------------------|-------|-----------|-------|--------|-------|
|    |                    | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
| E  | 112                | 74 / 0                        | 0 / 0 | 0 / 0     | 0 / 0 | 39 / 0 | 0 / 0 |
| B  | 91                 | 74 / 0                        | 0 / 0 | 0 / 0     | 0 / 0 | 17 / 0 | 0 / 0 |
| C  | 21                 | 0 / 0                         | 0 / 0 | 0 / 0     | 0 / 0 | 21 / 0 | 0 / 0 |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. FURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                                 |                                 |                        |                            | WEBS  |                                 |                  |  |
|--------|---------------------------------|---------------------------------|------------------------|----------------------------|-------|---------------------------------|------------------|--|
| MEMB.  | MAX. FACTORED<br>FORCE<br>(LBS) | FACTORED<br>VERT. LOAD<br>(PLF) | LC1<br>MAX<br>CSI (LC) | MAX.<br>UNBRACED<br>LENGTH | MEMB. | MAX. FACTORED<br>FORCE<br>(LBS) | MAX.<br>CSI (LC) |  |
| FR-TO  |                                 | FROM TO                         |                        | FR-TO                      |       |                                 |                  |  |
| E-A    | -132 / 0                        | 0.0 0.0                         | 0.02 (1)               | 7.81                       | A-D   | 0 / 0                           | 0.00 (1)         |  |
| A-B    | 0 / 0                           | -91.8 -91.8                     | 0.13 (1)               | 10.00                      |       |                                 |                  |  |
| E-D    | 0 / 0                           | -18.5 -18.5                     | 0.04 (4)               | 10.00                      |       |                                 |                  |  |
| D-C    | 0 / 0                           | -18.5 -18.5                     | 0.02 (4)               | 10.00                      |       |                                 |                  |  |

TOTAL WEIGHT = 2 X 13 = 25 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2010, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 088-09, CSA 088-14  
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B:1), BC=0.04/1.00 (D-E:4), WB=0.00/1.00 (A-D:1), SS=0.09/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MT20  | 618       | 354   | 1667    |
|       | 788       | 1987  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.09 (A) (INPUT = 0.90)  
JSI METAL= 0.03 (A) (INPUT = 1.00)




Structural component only  
DWG# T-2006785

|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408264</b> | TRUSS NAME<br><b>J23</b> | QUANTITY<br><b>7</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:51 2020 Page 1  
ID: SgJMMpjrEgZEx5VLzZMvKzjUd-zelqmpWwb\_AhHSna\_csAdZB4U5k7pp31Csa6azNpIE

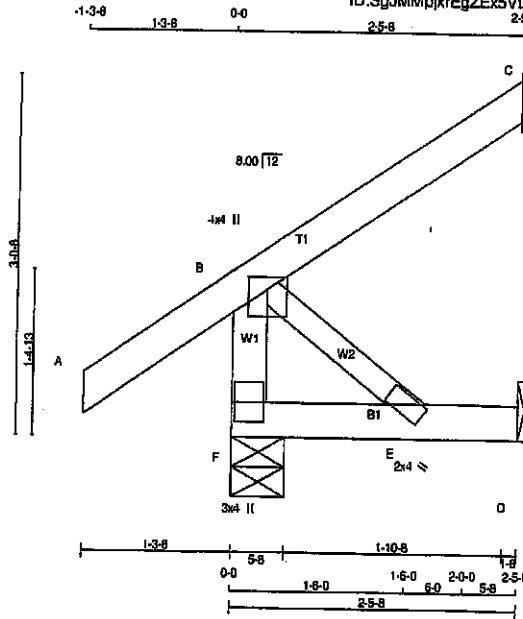

Scale = 1:18.0

#### LUMBER

| N. L. G. A. RULES     | SIZE    | LUMBER | DESCR. |
|-----------------------|---------|--------|--------|
| CHORDS                |         |        |        |
| F - B                 | 2x4 DRY | No.2   | SPF    |
| A - C                 | 2x4 DRY | No.2   | SPF    |
| F - D                 | 2x4 DRY | No.2   | SPF    |
| ALL WEBS              | 2x3 DRY | No.2   | SPF    |
| DRY, SEASONED LUMBER. |         |        |        |

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMW+p  | MT20   | 4.0 | 4.0 | 1.25 | 2.00 |
| E  | BMW+w  | MT20   | 2.0 | 4.0 |      |      |
| F  | BMV1+p | MT20   | 3.0 | 4.0 |      |      |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG IN-SX | RECORD BRG IN-SX |
|----|-------------------------|------|---------------------------------|------|-----------------|------------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |                 |                  |
| F  | 281                     | 0    | 281                             | 0    | 5-8             | 5-8              |
| C  | 113                     | 0    | 113                             | 0    | 1-8             | 1-8              |
| D  | 23                      | 0    | 25                              | 0    | 1-8             | 1-8              |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| JT | 1ST CASE COMBINED | MAX./MIN. COMPONENT REACTIONS |       |           |       |        |       |
|----|-------------------|-------------------------------|-------|-----------|-------|--------|-------|
|    |                   | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
| F  | 183               | 133 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 49 / 0 | 0 / 0 |
| C  | 78                | 63 / 0                        | 0 / 0 | 0 / 0     | 0 / 0 | 15 / 0 | 0 / 0 |
| D  | 18                | 0 / 0                         | 0 / 0 | 0 / 0     | 0 / 0 | 18 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                           |                           |               |                    | WEBS  |                           |               |  |
|--------|---------------------------|---------------------------|---------------|--------------------|-------|---------------------------|---------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CS1 (LC) | MAX. UNBRAC LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CS1 (LC) |  |
| FR-TO  |                           | FROM TO                   |               |                    | FR-TO |                           |               |  |
| F-B    | -239 / 0                  | 0.0                       | 0.0           | 0.02 (1)           | 7.81  | 0 / 0                     | 0.00 (1)      |  |
| A-B    | 0 / 35                    | -91.8                     | -91.8         | 0.13 (5)           | 10.00 |                           |               |  |
| B-C    | 0 / 0                     | -91.8                     | -91.8         | 0.09 (1)           | 10.00 |                           |               |  |
| F-E    | 0 / 0                     | -18.5                     | -18.5         | 0.03 (4)           | 10.00 |                           |               |  |
| E-D    | 0 / 0                     | -18.5                     | -18.5         | 0.03 (4)           | 10.00 |                           |               |  |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 7 X 11 = 74 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |               |
|------------|---------------|
| TOP CH.    | LL = 25.6 PSF |
|            | DL = 6.0 PSF  |
| BOT CH.    | LL = 0.0 PSF  |
|            | DL = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF    |

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B:5), BC=0.03/1.00 (E-F:4),  
WB=0.00/1.00 (B-E:1), SS=0.08/1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI)      |
|-----------------|-------------|--------------------|
|                 |             |                    |
| MAX MIN         | MAX MIN     | MAX MIN            |
| MT20            | 618 354     | 1607 788 1987 1856 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.17 (B) (INPUT = 0.90)  
JSI METAL= 0.05 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2006786




|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>J25 | QUANTITY<br>6 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:54 2020 Page 1  
ID: SgJMMpjxEqZEx5VLzZMvKzjwJd-NDLyOqYotvYG8wV9gkPFBpZ3JkA2AZVjA4FjvzNpIB

Scale = 1:29.3

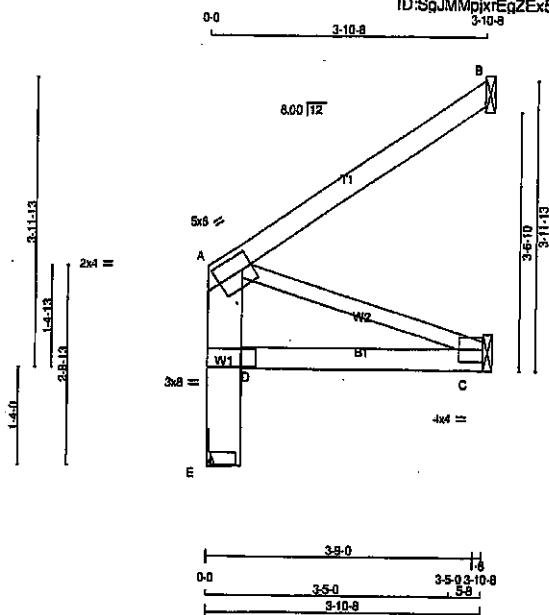

#### LUMBER

##### N. L. G. A. RULES

| CHORDS                | SIZE | LUMBER | DESCR. |
|-----------------------|------|--------|--------|
| E - A                 | 2x6  | DRY    | No.2   |
| A - B                 | 2x4  | DRY    | No.2   |
| D - C                 | 2x4  | DRY    | No.2   |
| ALL WEBS              | 2x3  | DRY    | No.2   |
| DRY: SEASONED LUMBER. |      |        |        |

#### PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| A  | TMVW-1 | MT20   | 5.0 | 6.0 | 2.50 | 1.75 |
| A  | TP-p   | MT20   | 2.0 | 4.0 | 5.50 | 0.75 |
| C  | BMV1-1 | MT20   | 4.0 | 4.0 |      |      |
| D  | BVM-1  | MT20   | 3.0 | 6.0 | 1.50 | 2.50 |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG  | REGRD BRG |
|----|-------------------------|------|---------------------------------|------|------------|-----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |            |           |
| E  | 212                     | 0    | 212                             | 0    | MECHANICAL |           |
| B  | 178                     | 0    | 178                             | 0    | 1-8        | 1-8       |
| C  | 34                      | 0    | 38                              | 0    | 1-8        | 1-8       |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) B, C

#### UNFACTORED REACTIONS

| JT | 1ST CASE | SNOW   | LIVE  | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|----------|--------|-------|------------|-------|--------|-------|
| E  | 150      | 99 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 51 / 0 | 0 / 0 |
| B  | 122      | 99 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 23 / 0 | 0 / 0 |
| C  | 27       | 0 / 0  | 0 / 0 | 0 / 0      | 0 / 0 | 27 / 0 | 0 / 0 |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS                    |                 |               |                      | WEBS                      |                 |               |                      |
|-------|---------------------------|-----------------|---------------|----------------------|---------------------------|-----------------|---------------|----------------------|
|       | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PL) | LC1 MAX. (LC) | UNBRACED LENGTH (FT) | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PL) | LC1 MAX. (LC) | UNBRACED LENGTH (FT) |
| E-D   | -212 / 0                  | 0.0             | 0.0           | 0.02 (1)             | 7.81                      | A-C             | 0 / 0         | 0.00 (1)             |
| D-A   | -178 / 0                  | 0.0             | 0.0           | 0.01 (1)             | 7.81                      |                 |               |                      |
| A-B   | 0 / 0                     | -91.8           | -91.8         | 0.23 (1)             | 10.00                     |                 |               |                      |
| D-C   | 0 / 0                     | -18.5           | -18.5         | 0.07 (4)             | 10.00                     |                 |               |                      |

TOTAL WEIGHT = 6 X 17 = 103 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |           |     |
|------------|-----------|-----|
| TOP CH.    | LL = 25.6 | PSF |
|            | DL = 6.0  | PSF |
| BOT CH.    | LL = 0.0  | PSF |
|            | DL = 7.4  | PSF |
| TOTAL LOAD | = 39.0    | PSF |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = 1/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = 1/999 (0.00")  
ALLOWABLE DEFL.(TL) = 1/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = 1/999 (0.01")

CSI: TC=0.23/1.00 (A-B:1), BC=0.07/1.00 (C-D:4), WB=0.00/1.00 (A-C:1), SS=0.12/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
|       | (PS)      | (PL)  | (PL)               |
| MT20  | 618       | 354   | 1667 788 1987 1655 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.05 (A) (INPUT = 0.90)  
JSI METAL = 0.03 (D) (INPUT = 1.00)




Structural component only  
DWG# T-2006788

|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408264 | TRUSS NAME<br>J26 | QUANTITY<br>7 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Thu Apr 23 15:13:55 2020 Page 1  
ID: SgJMMpxrEgZEx5VLzZMvKzjuJd-rPvKbAZQeDg7m44LDRx6oPMkpj4IndpfyqoFLzNpIA

Scale = 1:24.4

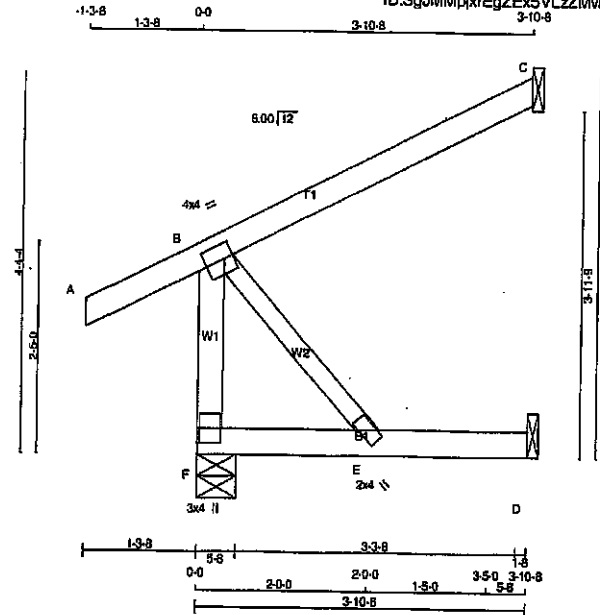

| LUMBER                |        |      |        |        |
|-----------------------|--------|------|--------|--------|
| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER | DESCR. |
| F - B                 | 2x4    | DRY  | No.2   | SPF    |
| A - C                 | 2x4    | DRY  | No.2   | SPF    |
| F - D                 | 2x4    | DRY  | No.2   | SPF    |
| ALL WEBS              | 2x3    | DRY  | No.2   | SPF    |
| DRY: SEASONED LUMBER. |        |      |        |        |

| PLATES (table in inches) |         |        |     |     |           |
|--------------------------|---------|--------|-----|-----|-----------|
| JT                       | TYPE    | PLATES | W   | LEN | Y X       |
| B                        | TMVW-t  | MT20   | 4.0 | 4.0 | 2.00 1.25 |
| E                        | BMW-w   | MT20   | 2.0 | 4.0 |           |
| F                        | BMV-t+p | MT20   | 3.0 | 4.0 |           |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED       |       | MAXIMUM FACTORED |      | INPUT |     | REQD |       |
|----------|------|----------------|-------|------------------|------|-------|-----|------|-------|
| JT       | VERT | GROSS REACTION | HORIZ | GROSS REACTION   | DOWN | BRG   | UP  | BRG  | IN-SX |
| F        | 338  | 0              | 338   | 0                | 0    | 5-8   | 5-8 | 5-8  | 5-8   |
| C        | 178  | 0              | 178   | 0                | 0    | 1-8   | 1-8 | 1-8  | 1-8   |
| D        | 36   | 0              | 40    | 0                | 0    | 1-8   | 1-8 | 1-8  | 1-8   |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX/MIN |       | LIVE  |       | PERM  |       | WIND  |       | DEAD  |       | SOIL  |       |
|-----------|----------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| JT        | COMBINED | SNOW    | WIND  | PERM  | LIVE  | PERM  | WIND  | PERM  | WIND  | PERM  | DEAD  | PERM  | SOIL  |
| F         | 237      | 189 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| C         | 122      | 99 / 0  | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| D         | 29       | 0 / 0   | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |             | FACTORED         |                | WEBS  |             | FACTORED     |              |
|--------|-------------|------------------|----------------|-------|-------------|--------------|--------------|
| MEMB.  | FORCE (LBS) | VERT. LOAD (LBS) | MAX. CS (LC)   | MEMB. | FORCE (LBS) | MAX. CS (LC) | MAX. CS (LC) |
| FR-TO  |             | FROM             | TO             | FR-TO |             | FROM         | TO           |
| F-B    | -302 / 0    | 0.0              | 0.0 0.04 (1)   | 7.81  | 0-0         | 0.00 (1)     |              |
| A-B    | 0 / 28      | -91.8            | -91.8 0.14 (5) | 10.00 |             |              |              |
| B-C    | 0 / 0       | -91.8            | -91.8 0.23 (1) | 10.00 |             |              |              |
| F-E    | 0 / 0       | -18.5            | -18.5 0.08 (4) | 10.00 |             |              |              |
| E-D    | 0 / 0       | -18.5            | -18.5 0.08 (4) | 10.00 |             |              |              |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 7 X 16 = 109 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |   |      |     |
|------------|----|---|------|-----|
| TOP CH.    | LL | = | 25.8 | PSF |
|            | DL | = | 6.0  | PSF |
| BOT CH.    | LL | = | 0.0  | PSF |
|            | DL | = | 7.4  | PSF |
| TOTAL LOAD |    | = | 39.0 | PSF |

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19')  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.00')  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19')  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.01')

CSI: TC=0.23/1.00 (B-C:1), BC=0.08/1.00 (E-F:4), WB=0.00/1.00 (B-E:1), SS=0.12/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT


#### NAIL VALUES

| PLATE   | GRIP(DRY) | SHEAR    | SECTION   |
|---------|-----------|----------|-----------|
| (PSI)   | (PLI)     | (PLI)    | (PLI)     |
| MAX MIN | MAX MIN   | MAX MIN  | MAX MIN   |
| MT20    | 618 354   | 1667 788 | 1987 1656 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP = 0.18 (B) (INPUT = 0.90)  
JSI METAL = 0.05 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2006789

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>J61</b> | QUANTITY<br><b>6</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          | TRUSS DESC.          |                 |                                      |          |

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 11:18:43 2020 Page 1  
ID:Lv307gsCyJh1sHbR4r5BVzjssS-ECKE7aruRj8hCV4c07OWX0qevsfi-K69y9bOwzMDGg

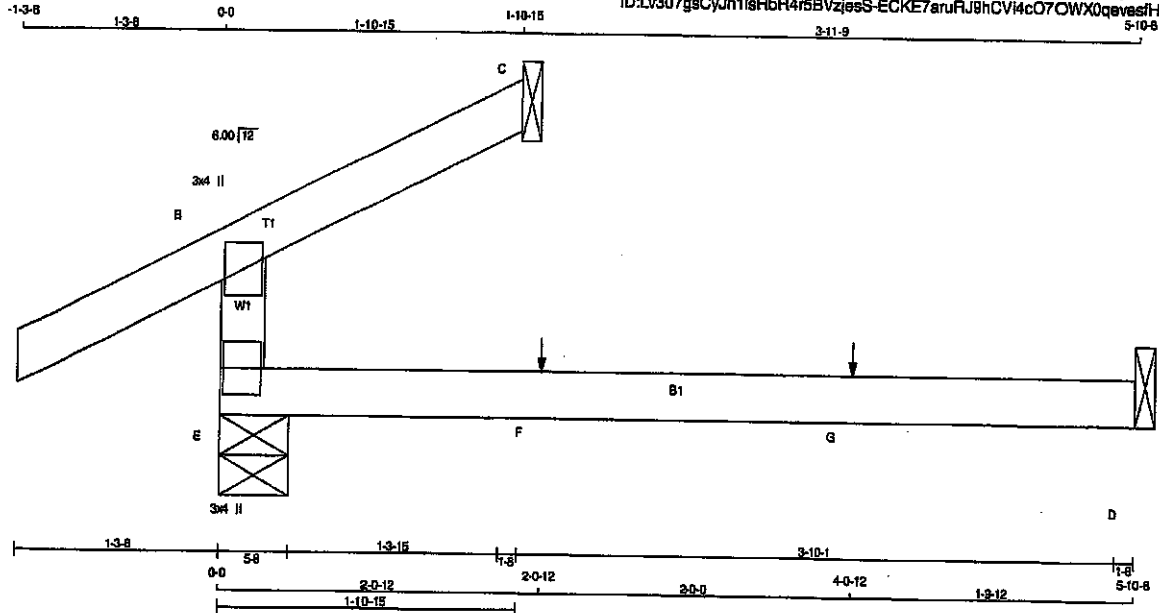

Scale = 1:13.4

#### LUMBER

N.L.G.A. RULES

| CHORDS | SIZE | LUMBER   |
|--------|------|----------|
| E - B  | 2x4  | DRY No.2 |
| A - C  | 2x4  | DRY No.2 |
| E - D  | 2x4  | DRY No.2 |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE  | PLATES | W   | LEN | Y | X |
|----------|--------|-----|-----|---|---|
| B TMV+p  | MT20   | 3.0 | 4.0 |   |   |
| E BMV1+p | MT20   | 3.0 | 4.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
|    | VERT                    | DOWN                            | UPLIFT    | IN-SX    |
| JT | 297                     | 297                             | 0         | 5-8      |
| E  | 68                      | 68                              | 0         | 1-8      |
| C  | 45                      | 50                              | 0         | 1-8      |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

##### UNFACTORED REACTIONS

|    | 1ST LCASE | MAX/MIN COMPONENT REACTIONS | PERM LIVE | WIND | DEAD | SOIL |
|----|-----------|-----------------------------|-----------|------|------|------|
|    | COMBINED  | SNOW                        | LIVE      |      |      |      |
| JT | 212       | 130/0                       | 0/0       | 0/0  | 82/0 | 0/0  |
| E  | 46        | 37/0                        | 0/0       | 0/0  | 9/0  | 0/0  |
| C  | 36        | 0/0                         | 0/0       | 0/0  | 36/0 | 0/0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (4)

|     | CHORDS                    | WEBS                       |
|-----|---------------------------|----------------------------|
|     | MAX. FACTORED FORCE (LBS) | MAX. FACTORED FORCE (LBS)  |
|     | MEMB.                     | MEMB.                      |
|     | FR-TO                     | FR-TO                      |
| E-B | -234/0                    | 0.0 0.0 0.13 (4) 7.81      |
| A-B | 0/28                      | -91.8 -91.8 0.12 (1) 10.00 |
| B-C | -10/0                     | -91.8 -91.8 0.06 (1) 10.00 |
| E-F | 0/0                       | -18.5 -18.5 0.13 (4) 10.00 |
| F-G | 0/0                       | -18.5 -18.5 0.13 (4) 10.00 |
| G-D | 0/0                       | -18.5 -18.5 0.13 (4) 10.00 |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| F  | 2-0-12 | 1   | 1    | 1    | FRONT | VERT | TOTAL | —    | C1    |
| G  | 4-0-12 | 1   | 1    | 1    | FRONT | VERT | TOTAL | —    | C1    |

##### CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 6 X 12 = 70 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|                       |               |
|-----------------------|---------------|
| TOP CH.               | LL = 25.6 PSF |
| DL = 8.0 PSF          |               |
| BOT CH.               | LL = 0.8 PSF  |
| DL = 7.4 PSF          |               |
| TOTAL LOAD = 39.0 PSF |               |

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")

CALCULATED VERT. DEFL.(LL) = L/999 (0.00")

ALLOWABLE DEFL.(TL) = L/360 (0.20")

CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.13/1.00 (B-E), BC=0.13/1.00 (D-E), WB=0.00/1.00 (n/a), SS=0.09/1.00 (A-B=1)

DOL LUMBER=0.99 NAIL=0.99 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE   | GRIP(DRY) | SHEAR    | SECTION   |
|---------|-----------|----------|-----------|
| (PSI)   | (PLI)     | (PLI)    |           |
| MAX MIN | MAX MIN   | MAX MIN  |           |
| MT20    | 618 354   | 1667 786 | 1987 1656 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.10 (E) (INPUT = 0.90)

JSI METAL= 0.07 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007740

|                    |                   |               |          |                               |             |          |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|
| JOB NAME<br>408265 | TRUSS NAME<br>J62 | QUANTITY<br>6 | PLY<br>1 | JOB DESC.<br>GREEN PARK HOMES | TRUSS DESC. | DRWG NO. |
|--------------------|-------------------|---------------|----------|-------------------------------|-------------|----------|

Tamrack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:44 2020 Page 1  
ID:lv307gsCyJh1lsHbR4r5BVzjesS-iOudLwsXCdHYqfHGA5ed3IZ\_u\_50kaGNcv6wMzMdGf

Scale = 1:18.2

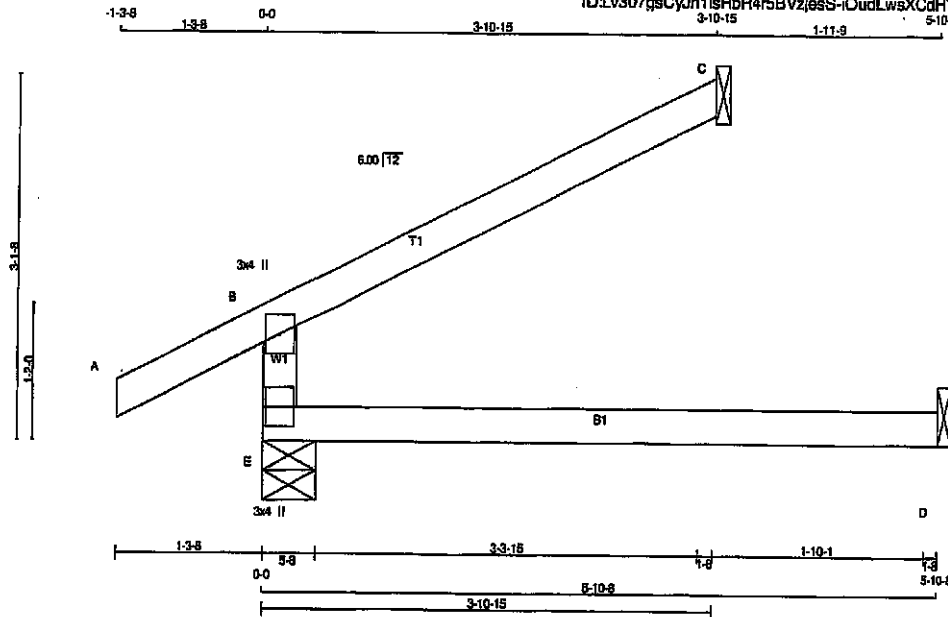

| CHORDS | SIZE | DRY | LUMBER |
|--------|------|-----|--------|
| E - B  | 2x4  | DRY | No.2   |
| A - C  | 2x4  | DRY | No.2   |
| E - D  | 2x4  | DRY | No.2   |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) | W    | LEN | Y   | X |
|-----------------------------|------|-----|-----|---|
| JT TYPE                     | MT20 | 3.0 | 4.0 |   |
| B                           | MT20 | 3.0 | 4.0 |   |
| E                           | MT20 | 3.0 | 4.0 |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| E  | 412                     | 0    | 412                             | 0    | 5-8       | 5-8      |
| C  | 135                     | 0    | 135                             | 0    | 1-8       | 1-8      |
| D  | 45                      | 0    | 50                              | 0    | 1-8       | 1-8      |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| JT | 1ST LCASE COMBINED | MAX/MIN. COMPONENT REACTIONS |       |            |        | WIND   | DEAD  | SOIL  |
|----|--------------------|------------------------------|-------|------------|--------|--------|-------|-------|
|    |                    | SNOW                         | LIVE  | PERM. LIVE | UNBRAC |        |       |       |
| E  | 291                | 194 / 0                      | 0 / 0 | 0 / 0      | 0 / 0  | 97 / 0 | 0 / 0 | 0 / 0 |
| C  | 93                 | 75 / 0                       | 0 / 0 | 0 / 0      | 0 / 0  | 18 / 0 | 0 / 0 | 0 / 0 |
| D  | 36                 | 0 / 0                        | 0 / 0 | 0 / 0      | 0 / 0  | 38 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 18.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |       |                           | WEBBS |                           |                           |     |  |
|--------|---------------------------|---------------------------|-------|---------------------------|-------|---------------------------|---------------------------|-----|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | LC1   | MAX. FACTORED FORCE (LBS) | MEMB. | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | LC1 |  |
| FR-TO  |                           | FROM                      | TO    | CSI (LC)                  | FR-TO |                           | FROM                      | TO  |  |
| E-B    | -349 / 0                  | 0.0                       | 0.0   | 0.13 (4)                  | 7.81  |                           |                           |     |  |
| A-B    | 0 / 28                    | -91.8                     | -91.8 | 0.12 (1)                  | 10.00 |                           |                           |     |  |
| B-C    | -20 / 0                   | -91.8                     | -91.8 | 0.24 (1)                  | 6.25  |                           |                           |     |  |
| E-D    | 0 / 0                     | -18.5                     | -18.5 | 0.13 (4)                  | 10.00 |                           |                           |     |  |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.8 PSF |
| DL = 6.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

SPACING = 24.0 IN. OC

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2018 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(65 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = 1/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = 1/989 (0.00")  
ALLOWABLE DEFL.(TL) = 1/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = 1/999 (0.03")

CSI: TC=0.24/1.00 (B-C:1), BC=0.13/1.00 (D-E:4), WS=0.00/1.00 (n/a:0), SS=0.16/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR   | SECTION  |
|-----------------|---------|----------|
| (PSI)           | (PLI)   | (PLI)    |
| MAX MIN         | MAX MIN | MAX MIN  |
| MT20            | 618 354 | 1657 788 |

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.15 (E) (INPUT = 0.90)  
JSI METAL= 0.10 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007741

|                           |                          |                      |                 |                                      |          |
|---------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b> | TRUSS NAME<br><b>J63</b> | QUANTITY<br><b>7</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| TRUSS DESC.               |                          |                      |                 |                                      |          |

Tamarack Roof Truss, Burlington

Version 8.310 S Oct 29 2019 MITek Industries, Inc. Tue Apr 28 11:18:46 2020 Page 1  
ID:Lv307gsCyJh1sHbR4r5BVzlesS-an?NmcunkEXF3yRfHwG68AeM36hKse4ZrwOF?FzMDGd

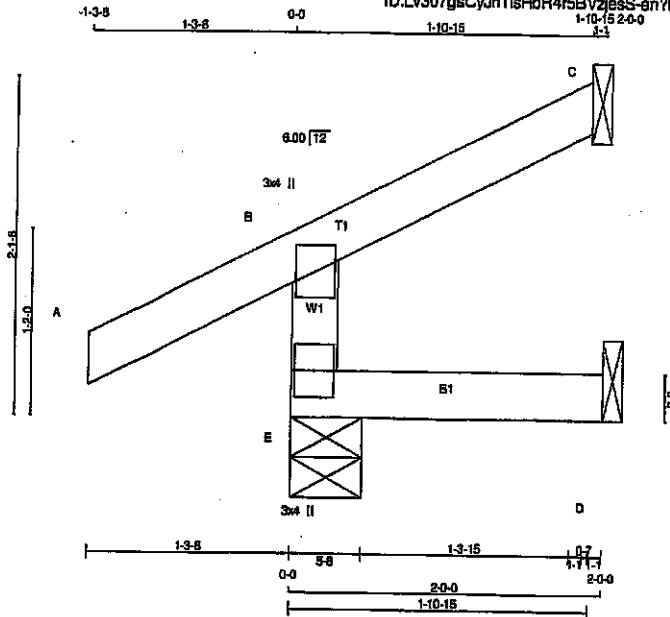

TOTAL WEIGHT = 7 X 7 = 51 lb

| LUMBER            |        |      |        |        |
|-------------------|--------|------|--------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
| E - B             | 2x4    | DRY  | No.2   | SPF    |
| A - C             | 2x4    | DRY  | No.2   | SPF    |
| E - D             | 2x4    | DRY  | No.2   | SPF    |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |        |        |     |     |     |
|-----------------------------|--------|--------|-----|-----|-----|
| JT                          | TYPE   | PLATES | W   | LEN | Y X |
| B                           | BMV+p  | MT20   | 3.0 | 4.0 |     |
| E                           | BMV1+p | MT20   | 3.0 | 4.0 |     |

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |        | REQD BRG |       |
|-------------------------|------|---------------------------------|------|-----------|--------|----------|-------|
| JT                      | VERT | HORZ                            | DOWN | HORZ      | UPLIFT | IN-SX    | IN-SX |
| E                       | 254  | 0                               | 254  | 0         | 0      | 5-8      | 5-8   |
| C                       | 86   | 0                               | 86   | 0         | 0      | 1-8      | 1-8   |
| D                       | 16   | 0                               | 16   | 0         | 0      | 1-8      | 1-8   |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

| UNFACTORED REACTIONS |          | MAX/MIN. COMPONENT REACTIONS |      |           |      |      |      |  |
|----------------------|----------|------------------------------|------|-----------|------|------|------|--|
| JT                   | COMBINED | SNOW                         | LIVE | PERM.LIVE | WIND | DEAD | SOIL |  |
| E                    | 177      | 130/0                        | 0/0  | 0/0       | 0/0  | 47/0 | 0/0  |  |
| C                    | 48       | 37/0                         | 0/0  | 0/0       | 0/0  | 9/0  | 0/0  |  |
| D                    | 13       | 0/0                          | 0/0  | 0/0       | 0/0  | 13/0 | 0/0  |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                  | FACTORED         |               | WEBS  |                  | FACTORED      |  |
|--------|------------------|------------------|---------------|-------|------------------|---------------|--|
| MEMB.  | MAX. FORCE (LBS) | VERT. LOAD (PLF) | MAX. LCH (LC) | MEMB. | MAX. FORCE (LBS) | MAX. LCH (LC) |  |
| FR-TO  |                  |                  |               | FR-TO |                  |               |  |
| E-B    | -234/0           | 0.0              | 0.0 (4)       | 7.81  |                  |               |  |
| A-B    | 0/28             | -91.8            | -91.8 (1)     | 10.00 |                  |               |  |
| B-C    | -10/0            | -91.8            | -91.8 (1)     | 10.00 |                  |               |  |
| E-D    | 0/0              | -18.5            | -18.5 (4)     | 10.00 |                  |               |  |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. G.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBCC 2010, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

DESIGN ASSUMPTIONS  
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(LL) =  $L/899$  (0.00")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(TL) =  $L/899$  (0.00")

CSK: TC=0.12/1.00 (A-B:1), BC=0.02/1.00 (D-E:4),  
WB=0.00/1.00 (A-B:1), SS=0.09/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PS) (PL) (PL)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 788 1937 1658

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.10 (E) (INPUT = 0.90)  
JSI METAL= 0.06 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007742

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>J64</b> | QUANTITY<br><b>6</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 11:18:47 2020 Page 1  
ID:Lv307qsCyJh1stHbR4r5BVzjesS-6zZizyuPUYf6h60rEBLgNBVxW1Zb5Ji4Z7pXhzMDGc

Scale = 1:18.5

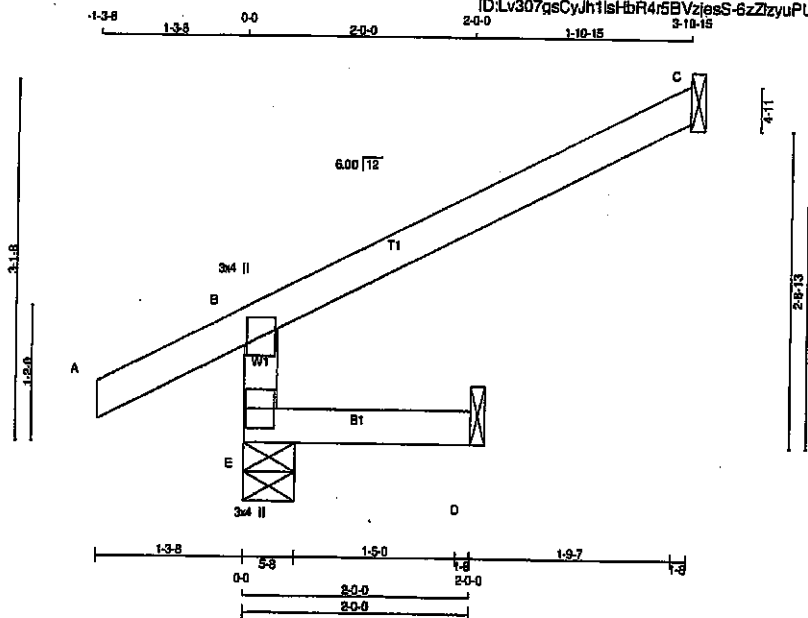

#### LUMBER

| N. L. G. A. RULES | SIZE | LUMBER | DESCR. |
|-------------------|------|--------|--------|
| CHORDS            | 2x4  | No.2   | SPF    |
| E - B             | 2x4  | DRY    | SPF    |
| A - C             | 2x4  | DRY    | SPF    |
| E - D             | 2x4  | DRY    | SPF    |

DRY: SEASONED LUMBER.

#### PLATES (table in inches)

| JT TYPE | PLATES | W    | LEN | Y   | X |
|---------|--------|------|-----|-----|---|
| B       | TMV+p  | MT20 | 3.0 | 4.0 |   |
| E       | BMV1+p | MT20 | 3.0 | 4.0 |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----------|-------------------------|---------------------------------|-----------|----------|
| JT       | VERT                    | DOWN                            | IN-SX     | IN-SX    |
| E        | 389                     | 389                             | 5-8       | 5-8      |
| C        | 135                     | 135                             | 1-8       | 1-8      |
| D        | 16                      | 16                              | 1-8       | 1-8      |

SEE MITEK STANDARD DETAIL 897781 H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| 1ST CASE |          | MAX/MIN. COMPONENT REACTIONS |       |           |       |        |       |
|----------|----------|------------------------------|-------|-----------|-------|--------|-------|
| JT       | COMBINED | SNOW                         | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
| E        | 258      | 194 / 0                      | 0 / 0 | 0 / 0     | 0 / 0 | 62 / 0 | 0 / 0 |
| C        | 98       | 75 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 18 / 0 | 0 / 0 |
| D        | 13       | 0 / 0                        | 0 / 0 | 0 / 0     | 0 / 0 | 13 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) |
|--------|---------------------------|---------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| MEMB.  | FR-TO                     | FR-TO                     | FR-TO                          | FR-TO                          | FR-TO                          | FR-TO                          | FR-TO                          | FR-TO                          | FR-TO                          |
| E-B    | -349 / 0                  | 0.0                       | 0.0                            | 0.01 (4)                       | 7.81                           |                                |                                |                                |                                |
| A-B    | 0 / 28                    | -91.8                     | -91.8                          | 0.13 (5)                       | 10.00                          |                                |                                |                                |                                |
| B-C    | -20 / 0                   | -91.8                     | -91.8                          | 0.24 (1)                       | 6.25                           |                                |                                |                                |                                |
| E-D    | 0 / 0                     | -18.5                     | -18.5                          | 0.02 (4)                       | 10.00                          |                                |                                |                                |                                |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 6 X 10 = 59 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |            |
|------------|------------|
| TOP CH. LL | = 25.6 PSF |
| DL         | = 6.0 PSF  |
| BOT CH. LL | = 0.0 PSF  |
| DL         | = 7.4 PSF  |
| TOTAL LOAD | = 39.0 PSF |

SPACING = 24.0 IN. C.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF NBCC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-09, CSA 086-14
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.00")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.19")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.00")

CS:  $TO=0.24/1.00$  (B-C:1),  $BC=0.02/1.00$  (D-E:4),  
 $WB=0.00/1.00$  (n/a:0),  $SSI=0.18/1.00$  (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) | MAX MIN | MAX MIN | MAX MIN |
|-----------------|-------------|---------------|---------|---------|---------|
| MT20            | 618         | 354           | 1687    | 788     | 1987    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (E) (INPUT = 0.90)  
JSI METAL= 0.10 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007743

|             |            |          |     |                  |          |
|-------------|------------|----------|-----|------------------|----------|
| JOB NAME    | TRUSS NAME | QUANTITY | PLY | JOB DESC.        | DRWG NO. |
| 408265      | J66        | 2        | 1   | GREEN PARK HOMES |          |
| TRUSS DESC. |            |          |     |                  |          |

Tamareck Roof Truss, Burlington

Version 8.310 5 Oct 28 2019 Mitek Industries, Inc. Tue Apr 28 11:18:48 2020 Page 1  
ID:Lv307gsCyJh1stHbR4r5BVjesS-a977Alv1FmzJGa1PxiaDbjLwNXYZnIDIM37zMDG6

Scale = 1:13.4

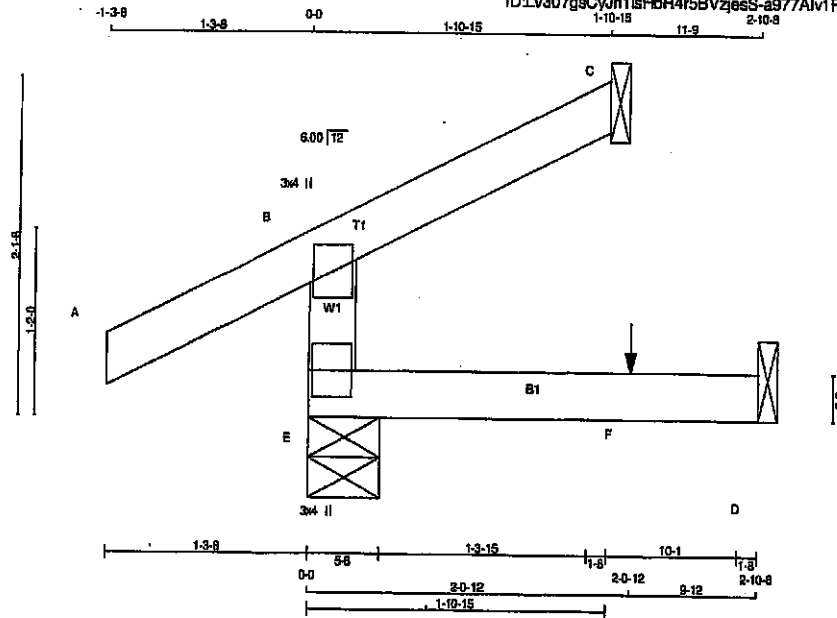

TOTAL WEIGHT = 2 X 8 = 17 lb

#### LUMBER

| N. L. G. A. RULES | SIZE | LUMBER |
|-------------------|------|--------|
| CHORDS            | 2x4  | No.2   |
| E - B             | 2x4  | DRY    |
| A - C             | 2x4  | DRY    |
| E - D             | 2x4  | DRY    |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT TYPE | PLATES | W    | LEN | Y   | X |
|---------|--------|------|-----|-----|---|
| B       | TMV+p  | MT20 | 3.0 | 4.0 |   |
| E       | BMV1+p | MT20 | 3.0 | 4.0 |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | RECORD BRG |
|----|-------------------------|---------------------------------|-----------|------------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ       |
| E  | 264                     | 0                               | 264       | 0          |
| C  | 66                      | 0                               | 66        | 0          |
| D  | 24                      | 0                               | 24        | 0          |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

##### UNFACTORED REACTIONS

| JT | 1ST CASE | SNOW    | LIVE  | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|----------|---------|-------|------------|-------|--------|-------|
| E  | 185      | 130 / 0 | 0 / 0 | 0 / 0      | 0 / 0 | 66 / 0 | 0 / 0 |
| C  | 46       | 37 / 0  | 0 / 0 | 0 / 0      | 0 / 0 | 9 / 0  | 0 / 0 |
| D  | 19       | 0 / 0   | 0 / 0 | 0 / 0      | 0 / 0 | 19 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

##### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

##### LOADING

TOTAL LOAD CASES: (5)

| MEMB. | CHORDS   | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | FACTORED HORIZ. LOAD (LBS) | MAX. UNBRACED LENGTH | WEBS | MAX. FACTORED FORCE (LBS) |
|-------|----------|---------------------------|---------------------------|----------------------------|----------------------|------|---------------------------|
| FR-TO |          |                           |                           |                            |                      |      |                           |
| E-B   | -234 / 0 | 0.0                       | 0.0                       | 0.02 (4)                   | 7.61                 |      |                           |
| A-B   | 0 / 28   | -91.8                     | -91.8                     | 0.13 (3)                   | 10.00                |      |                           |
| B-C   | -10 / 0  | -91.8                     | -91.8                     | 0.08 (1)                   | 10.00                |      |                           |
| E-F   | 0 / 0    | -18.5                     | -18.5                     | 0.03 (4)                   | 10.00                |      |                           |
| F-D   | 0 / 0    | -18.5                     | -18.5                     | 0.03 (4)                   | 10.00                |      |                           |

##### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| F  | 2-0-12 | -1  | -1   | -    | FRONT | VERT | TOTAL | -    | C1    |

##### CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.8 PSF |
| DL = 8.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

##### SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, CBC 2012, ABC 2019  
- PART 9 OF CBC 2012 (2019 AMENDMENT)  
- CSA 088-09, CSA 088-14  
- TPIC 2011, TPIC 2014

##### DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.8 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/899 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/899 (0.00")

CSI: TC=0.13/1.00 (A-B-S), BC=0.03/1.00 (D-E-A),  
WB=0.00/1.00 (n/a-0), SSI=0.10/1.00 (A-B-S)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PLI) | MAX MIN | MAX MIN       |
|-----------------|-------------|---------------|---------|---------------|
| MT20            | 618         | 354           | 1667    | 788 1987 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.10 (E) (INPUT = 0.90)  
JSI METAL= 0.05 (B) (INPUT = 1.00)




Structural component only  
DWG# T-2007744

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>J67</b> | QUANTITY<br><b>2</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:49 2020 Page 1  
ID: L307geCyJh11shbR4r5BVjesS-2MhWceWf09vqwC9EzfDpmoGs9Kjn3?p?XtvczazMDGa

Scale = 1:15.7

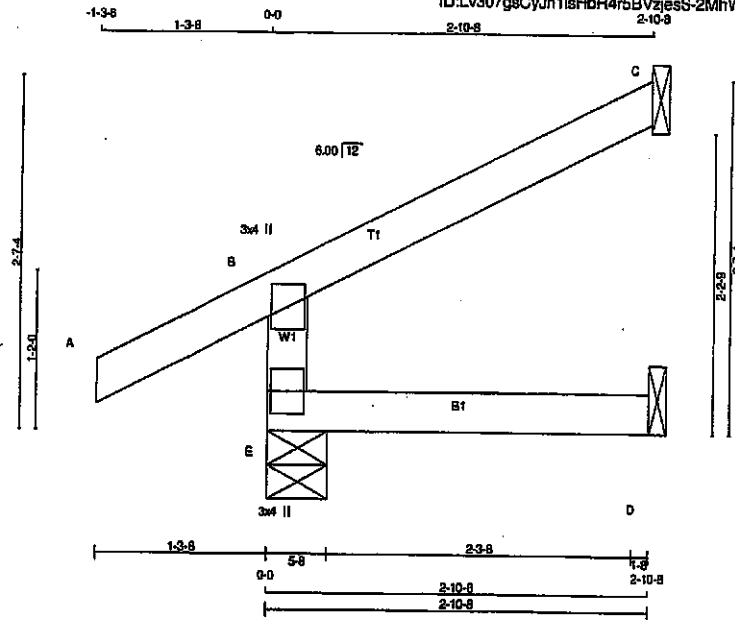

#### LUMBER

| N. L. G. A. RULES | CHORDS | SIZE | DRY  | LUMBER | DESCR. |
|-------------------|--------|------|------|--------|--------|
| E - B             | 2x4    | DRY  | No.2 | SPF    | SPF    |
| A - C             | 2x4    | DRY  | No.2 | SPF    | SPF    |
| E - D             | 2x4    | DRY  | No.2 | SPF    | SPF    |

DRY: SEASONED LUMBER.

#### PLATES (Table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 3.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 3.0 | 4.0 |   |   |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQD BRG |
|----|-------------------------|------|---------------------------------|------|-----------|----------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |          |
| E  | 319                     | 0    | 319                             | 0    | 5-8       | 5-8      |
| C  | 99                      | 0    | 99                              | 0    | 1-8       | 1-8      |
| D  | 23                      | 0    | 23                              | 0    | 1-8       | 1-8      |

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX/MIN. COMPONENT REACTIONS |      |            |      |      |      |
|-----------|----------|------------------------------|------|------------|------|------|------|
| JT        | COMBINED | SNOW                         | LIVE | PERM. LIVE | WIND | DEAD | SOIL |
| E         | 223      | 161/0                        | 0/0  | 0/0        | 0/0  | 62/0 | 0/0  |
| C         | 68       | 55/0                         | 0/0  | 0/0        | 0/0  | 13/0 | 0/0  |
| D         | 18       | 0/0                          | 0/0  | 0/0        | 0/0  | 18/0 | 0/0  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                  |                           |               | WEBS            |                  |                           |               |
|--------|------------------|---------------------------|---------------|-----------------|------------------|---------------------------|---------------|
| MEMB.  | MAX. FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB.           | MAX. FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) |
| FR-TO  |                  | FROM TO                   | CSH (LC)      | UNBRACED LENGTH | FR-TO            |                           |               |
| E-B    | -289/0           | 0.0 0.0                   | 0.02 (4)      | 7.81            |                  |                           |               |
| A-B    | 0/28             | -91.8 -91.8               | 0.13 (5)      | 10.00           |                  |                           |               |
| B-C    | -15/0            | -91.8 -91.8               | 0.13 (1)      | 6.25            |                  |                           |               |
| E-D    | 0/0              | -18.5 -18.5               | 0.03 (4)      | 10.00           |                  |                           |               |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 6.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.4 PSF  
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF NBC 2010, NBC 2012, ABC 2019  
- PART 9 OF NBC 2012 (2019 AMENDMENT)  
- CSA 086-09, CSA 086-14  
- TPIC 2011, TPIC 2014

#### DESIGN ASSUMPTIONS

OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (B-C:1), BC=0.03/1.00 (D-E:4), WB=0.00/1.00 (W/a:0), SS=0.11/1.00 (B-C:1)

DCL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

#### NAIL VALUES

| PLATE GRIP(DRY) | SHEAR (PSI) | SECTION (PL) | (PL)      |
|-----------------|-------------|--------------|-----------|
| MAX MIN         | MAX MIN     | MAX MIN      | MAX MIN   |
| MT20            | 616 354     | 1667 788     | 1987 1696 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.12 (E) (INPUT = 0.80)  
JSI METAL= 0.08 (B) (INPUT = 1.00)



Structural component only  
DWG# T-2007745

|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>J68</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:51 2020 Page 1  
ID:1v307qsCylh1sHbR4r5BVzjesS-7kpGpJywYm9YAk44GhrDLEp7PVXWJL\_B50gSzMDGY

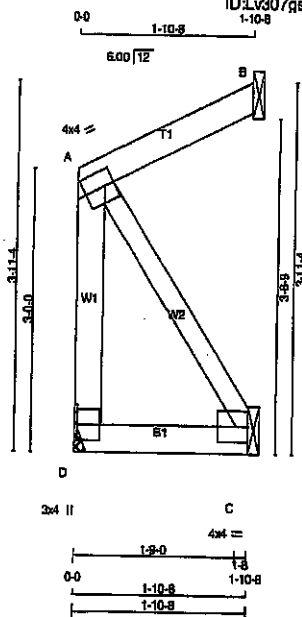

Scale = 1/2" = 1'-0"

| CHORDS                | SIZE | DRY | LUMBER | DESCR. |
|-----------------------|------|-----|--------|--------|
| D - A                 | 2x4  | DRY | No.2   | SPF    |
| A - B                 | 2x4  | DRY | No.2   | SPF    |
| D - C                 | 2x4  | DRY | No.2   | SPF    |
| ALL WEBS              | 2x3  | DRY | No.2   | SPF    |
| DRY: SEASONED LUMBER. |      |     |        |        |

| PLATE TYPE | PLATES | W    | LEN | Y   | X         |
|------------|--------|------|-----|-----|-----------|
| A          | TMVW-1 | MT20 | 4.0 | 4.0 | 2.00 1.25 |
| C          | BMV1-1 | MT20 | 4.0 | 4.0 | Edge      |
| D          | BMV1-p | MT20 | 3.0 | 4.0 |           |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG   |
|----------|-------------------------|---------------------------------|-----------|------------|
| JT       | VERT                    | DOWN                            | UP        | DOWN       |
| D        | 103                     | 0                               | 0         | MECHANICAL |
| B        | 86                      | 0                               | 0         | 1-8        |
| C        | 17                      | 0                               | 0         | 1-8        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

SEE MITEK STANDARD DETAIL B97781H FOR CONNECTION TO JOINT(S) B, C

#### UNFACTORED REACTIONS

| 1ST LCASE | MAX/MIN. COMPONENT REACTIONS | SNOW | LIVE | PERM. LIVE | WIND | DEAD | SOIL |
|-----------|------------------------------|------|------|------------|------|------|------|
| JT        | COMBINED                     |      |      |            |      |      |      |
| D         | 73                           | 48/0 | 0/0  | 0/0        | 0/0  | 25/0 | 0/0  |
| B         | 59                           | 48/0 | 0/0  | 0/0        | 0/0  | 11/0 | 0/0  |
| C         | 13                           | 0/0  | 0/0  | 0/0        | 0/0  | 13/0 | 0/0  |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (LBS) | MAX. FACTORED CSI (LC) | MAX. FACTORED UNBRACED LENGTH (FT) | WEBS  | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |
|--------|---------------------------|---------------------------|------------------------|------------------------------------|-------|---------------------------|------------------------|
| FR-TO  |                           |                           |                        |                                    | FR-TO |                           |                        |
| D-A    | -86/0                     | 0.0                       | 0.0 (1)                | 7.81                               | A-C   | 0/0                       | 0.00 (1)               |
| A-B    | 0/0                       | -91.8                     | -91.8 (1)              | 10.00                              |       |                           |                        |
| D-C    | 0/0                       | -18.5                     | -18.5 (4)              | 10.00                              |       |                           |                        |

TOTAL WEIGHT = 10 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |        |     |
|------------|----|--------|-----|
| TOP CH.    | LL | = 25.6 | PSF |
|            | DL | = 6.0  | PSF |
| BOT CH.    | LL | = 0.0  | PSF |
|            | DL | = 7.4  | PSF |
| TOTAL LOAD |    | = 39.0 | PSF |

##### SPACING = 24.0 IN. O.C.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010, NBC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF NBC 2010, CBC 2012, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 088-09, CSA 088-14
- TPIC 2011, TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (TL) = L/360 (0.19")  
CALCULATED VERT. DEFL. (TL) = L/899 (0.00")

CSI: TC=0.05/1.00 (A-B:1), BC=0.02/1.00 (C-D:4),  
WB=0.00/1.00 (A-C:1), SS=0.06/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PLI) | (PLI)   |
|       | MAX       | MIN   | MAX     |
| MT20  | 618       | 354   | 1657    |
|       | 788       | 1987  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.05 (A) (INPUT = 0.90)  
JSI METAL= 0.01 (A) (INPUT = 1.00)




Structural component only  
DWG# T-2007746





|                                 |                          |                      |                 |                                      |          |
|---------------------------------|--------------------------|----------------------|-----------------|--------------------------------------|----------|
| JOB NAME<br><b>408265</b>       | TRUSS NAME<br><b>J71</b> | QUANTITY<br><b>1</b> | PLY<br><b>1</b> | JOB DESC.<br><b>GREEN PARK HOMES</b> | DRWG NO. |
| Tamarack Roof Truss, Burlington |                          |                      |                 |                                      |          |

Version 8.310 S Oct 29 2019 Mitek Industries, Inc. Tue Apr 28 11:18:54 2020 Page 1  
 ID: Lv307gsCyJh1IsHbR4r5BVzjesS-PJUORL\_omY71B2BICp\_Tszj1LQ9kG2kh9KgHnzMDGV  
 1-10-15 24-0  
 Scale = 1:22.7

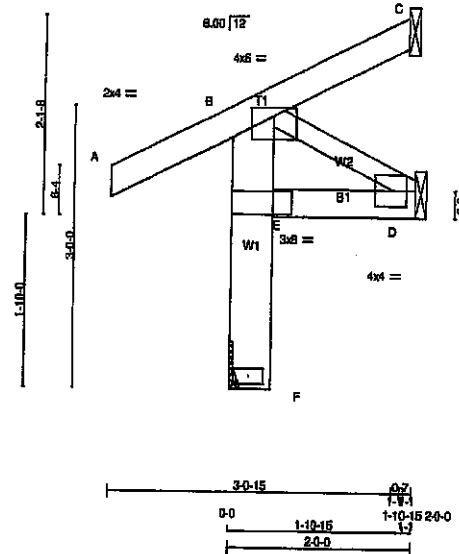

#### LUMBER

##### N.L.G.A. RULES

| CHORDS                | SIZE | DRY | LUMBER | DESCR. |
|-----------------------|------|-----|--------|--------|
| F - B                 | 2x6  | DRY | No.2   | SPF    |
| A - C                 | 2x4  | DRY | No.2   | SPF    |
| E - D                 | 2x4  | DRY | No.2   | SPF    |
| ALL WEBS              | 2x3  | DRY | No.2   | SPF    |
| DRY: SEASONED LUMBER. |      |     |        |        |

#### PLATES (table is in inches)

| JT TYPE  | PLATES | W   | LEN | Y    | X    |
|----------|--------|-----|-----|------|------|
| B TMVW-p | MT20   | 4.0 | 6.0 | 1.00 | 3.00 |
| B TP-p   | MT20   | 2.0 | 4.0 |      |      |
| D BMW1-1 | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| E BVMH   | MT20   | 3.0 | 8.0 | 1.50 | 2.50 |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

##### BEARINGS

| JT | VERT | HORZ | DOWN | HORZ | UPLIFT | IN-SX      | RECD |
|----|------|------|------|------|--------|------------|------|
| F  | 230  | 0    | 230  | 0    | 0      | MECHANICAL | BRG  |
| C  | 88   | 0    | 88   | 0    | 0      | 1-8        | BRG  |
| D  | 17   | 0    | 20   | 0    | 0      | 1-8        | BRG  |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

#### UNFACTORED REACTIONS

| JT | COMBINED | SNOW  | LIVE | PERM.LIVE | WIND | DEAD | SOIL |
|----|----------|-------|------|-----------|------|------|------|
| F  | 180      | 118/0 | 0/0  | 0/0       | 0/0  | 42/0 | 0/0  |
| C  | 60       | 48/0  | 0/0  | 0/0       | 0/0  | 11/0 | 0/0  |
| D  | 14       | 0/0   | 0/0  | 0/0       | 0/0  | 14/0 | 0/0  |

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (5)

| CHORDS |                           |                           |                | WEBS  |                           |               |  |
|--------|---------------------------|---------------------------|----------------|-------|---------------------------|---------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. LC1 (LC)  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. LC1 (LC) |  |
| FR-TO  |                           |                           |                | FR-TO |                           |               |  |
| F-E    | -230/0                    | 0.0                       | 0.0 0.02 (1)   | B-D   | 0/0                       | 0.00 (1)      |  |
| E-B    | -212/0                    | 0.0                       | 0.0 0.01 (1)   |       |                           |               |  |
| A-B    | 0/28                      | -91.8                     | -91.8 0.12 (1) |       |                           |               |  |
| B-C    | 0/0                       | -91.8                     | -91.8 0.08 (1) |       |                           |               |  |
| E-D    | 0/0                       | -18.5                     | -18.5 0.02 (4) |       |                           |               |  |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 13 lb

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|              |               |
|--------------|---------------|
| TOP CH.      | LL = 25.6 PSF |
| DL = 8.0 PSF |               |
| BOT CH.      | LL = 0.0 PSF  |
| DL = 7.4 PSF |               |
| TOTAL LOAD   | = 39.0 PSF    |

SPACING = 24.0 IN C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010, NBCC 2015

##### THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, OBC 2012, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-08, CSA 088-14
- TPIC 2011, TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")  
 CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
 ALLOWABLE DEFL.(TL) = L/360 (0.19")  
 CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.12/1.00 (A-B:1), BC=0.02/1.00 (D-E:4),  
 WB=0.00/1.00 (B-D:1), SSI=0.08/1.00 (A-B:1)

COL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

#### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PL)  | (PL)    |
|       | MAX       | MIN   | MAX     |
| MT20  | 618       | 354   | 1867    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.10 (B) (INPUT = 0.90)  
 JSI METAL= 0.03 (B) (INPUT = 1.00)



Structural component only  
 DWG# T-2007749

# LUL/LUS/LJS/HUS/HHUS/HGUS

**SIMPSON**

**Strong-Tie**

## Standard and Double-Shear Joist Hangers



This product is preferable to similar connectors because of a) easier installation, b) higher capacities, c) lower installed cost, or a combination of these features.

Most hangers in this series have double-shear nailing — an innovation that distributes the load through two points on each joist nail for greater strength. This allows for fewer nails, faster installation, and the use of all common nails for the same connection. (Do not bend or remove tabs)

Double-shear hangers range from the light capacity LUS hangers to the highest capacity HGUS hangers. For medium load truss applications, the HUS offers a lower cost alternative and easier installation than the HGUS hangers, while providing greater load capacity and bearing than the LUS.

**Material:** See table on pp. 258–259.

**Finish:** Galvanized. Some products available in stainless steel or ZMAX® coating; see Corrosion Information, pp. 20–24.

### Installation:

- Use all specified fasteners; see General Notes.
- Nails must be driven at an angle through the joist or truss into the header to achieve the tabulated resistances (except LUL).
- Where 16d commons are specified, 10d commons may be used at 0.83 of the tabulated factored resistance.
- Not designed for welded or nailer applications.
- With single ply 2x carrying members, use 10d x 1½" nails into the header and 10d commons into the joist, and reduce the resistance to 0.64 of the table value where 16d nails are specified and 0.77 where 10d nails are specified.

### Options:

- LUS, LJS, LUL and HUS hangers cannot be modified.
- Other sizes available; consult your Simpson Strong-Tie representative.
- See Hanger Options information on p. 126.




Double-Shear Nailing Top View




Double-Shear Nailing Side View; Do not bend tab




Dome Double-Shear Nailing Side View (available on some models) U.S. Patent 5,603,580




**LUS28**




**LU28L**




**HUS210**  
(HUS26, HUS28, and HHUS similar)



**HGUS28-2**




**HHUS210-2**



**LJS26DS**

Typical HUS26 Installation with Reduced Heel Height (Truss Designer to provide fastener quantity for connecting multiple members together)



Plated Truss Connectors

**LUL/LUS/LJS/HUS/HHUS/HGUS****HHUS/HGUS**

See Hanger Options information on pp. 125–127.



**HHUS — Sloped and/or Skewed Seat**

- HHUS hangers can be skewed to a maximum of 45° and/or sloped to a maximum of 45°
- For skew only, maximum factored down resistance is 0.85 of the table value
- For sloped only or sloped and skewed hangers, the maximum factored down resistance is 0.72 of the table value
- Uplift resistances for sloped/skewed conditions are 0.62 of the table value
- The joist must be bevel-cut to allow for double-shear nailing

**HGUS — Skewed Seat**

- HGUS hangers can be skewed only to a maximum of 45°. Factored resistances are:

| HGUS Seat Width | Joist               | Down Resistance     | Uplift              |
|-----------------|---------------------|---------------------|---------------------|
| $W < 2"$        | Bevel or square cut | 0.62 of table value | 0.46 of table value |
| $2" < W < 6"$   | Bevel cut           | 0.67 of table value | 0.41 of table value |
| $2" < W < 6"$   | Square cut          | 0.46 of table value | 0.41 of table value |
| $W > 6"$        | Bevel cut           | 0.75 of table value | 0.41 of table value |



**Top View HHUS Hanger Skewed Right**  
(joist must be bevel cut)  
All joist nails installed on the outside angle (non-acute side).

**Standard and Double-Shear Joist Hangers (cont.)**

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32–34 for more information.

| Model No.       | Ga.     | Dimensions (in.) |       |       |                             | Fasteners |          | Factored Resistance            |                                |                                |                                |       |
|-----------------|---------|------------------|-------|-------|-----------------------------|-----------|----------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-------|
|                 |         | W                | H     | B     | d <sub>e</sub> <sup>3</sup> | Header    | Joist    | D-Fir-L                        |                                | S-P-F                          |                                |       |
|                 |         |                  |       |       |                             |           |          | Uplift                         | Normal                         | Uplift                         | Normal                         |       |
|                 |         |                  |       |       |                             |           |          | (K <sub>D</sub> = 1.15)<br>lb. | (K <sub>D</sub> = 1.00)<br>lb. | (K <sub>D</sub> = 1.15)<br>lb. | (K <sub>D</sub> = 1.00)<br>lb. |       |
| Single 2x Sizes |         |                  |       |       |                             |           |          |                                |                                |                                |                                |       |
| SS              | LUS24   | 18               | 1 1/8 | 3 1/4 | 1 1/4                       | 2 1/4     | (4) 10d  | (2) 10d                        | 710                            | 1625                           | 845                            | 1155  |
|                 |         |                  |       |       |                             |           |          |                                | 3.16                           | 7.23                           | 2.87                           | 5.14  |
|                 |         |                  |       |       |                             |           |          |                                | 360                            | 1020                           | 320                            | 725   |
| SS              | LU24L   | 22               | 1 1/8 | 3     | 1 1/4                       | 2 1/8     | (4) 10d  | (2) 10d x 1 1/2"               | 1.60                           | 4.54                           | 1.42                           | 3.22  |
|                 |         |                  |       |       |                             |           |          |                                | 720                            | 1605                           | 845                            | 1140  |
|                 |         |                  |       |       |                             |           |          |                                | 3.20                           | 7.14                           | 2.87                           | 5.07  |
| SS              | LUS26   | 18               | 1 1/8 | 4 1/4 | 1 1/4                       | 3 1/4     | (4) 10d  | (4) 10d                        | 1420                           | 2170                           | 1290                           | 1630  |
|                 |         |                  |       |       |                             |           |          |                                | 6.32                           | 8.85                           | 5.74                           | 7.25  |
|                 |         |                  |       |       |                             |           |          |                                | 2705                           | 4940                           | 2065                           | 3875  |
| SS              | HUS26   | 16               | 1 1/8 | 5 1/4 | 3                           | 3 1/8     | (14) 16d | (8) 16d                        | 11.80                          | 21.97                          | 9.20                           | 17.24 |
|                 |         |                  |       |       |                             |           |          |                                | 2055                           | 4265                           | 1480                           | 4115  |
|                 |         |                  |       |       |                             |           |          |                                | 9.14                           | 18.87                          | 6.49                           | 18.31 |
| SS              | LJS26DS | 18               | 1 1/8 | 5     | 3 1/4                       | 4 1/4     | (16) 16d | (6) 16d                        | 2685                           | 6625                           | 2685                           | 5700  |
|                 |         |                  |       |       |                             |           |          |                                | 11.96                          | 29.51                          | 11.96                          | 25.35 |
|                 |         |                  |       |       |                             |           |          |                                | 1140                           | 2185                           | 1020                           | 1550  |
| SS              | HGUS26  | 12               | 1 1/8 | 5 1/4 | 5                           | 4 1/4     | (20) 16d | (8) 16d                        | 5.07                           | 9.72                           | 4.54                           | 6.89  |
|                 |         |                  |       |       |                             |           |          |                                | 1420                           | 2520                           | 1290                           | 1790  |
|                 |         |                  |       |       |                             |           |          |                                | 6.32                           | 11.21                          | 5.74                           | 7.96  |
| SS              | HUS28   | 16               | 1 1/8 | 7 1/4 | 3                           | 6 1/8     | (22) 16d | (8) 16d                        | 3605                           | 5365                           | 2875                           | 4345  |
|                 |         |                  |       |       |                             |           |          |                                | 16.04                          | 23.88                          | 11.90                          | 19.33 |
|                 |         |                  |       |       |                             |           |          |                                | 3310                           | 7675                           | 3310                           | 6900  |
| SS              | HGUS28  | 12               | 1 1/8 | 7 1/4 | 5                           | 6 1/8     | (36) 16d | (12) 16d                       | 14.74                          | 34.19                          | 14.74                          | 30.73 |
|                 |         |                  |       |       |                             |           |          |                                | 1140                           | 2495                           | 1020                           | 1770  |
|                 |         |                  |       |       |                             |           |          |                                | 5.07                           | 11.10                          | 4.54                           | 7.87  |
| SS              | LU210L  | 20               | 1 1/8 | 8     | 1 1/4                       | 7 1/4     | (10) 10d | (6) 10d x 1 1/2"               | 1420                           | 2785                           | 1290                           | 2210  |
|                 |         |                  |       |       |                             |           |          |                                | 6.32                           | 12.39                          | 5.74                           | 9.83  |
|                 |         |                  |       |       |                             |           |          |                                |                                |                                |                                |       |

1. Factored uplift resistances have been increased 15% for wind or earthquake loading; no further increase is allowed.
2. Designer must ensure that hanger is compatible with truss when reduced heel height is used.
3.  $d_p$  is the distance from the bearing seat to the top joist nail.
4. Resistances shown require a minimum 2-ply girder truss. For fastening to single-ply truss request technical bulletin T-C-N10TRSSON and/or see installation notes.
5. Nail: 16d = 0.162" dia. x 3 1/2" long. See pp. 27–28 for other nail sizes and information.


## Face-Mount Hangers

**SIMPSON**  
**Strong-Tie**

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32-34 for more information.

| Model No.          | Ga. | Dimensions (in.) |        |   |                             | Fasteners |          | Factored Resistance            |                                |                                |                                |
|--------------------|-----|------------------|--------|---|-----------------------------|-----------|----------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
|                    |     | W                | H      | B | d <sub>g</sub> <sup>3</sup> | Header    | Joist    | D-Fir-L                        |                                | S-P-F                          |                                |
|                    |     |                  |        |   |                             |           |          | Uplift                         | Normal                         | Uplift                         | Normal                         |
|                    |     |                  |        |   |                             |           |          | (K <sub>D</sub> = 1.15)<br>lb. | (K <sub>D</sub> = 1.00)<br>lb. | (K <sub>D</sub> = 1.15)<br>lb. | (K <sub>D</sub> = 1.00)<br>lb. |
|                    |     |                  |        |   |                             |           |          | kN                             | kN                             | kN                             | kN                             |
| Double 2x Sizes    |     |                  |        |   |                             |           |          |                                |                                |                                |                                |
| LUS24-2            | 18  | 3 1/8            | 3 1/8  | 2 | 1 1/4                       | (4) 16d   | (2) 16d  | 835                            | 2020                           | 590                            | 1435                           |
| LUS26-2            | 18  | 3 1/8            | 4 1/8  | 2 | 4                           | (4) 16d   | (4) 16d  | 3.71                           | 8.99                           | 2.62                           | 6.38                           |
|                    |     |                  |        |   |                             |           |          | 7.65                           | 11.54                          | 6.87                           | 8.54                           |
| HHUS26-2           | 14  | 3 1/8            | 5 1/8  | 3 | 3 1/4                       | (14) 16d  | (6) 16d  | 2850                           | 7335                           | 2065                           | 5205                           |
|                    |     |                  |        |   |                             |           |          | 12.68                          | 32.63                          | 9.20                           | 23.15                          |
| HGUS26-2           | 12  | 3 1/8            | 5 7/8  | 4 | 4 1/4                       | (20) 16d  | (8) 16d  | 4385                           | 8950                           | 3110                           | 6355                           |
|                    |     |                  |        |   |                             |           |          | 19.51                          | 39.81                          | 13.83                          | 28.27                          |
| LUS28-2            | 18  | 3 1/8            | 7      | 2 | 4                           | (6) 16d   | (4) 16d  | 1720                           | 3325                           | 1545                           | 2575                           |
|                    |     |                  |        |   |                             |           |          | 7.65                           | 14.79                          | 6.87                           | 11.45                          |
| HHUS28-2           | 14  | 3 1/8            | 7 1/8  | 3 | 6 1/8                       | (22) 16d  | (8) 16d  | 3765                           | 8940                           | 2675                           | 6345                           |
|                    |     |                  |        |   |                             |           |          | 16.75                          | 39.77                          | 11.90                          | 28.22                          |
| HGUS28-2           | 12  | 3 1/8            | 7 3/8  | 4 | 6 1/4                       | (36) 16d  | (12) 16d | 6070                           | 12980                          | 4310                           | 9215                           |
|                    |     |                  |        |   |                             |           |          | 27.00                          | 57.74                          | 19.17                          | 40.99                          |
| LUS210-2           | 18  | 3 1/8            | 9      | 2 | 6                           | (8) 16d   | (6) 16d  | 2580                           | 4500                           | 2320                           | 3195                           |
|                    |     |                  |        |   |                             |           |          | 11.48                          | 20.02                          | 10.32                          | 14.21                          |
| HHUS210-2          | 14  | 3 1/8            | 9 1/8  | 3 | 8                           | (30) 16d  | (10) 16d | 4670                           | 9600                           | 4235                           | 7000                           |
|                    |     |                  |        |   |                             |           |          | 20.77                          | 42.97                          | 18.84                          | 31.14                          |
| HGUS210-2          | 12  | 3 1/8            | 9 3/8  | 4 | 8 1/8                       | (48) 16d  | (16) 16d | 6840                           | 14015                          | 4855                           | 10270                          |
|                    |     |                  |        |   |                             |           |          | 30.43                          | 62.34                          | 21.60                          | 45.69                          |
| Triple 2x Sizes    |     |                  |        |   |                             |           |          |                                |                                |                                |                                |
| HGUS26-3           | 12  | 4 1/8            | 5 1/2  | 4 | 4 1/4                       | (20) 16d  | (8) 16d  | 4385                           | 8950                           | 3110                           | 6355                           |
|                    |     |                  |        |   |                             |           |          | 19.51                          | 39.81                          | 13.83                          | 28.27                          |
| HGUS28-3           | 12  | 4 1/8            | 7 1/4  | 4 | 6 3/8                       | (36) 16d  | (12) 16d | 6070                           | 12980                          | 4310                           | 9215                           |
|                    |     |                  |        |   |                             |           |          | 27.00                          | 57.74                          | 19.17                          | 40.99                          |
| HHUS210-3          | 14  | 4 1/8            | 9      | 3 | 7 1/8                       | (30) 16d  | (10) 16d | 4670                           | 9670                           | 4235                           | 6865                           |
|                    |     |                  |        |   |                             |           |          | 20.77                          | 43.02                          | 18.84                          | 30.54                          |
| HGUS210-3          | 12  | 4 1/8            | 9 1/4  | 4 | 8 3/8                       | (48) 16d  | (16) 16d | 6840                           | 14645                          | 4855                           | 10400                          |
|                    |     |                  |        |   |                             |           |          | 30.43                          | 65.14                          | 21.60                          | 46.26                          |
| Quadruple 2x Sizes |     |                  |        |   |                             |           |          |                                |                                |                                |                                |
| HGUS26-4           | 12  | 6 1/8            | 5 3/8  | 4 | 4 1/4                       | (20) 16d  | (8) 16d  | 4385                           | 8950                           | 3110                           | 6355                           |
|                    |     |                  |        |   |                             |           |          | 19.51                          | 39.81                          | 13.83                          | 28.27                          |
| HGUS28-4           | 12  | 6 1/8            | 7 3/8  | 4 | 6 3/4                       | (36) 16d  | (12) 16d | 6070                           | 12980                          | 4310                           | 9215                           |
|                    |     |                  |        |   |                             |           |          | 27.00                          | 57.74                          | 19.17                          | 40.99                          |
| HHUS210-4          | 14  | 6 1/8            | 8 3/8  | 3 | 7 3/8                       | (30) 16d  | (10) 16d | 4670                           | 10155                          | 4235                           | 7210                           |
|                    |     |                  |        |   |                             |           |          | 20.77                          | 45.17                          | 18.84                          | 32.07                          |
| HGUS210-4          | 12  | 6 1/8            | 9 3/8  | 4 | 8 1/4                       | (48) 16d  | (16) 16d | 6840                           | 14645                          | 4855                           | 10400                          |
|                    |     |                  |        |   |                             |           |          | 30.43                          | 65.14                          | 21.60                          | 46.26                          |
| HGUS212-4          | 12  | 6 1/8            | 10 3/8 | 4 | 10 1/4                      | (56) 16d  | (20) 16d | 7640                           | 14995                          | 5425                           | 10645                          |
|                    |     |                  |        |   |                             |           |          | 33.98                          | 66.70                          | 24.13                          | 47.35                          |
| HGUS214-4          | 12  | 6 1/8            | 12 3/8 | 4 | 11 1/4                      | (66) 16d  | (22) 16d | 10130                          | 16400                          | 7195                           | 11645                          |
|                    |     |                  |        |   |                             |           |          | 45.06                          | 72.95                          | 32.00                          | 51.80                          |
| 4x Sizes           |     |                  |        |   |                             |           |          |                                |                                |                                |                                |
| LUS46              | 18  | 3 1/8            | 4 1/8  | 2 | 3 3/8                       | (4) 16d   | (4) 16d  | 1720                           | 2595                           | 1545                           | 1920                           |
|                    |     |                  |        |   |                             |           |          | 7.65                           | 11.54                          | 6.87                           | 8.54                           |
| HHUS46             | 14  | 3 1/8            | 5 1/8  | 3 | 3 1/4                       | (14) 16d  | (6) 16d  | 2540                           | 7335                           | 2065                           | 5205                           |
|                    |     |                  |        |   |                             |           |          | 11.30                          | 32.63                          | 9.20                           | 23.15                          |
| HGUS46             | 12  | 3 1/8            | 5 1/4  | 4 | 4 1/4                       | (20) 16d  | (8) 16d  | 4385                           | 8950                           | 3110                           | 6355                           |
|                    |     |                  |        |   |                             |           |          | 19.51                          | 39.81                          | 13.83                          | 28.27                          |
| LUS48              | 18  | 3 1/8            | 6 1/8  | 2 | 3 3/4                       | (6) 16d   | (4) 16d  | 1720                           | 3325                           | 1545                           | 2575                           |
|                    |     |                  |        |   |                             |           |          | 7.65                           | 14.79                          | 6.87                           | 11.45                          |
| HHUS48             | 14  | 3 1/8            | 7 1/8  | 3 | 6 1/4                       | (22) 16d  | (8) 16d  | 3765                           | 8940                           | 2675                           | 6345                           |
|                    |     |                  |        |   |                             |           |          | 16.75                          | 39.77                          | 11.90                          | 28.22                          |
| HGUS48             | 12  | 3 1/8            | 7 1/8  | 4 | 6 3/8                       | (36) 16d  | (12) 16d | 6070                           | 12980                          | 4310                           | 9215                           |
|                    |     |                  |        |   |                             |           |          | 27.00                          | 57.74                          | 19.17                          | 40.99                          |
| LUS410             | 18  | 3 1/8            | 8 1/8  | 2 | 5 1/4                       | (8) 16d   | (6) 16d  | 2580                           | 4500                           | 2320                           | 3195                           |
|                    |     |                  |        |   |                             |           |          | 11.48                          | 20.02                          | 10.32                          | 14.21                          |
| HGUS410            | 12  | 3 1/8            | 9      | 4 | 8 1/8                       | (48) 16d  | (16) 16d | 6840                           | 14015                          | 4855                           | 10270                          |
|                    |     |                  |        |   |                             |           |          | 30.43                          | 62.34                          | 21.60                          | 45.69                          |
| HGUS412            | 12  | 3 1/8            | 10 3/8 | 4 | 10 1/4                      | (56) 16d  | (20) 16d | 7640                           | 14995                          | 5425                           | 10645                          |
|                    |     |                  |        |   |                             |           |          | 33.98                          | 66.70                          | 24.13                          | 47.35                          |
| HGUS414            | 12  | 3 1/8            | 12 3/8 | 4 | 11 1/4                      | (66) 16d  | (22) 16d | 10130                          | 16400                          | 7195                           | 11645                          |
|                    |     |                  |        |   |                             |           |          | 45.06                          | 72.95                          | 32.00                          | 51.80                          |



Plated Truss Connectors

# TC - Truss Connectors

**SIMPSON**  
**Strong-Tie**

The TC truss connector is an ideal connector for scissor trusses and can allow horizontal movement up to 1/4". The TC also attaches plated trusses to top plates or sill plates to resist uplift forces. Typically used on one or both ends of truss as determined by the building designer.

**Material:** 16 gauge

**Finish:** G90 galvanized


**Design:** Factored resistances are in accordance with CSA 086-14

## Installation:


- Use all specified fasteners.
- Nails: 10d = 0.148" dia. x 3" long common wire, 10d x 1 1/2" = 0.148" dia. x 1 1/2" long.
- Drive 10d nails into the truss at the inside end of the slotted holes (inside end is towards the centre of the truss) and clinch on the back side. Do not seat these nails into the truss—allow room under the nail head for movement of the truss with respect to the wall.

## Optional TC Installation:


- Bend one flange up 90°. Drive specified nails into the top and face of the top plates or install Titen® screws into the top and face of masonry wall. See optional load tables and installation details.




**TC24**  
U.S. Patent 4,932,173




Typical TC24 Installation



**TC26**  
(TC28 Similar)



Optional TC26 Installation for Grouted Concrete Block using a Wood Nailer (8", 10", 12" Wall Installation Similar)



Optional TC26 Installation for Grouted Concrete Block using Titen Screws

| Model No. | Fasteners |             | Factored Resistance      |                          |
|-----------|-----------|-------------|--------------------------|--------------------------|
|           | Truss     | Wall Plates | D.Fir-L                  | S-P-F                    |
|           |           |             | Uplift<br>( $K_0=1.15$ ) | Uplift<br>( $K_0=1.15$ ) |
| TC24      | (4) 10d   | (4) 10d     | 605                      | 430                      |
| TC26      | (5) 10d   | (5) 10d     | 1015                     | 720                      |
| TC28      | (5) 10d   | (5) 10d     | 1015                     | 720                      |

## Optional TC Installation Table

| Model No. | Fasteners |                  | Factored Resistance      |                          |
|-----------|-----------|------------------|--------------------------|--------------------------|
|           | Truss     | Wall Plates      | D.Fir-L                  | S-P-F                    |
|           |           |                  | Uplift<br>( $K_0=1.15$ ) | Uplift<br>( $K_0=1.15$ ) |
| TC26      | (5) 10d   | (6) 10d x 1 1/2" | 810                      | 680                      |
|           | (5) 10d   | (5) 10d          | 930                      | 680                      |

1. Factored resistances have been increased 15% for earthquake or wind loading; no further increase allowed; reduce where other loads govern.
2. Grout strength is 15 MPa minimum.
3. Optional TC26 installation with 10d nails requires minimum 3" top plate thickness.
4. TC26 fastened to grouted concrete block with (5) - 3/8" x 2 1/4" Titen screws has a factored uplift resistance of 275 lb.



MADE  
IN THE  
UNITED STATES  
OF AMERICA

For more information, visit us online at [strongtie.com](http://strongtie.com) or call 1-800-999-5099. © 2017 Simpson Strong-Tie Company, Inc.

(800) 999-5099  
[strongtie.com](http://strongtie.com)

**H/TSP****SIMPSON****Strong-Tie®****Seismic and Hurricane Ties (cont.)**

These products are available with additional corrosion protection. For more information, see p. 24.

These products are approved for installation with the Strong-Drive® SD Connector screw. See pp. 32–34 for more information.

| Model No.            | Ga. | Fasteners         |               |              | Factored Resistance ( $K_D = 1.15$ ) |                |                |        |                |                |
|----------------------|-----|-------------------|---------------|--------------|--------------------------------------|----------------|----------------|--------|----------------|----------------|
|                      |     | To Rafters/Truss  | To Plates     | To Studs     | D.Fir-L                              |                |                | S-P-F  |                |                |
|                      |     |                   |               |              | Uplift                               | Lateral        |                | Uplift | Lateral        |                |
|                      |     |                   |               |              |                                      | F <sub>1</sub> | F <sub>2</sub> |        | F <sub>1</sub> | F <sub>2</sub> |
|                      |     |                   |               |              | lb.                                  | lb.            | lb.            | lb.    | lb.            | lb.            |
|                      |     |                   |               |              | kN                                   | kN             | kN             | kN     | kN             | kN             |
| H1                   | 18  | (6) 8d x 1½"      | (4) 8d        | —            | 740                                  | 685            | 300            | 680    | 485            | 215            |
| SS H2A               | 18  | (5) 8d x 1½"      | (2) 8d x 1½"  | (6) 8d x 1½" | 3.29                                 | 3.05           | 1.33           | 3.02   | 2.16           | 0.96           |
| SS H2.5A             | 18  | (5) 8d            | (5) 8d        | —            | 830                                  | 220            | 75             | 590    | 155            | 55             |
|                      |     |                   |               |              | 3.69                                 | 0.98           | 0.33           | 2.52   | 0.69           | 0.24           |
| H2.5T                | 18  | (5) 8d            | (5) 8d        | —            | 805                                  | 160            | 160            | 755    | 160            | 160            |
|                      |     |                   |               |              | 3.68                                 | 0.71           | 0.71           | 3.36   | 0.71           | 0.71           |
| SS H3                | 18  | (4) 8d            | (4) 8d        | —            | 835                                  | 175            | 210            | 740    | 160            | 210            |
|                      |     |                   |               |              | 3.71                                 | 0.78           | 0.93           | 3.29   | 0.71           | 0.93           |
| H6                   | 16  | —                 | (8) 8d        | (8) 8d       | 740                                  | 180            | 265            | 615    | 125            | 190            |
|                      |     |                   |               |              | 3.29                                 | 0.80           | 1.18           | 2.74   | 0.56           | 0.85           |
| H7Z                  | 16  | (4) 8d            | (2) 8d        | (8) 8d       | 1585                                 | 1085           | —              | 1125   | 770            | —              |
|                      |     |                   |               |              | 7.05                                 | 4.83           | —              | 5.00   | 3.43           | —              |
| SS H8 <sup>3</sup>   | 18  | (5) 10d x 1½"     | (5) 10d x 1½" | —            | 1390                                 | 670            | —              | 990    | 475            | —              |
|                      |     |                   |               |              | 6.18                                 | 2.98           | —              | 4.40   | 2.11           | —              |
| SS H10A <sup>0</sup> | 18  | (9) 10d x 1½"     | (9) 10d x 1½" | —            | 1120                                 | —              | —              | 1025   | —              | —              |
|                      |     |                   |               |              | 4.98                                 | —              | —              | 4.56   | —              | —              |
| H10AR                | 18  | (9) 10d x 1½"     | (9) 10d x 1½" | —            | 1735                                 | 795            | 410            | 1505   | 565            | 290            |
|                      |     |                   |               |              | 7.72                                 | 3.54           | 1.82           | 6.69   | 2.51           | 1.29           |
| H10A-2               | 18  | (9) 10d x 1½"     | (9) 10d x 1½" | —            | 1485                                 | 690            | 430            | 1220   | 570            | 305            |
|                      |     |                   |               |              | 6.61                                 | 3.07           | 1.91           | 5.43   | 2.54           | 1.36           |
| H10S <sup>2,3</sup>  | 18  | (8) 8d x 1½"      | (8) 8d x 1½"  | (8) 8d       | 1835                                 | 1275           | 430            | 1645   | 880            | 305            |
|                      |     |                   |               |              | 8.16                                 | 5.67           | 1.91           | 7.32   | 3.91           | 1.36           |
| H11Z                 | 18  | (6) 16d x 2½"     | (6) 16d x 2½" | —            | 1465                                 | 795            | 315            | 1040   | 565            | 225            |
|                      |     |                   |               |              | 6.52                                 | 3.54           | 1.40           | 4.63   | 2.51           | 1.00           |
|                      |     |                   |               |              | 1095                                 | 920            | 545            | 780    | 655            | 390            |
|                      |     |                   |               |              | 4.87                                 | 4.09           | 2.42           | 3.47   | 2.91           | 1.73           |
| H14                  | 18  | [1] (12) 8d x 1½" | (13) 8d       | —            | 2390                                 | 855            | 320            | 1805   | 610            | 230            |
|                      |     | [2] (12) 8d x 1½" | (15) 8d       | —            | 10.63                                | 3.80           | 1.42           | 8.03   | 2.71           | 1.02           |
|                      |     |                   |               |              | 2390                                 | 855            | 320            | 1805   | 610            | 230            |
|                      |     |                   |               |              | 10.63                                | 3.80           | 1.42           | 8.03   | 2.71           | 1.02           |
| TSP                  | 16  | (9) 10d x 1½"     | (6) 10d x 1½" | —            | 1295                                 | 440            | —              | 920    | 310            | —              |
|                      |     |                   |               |              | 5.76                                 | 1.96           | —              | 4.09   | 1.38           | —              |
|                      |     | (9) 10d x 1½"     | (6) 10d       | —            | 1560                                 | 440            | —              | 1105   | 310            | —              |
|                      |     |                   |               |              | 6.94                                 | 1.96           | —              | 4.92   | 1.38           | —              |

- Factored resistances have been increased 15% for short term loading; no further increase is allowed.
- Factored resistances are for one anchor. A minimum rafter thickness of 2½" must be used when framing anchors are installed on the same side of the plate (exception: H2.5A).
- H8 factored uplift resistances for stud-to-bottom plate installations are 595 lb. (2.65 kN) for D.Fir-L and 390 lb. (1.74 kN) for S-P-F.
- When cross-grain bending or cross-grain tension cannot be avoided, mechanical reinforcement to resist such forces should be considered.
- Hurricane ties are shown installed on the outside of the wall for clarity. Installation on the inside of the wall is acceptable. For a continuous load path, connections at the top and bottom of the wall must be on the same side of the wall (see technical bulletin T-HTIECONPATH).
- Factored resistances in the F<sub>1</sub> direction are not intended to replace diaphragm boundary members or prevent cross grain bending of the truss or rafter members. Additional shear transfer elements shall be considered where there may be effects of cross grain bending or tension.

- H10S can have the stud offset a maximum of 1" from the rafter (centre to centre) for a reduced uplift of 1435 lb. (6.38 kN) D.Fir-L and 1015 lb. (4.51 kN) S-P-F.
- H10S nails to plates are optional for uplift but required for lateral loads.
- H10A may be field-bent up to a slope of 6/12. Multiply the tabulated uplift value x 0.75. Full tabulated lateral resistances apply.
- The factored resistances of stainless-steel connectors match carbon-steel connectors when installed with Simpson Strong-Tie® stainless-steel, SCNR ring-shank nails. For more information, refer to engineering letter L-F-SSNAILS at [strongtie.com](http://strongtie.com).
- D.Fir-L/S-P-F factored uplift resistances for the H2.5A fastener to a 2x4 truss bottom chord and double top plates using (5) 8d x 1½" nails into the top plates and (3) 8d x 1½" nails into the lowest three flange holes into the truss bottom chord is 495 lb. (2.20 kN).
- Nails: 16d x 2½" = 0.182" dia. x 2½" long, 10d = 0.148" dia. x 3" long, 10d x 1½" = 0.148" dia. x 1½" long, 8d = 0.131" dia. x 2½" long, 8d x 1½" = 0.131" dia. x 1½" long. See pp. 27–28 for other nail sizes and information.



# BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY

B97791H1

| NAIL TYPE        | LENGTH<br>(IN) | DIAMETER<br>(IN) | NAIL LATERAL CAPACITY (LB) |        |
|------------------|----------------|------------------|----------------------------|--------|
|                  |                |                  | S-P-F                      | D. FIR |
| COMMON<br>WIRE   | 3.00           | 0.144            | 132                        | 147    |
|                  | 3.25           | 0.144            | 132                        | 147    |
|                  | 3.50           | 0.160            | 159                        | 177    |
| COMMON<br>SPIRAL | 3.00           | 0.122            | 97                         | 108    |
|                  | 3.25           | 0.122            | 97                         | 108    |
|                  | 3.50           | 0.152            | 145                        | 162    |

## NOTES:

1. Rafter and ceiling members may be anchored to top and bottom chords of girder truss by toe-nailing rafter and ceiling members to girder chords provided the reaction does not exceed the lateral capacities in the table. Hangers (specified by others) are required for reactions higher than the maximum toe-nail capacity. Reactions are based on factored loads.
2. Toe nail capacities shown in the table are for one toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor  $J_A$  in CSA O86-14, section 12.9.4.1.
3. For 9-3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in tables below.
5. Nail values in table are based on the following relative lumber densities:  $G = 0.42$  (SPF),  $G = 0.49$  (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See next page for nailing on bearing plate).
7. For loads due to wind the nail lateral capacity in this table may be multiplied by 1.15 ( $K_D$  factor).
8. Lumber must be dry (< 19% moisture content) at the time of nail installation.
9. Nail values in this table comply with CSA O86-14, section 12.9.4.
10. This design is not valid after March 31, 2021.

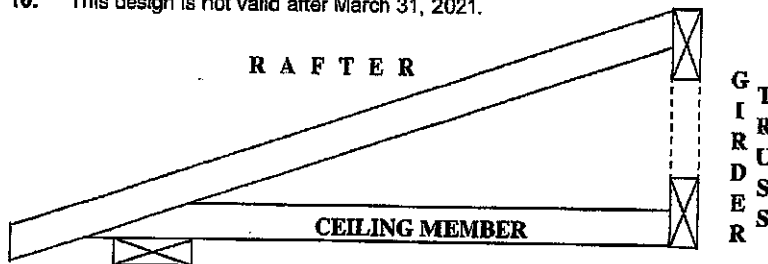


TOE-NAIL INSTALLATION

|                |                             |               |                       |               |
|----------------|-----------------------------|---------------|-----------------------|---------------|
| Nail type      | Common wire                 | Common spiral | Common wire           | Common spiral |
| Nail dia. (in) | 0.160                       | 0.152         | 0.144                 | 0.122         |
|                | ( 3.5" nail )               |               | ( 3" and 3.25" nail ) |               |
| LUMBER SIZE    | MAXIMUM NUMBER OF TOE-NAILS |               |                       |               |
| 2X4 SPF        | 2                           | 2             | 3                     | 3             |
| 2X4 D. Fir     | 2                           | 2             | 2                     | 2             |
| 2X6 SPF        | 4                           | 4             | 4                     | 5             |
| 2X6 D. Fir     | 3                           | 3             | 3                     | 4             |

**MiTek**® MiTek Canada Inc  
100 Industrial Rd.  
Bradford, Ontario L3Z 3G7

December 2, 2019



# BEARING ANCHORAGE BY TOE-NAILS FOR WIND LOADING

B97791H2



| NAIL TYPE        | LENGTH<br>(IN) | DIAMETER<br>(IN) | NAIL WITHDRAWAL CAPACITY (LB) |        |
|------------------|----------------|------------------|-------------------------------|--------|
|                  |                |                  | S-P-F                         | D. FIR |
| COMMON<br>WIRE   | 3.00           | 0.144            | 30                            | 42     |
|                  | 3.25           | 0.144            | 32                            | 45     |
|                  | 3.50           | 0.160            | 38                            | 52     |
| COMMON<br>SPIRAL | 3.00           | 0.122            | 26                            | 36     |
|                  | 3.25           | 0.122            | 28                            | 40     |
|                  | 3.50           | 0.152            | 36                            | 50     |

**Note:** If using truss with D. Fir lumber and S-P-F bearing plate, use values in table for S-P-F.



## NOTES:

1. Truss chord, rafter, or ceiling members may be anchored to bearing plate by toe-nails, provided that the actual factored uplift force due to **wind** or **earthquake** load does not exceed the withdrawal capacities in the table. Hangers (specified by others) are required for uplift forces that are higher than the maximum toe-nail withdrawal capacity.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor  $J_A$  in CSA O86-14, section 12.9.5.2.
3. For 9- 3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in table above.
5. Nail values in table are based on the following relative lumber densities: G = 0.42(SPF), G = 0.49(D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See drawing on detail B37579H1).
7. Lumber must be dry ( < 19% moisture content ) at the time of nail installation.
8. Nail values in this table comply with CSA O86-14, section 12.9.5
9. This design is not valid after March 31, 2021.

## Toe-nailing on 2x6 Bearing Plate

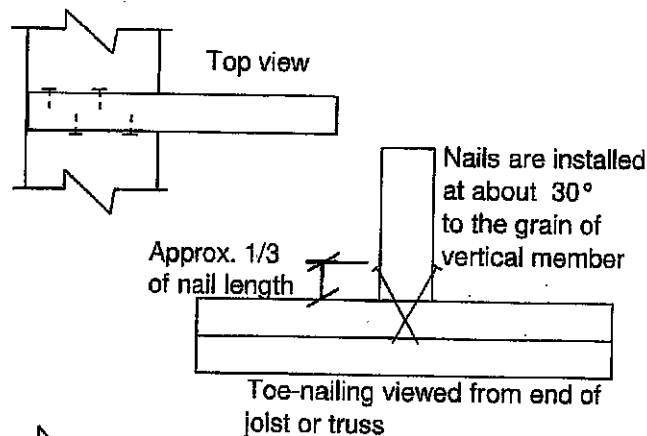

## Toe-nailing on 2x4 Bearing Plate




**MiTek**® MiTek Canada Inc  
100 Industrial Rd.  
Bradford, Ontario L3Z 3G7

December 2, 2019




## Symbols

### PLATE LOCATION AND ORIENTATION



Center plate on joint, unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths or mm. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0-1/4" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

\*Plate location details available in MiTek software or upon request.

### PLATE SIZE

4 x 4

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

### LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T, I or Eliminator bracing if indicated.

### BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur.


### Industry Standards:

- TPIC: Truss Design Procedures and Specifications for Light Metal Plate Connected Wood Trusses  
DSB-89: Design Standard for Bracing.  
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

## Numbering System



dimensions shown in ft-in-sixteenths or mm  
(Drawings not to scale)

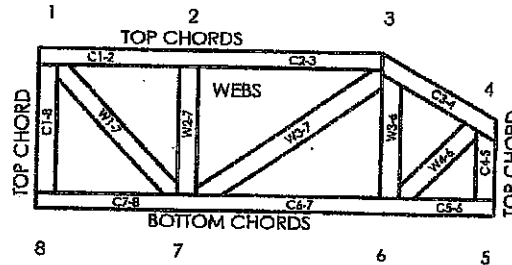

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

### PRODUCT CODE APPROVALS

CCMC Reports:

11996-L, 10319-L, 13270-L, 12691-R

© 2007 MiTek® All Rights Reserved

**MiTek**  
POWER TO PERFORM.™

MiTek Engineering Reference Sheet: MII-7473C rev. 10-08

## General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury


1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T, I, or Eliminator bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane of joint locations are regulated by TPIC.
7. Design assumes trusses will be suitably protected from the environment in accord with TPIC.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with TPIC Quality Criteria.

Overview:

Where piggybacks are connected overtop of base trusses, 2x4 purlins must be first added to the flat portion of the base truss at a spacing no more than 24" o/c. These purlins not only provide support for the piggyback trusses above, but are required to laterally support the top chord of the base truss which will not have the sheathing directly connected to the flat portion of the base truss. This ensures the top chord, most often in compression, will not buckle laterally.

Further, the purlins in the plane of the flat portion require diagonal bracing to prevent lateral displacement of the purlins themselves where under certain conditions, the trusses may in fact all buckle in the same direction if this additional bracing is not added in the plane of the purlins.

Detail:

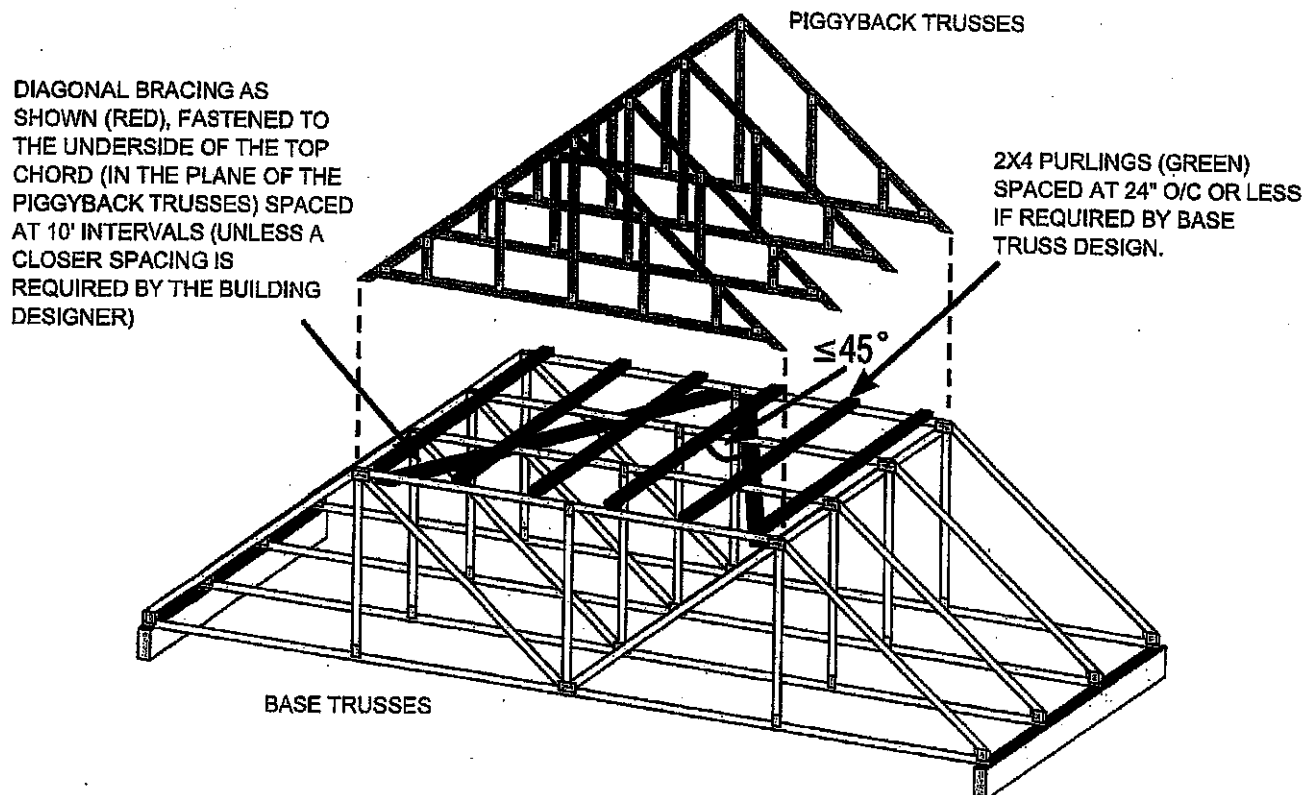

NOTE: THE SLOPED PORTION OF THE TOP CHORD OF THE BASE TRUSS AND PIGGYBACK TRUSS IN THIS SKETCH IS ASSUMED TO BE SHEATHED IN ACCORDANCE WITH THE OBC.

SKETCH FROM BCSI-CANADA 2013

Disclaimer:

OWTFA Tech Notes are intended to provide guidance to the design community both within the membership as well as to third party designers who might benefit from the information. The details have been developed by the OWTFA technical committee and although there may be professional engineers involved in development, the information contained in the tech-note are not intended to be used without having a professional engineer review the information for a specific application. The OWTFA takes no responsibility with respect to the information provided but has developed this tech-note to offer guidance where it is not currently readily available.



## Alves Engineering Services Inc.

5208 Easton road  
Burlington, Ontario L7L 6N6  
(289) 259 5455

### RESPONSABILITIES

- 1-Alves Engineering Services Inc. is responsible for the design of trusses as individual components
- 2-It is the responsibility of others to ascertain that the design loads utilized on this drawing meet or exceed the actual dead load imposed by the structure and the live load imposed by the local building code or the authorities having jurisdictions.
- 3- All dimensions are to be verified by owner, contractor, architect or other authority before manufacture.
- 4- Alves Engineering Services Inc. bears no responsibility for the erection of the trusses. Persons erecting trusses are cautioned to seek professional advice regarding temporary and permanent bracing system. Bracing shown on Alves Engineering Services Inc. drawings is specified for the truss as a single component and forms an integral part of the truss design, but is not meant to represent the only required bracing for that truss when trusses are installed in a series of trusses forming a roof truss system.
- 5- It is the manufactures responsibility to ensure that the trusses are manufactured in conformance with Alves Engineering Services Inc. specifications outlined below.

### SPECIFICATIONS

- 1-Truss components sealed by Alves Engineering Services Inc. conform to the relevant sections of the current Building Code of Ontario and Canada (part 4 or part 9) or the current Canadian code for Farm Buildings in accordance with the application specified on the sealed truss component drawing. All truss component design procedures must conform to the current design standard issued by the truss plate institute of Canada (TPIC). All lumber and nailing stresses to conform to the current CSA wood design standard identified on the current Building Code and TPIC.
- 2- Lumber is to be the sizes and grade specified on the truss drawing.
- 3- Moist content of lumber is not to exceed 19% in service unless otherwise specified.
- 4- Plates shall be applied to both faces of the each truss joint and shall be positioned as shown on the truss drawings
- 5- Lumber used on manufacture of trusses is not to be treated with chemicals unless otherwise specified on the truss drawings.
- 6- The top chord is assumed to be continuously laterally braced by the roof sheathing or purlins at intervals specified on the truss drawing but not exceeding 24" c/c for (part 9) and not exceeding 48" for (part 4 or farm design)
- 7- When rigid ceiling is not attached directly to the bottom chord, lateral bracing is required and it should not exceed more than 3m or 10' intervals.
- 8-Refer to Mitek sheet MII7473C REV.10-08 attached for information on symbols, numbering system and General Safety notes.

F-1800219

Feb 09, 2018