

Block 121 Units 7 to 12

SITE NAME: BARLASSINA		BUILDER: GREENPARK HOMES		TYPE: CHERRY 1		GFA: 1946		DATE: Aug-22		LO# 98649		WINTER NATURAL AIR CHANGE RATE 0.319		HEAT LOSS ΔT °F. 72		CSA-F280-12	
ROOM USE		MBR		ENS		WIC		BED-2		BED-3		BATH		FLEX		SB-12 PACKAGE A1	
EXP. WALL		11		14		0		10		10		0		0			
CLG. HT.		9		9		9		9		9		9		9			
FACTORS																	
GRS.WALL AREA		99		126		0		90		90		0		0			
GLAZING		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN		LOSS GAIN			
NORTH		20.3	15.0	0	0	0	0	0	0	0	0	0	0	0	0		
EAST		20.3	40.5	0	0	0	0	0	0	18	365	730	16	324	649		
SOUTH		20.3	23.9	0	0	0	0	0	0	0	0	0	0	0	0		
WEST		20.3	40.5	27	547	1095	24	487	973	0	0	0	0	0	0		
SKYLT.		35.5	99.8	0	0	0	0	0	0	0	0	0	0	0	0		
DOORS		19.1	2.4	0	0	0	0	0	0	0	0	0	0	0	0		
NET EXPOSED WALL		4.3	0.5	72	306	39	102	434	55	0	0	0	72	306	39		
NET EXPOSED BSMT WALL ABOVE GR		3.4	0.4	0	0	0	0	0	0	0	0	0	0	0	0		
EXPOSED CLG		1.2	0.5	300	367	158	160	196	84	60	73	32	170	208	90		
NO ATTIC EXPOSED CLG		2.6	1.1	0	0	0	0	0	0	0	0	0	0	0	0		
EXPOSED FLOOR		2.4	0.3	176	428	54	0	0	0	24	58	7	0	0	0		
BASEMENT/CRAWL HEAT LOSS				0		0		0		0		0		0			
SLAB ON GRADE HEAT LOSS				0		0		0		0		0		0			
SUBTOTAL HT LOSS				1648		1116		132		879		1034		276			
SUB TOTAL HT GAIN				1346		1112		39		858		806		83		100	
LEVEL FACTOR / MULTIPLIER		0.20		0.40		0.20		0.40		0.20		0.40		0.20		0.40	
AIR CHANGE HEAT LOSS				659		446		53		351		413		110		93	
AIR CHANGE HEAT GAIN				87		72		3		55		52		5		6	
DUCT LOSS				231		0		18		0		145		39		0	
DUCT GAIN				250		0		4		0		168		9		0	
HEAT GAIN PEOPLE		240	2	480		0		0		1		240		0		0	
HEAT GAIN APPLIANCES/LIGHTS				585		0		0		585		585		0		685	
TOTAL HT LOSS BTU/H				2537		1562		203		1230		1592		424		325	
TOTAL HT GAIN x 1.3 BTU/H				3571		1540		59		2260		2406		127		899	

ROOM USE						K/L/D				PWD		FOY					BAS		
EXP. WALL						48				15		30					91		
CLG. HT.						10				10		10					9		
FACTORS																			
GRS.WALL AREA	LOSS	GAIN				480				150		300					546		
GLAZING						LOSS	GAIN			LOSS	GAIN	LOSS	GAIN				LOSS	GAIN	
NORTH	20.3	15.0				0	0	0		0	0	0	0	0			0	0	0
EAST	20.3	40.5				56	1135	2270		0	0	0	0	0	0		4	81	162
SOUTH	20.3	23.9				0	0	0		0	0	0	0	0	0		0	0	0
WEST	20.3	40.6				0	0	0		0	0	0	11	223	446		0	0	0
SKYLT.	35.5	99.8				0	0	0		0	0	0	0	0	0		0	0	0
DOORS	19.1	2.4				10	191	24		0	0	0	56	1070	136		21	401	51
NET EXPOSED WALL	4.3	0.5				414	1760	224		150	638	81	233	991	126		0	0	0
NET EXPOSED BSMT WALL ABOVE GR	3.4	0.4				0	0	0		0	0	0	0	0	0		273	936	119
EXPOSED CLG	1.2	0.5				0	0	0		0	0	0	0	0	0		0	0	0
NO ATTIC EXPOSED CLG	2.6	1.1				0	0	0		0	0	0	0	0	0		0	0	0
EXPOSED FLOOR	2.4	0.3				0	0	0		0	0	0	0	0	0		0	0	0
BASEMENT/CRAWL HEAT LOSS						0				0		0					2758		
SLAB ON GRADE HEAT LOSS						0				0		0							
SUBTOTAL HT LOSS						3086				638		2283							
SUB TOTAL HT GAIN							2518				81		708						332
LEVEL FACTOR / MULTIPLIER						0.30	0.53			0.30	0.53		0.30	0.53			0.50	1.27	
AIR CHANGE HEAT LOSS						1637				338		1211					5311		
AIR CHANGE HEAT GAIN							163				5		46						21
DUCT LOSS						0				0		0					0		
DUCT GAIN							0				0		0					0	
HEAT GAIN PEOPLE	240					0	0			0		0	0	0	0		0		0
HEAT GAIN APPLIANCES/LIGHTS							585				0		0				0		0
TOTAL HT LOSS BTU/H						4724				976		3495					9487		
TOTAL HT GAIN x 1.3 BTU/H						4245				112		980							1222

SITE NAME: BARLASSINA
BUILDER: GREENPARK HOMES

TYPE: CHERRY 1

DATE: Aug-22

GFA: 1946 LO# 98649

HEATING CFM 614 COOLING CFM 614
TOTAL HEAT LOSS 26,554 TOTAL HEAT GAIN 17,418
AIR FLOW RATE CFM 23.12 AIR FLOW RATE CFM 35.25

furnace pressure 0.6
furnace filter 0.05
a/c coil pressure 0.2
available pressure for s/a & r/a 0.35

#GOODMAN
GMEC960302BNA 30
FAN SPEED LOW
MEDLOW
MEDIUM 614
MEDIUM HIGH 895

AFUE = 96 %
INPUT (BTU/H) = 30,000
OUTPUT (BTU/H) = 28,800
DESIGN CFM = 614
CFM @ .5" E.S.P.

RUN COUNT	4th	3rd	2nd	1st	Bas
S/A	0	0	9	5	3
R/A	0	0	3	1	1

plenum pressure s/a 0.18
max s/a dif press. loss 0.02
min adjusted pressure s/a 0.16
r/a pressure 0.17
r/a grille press. Loss 0.02
adjusted pressure r/a 0.15

All S/A diffusers 4"x10" unless noted otherwise on layout.
All S/A runs 5"Ø unless noted otherwise on layout.

RUN #	1	2	3	4	5	6	7	8	10	14	15	16	18	19	21	22	24
ROOM NAME	MBR	ENS	WIC	BED-2	BED-3	BATH	BATH	FLEX	MBR	K/L/D	K/L/D	K/L/D	PWD	FOY	BAS	BAS	BAS
RM LOSS MBH.	1.27	1.56	0.20	1.23	1.59	0.21	0.21	0.33	1.27	1.57	1.57	1.57	0.98	3.49	3.16	3.16	3.16
CFM PER RUN HEAT	29	36	5	28	37	5	5	8	29	36	36	36	23	81	73	73	73
RM GAIN MBH.	1.79	1.54	0.06	2.26	2.41	0.06	0.06	0.90	1.79	1.42	1.42	1.42	0.11	0.98	0.41	0.41	0.41
CFM PER RUN COOLING	63	54	2	80	85	2	2	32	63	50	50	50	4	35	14	14	14
ADJUSTED PRESSURE	0.17	0.17	0.17	0.17	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.16	0.17	0.17	0.17
ACTUAL DUCT LGH.	51	42	18	54	45	26	24	45	55	45	40	12	6	28	44	31	22
EQUIVALENT LENGTH	180	160	170	160	130	150	170	170	200	120	120	90	90	120	120	130	140
TOTAL EFFECTIVE LENGTH	231	202	188	214	175	176	194	215	255	165	160	102	96	148	164	161	162
ADJUSTED PRESSURE	0.07	0.09	0.09	0.08	0.09	0.1	0.09	0.08	0.07	0.1	0.11	0.17	0.18	0.11	0.1	0.11	0.11
ROUND DUCT SIZE	6	5	4	6	6	4	4	5	6	5	4	5	4	5	5	5	5
HEATING VELOCITY (ft/min)	148	264	57	143	189	57	57	59	148	264	413	264	264	595	536	536	536
COOLING VELOCITY (ft/min)	321	396	23	408	433	23	23	235	321	367	574	367	46	257	103	103	103
OUTLET GRILL SIZE	4X10	3X10	3X10	4X10	4X10	3X10	3X10	3X10	4X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10
TRUNK	C	C	B	A	A	B	B	B	C	A	A	B	C	C	A	A	C

RUN #	ROOM NAME	RM LOSS MBH.	CFM PER RUN HEAT	RM GAIN MBH.	CFM PER RUN COOLING	ADJUSTED PRESSURE	ACTUAL DUCT LGH.	EQUIVALENT LENGTH	TOTAL EFFECTIVE LENGTH	ADJUSTED PRESSURE	ROUND DUCT SIZE	HEATING VELOCITY (ft/min)	COOLING VELOCITY (ft/min)	OUTLET GRILL SIZE	TRUNK
1	MBR	1.27	29	1.79	63	0.17	51	180	231	0.07	6	148	321	4X10	C
2	ENS	1.56	36	1.54	54	0.17	42	160	202	0.09	5	264	396	3X10	C
3	WIC	0.20	5	0.06	2	0.17	18	170	188	0.09	4	57	23	3X10	B
4	BED-2	1.23	28	2.26	80	0.17	54	160	214	0.08	6	143	408	4X10	A
5	BED-3	1.59	37	2.41	85	0.16	45	130	175	0.09	6	189	433	4X10	A
6	BATH	0.21	5	0.06	2	0.17	26	150	176	0.1	4	57	23	3X10	B
7	BATH	0.21	5	0.06	2	0.17	24	170	194	0.09	4	57	23	3X10	B
8	FLEX	0.33	8	0.90	32	0.17	45	170	215	0.08	5	59	235	3X10	B
10	MBR	1.27	29	1.79	63	0.17	55	200	255	0.07	6	148	321	4X10	C
14	K/L/D	1.57	36	1.42	50	0.17	45	120	165	0.1	5	264	367	3X10	A
15	K/L/D	1.57	36	1.42	50	0.17	40	120	160	0.11	4	413	574	3X10	A
16	K/L/D	1.57	36	1.42	50	0.17	12	90	102	0.17	5	264	367	3X10	B
18	PWD	0.98	23	0.11	4	0.16	6	90	96	0.18	4	264	46	3X10	C
19	FOY	3.49	81	0.98	35	0.16	28	120	148	0.11	5	595	257	3X10	C
21	BAS	3.16	73	0.41	14	0.17	44	120	164	0.1	5	536	103	3X10	A
22	BAS	3.16	73	0.41	14	0.17	31	130	161	0.11	5	536	103	3X10	A
24	BAS	3.16	73	0.41	14	0.17	22	140	162	0.11	5	536	103	3X10	C

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS & DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING CODE AND ANY OTHER REFERENCED REQUIREMENTS.

SUPPLY AIR TRUNK SIZE															RETURN AIR TRUNK SIZE									
	TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT			VELOCITY (ft/min)		TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT		VELOCITY (ft/min)		TRUNK CFM	STATIC PRESS.	ROUND DUCT	RECT DUCT			VELOCITY (ft/min)		
TRUNK A	283	0.08	8.7	10	X	8	509		TRUNK G	0	0.00	0	0	X	8	0	TRUNK O	0	0.07	0	0	X	8	0
TRUNK B	342	0.08	9.4	14	X	8	440		TRUNK H	0	0.00	0	0	X	8	0	TRUNK P	0	0.07	0	0	X	8	0
TRUNK C	271	0.07	8.9	10	X	8	488		TRUNK I	0	0.00	0	0	X	8	0	TRUNK Q	0	0.07	0	0	X	8	0
TRUNK D	0	0.00	0	0	X	8	0		TRUNK J	0	0.00	0	0	X	8	0	TRUNK R	0	0.07	0	0	X	8	0
TRUNK E	0	0.00	0	0	X	8	0		TRUNK K	0	0.00	0	0	X	8	0	TRUNK S	0	0.07	0	0	X	8	0
TRUNK F	0	0.00	0	0	X	8	0		TRUNK L	0	0.00	0	0	X	8	0	TRUNK T	0	0.07	0	0	X	8	0
															TRUNK U	0	0.07	0	0	X	8	0		
															TRUNK V	0	0.07	0	0	X	8	0		
															TRUNK W	0	0.07	0	0	X	8	0		
															TRUNK X	614	0.07	12.1	18	X	8	614		
															TRUNK Y	85	0.07	5.8	8	X	8	191		
															TRUNK Z	0	0.07	0	0	X	8	0		
															DROP	614	0.07	12.1	24	X	10	368		

RETURN AIR #	1		3	4	5										BR
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
AIR VOLUME	85		85	85	270	0	0	0	0	0	0	0	0	0	89
PLENUM PRESSURE	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
ACTUAL DUCT LGH.	55	1	28	27	14	1	1	1	1	1	1	1	1	1	14
EQUIVALENT LENGTH	145	0	175	140	180	0	0	0	0	0	0	0	0	0	180
TOTAL EFFECTIVE LH	200	1	203	167	194	1	1	1	1	1	1	1	1	1	194
ADJUSTED PRESSURE	0.07	14.80	0.07	0.09	0.08	14.80	14.80	14.80	14.80	14.80	14.80	14.80	14.80	14.80	0.08
ROUND DUCT SIZE	5.8	0	5.8	5.4	8.6	0	0	0	0	0	0	0	0	0	5.7
INLET GRILL SIZE	8	0	8	8	8	0	0	0	0	0	0	0	0	0	8
	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
INLET GRILL SIZE	14	0	14	14	30	0	0	0	0	0	0	0	0	0	14

TYPE: CHERRY 1
SITE NAME: BARLASSINA

LO # 98649

RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY

COMBUSTION APPLIANCES		9.32.3.1(1)
a) ☒	Direct vent (sealed combustion) only	
b) ☐	Positive venting induced draft (except fireplaces)	
c) ☐	Natural draft, B-vent or induced draft gas fireplace	
d) ☐	Solid Fuel (including fireplaces)	
e) ☐	No Combustion Appliances	

HEATING SYSTEM	
☒	Forced Air
☐	Non Forced Air
☐	Electric Space Heat

HOUSE TYPE		9.32.1(2)
☒	I Type a) or b) appliance only, no solid fuel	
☐	II Type I except with solid fuel (including fireplaces)	
☐	III Any Type c) appliance	
☐	IV Type I, or II with electric space heat	
☐	Other: Type I, II or IV no forced air	

SYSTEM DESIGN OPTIONS		O.N.H.W.P.
☐	1 Exhaust only/Forced Air System	
☐	2 HRV with Ducting/Forced Air System	
☒	3 HRV Simplified/connected to forced air system	
☐	4 HRV with Ducting/non forced air system	
☐	Part 6 Design	

TOTAL VENTILATION CAPACITY		9.32.3.3(1)
Basement + Master Bedroom	2 @ 21.2 cfm	42.4 cfm
Other Bedrooms	2 @ 10.6 cfm	21.2 cfm
Kitchen & Bathrooms	4 @ 10.6 cfm	42.4 cfm
Other Rooms	4 @ 10.6 cfm	42.4 cfm
Table 9.32.3.A.	TOTAL	148.4 cfm

PRINCIPAL VENTILATION CAPACITY REQUIRED		9.32.3.4.(1)
1 Bedroom	31.8	cfm
2 Bedroom	47.7	cfm
3 Bedroom	63.6	cfm
4 Bedroom	79.5	cfm
5 Bedroom	95.4	cfm
TOTAL	63.6	cfm

SUPPLEMENTAL VENTILATION CAPACITY		9.32.3.5.
Total Ventilation Capacity	148.4	cfm
Less Principal Ventil. Capacity	63.6	cfm
Required Supplemental Capacity	84.8	cfm

PRINCIPAL EXHAUST FAN CAPACITY	
Model:	VANEE V150H
Location:	BSMT
63.6 cfm	☒ HVI Approved

PRINCIPAL EXHAUST HEAT LOSS CALCULATION			
CFM	ΔT °F	FACTOR	% LOSS
63.6 CFM	72 F	1.08	0.25

SUPPLEMENTAL FANS BY INSTALLING CONTRACTOR				
Location	Model	cfm	HVI	Sones
ENS	BY INSTALLING CONTRACTOR	50	☒	3.5
BATH	BY INSTALLING CONTRACTOR	50	☒	3.5
LAUN	BY INSTALLING CONTRACTOR	50	☒	3.5
PWD	BY INSTALLING CONTRACTOR	50	☒	3.5

HEAT RECOVERY VENTILATOR		9.32.3.11.
Model:	VANEE V150H	
150 cfm high	35 cfm low	
75 % Sensible Efficiency @ 32 deg F (0 deg C)	☒ HVI Approved	

LOCATION OF INSTALLATION	
Lot:	Concession
Township	Plan:
Address	
Roll #	Building Permit #

BUILDER: GREENPARK HOMES	
Name:	
Address:	
City:	
Telephone #:	Fax #:

INSTALLING CONTRACTOR	
Name:	
Address:	
City:	
Telephone #:	Fax #:

DESIGNER CERTIFICATION	
I hereby certify that this ventilation system has been designed in accordance with the Ontario Building Code.	
Name:	HVAC Designs Ltd.
Signature:	<i>Michael O'Rourke</i>
HRAI #	001820
Date:	August-22

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS
& DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION
BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE
OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING
CODE AND ANY OTHER REFERENCED REQUIREMENTS.

CSA F280-12 Residential Heat Loss and Heat Gain Calculations																																																												
Formula Sheet (For Air Leakage / Ventilation Calculation)																																																												
LO#: 98649		Model: CHERRY 1		Date: 2022-08-22																																																								
Builder: GREENPARK HOMES																																																												
Volume Calculation			Air Change & Delta T Data																																																									
House Volume <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Level</th> <th>Floor Area (ft²)</th> <th>Floor Height (ft)</th> <th>Volume (ft³)</th> </tr> </thead> <tbody> <tr> <td>Bsmt</td> <td>816</td> <td>9</td> <td>7344</td> </tr> <tr> <td>First</td> <td>816</td> <td>10</td> <td>8160</td> </tr> <tr> <td>Second</td> <td>1130</td> <td>9</td> <td>10170</td> </tr> <tr> <td>Third</td> <td>0</td> <td>9</td> <td>0</td> </tr> <tr> <td>Fourth</td> <td>0</td> <td>9</td> <td>0</td> </tr> <tr> <td colspan="3" style="text-align: right;">Total:</td> <td>25,674.0 ft³</td> </tr> <tr> <td colspan="3" style="text-align: right;">Total:</td> <td>727.0 m³</td> </tr> </tbody> </table>			Level	Floor Area (ft²)	Floor Height (ft)	Volume (ft³)	Bsmt	816	9	7344	First	816	10	8160	Second	1130	9	10170	Third	0	9	0	Fourth	0	9	0	Total:			25,674.0 ft³	Total:			727.0 m³	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">WINTER NATURAL AIR CHANGE RATE</td> <td style="width: 20%;">0.319</td> </tr> <tr> <td>SUMMER NATURAL AIR CHANGE RATE</td> <td>0.085</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="5" style="text-align: center;">Design Temperature Difference</th> </tr> <tr> <th></th> <th>Tin °C</th> <th>Tout °C</th> <th>ΔT °C</th> <th>ΔT °F</th> </tr> <tr> <td>Winter DTDh</td> <td>22</td> <td>-18</td> <td>40</td> <td>72</td> </tr> <tr> <td>Summer DTDc</td> <td>24</td> <td>29</td> <td>5</td> <td>9</td> </tr> </table>		WINTER NATURAL AIR CHANGE RATE	0.319	SUMMER NATURAL AIR CHANGE RATE	0.085	Design Temperature Difference						Tin °C	Tout °C	ΔT °C	ΔT °F	Winter DTDh	22	-18	40	72	Summer DTDc	24	29	5	9
Level	Floor Area (ft²)	Floor Height (ft)	Volume (ft³)																																																									
Bsmt	816	9	7344																																																									
First	816	10	8160																																																									
Second	1130	9	10170																																																									
Third	0	9	0																																																									
Fourth	0	9	0																																																									
Total:			25,674.0 ft³																																																									
Total:			727.0 m³																																																									
WINTER NATURAL AIR CHANGE RATE	0.319																																																											
SUMMER NATURAL AIR CHANGE RATE	0.085																																																											
Design Temperature Difference																																																												
	Tin °C	Tout °C	ΔT °C	ΔT °F																																																								
Winter DTDh	22	-18	40	72																																																								
Summer DTDc	24	29	5	9																																																								
S.2.3.1 Heat Loss due to Air Leakage			6.2.6 Sensible Gain due to Air Leakage																																																									
$HL_{airb} = LR_{airh} \times \frac{V_b}{3.6} \times DTD_h \times 1.2$ 0.319 x 201.95 x 40 °C x 1.2 = 3113 W = 10623 Btu/h			$HG_{salb} = LR_{airc} \times \frac{V_b}{3.6} \times DTD_c \times 1.2$ = 0.085 x 201.95 x 5 °C x 1.2 = 105 W = 358 Btu/h																																																									
S.2.3.2 Heat Loss due to Mechanical Ventilation			6.2.7 Sensible heat Gain due to Ventilation																																																									
$HL_{vairb} = PVC \times DTD_h \times 1.08 \times (1 - E)$ 64 CFM x 72 °F x 1.08 x 0.25 = 1243 Btu/h			$HL_{vairb} = PVC \times DTD_h \times 1.08 \times (1 - E)$ 64 CFM x 9 °F x 1.08 x 0.25 = 158 Btu/h																																																									
S.2.3.3 Calculation of Air Change Heat Loss for Each Room (Floor Multiplier Section)																																																												
$HL_{airr} = Level\ Factor \times HL_{airbv} \times \{(HL_{agcr} + HL_{bgcr}) \div (HL_{agclevel} + HL_{bgclevel})\}$																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Level</th> <th>Level Factor (LF)</th> <th>HLairve Air Leakage + Ventilation Heat Loss (Btu/h)</th> <th>Level Conductive Heat Loss: (HL_{clevel})</th> <th>Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.5</td> <td rowspan="5" style="text-align: center; vertical-align: middle;">10,623</td> <td>4,176</td> <td>1.272</td> </tr> <tr> <td>2</td> <td>0.3</td> <td>6,007</td> <td>0.530</td> </tr> <tr> <td>3</td> <td>0.2</td> <td>5,316</td> <td>0.400</td> </tr> <tr> <td>4</td> <td>0</td> <td>0</td> <td>0.000</td> </tr> <tr> <td>5</td> <td>0</td> <td>0</td> <td>0.000</td> </tr> </tbody> </table>					Level	Level Factor (LF)	HLairve Air Leakage + Ventilation Heat Loss (Btu/h)	Level Conductive Heat Loss: (HL _{clevel})	Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)	1	0.5	10,623	4,176	1.272	2	0.3	6,007	0.530	3	0.2	5,316	0.400	4	0	0	0.000	5	0	0	0.000																														
Level	Level Factor (LF)	HLairve Air Leakage + Ventilation Heat Loss (Btu/h)	Level Conductive Heat Loss: (HL _{clevel})	Air Leakage Heat Loss Multiplier (LF x HLairbv / HLlevel)																																																								
1	0.5	10,623	4,176	1.272																																																								
2	0.3		6,007	0.530																																																								
3	0.2		5,316	0.400																																																								
4	0		0	0.000																																																								
5	0		0	0.000																																																								
*HLairbv = Air leakage heat loss + ventilation heat loss *For a balanced or supply only ventilation system HLairve = 0																																																												
				Michael O'Rourke BCIN# 19669 																																																								



NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS
& DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION
BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE
OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING
CODE AND ANY OTHER REFERENCED REQUIREMENTS

375 Finley Ave. Suite 202 Ajax, ON L1S 2E2

Tel: 905.619.2300 Fax: 905.619.2375

Web: www.hvacdesigns.ca E-mail: info@hvacdesigns.ca

HEAT LOSS AND GAIN SUMMARY SHEET

MODEL: CHERRY 1

BUILDER: GREENPARK HOMES

SFQT: 1946

LO# 98649

SITE: BARLASSINA

DESIGN ASSUMPTIONS

HEATING	°F	COOLING	°F
OUTDOOR DESIGN TEMP.	0	OUTDOOR DESIGN TEMP.	84
INDOOR DESIGN TEMP.	72	INDOOR DESIGN TEMP. (MAX 75°F)	75
		WINDOW SHGC	0.50

BUILDING DATA

ATTACHMENT:	ATTACHED	# OF STORIES (+BASEMENT):	3
FRONT FACES:	EAST	ASSUMED (Y/N):	Y
AIR CHANGES PER HOUR:	3.57	ASSUMED (Y/N):	Y
AIR TIGHTNESS CATEGORY:	AVERAGE	ASSUMED (Y/N):	Y
WIND EXPOSURE:	SHELTERED	ASSUMED (Y/N):	Y
HOUSE VOLUME (ft³):	25674.0	ASSUMED (Y/N):	Y
INTERNAL SHADING:	BLINDS/CURTAINS	ASSUMED OCCUPANTS:	4
INTERIOR LIGHTING LOAD (Btu/h/ft²):	1.27	DC BRUSHLESS MOTOR (Y/N):	Y
FOUNDATION CONFIGURATION	BCIN_1	DEPTH BELOW GRADE:	6.0 ft
LENGTH: 57.0 ft	WIDTH: 17.0 ft	EXPOSED PERIMETER:	91.0 ft

2012 OBC - COMPLIANCE PACKAGE

Component	Compliance Package A1	
	Nominal	Min. Eff.
Ceiling with Attic Space Minimum RSI (R)-Value	60	59.22
Ceiling Without Attic Space Minimum RSI (R)-Value	31	27.65
Exposed Floor Minimum RSI (R)-Value	31	29.80
Walls Above Grade Minimum RSI (R)-Value	22	17.03
Basement Walls Minimum RSI (R)-Value	20 ci	21.12
Below Grade Slab Entire surface > 600 mm below grade Minimum RSI (R)-Value	-	-
Edge of Below Grade Slab ≤ 600 mm Below Grade Minimum RSI (R)-Value	10	10
Heated Slab or Slab ≤ 600 mm below grade Minimum RSI (R)-Value	10	11.13
Windows and Sliding Glass Doors Maximum U-Value	0.28	-
Skylights Maximum U-Value	0.49	-
Space Heating Equipment Minimum AFUE	96%	-
HRV/ERV Minimum Efficiency	75%	-
Domestic Hot Water Heater Minimum EF	0.8	-


INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS
& DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION
BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE
OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING
CODE AND ANY OTHER REFERENCED REQUIREMENTS.

Residential Foundation Thermal Load Calculator

Supplemental tool for CAN/CSA-F280

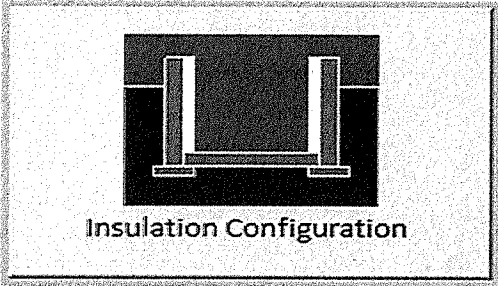Weather Station Description		
Province:	Ontario	
Region:	Cambridge	
Site Description		
Soil Conductivity:	Normal conductivity: dry sand, loam, clay	
Water Table:	Normal (7-10 m, 23-33 ft)	
Foundation Dimensions		
Floor Length (m):	17.4	 Insulation Configuration
Floor Width (m):	5.2	
Exposed Perimeter (m):	27.7	
Wall Height (m):	2.7	
Depth Below Grade (m):	1.83	
Window Area (m ²):	0.4	
Door Area (m ²):	2.0	
Radiant Slab		
Heated Fraction of the Slab:	0	
Fluid Temperature (°C):	33	
Design Months		
Heating Month	1	
Foundation Loads		
Heating Load (Watts):		808

TYPE: CHERRY 1
LO# 98649


NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS
& DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION
BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE
OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING
CODE AND ANY OTHER REFERENCED REQUIREMENTS.

Air Infiltration Residential Load Calculator

Supplemental tool for CAN/CSA-F280

Weather Station Description				
Province:	Ontario			
Region:	Cambridge			
Weather Station Location:	Open flat terrain, grass			
Anemometer height (m):	10			
Local Shielding				
Building Site:	Suburban, forest			
Walls:	Heavy			
Flue:	Heavy			
Highest Ceiling Height (m):	6.71			
Building Configuration				
Type:	Semi			
Number of Stories:	Two			
Foundation:	Full			
House Volume (m ³):	727.0			
Air Leakage/Ventilation				
Air Tightness Type:	Present (1961-) (3.57 ACH)			
Custom BDT Data:	ELA @ 10 Pa.	969.1 cm ²		
	3.57	ACH @ 50 Pa		
Mechanical Ventilation (L/s):	Total Supply	Total Exhaust		
	30.0	30.0		
Flue Size				
Flue #:	#1	#2	#3	#4
Diameter (mm):	0	0	0	0
Natural Infiltration Rates				
Heating Air Leakage Rate (ACH/H):	0.319			
Cooling Air Leakage Rate (ACH/H):	0.085			

TYPE: CHERRY 1
LO# 98649

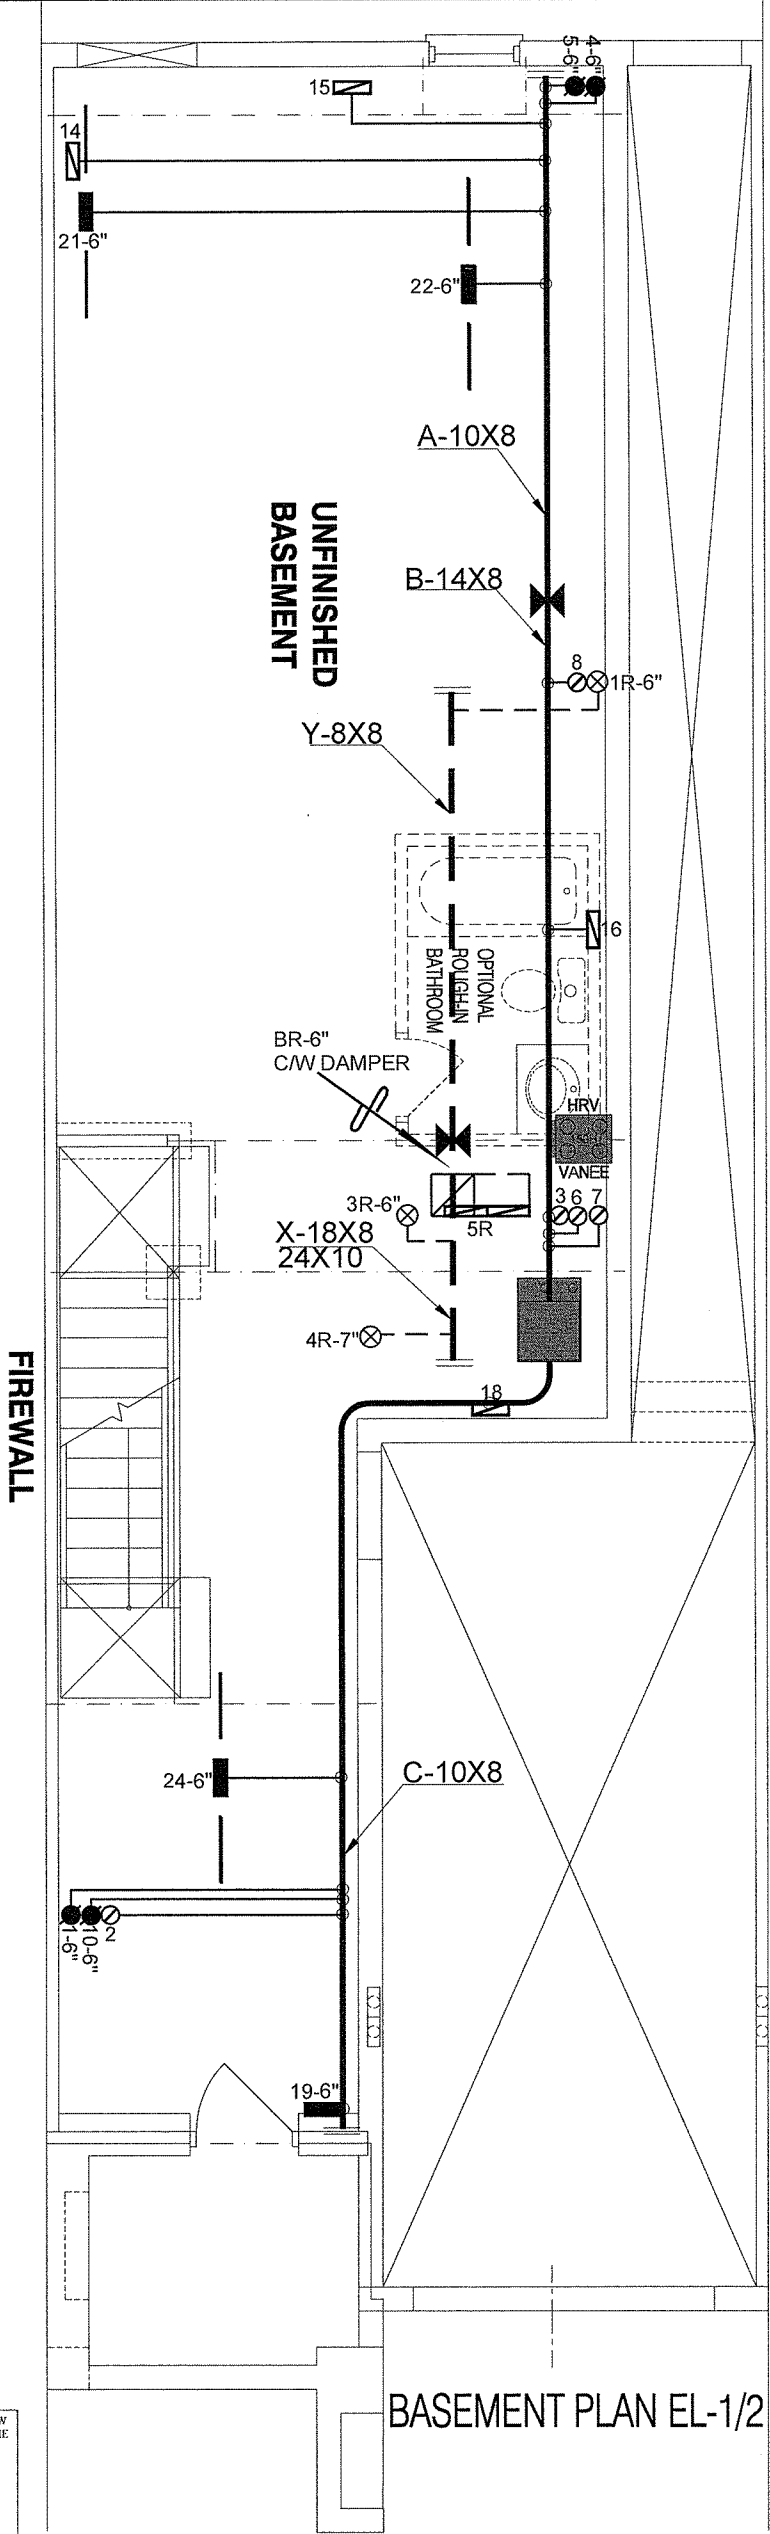

BASEMENT PLAN EL-1/2

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS & DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING CODE AND ANY OTHER REFERENCED REQUIREMENTS.


CSA-F280-12
PACKAGE A1

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.
Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.


HVAC LEGEND							3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS	

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client GREENPARK HOMES		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	HEAT LOSS 27798 BTU/H UNIT DATA		# OF RUNS S/A R/A FANS			Sheet Title BASEMENT HEATING LAYOUT		
Project Name BARLASSINA CAMBRIDGE, ONTARIO			MAKE GOODMAN		3RD FLOOR				Date AUG/2022	
Block 121 Units 7 to 12			MODEL GMEC960302BNA		2ND FLOOR	9	3	3		Scale 3/16" = 1'-0"
CHERRY 1 1946 sqft			INPUT 30 MBTU/H		1ST FLOOR	5	1	2		
			OUTPUT 29 MBTU/H		BASEMENT	3	1	0	LO# 98649	
		COOLING 1.5 TONS		ALL S/A DIFFUSERS 4 "x10" UNLESS NOTED OTHERWISE ON LAYOUT. ALL S/A RUNS 5"Ø UNLESS NOTED OTHERWISE ON LAYOUT. UNDERCUT DOORS 1" min. FOR R/A						
		FAN SPEED 735 cfm @ 0.6" w.c.								

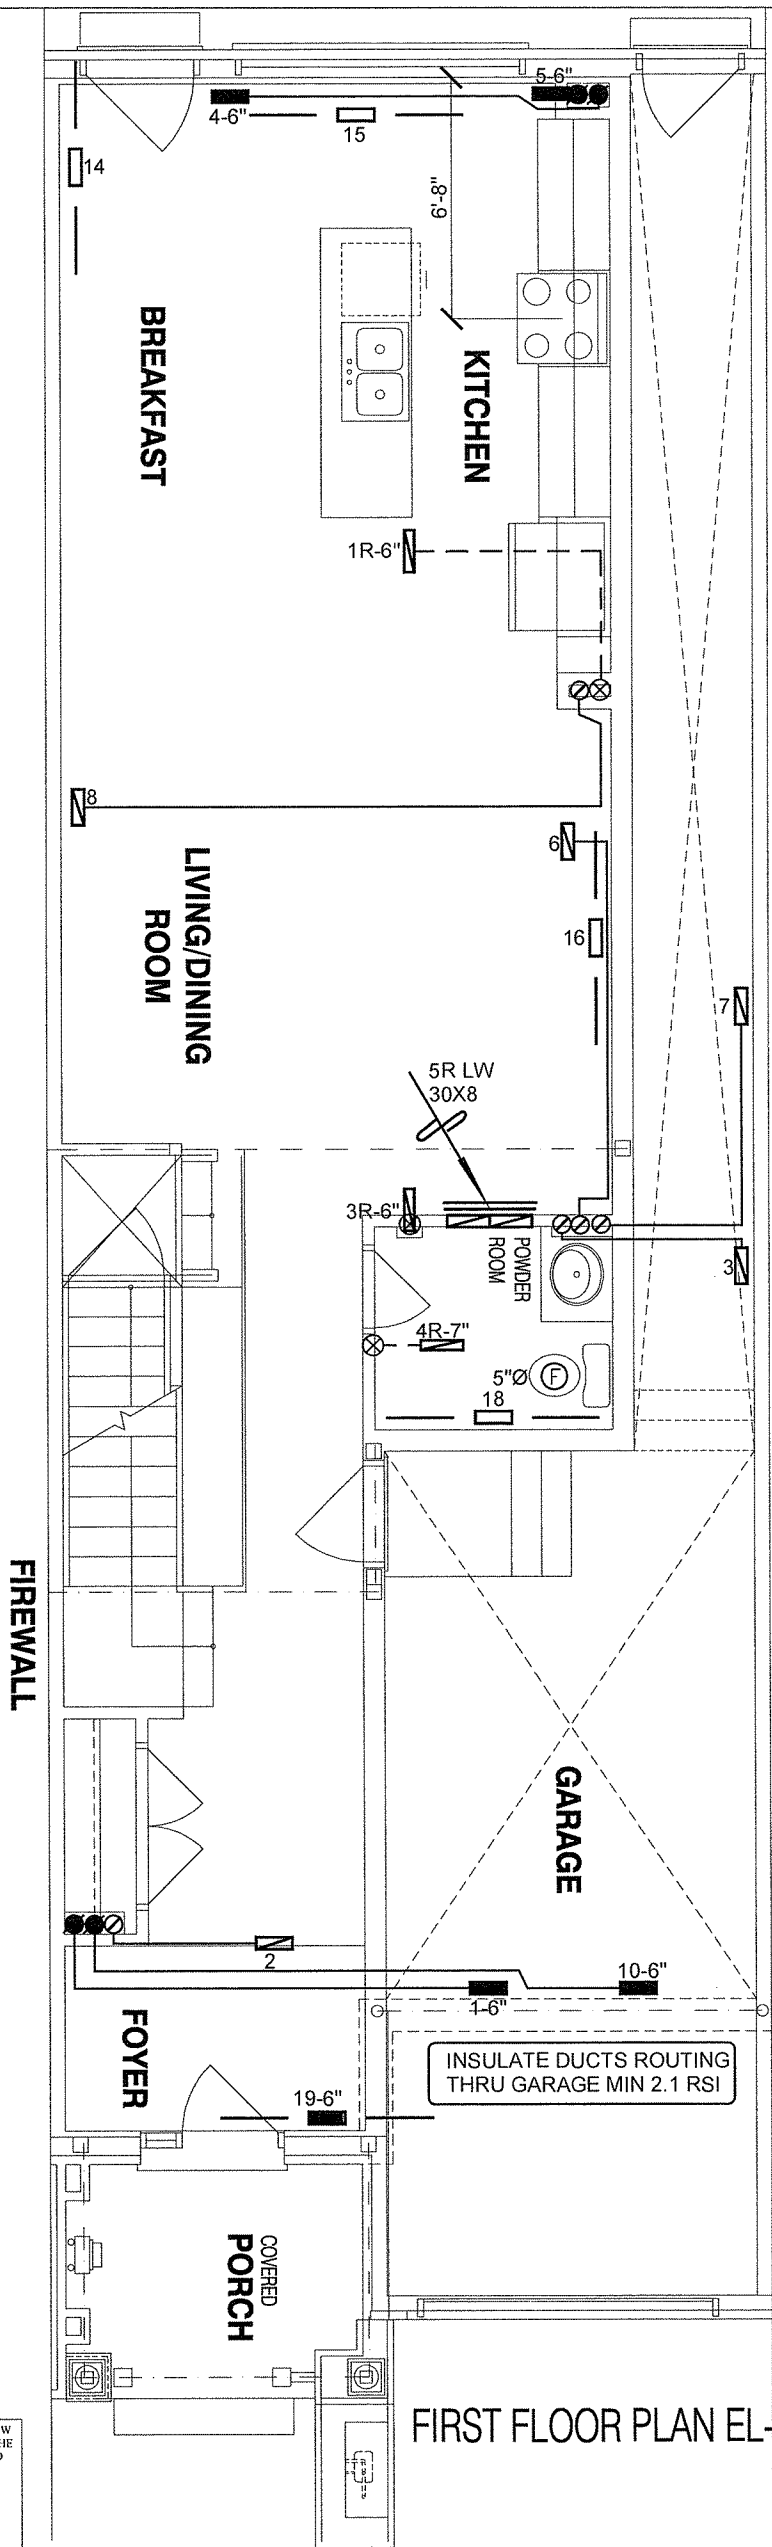

FIRST FLOOR PLAN EL-1

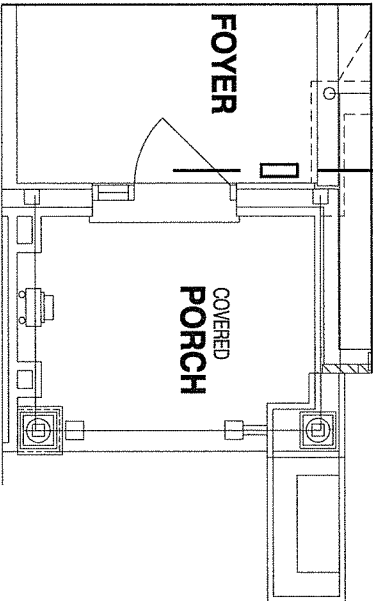

FIRST FLOOR PLAN EL-2

I MICHAEL O'ROURKE HAVE REVIEW AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS & DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING CODE AND ANY OTHER REFERENCED REQUIREMENTS.

CSA-F280-12
PACKAGE A1

HVAC LEGEND							3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS	

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Sheet Title	
GREENPARK HOMES			FIRST FLOOR HEATING LAYOUT	
Project Name			Date	AUG/2022
BARLASSINA CAMBRIDGE, ONTARIO			Scale	3/16" = 1'-0"
Block 121 Units 7 to 12			BCIN# 19669	
CHERRY 1	1946 sqft		LO#	98649

FIREWALL

BEDROOM 2

BEDROOM 3

FLEX ROOM

LAUNDRY

BATH (MAIN)

MASTER
BEDROOM

ENSUITE

ENSUITE

SEC. FLOOR PLAN EL-2

SEC. FLOOR PLAN EL-1

I MICHAEL O'ROURKE HAVE REVIEW
AND TAKE RESPONSIBILITY FOR THE
DESIGN WORK AND AM QUALIFIED
UNDER DIVISION C, 3.2.5 OF THE
BUILDING CODE.
Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

NOT THE GRANTING OF A PERMIT NOR REVIEWING OF SPECS
& DRAWINGS NOR INSPECTIONS MADE DURING INSTALLATION
BY THE OFFICIAL HAVING JURISDICTION SHALL RELIEVE THE
OWNER FROM REQUIREMENTS OF THE ONTARIO BUILDING
CODE AND ANY OTHER REFERENCED REQUIREMENTS.

CSA-F280-12
PACKAGE A1

HVAC LEGEND							3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.	
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS	

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client GREENPARK HOMES		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services	Sheet Title SECOND FLOOR HEATING LAYOUT	
Project Name BARLASSINA CAMBRIDGE, ONTARIO			Date AUG/2022	
Block 121 Units 7 to 12		Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Scale 3/16" = 1'-0"	
CHERRY 1 1946 sqft			BCIN# 19669	
			LO# 98649	