

RECEIVED
DEC 1 7 2021

- Devision:				
- Devision.	()			*
	· de	110	2101	(

: Appliance

CONSTRUCTION SUMMARY

Mountainview Heights 3 (G) - Russell Gardens Building Ltd.

PURCHASERS: GULNAZ BAJWA and HAMZA BAJWA

LOT / PHASE REG. PLAN # HOUSE TYPE

184 / 3 62M-1266 Mountainash Five (5 Bedroom) Elev 2

pec's	TEL:
-------	------

CA	BI	NI	$\mathbf{E}\mathbf{T}$	R	Y	SHOW

1 - KITCHEN - DELETE CABINETS ABOVE STOVE - VENDOR WILL SUPPLY 6 INCH VENT AS PER CONSTRUCTION SPECIFICATIONS AND VENT MAY NOT BE IN THE APPROPRIATE LOCATION FOR INSTALLATION OF PURCHASER SUPPLIED VENT - PURCHASER TO SUPPY OWN FAN AFTER CLOSING

23Sep21 Note: TEMPORARY HOOD FAN MAY BE PROVIDED

CABINETRY ACCESSORIES

1 - KITCHEN CABINETRY UPPER - FULL DEPTH ABOVE FRIDGE - WITH GABLES - 600MM - PRICE IS EACH - STANDARD
23Sep21 Note:
1 - KITCHEN CABINETRY - BUILT-IN MICROWAVE/OVEN COMBO - STANDARD
23Sep21 Note:
1 - KITCHEN CABINETRY BASE - COOKTOP CABINET WITH POT DRAWERS (2 DRAWERS) - STANDARD
23Sep21 Note:

CERAMIC TILE

CERAMI	
1 - DELET	E ALL CERAMIC BATHROOM ACCESSORIES - DELETE TOWEL BAR, PAPER HOLDER & SOAP DISH THROUGHOUT
23Sep21	Note:
,	
	UPGRADE 1 FLOOR TILE LAUNDRY ROOM - 2ND FLOOR - FLOOR
23Sep21	Note:
1 THE	UPGRADE 1 WALL TILE BATHROOM 4/5 - TUB AREA
23Sep21	
23Sep21	Note.
1 - TILE -	UPGRADE 1 FLOOR TILE BATHROOM 4/5 - FLOOR
23Sep21	Note:
	UPGRADE 1 FLOOR TILE BATHROOM 2/3 - SHOWER
23Sep21	Note:
4 (TH F)	UDODADE LEI COD THE DATHDOOM 2/2 EL COD
	UPGRADE 1 FLOOR TILE BATHROOM 2/3 - FLOOR
23Sep21	Note:
1 - TILE -	UPGRADE 4 FLOOR TILE ENSUITE BATHROOM - FLOOR
23Sep21	Note:
	UPGRADE 4 WALL TILE ENSUITE WALL TILE - SHOWER
23Sep21	Note:
4 WY D	VIDOD LDE 4 EV OOD THE DOWNER BOOM
	UPGRADE 4 FLOOR TILE POWDER ROOM
23Sep21	Note.
1 - TILE -	UPGRADE 4 FLOOR TILE MUD ROOM
23Sep21	
1	
	UPGRADE 4 FLOOR TILE KITCHEN
23Sep21	Note:
	ATROP A PLACE THE PROVIDE
	UPGRADE 4 FLOOR TILE FOYER
23Sep21	NOIC.

CONSTRUCTION

1 - SMOO	H CEILINGS ON FIRST FLOOR ONLY - DET	
23Sep21	Note:	
	7	

DOORS AND TRIM


Constitution of the Same Constitution of the C					
1 - TRIM - 1	UPGRADE 2- 7-1/4" E	BASEBOARD AND 3" CASING	3		
23Sep21	Note:				

OIL PAN



36-INCH 6-BURNER RANGETOP

DTT36M876 | MODERNIST COLLECTION

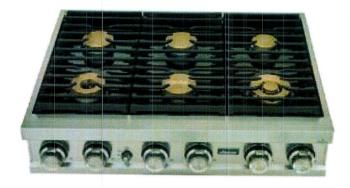

AVAILABLE MODELS

DTT36M876LS 36" Rangetop, Stainless Steel, Natural Gas
DTT36M876PS 36" Rangetop, Stainless Steel, Liquid Propane
DTT36M876HS 36" Rangetop, Stainless Steel, Natural Gas/High Altitude
DTT36M876AS 56" Rangetop, Stainless Steel, Liquid Propane/High Altitude
DTT36M876LM 36" Rangetop, Graphite Stainless Steel, Natural Gas
DTT36M876PM 36" Rangetop, Graphite Stainless Steel, Natural
Gas/High Altitude

DTT36M876AM 36" Rangetop, Graphite Stainless Steel, Liquid Propane/High Altitude

FEATURES & BENEFITS

- → 6 Sealed Brass Burners.
- Powerful 22K BTU and true simmer burners.
- Continuous grates.
- → Illumina™ Knobs and Ambient Light.
- Includes brass and black burner caps.
- Available in graphite stainless steel and silver stainless steel finish.

ACCESSORIES (HCLUDED) BRASS BURNER CAPS BLACK BURNER CAPS BURNER PERFORMANCE LEFT FRONT INTID 18,000 DUAL (SIMMER) LEFT REAR (BTU) 16,000 STACK DUAL (SIN RIGHT FRONT (BTU) 16,000 STACK DUAL (SIN RIGHT REAR (BTU) 16,000 STACK DUAL (SIN CENTER FRONT (BTU) 22.000 DUAL (SIMMER) CENTER REAR (BTU) 9,000 STACK DUAL (SIM SEALED BURNERS CONTROL FEATURES LED KNOB BACKLIGHTING LED AMBIENT LIGHTING YES LED CONTROL BUTTON YES WI FI CONNECT LED YES WI FI CONNECT BUTTON YES BLUETOOTH CONNECT LED YES BLUETOOTH CONNECT BUTTON ADDITIONAL FEATURES

-	INSTALLATION	I I E E III III E E
	GAS TYPE	MATURAL GAS/ LIQUID PROPANE
	HIGH ALTITUDE AVAILABLE	YES
	POWER CORD	YES
	TECHNICAL DETAILS	
_	CIRCUIT BREAKER (A)	15

YES

HEISTER BETTER	SSIONS (H X IV X D) (IN.)	8" X 36" X 24"
DIMENSION	S & WEIGHT	
ENERGY SOURCE		GAS
FREQUENCY (HZ)		60
VOLTS (V)		120
CIRCUIT BREAKER	(A)	15

REQUIRED CUTOUT SIZE (W X H) (IN)	7 5/4" X 36" X 24"
WARRANTY	
LIMITED, PARTS AND LABOR	2 YEARS



30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

http://www.kitchenaid.con



Key Features:

- Even-Heat[™] True Convection Oven (lower over
- Microwave Convection Cooking (upper oven)
- Professionally-Inspired Design
- Temperature Probe
- EasyConvect[™] Conversion System
- 5.0 Cu. Ft. Total Capacity (lower oven)
- 1.4 Cu. Ft. Capacity (upper oven)
- Crispwave™ Microwave Technology and Crispe (upper oven)
- SatinGlide™ Roll-Out Extension Rack (lower ov

Product Dimensions:

Height: 42 1/2

Width: 30

Depth: 27 1/8

Electrical Requirements:

40 Amps.

Additional Information:

Use And Care Guide

Dimension Guide

Installation Guide

Warranty Certificate

Available in:

Black

Stainless Steel

White







KitchenAid®

27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309F

KOCE500E

KOCE507F

ELECTRICAL CONNECTION

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions

 Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate


- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- · A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- · Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - 1. Connect a section of solid copper wire to the pigtail leads.
 - 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600

PRODUCT DIMENSIONS

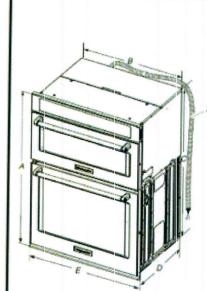


- 27" (68.6 cm) models
- A. 42%* (108.0 cm) overall height B. 25%* (64.6 cm) recessed
- C. 411" (104.1 cm) recessed
- height

 D. 33%" (\$9.1 cm) max.
- necessed death (68.6 cm) overall width
- E. 27" (68.6 cm) overall v F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the over. Do not remove the

conduit como.

- 30" (76.2 cm) models A. 42% (108.0 cm) overall height
- B. 28% (72.3 cm) recessed wichth
- C. 41" (104.1 cm) recessed height
- D. 23¼* (59.1 cm) max. necessed depth
- E. 30° (76.2 cm) overall width
- F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the ciren. Do not remove the conduit clamp.

Cabinet Dimensions

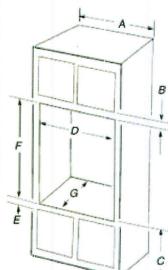

- 27" (68.6 cm) models A. 27" (68.6 cm) min. cabinet width B. 1° (2.5 cm) top of cutout to
- bottom of upper cabinet door C. 19½" (418.9 cm) bottom of cutout to floor is recommended. 4*-19 %" (10.2-48.9 cm) bottom of outout to floor is acceptable. 25 %" (64.8 cm) cutout width
- E. 11%* (3.5 cm) min. bottom of cutout to top of cabinet door F. 411%* (105 cm)* recommended cutout height
- G. 24" (60.1" cm) cutout depth

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width B. 1° (2.5 cm) top of cutout to
- C. 19%* (48.9 cm) bottom of cutout to floor is recommended. 4"-19"," (10,2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 28%" (72.4 cm) cutout width
- E. 11/6" (3.8 cm) min. bottom of cutout F. 41%° (105 cm)' recommended
- G. 24" (60.7 cm) cutout depth
- NOTIE: The cabinet height can be between 41" (104.1 cm) and 411/2" (105.6 cm) for microwave/oven combination.




48" FULLY INTEGRATED SIDE-BY-SIDE REFRIGERATOR


DETAILED PLANNING DIMENSIONS GUIDE
(BASE UNIT REQUIRES SUITE-COORDINATING FULL HEIGHT PANEL KIT OR CUSTO PANELS AND HANDLES)

JS48NXFXDE – 47%" (W) x 83%" (H) x 24" (depth without door panels/handles)

PRODUCT DIMENSIONS (INCLUDING STAINLESS STEEL DOOR PANEL KIT DIMENSIONS)

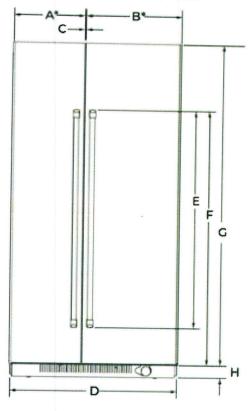

FRONT VIEW

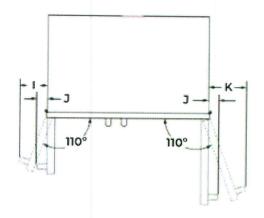

TOP VIEW

DIMENSION	DESCRIPTION	JS48NXF
A*	Width of freezer door	20% to* (51.6 c
B*	Width of refrigerator door	27%16" [69.4
С	Space between doors	1/8" (0.3 cm)
D	Overall width (including vinyl side trim)	47¾" (121.3 c
	Height of door handle	
E	RISE™ Stainless	58" (147.3 cm
	NOIR™ Stainless	40%" (103.2 c
	Height to top of door handle	CONTRACTOR OF STREET,
F	RISETM Stainless	7111/16" (1821 c
	NOIR ^{NA} Stainless	6913/26" (177.3
G	Height of door	81" (205.7 cm
н	Height of bottom grille	3º (7.6 cm)
r	Width from side of refrigerator to freezer door handle – door fully open 110° RISETM Stainless	8½° (20.7 cm
	NOIR™ Stainless	75%° (19.3 cm)
	Width from side of refrigerator to handle – door open 90°	
J	RISE™ Stainless	2%" (6.1 cm)
	NOIR™ Stainless	1%" (4.1 cm)
	Width from side of refrigerator to refrigerator door handle – door fully open 110°	
	RISE™ Stainless	10%s° (26.8 c
	NOIR™ Stainless	10½1e* (25.5 cr

^{*}Door width dimensions are for stainless steel panel kit only