



Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:



Job Name: VILLA 1-2 STD

Project #:

ASSOCIATION OF TOWNSHIPS OF OSHAWA  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

PER: *C. M...*  
CHIEF BUILDING OFFICIAL

F6-B AJS 140 11.875" - PASSED MHP 23033

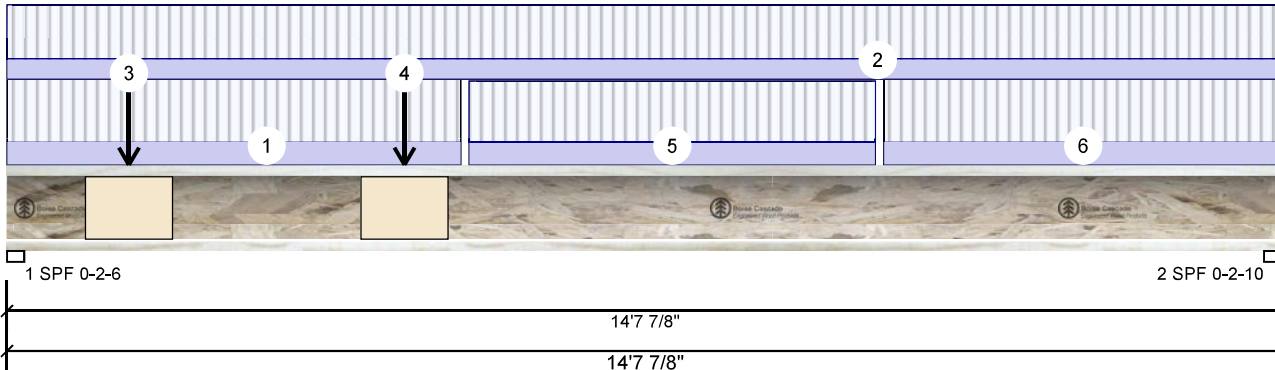

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	502	188	0	0
2	Vertical	435	163	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	2.375"	Vert	59%	235 / 753	988	L	1.25D+1.5L
2 - SPF	2.625"	Vert	49%	204 / 653	857	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	3138 ft-lb	6'11 7/8"	5305 ft-lb	0.591 (59%)	1.25D+1.5L	L
Unbraced	3138 ft-lb	6'11 7/8"	5305 ft-lb	0.591 (59%)	1.25D+1.5L	L
Shear	973 lb	1 5/8"	2350 lb	0.414 (41%)	1.25D+1.5L	L
Perm Defl in.	0.080 (L/2143)	7'2 11/16"	0.479 (L/360)	0.168 (17%)	D	Uniform
LL Defl inch	0.215 (L/803)	7'2 11/16"	0.479 (L/360)	0.448 (45%)	L	
TL Defl inch	0.295 (L/584)	7'2 11/16"	0.718 (L/240)	0.411 (41%)	D+L	L

## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Girders are designed to be supported on the bottom edge only.
- If sheathing is not attached to the top flange, top flange must be laterally braced at maximum 2' o.c.
- Bottom flange must be laterally braced at a maximum of 10' 1 1/16" o.c.



READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 5-2-9	0-9-3	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 14-7-14	0-8-0	Top	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	1-4-13		Far Face	23 lb	62 lb	0 lb	0 lb	F1
4	Point	4-6-13		Far Face	16 lb	43 lb	0 lb	0 lb	F1
5	Tie-In	5-3-11 to 9-11-11	0-9-0	Top	15 PSF	40 PSF	0 PSF	0 PSF	
6	Tie-In	10-0-13 to 14-7-14	0-9-3	Top	15 PSF	40 PSF	0 PSF	0 PSF	

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- Joist not to be treated with fire retardant or corrosive chemicals

## chemicals

## Handling &amp; Installation

- Joist flanges must not be cut or drilled
- Refer to latest copy of the Joist product information details for framing details, stiffener tables, web hole chart, bridging details, multi-ply fastening details and handling/erection details
- Damaged Joists must not be used
- Design assumes top flange to be laterally restrained by attached sheathing or as specified in engineering notes.

- Provide lateral support at bearing points to avoid lateral displacement and rotation
- Web stiffeners for point load as shown Minimum point load bearing length >= 3.5 inches
- For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12787

## Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Page 26 of 44

Project:

Input by: W C




Address:

Job Name: VILLA 1-2 STD

Project #:

ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
Nov 21, 2023

F7 Versa-Lam LVL 2.1E 3100 SP 1.750" X 11.875" - PASSED Level: Ground Floor MHP 23033

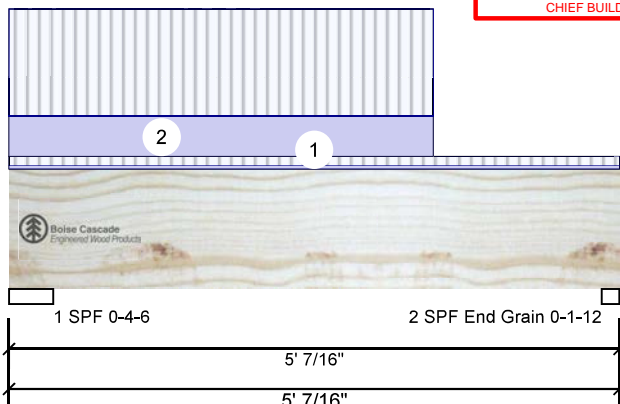PER:   
CHIEF BUILDING OFFICIAL

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	460	189	0	0
2	Vertical	229	100	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	4.375"	Vert	20%	236 / 690	926	L	1.25D+1.5L
2 - SPF	1.750"	Vert	15%	126 / 343	469	L	1.25D+1.5L
End Grain							

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	859 ft-lb	2'5 1/16"	17696 ft-lb	0.049 (5%)	1.25D+1.5L	L
Unbraced	859 ft-lb	2'5 1/16"	17696 ft-lb	0.049 (5%)	1.25D+1.5L	L
Shear	434 lb	3'10 13/16"	6608 lb	0.066 (7%)	1.25D+1.5L	L
Perm Defl in.	0.001 (L/40192)	2'6 11/16"	0.155 (L/360)	0.009 (1%)	D	Uniform
LL Defl inch	0.003 (L/16709)	2'6 9/16"	0.155 (L/360)	0.022 (2%)	L	L
TL Defl inch	0.005 (L/11802)	2'6 5/8"	0.232 (L/240)	0.020 (2%)	D+L	L



## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Top must be continuously laterally braced.
- 4 Bottom must be laterally braced at bearings.

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 5-0-7	0-4-9	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Part. Uniform	0-0-0 to 3-6-0		Top	66 PLF	175 PLF	0 PLF	0 PLF	
	Self Weight				6 PLF				

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:



Job Name: VILLA 1-2 STD

Project #:

REPRODUCTION OF THE CITY OF OSHAWA  
ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 27 2023

F7-A Versa-Lam LVL 2.1E 3100 SP 1.750" X 11.875" - PASSED Level: Ground Floor MHP 23033

PER: *C. M...*  
CHIEF BUILDING OFFICIAL

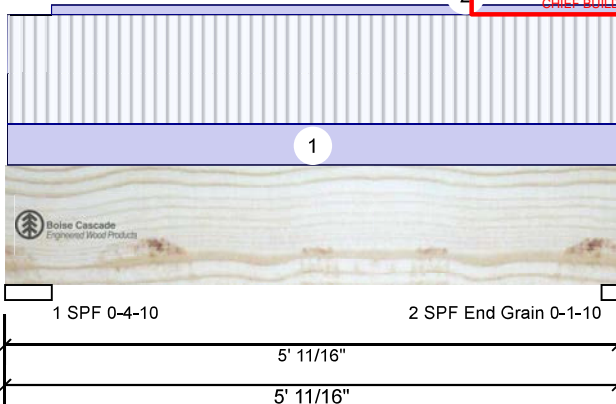

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	30	29	0	0
2	Vertical	27	27	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	4.632"	Vert	2%	36 / 44	81	L	1.25D+1.5L
2 - SPF	1.625"	Vert	2%	33 / 40	74	L	1.25D+1.5L
End Grain							

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	83 ft-lb	2'7 13/16"	17696 ft-lb	0.005 (0%)	1.25D+1.5L	L
Unbraced	83 ft-lb	2'7 13/16"	17696 ft-lb	0.005 (0%)	1.25D+1.5L	L
Shear	47 lb	1'4 1/2"	6608 lb	0.007 (1%)	1.25D+1.5L	L
Perm Defl in. (L/227212)	0.000	2'7 7/8"	0.155 (L/360)	0.002 (0%)	D	Uniform
LL Defl inch (L/225086)	0.000	2'7 7/8"	0.155 (L/360)	0.002 (0%)	L	L
TL Defl inch (L/113072)	0.000	2'7 7/8"	0.233 (L/240)	0.002 (0%)	D+L	L



## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Girders are designed to be supported on the bottom edge only.
- Top must be continuously laterally braced.
- Bottom must be laterally braced at bearings.

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-4 to 5-0-11	0-3-6	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Part. Uniform	0-4-10 to 5-0-11		Top	1 PLF	0 PLF	0 PLF	0 PLF	
	Self Weight				6 PLF				

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:


Job Name: VILLA 1-2 STD

Project #:

ASSOCIATION OF THE CITY OF OSHAWA  
OSHAWA ON  
OF PERMIT PLANS  
Nov 21, 2023

F8 Versa-Lam LVL 2.1E 3100 SP 1.750" X 11.875" - PASSED Level: Ground Floor MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL

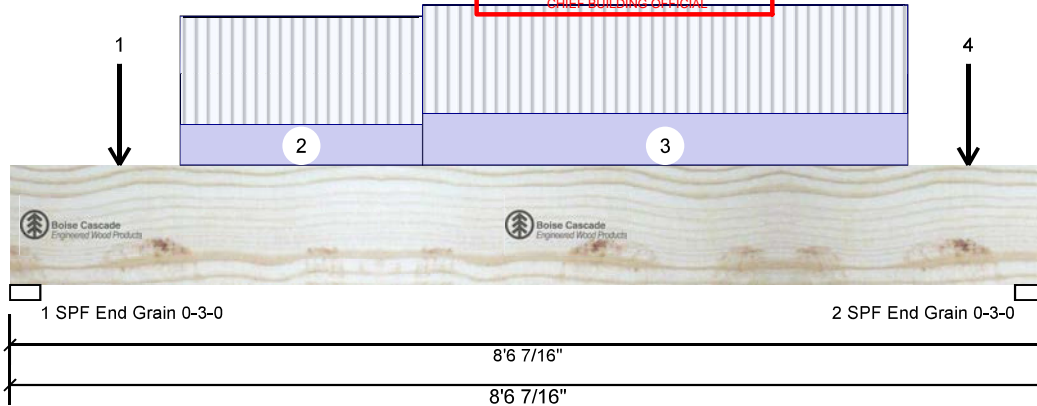

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	363	175	0	0
2	Vertical	380	199	0	0

## Bearings and Factored Reactions


Bearing	Length	Dir.	Cap. React	D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.000"	Vert	14%	219 / 545	764	L	1.25D+1.5L
2 - SPF End Grain	3.000"	Vert	15%	249 / 570	819	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	1700 ft-lb	4'3 11/16"	17696 ft-lb	0.096 (10%)	1.25D+1.5L	L
Unbraced	1700 ft-lb	4'3 11/16"	17696 ft-lb	0.096 (10%)	1.25D+1.5L	L
Shear	796 lb	7'3 9/16"	6608 lb	0.120 (12%)	1.25D+1.5L	L
Perm Defl in. (L/10241)	0.010	4'3 5/8"	0.272 (L/360)	0.035 (4%)	D	Uniform
LL Defl inch	0.019 (L/5144)	4'3 1/4"	0.272 (L/360)	0.070 (7%)	L	L
TL Defl inch	0.029 (L/3424)	4'3 5/16"	0.408 (L/240)	0.070 (7%)	D+L	L

## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Girders are designed to be supported on the bottom edge only.
- Top must be continuously laterally braced.
- Bottom must have sheathing attached or be continuously braced.



READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-10-13		Near Face	32 lb	85 lb	0 lb	0 lb	J2
2	Part. Uniform	1-4-13 to 3-4-13		Near Face	36 PLF	97 PLF	0 PLF	0 PLF	
3	Part. Uniform	3-4-13 to 7-4-13		Near Face	46 PLF	97 PLF	0 PLF	0 PLF	
4	Point	7-10-13		Near Face	36 lb	76 lb	0 lb	0 lb	J2
	Self Weight				6 PLF				

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400







Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:




Job Name: VILLA 1-2 STD

Project #:



F9 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply - PASSED Level: Ground Floor MHP 23033



## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	164	83	0	0
2	Vertical	166	84	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	2.000"	Vert	5%	104 / 247	350	L	1.25D+1.5L
2 - Hanger	2.000"	Vert	5%	104 / 248	353	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	282 ft-lb	1'7 3/4"	35392 ft-lb	0.008 (1%)	1.25D+1.5L	L
Unbraced	282 ft-lb	1'7 3/4"	35392 ft-lb	0.008 (1%)	1.25D+1.5L	L
Shear	245 lb	1'1 7/8"	13217 lb	0.019 (2%)	1.25D+1.5L	L
Perm Defl in. (L/293415)	0.000	1'7 3/4"	0.103 (L/360)	0.001 (0%)	D	Uniform
LL Defl inch (L/144153)	0.000	1'7 3/4"	0.103 (L/360)	0.002 (0%)	L	L
TL Defl inch (L/96663)	0.000	1'7 3/4"	0.154 (L/240)	0.002 (0%)	D+L	L

## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Fill all hanger nailing holes.
- Left Header: DF, Thickness: 3 1/2"
- Right Header: DF, Thickness: 3 1/2"
- Girders are designed to be supported on the bottom edge only.
- Multiple plies must be fastened together as per manufacturer's details.
- Top loads must be supported equally by all plies.
- Top must be continuously laterally braced.
- Bottom must have sheathing attached or be continuously braced.
- Lateral slenderness ratio based on full section width.



READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD




Project #:

ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

F9 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply - PASSED Level: Ground Floor

MHP 23033

PER:   
CHIEF BUILDING OFFICIAL

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Part. Uniform	0-0-0 to 3-3-7		Top	17 PLF	42 PLF	0 PLF	0 PLF	
2	Part. Uniform	0-3-13 to 2-11-13		Far Face	27 PLF	72 PLF	0 PLF	0 PLF	
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

**chemicals****Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

**Manufacturer Info**

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

**Kott Inc.**

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD &amp; WOC



Project #:

ASSOCIATION OF OSHAWA  
ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

PER: *C. M...*  
CHIEF BUILDING OFFICIAL

FH1 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply PASSED Level Ground Floor MHP 23033

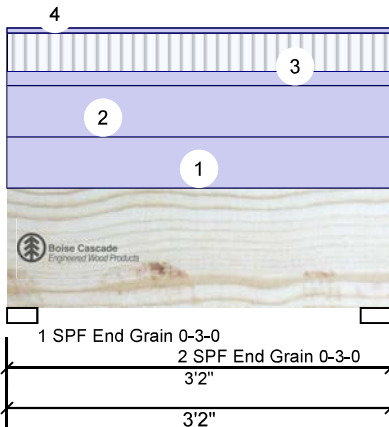

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	48	169	0	0
2	Vertical	48	169	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.000"	Vert	4%	211 / 71	283	L	1.25D+1.5L
2 - SPF End Grain	3.000"	Vert	4%	211 / 71	283	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	174 ft-lb	1'7"	25482 ft-lb	0.007 (1%)	1.25D+1.5L	L
Unbraced	174 ft-lb	1'7"	25482 ft-lb	0.007 (1%)	1.25D+1.5L	L
Shear	189 lb	1'11 1/8"	9516 lb	0.020 (2%)	1.25D+1.5L	L
Perm Defl in.	0.000 (L/197272)	1'7"	0.093 (L/360)	0.002 (0%)	D	Uniform
LL Defl inch	0.000 (L/702510)	1'7"	0.093 (L/360)	0.001 (0%)	L	L
TL Defl inch	0.000 (L/154021)	1'7"	0.140 (L/240)	0.002 (0%)	D+L	L



## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top must be continuously laterally braced.
- 6 Bottom must have sheathing attached or be continuously braced.
- 7 Lateral slenderness ratio based on full section width.

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Part. Uniform	0-0-0 to 3-2-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
2	Part. Uniform	0-0-0 to 3-2-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
3	Tapered Start	0-0-0		Near Face	11 PLF	30 PLF	0 PLF	0 PLF	
	End	3-2-0			11 PLF	30 PLF	0 PLF	0 PLF	

Continued on page 2...

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

## Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD &amp; WOC

Project #:

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023



FH1 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Ply

Level: Ground Floor  
MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL

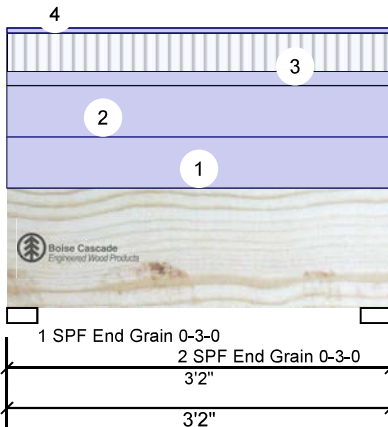

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
4	Part. Uniform	0-0-0 to 3-2-0		Near Face	4 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
	Self Weight				12 PLF				



READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

**Manufacturer Info**

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



Ground Floor

Installation Guide



(Open your phone's camera and  
hover over this QR code to access it)

ENG-M072-11-KT-SEENPARK-ZADORRA ESTATES-VILLA 1-2

1. All blocking to be cut from 12" joists
2. 2' & 4' Lengths to be cut from 8' Length, 6' lengths to be cut from 12' Length
3. Ends of joists to be laterally supported
4. Packing of Steel beams and attachment by others
5. Shower and water closet flange locations are approximate only, consult architectural drawing for exact locations
6. Beams identified as "B" are dropped and supplied by others
7. Install 2x4 blocking @ 24" o/c under parallel non-loadbearing walls
8. Load transfer blocks to be installed under all point loads
9. Refer to Multiple Member Connection Detail for ply to ply nailing or bolting requirements
10. Hangers and Fasteners to be installed as per manufacturer
11. Framing shown on this layout may deviate from architectural drawings, Arch / Eng to review and approve the deviation prior to construction.
12. Multi ply beams with side loading to have all fasteners installed with the head on the side of the applied load
13. Confirmation of adequate support & anchorage of components is the responsibility of the building designer; suggested uplift connectors are as shown
14. Where beam hangs on side of 3-ply member, it is recommended that the equivalent quantity and size of nails required for the hanger attachment also be installed on opposite side of the 3-ply member

Ground Floor  
LVL/LVL (Flush)

Label	Description	Width	Depth	Qty	Piles	Pcs	Length
F14	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	2	2	4	16-0
F13	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	1	2	2	12-0
F12	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	1	2	2	10-0
F8	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	1	2	1	10-0
F11	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	1	2	2	8-0
F10	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	2	2	4	6-0
F7	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	2	2	2	6-0
FH1	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	3	2	6	4-0
F9	Versa-Lam LVL 2.1E 3100 SP	1.75	11.875	1	2	2	4-0

Joist (Flush)

Label	Description	Width	Depth	Pcs	Length
F6	AJS 140	2.5	11.875	3	16-0
F5	AJS 140	2.5	11.875	1	14-0
F4	AJS 140	2.5	11.875	1	12-0
F3	AJS 140	2.5	11.875	1	6-0
F2	AJS 140	2.5	11.875	1	4-0
F1	AJS 140	2.5	11.875	2	2-0
J6	AJS 140	2.5	11.875	13	16-0
J5	AJS 140	2.5	11.875	17	14-0
J4	AJS 140	2.5	11.875	5	12-0
J3	AJS 140	2.5	11.875	4	8-0
J2	AJS 140	2.5	11.875	11	6-0
J1	AJS 140	2.5	11.875	2	4-0

Rim Board

Label	Description	Width	Depth	Pcs	Length
R1	Norbord Rimboard Plus 1.125 X 11.875	1.125	11.875	11	12-0

Blocking

Label	Description	Width	Depth	Qty	Pcs	Length
BLK1	AJS 140	2.5	11.875	LtrF	Varies	35-0

Hanger

Label	Pcs	Description	Beam/Girder	Supported Members
H1	26	LF3511	12 100x1 1/2	1 88x1 1/4WS
H2	4	LF3511	12 100	2 88x1 1/4WS
H3	2	HUG410 (Min)	14 180	6 100

JOB INFORMATION

<b>Builder</b> GREENPARK
<b>Project</b> ZADORRA ESTATES OSHAWA, ON
<b>Sales Rep</b> RALPH MIRIGELLO
<b>Designer</b> W.C.
<b>Plotted</b> July 14, 2023
<b>Layout Name</b> VILLA 1-2 DC
<b>Job Path</b> 8:\CUSTOMERS\GREENPARK\ZADORRA ESTATES WOODSIDE VILLA 1\VILLA 1-2F-VILLA 1-2DC\VILLA 1-2 DC.dwg

DESIGN CRITERIA

<b>Design Method</b>	LSD (Canada)
<b>Bulking Code</b>	NBCC 2015 OBC 2012(2020 Update)

Floor Loads

<b>Live</b>	40
<b>Dead</b>	15

Deflection Joist

<b>LL Span /</b>	360
<b>TL Span /</b>	240

Deflection Flush Girder

<b>LL Span /</b>	360
<b>TL Span /</b>	240

Deflection Dropped Girder

<b>LL Span /</b>	360
<b>TL Span /</b>	240

Deflection Header

<b>LL Span /</b>	360
<b>TL Span /</b>	240

Decking


<b>Decking</b>	OSB
<b>Thickness</b>	3/4"
<b>Fastener</b>	Nailed & Glued

CCMC References

Boise - 12472-R, 12787-R
LP - 12412-R, Roseburg - 13310-R
Forex - 14035-R

Kott Inc.

3228 Woodle Dr. Ottawa
14 Anderson Blvd. Uxbridge
Ontario
613-838-2775 /
905-642-4400

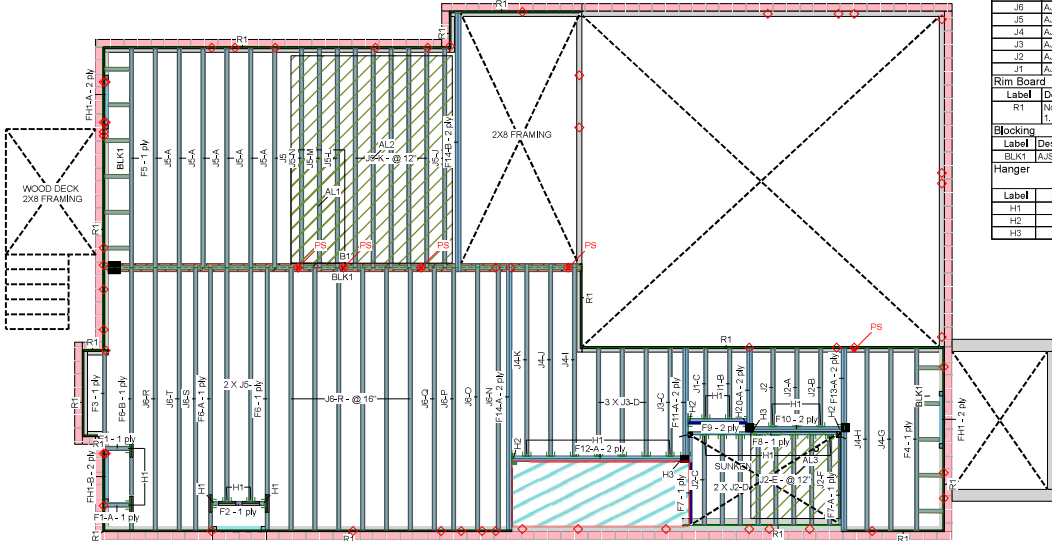

Hatch Area represents where  
additional load has been applied.  
(e.g. 5 psf for ceramic tile)

Legend

PS	Point Load Support
Load from Above	
Wall	
Wall Opening	
Norbord Rimboard Plus 1.125 X 11.875	
AJS 140 11.875	
Versa-Lam LVL 2.1E 3100 SP 1.75 X 11.875	
1.75 X 9.5 (Dropped)	





Client: GREENPARK

Date: 7/14/2023

Page 1 of 6

Project:

Input by: W C



Address:

Job Name: VILLA 1-2 DC

ZADORRA ESTATES OF OSHAWA  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

Project #:

FH1 Versa-Lam LVL 2.1E 3100 SP

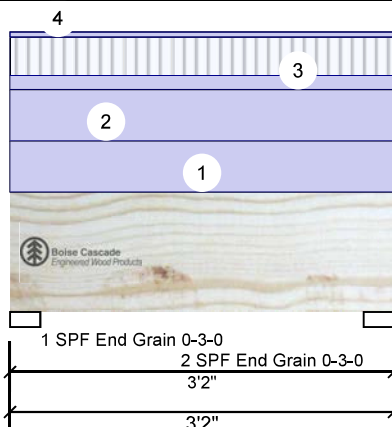1.750" X 11.875" 2-Ply Level Ground Floor  
MHP 23033PER:   
CHIEF BUILDING OFFICIAL

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	48	169	0	0
2	Vertical	48	169	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap. React	D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.000"	Vert	4%	211 / 71	283	L	1.25D+1.5L
2 - SPF End Grain	3.000"	Vert	4%	211 / 71	283	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	174 ft-lb	1'7"	25482 ft-lb	0.007 (1%)	1.25D+1.5L	L
Unbraced	174 ft-lb	1'7"	25482 ft-lb	0.007 (1%)	1.25D+1.5L	L
Shear	189 lb	1'11 1/8"	9516 lb	0.020 (2%)	1.25D+1.5L	L
Perm Defl in. (L/197272)	0.000	1'7"	0.093 (L/360)	0.002 (0%)	D	Uniform
LL Defl inch (L/702510)	0.000	1'7"	0.093 (L/360)	0.001 (0%)	L	L
TL Defl inch (L/154021)	0.000	1'7"	0.140 (L/240)	0.002 (0%)	D+L	L

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top must be continuously laterally braced.
- 6 Bottom must have sheathing attached or be continuously braced.
- 7 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Part. Uniform	0-0-0 to 3-2-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
2	Part. Uniform	0-0-0 to 3-2-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
3	Tapered Start	0-0-0		Near Face	11 PLF	30 PLF	0 PLF	0 PLF	
	End	3-2-0			11 PLF	30 PLF	0 PLF	0 PLF	

Continued on page 2...

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

## Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Page 2 of 6

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 DC

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023

Project #:



FH1 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Ply

PASSED MHP 23033

Level: Ground Floor

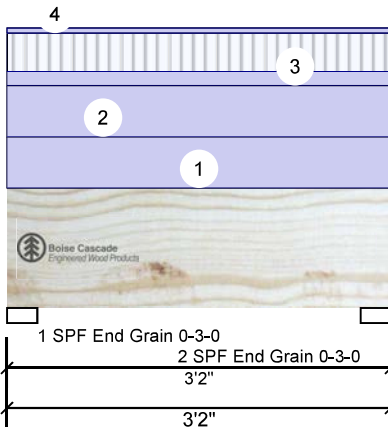

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
4	Part. Uniform	0-0-0 to 3-2-0		Near Face	4 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Page 3 of 6

Project:

Input by: W C

Address:

ZADORRA ESTATES OF OSHAWA  
OSHAWA ON  
OF PERMIT PLANS

Job Name:

VILLA 1-2 DC



Project #:

FH1-A Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply

Level: Ground Floor  
MHP 23033

PER: *C. M...*  
CHIEF BUILDING OFFICIAL

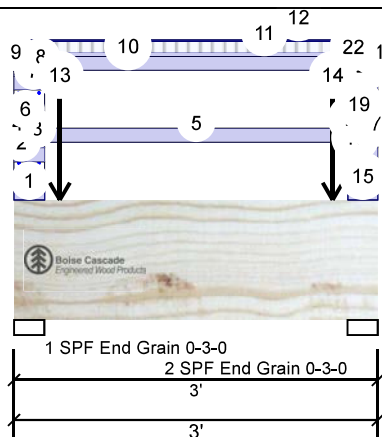

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	76	410	239	0
2	Vertical	75	410	239	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.000"	Vert	9%	512 / 434	946	L	1.25D+1.5S +L
2 - SPF End Grain	3.000"	Vert	9%	512 / 434	946	L	1.25D+1.5S +L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	213 ft-lb	1'5 15/16"	23005 ft-lb	0.009 (1%)	1.25D+1.5L	L
Unbraced	213 ft-lb	1'5 15/16"	23005 ft-lb	0.009 (1%)	1.25D+1.5L	L
Shear	222 lb	1'9 1/8"	8591 lb	0.026 (3%)	1.25D+1.5L	L
Perm Defl in. (L/154042)	0.000	1'6"	0.088 (L/360)	0.002 (0%)	D	Uniform
LL Defl inch (L/359168)	0.000	1'6"	0.088 (L/360)	0.001 (0%)	S+0.5L	L
TL Defl inch (L/107806)	0.000	1'6"	0.131 (L/240)	0.002 (0%)	D+S+0.5L	L

## Design Notes

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 3.
- 2 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 3.
- 3 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Multiple plies must be fastened together as per manufacturer's details.
- 6 Top loads must be supported equally by all plies.
- 7 Top must be continuously laterally braced.
- 8 Bottom must have sheathing attached or be continuously braced.
- 9 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

## chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Page 4 of 6

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 DC


ASSOCIATION OF THE CITY OF OSHAWA  
 ZADORRA ESTATES  
 OSHAWA ON  
 OF PERMIT PLANS  
 1.750" X 11.875" 2-Ply - PASSED  
 Nov 21 2023

Project #:


FH1-A Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply - PASSED  
 MHP 23033  
 Level: Ground Floor

PER: *C. Mante*  
 CHIEF BUILDING OFFICIAL

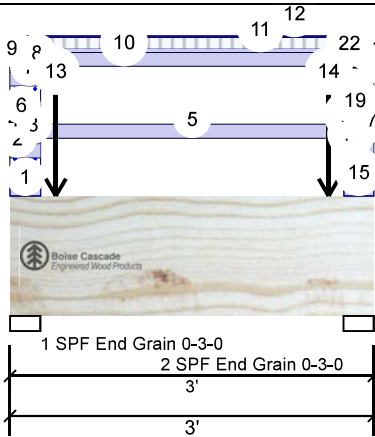

READ ALL NOTES ON THIS PAGE AND ON THE  
 ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
 PAGE IS AN INTEGRAL PART OF THIS DRAWING  
 AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
 USED IN THE DESIGN OF THIS COMPONENT.



ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Part. Uniform	0-0-0 to 0-3-1		Top	30 PLF	0 PLF	80 PLF	0 PLF	
2	Part. Uniform	0-0-0 to 0-3-1		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
3	Tapered Start	0-0-0		Top	4 PLF	10 PLF	0 PLF	0 PLF	
	End	0-3-1			4 PLF	10 PLF	0 PLF	0 PLF	
4	Part. Uniform	0-0-0 to 0-3-1		Top	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
5	Part. Uniform	0-0-0 to 3-0-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
6	Part. Uniform	0-0-0 to 0-3-1		Near Face	30 PLF	0 PLF	80 PLF	0 PLF	
7	Part. Uniform	0-0-0 to 0-3-1		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
8	Tapered Start	0-0-0		Near Face	4 PLF	10 PLF	0 PLF	0 PLF	
	End	0-3-1			4 PLF	10 PLF	0 PLF	0 PLF	
9	Part. Uniform	0-0-0 to 0-3-1		Near Face	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
10	Part. Uniform	0-0-0 to 3-0-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
11	Tapered Start	0-0-0		Near Face	12 PLF	31 PLF	0 PLF	0 PLF	
	End	3-0-0			12 PLF	31 PLF	0 PLF	0 PLF	
12	Part. Uniform	0-0-0 to 3-0-0		Near Face	4 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
13	Point	0-4-9		Top	210 lb	24 lb	199 lb	0 lb	Header Column Header Column
	Bearing Length	0-3-8							
14	Point	2-7-9		Top	210 lb	24 lb	199 lb	0 lb	Header Column Header Column
	Bearing Length	0-3-8							
15	Part. Uniform	2-9-1 to 3-0-0		Near Face	30 PLF	0 PLF	80 PLF	0 PLF	
16	Part. Uniform	2-9-1 to 3-0-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
17	Tapered Start	2-9-1		Near Face	4 PLF	10 PLF	0 PLF	0 PLF	
	End	3-0-0			4 PLF	10 PLF	0 PLF	0 PLF	
18	Part. Uniform	2-9-1 to 3-0-0		Near Face	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
19	Part. Uniform	2-9-1 to 3-0-0		Top	30 PLF	0 PLF	80 PLF	0 PLF	
20	Part. Uniform	2-9-1 to 3-0-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
21	Tapered Start	2-9-1		Top	4 PLF	10 PLF	0 PLF	0 PLF	
	End	3-0-0			4 PLF	10 PLF	0 PLF	0 PLF	
22	Part. Uniform	2-9-1 to 3-0-0		Top	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
	Self Weight				12 PLF				

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
 1111 W. Jefferson St.  
 Boise, ID 83702  
 (800) 232-0788  
 www.bc.com  
 CCMC: 12472

## Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
 613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Page 5 of 6

Project:

Input by: W C

Address:

ASSOCIATION OF TOWNSHIPS OF OSHAWA  
ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

Job Name:



VILLA 1-2 DC

Project #:

FH1-B Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply - PASSED Level: Ground Floor

PER: *C. M...*  
CHIEF BUILDING OFFICIAL

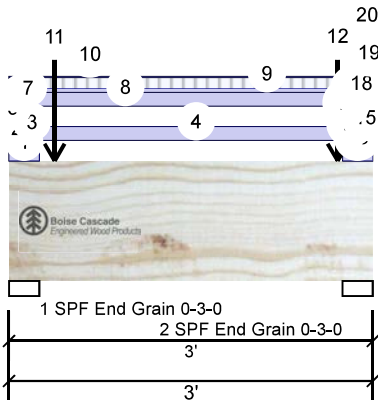

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	84	323	10	0
2	Vertical	86	449	255	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap. React	D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.000"	Vert	7%	403 / 126	529	L	1.25D+1.5L
2 - SPF End Grain	3.000"	Vert	11%	561 / 469	1029	L	1.25D+1.5S +L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	196 ft-lb	1'5 15/16"	23713 ft-lb	0.008 (1%)	1.25D+1.5L	L
Unbraced	196 ft-lb	1'5 15/16"	23713 ft-lb	0.008 (1%)	1.25D+1.5L	L
Shear	209 lb	1'2 7/8"	8855 lb	0.024 (2%)	1.25D+1.5L	L
Perm Defl in. (L/173282)	0.000	1'6"	0.088 (L/360)	0.002 (0%)	D	Uniform
LL Defl inch (L/539229)	0.000	1'6 7/16"	0.088 (L/360)	0.001 (0%)	L+0.5S	L
TL Defl inch (L/131163)	0.000	1'6 1/8"	0.131 (L/240)	0.002 (0%)	D+L+0.5S	L

## Design Notes

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 3.
- 2 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 3.
- 3 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Multiple plies must be fastened together as per manufacturer's details.
- 6 Top loads must be supported equally by all plies.
- 7 Top must be continuously laterally braced.
- 8 Bottom must have sheathing attached or be continuously braced.
- 9 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026





Client: GREENPARK

Date: 7/14/2023

Page 6 of 6

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 DC



ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS

Project #:

FH1-B Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply - PASSED Level Ground Floor  
MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL

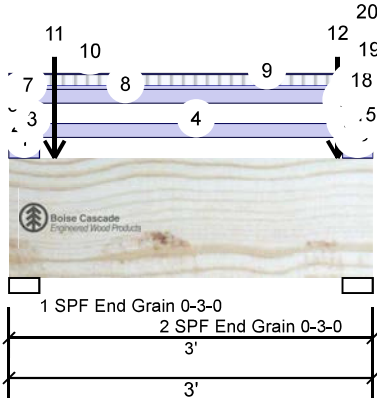

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Part. Uniform	0-0-0 to 0-3-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
2	Tapered Start	0-0-0		Top	5 PLF	13 PLF	0 PLF	0 PLF	
	End	0-3-0			5 PLF	13 PLF	0 PLF	0 PLF	
3	Part. Uniform	0-0-0 to 0-3-0		Top	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
4	Part. Uniform	0-0-0 to 3-0-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
5	Part. Uniform	0-0-0 to 0-3-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
6	Tapered Start	0-0-0		Near Face	5 PLF	13 PLF	0 PLF	0 PLF	
	End	0-3-0			5 PLF	13 PLF	0 PLF	0 PLF	
7	Part. Uniform	0-0-0 to 0-3-0		Near Face	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
8	Part. Uniform	0-0-0 to 3-0-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
9	Tapered Start	0-0-0		Near Face	12 PLF	31 PLF	0 PLF	0 PLF	
	End	3-0-0			12 PLF	31 PLF	0 PLF	0 PLF	
10	Part. Uniform	0-0-0 to 3-0-0		Near Face	4 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
11	Point	0-4-8		Top	137 lb	32 lb	0 lb	0 lb	Header Column Header Column
	Bearing Length	0-3-8							
12	Point	2-8-8		Top	259 lb	32 lb	252 lb	0 lb	Header Column Header Column Header Column
	Bearing Length	0-3-8							
13	Part. Uniform	2-9-0 to 3-0-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
14	Tapered Start	2-9-0		Top	5 PLF	13 PLF	0 PLF	0 PLF	
	End	3-0-0			5 PLF	13 PLF	0 PLF	0 PLF	
15	Part. Uniform	2-9-0 to 3-0-0		Top	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
16	Part. Uniform	2-9-0 to 3-0-0		Near Face	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
17	Tapered Start	2-9-0		Near Face	5 PLF	13 PLF	0 PLF	0 PLF	
	End	3-0-0			5 PLF	13 PLF	0 PLF	0 PLF	
18	Part. Uniform	2-9-0 to 3-0-0		Near Face	2 PLF	0 PLF	0 PLF	0 PLF	Rim Board Self Weight
19	Part. Uniform	2-11-1 to 3-0-0		Top	30 PLF	0 PLF	80 PLF	0 PLF	
20	Part. Uniform	2-11-1 to 3-0-0		Near Face	30 PLF	0 PLF	80 PLF	0 PLF	
	Self Weight				12 PLF				

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026





Client: GREENPARK

Date: 7/14/2023

Page 33 of 44

Project:

Input by: W C

Address:



Job Name: VILLA 1-2 STD

Project #:

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023

F11 Versa-Lam LVL 2.1E 3100 SP 1.750" X 11.875" 2-Ply LVL PASSED Level Second Floor MHP 23033

PER: *C. Moore*  
CHIEF BUILDING OFFICIAL 5

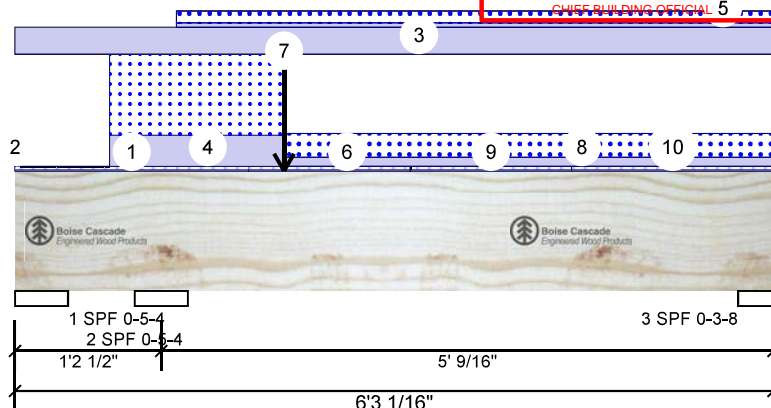

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	0 (-19)	(-461)	0 (-665)	0
2	Vertical	61	1285	1704	0
3	Vertical	22	321	286	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap. React	D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	5.250"	Vert	0%	0 / 0 0	(-1820)		(1.25D+1.5S +L)
2 - SPF	5.250"	Vert	39%	1700 / 2763	4463	LL	1.25D+1.5S +L
3 - SPF	3.500"	Vert	11%	388 / 431	818	_L	1.25D+1.5S +L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Neg Moment	-1623 ft-lb	1'2 1/2"	35392 ft-lb	0.046 (5%)	1.25D+1.5S +L	LL
Unbraced	-1623 ft-lb	1'2 1/2"	34310 ft-lb	0.047 (5%)	1.25D+1.5S +L	LL
Pos Moment	814 ft-lb	3'9 15/16"	35392 ft-lb	0.023 (2%)	1.25D+1.5S +L	_L
Unbraced	814 ft-lb	3'9 15/16"	34205 ft-lb	0.024 (2%)	1.25D+1.5S +L	_L
Shear	2146 lb	1'5 1/8"	13217 lb	0.162 (16%)	1.25D+1.5S +L	LL
Perm Defl in.	0.001 (L/45213)	3'8 3/4"	0.161 (L/360)	0.008 (1%)	D	Uniform
LL Defl inch	0.001 (L/39361)	3'7 3/16"	0.161 (L/360)	0.009 (1%)	S+0.5L	_L
TL Defl inch	0.003 (L/21060)	3'7 15/16"	0.241 (L/240)	0.011 (1%)	D+S+0.5L	_L

## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Girders are designed to be supported on the bottom edge only.
- Multiple plies must be fastened together as per manufacturer's details.
- Top loads must be supported equally by all plies.
- Tie-down connection required at bearing 1 for uplift 1820 lb (Combination 1.25D+1.5S +L, Load Case \_L).**
- Top must be laterally braced at a maximum of 5' 9/16" o.c.
- Bottom must be laterally braced at bearings.
- Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: EWP-FLOORS. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

Project #:

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023

F11 Versa-Lam LVL 2.1E 3100 SP



1.750" X 11.875"

2-Ply

PA SSED Level Second Floor

MHP 23033

PER: *C. M...*  
CHIEF BUILDING OFFICIAL 5

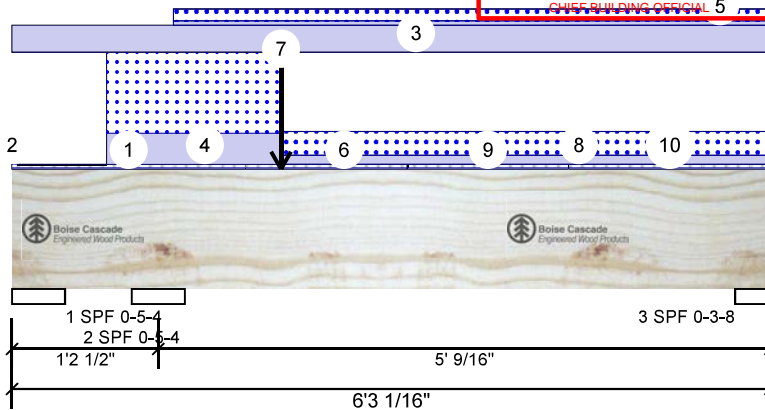

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 1-11-2	0-3-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Part. Uniform	0-0-0 to 0-0-1		Top	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
3	Part. Uniform	0-0-0 to 6-3-1		Top	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
4	Part. Uniform	0-9-6 to 2-2-10		Top	92 PLF	0 PLF	240 PLF	0 PLF	
5	Part. Uniform	1-4-0 to 6-3-1		Top	13 PLF	0 PLF	35 PLF	0 PLF	
6	Tie-In	1-11-2 to 3-3-2	0-3-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	
7	Point	2-2-10		Top	241 lb	0 lb	525 lb	0 lb	F15
	Bearing Length	0-5-8							
8	Part. Uniform	2-2-10 to 6-3-1		Top	27 PLF	0 PLF	70 PLF	0 PLF	
9	Tie-In	3-3-2 to 4-7-2	0-3-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	
10	Tie-In	4-7-2 to 6-3-1	0-3-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

This design is valid until 4/17/2026

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

 ZADORRA ESTATES  
 OSHAWA ON  
 OF PERMIT PLANS  
 NOV 21 2023

Job Name:

VILLA 1-2 STD

Project #:


F12 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Fly

Level Second Floor

MHP 23033

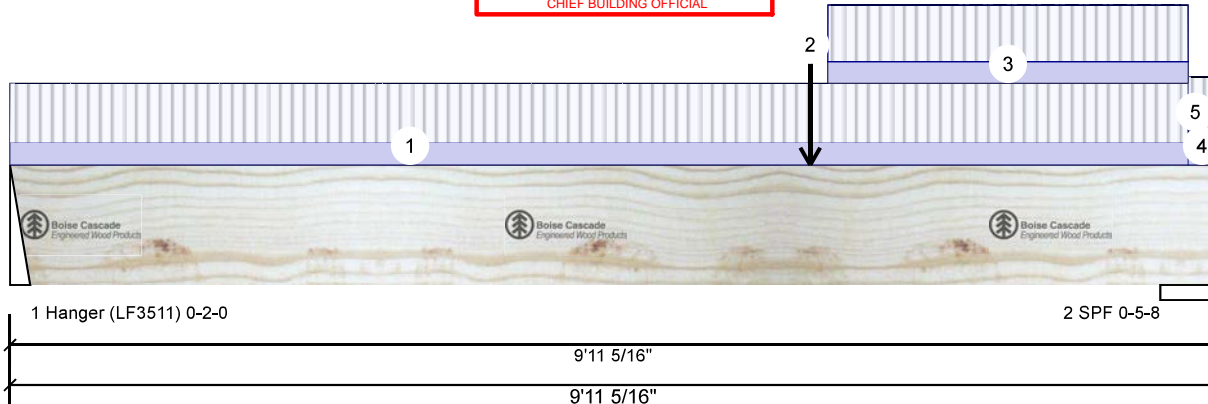 PER:   
 CHIEF BUILDING OFFICIAL


## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	312	200	0	0
2	Vertical	590	339	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	2.000"	Vert	9%	250 / 468	719	L	1.25D+1.5L
2 - SPF	5.500"	Vert	11%	424 / 885	1309	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	3285 ft-lb	6'7 3/16"	35392 ft-lb	0.093 (9%)	1.25D+1.5L	L
Unbraced	3285 ft-lb	6'7 3/16"	35392 ft-lb	0.093 (9%)	1.25D+1.5L	L
Shear	1175 lb	8'5 15/16"	13217 lb	0.089 (9%)	1.25D+1.5L	L
Perm Defl in.	0.012 (L/9815)	5'1 15/16"	0.315 (L/360)	0.037 (4%)	D	Uniform
LL Defl inch	0.020 (L/5745)	5'2 9/16"	0.315 (L/360)	0.063 (6%)	L	L
TL Defl inch	0.031 (L/3624)	5'2 3/8"	0.472 (L/240)	0.066 (7%)	D+L	L

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fill all hanger nailing holes.
- 3 Left Header: DF, Thickness: 3 1/2"
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Multiple plies must be fastened together as per manufacturer's details.
- 6 Top loads must be supported equally by all plies.
- 7 Top must be continuously laterally braced.
- 8 Bottom must be laterally braced at a maximum of 6'7 3/16" o.c.
- 9 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 9-8-9	0-7-7	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	6-7-3		Far Face	303 lb	586 lb	0 lb	0 lb	F16
3	Tie-In	6-8-15 to 9-8-9	0-7-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	
4	Tie-In	9-8-9 to 9-11-5	0-3-1	Top	15 PSF	40 PSF	0 PSF	0 PSF	

Continued on page 2...

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

Project #:

ASSOCIATION OF THE CITY OF OSHAWA  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

F12 Versa-Lam LVL 2.1E 3100 SP



1.750" X 11.875"

2-Fly

Level Second Floor

MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL

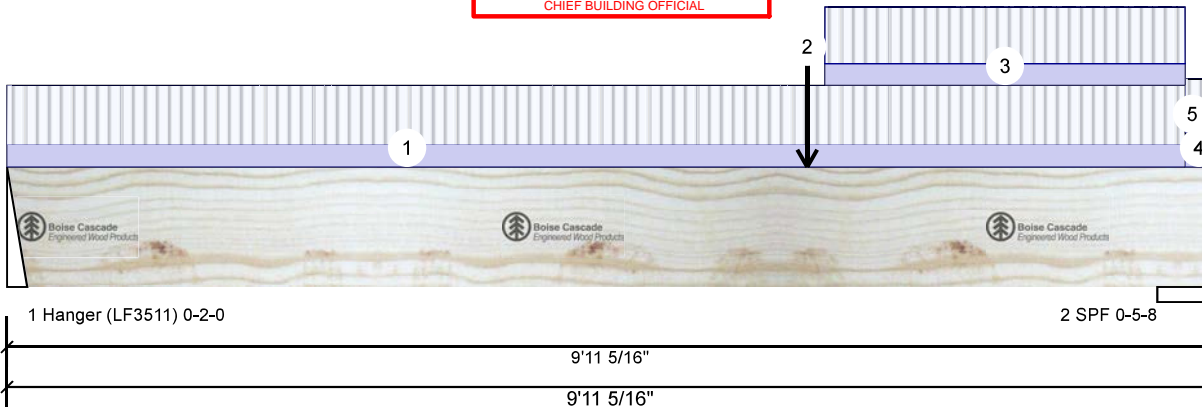

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
5	Tie-In	9-8-9 to 9-11-5	0-4-15	Top	15 PSF	40 PSF	0 PSF	0 PSF	
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

**Manufacturer Info**

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

**Kott Inc.**

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

Project #:

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023PER: *C. Mart*  
CHIEF BUILDING OFFICIAL



F13 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Fly

Level: Second Floor

MHP 23033

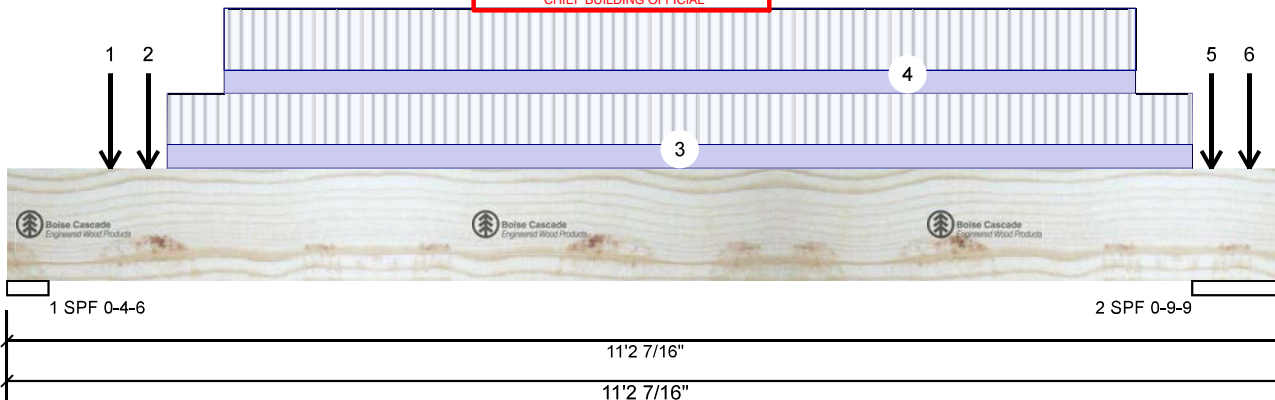

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	2546	1111	0	0
2	Vertical	2921	1274	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	4.375"	Vert	55%	1388 / 3819	5208	L	1.25D+1.5L
2 - SPF	9.563"	Vert	29%	1592 / 4381	5974	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	13748 ft-lb	5'4 9/16"	35392 ft-lb	0.388 (39%)	1.25D+1.5L	L
Unbraced	13748 ft-lb	5'4 9/16"	35392 ft-lb	0.388 (39%)	1.25D+1.5L	L
Shear	5901 lb	1'4 1/4"	13217 lb	0.446 (45%)	1.25D+1.5L	L
Perm Defl in.	0.054 (L/2274)	5'4 9/16"	0.339 (L/360)	0.158 (16%)	D	Uniform
LL Defl inch	0.124 (L/985)	5'4 9/16"	0.339 (L/360)	0.365 (37%)	L	L
TL Defl inch	0.177 (L/687)	5'4 9/16"	0.508 (L/240)	0.349 (35%)	D+L	L

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top must be continuously laterally braced.
- 5 Bottom must have sheathing attached or be continuously braced.
- 6 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-10-14		Far Face	105 lb	232 lb	0 lb	0 lb	J5
2	Point	1-2-14		Near Face	141 lb	375 lb	0 lb	0 lb	J6
3	Part, Uniform	1-4-14 to 10-4-14		Far Face	108 PLF	238 PLF	0 PLF	0 PLF	
4	Part, Uniform	1-10-14 to 9-10-14		Near Face	107 PLF	286 PLF	0 PLF	0 PLF	
5	Point	10-6-14		Near Face	92 lb	244 lb	0 lb	0 lb	J6
6	Point	10-10-14		Far Face	86 lb	186 lb	0 lb	0 lb	J5
	Self Weight				12 PLF				

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

Project #:

ASSOCIATION OF CITY OF OSHAWA  
OSHAWA BN  
OF PERMIT PLANS  
NOV 21 2023



PER: *C. M...*  
CHIEF BUILDING OFFICIAL

F14 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Fly LVL Level Second Floor

MHP 23033

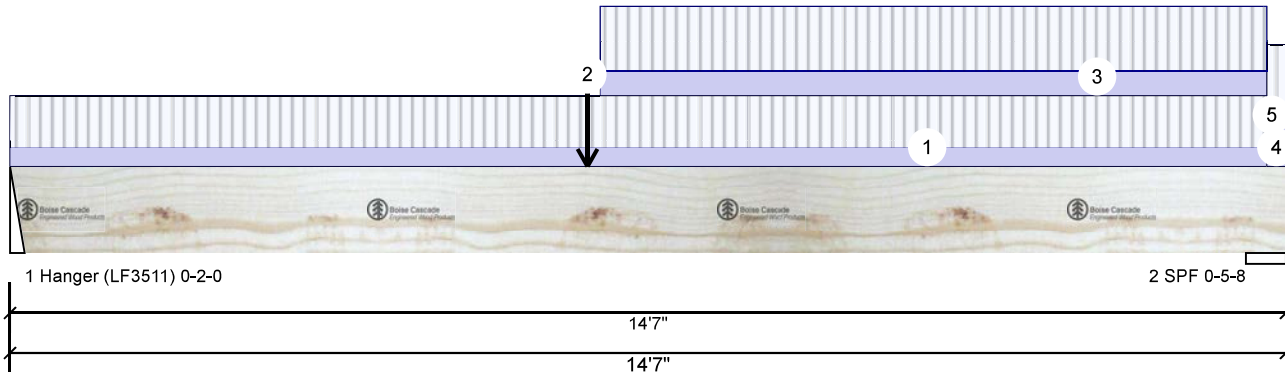

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	531	328	0	0
2	Vertical	555	334	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap. React	D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	2.000"	Vert	16%	411 / 797	1208	L	1.25D+1.5L
2 - SPF	5.500"	Vert	11%	418 / 833	1251	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	6858 ft-lb	6'7 3/16"	35392 ft-lb	0.194 (19%)	1.25D+1.5L	L
Unbraced	6858 ft-lb	6'7 3/16"	35392 ft-lb	0.194 (19%)	1.25D+1.5L	L
Shear	1170 lb	1'1 7/8"	13217 lb	0.089 (9%)	1.25D+1.5L	L
Perm Defl in.	0.053 (L/3188)	7' 1/2"	0.469 (L/360)	0.113 (11%)	D	Uniform
LL Defl inch	0.092 (L/1831)	7' 1/2"	0.469 (L/360)	0.197 (20%)	L	L
TL Defl inch	0.145 (L/1163)	7' 1/2"	0.704 (L/240)	0.206 (21%)	D+L	L

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fill all hanger nailing holes.
- 3 Left Header: DF, Thickness: 3 1/2"
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Multiple plies must be fastened together as per manufacturer's details.
- 6 Top loads must be supported equally by all plies.
- 7 Top must be continuously laterally braced.
- 8 Bottom must be laterally braced at a maximum of 7'11 13/16" o.c.
- 9 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 14-4-6	0-4-10	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	6-7-3		Near Face	349 lb	710 lb	0 lb	0 lb	F16
3	Tie-In	6-8-15 to 14-4-6	0-5-14	Top	15 PSF	40 PSF	0 PSF	0 PSF	
4	Tie-In	14-4-6 to 14-7-0	0-2-2	Top	15 PSF	40 PSF	0 PSF	0 PSF	

Continued on page 2...

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

ASSOCIATION OF THE CITY OF OSHAWA  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

Project #:

F14 Versa-Lam LVL 2.1E 3100 SP


1.750" X 11.875"

2-Fly

Level: Second Floor

MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL

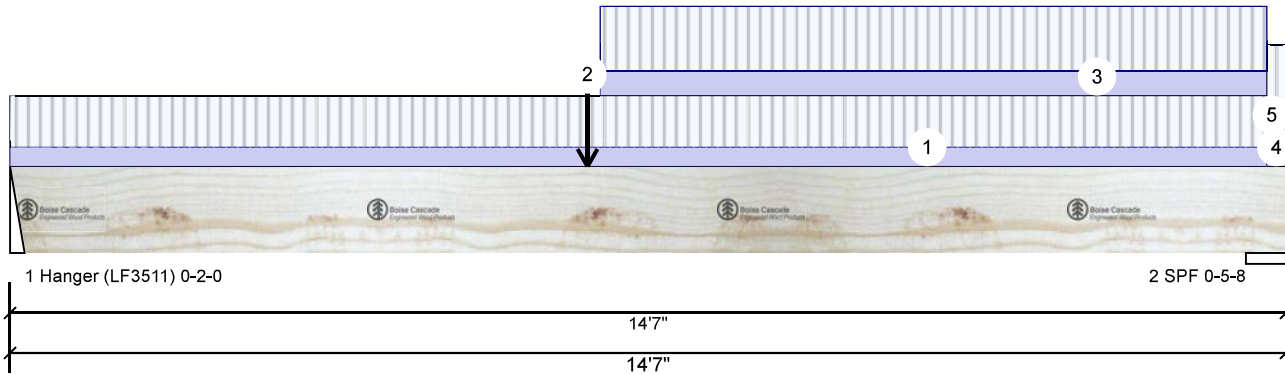

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
5	Tie-In	14-4-6 to 14-7-0	0-5-14	Top	15 PSF	40 PSF	0 PSF	0 PSF	
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

**Manufacturer Info**

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

**Kott Inc.**

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Page 40 of 44

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

ZADORRA ESTATES  
OSHAWA ON  
OF PERMIT PLANS  
NOV 21 2023

Project #:


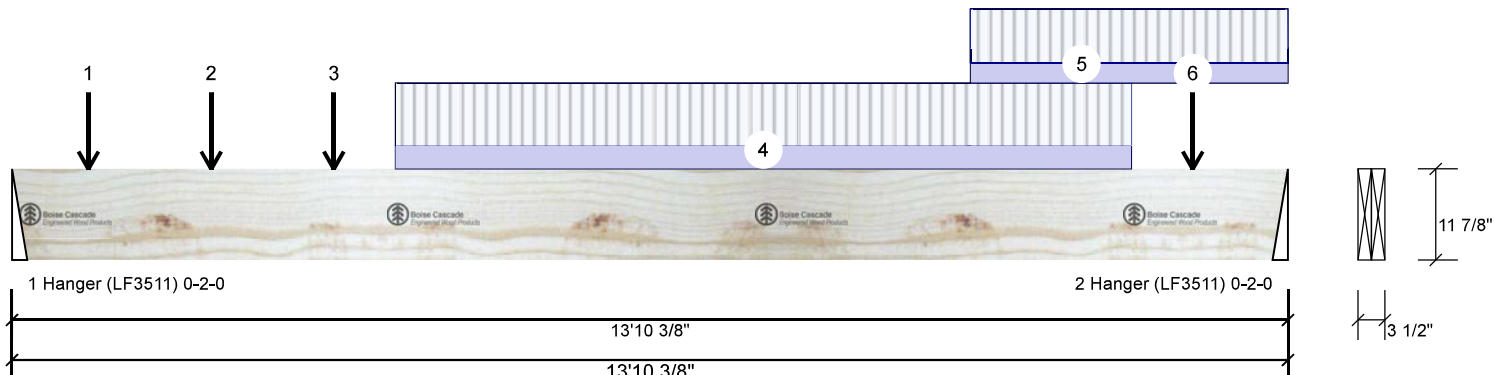
F16 Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Fly

Level Second Floor

MHP 23033

PER:   
CHIEF BUILDING OFFICIAL

## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	710	349	0	0
2	Vertical	586	303	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	2.000"	Vert	20%	437 / 1064	1501	L	1.25D+1.5L
2 - Hanger	2.000"	Vert	16%	379 / 879	1258	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	4070 ft-lb	6'4 7/16"	35392 ft-lb	0.115 (12%)	1.25D+1.5L	L
Unbraced	4070 ft-lb	6'4 7/16"	35392 ft-lb	0.115 (12%)	1.25D+1.5L	L
Shear	1499 lb	1'1 7/8"	13217 lb	0.113 (11%)	1.25D+1.5L	L
Perm Defl in.	0.033 (L/4903)	6'10 1/8"	0.455 (L/360)	0.073 (7%)	D	Uniform
LL Defl inch	0.064 (L/2546)	6'9 11/16"	0.455 (L/360)	0.141 (14%)	L	
TL Defl inch	0.098 (L/1676)	6'9 7/8"	0.683 (L/240)	0.143 (14%)	D+L	L

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fill all hanger nailing holes.
- 3 Left Header: DF, Thickness: 3 1/2"
- 4 Right Header: DF, Thickness: 3 1/2"
- 5 Girders are designed to be supported on the bottom edge only.
- 6 Multiple plies must be fastened together as per manufacturer's details.
- 7 Top loads must be supported equally by all plies.
- 8 Top must be continuously laterally braced.
- 9 Bottom must have sheathing attached or be continuously braced.
- 10 Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-10-0		Far Face	65 lb	174 lb	0 lb	0 lb	J3
2	Point	2-2-0		Far Face	76 lb	201 lb	0 lb	0 lb	J3
3	Point	3-6-0		Far Face	79 lb	211 lb	0 lb	0 lb	J3

Continued on page 2...

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400







Client: GREENPARK

Date: 7/14/2023

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

Project #:

ASSOCIATION OF THE CITY OF OSHAWA  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

F16 Versa-Lam LVL 2.1E 3100 SP


1.750" X 11.875"

2-Fly

Level: Second Floor

MHP 23033

PER: *C. Mart*  
CHIEF BUILDING OFFICIAL

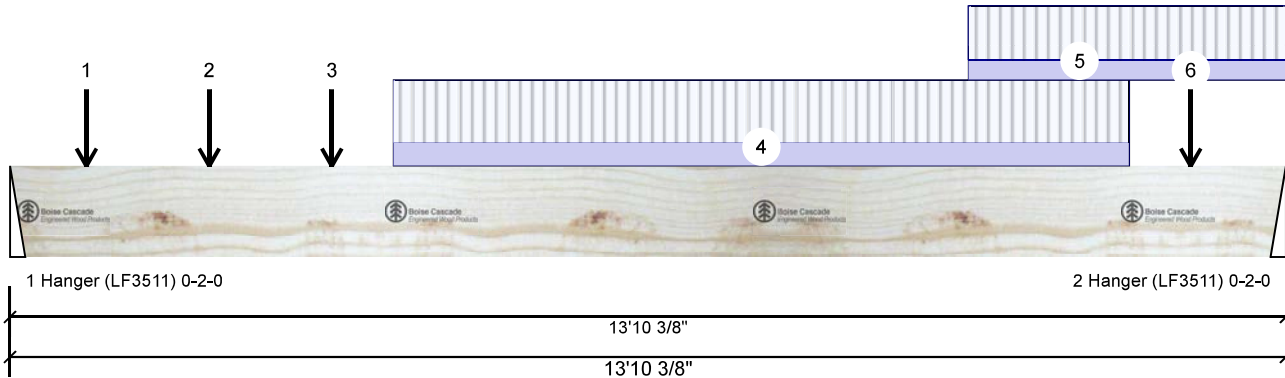

...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
4	Part. Uniform	4-2-0 to 12-2-0		Far Face	22 PLF	58 PLF	0 PLF	0 PLF	
5	Part. Uniform	10-4-15 to 13-10-6		Top	19 PLF	50 PLF	0 PLF	0 PLF	
6	Point	12-10-0		Far Face	27 lb	73 lb	0 lb	0 lb	J1
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 4/17/2026

**Manufacturer Info**

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

**Kott Inc.**

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400





Client: GREENPARK

Date: 7/14/2023

Page 42 of 44

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

ASSOCIATION OF OSHAWA  
ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023

Project #:

F21 Versa-Lam LVL 2.1E 3100 SP



1.750" X 11.875"

2-Fly

Level Second Floor

MHP 23033

PER: *C. Mante*  
CHIEF BUILDING OFFICIAL



## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	65	33	0	0
2	Vertical	85	39	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	5.250"	Vert	1%	41 / 97	138	L	1.25D+1.5L
2 - SPF	4.125"	Vert	2%	49 / 128	177	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	50 ft-lb	9 1/16"	35392 ft-lb	0.001 (0%)	1.25D+1.5L	L
Unbraced	50 ft-lb	9 1/16"	35392 ft-lb	0.001 (0%)	1.25D+1.5L	L
Shear	172 lb	-(0)	13217 lb	0.013 (1%)	1.25D+1.5L	L
Perm Defl in. (L/2504701)	0.000	9 1/8"	0.022 (L/360)	0.000 (0%)	D	Uniform
LL Defl inch (L/1005584)	0.000	9 1/8"	0.022 (L/360)	0.000 (0%)	L	L
TL Defl inch (L/717517)	0.000	9 1/8"	0.034 (L/240)	0.000 (0%)	D+L	L



JULY 18, 2023

## Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top must be continuously laterally braced.
- 5 Bottom must have sheathing attached or be continuously braced.
- 6 Lateral slenderness ratio based on full section width.

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-9-2		Far Face	56 lb	150 lb	0 lb	0 lb	J4
	Self Weight				12 PLF				

## Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

## Handling &amp; Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

Kott Inc.  
3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Page 43 of 44

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

ASSOCIATION OF OSHAWA  
ZADORRA ESTATES  
OSHAWA ON  
BLUE COPY  
OF PERMIT PLANS  
NOV 21 2023



Project #:

F21-A Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875" 2-Ply

Level: Second Floor  
PASSED MHP 23033

PER: *C. M...*  
CHIEF BUILDING OFFICIAL



## Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2015 OBC 2012(2020 Update)
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

## Unfactored Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind
1	Vertical	94	101	0	0
2	Vertical	86	78	0	0

## Bearings and Factored Reactions

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	5.250"	Vert	2%	126 / 140	266	L	1.25D+1.5L
2 - SPF	4.125"	Vert	3%	98 / 129	227	L	1.25D+1.5L

## Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	56 ft-lb	9 1/16"	35392 ft-lb	0.002 (0%)	1.25D+1.5L	L
Unbraced	56 ft-lb	9 1/16"	35392 ft-lb	0.002 (0%)	1.25D+1.5L	L
Shear	131 lb	-(0)	13217 lb	0.010 (1%)	1.25D+1.5L	L
Perm Defl in.	0.000 (L/1689465)	9 1/16"	0.022 (L/360)	0.000 (0%)	D	Uniform
LL Defl inch	0.000 (L/996456)	9 1/8"	0.022 (L/360)	0.000 (0%)	L	L
TL Defl inch	0.000 (L/627766)	9 1/8"	0.034 (L/240)	0.000 (0%)	D+L	L

## Design Notes

- Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- Girders are designed to be supported on the bottom edge only.
- Multiple plies must be fastened together as per manufacturer's details.
- Top loads must be supported equally by all plies.
- Top must be continuously laterally braced.
- Bottom must have sheathing attached or be continuously braced.
- Lateral slenderness ratio based on full section width.



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
PAGE IS AN INTEGRAL PART OF THIS DRAWING  
AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
USED IN THE DESIGN OF THIS COMPONENT.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 0-5-4	1-7-9	Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Part. Uniform	0-0-0 to 0-0-1		Top	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
3	Part. Uniform	0-0-0 to 0-3-2		Top	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
4	Part. Uniform	0-3-2 to 1-0-13		Top	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight

Continued on page 2...

## Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

## Lumber

- Dry service conditions, unless noted otherwise
- LVL not to be treated with fire retardant or corrosive chemicals

chemicals

## Handling &amp; Installation

- LVL beams must not be cut or drilled
- Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
- Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

## Manufacturer Info

Boise Cascade Wood Products  
1111 W. Jefferson St.  
Boise, ID 83702  
(800) 232-0788  
www.bc.com  
CCMC: 12472

## Kott Inc.

3228 Moodie Dr, Ottawa, Ontario  
613-838-2775 / 905-642-4400



This design is valid until 4/17/2026



Client: GREENPARK

Date: 7/14/2023

Page 44 of 44

Project:

Input by: W C

Address:

Job Name: VILLA 1-2 STD

ASSOCIATION OF THE CITY OF OSHAWA  
 OSHAWA ON  
 OF PERMIT PLANS  
 Nov 21, 2023

Project #:



F21-A Versa-Lam LVL 2.1E 3100 SP

1.750" X 11.875"

2-Ply

Level: Second Floor

PER: *C. Mante*  
 CHIEF BUILDING OFFICIAL



...Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
5	Point	0-9-2		Near Face	56 lb	151 lb	0 lb	0 lb	J4
6	Part. Uniform	1-0-13 to 1-4-0		Top	40 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
	Self Weight				12 PLF				



JULY 18, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
 ENGINEERING NOTES: EWP-FLOORS. THE NOTE  
 PAGE IS AN INTEGRAL PART OF THIS DRAWING  
 AS IT CONTAINS SPECIFICATIONS AND CRITERIA  
 USED IN THE DESIGN OF THIS COMPONENT.

**Notes**

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

**Lumber**

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

**Handling & Installation**

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

**Manufacturer Info**

Boise Cascade Wood Products  
 1111 W. Jefferson St.  
 Boise, ID 83702  
 (800) 232-0788  
 www.bc.com  
 CCMC: 12472

This design is valid until 4/17/2026

Kott Inc.  
 3228 Moodie Dr, Ottawa, Ontario  
 613-838-2775 / 905-642-4400

