

BUILDING PERMIT COVER PAGE **MHP 23026**

Development Services Department Building Permit and Inspection Services

SOIL CONDITIONS

SOIL CONDITIONS SHALL BE VERIFIED BY A PROFESSIONAL ENGINEER COMPETENT IN THE FIELD OF SOIL ENGINEERING, PRIOR TO PLACING ANY FOUNDATION.

THE PERMIT PLANS HAVE BEEN **ANY FUTURE CHANGES WILL REQUIRE A SEPARATE BUILDING PERMIT**

RAIN WATER DOWNSPOUTS ARE TO BE

ACCEPTED AS NOTED PERMIT PLANS **REVIEWED BY** DATE REVIEW **ZONING** PLANNING ARCHITECTURAL CMNOV 22, 2023 STRUCTURAL FIRE CARD PLUMBING MECHANICAL PLANS REVIEW CMNOV 22, 2023

PLUMBING INSTALLATIONS

ALL PLUMBING INSTALLATIONS ARE TO BE DONE BY A PLUMBING CONTRACTOR POSSESSING AN ONTARIO COLLEGE OF TRADES MEMBERSHIP, NO PLUMBING IS TO BE COVERED UNTIL INSPECTED AND APPROVED BY A PLUMBING INSPECTOR, TELEPHONE 905-436-5658 WHEN READY FOR AN INSPECTION AND TESTING.

ALL STANDARDS REFERRED TO IN THESE BUILDING PERMIT DOCUMENTS SHALL BE THE **EDITION** DESIGNATED IN OBC 2012 AS AMENDED.

DISCHARGED AT GRADE AND NOT CONNECTED TO

FUTURE ALTERATIONS

COMPLETED

A SEPARATE BUILDING PERMIT IS REQUIRED FOR ANY PROPOSED INTERIOR PARTITIONS AND/OR ALTERATIONS.

COPY OF THE STAMPED/REVIEWED DRAWINGS MUST REMAIN ON SITE DURING CONSTRUCTION.

NOTE:

IT IS RECOMMENDED THAT CRUSHED CONCRETE OR SLAG AGGREGATE **NOT** TO BE USED FOR BACKFILL UNDER CONCRETE SLABS, AROUND SEWER LATERALS OR WEEPERS.

MHP CERTIFICATION

ALL MARKUPS AND STAMPS APPLIED TO BASE MODEL AND BASE ELEVATION SHALL APPLY AS APPLICABLE TO THE ENTIRE MODEL HOUSE

AS BUILT SURVEY

UPON COMPLETION OF THE FOUNDATION, A SURVEY PREPARED BY AN ONTARIO LAND SURVEYOR INDICATING THE LOCATION OF THE BUILDING TO ALL PROPERTY LINES IS REQUIRED TO BE SUBMITTED TO THE BUILDING **DEPARTMENT**

WEEPING TILES

IMPORTANT NOTE

NEITHER THE ISSUANCE OF A PERMIT NOR THE CARRYING OUT OF INSPECTIONS BY THE CITY RELIEVE THE APPLICANT FROM FULL RESPONSIBILITY FOR COMPLIANCE WITH THE PROVISIONS OF THE BUILDING CODE ACT AND THE ONTARIO BUILDING CODE, BOTH AS AMENDED, AS WELL AS OTHER APPLICABLE STATUES AND REGULATIONS OF THE PROVINCE OF ONTARIO AND ALL RELEVANT BY-LAWS OF THE CITY OF OSHAWA AND THE REGIONAL MUNICIPALITY OF DURHAM.

ALL ELECTRICAL WIRING MUST BE INSPECTED BY THE ELECTRICAL SAFETY AUTHORITY. SEPARATE INSPECTION APPLICATIONS (PERMITS) MUST BE FILED. WE RECOMMEND YOU USE A QUALIFIED ELECTRICAL CONTRACTOR. FOR MORE INFORMATION PLEASE CALL:



1-877-ESA-SAFE OR VISIT WWW.ESASAFE.COM

OBC 9.10.14.5 - CLADDING

CLADDING ON THE EXPOSING BUILDING FACE IS PERMITTED TO BE VINYL WHEN WITHIN 600mm OF PROPERTY LINE, PROVIDED THAT THE VINYL CONFORMS TO OBC DIV. B. 9.27.13, IS INSTALLED OVER SHEATHING PAPER AND12.7mm DRYWALL, HAS A FLAME SPREAD RATING NOT GREATER THAN 25, AND IS NOT MORE THAN 2mm THICK AND THE ENTIRE EXTERIOR WALL HAS A MINIMUM FIRE RESISTANCE RATING OF 3/4 HOURS.

RETURN AIR INLET FROM ANYROOM
PROVISIONS SHALL BE MADE FOR THE RETURN OF AIR FROM ANY ROOM OR
SPACE WITHOUT A RETURN AIR INLET, BY LEAVING GAPS BENEATH DOORS,
USING LOUVERED DOORS, OR INSTALLING RETURN AIR DUCT INLETS.

BEDROOM WINDOWS

(1) EVERY FLOOR LEVEL CONTAINING BEDROOMS IN A SUITE SHALL BE PROVIDED WITH AT LEAST 1 OUTSIDE WINDOW THAT CAN BE OPENED FROM THE INSIDE WITHOUT THE USE OF TOOLS, AND EACH SUCH WINDOW SHALL PROVIDE AN INDIVIDUAL, UNOBSTRUCTED OPEN PORTION HAVING A MINIMUM AREA OF 0.35M2 (3.8 SQ.FT.) WITH NO DIMENSION LESS THAN 380 MM (15 IN).

(2) EXCEPT FOR BASEMENT AREAS. THE WINDOW DESCRIBED IN SENTENCE (1) SHALL HAVE A MAXIMUM SILL HEIGHT OF 1M (3 FT 3 IN) ABOVE THE FLOOR. (3) WHEN SLIDING WINDOWS ARE USED, THE MINIMUM DIMENSION DESCRIBED IN SENTENCE (1) SHALL APPLY TO THE OPENABLE PORTION OF THE WINDOW.

PREFABRICATED WOOD TRUSSES

FABRICATION AND ERECTION DRAWINGS WITH DESIGN DATA, PREPARED AND SEALED BY A PROFESSIONAL ENGINEER, MUST BE AVAILABLE ON SITE FOR REVIEW BY THE BUILDING INSPECTOR

ROOF CEILING INSULATION

ROOF FRAMING OR TRUSS HEEL JOINT MUST PERMIT SUFFICIENT SPACE FOR THE EXTENSION OF THE ROOF-CELLING INSULATION OVER EXTERIOR WALLS MINIMIZE THERMAL BRIDGES. AN UNOBSTRUCTED VENTILATION SPACE MUST BE PROVIDED OVER EXTERIOR WALLS TO ALLOW UNIMPEDED AIR FLOW FORM SOFFIT

LESS THAN 550mm (21 5") BY 900mm (35")

ATTIC HATCHES SHALL NOT BE

OBC 9.26.4.1.

FLASHING REQUIRED AT ALL **ROOF-WALL JUNCTIONS**

INTERIOR FINISH OF EXITS

THE FLAME SPREAD RATING OF WALL OR CEILING FINISH IN AN **EXIT MUST NOT EXCEED 25.**

INTERIOR FINISH (EXCEPT EXITS)

FLAME SPREAD RATING OF INTERIOR FINISH MATERIALS SHALL NOT EXCEED $\underline{150}$ ON WALLS AND $\underline{150}$ ON CEILINGS. COMBUSTIBLE WALL AND CEILING FINISHES SUCH AS WOOD, PLYWOOD, PLASTIC, FABRIC, CARPET, ETC. MUST BE APPROVED BY THE INSPECTOR PRIOR TO THE INSTALLATION.

DIV.B. 9.10.14.1 EXPOSING BUILDING FACE OF HOUSES

UNPROTECTED OPENINGS IN THE EXPOSING BUILDING FACE SHALL NOT BE PERMITTED IF THE LIMITING DISTANCE IS LESS THAN 1.2m (3'11") AND SHALL BE LIMITED IN CONFORMANCE WITH THE REQUIREMENTS FOR UNPROTECTED OPENINGS IN DIV. B ARTICLE 9.10.15.1. WHERE THE LIMITING DISTANCE IS 1.2m (3'11") OR GREATER.

THE EXPOSING BUILDING FACE SHALL HAVE A FIRE RESISTANCE RATING OF NOT LESS THAN 45 MINUTES WHERE THE LIMITING DISTANCE IS LESS THAN

ATTACHED OR BUILT-IN GARAGE

THE SEPARATION BETWEEN THE GARAGE AND DWELLING UNIT SHALL BE CONSTRUCTED AS AN EFFECTIVE BARRIER TO GAS AND EXHAUST FUMES. THE DOOR BETWEEN THE GARAGE AND DWELLING UNIT SHALL BE EXTERIOR TYPE, TIGHT FITTING AND WEATHER-STRIPPED TO PROVIDE AN EFFECTIVE BARRIER AGAINST THE PASSAGE OF GAS AND EXHAUST FUMES AND SHALL BE FITTED WITH AN APPROVED SELF CLOSING DEVICE

2012 OBC DIV. B, 9.8.2.1. to 9.8.4.7. STAIR DIME MAX. RISE, MIN. RISE, MAX. RUN, mm MIN. RUN, mm STAIR HEAD

	mm, ALL STEPS	mm, ALL STEPS	RECTANGULAR TREADS	RECTANGULAR TREADS	WIDTH, mm	mm
PRIVATE STAIRS	200	125	355	255	860	1950
PUBLIC STAIRS	180	125	NO LIMIT	280	900	2050
SERVICE STAIRS	NO LIMIT	125	355	NO LIMIT	900	2050
STAIR TO UNOCCUPIED ATTIC SPACE	NO LIMIT	125	355	NO LIMIT	860	1950
STAIRS TO CRAWL SPACE	NO LIMIT	125	355	NO LIMIT	860	1950
STAIRS THAT SERVE MEZZANINES NOT EXCEEDING 20 m2 WITHIN LIVE/WORK UNITS	NO LIMIT	125	355	NO LIMIT	WIDTH AS PER DIV B 9.8.2.1.(3)	2050
NOTE			ADS SHALL NOT RE			EPTH

STRUCTURAL ALTERATIONS

ALL STRUCTURAL ALTERATIONS MUST BE FIELD REVIEWED BY A PROFESSIONAL ENGINEER IF REQUIRED BY THE BUILDING INSPECTOR

FINISHED SITE GRADING

THE BUILDING SHALL BE LOCATED AND THE BUILDING SITE GRADED SO THAT WATER WILL NOT ACCUMULATE AT OR NEAR THE BUILDING AND WILL NOT ADVERSELY AFFECT ANY ADJACENT PROPERTIES.

> **A CURSORY REVIEW OF THE** STRUCTURAL ELEMENTS HAS **BEEN COMPLETED AND IS RELIANT ON ENGINEER'S CERTIFICATION OF**

RESISTANCE TO FORCED ENTRY 2012 O.B.C. DIV B. 9.7.5.2. & 9.7.5.3. A return air inlet shall be located in any room where at least 1/2 of the floor area is located over an unconditioned space (e.g. room over a garage)

- 1. SWINGING DOORS PROVIDING ACCESS TO DWELLING UNITS SHALL SATISFY THE REQUIREMENTS FOR RESISTANCE TO FORCED ENTRY AS DESCRIBED IN SUBSECTION 9.7.5.2.
- 2. WINDOWS IN DWELLING UNITS THAT ARE LOCATED WITHIN 2M OF ADJACENT GROUND LEVEL SHALL CONFORM TO THE REQUIREMENTS FOR RESISTANCE TO FORCED ENTRY AS DESCRIBED IN CLAUSE 5.3.5.OF AAMA/WDMA/CSA 101/I.S.2/A440.

2012 Code

9.8.8.1.(8)(a)(b) Windows over Stairs, Ramps and Landings

(2) In dwelling units, glazing installed over stairs, ramps and landings that extend to less than 900 mm (2 ft 11 in) above the surface to the treads, ramp or landing shall be,

- (a) protected by guards, in accordance with this Subsection, or
- (b) non-openable and designed to withstand the specified lateral loads for guards as provided in Article 4.1.5.14.

9.5.2.3. STUD WALL REINFORCEMENT

- (1) IF WOOD WALL STUDS OR SHEET STEEL WALL STUDS ENCLOSE THE MAIN BATHROOM IN A DWELLING UNIT, REINFORCEMENT SHALL BE INSTALLED TO PERMIT THE FUTURE INSTALLATION OF A GRAB BAR ON A WALL ADJACENT TO,
 - (a) A WATER CLOSET IN THE LOCATION REQUIRED BY CLAUSE 3.8.3.8.(1)(d), AND
 - (b) A SHOWER OR BATHTUB IN THE LOCATION BY CLAUSE 3.8.3.13.(1)(f).

(SEE APPENDIX A.)

The Corporation of the City of Oshawa, 50 Centre Street South, Oshawa, Ontario L1H 3Z7 Phone 905.436.5658 1.800.667.4292 Fax 905.436.5623

STRIP FOOTINGS FOR SINGLES AND SEMIS UP TO MIPPE 23026

120 KPa NATIVE SOIL

20"x6" CONCRETE STRIP FOOTINGS BELOW FOUNDATION VALLS. 24"x8" CONCRETE STRIP FOOTINGS BELOW PARTY WALLS



CRETE STRIP FOOTINGS WITH REINFORCING BELOW FOUNDATION WALLS. STRIP FOOTINGS WITH REINFORCING BELOW PARTY WALLS.

100 KPa NATIVE SOIL

22"x8" CONCRETE STRIP FOOTINGS BELOW FOUNDATION WALLS. 28"x10" CONCRETE STRIP FOOTINGS BELOW PARTY WALLS

28'x8" CONCRETE STRIP FOOTINGS WITH REINFORCING BELOW PARTY WALLS

GENERAL NOTE

ASSUMED 120/100 KPa NATIVE SOIL BEARING CAPACITY OR 90 KPa FOR ENGINEERED FILL, TO BE VERIFIED ON SITE. REFER TO ENGINEERED FILL FOOTING DETAIL FOR REINFORCEMENT.

(REFER TO ENG. FILL FOOTING DETAIL)

AREA CALCULATIONS EL-1

FIRST FLOOR AREA SECOND FLOOR AREA	=	1094 Sq. F 1317 Sq. F
TOTAL FLOOR AREA	=	2411 Sq. F
ADD OPEN AREAS ADD FIN. BASEMENT AREA	=	0 Sq. f 0 Sq. f
GROSS FLOOR AREA	=	2411 Sq. F
GROUND FLOOR COVERAGE GARAGE COVERAGE / AREA PORCH COVERAGE / AREA	= = =	1094 Sq. F 241 Sq. F 47 Sq. F

COVERAGE W/ PORCH

COVERAGE W/O PORCH

= 1382 Sq. Ft.

 $= 128.39 \, \text{Sq. m}.$

= 1335 Sq. Ft.

= 124.03 Sq. m.

RIVER 9 ELEV.-1

LEVATION

RONT

FET SIDE

IGHT SIDE

FAR

TOTAL

ELEVATION

FRONT

LEFT SIDE

RIGHT SIDE

REAR

TOTAL

ELEVATION

EFT SIDE

IGHT SIDE

FΔR

TOTAL

RIVER 9 ELEV.-3

RIVER 9 ELEV.-2

TOTAL FLOOR AREA = 2414 Sq. Ft ADD OPEN AREAS 0 Sq. Ft ADD FIN. BASEMENT AREA = 0 Sq. Ft = 2414 sa. FtGROSS FLOOR AREA GROUND FLOOR COVERAGE = 1095 Sq. Ft GARAGE COVERAGE / AREA = 241 Sq. Ft PORCH COVERAGE / AREA 62 Sq. Ft. = 1398 Sq. Ft COVERAGE W/ PORCH = 129.88 Sq. m. = 1336 Sq. Ft. COVERAGE W/O PORCH = 124.12 Sq. m.

OPENING FT²

75.12

111.33

0.00

115.94

302.39

OPENING FT²

74.00

111.33

0.00

115.94

301.27

OPENING FT²

91.88

111.33

0.00

115.94

319.15

AREA CALCULATIONS EL-2

= 1095 Sa. Ft

= 1319 Sq. Ft

ENERGY EFFICIENCY- A1 PACKAGE

ENERGY EFFICIENCY- A1 PACKAGE

ENERGY EFFICIENCY- A1 PACKAGE

PERCENTAGE

13.62 %

9.10 %

0.00 %

21.54 %

8.66 %

PERCENTAGE

13.59 %

9.10 %

0.00%

21.54 %

8.65 %

PERCENTAGE

17.00 %

9.10%

0.00 %

21.70 %

9.19 %

IRST FLOOR AREA

WALL FT²

551.64

1224.00

1177.44

538.13

3491.21

WALL FT²

544.33

1224.00

1177.44

538.13

3483.90

WALL FT²

540.46

1224.00

1175.92

534.25

3474.63

SECOND FLOOR AREA

AREA CALCULATIONS EL-3

FIRST FLOOR AREA SECOND FLOOR AREA	=	1095 Sq. Ft. 1315 Sq. Ft.
TOTAL FLOOR AREA	=	2410 Sq. Ft.
ADD OPEN AREAS ADD FIN. BASEMENT AREA	=	0 Sq. Ft. 0 Sq. Ft.
GROSS FLOOR AREA	=	2410 Sq. Ft.
GROUND FLOOR COVERAGE GARAGE COVERAGE / AREA	=	1095 Sq. Ft. 241 Sq. Ft.
DODOU COVEDACE / ADEA	_	EO DA Et

PORCH COVERAGE / AREA COVERAGE W/ PORCH = 1398 Sq. Ft= 129.88 Sq. m. COVERAGE W/O PORCH = 1336 Sq. Ft.

= 124.12 Sq. m.

PAD FOOTING

120 KPa NATIVE SOIL	90 KPa ENGINEERED FILL SOIL	100 KPa NATIVE SOIL		
F1 = 42"x42"x18" CONCRETE PAD	F1 = 48"x48"x20" CONCRETE PAD	F1 = 46"x46"x20" CONCRETE PAD		
F2 = 36"x36"x16" CONCRETE PAD	F2 = 40"x40"x16" CONCRETE PAD	F2 = 38"x38"x16" CONCRETE PAD		
F3 = 30"x30"x12" CONCRETE PAD	F3 = 34"x34"x14" CONCRETE PAD	F3 = 32"x32"x14" CONCRETE PAD		
F4 = 24"x24"x12" CONCRETE PAD	F4 = 28"x28"x12" CONCRETE PAD	F4 = 26"x26"x12" CONCRETE PAD		
F5 = 16"x16"x8" CONCRETE PAD	F5 = 18"x18"x8" CONCRETE PAD	F5 = 17"x17"x8" CONCRETE PAD		
(REFER TO FLOOR PLAN FOR UNUSUAL SIZE PADS NOT ON CHART)				

NOTE:

WHEN VENEER CUT IS GREATER THAN 26" A 10" POURED CONC. FOUNDATION WALL IS REQUIRED

NOTE:

ALL GARAGE SLABS, PORCH SLABS, STAIRS (EXPOSED CONC. FLAT WORK) TO BE 32 MPa WITH 5-8% AIR ENTRAITMENT.

BRICK VENEER LINTELS:

$WL1 = 3 1 \ 2" \times 3 1 \ 2" \times 1 \ 4" (90 \times 90 \times 6) + 2 - 2" \times 8" SPF$	₹.
$WL2 = 4^{\circ} \times 3 \times 1^{\circ} \times 5 \times 16^{\circ} \times 100 \times 90 \times 8) + 2 \times 2^{\circ} \times 8^{\circ} \times 90 \times 100 \times 10$	
WL3 = $5'' \times 3 \times 1^2 \times 5 \times 16'' \times 125 \times 90 \times 8) + 2 - 2'' \times 10'' \text{ SPF}$	₹.
$WL4 = 6" \times 3 \times 2" \times 3 \times (150 \times 90 \times 10) + 2 - 2" \times 12" \text{ SPF}$	₹.
$WL5 = 6$ " x 4" x 3\8" (150x100x10) + 2- 2" x 12" SPR.	

WL6 = 5" x 3 1\2" x 5\16" (125x90x8) + 2- 2" x 12" SPR. $WL7 = 5'' \times 3 \times 1/2'' \times 5/16'' \times 125 \times 90 \times 8) + 3 - 2'' \times 10'' \text{ SPR}.$ $WL8 = 5'' \times 3 \times 2'' \times 5 \times 16'' \times 125 \times 90 \times 8 \times 3 + 3 \times 2'' \times 12'' \text{ SPR}$ WL9 = 6" x 4" x 3\8" (150x100x10) + 3- 2" x 12" SPR.

LVL7A= 4-1 3/4" x 11 7/8" (4-45x300)

LVL8 = 2-1 3/4" x 14" (2-45x356)

LVL9 = 3-1 3/4" x 14" (3-45x356)

WOOD LINTELS:

WB1 = 2-2" x 8" SPRUCE BEAM	WB6 = 3-2" x 12" SPRUCE BEAM
WB2 = 3-2" x 8" SPRUCE BEAM	WB7 = 5-2" x 12" SPRUCE BEAM
WB3 = 2-2" x 10" SPRUCE BEAM	WB10 = 4-2" x 8" SPRUCE BEAM
WB4 = 3-2" x 10" SPRUCE BEAM	WB11 = 4-2" x 10" SPRUCE BEAM
WB5 = 2-2" x 12" SPRUCE BEAM	


STEEL LINTELS:

$L1 = 3 \frac{1}{2} \times 3 \frac{1}{2} \times \frac{1}{4} (90 \times 90 \times 6)$	L4 = 6" x 3 1\2" x 3\8" (150 x 90 x 10)
$L2 = 4$ " x 3 1\2" x 5\16" (100 x 90 x 8)	L5 = 6" x 4" x 3\8" (150 x 100 x 10)
$L3 = 5$ " x 3 1\2" x 5\16" (125 x 90 x 8)	L6 = 7" x 4" x 3\8" (180 x 100 x 10)

LAMINATED VENEER LUMBER (LVL BEAMS)

LVL1A =	1-1 3/4" x 7 1/4" (1-45x184)
LVL1 =	2-1 3/4" x 7 1/4" (2-45x184)
LVL2 =	3-1 3/4" x 7 1/4" (3-45x184)
LVL3 =	4-1 3/4" x 7 1/4" (4-45x184)
LVL4A =	1-1 3/4" x 9 1/2" (1-45x240)
LVL4 =	2-1 3/4" x 9 1/2" (2-45x240)
LVL5 =	3-1 3/4" x 9 1/2" (3-45x240)
LVL5A =	4-1 3/4" x 9 1/2" (4-45x240)
LVL6A=	1-1 3/4" x 11 7/8" (1-45x300)
LVL6 =	2-1 3/4" x 11 7/8" (2-45x300)
LVL7 =	3-1 3/4" x 11 7/8" (3-45x300)


2-2"x6" STUD WALL NAILED TOGETHER AND SPACED @12" O.C. FULL HT C/W SOLID BLOCKING 4'-0" O.C. VERTICAL AND 7/16" EXT. PLYWOOD SHEATHING



MAXIMUM HEIGHT OF WALL FOR THIS DETAIL IS 18'-0" AND MAXIMUM SUPPORTED LENGTH OF TRUSS IS 40'-0"

TWO STOREY HEIGHT WALL DETAIL

2 - 1 1/2" x 5 1/2" TIMBERSTRAND (LSL) 1.5E STUD WALL GLUED AND NAILED TOGETHER AND SPACED MAX. @10"O.C. FULL HT C/W SOLID BLOCKING MAX. 8-0"O.C. VERTICAL AND 7/16" EXT. OSB SHEATHING.



MAXIMUM HEIGHT OF WALL FOR THIS DETAIL IS 20'-2" AND MAXIMUM SUPPORTED LENGTH OF TRUSS IS 40'-0"

TWO STOREY HEIGHT WALL DETAIL

NOTE:

THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ENGINEER APPROVED ROOF TRUSS DRAWINGS BY MANUFACTURER

NOTE:

SPACE CONVENTIONAL FLOOR JOISTS @ 12" O.C. BELOW ALL CERAMIC TILE AREAS. PROVIDE 1 ROW BRIDGING FOR SPANS OF 5'-7', 2 ROWS FOR SPANS GREATER THAN 7'

NOTE:

THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ENGINEER APPROVED FLOOR TRUSS LAYOUT BY MANUFACTURER.

NOTE:

PLANS NOT DRAWN TO ACTUAL GRADE. REFER TO FINAL GRADING PLAN.

Door Schedule

	NO.	WIDTH	8' T	GHT O 9' LINGS	HEIGI 10' OF CEILII	RMORE	TYPE
IS	1	2'-10"	6'-8"	(865x2033)	8'-0"	(865x2439)	INSULATED ENTRANCE DOOR
Ц	1a	2'-8"	6'-8"	(815x2033)	8'-0"	(815x2439)	INSULATED FRONT DOORS
٦	2	2'-8"	6'-8"	(815x2033)	8'-0"	(815x2439)	WOOD & GLASS DOOR
١	3	2'-8"	6'-8 x 1-3/4"	(815x2033x45)	8'-0" x 1-3/4"	(815x2439x45)	EXTERIOR SLAB DOOR
١	4	2'-8"	6'-8" x 1-3/8"	(815×2033×35)	8'-0" x 1-3/8"	(815x2439x35)	INTERIOR SLAB DOOR
╛	5	2'-6"	6'-8" x 1-3/8"	(760x2033x35)	8'-0" x 1-3/8"	(760x2439x35)	INTERIOR SLAB DOOR
١	6	2'-2"	6'-8" x 1-3/8"	(660×2033×35)	8'-0" x 1-3/8"	(660x2439x35)	INTERIOR SLAB DOOR
١	7	1'-6"	6'-8" x 1-3/8"	(460x2033x35)	8'-0" x 1-3/8"	(460x2439x35)	INTERIOR SLAB DOOR
	8	3'-0"	6'-8" x 1-3/8"	(915×2033×35)	8'-0" x 1-3/8"	(915x2439x35)	INTERIOR SLAB DOOR

is the builder's complete responsibility ensure that all plans submitted for appro-fully comply with the Architectural Guidelin and all applicable regulations and requiremen ncluding zoning provisions and any provisi in the subdivision agreement. The Control
in the subdivision agreement. The Control
Architect is not responsible in any way for
examining or approving site (lotting) plans or
working drawings with respect to any zoning or
building code or permit matter or that any
building code or permit matter or that any house can be properly built or located on its

This is to certify that these plans compl with the applicable Architectural Design Guidelines approved by the City of

ONDITIONS ON SITE BEFORE PROCEEDING WITH CONSTRUCTION

2411

LOT 26

RIVER 9 (GR)

A1 PACKAGE

O.REG. 332/12

ELEVATION 1

ARDIN DESIGN GROUP INC. IS NOT RESPONSIBLE FOR THE ACCUPA OF SURVEY, STRUCTURAL OR ENGINEERING INFORMATION SHOWN OF THESE DRAWINGS OR FOR CONSTRUCTION STARTED PRIOR TO THE SSUANCE OF A BUILDING PERMIT. REFER TO THE APPROPRIATE. NGINEERING CRAWINGS BEFORE PROCESDING WITH WORK. AS CONSTRUCTED INVERTS MUST BE VERIFIED PRIOR TO POLIFING

JARDIN DESIGN GROUP INC. HAS NOT BEEN RETAINED TO CARRY OUT GENERAL REVIEW OF THE WORK AND ASSUMES NO RESPONSIBILITY FOR THE FALURE OF THE CONTRACTOR OR SUB-CONTRACTOR TO ARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT

THIS DRAWING IS AN INSTRUMENT OF SERVICE. IS PROVIDED BY AND I THE PROPERTY OF JARDIN DESIGN GROUP INC. THIS DRAY TO BE SCALED.

7		
6		
5		
4	MAY 9, 2023	ISSUED TO CLIENT FOR PERMIT
3	MAY 3, 2023	COORDINATED FLOOR, ROOF ANI ENGINEER COMMENTS
2	MAR. 1, 2023	PREPARED TO PRE-COORDINATION STAGE & ISSUED TO CLIENT
1	FEB. 14, 2023	INTRODUCED FROM JOB 21-35 CUT PLAN & USED 4 BED LAYOUT
No:	DATE:	WORK DESCRIPTION:

64 JARDIN DR. SUITE 3A VAUGHAN ONT, L4K 3P3 TEL: 905 660-3377 FAX: 905 660-3713 EMAIL: info@jardindesign.ca

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a designer

QUALIFICATION INFORMATION

3.2.5 of 1 Walter Botter NAME

REGISTRATION INFORMATION Required unless design is exempt under Division C, Subsection 3.2.4 of the building code

jardin design group inc.

FIRM NAME

TITLE SHEET

ZADORRA ESTATE INC. CITY OF OSHAWA





RIVER 9 SCALE: 3/16"=1'-0"


PROJ. No. WG. No 22-16


27763

DRAWING NAME

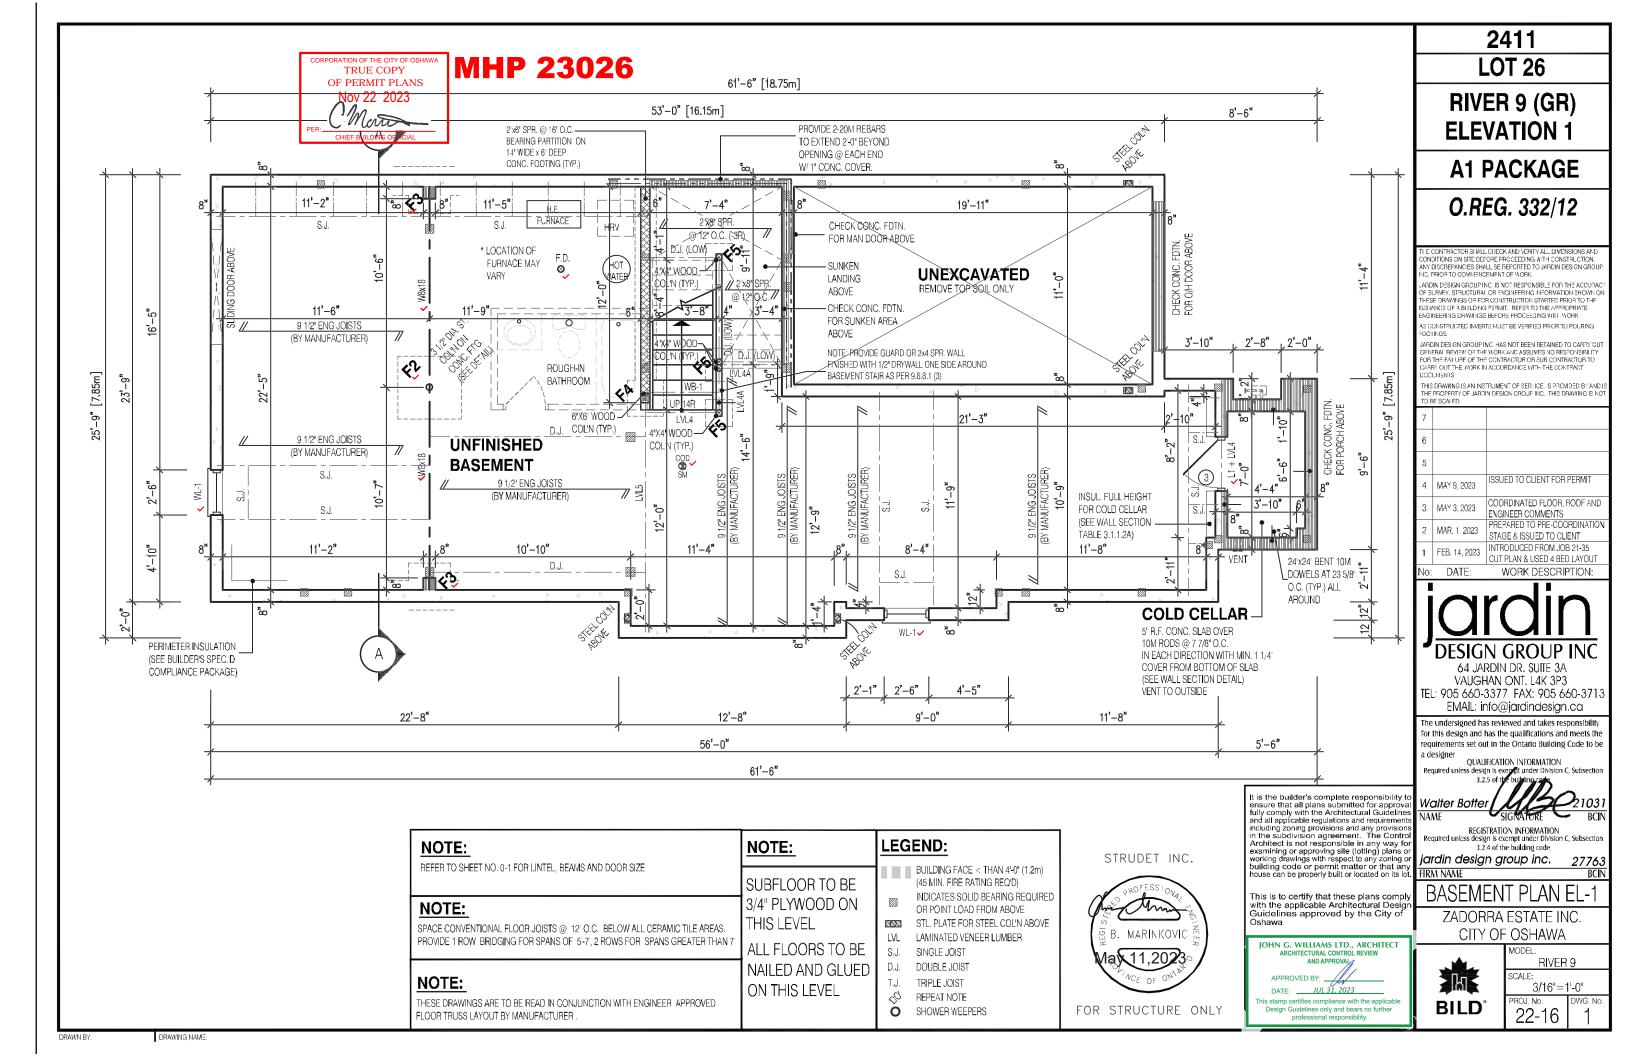


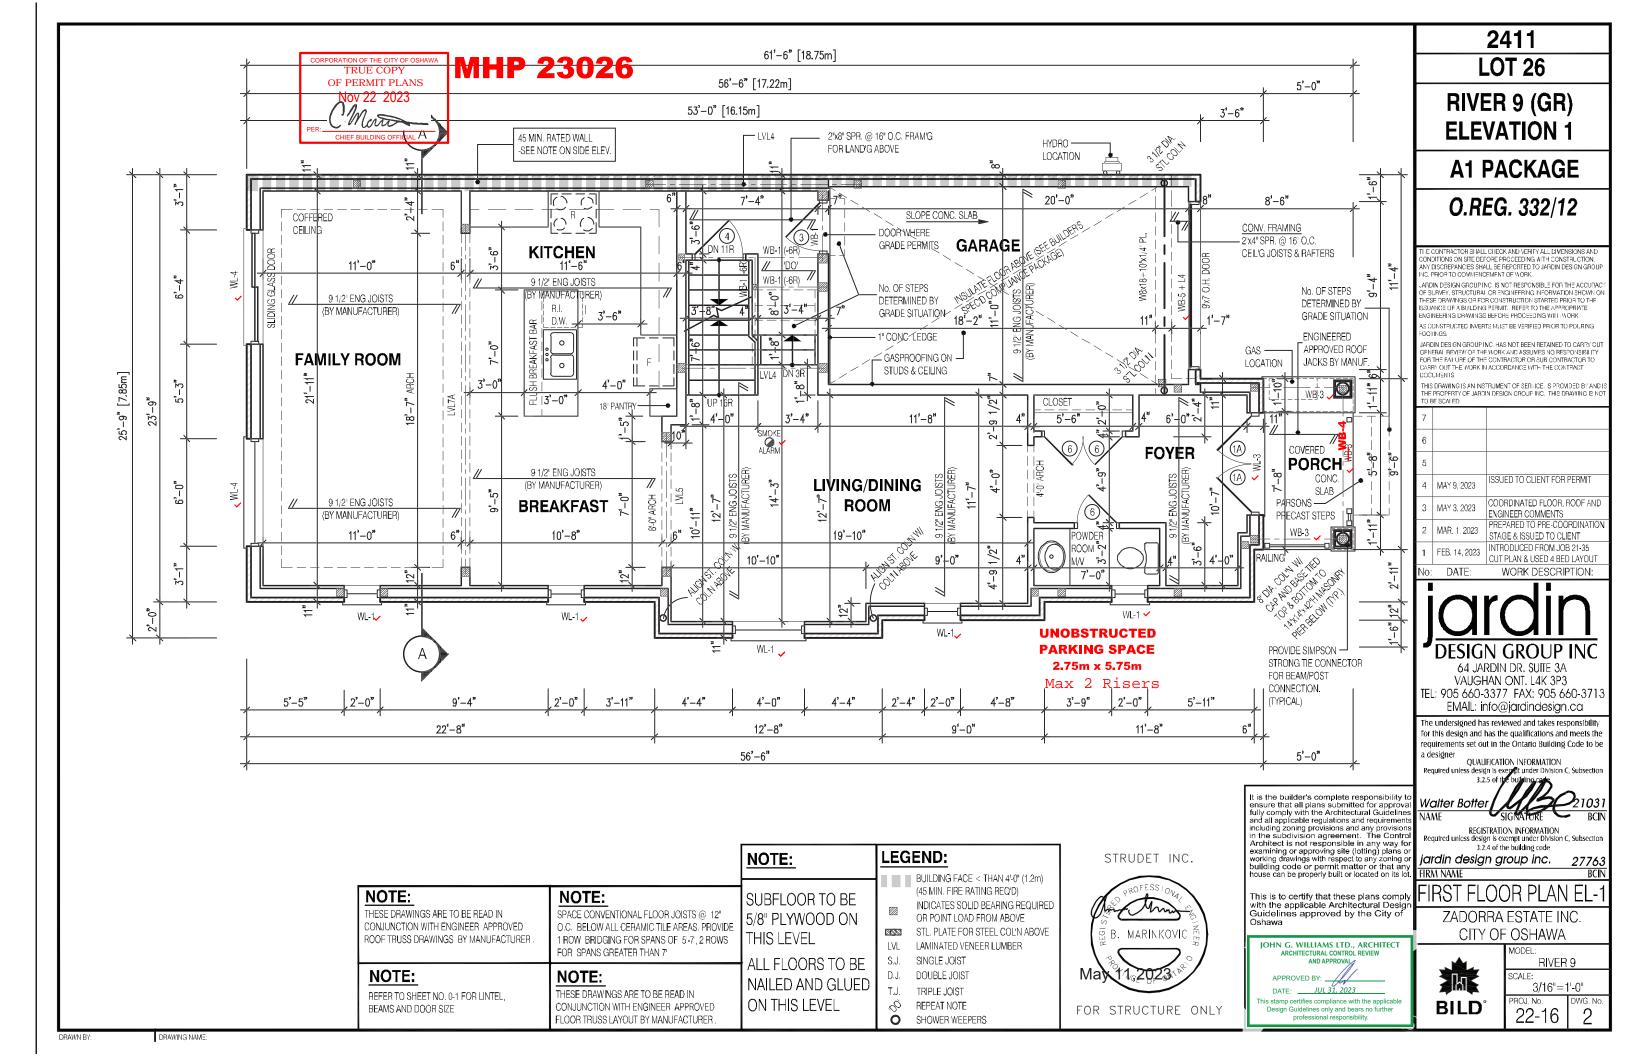

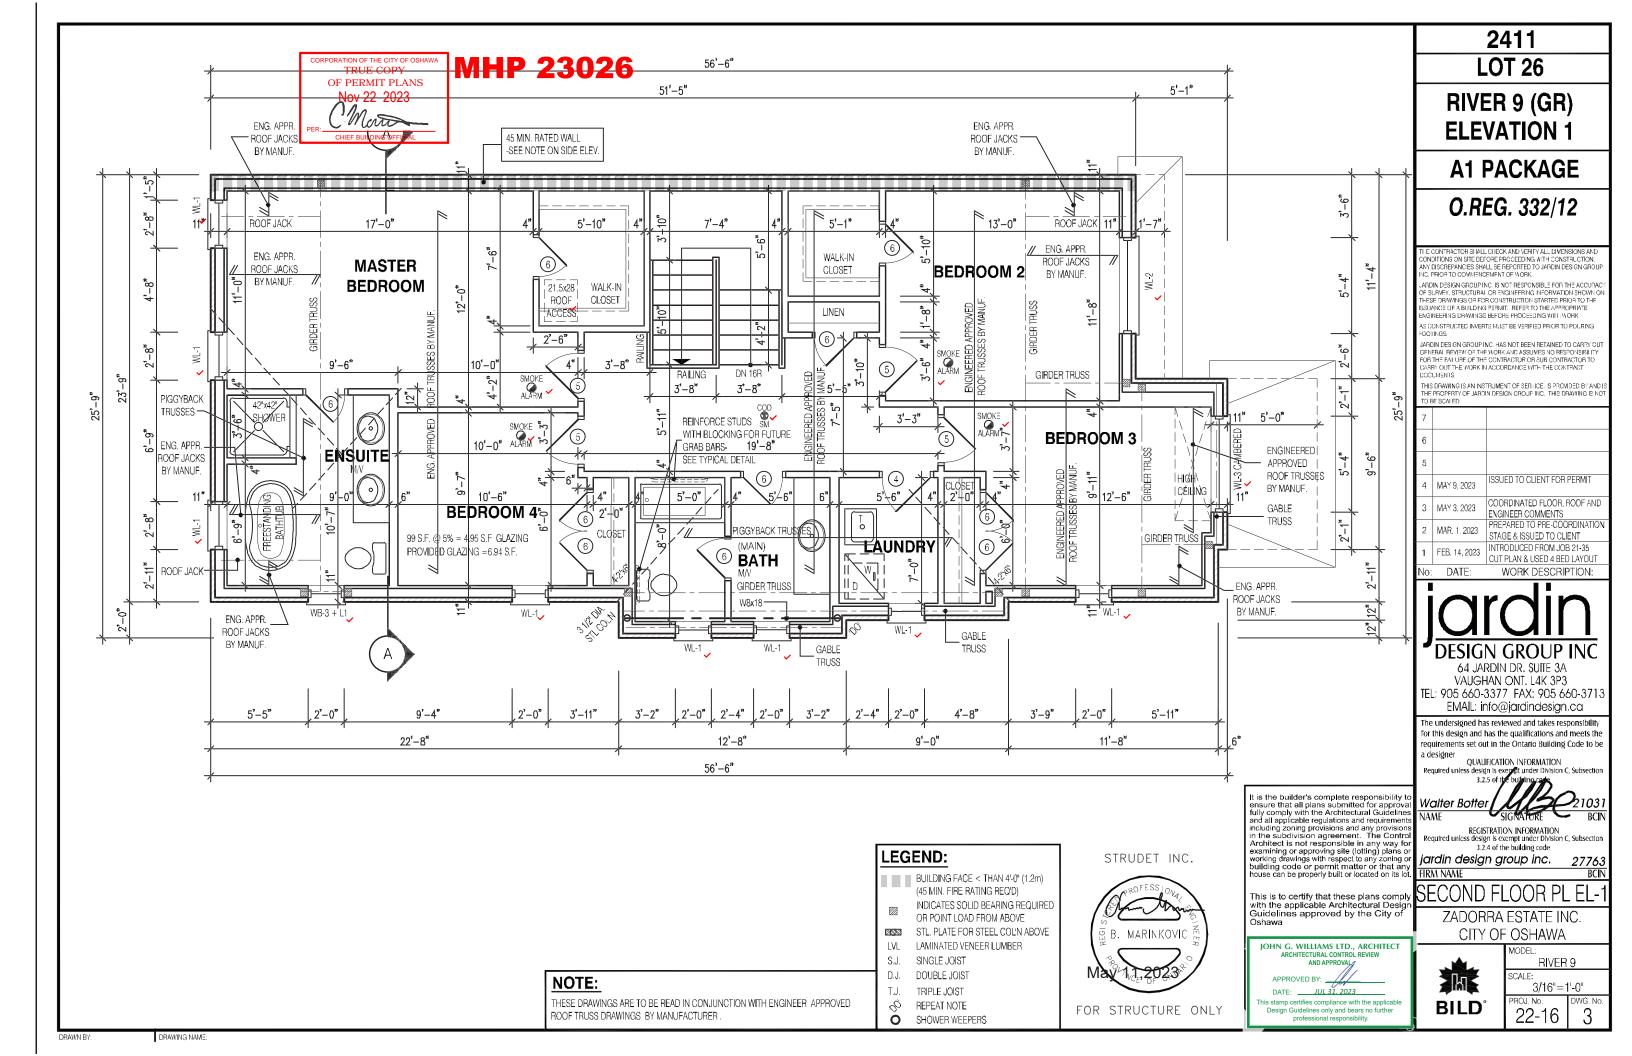

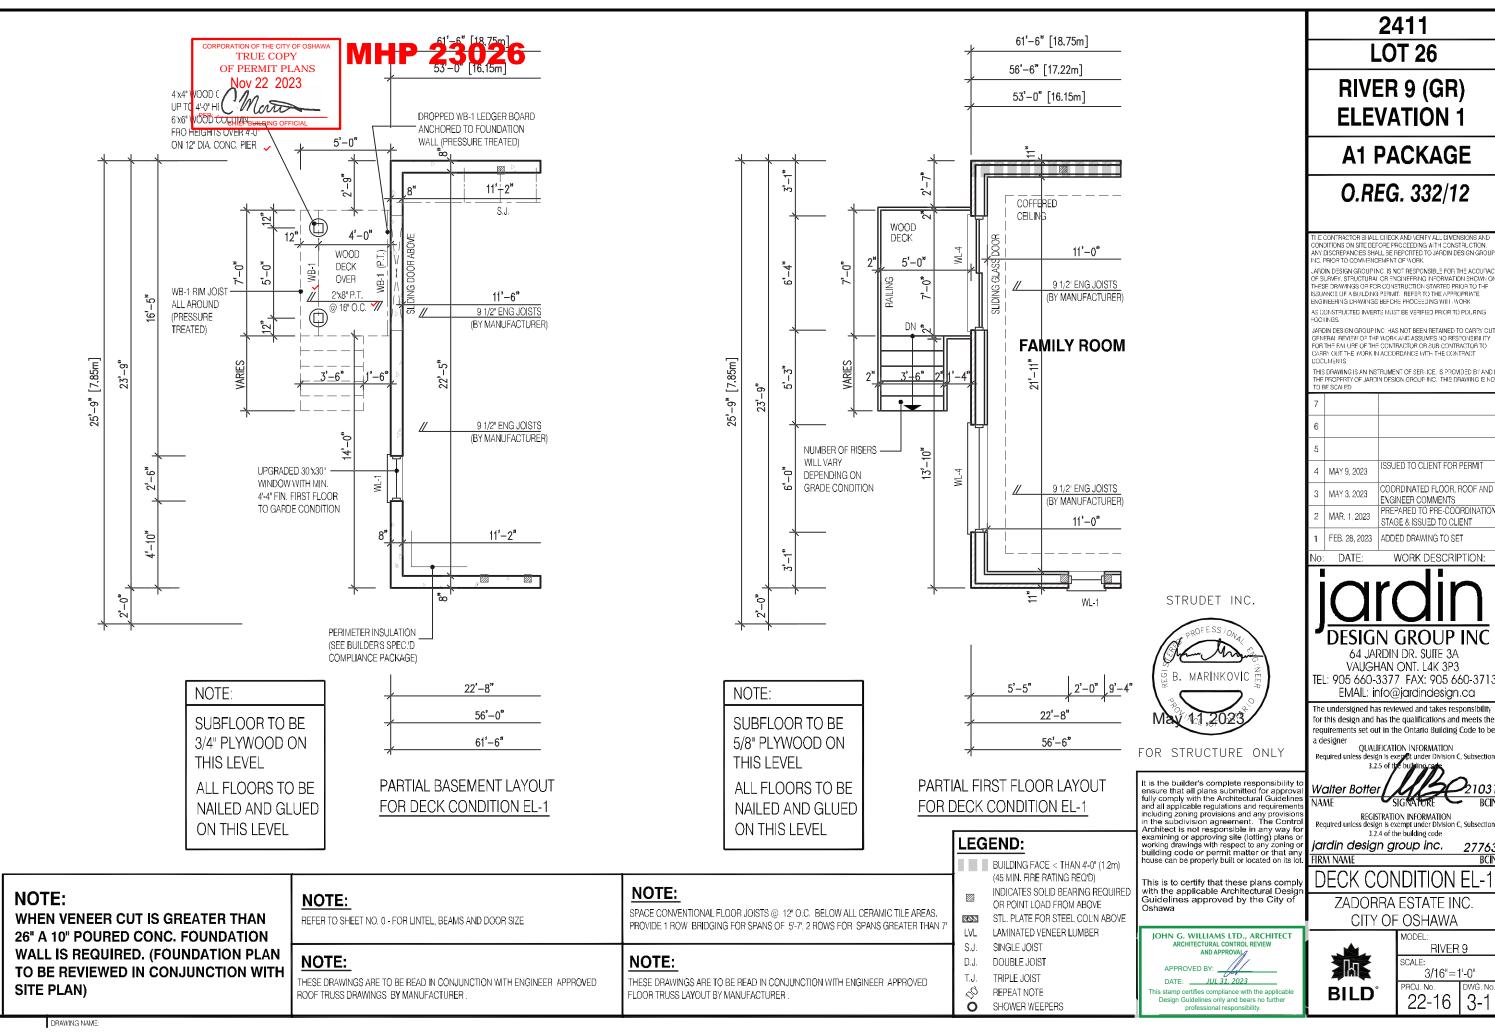

DRAWN BY:

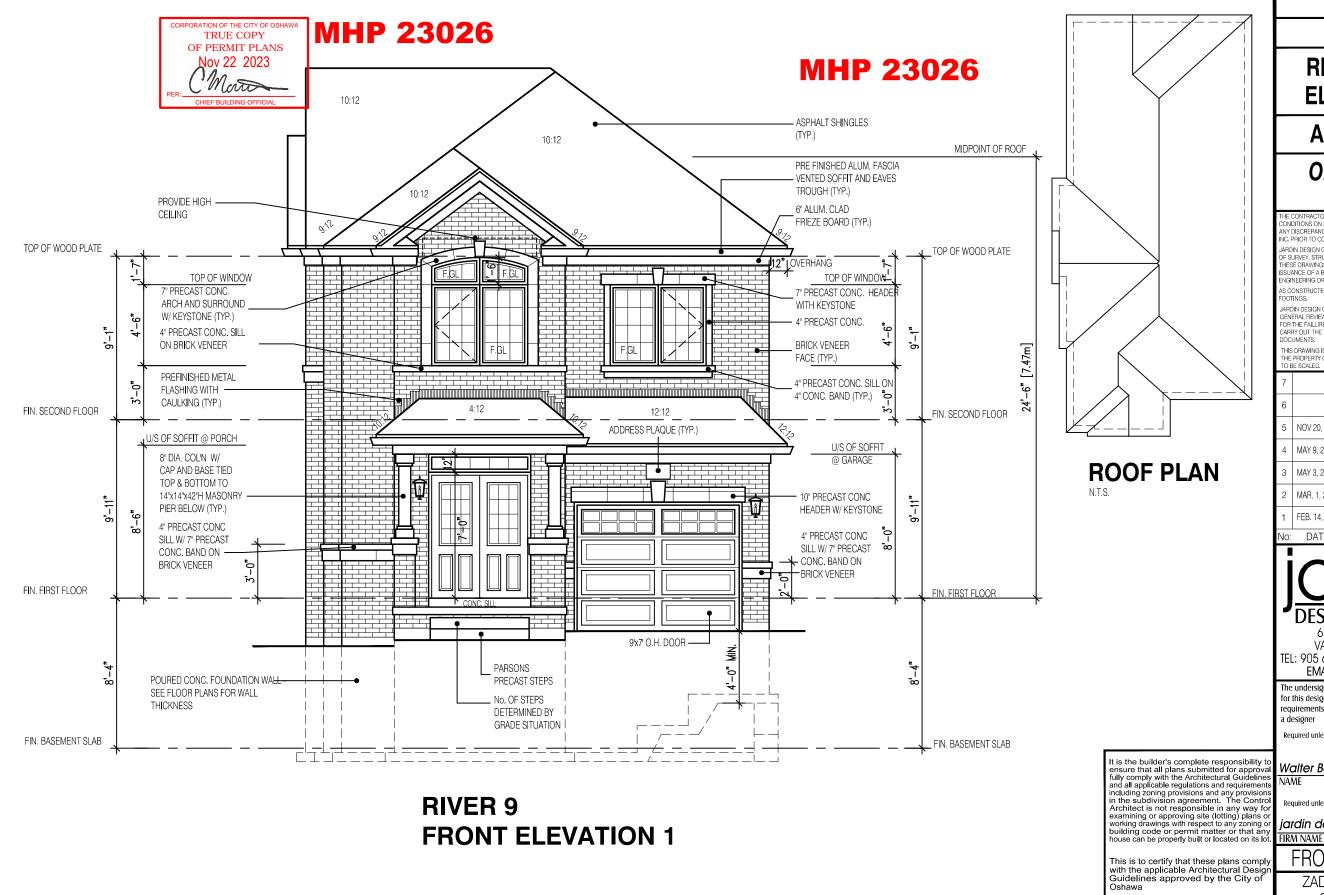

2411 LOT 26

RIVER 9 (GR) **ELEVATION 1**

A1 PACKAGE

O.REG. 332/12

CONDITIONS ON SITE BEFORE PROCEEDING WITH CONSTRUCTION. NY DISCREPANCIES SHALL BE REPORTED TO JARDIN DESIGN GROUI NC. PRIOR TO COMMENCEMENT OF WORK.

JARDIN DESIGN GROUP INC. IS NOT RESPONSIBLE FOR THE ACCURA ARBINI DESIGN ORDUP INC. IS NOT RESPONSIBLE FOR THE ACCURY OF SURVEY, STRUCTURAL OR ENGINEERING INFORMATION SHOWN THESE DRAWINGS OR FOR CONSTRUCTION STARTED PRIOR TO THE SSUANCE OF A BUILDING PERMIT. REFER TO THE APPROPRIATE NGINEERING DRAWINGS BEFORE PROCEEDING WITH WORK.

AS CONSTRUCTED INVERTS MUST BE VERIFIED PRIOR TO POURING

JARDIN DESIGN GROUP INC. HAS NOT BEEN RETAINED TO CARRY OUT GENERAL REVIEW OF THE WORK AND ASSUMES NO RESPONSIBILITY FOR THE FALIURE OF THE CONTRACTOR OR SUB CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT

THIS DRAWING IS AN INSTRUMENT OF SERVICE. IS PROVIDED BY AND IS THE PROPERTY OF JARDIN DESIGN GROUP INC. THIS DRAWING IS N TO BE SCALED.

/		
6		
5	NOV 20, 2023	ADDED BUILDING HEIGHT. REISSUED TO CLIENT FOR PERMIT
4	MAY 9, 2023	ISSUED TO CLIENT FOR PERMIT
3	MAY 3, 2023	COORDINATED FLOOR, ROOF AND ENGINEER COMMENTS
2	MAR. 1, 2023	PREPARED TO PRE-COORDINATION STAGE & ISSUED TO CLIENT
1	FEB. 14, 2023	INTRODUCED FROM JOB 21-35 CUT PLAN & USED 4 BED LAYOUT
	5 4 3	5 NOV 20, 2023 4 MAY 9, 2023 3 MAY 3, 2023 2 MAR. 1, 2023

WORK DESCRIPTION:



64 JARDIN DR. SUITE 3A VAUGHAN ONT, L4K 3P3 TEL: 905 660-3377 FAX: 905 660-3713 EMAIL: info@jardindesian.ca

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a designer

QUALIFICATION INFORMATION Required unless design is exempt under Division C, Subsectio

Walter Botter

REGISTRATION INFORMATION Required unless design is exempt under Division C, Subsection 3.2.4 of the building code

jardin design group inc.


FRONT ELEVATION 1


ZADORRA ESTATE INC. CITY OF OSHAWA



RIVER 9

3/16"=1'-0" ROJ. No. 22-16

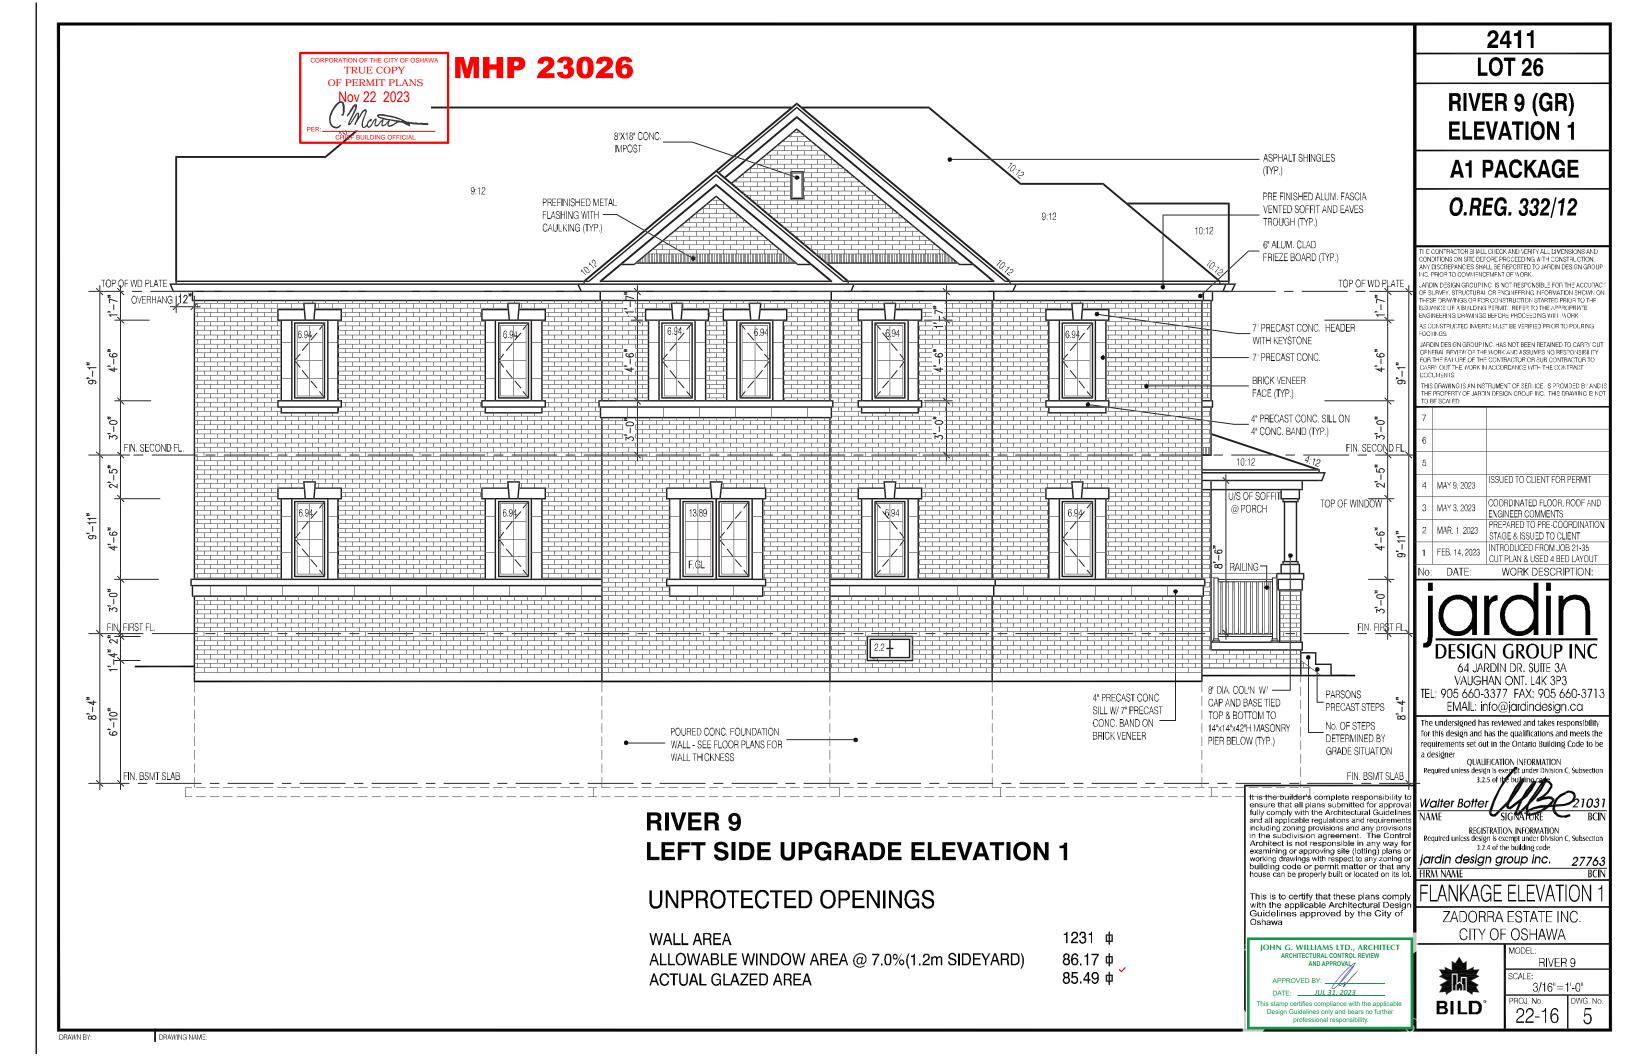

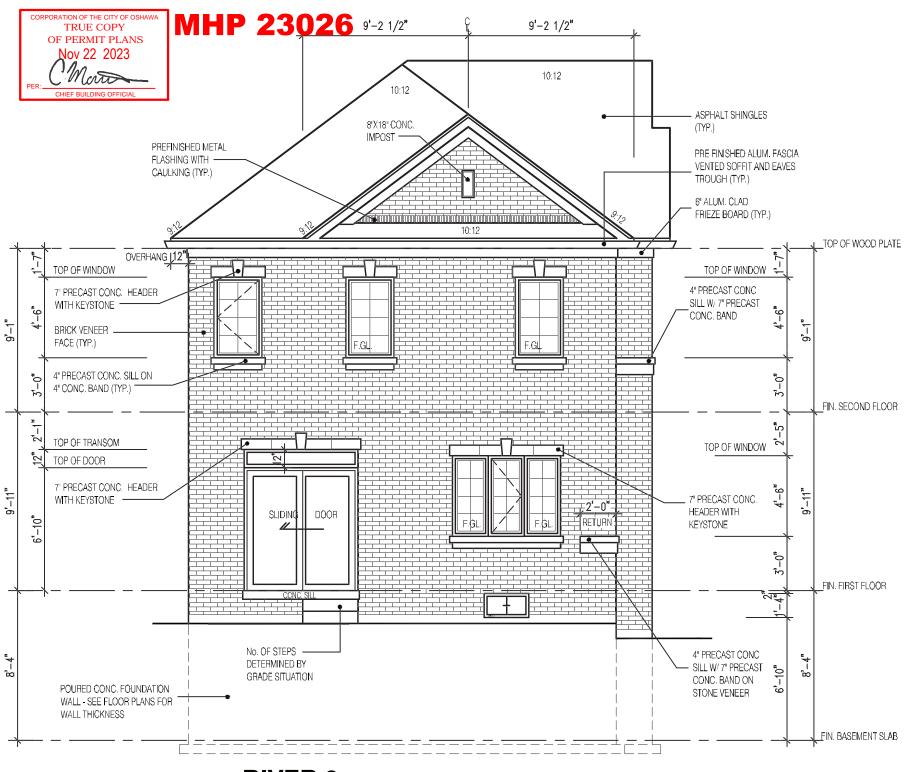

RIVER 9 REAR ELEVATION 1 2411

LOT 26

RIVER 9 (GR) **ELEVATION 1**

A1 PACKAGE

O.REG. 332/12

TILE CONTRACTOR SHALL CHECK AND VERIFY ALL DIVENSIONS AND CONDITIONS ON SITE BEFORE PROCEEDING ATH CONSTRUCTION. ANY DISCREPANCES SHALL BE REPORTED TO JARDIN DESIGN GROUPING, PRIOR TO COVIMENCEMENT OF WORK.

JARDIN DESIGN GROUP INC. IS NOT RESPONSIBLE FOR THE ACCUPAC OF SURVEY, STRUCTURAL OR ENGINEERING INFORMATION SHOWN ON THESE DRAWINGS OR FOR CONSTRUCTION STARTED PRIOR TO THE ISSUANCE OF A BUILDING FEMILT. REFER TO THE APPROPRIATE ENGINEERING DRAWINGS BEFORE PROCEEDING WITH WORK.

AS CONSTRUCTED INVERTS MUST BE VERIFIED PRIOR TO POURING

JARDIN DESIGN GROUP INC. HAS NOT BEEN RETAINED TO CARRY OUT GENERAL REVIEW OF THE NORK AND ASSUMES NO RESPONSIBILITY FOR THE FAILURE OF THE CONTRACTOR OR SUB CONTRACTOR TO CARRY OUT THE MORK IN ACCORDANCE WITH THE CONTRACT

THIS DRAWING IS AN INSTRUMENT OF SERVICE. IS PROVIDED BY AND IS THE PROPERTY OF JARDIN DESIGN GROUP INC. THIS DRAWING IS NOT TO BE SCALED.

6		
5		
4	MAY 9, 2023	ISSUED TO CLIENT FOR PERMIT
3	MAY 3, 2023	COORDINATED FLOOR, ROOF A ENGINEER COMMENTS
2	MAR. 1, 2023	PREPARED TO PRE-COORDINAT STAGE & ISSUED TO CLIENT
1	FEB. 14, 2023	INTRODUCED FROM JOB 21-35

DATE: WORK DESCRIPTION:



VAUGHAN ONT. L4K 3P3 TEL: 905 660-3377 FAX: 905 660-3713 EMAIL: info@jardindesign.ca

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a designer

QUALIFICATION INFORMATION

Walter Botter NAME

REGISTRATION INFORMATION Required unless design is exempt under Division C, Subsection 3.2.4 of the building code

jardin design group inc.

FIRM NAME

REAR ELEVATION 1

ZADORRA ESTATE INC. CITY OF OSHAWA

SCALE:

PROJ. No.

22-16

RIVER 9

3/16"=1'-0"




JOHN G. WILLIAMS LTD., ARCHITECT

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of

t is the builder's complete responsibility

It is the builder's complete responsibility to ensure that all plans submitted for approva fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot

This stamp certifies compliance with the applicable Design Guidelines only and bears no further

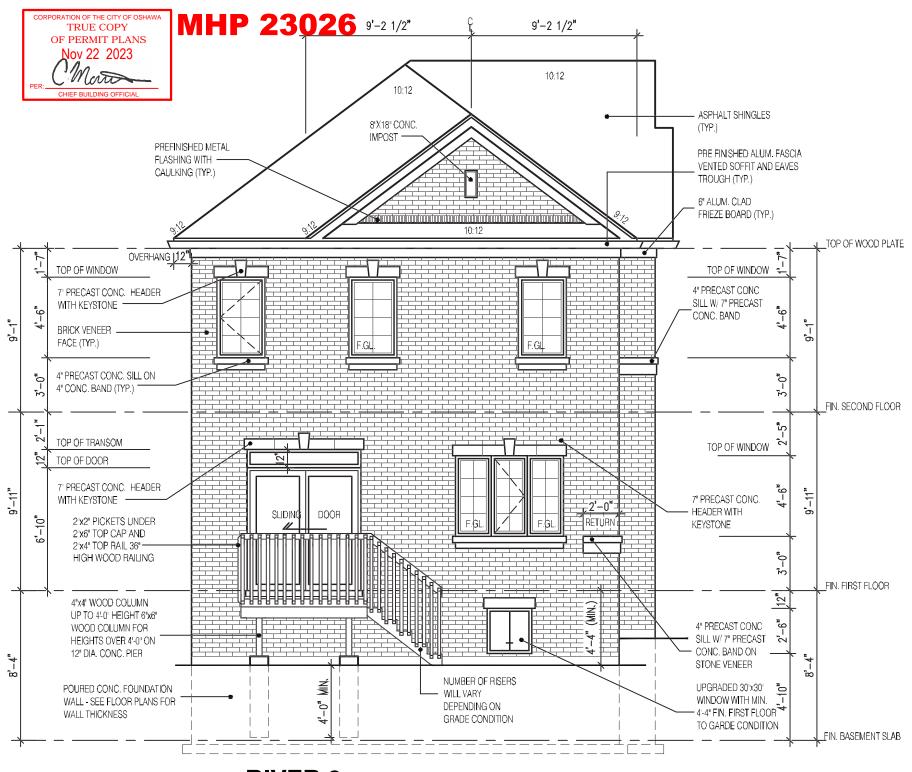

RIVER 9 REAR ELEVATION 1 DECK CONDITION

FOR ADDITIONAL DECK STRUCTURE REFER TO PAGE 7 OF THE DETAIL PACKAGE

NOTE:

WHEN VENEER CUT IS GREATER THAN 26" A 10" POURED CONC. FOUNDATION WALL IS REQUIRED. (FOUNDATION PLAN TO BE REVIEWED IN CONJUNCTION WITH SITE PLAN)

t is the builder's complete responsibility It is the builder's complete responsibility te ensure that all plans submitted for approva fully comply with the Architectural Guideline and all applicable regulations and requirement including zoning provisions and any provision in the subdivision agreement. The Contro Architect is not responsible in any way fo examining or approving site (lotting) plans o working drawings with respect to any zoning o building code or permit matter or that any bouse can be properly will or located on its let. nouse can be properly built or located on its

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of

IOHN G. WILLIAMS LTD., ARCHITECT DATE: JUL 31, 2023 is stamp certifies compliance with the applicat Design Guidelines only and bears no further

2411 **LOT 26**

RIVER 9 (GR) **ELEVATION 1**

A1 PACKAGE

O.REG. 332/12

CONDITIONS ON SITE DEFORE PROCEEDING ATH CONSTRUCTION.
ANY DISCREPANCIES SHALL BE REPORTED TO JARDIN DESIGN GROUI
INC. PRIOR TO COVMENCEMENT OF WORK.

"ARDIN DESIGN GROUP INC. IS NOT RESPONSIBLE FOR THE ACCUPAC OF SURVEY, STRUCTURAL OR ENGINEERING INFORMATION SHOWN OF THESE DRAWINGS OR FOR CONSTRUCTION STARTED PRIOR TO THE ISSUANCE OF A BUILDING PERMIT. REFER TO THE APPROPRIATE. NGINEERING DRAWINGS BEFORE PROCEEDING WITH WORK.

AS CONSTRUCTED INVERTS MUST BE VERIFIED PRIOR TO POURING

JARDIN DESIGN GROUP INC. HAS NOT BEEN RETAINED TO CARRY OU GENERAL REVIEW OF THE WORK AND ASSUMES NO RESPONSIBILITY FOR THE FAILURE OF THE CONTRACTOR OR SUB-CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT

THIS DRAWING IS AN INSTRUMENT OF SERVICE, IS PROVIDED BY AND ITHE PROPERTY OF JARDIN DESIGN GROUP INC. THIS DRAWING IS NO

	<i>'</i>		
	6		
ı	5		
	4	MAY 9, 2023	ISSUED TO CLIENT FOR PERMIT
	3	MAY 3, 2023	COORDINATED FLOOR, ROOF A ENGINEER COMMENTS
	2	MAR. 1, 2023	PREPARED TO PRE-COORDINA STAGE & ISSUED TO CLIENT
	1	FFR 28 2023	ADDED DRAWING TO SET

DATE: WORK DESCRIPTION:



VAUGHAN ONT. L4K 3P3 TEL: 905 660-3377 FAX: 905 660-371-EMAIL: info@jardindesign.ca

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a designer QUALIFICATION INFORMATION

Walter Botter

REGISTRATION INFORMATION Required unless design is exempt under Division C, Subsection 3.2.4 of the building code

jardin design group inc. FIRM NAME

DECK CONDITION EL-1


ZADORRA ESTATE INC.


CITY OF OSHAWA



RIVER 9

3/16"=1'-0" PROJ. No. 22-16 6-1

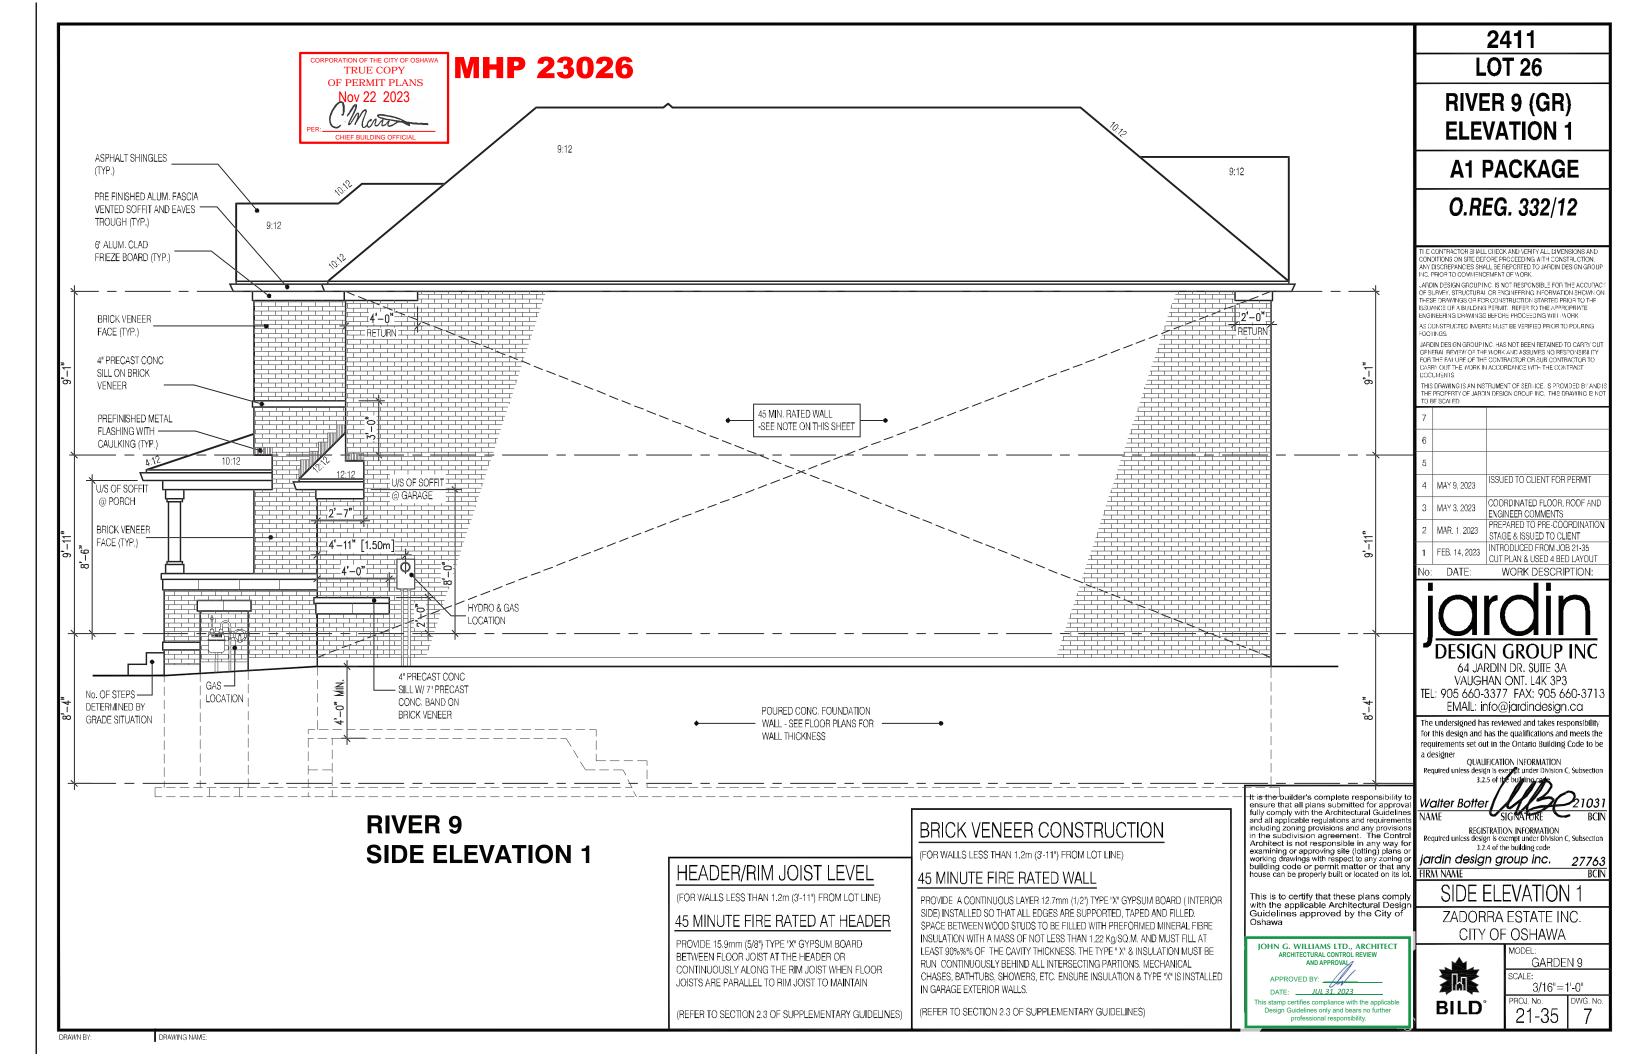

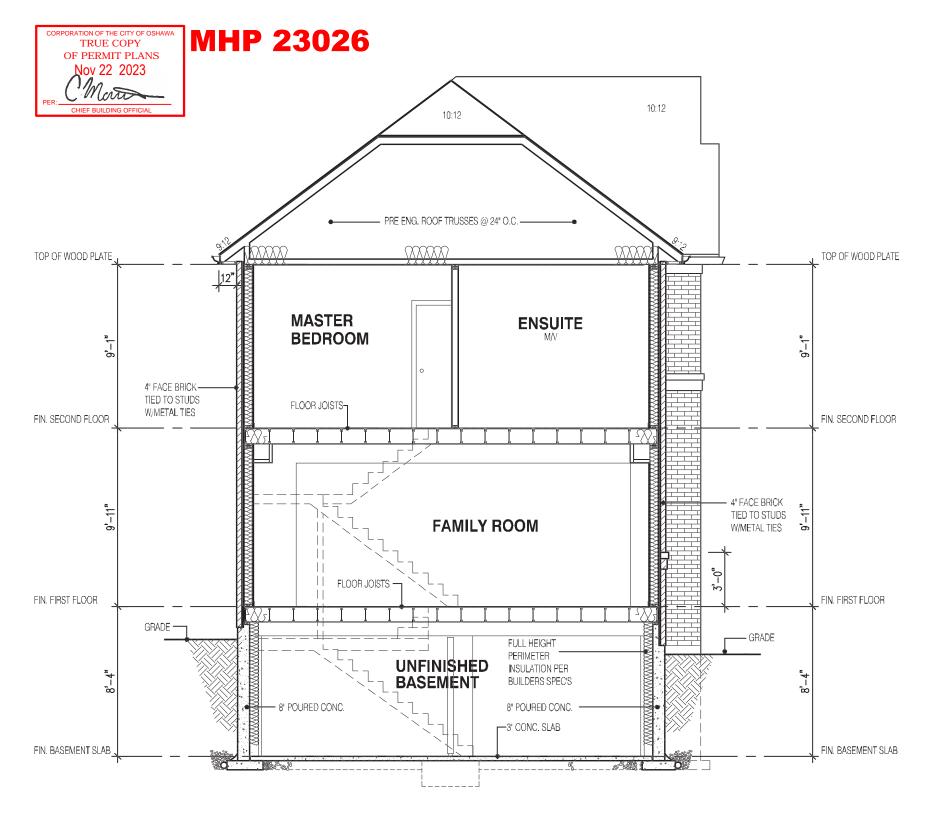

SECTION A ELEVATION 1

STRUDET INC.



FOR STRUCTURE ONLY

2411 **LOT 26**

RIVER 9 (GR) **ELEVATION 1**

A1 PACKAGE

O.REG. 332/12

TI E CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS ON SITE DEFORE PROCEEDING ATH CONSTRUCTION. ANY DISCREPANCES SHALL BE REPORTED TO JARDIN DESIGN GROUPING. PRIOR TO COMMENCEMENT OF WORK.

LARDIN DESIGN GROUP INC. IS NOT RESPONSIBLE FOR THE ACCUPAC OF SURVEY, STRUCTURAL OR ENGINEERING INFORMATION SHOWN OF THESE DRAWINGS OR FOR CONSTRUCTION STARTED PRIOR TO THE ISSUANCE OF A BUILDING PERMIT. REFER TO THE APPROPRIATE NGINEERING DRAWINGS BEFORE PROCEEDING WITH WORK.

AS CONSTRUCTED INVERTS MUST BE VERIFIED PRIOR TO POURING

JARDIN DESIGN GROUP INC. HAS NOT BEEN RETAINED TO CARRY CUT GENERAL REVIEW OF THE WORK AND ASSUMES NO RESPONSIBILITY FOR THE FALL USE OF THE CONTRACTOR OR SUB CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT

THIS DRAWING IS AN INSTRUMENT OF SERVICE. IS PROVIDED BY AND IS THE PROPERTY OF JARDIN DESIGN CROUP INC. THIS DRAWING IS NOT TO BE SCALED.

6		
5		
4	MAY 9, 2023	ISSUED TO CLIENT FOR PERMIT
3	MAY 3, 2023	COORDINATED FLOOR, ROOF AN ENGINEER COMMENTS
2	MAR. 1, 2023	PREPARED TO PRE-COORDINATION STAGE & ISSUED TO CLIENT
1	FEB. 14, 2023	INTRODUCED FROM JOB 21-35

DATE WORK DESCRIPTION:



VAUGHAN ONT. L4K 3P3 TEL: 905 660-3377 FAX: 905 660-3713 EMAIL: info@jardindesign.ca

The undersigned has reviewed and takes responsibility for this design and has the qualifications and meets the requirements set out in the Ontario Building Code to be a designer

QUALIFICATION INFORMATION



REGISTRATION INFORMATION Required unless design is exempt under Division C, Subsection 3.2.4 of the building code

jardin design group inc. FIRM NAME

SECTION A ELEV-1

ZADORRA ESTATE INC. CITY OF OSHAWA



t is the builder's complete responsibility

It is the builder's complete responsibility to ensure that all plans submitted for approva fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any buses can be properly thill or located on its left.

house can be properly built or located on its I

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of

GARDEN 9 SCALE:

3/16"=1'-0" PROJ. No. 21-35