NE0618-017 PAGE 1 OF 35

### **Engineering Note Page (ENP-2)**

REVISION 2009-10-09

### Please read all notes prior to installation of the component

GREEN YORK HOMES-BRAMPTON-ON-AMELIA 2 ELE-1-2

### **DESIGN INFORMATION**

This building component is certified as an individual component for the loads and conditions shown on the calculation and drawing page.

The responsibility of the undersigned engineer is <u>only</u> limited to the calculation of this building component for the loads and conditions shown on this drawing.

The responsibility of the undersigned is limited to the verification of the structural capacity of the NASCOR floor joists and LVL beams based on placement as shown on the layout. The loads applied are limited to the gravity effects of the specified loads. The structural integrity of the building and the effect of wind, uplift, seismic, lateral or other forces, calculation of adequate support and anchorage of components, as well as the dimensions and design loads used to calculate components are the responsibility of the overall building designer.

Floor joists and OSB rim board are designed to carry uniformly distributed loads only. Point loads should be transferred through the floor cavity with squash blocks. Structural elements such as walls, posts, connectors, and squash blocks are the responsibility of the overall building designer.

The undersigned engineer disclaims any responsibility for damages as a result of being furnished faulty or incorrect information, specifications and/or designs.

Installation of NASCOR joists is to be carried out in accordance with the current edition of the manufacturer's approved literature available at <a href="http://www.nascor.ca">http://www.nascor.ca</a>.

### <u>CODE</u>

This building component is designed in accordance with the National Building Code of Canada, the Ontario Building Code, CCMC and Canadian Standards Association guidelines.

### **COMPONENT**

- 1. The building component used in construction must be the same as indicated on the drawings.
- 2. The building component must be installed and assembled as per specification shown on the drawing and in accordance with the manufacturer's assembly and installation.
- 3. Members consisting of multiple plies must be connected as per the document "Multi-ply Connection Details".
- 4. Pass-thru squash block framing is required at all point loads over bearings.

### **HANDLING AND INSTALLATION**

Do not drill any hole, cut or notch a certified building component without a written preauthorization.




NE0618-017 PAGE 2 OF 35

# LTIPLE MEMBER CONNECTIONS

GREEN YORK HOMES-BRAMPTON-ON-AMELIA 2 ELE-1-2


### Conventional Connections (for uniform distributed loads)

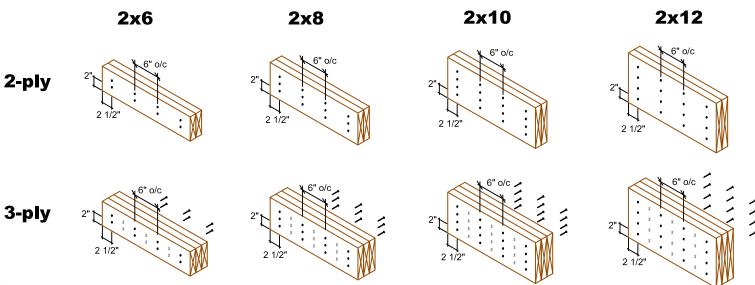

### **Conventional connection notes:**


- -Nails to be 3" 10d spiral wire nails.
- -Nails to be located a minimum of 2" from the top and bottom of the member. Start all nails a minimum of 2 1/2" in from ends.
- -Number of rows and spacing as per details shown, unless noted otherwise.
- "X" represents nail driven from the opposite side.

### LVL Connections (for uniform distributed loads)

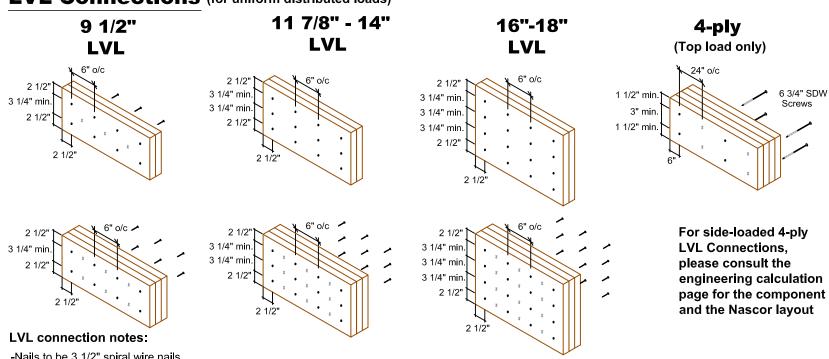

- -Nails to be 3 1/2" spiral wire nails.
- -Nails to be located a minimum of 2 1/2" from the top and bottom of the member. Start all nails a minimum of 2 1/2" in from ends.
- -Minimum 3 1/4" spacing between rows.
- -Number of rows and spacing as per details shown, unless noted otherwise.
- "X" represents nail or screw driven from the opposite side.

### Vertical I-Joist Connections (for uniform distributed loads)

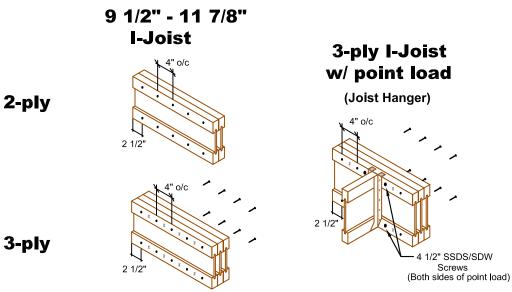

### **Vertical I-Joist connection notes:**

- -Nails to be 3" spiral wire nails.
- -Nails to be located at centre of top and bottom flanges. Start all nails a minimum of 2 1/2" in from ends.
- -Number of rows and spacing as per details shown, unless noted otherwise.
- "X" represents nail driven from the opposite side.




**MULTI-PLY** CONNECTION **DETAILS** 

> Date: November 30, 2016 Scale: NTS

**KOTT** 3228 Moodie Drive Ottawa, ON K2H 7V1 Ph: 613-838-2775 Fx: 613-838-4751

NE0618-017 **PAGE 3 OF 35** 

## 

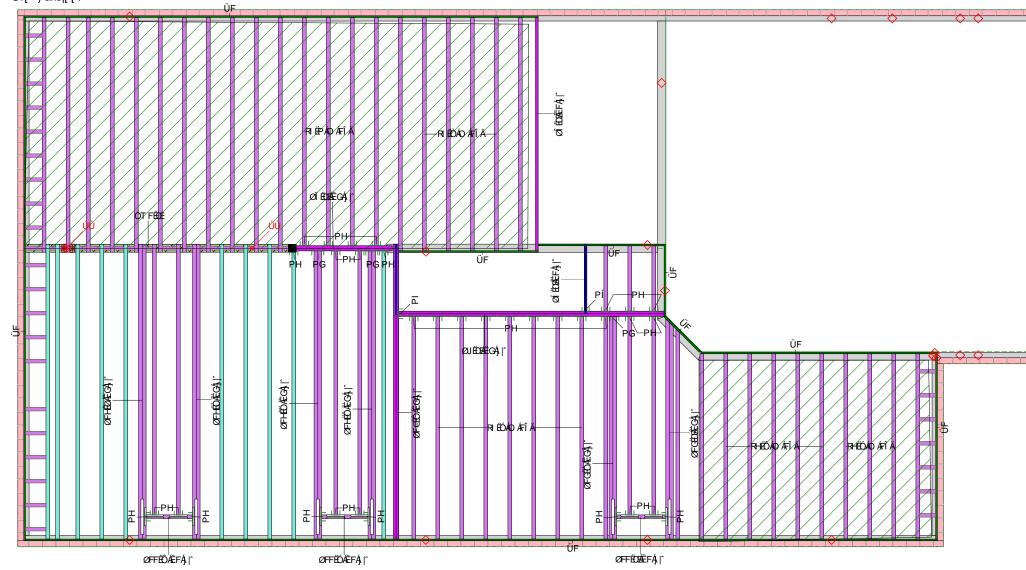

THIS CERTIFICATION IS TO CONFIRM THAT:

1. THE LOADS USED IN THE CALCULATION OF THE ATTACHED APPROVED COMPONENTS CONFORM TO THE FLOOR ASSEMBLY

2. THE FLOOR JOISTS COMPLY WITH THE NASCOR SPAN TABLE FOR THE LOADS AND SPACING SHOWN ON THIS LAYOUT.

ATTACHED TOGETHER AS PER THE INCLUDED MULTIPLE MEMBER CONNECTION DETAIL.

SUPPORTING THE FLOOR SYSTEM SUCH AS BEAMS, WALLS, COLUMNS AND FOUNDATION WALLS AND FOOTINGS LATERAL STABILITY ARE THE RESPONSIBILITY OF OTHERS. REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.



THE FLOOR SYSTEM MUST BE ASSEMBLED IN ACCORDANCE TO THE NASCOR SPECIFIER GUIDE. MULTI-PLY MEMBERS MUST BE

ALL OTHER COMPONENTS AND STRUCTURAL ELEMENTS INCLUDING ANCHORAGE OF COMPONENTS AND BRACING FOR

|Õ¦[ັ}寨|[[¦ ŠXŠEŠÚŠ Šæà^| Ö^•&¦ā] cā[} Yãão @ Ö^]c @ Ûc Úlã∿∙ Ú& Š^} \* @ ØF€ Ø[ ¦^¢Á ΓĖĖĺ FFÈÏ G G FÌËŒË CHEÒËHEE€ØàÆXŠ Šæî[ĭoÁpæ{^ ØJ FÎˌˀ Ør⊹^¢Á G G OET ÖŠQQEÁGÁÖŠËFÁBÁG OBEOÜHEE€ØàÆSXŠ ØÎ Ø[ ¦^¢Á FËÍ FFÈÏ FIˌˀ Ö^•ã\*}ÁT^c@}å CHÈÈÒËHEE€€ØàÆŠXŠ ŠÙÖ Ø[ ¦^¢Á FĖĖ ( FFÈ ( G G Îˀˀ Ö^•&|a]ca[} CÉEÒËHEEEØàÆXŠ ÕÜÒÒÞÄ̈UÜSÁPUT ÒÙ Ø[¦^¢Á GHEÒËHEE€ØàÆŠXŠ FĖ (FFÈ ) Øĺ Iˀˀ ÕÜŒÞÒŠŠŒPUT ÒÙÁÚÜURÒÔV ÓÜŒ ÚVUÞÊJÞ OÁR[ãrc Ú&• Š^}\*@ Ô¦^æe^å Šæà^| Ö^•&¦ā] cā[] Yãão@ Ö^]o@ QĚ FFÈÏÍ RÌ ÞR΀P F€ FÌˀˀ TæîÁGÌÉÄG€FÌ ØFH ÞRP OEĚ FFÈÈÏÍ FÌˌˀ Ó ãå^ GĚ FFÈÏÍ I FIˀˀ ØFG ÞRP G G Ùæ|^• ÁÜ^ ØFF ÞRP GĚ FFÈÏ Iˀˀ Н I FÎËEËE Ö^∙ãt}^¦ RÍ ÞRP GĚ FFÈÏÍ RI ÞRP OÉ FFÈÏÍ H€ FIËEË€ ÙÁÓ FH FŒŒ RH bRP OEĚ FFÈÈÏÍ Ù@1]a' RG ÞRP OEĚ FFÈÈÏÍ H Iˀˀ Ú¦[ b/&c Üã[ÁÓ[ælå Šæà^| Ö^•&|ā] cā[} Ú& Š^} \* @ Ó #å^ ¦ @ÁÚ ¦ [ b &c Yãac@ Ö^]c@ Ûcî Úlã∿∙ ÜF Þ[¦à[¦åÁÜã[à[æþåÁ FÈÈGÍ FFÈÌÏÍ FH FG **Kott Lumber Company** Úľ•ÁFÈGÁÝÁ FI ÁDE å^:•[ } ÁÓ|çå FFÈÏÍ Ùq[~~çã|\^ÊÃU} œdã Ó[ & a Ôæ)æåæ Šæà^| Ö^•&'a]ca[} Yãac@ Ö^]c@ Ûcî Ú∣ã∿∙ Ú& Š^}\*@ ŠIOZÁÝI ÓŠSF ÞRP QĚ FFÈÏÍ ŠãjØc Xælañ• HÏËEË€ J€ÍÉIGËI€€ Pæ) \* ^: Ó^æ{ ĐĐãa^¦ Ù ]][¦c åÁ Ground Floor T^{ à^¦ Ö^• # } AT ^c@ å Šæà^| Ú&• Ö^•&¦ājaãj} ~æ c^} ^¦• ~æ• c^} ^¦• Ó ãåã \* ÁÔ [ å ^ ÞÓÔÔÁŒF€ÆÐÚÓÔÁ PG H PWHF€ËG FlÆrîå ÎÆF€å ŒFG H ŠØGÍFF FÁÀÌ ¢FÁFÐY Ù Floor PH FG∕Æ€å ΡI F PÕWÙI F€ lÎÁπÎå FÎÁFÎå Šíæå∙ Ρĺ F PWÙFÈEFEF€ F€ÁFÎå Šãc^ ÞUVÒÙK FÍ Ö^æå Ö^-4^&cãt}ÁRTãec FBÁÁKO læ{^¦ÁqíÁç^¦ã÷Ásã, ^}•ã;}•Áq;Ás@ Áæ;&@ac^&c;æ;Ás¦æ;ā,\*•È ŠŠÁÚ a ÁŠĐ ΙÌ€ VŠÁÙ] æ) ÁÆŠÐ H΀ ŠŠÁÔæ) oÁKGŠĐ IÌ€ VŠÁÔæ) oÁÁGŠÐ H΀ Ö^-{^&cā[} ÁÕãå^¦

Üã Á ææ æ |^ |Á Á Á ã œ KÁFËÐ ÄÁã à [æ å Á ã @ GÄ¢IÄÁà|[&\ÁQFEFÌÄÁ[}\*^\Áo@a)Áã[Áå^]c@DÁOÁFÌÄÁ[E&È OE[Á;c@^¦Á&[{\*][}^}œ^Áæ)åÁnd\*&c`læAÁi[^{^}œÁ\*]][¦dāj\* c@`Á|[[¦Án^•c^{ Án & @Áse•Ás^a∉ •ÊÁ, æ||•ÊÁS{| °{} • Áse}å ˇ}åaœa[}Á,aa)|•Áaa))aÁ[[cā]\*•Áā,&|ˇåā]\*Áab,&@(iae\*^Á;~ 8[{][}^}or Áse) å Ásilæssáj \* Á[lÁpæs\*lætÁ cææð ájáíð Ásel^Áso@ ^•][}•ãa.ããc Á,-Á,c@⊹•È

Pana&@Ánd^anÁ^]¦^•^}orÁs^¦æ(ä&Ánã/åÁ|[[¦Á,ãn@Ánd,Ánaåãnã[}anþÁs^anàÁn[ænåÁ

\@^Alaq ā,\* A.@\_, }A,} Alo@ Alae [\*o4, æ Ala^As^çāmer^A![{ Alo@ And &@ ro& laq alæ, ā,\* • EAU[[6/80/00)\* ā,^^|Ag A^ça\*, Ang a Ang] |[ç^As@ As^çāmenā;}A,|ā;|A d[Á&[}∙d`&da[}È

### Legend OE&@air\&c`lædÁÖ¦æ āi\*ÁQ}-[ Ú[ā]oÁŠ[æåÁÙˇ]][¦c ÚÙ ROĐÜ ÖOÞÁÖ ÒÙ QÕÞÁÕ ÜU WÚ Š[æåÁ+[{Á05à[ç^ I ÁROEÜÖ OÞÁÖÜ ÉÁÚ WOY Ó ÁHCE XOEVŐPOEÞÉUÞÁKŠISÁHÚH Þ[¦à[¦åÁÜã] à[æåÁÚ]ˇ•ÁFÈÉGÍ ÁÝÁFFÈÏ Ú¦[b/soÁÀÁFÏÉÍÍ ÞRÎ∉PÁFFÌÌÏÍ T[å^|KÁDETÒŠODEÁG ÞRPÁRFÈÏÍ Öæe^kÁTOEŸÁGGÉЀFÌÁÁÜÒXÁKÁG ØŢ¦^¢ÁGÈEÒËHEEEØàÆŠXŠÁFËÍÍÆFÈÏÍ ÍÈGÍÁÝÁF€ÈGÍÁQÖ¦[]]^åD

FÈ UÓÔÁGEFGÁUÈÜ^\*ÁHHGEFGÁse Áse ^} å^å

GÈ Þæ•&[¦ÁÔÔTÔÆFHÍHÍĒÜ

HÈ ŠXŠÁÔÔT ÔÁËFGJ€I ËÜ

IÈ ÔŒÞÐÔÙŒËJÌÎË€J

ÍÈ ÔÔTÔÁËTGÏÌÏËÜÁŒÚŒÁÚÜËŠHF€ÇÔD

RUQÙVÙÁÙÚŒÔQÞÕÁFĨÄUÐÔÁ ÞUVÒÖÁUVPÒÜY QÙÒ



**EWP Studio** Simpson Strong-Tie®

Component Solutions™

EWP Studio Version 18.32.085 Powered by iStruct™

This layout is to be used as an installation guide only. It is meant to be used in conjunction with the architectural and structural drawings, not to replace them

H΀

G€

ΙÌ€

H΀

UÙÓ

HÐÄ

ŠŠÁÙ] æ) ÁŠĐ VŠÁÚ]æ)ÁÁŠÐ

ŠŠÁÔæ) oÁKGŠĐ

VŠÁÔæ) oÁKGŠĐ

Ö^&\ ā

V@**%**}^••

Øæ• c^} ^¦

Xãa¦æaãi}

Ö^&\

NE0618-017 PAGE 4 OF 35



Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #

1.750" X 11.875" Forex 2.0E-3000Fb LVL F10-C

2-Ply - PASSED Level: Ground Floor

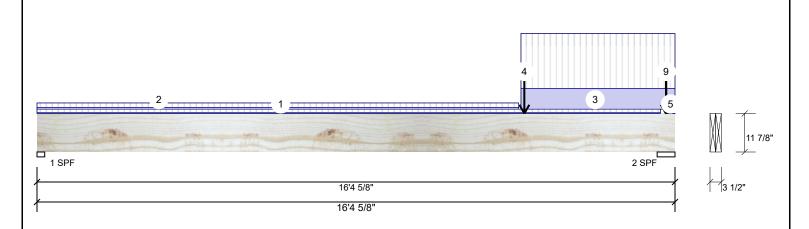

Member Inform	ember Information					Unfactored Reactions UNPATTERNED Ib (Uplift)				
Type:	Girder	Application:	Floor (Residential)	Brg	Live	Dead	Snow	Wind		
Plies:	2	Design Method:	LSD	1	970	457	0	0		
Moisture Condition	: Dry	Building Code:	NBCC 2010 / OBC 2012	2	3301	1385	0	0		
Deflection LL:	360	Load Sharing:	No							
Deflection TL:	240	Deck:	Not Checked							
Importance:	Normal	Vibration:	Not Checked							
General Load										
Floor Live:	40 PSF			Bearings	and Fact	ored Reactions				
Dead:	15 PSF			Bearing	Length	Cap. React D/L lb	Total Ld. Case	Ld. Comb.		
				1 - SPF 2	2.375"	40% 571 / 1454	2025 L	1.25D+1.5L		
				2-SPF :	5.500"	56% 1731 / 4951	6682 L	1.25D+1.5L		

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	19001 ft-lb	12'6 3/16"	34261 ft-lb	0.555 (55%)	1.25D+1.5L	L
Unbraced	19001 ft-lb	12'6 3/16"	22688 ft-lb	0.837 (84%)	1.25D+1.5L	L
Shear	5852 lb	15'	11596 lb	0.505 (50%)	1.25D+1.5L	L
Perm Defl in.	0.158 (L/1204)	8'11 7/8"	0.528 (L/360)	0.300 (30%)	D	Uniform
LL Defl inch	0.363 (L/523)	9'1"	0.528 (L/360)	0.690 (69%)	L	L
TL Defl inch	0.522 (L/365)	9' 5/8"	0.793 (L/240)	0.660 (66%)	D+L	L

### **Design Notes**

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 4.5.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width.

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING



Page 1 of 2

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 16-0-2	(Span)0-8-3	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 12-4-7	(Span) 0-11-13	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Part. Uniform	12-5-3 to 16-4-10		Тор	90 PLF	240 PLF	0 PLF	0 PLF	
4	Point	12-6-3		Near Face	1124 lb	2798 lb	0 lb	0 lb	F9
5	Part. Uniform	16-1-14 to 16-4-10		Тор	1 PLF	0 PLF	0 PLF	0 PLF	

Continued on page 2...

### Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals

  Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 PAGE 5 OF 35



Continued from page 1

Client: Project: Address:

5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Project #:

Forex 2.0E-3000Fb LVL F10-C

1.750" X 11.875"

2-Ply - PASSED Level: Ground Floor

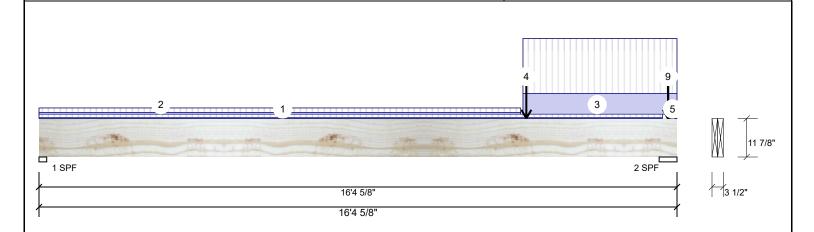

Continued from page 1									
	ID	Load Type	Location Trib Width	Side	Dead	Live	Snow	Wind	Comments
	6	Point	16-1-14	Тор	10 lb	26 lb	0 lb	0 lb	J1
	7	Point	16-1-14	Тор	2 lb	5 lb	0 lb	0 lb	J1
	8	Point	16-1-14	Тор	11 lb	30 lb	0 lb	0 lb	J4
	9	Point	16-1-14	Тор	9 lb	0 lb	0 lb	0 lb	Wall Self Weight
		Self Weight			10 PLF				

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. UVI beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400





Page 2 of 2

NE0618-017 PAGE 6 OF 35



Simpson Strong-Tie®

Client: Project: Address:


5/30/2018 SB Designer:

Job Name: AMELIA 2 EL- 1


Level: Ground Floor

Project #

### F11-A NJH 11.875" - PASSED



READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.



# 2'8 13/16" Member Information

iciiibci iiiioi			
Туре:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition	n: Dry	Building Code:	NBCC 2010 / OBC 2012
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		

Unfacto	red Reactions	UNPATTER	NED lb (Uplif	t)
Brg	Live	Dead	Snow	Wind
1	277	104	0	0
2	287	107	0	0

### Analysis Results Actual Comb. Case Analysis Location Allowed Capacity 1' 5/16" 5390 ft-lb 0.062 (6%) 1.25D+1.5L L Moment 333 ft-lb Unbraced 333 ft-lb 1' 5/16" 4941 ft-lb 0.067 (7%) 1.25D+1.5L L 0.309 (31%) 1.25D+1.5L L 559 lb 2'7 9/16" 1810 lb Shear Perm Defl in. 0.001 1'3 1/16" 0.084 (L/360) 0.020 (2%) D Uniform

Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 130 / 416 2.000" 34% 546 L 1.25D+1.5L Hanger 2 -2.000" 35% 134 / 430 565 L 1.25D+1.5L Hanger

LL Defl inch 0.004 (L/8538) 1'3 1/16" 0.084 (L/360) 0.040 (4%) L TL Defl inch 0.005 (L/6212) 1'3 1/16" 0.126 (L/240) 0.040 (4%) D+L **Design Notes** 

(L/22796)

15 PSF

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING

**Bearings and Factored Reactions** 

- 1 Fill all hanger nailing holes. 3 Top flange unbraced.
- 2 Girders are designed to be supported on the bottom edge only.

Dead:

4 Bottom flange braced at bearings

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 2-8-13	(Span)1-3-7	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	0-8-13		Far Face	94 lb	251 lb	0 lb	0 lb	J3
3	Point	2-0-13		Far Face	91 lb	243 lb	0 lb	0 lb	J3

L

# FL-MASRI

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid

lateral displacement and rotation
6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
7. For flat roofs provide proper drainage to prevent

**Manufacturer Info** 

Nascor by Kott







NE0618-017 **PAGE 7 OF 35** 



### **EWP Studio** Simpson Strong-Tie®

Client: Project: Address:


5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Level: Ground Floor


Project #:

### 11.875" - PASSED F11-B NJH





2'7'



Mem	hor	Info	rma	tion
welli	vei	ши	11110	шог

Туре:	Girder
Plies:	1
Moisture Condition:	Dry
Deflection LL:	360
Deflection TL:	240
Importance:	Normal
General Load	
Floor Live:	40 PSF
Dead:	15 PSF

Application: Floor (Residential) Design Method: **Building Code:** NBCC 2010 / OBC 2012 Load Sharing: No

Not Checked Deck: Vibration: Not Checked

### **Analysis Results**

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	417 ft-lb	9 1/2"	5390 ft-lb	0.077 (8%)	1.25D+1.5L	L
Unbraced	417 ft-lb	9 1/2"	5011 ft-lb	0.083 (8%)	1.25D+1.5L	L
Shear	746 lb	2'5 3/4"	1810 lb	0.412 (41%)	1.25D+1.5L	L
Perm Defl in.	0.002 (L/18292)	9 1/2"	0.079 (L/360)	0.020 (2%)	D	Uniform
LL Defl inch	0.004 (L/6850)	9 1/2"	0.079 (L/360)	0.050 (5%)	L	L
TL Defl inch	0.006 (L/4984)	9 1/2"	0.119 (L/240)	0.050 (5%)	D+L	L

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Top flange unbraced.
- 4 Bottom flange braced at bearings.

Brg	Live	Dead	Snow	Wind
1	320	120	0	0
2	382	143	0	0

### **Bearings and Factored Reactions**

Bearing	Length	Cap. Re	eact D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	2.000"	39%	150 / 480	630	L	1.25D+1.5L
2 - Hanger	2.000"	46%	179 / 572	751	L	1.25D+1.5L

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT **CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 2-7-0	(Span)1-3-7	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	0-9-8		Far Face	128 lb	342 lb	0 lb	0 lb	J5
3	Point	2-1-8		Far Face	110 lb	293 lb	0 lb	0 lb	J5



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.

- Provide lateral support at bearing points to avoid lateral displacement and rotation
   Web stiffeners for point load as shown Minimum point load bearing lengthp=3.5 inches
   For flat roofs provide proper drainage to prevent

Manufacturer Info

Nascor by Kott







NE0618-017 **PAGE 8 OF 35** 



### **EWP Studio** Simpson Strong-Tie®

Component Solutions™

Client: Project: Address:


5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Level: Ground Floor

Project #:

### 11.875" - PASSED F11-C NJH





Wind

0

0

1.25D+1.5L

1.25D+1.5L

O

756 L

633 L

Member Inform	nation		
Type:	Girder	Application:	Floor (Residential)
Plies:	1	Design Method:	LSD
Moisture Condition	: Dry	Building Code:	NBCC 2010 / OBC 2012
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

Unfactored	Reactions	UNPATTER	NED lb (Uplift)
Brg	Live	Dead	Snow

144

121

384

322

2.000"

2.000"

2

Hanger

Hanger

2 -

Bearings and Factored Reactions									
Bearing Length	Cap. React D/L lb	Total Ld. Case	Ld. Comb.						

180 / 576

151 / 482

### **Analysis Results**

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	420 ft-lb	1'9 1/2"	5390 ft-lb	0.078 (8%)	1.25D+1.5L	L
Unbraced	420 ft-lb	1'9 1/2"	5011 ft-lb	0.084 (8%)	1.25D+1.5L	L
Shear	751 lb	1 1/4"	1810 lb	0.415 (41%)	1.25D+1.5L	L
Perm Defl in.	0.002 (L/18157)	1'9 1/2"	0.079 (L/360)	0.020 (2%)	D	Uniform
LL Defl inch	0.004 (L/6812)	1'9 1/2"	0.079 (L/360)	0.050 (5%)	L	L
TL Defl inch	0.006 (L/4954)	1'9 1/2"	0.119 (L/240)	0.050 (5%)	D+L	L

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT **CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.

39%

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS.

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Top flange unbraced.
- 4 Bottom flange braced at bearings.

	<u> </u>								
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 2-7-0	(Span)1-3-7 to 1-3-7	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	0-5-8		Far Face	111 lb	295 lb	0 lb	0 lb	J5
3	Point	1-9-8		Far Face	129 lb	344 lb	0 lb	0 lb	J5



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid

lateral displacement and rotation
6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
7. For flat roofs provide proper drainage to prevent populing.

Manufacturer Info

Nascor by Kott







NE0618-017 **PAGE 9 OF 35** 




Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #:

### 2-Ply - PASSED F12-A NJH 11.875"

Level: Ground Floor

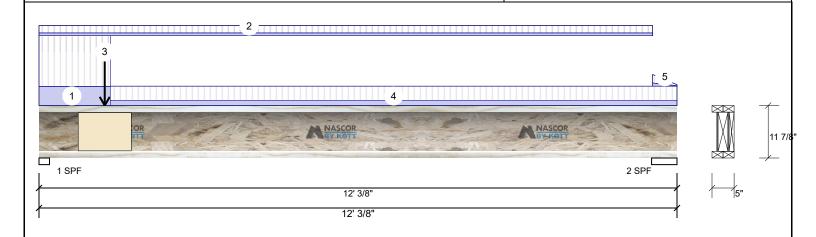

Member Info	ember Information					Unfactored Reactions UNPATTERNED Ib (Uplift)						
Type:	Girder	Application:	Floor (Residential)	Brg	Live	Dead	Snow	Wind				
Plies:	2	Design Method:	LSD	1	474	177	0	0				
Moisture Condition	on: Dry	Building Code:	NBCC 2010 / OBC 2012	2	193	72	0	0				
Deflection LL:	360	Load Sharing:	No									
Deflection TL:	240	Deck:	Not Checked									
Importance:	Normal	Vibration:	Not Checked									
General Load												
Floor Live:	40 PSF			Bearings a	and Fact	ored Reactions						
Dead:	15 PSF			Bearing L	ength	Cap. React D/L lb	Total Ld. Case	Ld. Comb.				
				1 - SPF 2	2.375"	28% 222 / 711	933 L	1.25D+1.5L				
				2-SPF 5	5.754"	10% 90 / 290	380 L	1.25D+1.5L				

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	1243 ft-lb	4'8 13/16"	10780 ft-lb	0.115 (12%)	1.25D+1.5L	L
Unbraced	1243 ft-lb	4'8 13/16"	1248 ft-lb	0.996 (100%)	1.25D+1.5L	L
Shear	914 lb	1 5/8"	3620 lb	0.252 (25%)	1.25D+1.5L	L
Perm Defl in.	0.011 (L/12159)	5'6 3/16"	0.383 (L/360)	0.030 (3%)	D	Uniform
LL Defl inch	0.030 (L/4552)	5'6 3/16"	0.383 (L/360)	0.080 (8%)	L	L
TL Defl inch	0.042 (L/3312)	5'6 3/16"	0.574 (L/240)	0.070 (7%)	D+L	L

READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.** 

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Top flange must be laterally braced at a maximum of 11'2" o.c.

5 Bottom flange braced at bearings.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 1-4-2	(Span)3-1-13	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 11-6-14	(Span)0-5-8	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	1-2-14		Far Face	107 lb	287 lb	0 lb	0 lb	F11
4	Tie-In	1-4-2 to 12-0-6	(Span)0-10-8	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
5	Tie-In	11-6-14 to 12-0-6	(Span)0-6-5 to 0-0-13	Тор	15 PSF	40 PSF	0 PSF	0 PSF	0



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

- Handling & Installation
- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.

- Provide lateral support at bearing points to avoid lateral displacement and rotation
   Web stiffeners for point load as shown Minimum point load bearing lengthp=3.5 inches
   For flat roofs provide proper drainage to prevent

Manufacturer Info

Nascor by Kott







NE0618-017 **PAGE 10 OF 35** 



Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #:

### 2-Ply - PASSED F12-B NJH 11.875"

Level: Ground Floor

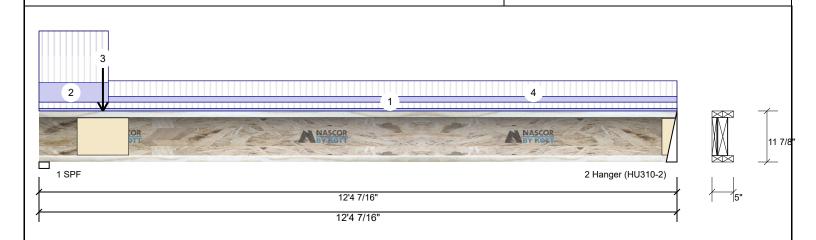

Member Info	rmation			Unfacto	red Reac	tions L	JNPATTERN	ED lb (Upl
Type:	Girder	Application:	Floor (Residential)	Brg	Live		Dead	Snow
Plies:	2	Design Method:	LSD	1	473	;	178	0
Moisture Conditi	on: Dry	Building Code:	NBCC 2010 / OBC 2012	2	193	,	72	0
Deflection LL:	360	Load Sharing:	No					
Deflection TL:	240	Deck:	Not Checked					
Importance:	Normal	Vibration:	Not Checked					
General Load								
Floor Live:	40 PSF			Bearing	s and Fac	tored	Reactions	
Dead:	15 PSF			Bearing	Length	Сар.	React D/L lb	Total Ld.
				1 cpr	2 275"	200/	222 / 710	022

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	1321 ft-lb	5'1 9/16"	10780 ft-lb	0.123 (12%)	1.25D+1.5L	L
Unbraced	1321 ft-lb	5'1 9/16"	1322 ft-lb	0.999 (100%)	1.25D+1.5L	L
Shear	913 lb	1 5/8"	3620 lb	0.252 (25%)	1.25D+1.5L	L
Perm Defl in.	0.013 (L/11026)	5'10 1/8"	0.403 (L/360)	0.030 (3%)	D	Uniform
LL Defl inch	0.035 (L/4136)	5'10 1/8"	0.403 (L/360)	0.090 (9%)	L	L
TL Defl inch	0.048 (L/3008)	5'10 1/8"	0.604 (L/240)	0.080 (8%)	D+L	L

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top flange must be laterally braced at a maximum of 10'10" o.c.
- 6 Bottom flange braced at bearings.
- 7 Web stiffeners required at Rearing 2

Unfactored	l Reactions	UNPATTERNED	lb	(Uplift)

Brg	Live	Dead	Snow	Wind
1	473	178	0	0
2	193	72	0	0

Bearing	Length	Cap. Re	eact D/L lb	Total	Ld. Case	Ld. Comb.	
1 - SPF	2.375"	28%	222 / 710	932	L	1.25D+1.5L	
2 - Hanger	2.500"	10%	91 / 290	380	L	1.25D+1.5L	

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT **CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

/ vven	sililellers required at bearing 2								
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 12-4-7	(Span)0-4-11	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 1-4-2	(Span)3-1-13	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	1-2-14		Near Face	104 lb	277 lb	0 lb	0 lb	F11
4	Tie-In	1-4-2 to 12-4-7	(Span)0-11-5	Тор	15 PSF	40 PSF	0 PSF	0 PSF	

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.

Provide lateral support at bearing points to avoid lateral displacement and rotation
 Web stiffeners for point load as shown Minimum point load bearing lengthp=3.5 inches
 For flat roofs provide proper drainage to prevent

Manufacturer Info

Nascor by Kott



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400

Jun 04, 2018





**PAGE 11 OF 35** NE0618-017

**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #

2-Ply - PASSED F13-C 11.875" NJH

Level: Ground Floor

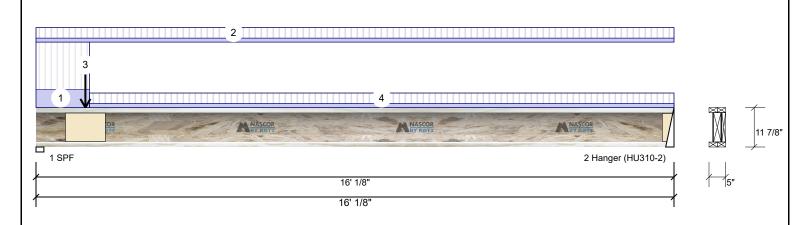

Member Inforn	nation			Unfactor	ed React	tions UN	PATTERNI	ED lb (	Uplift)	
Type:	Girder	Application:	Floor (Residential)	Brg	Live		Dead	Snov	v	Wind
Plies:	2	Design Method:	LSD	1	629		236	(	)	0
Moisture Condition:	Dry	Building Code:	NBCC 2010 / OBC 2012	2	243		91	(	)	0
Deflection LL:	360	Load Sharing:	No							
Deflection TL:	240	Deck:	Not Checked							
Importance:	Normal	Vibration:	Not Checked							
General Load										
Floor Live:	40 PSF			Bearings	and Fac	tored Re	actions			
Dead:	15 PSF			Bearing	Length	Cap. R	eact D/L lb	Total	Ld. Case	Ld. Comb.
				1 - SPF	2.375"	37%	295 / 944	1238	L	1.25D+1.5L
Analysis Result		I		2 - Hanger	2.500"	13%	114 / 364	478	L	1.25D+1.5L

Analysis Comb. Case Actual Location Allowed Capacity 2103 ft-lb 0.195 (20%) 1.25D+1.5L L Moment 6'10 15/16" 10780 ft-lb Unbraced 2103 ft-lb 6'10 15/16" 2107 ft-lb 0.998 1.25D+1.5L L (100%)1219 lb 1 5/8" 3620 lb 0.337 (34%) 1.25D+1.5L L Shear Perm Defl in. 0.033 (L/5696) 7'8" 0.524 (L/360) 0.060 (6%) D Uniform LL Defl inch 0.088 (L/2135) 7'8" 0.524 (L/360) 0.170 (17%) L L TL Defl inch 0.122 (L/1553) 7'8" 0.786 (L/240) 0.150 (15%) D+L L

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT **CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

> PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top flange must be laterally braced at a maximum of 9' o.c.
- 6 Bottom flange braced at bearings.
- 7 Web stiffeners required at Bearing 2.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 1-4-2	(Span)3-0-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 16-0-2	(Span)0-8-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	1-2-14		Far Face	143 lb	382 lb	0 lb	0 lb	F11
4	Tie-In	1-4-2 to 16-0-2	(Span)0-8-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	

# Jun 04, 2018

EL-MASRI

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid
- lateral displacement and rotation
  6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
  7. For flat roofs provide proper drainage to prevent

**Manufacturer Info** 

Nascor by Kott





NE0618-017 PAGE 12 OF 35




Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #

2-Ply - PASSED F13-D NJH 11.875"

Level: Ground Floor

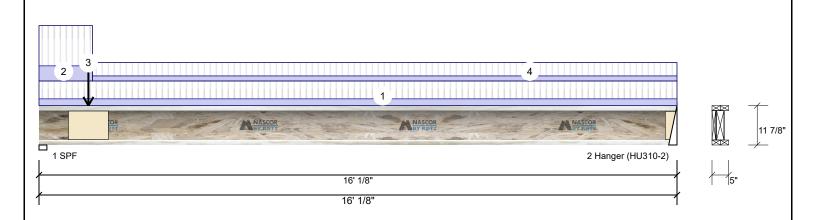

Hanger

Member Info	rmation			Unfacto	red React	tions U	NPATTERN	ED lb (	(Uplift)
Type:	Girder	Application:	Floor (Residential)	Brg	Live		Dead	Sno	W
Plies:	2	Design Method:	LSD	1	723		271		0
Moisture Condition	on: Dry	Building Code:	NBCC 2010 / OBC 2012	2	398		149		0
Deflection LL:	360	Load Sharing:	No						
Deflection TL:	240	Deck:	Not Checked						
Importance:	Normal	Vibration:	Not Checked						
General Load									
Floor Live:	40 PSF			Bearings	s and Fac	tored	Reactions		
Dead:	15 PSF			Bearing	Length	Сар.	React D/L lb	Total	Ld. Case
				1 - SPF	2.375"	43%	339 / 1084	1423	L
					2 500"	220/	197 / 507	794	1

Δna	lvcic	RAC	ulte

_							
	Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
	Moment	3230 ft-lb	7'5 3/4"	10780 ft-lb	0.300 (30%)	1.25D+1.5L	L
	Unbraced	3230 ft-lb	7'5 3/4"	3243 ft-lb	0.996 (100%)	1.25D+1.5L	L
	Shear	1400 lb	1 5/8"	3620 lb	0.387 (39%)	1.25D+1.5L	L
	Perm Defl in.	0.051 (L/3734)	7'9 13/16"	0.524 (L/360)	0.100 (10%)	D	Uniform
	LL Defl inch	0.135 (L/1400)	7'9 13/16"	0.524 (L/360)	0.260 (26%)	L	L
	TL Defl inch	0.185 (L/1018)	7'9 13/16"	0.786 (L/240)	0.240 (24%)	D+L	L

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top flange must be laterally braced at a maximum of 7'5" o.c.
- 6 Bottom flange braced at bearings
- 7 Web stiffeners required at Bearing 2.

READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARINGS.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 16-0-2	(Span)1-4-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 1-4-2	(Span)3-0-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	1-2-14		Near Face	120 lb	320 lb	0 lb	0 lb	F11
4	Tie-In	1-4-2 to 16-0-2	(Span)1-0-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid
- lateral displacement and rotation
  6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
  7. For flat roofs provide proper drainage to prevent

Manufacturer Info

Nascor by Kott



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400



Jun 04, 2018

EL-MASRI

Wind 0 0

Ld. Comb. 1.25D+1.5L 1.25D+1.5L



**PAGE 13 OF 35** NE0618-017



Client: Project: Address:


5/30/2018 SB Designer:

Job Name: AMELIA 2 EL- 1

Project #

### 2-Ply - PASSED F13-E 11.875" NJH

Level: Ground Floor

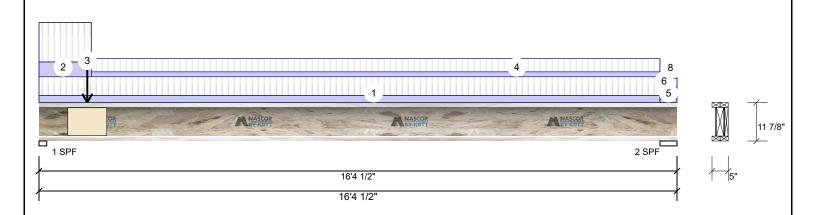

∕lember Info	rmation			Unfactore	ed Reacti	ons UNPATTERN	IED lb (Uplift)	
Туре:	Girder	Application:	Floor (Residential)	Brg	Live	Dead	Snow	Wind
Plies:	2	Design Method:	LSD	1	741	278	0	0
Moisture Condition	on: Dry	Building Code:	NBCC 2010 / OBC 2012	2	416	157	0	0
Deflection LL:	360	Load Sharing:	No					
Deflection TL:	240	Deck:	Not Checked					
Importance:	Normal	Vibration:	Not Checked					
General Load								
Floor Live:	40 PSF			Bearings a	and Facto	ored Reactions		
Dead:	15 PSF			Bearing L	ength	Cap. React D/L lb	Total Ld. Case	Ld. Comb.
				1 - SPF 2	2.375"	44% 348 / 1112	1460 L	1.25D+1.5L
				2-SPF 5	5.250"	23% 196 / 624	821 L	1.25D+1.5L

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	3385 ft-lb	7'6 13/16"	10780 ft-lb	0.314 (31%)	1.25D+1.5L	L
Unbraced	3385 ft-lb	7'6 13/16"	3390 ft-lb	0.999 (100%)	1.25D+1.5L	L
Shear	1436 lb	1 5/8"	3620 lb	0.397 (40%)	1.25D+1.5L	L
Perm Defl in.	0.054 (L/3540)	7'10 3/4"	0.529 (L/360)	0.100 (10%)	D	Uniform
LL Defl inch	0.143 (L/1328)	7'10 3/4"	0.529 (L/360)	0.270 (27%)	L	L
TL Defl inch	0.197 (L/966)	7'10 3/4"	0.793 (L/240)	0.250 (25%)	D+L	L

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Top flange must be laterally braced at a maximum of 7'3" o.c.
- 5 Bottom flange braced at bearings.

**CONTAINS SPECIFICATIONS AND CRITERIA** USED IN THE DESIGN OF THIS COMPONENT. REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT** 

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARINGS

ID Load Type Trib Width Side Dead Live Comments Location Snow Wind 15 PSF 40 PSF 0 PSF 0 PSF Tie-In 0-0-0 to 15-11-4 (Span)1-5-0 Top 1 15 PSF 40 PSF 0 PSF 0 PSF 2 Tie-In 0-0-0 to 1-4-2 (Span)3-0-0 Top to 3-0-0 Point 1-2-14 Far Face 121 lb 322 lb 0 lb 0 lb F11 Tie-In 1-4-2 to 15-11-4 (Span)1-0-0 Top 15 PSF 40 PSF 0 PSF 0 PSF 5 Tie-In 15-11-4 to 16-4-8 (Span)0-8-0 Top 15 PSF 40 PSF 0 PSF 0 PSF Tie-In 15-11-4 to 16-4-8 (Span)0-8-0 Top **15 PSF** 40 PSF 0 PSF 0 PSF Continued on page 2...



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- andling & Installation
  Libel flagges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, suffener tables, web hole
  chart, bridging details, multi-ply fastening details and
  handling/erection details
  Damaged IJoists must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid
- lateral displacement and rotation
  6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
  7. For flat roofs provide proper drainage to prevent

**Manufacturer Info** 

Nascor by Kott



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400



PROFESSIONALEN

Jun 04, 2018



NE0618-017 **PAGE 14 OF 35** 




Client: Project: Address: Date: 5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #:

### 2-Ply - PASSED 11.875" F13-E NJH

Level: Ground Floor

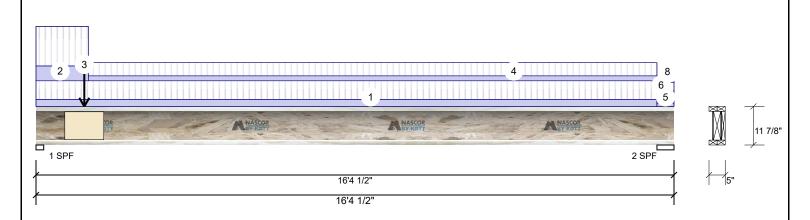

.Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
7	Part. Uniform	16-1-14 to 16-4-8		Тор	2 PLF	0 PLF	0 PLF	0 PLF	
8	Part. Uniform	16-1-14 to 16-4-8		Тор	2 PLF	0 PLF	0 PLF	0 PLF	

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. Noist flanges must not be out or drilled

  2. Refer to latest copy of the IJoist product information details for framing details, stifferer tables, web hole chart, bridging details, multi-ply fastening details and handling/erection details

  3. Damaged IJoists must not be used

  4. Design assumes top flange to be laterally restrained by attached sheathing or as specified in engineering notes.

- Provide lateral support at bearing points to avoid lateral displacement and rotation
   Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
   For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Nascor by Kott







PAGE 15 OF 35 NE0618-017



Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #

### 2-Ply - PASSED F13-F 11.875" NJH

Level: Ground Floor

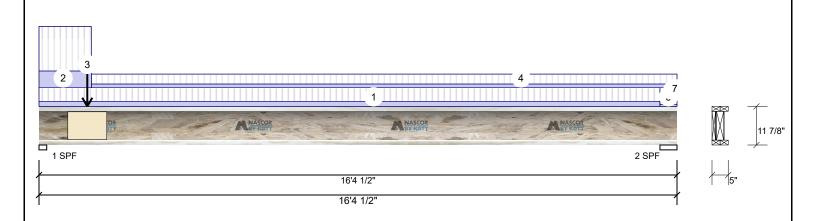

### Member Information **Unfactored Reactions UNPATTERNED Ib (Uplift)** Wind Type: Application: Floor (Residential) Brg Live Dead Plies: 2 Design Method: 673 252 0 0 1 Moisture Condition: Dry **Building Code:** NBCC 2010 / OBC 2012 2 287 108 0 0 Deflection LL: 360 Load Sharing: No Deflection TL: 240 Not Checked Deck: Importance: Normal Vibration: Not Checked General Load **Bearings and Factored Reactions** Floor Live: 40 PSF 15 PSF Dead: Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 316 / 1010 1 - SPF 2.375" 40% 1326 I 1.25D+1.5L 2 - SPF 5.250" 16% 135 / 430 566 1.25D+1.5L

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	2438 ft-lb	7'1 7/8"	10780 ft-lb	0.226 (23%)	1.25D+1.5L	L
Unbraced	2438 ft-lb	7'1 7/8"	2454 ft-lb	0.994 (99%)	1.25D+1.5L	L
Shear	1305 lb	1 5/8"	3620 lb	0.360 (36%)	1.25D+1.5L	L
Perm Defl in.	0.039 (L/4884)	7'9 3/8"	0.529 (L/360)	0.070 (7%)	D	Uniform
LL Defl inch	0.104 (L/1832)	7'9 3/8"	0.529 (L/360)	0.200 (20%)	L	L
TL Defl inch	0.143 (L/1332)	7'9 3/8"	0.793 (L/240)	0.180 (18%)	D+L	L

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Top flange must be laterally braced at a maximum of 8'5" o.c.

5 Bottom flange braced at bearings

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING

3 Dolloin liange	braced at bearings.								
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 15-11-4	(Span)0-11-0 to 0-11-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 1-4-2	(Span)3-0-0 to 3-0-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	ROFESSIONAL
3	Point	1-2-14		Near Face	144 lb	384 lb	0 lb	0 lb	F11
4	Tie-In	1-4-2 to 16-4-8	(Span)0-8-0 to 0-8-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	N.A. EL-MASRI
5	Tie-In	15-11-4 to 16-4-8	(Span)0-4-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	CXChar E Mayu
6	Part. Uniform	16-1-14 to 16-4-8		Тор	2 PLF	0 PLF	0 PLF	0 PLF	Jup 04 2018
7	Part. Uniform	16-1-14 to 16-4-8		Тор	1 PLF	0 PLF	0 PLF	0 PLF	1, 2, 2, 2, 2, 3

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- andling & Installation
  Libel flagges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, suffener tables, web hole
  chart, bridging details, multi-ply fastening details and
  handling/erection details
  Damaged IJoists must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid
- lateral displacement and rotation
  6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
  7. For flat roofs provide proper drainage to prevent

**Manufacturer Info** 

Nascor by Kott







PAGE 16 OF 35 NE0618-017




Client: Project: Address:


5/30/2018 SB Designer: Job Name: AMELIA 2 EL- 1

Project #

1.750" X 11.875" - PASSED Forex 2.0E-3000Fb LVL F5-A

Level: Ground Floor

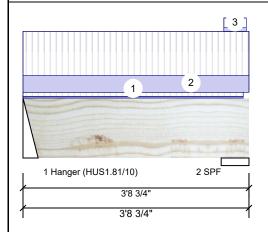



Wind

0

0

Ld. Comb.

1.25D+1.5L

1.25D+1.5L

1063 L

Comments

Member Inform	nation			Unfacto	red React	ions UN	IPATTERNI	ED lb (Uplif	t)
Туре:	Girder	Application:	Floor (Residential)	Brg	Live		Dead	Snow	
Plies:	1	Design Method:	LSD	1	462		182	0	
Moisture Condition	: Dry	Building Code:	NBCC 2010 / OBC 2012	2	534		210	0	
Deflection LL:	360	Load Sharing:	No						
Deflection TL:	240	Deck:	Not Checked						
Importance:	Normal	Vibration:	Not Checked						
General Load									
Floor Live:	40 PSF			Bearing	s and Fact	ored Re	eactions		
Dead:	15 PSF			Bearing	Length	Cap. F	React D/L lb	Total Ld. C	ase
				1 - Hanger	3.000"	24%	227 / 693	920 L	

Case Comb. Analysis Actual Location Allowed Capacity 1'9 1/8" 17130 ft-lb Moment 646 ft-lb 0.038 (4%) 1.25D+1.5L L Unbraced 646 ft-lb 1'9 1/8" 13452 ft-lb 0.048 (5%) 1.25D+1.5L L 304 lb 1'2 1/8" 5798 lb 0.052 (5%) 1.25D+1.5L L Shear Perm Defl in. 0.001 1'9 1/8" 0.105 (L/360) 0.010 (1%) D Uniform (L/32215) 0.003 1'9 1/8" 0.105 (L/360) 0.030 (3%) L LL Defl inch (L/12665)

1'9 1/8" 0.157 (L/240) 0.030 (3%) D+L

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

18%

262 / 801

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARINGS

2 - SPF 5.500"

### Design Notes

Analysis Results

1 Fill all hanger nailing holes.

TL Defl inch 0.004 (L/9091)

- 2 Girders are designed to be supported on the bottom edge only.
- 3 Top braced at bearings.
- 4 Bottom braced at bearings

טו	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind
1	Tie-In	0-0-0 to 3-7-9	(Span)1-1-8	Тор	15 PSF	40 PSF	0 PSF	0 PSF
2	Part. Uniform	0-0-0 to 3-8-12		Тор	90 PLF	240 PLF	0 PLF	0 PLF
3	Tie-In	3-3-12 to 3-8-3	(Span)2-7-10 to 2-7-9	Тор	15 PSF	40 PSF	0 PSF	0 PSF
	Self Weight				5 PLF			



Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

**Manufacturer Info** 

APA: PR-L318







NE0618-017 PAGE 17 OF 35


**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #:

1.750" X 11.875" - PASSED Forex 2.0E-3000Fb LVL F6-A

Level: Ground Floor

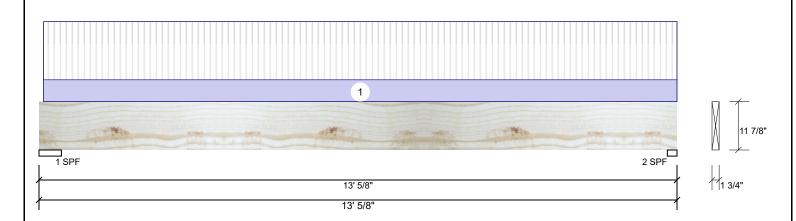

Member Infor	mation			Unfactored Reactions UNPATTERNED lb (Uplift)						
Type:	Girder	Application:	Floor (Residential)	Brg	Live	De	ead	Snow		Wind
Plies:	1	Design Method:	LSD	1	120		77	0		0
Moisture Condition	n: Dry	Building Code:	NBCC 2010 / OBC 2012	2	117		74	0		0
Deflection LL:	360	Load Sharing:	No							
Deflection TL:	240	Deck:	Not Checked							
Importance:	Normal	Vibration:	Not Checked							
General Load										
Floor Live:	40 PSF			Bearings a	and Facto	ored Rea	ctions			
Dead:	15 PSF			Bearing L	ength	Cap. Rea	ct D/L lb	Total L	d. Case	Ld. Comb.
				1 - SPF 5	.500"	5%	96 / 180	276 L		1.25D+1.5L
				2-SPF 2	.375"	11%	93 / 176	269 L		1.25D+1.5L

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	824 ft-lb	6'7 7/8"	17130 ft-lb	0.048 (5%)	1.25D+1.5L	L
Unbraced	824 ft-lb	6'7 7/8"	3591 ft-lb	0.229 (23%)	1.25D+1.5L	L
Shear	222 lb	1'4 5/8"	5798 lb	0.038 (4%)	1.25D+1.5L	L
Perm Defl in.	0.014 (L/10405)	6'7 7/8"	0.417 (L/360)	0.030 (3%)	D	Uniform
LL Defl inch	0.023 (L/6605)	6'7 7/8"	0.417 (L/360)	0.050 (5%)	L	L
TL Defl inch	0.037 (L/4040)	6'7 7/8"	0.626 (L/240)	0.060 (6%)	D+L	L

**ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

READ ALL NOTES ON THIS PAGE AND ON

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS** 

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Top braced at bearings.
- 3 Bottom braced at bearings.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-1-2 to 13-0-10	(Span)0-11-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
	Self Weight				5 PLF				



Page 1 of 1

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

LVL beams must not be cut or drilled
Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
2 Damaged Beams must not be used

Design assumes top edge is laterally restrained
Provide lateral support at bearing points to avoid
lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 PAGE 18 OF 35



**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:


5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Project #:

1.750" X 11.875" 2-Ply - PASSED F7-A Forex 2.0E-3000Fb LVL

Level: Ground Floor

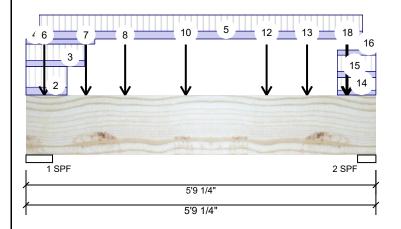



\M/ind

### Member Information

Type:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2010 / OBC 2012
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

### **Unfactored Reactions UNPATTERNED Ib (Uplift)**

ыg	LIVE	Dead	SHOW	vviilu
1	3319	1453	0	0
2	3053	1319	0	0

Dead

### **Bearings and Factored Reactions**

Livo

Bearing Lengtl	п Сар.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF 5.250"	60%	1817 / 4978	6795	L	1.25D+1.5L
2 - SPF 3.625"	80%	1648 / 4579	6227	L	1.25D+1.5L

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	5096 ft-lb	2'7 5/8"	34261 ft-lb	0.149 (15%)	1.25D+1.5L	L
Unbraced	5096 ft-lb	2'7 5/8"	33024 ft-lb	0.154 (15%)	1.25D+1.5L	L
Shear	4068 lb	1'4 3/8"	11596 lb	0.351 (35%)	1.25D+1.5L	L
Perm Defl in.	0.008 (L/7346)	2'9 3/4"	0.172 (L/360)	0.050 (5%)	D	Uniform
LL Defl inch	0.019 (L/3189)	2'9 1/2"	0.172 (L/360)	0.110 (11%)	L	L
TL Defl inch	0.028 (L/2224)	2'9 9/16"	0.258 (L/240)	0.110 (11%)	D+L	L

**Design Notes** 

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 4.5.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width.

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS** 



ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
2	Part. Uniform	0-0-0 to 0-8-2		Тор	122 PLF	326 PLF	0 PLF	0 PLF	J1
3	Part. Uniform	0-0-0 to 0-11-10		Тор	96 PLF	255 PLF	0 PLF	0 PLF	J4
4	Part. Uniform	0-0-0 to 1-1-10		Тор	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
5	Part. Uniform	0-2-10 to 5-6-10		Far Face	123 PLF	253 PLF	0 PLF	0 PLF	
6	Point	0-3-10		Near Face	111 lb	296 lb	0 lb	0 lb	J8
	_								

Continued on page 2...

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive

### Handling & Installation

LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code

- approvals

  Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 **PAGE 19 OF 35** 

**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:

5/30/2018 Designer:  $\mathsf{S}\,\mathsf{B}$ 


Job Name: AMELIA 2 EL- 1


Project #:

Forex 2.0E-3000Fb LVL F7-A

1.750" X 11.875"

2-Ply - PASSED Level: Ground Floor

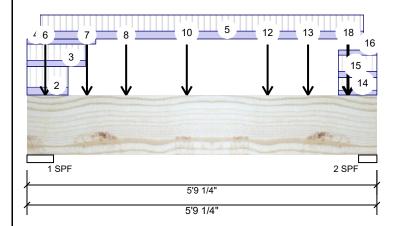



Continued from page 1								
ID	Load Type	Location Trib Wi	dth Side	Dead	Live	Snow	Wind	Comments
7	Point	0-11-14	Тор	520 lb	1340 lb	0 lb	0 lb	BM3 BM3
8	Point	1-7-10	Near Face	149 lb	398 lb	0 lb	0 lb	F13
10	Point	2-7-10	Near Face	128 lb	342 lb	0 lb	0 lb	J5
12	Point	3-11-10	Near Face	110 lb	293 lb	0 lb	0 lb	J5
13	Point	4-7-10	Near Face	91 lb	243 lb	0 lb	0 lb	F13
14	Part. Uniform	5-1-10 to 5-9-4	Тор	75 PLF	199 PLF	0 PLF	0 PLF	J1
15	Part. Uniform	5-1-10 to 5-9-4	Тор	96 PLF	255 PLF	0 PLF	0 PLF	J4
16	Part. Uniform	5-1-10 to 5-9-4	Тор	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
17	Point	5-3-7	Тор	445 lb	1139 lb	0 lb	0 lb	BM3 BM3
18	Point	5-3-10	Near Face	81 lb	215 lb	0 lb	0 lb	J8
	Self Weight			10 PLF				

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

Handling & Installation

1. UVI beams must not be cut or drilled

2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

3. Damaged Beams must not be used

4. Design assumes top edge is laterally restrained

5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 PAGE 20 OF 35


**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #

1.750" X 11.875" 2-Ply - PASSED F9-A Forex 2.0E-3000Fb LVL

Level: Ground Floor

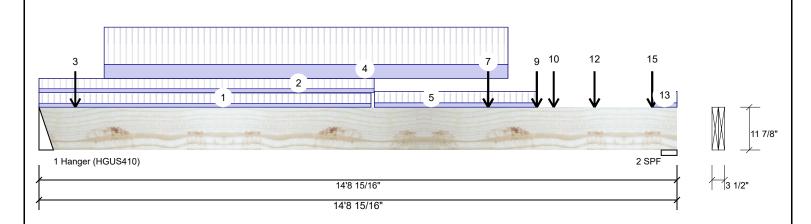

### Member Information **Unfactored Reactions UNPATTERNED Ib (Uplift)** Wind Type: Application: Floor (Residential) Brg Live Dead Plies: 2 Design Method: 2798 1124 0 0 1 Moisture Condition: Dry **Building Code:** NBCC 2010 / OBC 2012 2 2830 1139 0 0 Deflection LL: 360 Load Sharing: No Deflection TL: 240 Not Checked Deck: Importance: Normal Vibration: Not Checked General Load **Bearings and Factored Reactions** Floor Live: 40 PSF 15 PSF Dead: Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 1405 / 4197 4.000" 5602 I 1.25D+1.5L Hanger Analysis Results 2 - SPF 4.376" 60% 1424 / 4245 5668 L 1.25D+1.5L

7									
	Analysis	Actual	Location	Allowed	Capacity	Comb.	Case		
	Moment	20001 ft-lb	7'5 13/16"	34261 ft-lb	0.584 (58%)	1.25D+1.5L	L		
	Unbraced	20001 ft-lb	7'5 13/16"	24916 ft-lb	0.803 (80%)	1.25D+1.5L	L		
	Shear	5567 lb	13'5 7/16"	11596 lb	0.480 (48%)	1.25D+1.5L	L		
	Perm Defl in.	0.160 (L/1060)	7'4 7/8"	0.472 (L/360)	0.340 (34%)	D	Uniform		
	LL Defl inch	0.400 (L/426)	7'4 7/8"	0.472 (L/360)	0.850 (85%)	L	L		
	TL Defl inch	0.560 (L/304)	7'4 7/8"	0.709 (L/240)	0.790 (79%)	D+L	L		

READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER **CONNECTION DETAIL FOR PLY TO PLY** NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

### **Design Notes**

1 Fill all hanger nailing holes.

- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 7-8-1	(Span)3-6-1 to 3-4-15	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 7-8-15	(Span)3-5-8	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	0-10-1		Near Face	107 lb	286 lb	0 lb	0 lb	J4
4	Part. Uniform	1-6-1 to 10-10-1		Near Face	93 PLF	247 PLF	0 PLF	0 PLF	
5	Tie-In	7-9-0 to 11-6-1	(Span)3-9-15 to 3-9-14	Тор	15 PSF	40 PSF	0 PSF	0 PSF	

Continued on page 2...

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

**Manufacturer Info** 

APA: PR-L318







NE0618-017 PAGE 21 OF 35



Client: Project: Address:


5/30/2018 Designer:  $\mathsf{S}\,\mathsf{B}$ 

Job Name: AMELIA 2 EL- 1

Project #:

1.750" X 11.875" 2-Ply - PASSED Forex 2.0E-3000Fb LVL F9-A

Level: Ground Floor

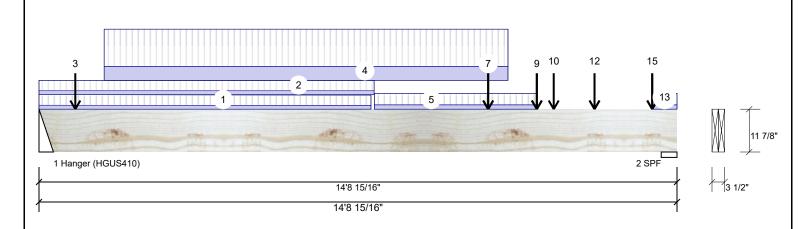

Continued from p	age 1								
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
6	Point	10-4-9		Тор	13 lb	35 lb	0 lb	0 lb	
7	Point	10-4-9		Far Face	182 lb	462 lb	0 lb	0 lb	F5
8	Point	11-6-1		Far Face	32 lb	84 lb	0 lb	0 lb	J2
9	Point	11-6-1		Near Face	80 lb	213 lb	0 lb	0 lb	J4
10	Point	11-10-12		Near Face	72 lb	193 lb	0 lb	0 lb	F12
11	Point	12-10-1		Far Face	34 lb	92 lb	0 lb	0 lb	J2
12	Point	12-10-1		Near Face	94 lb	251 lb	0 lb	0 lb	J3
13	Tie-In	14-2-1 to 14-8-15	(Span)3-9-14 to 3-9-14	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
14	Point	14-2-1		Far Face	25 lb	67 lb	0 lb	0 lb	J2
15	Point	14-2-1		Near Face	91 lb	242 lb	0 lb	0 lb	J3
	Self Weight				10 PLF				

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. UVI beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







LSD

2012

15

480

360

480

360

360 240

480

360

OSB

5/8"

Nailed & Glued

Gypsum 1/2"

Design Method

Deflection Joist

Deflection Girder

LL Span L/ TL Span L/

LL Cant 2L/

TL Cant 2L/

LL Span L/

TL Span L/

LL Cant 2L/

TL Cant 2L/

Decking

Thickness

Fastener

Vibration

Ceiling:


Deck

**Floor** Loads Live

Dead

Building Code NBCC 2010 / OBC

### Second Floor

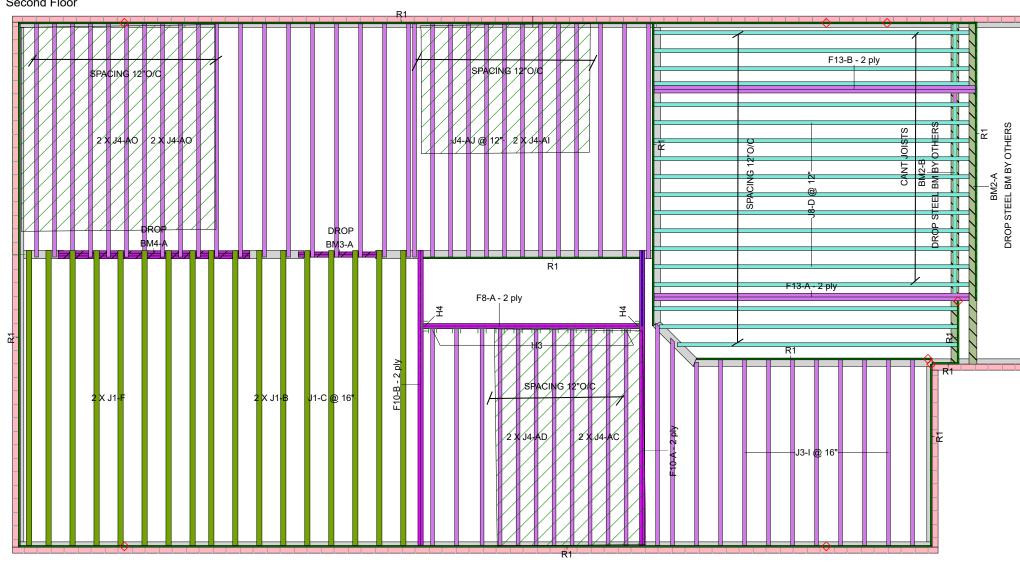

Architectural Drawing Info

JARDIN DESIGN GROUP 64 JARDIN DR. SUITE 3A VAUGHAN,ON L4K 3P3 Project # 17-55 Model: AMELIA 2 Date: MAY 22,2018

- 1. OBC 2012 O.Reg 332/12 as amended
- 2. Nascor CCMC 13535-R
- 3. LVL CCMC -12904-R
- 4. CAN/CSA-O86-09
- 5. CCMC -12787-R APA PR-L310(C)

JOISTS SPACING 16"O/C **UNLESS** NOTED OTHERWISE

### THIS CERTIFICATION IS TO CONFIRM THAT:

- 1. THE LOADS USED IN THE CALCULATION OF THE ATTACHED APPROVED COMPONENTS CONFORM TO THE FLOOR ASSEMBLY SHOWN ON THIS LAYOUT.
- 2. THE FLOOR JOISTS COMPLY WITH THE NASCOR SPAN TABLE FOR THE LOADS AND SPACING SHOWN ON THIS LAYOUT.


THE FLOOR SYSTEM MUST BE ASSEMBLED IN ACCORDANCE TO THE NASCOR SPECIFIER GUIDE. MULTI-PLY MEMBERS MUST BE ATTACHED TOGETHER AS PER THE INCLUDED MULTIPLE MEMBER CONNECTION DETAIL.

ALL OTHER COMPONENTS AND STRUCTURAL ELEMENTS SUPPORTING THE FLOOR SYSTEM SUCH AS BEAMS, WALLS, COLUMNS AND FOUNDATION WALLS AND FOOTINGS INCLUDING ANCHORAGE OF COMPONENTS AND BRACING FOR LATERAL STABILITY ARE THE RESPONSIBILITY OF OTHERS. REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.



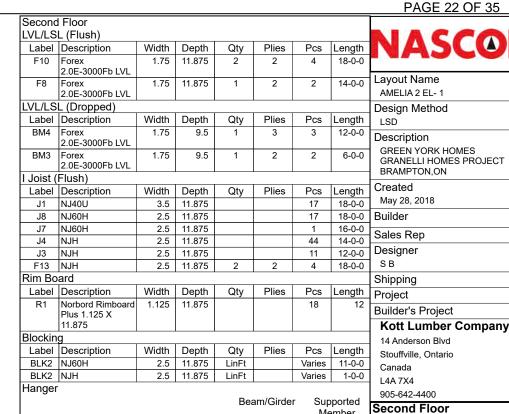

H4	2	HGUS410			46 16d	16 16d
Н3	11	LF2511			12 10d	1 #8x1 1/4W
Label	Pcs	Description	Skew	Slope	fasteners	fasteners
						Member

- Framer to verify dimensions on the architectural drawings
- Double joist only require filler/backer ply when supporting another member using a face-mounted hanger.
- Install 2x4 blocking @ 24" o/c under parallel non-loadbearing walls.
  Install single-ply flush window header along inside face of rimboard/rimjoist
  Refer to Nascor specifier guide for installation details.
- Squash blocks recommended to be installed at end bearing on all first level joists which support loading from above exceeding two levels floor or roof.
- Load transfer blocks to be installed under all point loads. It shall be the framer's responsibility that floor joists and beams


are fastened as per the hanger manufacturer's standards.

Refer to Multiple Member Connection Detail to ply to ply nailing or bolting

Rim parallel to joists: 1-1/8" rimboard with 2"x4" block (1/16" longer than rim depth) @ 16" o/c. All other components and structural elements supporting the floor system such as beams, walls, columns and foundation walls and footings including anchorage of components and bracing for lateral stability are the esponsibility of others.

Hatch area represents ceramic tiled floor with an additional dead load


The framing shown on this layout may be deviate from the architectural drawings. Project Engineer to review and approve the deviation prior

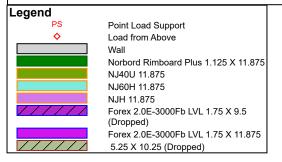

### **EWP Studio**

Simpson Strong-Tie® Component Solutions™ NE0618-017 PAGE 23 OF 35

### Second Floor

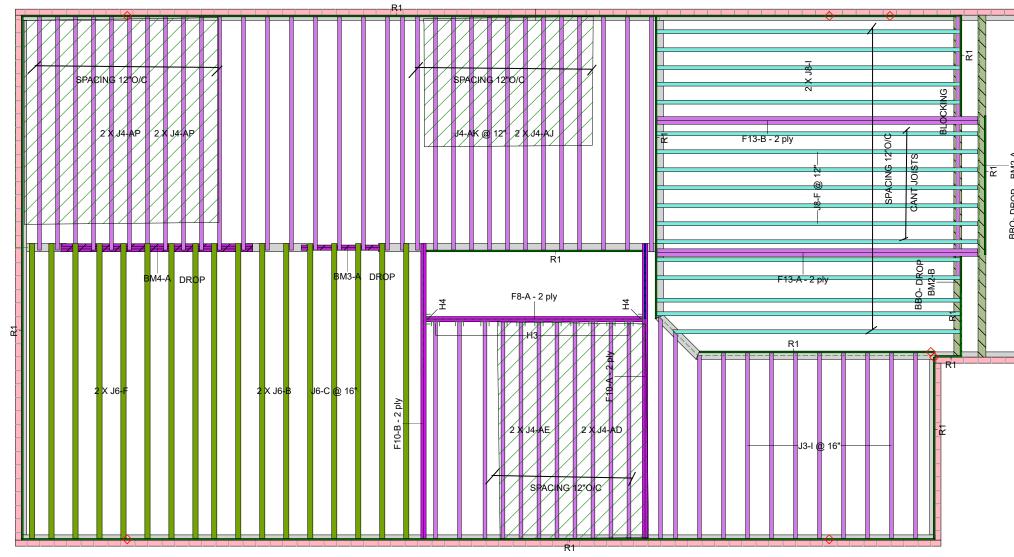

Architectural Drawing Info

JARDIN DESIGN GROUP 64 JARDIN DR. SUITE 3A VAUGHAN,ON L4K 3P3 Project # 17-55 Model: AMELIA 2 Date: MAY 22,2018

JOISTS SPACING 16"O/C UNLESS NOTED OTHERWISE

- 1. OBC 2012 O.Reg 332/12 as amended
- 2. Nascor CCMC 13535-R
- 3. LVL CCMC -12904-R
- 4. CAN/CSA-O86-09
- 5. CCMC -12787-R APA PR-L310(C)



### **EWP Studio**

Simpson Strong-Tie® Component Solutions™ THIS CERTIFICATION IS TO CONFIRM THAT:

1. THE LOADS USED IN THE CALCULATION OF THE ATTACHED APPROVED COMPONENTS CONFORM TO THE FLOOR ASSEMBLY

2. THE FLOOR JOISTS COMPLY WITH THE NASCOR SPAN TABLE FOR THE LOADS AND SPACING SHOWN ON THIS LAYOUT.

THE FLOOR SYSTEM MUST BE ASSEMBLED IN ACCORDANCE TO THE NASCOR SPECIFIER GUIDE. MULTI-PLY MEMBERS MUST BE ATTACHED TOGETHER AS PER THE INCLUDED MULTIPLE MEMBER CONNECTION DETAIL.


ALL OTHER COMPONENTS AND STRUCTURAL ELEMENTS SUPPORTING THE FLOOR SYSTEM SUCH AS BEAMS, WALLS, COLUMNS AND FOUNDATION WALLS AND FOOTINGS INCLUDING ANCHORAGE OF COMPONENTS AND BRACING FOR LATERAL STABILITY ARE THE RESPONSIBILITY OF OTHERS.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARINGS.

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.



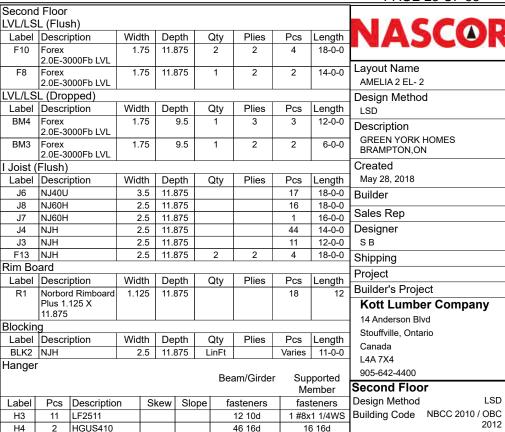

NOTES:


- Framer to verify dimensions on the architectural drawings.
- Double joist only require filler/backer ply when supporting another member using a face-mounted hanger.
- Install 2x4 blocking @ 24" o/c under parallel non-loadbearing walls.
- Install single-ply flush window header along inside face of rimboard/rimjoist
- Refer to Nascor specifier guide for installation details. Squash blocks recommended to be installed at end bearing on all first level
- joists which support loading from above exceeding two levels floor or roof. Load transfer blocks to be installed under all point loads
- It shall be the framer's responsibility that floor joists and beams

are fastened as per the hanger manufacturer's standards Refer to Multiple Member Connection Detail to ply to ply nailing or bolting

Rim parallel to joists: 1-1/8" rimboard with 2"x4" block (1/16" longer than rim depth) @ 16" o/c. All other components and structural elements supporting the floor system such as beams, walls, columns and foundation walls and footings including anchorage of components and bracing for lateral stability are the esponsibility of others.

Hatch area represents ceramic tiled floor with an additional dead load

The framing shown on this layout may be deviate from the architectural drawings. Project Engineer to review and approve the deviation prior

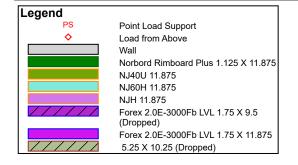

LSD

2012

15

480

360

480

360

360

240

480

360

OSB

5/8"

Nailed & Glued

Gypsum 1/2"

Floor

Loads

live

Dead

Deflection Joist

LL Span L/

TL Span L/

LL Cant 2L/

TL Cant 2L/

LL Span L/ TL Span L/

LL Cant 2L/ TL Cant 2L/

Decking

**Thickness** 

Fastener

Vibration

Ceiling:

Deck

Deflection Girder

NE0618-017 **PAGE 24 OF 35** 



Client: Project: Address:

5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1


Project #:


BM3-A Forex 2.0E-3000Fb LVL

1.750" X 9.500"

2-Ply - PASSED

Level: Second Floor

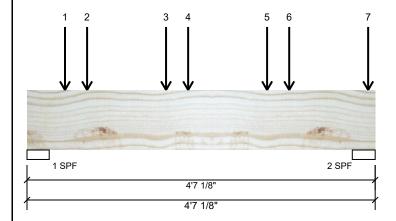



Wind

### Member Information

Type:	Girder	Application:
Plies:	2	Design Method:
Moisture Condition:	Dry	Building Code:
Deflection LL:	360	Load Sharing:
Deflection TL:	240	Deck:
Importance:	Normal	Vibration:
General Load		
Floor Live:	40 PSF	
Dead:	15 PSF	

Floor (Residential)

LSD

NBCC 2010 / OBC 2012

No

Not Checked

Not Checked

### **Unfactored Reactions UNPATTERNED Ib (Uplift)**

1	1340	520	0	0
2	1139	445	0	0

### **Bearings and Factored Reactions**

Bea	aring L	_ength	Cap. Re	eact D/L lb	Total	Ld. Case	Ld. Comb.
1 -	SPF 3	3.516"	35%	650 / 2010	2660	L	1.25D+1.5L
2 -	SPF 3	3.625"	29%	556 / 1709	2265	L	1.25D+1.5L

### **Analysis Results**

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	2504 ft-lb	2'1 1/2"	22724 ft-lb	0.110 (11%)	1.25D+1.5L	L
Unbraced	2504 ft-lb	2'1 1/2"	22724 ft-lb	0.110 (11%)	1.25D+1.5L	L
Shear	1923 lb	3'6 3/4"	9277 lb	0.207 (21%)	1.25D+1.5L	L
Perm Defl in.	0.005 (L/10742)	2'1 9/16"	0.137 (L/360)	0.030 (3%)	D	Uniform
LL Defl inch	0.012 (L/4171)	2'1 9/16"	0.137 (L/360)	0.090 (9%)	L	L
TL Defl inch	0.016 (L/3005)	2'1 9/16"	0.206 (L/240)	0.080 (8%)	D+L	L

**ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

**READ ALL NOTES ON THIS PAGE AND ON** 

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING

### **Design Notes**

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 4.5.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width.



PROFESSIONAL

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-6-0		Тор	162 lb	432 lb	0 lb	0 lb	J1
2	Point	0-9-8		Тор	127 lb	338 lb	0 lb	0 lb	J4
3	Point	1-10-0		Тор	162 lb	432 lb	0 lb	0 lb	J1
4	Point	2-1-8		Тор	127 lb	338 lb	0 lb	0 lb	J4
5	Point	3-2-0		Тор	162 lb	432 lb	0 lb	0 lb	J1

Continued on page 2...

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals

  Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

**Manufacturer Info** 

APA: PR-L318







NE0618-017 PAGE 25 OF 35



Client: Project: Address:

5/30/2018 Designer:  $\mathsf{S}\,\mathsf{B}$ 


Job Name: AMELIA 2 EL- 1 Project #:


BM3-A Forex 2.0E-3000Fb LVL

1.750" X 9.500"

2-Ply - PASSED

Level: Second Floor

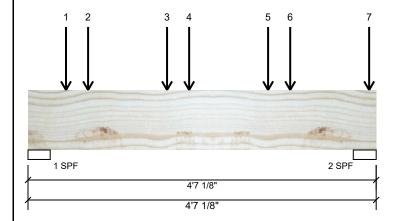



.Continued from page 1

IE	D Load Ty	pe Location	Trib Width Side	Dead	Live	Snow	Wind	Comments	
6	Point	3-5-8	Тор	127 lb	338 lb	0 lb	0 lb	J4	
7	Point	4-6-0	Тор	63 lb	169 lb	0 lb	0 lb	J1	
	Self Wei	ght		8 PLF					

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. UVI beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 PAGE 26 OF 35



Client: Project: Address:

5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #

Forex 2.0E-3000Fb LVL BM4-A

1.750" X 9.500"


3-Ply - PASSED

Brg

1

2

Level: Second Floor

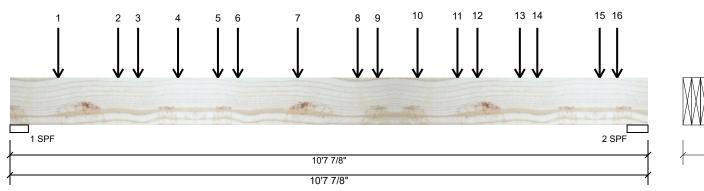

Wind

0

0

0

0

### Member Information

Type: Plies: 3 Moisture Condition: Dry Deflection LL: 360 Deflection TL: 240 Importance: Normal General Load 40 PSF Floor Live: 15 PSF Dead:

Application: Floor (Residential) Design Method:

Yes

**Building Code:** NBCC 2010 / OBC 2012

Load Sharing: Not Checked Deck: Vibration: Not Checked

### **Bearings and Factored Reactions**

Live

2952

3096

Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.688" 50% 1586 / 4428 6014 I 1.25D+1.5L 2 - SPF 4.188" 46% 1621 / 4644 6265 I 1.25D+1.5L

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	15176 ft-lb	4'9 11/16"	35449 ft-lb	0.428 (43%)	1.25D+1.5L	L
Unbraced	15176 ft-lb	4'9 11/16"	35449 ft-lb	0.428 (43%)	1.25D+1.5L	L
Shear	5599 lb	1' 7/16"	13915 lb	0.402 (40%)	1.25D+1.5L	L
Perm Defl in.	0.086 (L/1413)	5'3 9/16"	0.337 (L/360)	0.250 (25%)	D	Uniform
LL Defl inch	0.201 (L/605)	5'3 5/8"	0.337 (L/360)	0.600 (60%)	L	L
TL Defl inch	0.287 (L/424)	5'3 5/8"	0.506 (L/240)	0.570 (57%)	D+L	L

**Design Notes** 

- 1 Performed Secondary Bearing Check (CSA 086-14 6.5.7.3). Assumed point load size: beam width X 4.5.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

**Unfactored Reactions UNPATTERNED Ib (Uplift)** 

Dead

1269

1297

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING



ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Point	0-9-11		Тор	278 lb	686 lb	0 lb	0 lb	J1 J4
2	Point	1-9-11		Тор	117 lb	257 lb	0 lb	0 lb	J4
3	Point	2-1-11		Тор	162 lb	431 lb	0 lb	0 lb	J1
4	Point	2-9-11		Тор	117 lb	257 lb	0 lb	0 lb	J4
5	Point	3-5-11		Тор	162 lb	431 lb	0 lb	0 lb	J1

Continued on page 2...

### Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive

### Handling & Installation

LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code

- Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding


**Manufacturer Info** 

APA: PR-L318







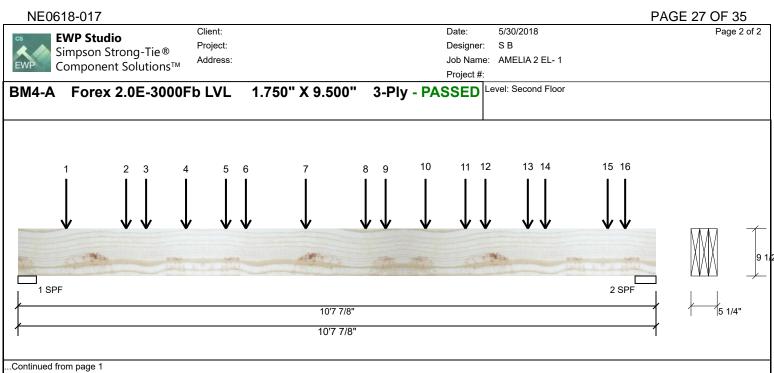

Continued	from page 1								
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
6	Point	3-9-11		Тор	117 lb	257 lb	0 lb	0 lb	J4
7	Point	4-9-11		Тор	278 lb	686 lb	0 lb	0 lb	J1 J4
8	Point	5-9-11		Тор	117 lb	257 lb	0 lb	0 lb	J4
9	Point	6-1-11		Тор	162 lb	431 lb	0 lb	0 lb	J1
10	Point	6-9-11		Тор	117 lb	257 lb	0 lb	0 lb	J4
11	Point	7-5-11		Тор	144 lb	385 lb	0 lb	0 lb	J1
12	Point	7-9-11		Тор	116 lb	255 lb	0 lb	0 lb	J4
13	Point	8-6-3		Тор	144 lb	385 lb	0 lb	0 lb	J1
14	Point	8-9-11		Тор	122 lb	299 lb	0 lb	0 lb	J4
15	Point	9-10-3		Тор	163 lb	434 lb	0 lb	0 lb	J1
16	Point	10-1-11		Тор	128 lb	340 lb	0 lb	0 lb	J4
	Self Weight				11 PLF				

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

Handling & Installation

1. UVI beams must not be cut or drilled

2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

3. Damaged Beams must not be used

4. Design assumes top edge is laterally restrained

5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318







NE0618-017 **PAGE 28 OF 35** 



Client: Project: Address:

5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Project #:

Forex 2.0E-3000Fb LVL F10-A

1.750" X 11.875"

2-Ply - PASSED Level: Second Floor

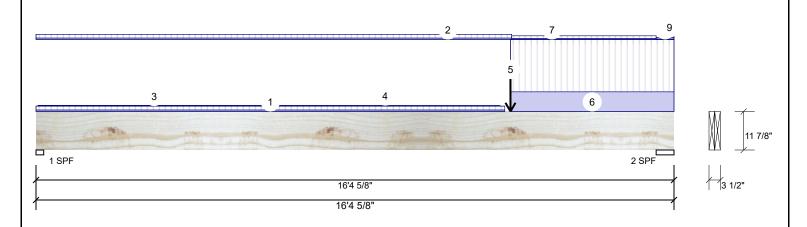

Member Infor	mation			Unfactored Reactions UNPATTERNED lb (Uplift)					
Type:	Girder	Application:	Floor (Residential)	Brg	Live	Dead	Snow	Wind	
Plies:	2	Design Method:	LSD	1	818	446	0	0	
Moisture Condition	n: Dry	Building Code:	NBCC 2010 / OBC 2012	2	2494	1160	0	0	
Deflection LL:	360	Load Sharing:	No						
Deflection TL:	240	Deck:	Not Checked						
Importance:	Normal	Vibration:	Not Checked						
General Load									
Floor Live:	40 PSF			Bearings	and Fact	ored Reactions			
Dead:	15 PSF			Bearing	Length	Cap. React D/L lb	Total Ld. Case	Ld. Comb.	
				1 - SPF	2.375"	35% 557 / 1228	1785 L	1.25D+1.5L	
				2-SPF	5.500"	44% 1450 / 3741	5191 L	1.25D+1.5L	

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	15265 ft-lb	12'2 1/4"	34261 ft-lb	0.446 (45%)	1.25D+1.5L	<u>L</u>
Unbraced	15265 ft-lb	12'2 1/4"	22688 ft-lb	0.673 (67%)	1.25D+1.5L	L
Shear	4477 lb	15'	11596 lb	0.386 (39%)	1.25D+1.5L	L
Perm Defl in.	0.145 (L/1312)	8'10 3/4"	0.528 (L/360)	0.270 (27%)	D	Uniform
LL Defl inch	0.290 (L/656)	9'	0.528 (L/360)	0.550 (55%)	L	L
TL Defl inch	0.435 (L/437)	8'11 9/16"	0.793 (L/240)	0.550 (55%)	D+L	L

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.

Tapered Start

End

Point

- 4 Top braced at bearings.
- 5 Bottom braced at bearing

5 Bollotti braceu	J								•
6 Lateral slender	rness ratio based on	full section width.							
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comment
1	Tie-In	0-0-0 to 12-0-8	(Span) 0-10-11	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 12-2-10	(Span)0-10-5	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Part. Uniform	0-0-9 to 11-11-1		Тор	2 PLF	0 PLF	0 PLF	0 PLF	

Top

Far Face

Continued on page 2...

### Notes

5

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation

0-0-10

11-11-1

12-2-4

- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  Damaged Beams must not be used
- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

1 PLF

0 PLF

862 lb

0 PLF

0 PLF

1824 lb

Manufacturer Info

READ ALL NOTES ON THIS PAGE AND ON **ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT. REFER TO MULTIPLE MEMBER TO MEMBER **CONNECTION DETAIL FOR PLY TO PLY** 

NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH

**BLOCK IS REQUIRED AT ALL** 

**POINT LOADS OVER BEARING** 

APA: PR-L318

0 PLF

0 PLF

0 lb



0 PLF

0 PI F

0 lb F8

Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400



PROFESSIONAL CHARLES

Jun 04, 2018



Page 1 of 2

PAGE 29 OF 35 NE0618-017



Client: Project: Address:

5/30/2018 Designer: SB


Job Name: AMELIA 2 EL- 1

Project #:

Forex 2.0E-3000Fb LVL F10-A

1.750" X 11.875"

2-Ply - PASSED Level: Second Floor

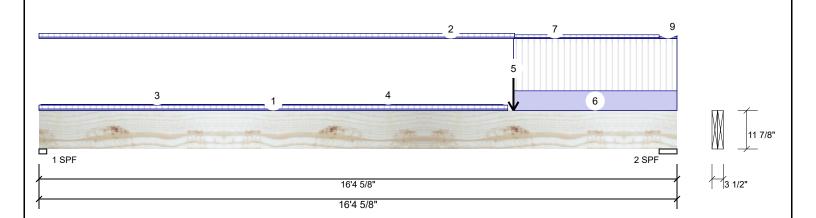

Continued fr	Continued from page 1									
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments	
6	Part. Uniform	12-2-4 to 16-4-10		Тор	90 PLF	240 PLF	0 PLF	0 PLF		
7	Tie-In	12-2-10 to 15-11-2	(Span)0-7-6	Тор	15 PSF	40 PSF	0 PSF	0 PSF		
8	Tie-In	15-11-2 to 16-4-10	(Span)0-4-5	Тор	15 PSF	40 PSF	0 PSF	0 PSF		
9	Tie-In	16-0-4 to 16-4-10	(Span)0-11-1	1 Top	15 PSF	40 PSF	0 PSF	0 PSF		
	Self Weight				10 PLF					

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL **POINT LOADS OVER BEARINGS** 

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. UVI beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400





Page 2 of 2

NE0618-017 PAGE 30 OF 35


**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:

5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #

2-Ply - PASSED Level: Second Floor 1.750" X 11.875" Forex 2.0E-3000Fb LVL F10-B

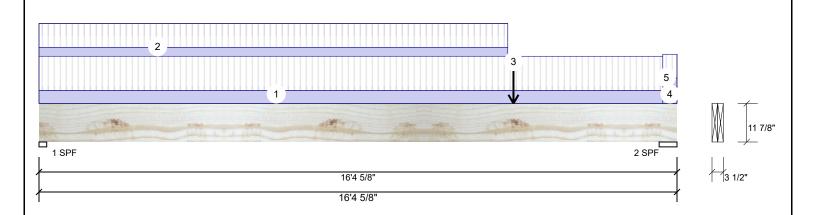

Member Inforr	nation			Unfactored Reactions UNPATTERNED lb (Uplift)					
Type:	Girder	Application:	Floor (Residential)	Brg	Live	Dead	Snow	Wind	
Plies:	2	Design Method:	LSD	1	700	368	0	0	
Moisture Condition	: Dry	Building Code:	NBCC 2010 / OBC 2012	2	1629	782	0	0	
Deflection LL:	360	Load Sharing:	No						
Deflection TL:	240	Deck:	Not Checked						
Importance:	Normal	Vibration:	Not Checked						
General Load									
Floor Live:	40 PSF			Bearings	and Fact	ored Reactions			
Dead:	15 PSF			Bearing	Length	Cap. React D/L lb	Total Ld. Case	Ld. Comb.	
				1 - SPF	2.375"	30% 460 / 1050	1511 L	1.25D+1.5L	
				2-SPF	5.500"	29% 977 / 2443	3420 L	1.25D+1.5L	

### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	12574 ft-lb	12'2 1/4"	34261 ft-lb	0.367 (37%)	1.25D+1.5L	L
Unbraced	12574 ft-lb	12'2 1/4"	22688 ft-lb	0.554 (55%)	1.25D+1.5L	L
Shear	3351 lb	15'	11596 lb	0.289 (29%)	1.25D+1.5L	L
Perm Defl in.	0.118 (L/1617)	8'10 3/8"	0.528 (L/360)	0.220 (22%)	D	Uniform
LL Defl inch	0.241 (L/788)	8'11 7/16"	0.528 (L/360)	0.460 (46%)	L	L
TL Defl inch	0.359 (L/530)	8'11 1/16"	0.793 (L/240)	0.450 (45%)	D+L	L

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Top braced at bearings.

5 Bottom	braced at bearings.							
6 Lateral s	slenderness ratio based							
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind
1	Tie-In	0-0-0 to 16-0-4	(Span)0-11-8	Тор	15 PSF	40 PSF	0 PSF	0 PSF
2	Tie-In	0-0-0 to 12-0-8	(Span)0-8-0	Тор	15 PSF	40 PSF	0 PSF	0 PSF
3	Point	12-2-4		Near Face	816 lb	1854 lb	0 lb	0 lb

816 lb 3 Point 12-2-4 Near Face Tie-In 16-0-4 to 16-4-10 (Span)0-4-0 Top 15 PSF 16-0-4 to 16-4-10 (Span)0-8-0 15 PSF 5 Tie-In Top Self Weight 10 PLF

> **Manufacturer Info** 6. For flat roofs provide proper drainage to prevent ponding

40 PSF

40 PSF

APA: PR-L318

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT. REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY

NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH

**BLOCK IS REQUIRED AT ALL** 

POINT LOADS OVER BEARING

0 PSF

0 PSF



0 PSF

0 PSF

Comment

Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400



PROFESSIONAL CHARLES

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals

  Damaged Beams must not be used

- Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

Page 1 of 1

PAGE 31 OF 35 NE0618-017




Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #:

### 2-Ply - PASSED F13-A 11.875" NJH

Level: Second Floor

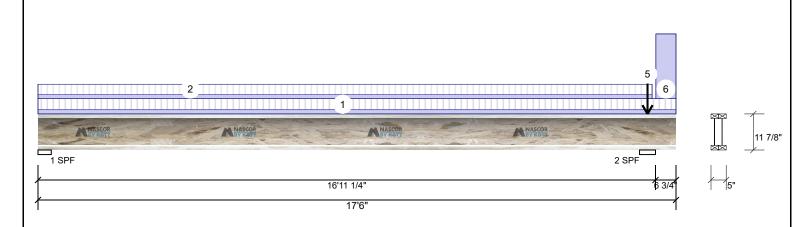

Туре:	Girder	Application:	Floor (Residential)
Plies:	2	Design Method:	LSD
Moisture Condition:	Dry	Building Code:	NBCC 2010 / OBC 2012
Deflection LL:	360	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal	Vibration:	Not Checked
General Load			
Floor Live:	40 PSF		
Dead:	15 PSF		

### **Unfactored Reactions UNPATTERNED Ib (Uplift)**

Brg	Live	Dead	Snow	Wind
1	224	82	0 (-2)	0
2	261	300	217	0

### **Bearings and Factored Reactions**

Bearing	Length	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	4.375"	12%	102 / 337	440	L_	1.25D+1.5L
2 - SPF	5.250"	24%	375 / 500	875	LL	1.25D+1.5L +0.5S

**Analysis Results** 

Member Information

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Neg Moment	-103 ft-lb	16'11 1/4"	9702 ft-lb	0.011 (1%)	1.25D+1.5S +0.5L	_L
Unbraced	-103 ft-lb	16'11 1/4"	9651 ft-lb	0.011 (1%)	1.25D+1.5S +0.5L	_L
Pos Moment	1711 ft-lb	8'4 1/2"	10780 ft-lb	0.159 (16%)	1.25D+1.5L	L_
Unbraced	1711 ft-lb	8'4 1/2"	1717 ft-lb	0.996 (100%)	1.25D+1.5L	L_
Shear	589 lb	16'11 1/4"	3186 lb	0.185 (18%)	1.25D+1.5S	_L
Perm Defl in.	0.027 (L/7357)	8'4 1/4"	0.542 (L/360)	0.050 (5%)	D	Uniform
LL Defl inch	0.076 (L/2581)	8'5 1/4"	0.542 (L/360)	0.140 (14%)	L	L_
TL Defl inch	0.102 (L/1911)	8'4 15/16"	0.813 (L/240)	0.130 (13%)	D+L	L_
LL Cant	-0.008 (2L/1791)	Rt Cant	0.200 (2L/480)	0.038 (4%)	L	L_
TL Cant	-0.010 (2L/1395)	Rt Cant	0.300 (2L/360)	0.032 (3%)	D+L	L_

**READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS** NOTE PAGE IS AN INTEGRAL PART OF THIS CALCULATION SUMMARY PAGE AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING



### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Top flange must be laterally braced at a maximum of 9'9" o.c.
- 5 Bottom flange must be laterally braced at a maximum of 10'5" o.c.

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. Noist flanges must not be out or drilled

  2. Refer to latest copy of the IJoist product information details for framing details, stifferer tables, web hole chart, bridging details, multi-ply fastening details and handling/erection details

  3. Damaged IJoists must not be used

  4. Design assumes top flange to be laterally restrained by attached sheathing or as specified in engineering notes.

- 5. Provide lateral support at bearing points to avoid

lateral displacement and rotation
6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
7. For flat roofs provide proper drainage to prevent



Nascor by Kott







NE0618-017 PAGE 32 OF 35



Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #:

11.875" 2-Ply - PASSED F13-A NJH

Level: Second Floor

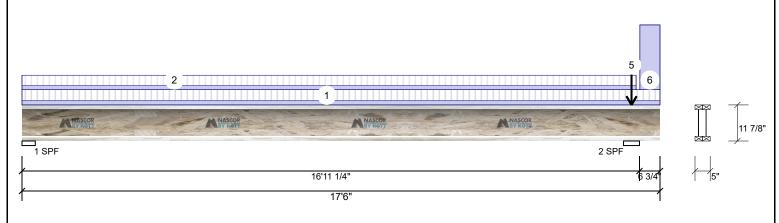

ID	Load Type	Location	Trib Width Sid	e Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 17-6-0	(Span)0-8-3 Top	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 16-10-2	(Span)0-7-13 Top	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	16-8-10	Тор	35 lb	0 lb	0 lb	0 lb	Wall Self Weight
4	Point	16-8-10	Тор	126 lb	27 lb	215 lb	0 lb	F1 F1
5	Point	16-8-10	Тор	5 lb	0 lb	0 lb	0 lb	Wall Self Weight
6	Part. Uniform	16-11-6 to 17-6-0	Тор	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS** 

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Dry service conditions, unless noted otherwise
 IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. Noist flanges must not be out or drilled

  2. Refer to latest copy of the IJoist product information details for framing details, stifferer tables, web hole chart, bridging details, multi-ply fastening details and handling/erection details

  3. Damaged IJoists must not be used

  4. Design assumes top flange to be laterally restrained by attached sheathing or as specified in engineering notes.

Provide lateral support at bearing points to avoid lateral displacement and rotation
 Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
 For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Nascor by Kott







PAGE 33 OF 35 NE0618-017




Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #:

2-Ply - PASSED F13-B 11.875" NJH

Level: Second Floor

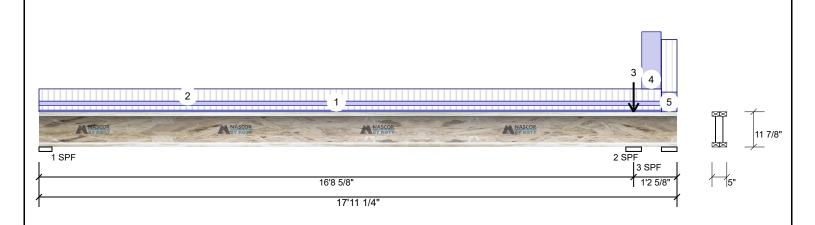

ı	Member inform	lation		
I	Type:	Girder	Application:	Floor (Residential)
	Plies:	2	Design Method:	LSD
	Moisture Condition:	Dry	Building Code:	NBCC 2010 / OBC 2012
	Deflection LL:	360	Load Sharing:	No
	Deflection TL:	240	Deck:	Not Checked
	Importance:	Normal	Vibration:	Not Checked
l	General Load			
	Floor Live:	40 PSF		
	Dead:	15 PSF		
ı				

	Brg	Live	Dead	Snow	Wind	
ı	1	171	64	0	0	
ı	2	764	335	0	0	
ı	3	0 (-494)	(-160)	0	0	

### **Bearings and Factored Reactions**

Bearing	Length	Cap. I	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF	4.375"	9%	80 / 257	337	L_	1.25D+1.5L
2 - SPF	5.250"	23%	419 / 1146	1565	LL	1.25D+1.5L
3 - SPF	5.250"	27%	-224 / -737	-961 (-961)	L_	1.25D+1.5L

Analysis Results

Member Information

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Neg Moment	-889 ft-lb	16'8 5/8"	10780 ft-lb	0.082 (8%)	1.25D+1.5L	LL
Unbraced	-889 ft-lb	16'8 5/8"	10039 ft-lb	0.089 (9%)	1.25D+1.5L	LL
Pos Moment	1135 ft-lb	7'4"	10780 ft-lb	0.105 (11%)	1.25D+1.5L	L_
Unbraced	1135 ft-lb	7'4"	1139 ft-lb	0.997 (100%)	1.25D+1.5L	L_
Shear	1095 lb	16'8 5/8"	3620 lb	0.302 (30%)	1.25D+1.5L	LL
Perm Defl in.	0.018 (L/11068)	8' 5/16"	0.547 (L/360)	0.030 (3%)	D	Uniform
LL Defl inch	0.047 (L/4149)	8' 5/16"	0.547 (L/360)	0.090 (9%)	L	L_
TL Defl inch	0.065 (L/3018)	8' 5/16"	0.821 (L/240)	0.080 (8%)	D+L	L_

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT** CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBER **CONNECTION DETAIL FOR PLY TO PLY** NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS.

### **Design Notes**

- 1 Girders are designed to be supported on the bottom edge only.
- 2 Multiple plies must be fastened together as per manufacturer's details.
- 3 Top loads must be supported equally by all plies.
- 4 Tie-down connection required at bearing 3 for uplift 961 lb (Combination 1.25D+1.5L, Load Case L\_).
- 5 Top flange must be laterally braced at a maximum of 11'6" o.c.
- 6 Bottom flange must be laterally braced at a maximum of 10'5" o.c.

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 17-6-0	(Span)0-3-11	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Tie-In	0-0-0 to 17-6-0	(Span)0-10-5	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
3	Point	16-8-10		Тор	31 lb	0 lb	0 lb	0 lb	Wall Self Weight

Continued on page 2...

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   IJoist not to be treated with fire retardant or corrosive
- Handling & Installation
- anoling & installation
  Lioist flanges must not be cut or drilled
  Refer to latest copy of the IJoist product information
  details for framing details, sulffener tables, web hole
  chart, bridging details, multi-hyl fastening details and
  handling/erection details
  Damaged IJoist must not be used
  Design assumes top flange to be laterally restrained
  by attached sheathing or as specified in engineering
  notes.
- 5. Provide lateral support at bearing points to avoid

alteral displacement and rotation
6. Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
7. For flat roofs provide proper drainage to prevent

Manufacturer Info

Nascor by Kott



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400

Jun 049 2018





NE0618-017 **PAGE 34 OF 35** 



Client: Project: Address:


5/30/2018 Designer: SB

Job Name: AMELIA 2 EL- 1

Project #:

2-Ply - PASSED F13-B NJH 11.875"

Level: Second Floor

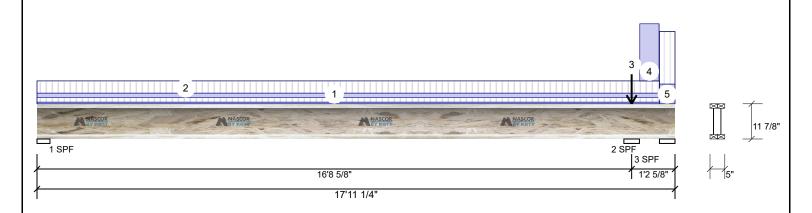

.Continued from page 1

ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
4	Part. Uniform	16-11-6 to 17-5-14		Тор	80 PLF	0 PLF	0 PLF	0 PLF	Wall Self Weight
5	Tie-In	17-6-0 to 17-11-4	(Span)3-8-3	Тор	15 PSF	40 PSF	0 PSF	0 PSF	

REFER TO MULTIPLE MEMBER TO MEMBER CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH **BLOCK IS REQUIRED AT ALL** POINT LOADS OVER BEARING

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   IJoist not to be treated with fire retardant or corrosive

### Handling & Installation

- Handling & Installation

  1. Noist flanges must not be out or drilled

  2. Refer to latest copy of the IJoist product information details for framing details, stifferer tables, web hole chart, bridging details, multi-ply fastening details and handling/erection details

  3. Damaged IJoists must not be used

  4. Design assumes top flange to be laterally restrained by attached sheathing or as specified in engineering notes.

Provide lateral support at bearing points to avoid lateral displacement and rotation
 Web stiffeners for point load as shown Minimum point load bearing length>= 3.5 inches
 For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Nascor by Kott







NE0618-017 PAGE 35 OF 35


**EWP Studio** Simpson Strong-Tie® Component Solutions™ Client: Project: Address:

5/30/2018 Designer: SB Job Name: AMELIA 2 EL- 1

Project #:

1.750" X 11.875" 2-Ply - PASSED F8-A Forex 2.0E-3000Fb LVL

Level: Second Floor

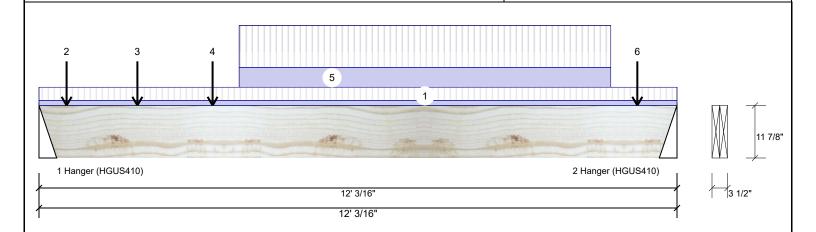

- 1					
ĺ	Type:	Girder	Application:	Floor (Residential)	Brg
١	Plies:	2	Design Method:	LSD	1
١	Moisture Condition:	Dry	Building Code:	NBCC 2010 / OBC 2012	2
١	Deflection LL:	360	Load Sharing:	No	
١	Deflection TL:	240	Deck:	Not Checked	
١	Importance:	Normal	Vibration:	Not Checked	
١	General Load				
١	Floor Live:	40 PSF			Bearing
١	Dead:	15 PSF			Bearing
١					1 -
					11

Unfactored Reactions UNPATTERNED Ib (Up	olift)
---	--------

Brg	Live	Dead	Snow	vvina
1	1854	816	0	0
2	1824	862	0	0

### gs and Factored Reactions

Bearing	Length	Cap. F	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - Hanger	4.000"	37%	1021 / 2780	3801	L	1.25D+1.5L
2 - Hanger	4.000"	37%	1078 / 2736	3814	L	1.25D+1.5L

Analysis Results

Member Information

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	10792 ft-lb	6' 7/16"	34261 ft-lb	0.315 (31%)	1.25D+1.5L	L
Unbraced	10792 ft-lb	6' 7/16"	28134 ft-lb	0.384 (38%)	1.25D+1.5L	L
Shear	3604 lb	1'3 1/8"	11596 lb	0.311 (31%)	1.25D+1.5L	L
Perm Defl in.	0.065 (L/2121)	6' 7/16"	0.383 (L/360)	0.170 (17%)	D	Uniform
LL Defl inch	0.140 (L/983)	6' 1/8"	0.383 (L/360)	0.370 (37%)	L	L
TL Defl inch	0.205 (L/671)	6' 1/4"	0.574 (L/240)	0.360 (36%)	D+L	L

READ ALL NOTES ON THIS PAGE AND ON ENGINEERING NOTE PAGE ENP-2. THIS NOTE PAGE IS AN INTEGRAL PART OF THIS **CALCULATION SUMMARY PAGE AS IT** CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

REFER TO MULTIPLE MEMBER TO MEMBI CONNECTION DETAIL FOR PLY TO PLY NAILING OR BOLTING REQUIREMENTS.

PASS THRU FRAMING SQUASH BLOCK IS REQUIRED AT ALL POINT LOADS OVER BEARINGS

### **Design Notes**

- 1 Fill all hanger nailing holes.
- 2 Girders are designed to be supported on the bottom edge only.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on full section width.

/ Lateral Sien	demess rado based c	on full section width.							
ID	Load Type	Location	Trib Width	Side	Dead	Live	Snow	Wind	Comments
1	Tie-In	0-0-0 to 12-0-3	(Span)3-9-7	Тор	15 PSF	40 PSF	0 PSF	0 PSF	
2	Point	0-6-4		Near Face	90 lb	240 lb	0 lb	0 lb	J4
3	Point	1-10-4		Near Face	124 lb	330 lb	0 lb	0 lb	J4
4	Point	3-3-4		Near Face	109 lb	290 lb	0 lb	0 lb	J4
5	Part. Uniform	3-9-4 to 10-9-4		Near Face	113 PLF	240 PLF	0 PLF	0 PLF	
6	Point	11-3-4		Near Face	109 lb	227 lb	0 lb	0 lb	J4
	Self Weight				10 PLF				

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals

  Damaged Beams must not be used

Design assumes top edge is laterally restrained
Provide lateral support at bearing points to avoid
lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

APA: PR-L318



Kott Lumber Company 14 Anderson Blvd, Ontario Canada L4A 7X4 905-642-4400

PROFESSIONAL

**EL-MASRI** 





Page 1 of 1