

Schedule 1: Designer Information

Use one form for each individual who reviews and takes responsibility for design activities with respect to the project.

A. Project Information			
Building number, street name			Unit no.
Municipality BRAMPTON			Postal code
Plan number/ other description			Lot/con.
B. Individual who reviews and takes responsibility for design activities			
Name MICHAEL O'ROURKE		Firm HVAC DESIGNS LTD.	
Street address 375 FINLEY AVE		Unit no. 202	Lot/con. N/A
Municipality AJAX	Postal code L1S 2E2	Province ONTARIO	E-mail info@hvacdesigns.ca
Telephone number (905) 619-2300	Fax number (905) 619-2375	Cell number ()	
C. Design activities undertaken by individual identified in Section B. [Building Code Table 3.5.2.1 OF Division C]			
☐ House ☐ Small Buildings ☐ Large Buildings ☐ Complex Buildings ☒ HVAC – House ☐ Building Services ☐ Detection, Lighting and Power ☐ Fire Protection ☐ Building Structural ☐ Plumbing – House ☐ Plumbing – All Buildings ☐ On-site Sewage Systems			
Description of designer's work HEAT LOSS / GAIN CALCULATIONS DUCT SIZING RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY RESIDENTIAL SYSTEM DESIGN per CSA-F280-12		Model: LIANA 1 LOT 28 Project: GRANELLI HOMES CORP	
D. Declaration of Designer			
I, <u>MICHAEL O'ROURKE</u> (print name)		declare that (choose one as appropriate):	
☐ I review and take responsibility for the design work on behalf of a firm registered under subsection 3.2.4. of Division C, of the Building Code. I am qualified, and the firm is registered, in the appropriate classes/categories. Individual BCIN: _____ Firm BCIN: _____			
☒ I review and take responsibility for the design and am qualified in the appropriate category as an "other designer" under subsection 3.2.5. of Division C, of the Building Code. Individual BCIN: <u>19669</u> Basis for exemption from registration and qualification: <u>O.B.C SENTENCE 3.2.4.1 (4)</u>			
☐ The design work is exempt from the registration and qualification requirements of the Building Code. Basis for exemption from registration and qualification: _____			
I certify that:			
1. The information contained in this schedule is true to the best of my knowledge. 2. I have submitted this application with the knowledge and consent of the firm.			
April 8, 2019 Date		 Signature of Designer	

NOTE:

- For the purposes of this form, "individual" means the "person" referred to in Clause 3.2.4.7(1) d) of Division C, Article 3.2.5.1. of Division C, and all other persons who are exempt from qualification under Subsections 3.2.4. and 3.2.5. of Division C.
- Schedule 1 is not required to be completed by a holder of a license, temporary license, or a certificate of authorization, issued by the Ontario Association of Architects. Schedule 1 is also not required to be completed by a holder of a license to practise, a limited license to practise, or a certificate of authorization, issued by the Association of Professional Engineers of Ontario.

Application for a Permit Construct or Demolish – Effective January 1, 2015

[illegible]

I REVIEW AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED IN THE APPROPRIATE CATEGORY AS AN "OTHER DESIGNER" UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE

SITE NAME: GRANELLI HOMES CORP BUILDER: GREENYORK HOMES LOT 28 TYPE: LIANA 1 DATE: Apr-19 GFA: 2041 LO# 81165

HEATING CFM 785 COOLING CFM 785
TOTAL HEAT LOSS 40,791 TOTAL HEAT GAIN 23,654
AIR FLOW/RATE CFM 19.24 AIR FLOW RATE CFM 33.19

AFUE = 96 %
INPUT (BTU/H) = 60,000
OUTPUT (BTU/H) = 58,000

DESIGN CFM = 785
CFM @ 8" E.S.P.

TEMPERATURE RISE 68 °F

ROOM NAME	1	2	3	4	5	6	7	8	10	13	14	16	17	18	19	20	21	23	24
MBR	1.35	1.65	0.34	0.34	1.73	1.00	1.64	1.64	1.35	2.02	2.02	2.02	2.02	2.32	3.17	3.17	3.43	3.43	3.43
RM LOSS MBH	26	32	7	33	19	31	19	31	26	39	39	39	45	13	61	61	66	66	66
CFM PER RUN HEAT	1.70	1.02	0.08	1.75	1.66	1.61	1.61	1.61	1.70	2.18	2.18	2.18	2.18	1.09	1.14	1.14	0.46	0.46	0.46
RM GAIN MBH	56	34	3	58	55	53	15	53	56	72	72	72	36	10	38	38	15	15	15
CFM PER RUN COOLING	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17
ACTUAL DUCT LGH	29	52	21	38	31	37	20	45	40	20	30	25	18	15	28	30	25	29	12
EQUIVALENT LENGTH	165	170	150	155	205	125	170	145	145	120	130	140	130	130	140	120	120	160	140
TOTAL EFFECTIVE LENGTH	184	222	171	193	236	162	190	190	185	140	160	175	148	145	168	150	145	189	152
ADJUSTED PRESSURE	0.09	0.08	0.1	0.09	0.07	0.11	0.09	0.09	0.09	0.12	0.11	0.1	0.12	0.12	0.1	0.11	0.12	0.09	0.11
ROUND DUCT SIZE	5	4	4	6	5	5	4	5	5	5	5	5	4	4	5	5	5	5	5
HEATING VELOCITY (ft/min)	191	367	80	168	140	228	218	228	191	286	286	286	516	149	448	448	485	485	485
COOLING VELOCITY (ft/min)	411	390	34	296	404	389	172	389	411	529	529	529	3X10	3X10	3X10	3X10	3X10	3X10	3X10
OUTLET GRILL SIZE	3X10	3X10	3X10	4X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10	3X10
TRUNK	C	A	C	E	E	E	E	E	C	A	A	C	C	C	D	D	A	C	E

25	ROOM NAME	BAS
3.43	RM LOSS MBH	
66	CFM PER RUN HEAT	
0.46	RM GAIN MBH	
15	CFM PER RUN COOLING	
0.17	ADJUSTED PRESSURE	
30	ACTUAL DUCT LGH	
120	EQUIVALENT LENGTH	
150	TOTAL EFFECTIVE LENGTH	
0.11	ADJUSTED PRESSURE	
5	ROUND DUCT SIZE	
485	HEATING VELOCITY (ft/min)	
110	COOLING VELOCITY (ft/min)	
3X10	OUTLET GRILL SIZE	
D	TRUNK	

TYPE: LIANA 1
SITE NAME: GRANELLU HOMES CORP

LO # 81165
LOT 28

RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY
COMBUSTION APPLIANCES 9.32.3.1(1)

- a) ☒ Direct vent (sealed combustion) only
- b) ☐ Positive venting induced draft (except fireplaces)
- c) ☐ Natural draft, B-vent or induced draft gas fireplace
- d) ☐ Solid Fuel (including fireplaces)
- e) ☐ No Combustion Appliances

HEATING SYSTEM

- ☒ Forced Air ☐ Non Forced Air
- ☐ Electric Space Heat

HOUSE TYPE 9.32.1(2)

- ☒ I Type a) or b) appliance only, no solid fuel
- ☐ II Type I except with solid fuel (including fireplaces)
- ☐ III Any Type c) appliance
- ☐ IV Type I, or II with electric space heat
- ☐ Other: Type I, II or IV no forced air

SYSTEM DESIGN OPTIONS O.N.H.W.P.

- ☐ 1 Exhaust only/Forced Air System
- ☐ 2 HRV with Ducting/Forced Air System
- ☒ 3 HRV Simplified/connected to forced air system
- ☐ 4 HRV with Ducting/non forced air system
- ☐ Part 6 Design

TOTAL VENTILATION CAPACITY 9.32.3.3(1)

Basement + Master Bedroom	2	@ 21.2 cfm	42.4	cfm
Other Bedrooms	3	@ 10.6 cfm	31.8	cfm
Kitchen & Bathrooms	5	@ 10.6 cfm	53	cfm
Other Rooms	4	@ 10.6 cfm	42.4	cfm
Table 9.32.3.A.		TOTAL	169.6	cfm

PRINCIPAL VENTILATION CAPACITY REQUIRED 9.32.3.4.(1)

1	Bedroom	31.8	cfm
2	Bedroom	47.7	cfm
3	Bedroom	63.6	cfm
4	Bedroom	79.5	cfm
5	Bedroom	95.4	cfm
	TOTAL	79.5	cfm

SUPPLEMENTAL VENTILATION CAPACITY 9.32.3.5.

Total Ventilation Capacity	169.6	cfm
Less Principal Ventil. Capacity	79.5	cfm
Required Supplemental Capacity	90.1	cfm

PRINCIPAL EXHAUST FAN CAPACITY

Model: LIFE BREATH RNC5-HEX Location: BSMT
79.5 cfm 3.0 sones ☒ HVI Approved

PRINCIPAL EXHAUST HEAT LOSS CALCULATION

CFM		ΔT °F		FACTOR		% LOSS
79.5 CFM	X	74 F	X	1.08	X	0.24

SUPPLEMENTAL FANS

Location	Model	cfm	HVI	Sones
ENS	QTXEN050C	50	✓	0.3
BATH	QTXEN050C	50	✓	0.3
LAUN	QTXEN050C	50	✓	0.3
W/R	QTXEN050C	50	✓	0.3

HEAT RECOVERY VENTILATOR 9.32.3.11.

Model: LIFE BREATH RNC5-HEX	
108 cfm high	59 cfm low
76 % Sensible Efficiency	☒ HVI Approved
@ 32 deg F (0 deg C)	

LOCATION OF INSTALLATION

Lot: Concession
Township: Plan:
Address:
Roll # Building Permit #

BUILDER: GREENYORK HOMES

Name:
Address:
City:
Telephone #: Fax #:

INSTALLING CONTRACTOR

Name:
Address:
City:
Telephone #: Fax #:

DESIGNER CERTIFICATION

I hereby certify that this ventilation system has been designed in accordance with the Ontario Building Code.

Name: HVAC Designs Ltd.

Signature: *Michael O'Rourke*

HRAI # 001820

Date: April-19

HEAT LOSS AND GAIN SUMMARY SHEET

MODEL: LIANA 1	LOT 28	BUILDER: GREENYORK HOMES
SFQT: 2041	LO# 81165	SITE: GRANELLI HOMES CORP

DESIGN ASSUMPTIONS

HEATING	°F	COOLING	°F
OUTDOOR DESIGN TEMP.	-2	OUTDOOR DESIGN TEMP.	86
INDOOR DESIGN TEMP.	72	INDOOR DESIGN TEMP. (MAX 75°F)	75

BUILDING DATA

ATTACHMENT:	DETACHED	# OF STORIES (+BASEMENT):	3
FRONT FACES:	EAST	ASSUMED (Y/N):	Y
AIR CHANGES PER HOUR:	3.57	ASSUMED (Y/N):	Y
AIR TIGHTNESS CATEGORY:	AVERAGE	ASSUMED (Y/N):	Y
WIND EXPOSURE:	SHELTERED	ASSUMED (Y/N):	Y
HOUSE VOLUME (ft³):	28440.0	ASSUMED (Y/N):	Y
INTERNAL SHADING:	BLINDS/CURTAINS	ASSUMED OCCUPANTS:	5
INTERIOR LIGHTING LOAD (Btu/h/ft²):	1.27	DC BRUSHLESS MOTOR (Y/N):	Y
FOUNDATION CONFIGURATION	BCIN_1	DEPTH BELOW GRADE:	6.0 ft
LENGTH: 46.0 ft	WIDTH: 30.0 ft	EXPOSED PERIMETER:	152.0 ft

2012 OBC - COMPLIANCE PACKAGE

Component	Compliance Package A1	
	Nominal	Min. Eff.
Ceiling with Attic Space Minimum RSI (R)-Value	60	59.22
Ceiling Without Attic Space Minimum RSI (R)-Value	31	27.65
Exposed Floor Minimum RSI (R)-Value	31	29.80
Walls Above Grade Minimum RSI (R)-Value	22	17.03
Basement Walls Minimum RSI (R)-Value	20 ci	21.12
Below Grade Slab Entire surface > 600 mm below grade Minimum RSI (R)-Value	-	-
Edge of Below Grade Slab ≤ 600 mm Below Grade Minimum RSI (R)-Value	10	10
Heated Slab or Slab ≤ 600 mm below grade Minimum RSI (R)-Value	10	11.13
Windows and Sliding Glass Doors Maximum U-Value	0.28	-
Skylights Maximum U-Value	0.49	-
Space Heating Equipment Minimum AFUE	0.96	-
HRV Minimum Efficiency	75%	-
Domestic Hot Water Heater Minimum EF	0.8	-


INDIVIDUAL BCIN: 19669

MICHAEL O'ROURKE



Residential Foundation Thermal Load Calculator

Supplemental tool for CAN/CSA-F280

Weather Station Description		
Province:	Ontario	
Region:	Brampton	
Site Description		
Soil Conductivity:	Normal conductivity: dry sand, loam, clay	
Water Table:	Normal (7-10 m, 23-33 ft)	
Foundation Dimensions		
Floor Length (m):	14.0	 Insulation Configuration
Floor Width (m):	9.1	
Exposed Perimeter (m):	0.0	
Wall Height (m):	2.7	
Depth Below Grade (m):	1.83	
Window Area (m ²):	1.4	
Door Area (m ²):	1.9	
Radiant Slab		
Heated Fraction of the Slab:	0	
Fluid Temperature (°C):	33	
Design Months		
Heating Month	1	
Foundation Loads		
Heating Load (Watts):		1515

TYPE: LIANA 1
LO# 81165

LOT 28


Air Infiltration Residential Load Calculator

Supplemental tool for CAN/CSA-F280

Weather Station Description				
Province:	Ontario			
Region:	Brampton			
Weather Station Location:	Open flat terrain, grass			
Anemometer height (m):	10			
Local Shielding				
Building Site:	Suburban, forest			
Walls:	Heavy			
Flue:	Heavy			
Highest Ceiling Height (m):	6.71			
Building Configuration				
Type:	Detached			
Number of Stories:	Two			
Foundation:	Full			
House Volume (m ³):	805.3			
Air Leakage/Ventilation				
Air Tightness Type:	Present (1961-) (3.57 ACH)			
Custom BDT Data:	ELA @ 10 Pa.	1073.5 cm ²		
	3.57	ACH @ 50 Pa		
Mechanical Ventilation (L/s):	Total Supply	Total Exhaust		
	37.5	37.5		
Flue Size				
Flue #:	#1	#2	#3	#4
Diameter (mm):	0	0	0	0
Natural Infiltration Rates				
Heating Air Leakage Rate (ACH/H):	0.325			
Cooling Air Leakage Rate (ACH/H):	0.106			

TYPE: LIANA 1
LO# 81165

LOT 28

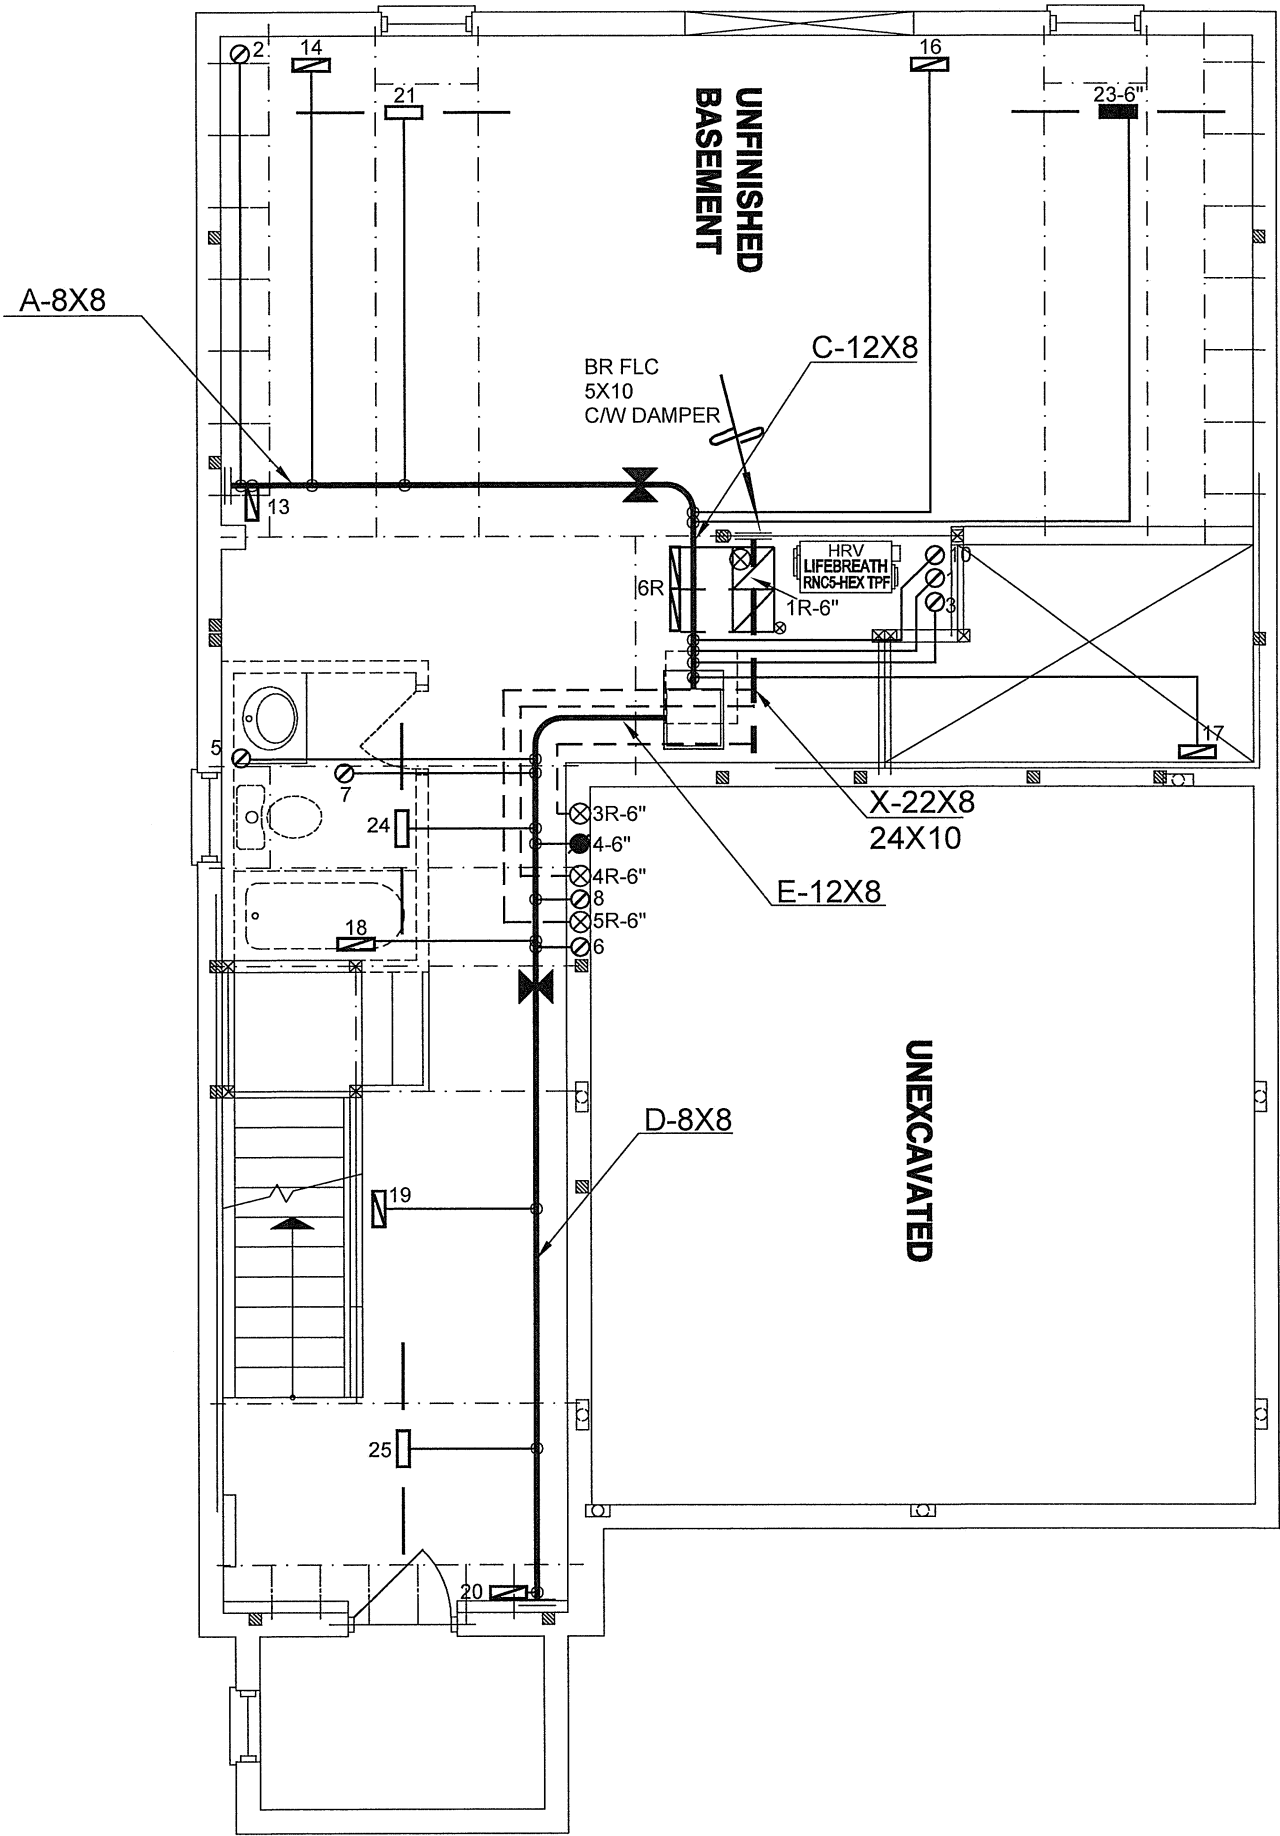

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.

Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

LOT 28


CSA-F280-12

PACKAGE A1

HVAC LEGEND								3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.		
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	REVISED AS PER MARKUPS	APR/2019
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client		HVACDESIGNS LTD. 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services	HEAT LOSS 42320 BTU/H		# OF RUNS S/A R/A FANS			Sheet Title		
GREENYORK HOMES			UNIT DATA		3RD FLOOR			BASEMENT		
Project Name GRANELLI HOMES CORP BRAMPTON, ONTARIO			MAKE CARRIER		2ND FLOOR			9 4 3		
			MODEL 59SP5A-60-12		1ST FLOOR			7 1 3		
			INPUT 60 MBTU/H		BASEMENT			4 1 0		
LIANA 1 - LOT 28 2041 sqft		OUTPUT 58 MBTU/H		ALL S/A DIFFUSERS 4 "x10" UNLESS NOTED OTHERWISE ON LAYOUT. ALL S/A RUNS 5"Ø UNLESS NOTED OTHERWISE ON LAYOUT. UNDERCUT DOORS 1" min. FOR R/A					Date	JAN/2019
		COOLING 2.0 TONS							Scale	3/16" = 1'-0"
		FAN SPEED 785 cfm @ 0.6" w.c.							BCIN# 19669	
									LO#	81165
Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.										

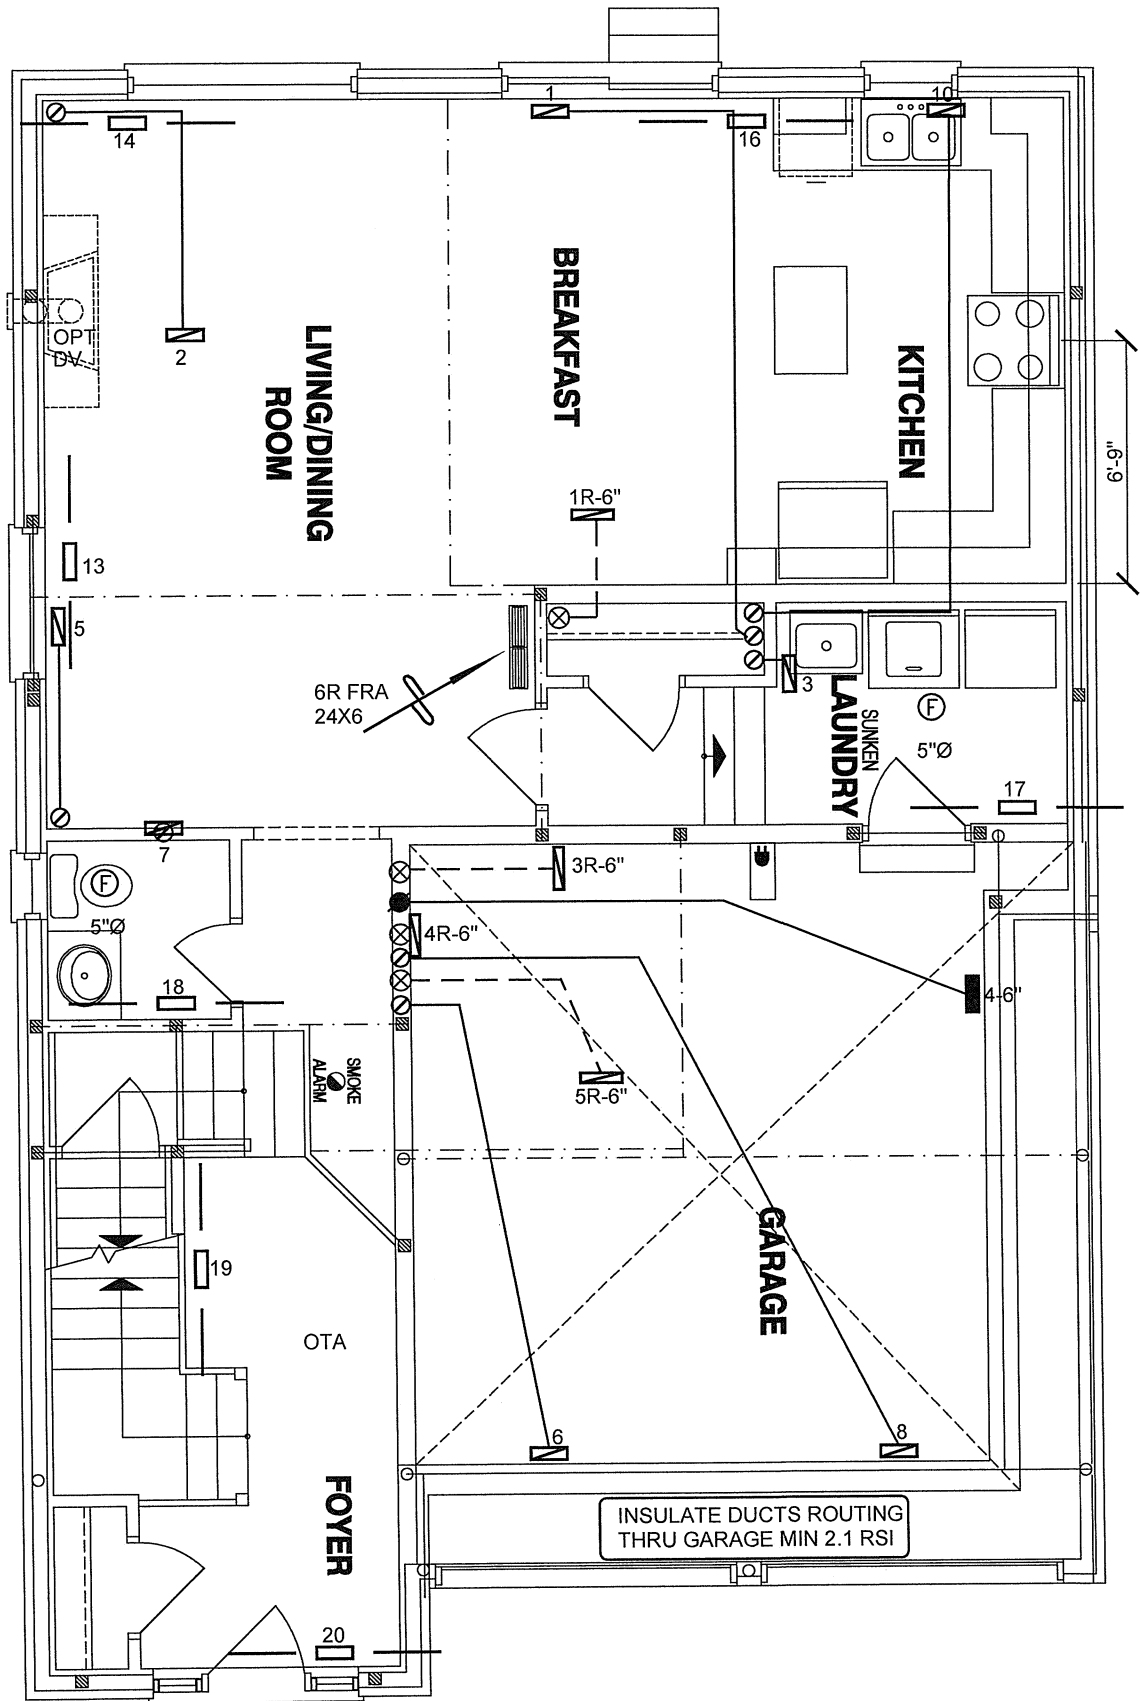

I MICHAEL O'ROURKE HAVE REVIEW
AND TAKE RESPONSIBILITY FOR THE
DESIGN WORK AND AM QUALIFIED
UNDER DIVISION C, 3.2.5 OF THE
BUILDING CODE.


Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

LOT 28
CSA-F280-12
PACKAGE A1

HVAC LEGEND						3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	2.
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	1. REVISED AS PER MARKUPS APR/2019
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	No. Description Date
REVISIONS								

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client GREENYORK HOMES		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services	Sheet Title FIRST FLOOR HEATING LAYOUT	
Project Name GRANELLI HOMES CORP BRAMPTON, ONTARIO			Date JAN/2019	
LIANA 1 - LOT 28 2041 sqft		Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Scale 3/16" = 1'-0"	
			BCIN# 19669	
		LO# 81165		

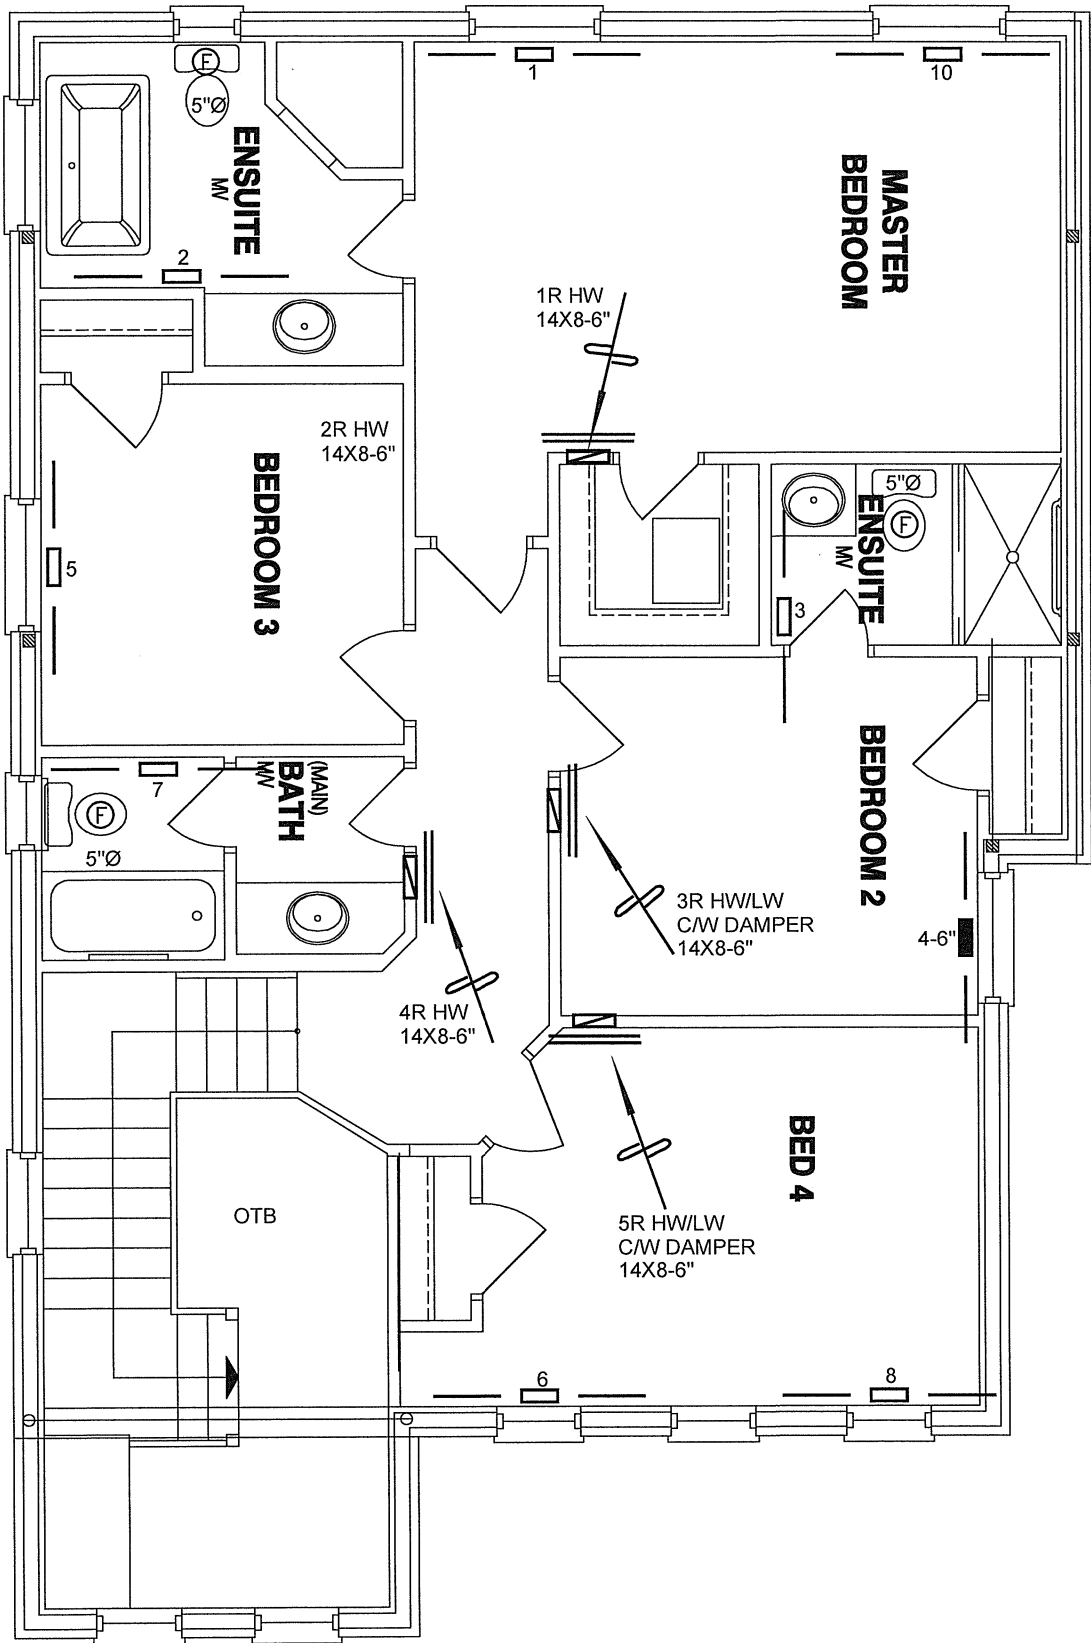

LOT 28
CSA-F280-12
PACKAGE A1

I MICHAEL O'ROURKE HAVE REVIEWED AND TAKE RESPONSIBILITY FOR THE DESIGN WORK AND AM QUALIFIED UNDER DIVISION C, 3.2.5 OF THE BUILDING CODE.
Michael O'Rourke
Michael O'Rourke, BCIN# 19669
HVAC DESIGNS LTD.

HVAC LEGEND								3.		
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	2.		
	SUPPLY AIR GRILLE		6" SUPPLY AIR BOOT ABOVE		14"x8" RETURN AIR GRILLE		RETURN AIR STACK ABOVE	1.	REVISED AS PER MARKUPS	APR/2019
	SUPPLY AIR GRILLE 6" BOOT		SUPPLY AIR STACK FROM 2nd FLOOR		30"x8" RETURN AIR GRILLE		RETURN AIR STACK 2nd FLOOR	No.	Description	Date
	SUPPLY AIR BOOT ABOVE		6" SUPPLY AIR STACK 2nd FLOOR		FRA- FLOOR RETURN AIR GRILLE		REDUCER	REVISIONS		

ALL DRAWINGS, CALCULATIONS AND SPECIFICATIONS ARE THE PROPERTY OF HVAC DESIGNS LTD.© AND MAY NOT BE REPRODUCED, MODIFIED OR ALTERED WITHOUT EXPRESSED WRITTEN CONSENT. THE DRAWINGS ARE DATED AND USE OF THESE DRAWINGS AFTER ONE YEAR FROM THE DATED NOTED IS NOT AUTHORIZED. CONTRACTOR SHALL CHECK ALL CONDITIONS BEFORE PROCEEDING WITH WORK. LATEST MUNICIPAL APPROVED DRAWINGS ONLY TO BE USED DURING INSTALLATION OF HEATING SYSTEM. HVAC DESIGNS LTD. IS NOT LIABLE FOR ANY CLAIMS ARISING FROM UNAUTHORIZED USE OF THE DRAWINGS OR FROM ANY CHANGES TO ACCEPTED STANDARDS AND/OR THE ONTARIO BUILDING CODE.

Client GREENYORK HOMES		 375 Finley Ave. Suite 202 - Ajax, Ontario L1S 2E2 Tel. 905.619.2300 - 905.420.5300 Fax 905.619.2375 Email: info@hvacdesigns.ca Web: www.hvacdesigns.ca Specializing in Residential Mechanical Design Services Installation to comply with the latest Ontario Building Code. All supply branch outlets shall be equipped with a manual balancing damper. Ductwork which passes through the garage or unheated spaces shall be adequately insulated and be gas-proofed.	Sheet Title SECOND FLOOR HEATING LAYOUT	
Project Name GRANELLI HOMES CORP BRAMPTON, ONTARIO			Date JAN/2019	
LIANA 1 - LOT 28 2041 sqft			Scale 3/16" = 1'-0"	
			BCIN# 19669	
			LO#	81165