



Sales Selection Sheet

Wallaceton

SCHEDULE 'E'

11 of 44

PURCHASER: Robert Smith

TEL: RES.: 647-532-2234

LOT / UNIT	PHASE	MODEL
9	1	25-2500 C The Bridgeport

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	FIVE APPLIANCES: SS FRIDGE, STOVE, CHIMNEY HOOD FAN, DISHWASHER, WHITE FRONT LOAD WASHER/DRYER (SINGLES)	Qty: 1
21,100	Note: SPECS PAGES 33-44	

MISC.

2	FINISHED LOWER LEVEL-792 SQ FT (THE BRIDGEPORT)	Qty: 1
21,099	Note:	
3	DECOR UPGRADES PAGES 1-10	Qty: 1
21,101	Note:	
4	FIVE HUNDRED DOLLARS (\$500.00) BY CHEQUE ON CLOSING TO PURCHASER OF LOT 29 NUGGET COURT, WHITBY AND FIVE HUNDRED DOLLARS (\$500.00) TO PURCHASERS OF LOT 9 (NO CASH VALUE)	Qty: 1
21,102	Note:	
5	FIVE THOUSAND DOLLARS (\$5,000.00) AT DECOR (NO CASH VALUE) AS PER SCHEDULE E	Qty: 1
21,119	Note:	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

TAX#:

PREPARED BY: Marilyn Rosen

PE 183-1

Invoice.rpt 28may19

Initials: RS



PURCHASER: Robert Smith

Sales Selection Sheet

Wallaceton

Schedule 'E'

20644

TEL: RES.: 647-532-2234

LOT / UNIT	PHASE	MODEL
9	1	25-2500 C The Bridgeport

Payment Summary	
<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

PURCHASER:


Robert Smith

20-Mar-20
DATE

20-Mar-20
DATE

Decon Consultant

- APPROVED -



-03- 23 2020

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Marilyn Rosen

PE 183-2

Slrvice rpt 28may19

Customer Colours


95

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

3 of 4

Kitchen/Servery

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD*** 
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	5724	QT.CD.SGR.0306.BR-Colour and Dimension Bright-Silver Grey-3 x 6 ***STD***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3060	HORIZONTAL BRICK ***STD*** 
HoodFan	9117	SCB50030-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS PAGES 8-9 RE SSS
Appliances	9117	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8", Ice Waterline Rough-In is included.
Appliances	9117	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	9117	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after

Comment

Opt. Servery Upper

Cabinet - Uppers	1111	N/A *****
Cabinet Hardware	1111	N/A *****

Comment

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

For 44

Kitchen/Breakfast/Servery

Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***g***
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****

Comment

Foyer

Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch 5 Page 26 ***2***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

Comment

Laundry Room

Flooring	5480	GE.CM.SIL.1313-Corte Milla-Silver-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Comment

Laundry Room Opt.

Cabinet - Uppers	1111	N/A *****
------------------	------	-----------

Customer Colours

95

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

Cabinet Hardware

1111

N/A *****

Comment

Mud Room

Flooring

8913

UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile
Direction on Sketch 5 Page 26 ****2***

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3050

SIDE TO SIDE ***STD***

Comment

Powder Room

Flooring

8913

UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile
Direction on Sketch 5 Page 26 ****2***

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3050

SIDE TO SIDE ***STD***

Plumbing Fixture (Colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Dining Room/Hall

Flooring

7502

Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
1/4 inch ***STD***

Comment

Great Room

Flooring

7502

Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
1/4 inch ***STD***

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42

Locked:

Closed:

16 of 44

Comment

Upper Hall

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Finished Basement Foyer

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Opt. Finished Basement (Rec) Room/Hall

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Master Bedroom

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Bedroom 2

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Bedroom 3

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

1702/4

Comment

Bedroom 4

Flooring

7630 T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Ensulte 4

Cabinet Colour/Style

9166 Viking III-CHARLESTON-ORCHID-3DL ***STD***

Countertop

8796 6698-46-Countertop-PALOMA POLAR ETCHINGS
FINISH-Formica ***STD***

Countertop Edge

1111 N/A *****

Cabinet Hardware

2086 9677-HARDWARE ***STD***

Floor Tile

5480 GE.CM.SIL.1313-Corte Milia-Silver-13 x 13, ***STD***

Floor Tile Grout

2225 Grout-(27) Silver ***STD***

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Plumbing Fixture (colour)

1737 Plumbing Fixtures-WHITE ***STD***

Wall Tile

9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Wall Tile Grout

2226 Grout-(00) White ***STD***

Wall Tile Pattern

3070 HORIZONTAL STACKED ***STD***

Comment

Master Ensulte

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

18044

Cabinet Colour/Style	9169	Viking III-CHARLESTON-NAVY BLUE-3DL ***STD***												
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***												
Countertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1*** 												
Cabinet Hardware	2086	9677-HARDWARE ***STD***												
Floor Tile	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***												
Floor Tile Grout	2225	Grout-(27) Silver ***STD***												
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***												
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***												
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***												
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***												
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***												
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***												
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD*** <table border="1" data-bbox="1862 701 2032 917"><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***												
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***												
Comment														

Shared Bathroom

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
----------------------	------	--

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

19 of 24

Countertop 8801 P-344 LM-Countertop-INUKSHUK GREY-Arborite ***STD***

Countertop Edge 1111 N/A *****

Cabinet Hardware 2086 9677-HARDWARE ***STD***

Flooring 2086 GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout 2225 Grout-(27) Silver ***STD***

Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

Wall Tile 9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Wall Tile Grout 2226 Grout-(00) White ***STD***

Shared Bathroom Floor Tile Pattern 3070 HORIZONTAL STACKED ***STD***

Plumbing Fixture (Colour) 1737 Plumbing Fixtures-WHITE ***STD***

Comment

Opt. Finished Basement Bathroom 61 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***

Shower Floor Tile Grout 2226 Grout-(00) White ***STD***

Shower Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

Shower Wall Tile 8833 QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***

Shower Wall Tile Grout 2226 Grout-(00) White ***STD***

Shower Wall Tile Pattern 3070 HORIZONTAL STACKED ***STD***

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42

Locked:

Closed:

20 of 44

--	--

Shower Jamb(s) 8923 Shower Jamb / Sill-Thassos White ***STD***

Cabinet Colour/Style 9166 Viking III-CHARLESTON-ORCHID-3DL ***STD***

Countertop 8826 4926K-07-Countertop-BLACK ALICANTE-Wilsonart ***STD***

Countertop Edge 1111 N/A *****

Cabinet Hardware 2086 9677-HARDWARE ***STD***

Flooring 2086 GE.SU.ATR.1313 Sauble Anthracite (Black) 13

Floor Tile Grout 7704 Grout-(19) Pearl Gray ***STD***

Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

Plumbing Fixture (Colour) 1737 Plumbing Fixtures-WHITE ***STD***

Comment

Great Room Fireplace

Type 8869 Majestic MERC32 ***STD***

Mantle 8891 NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
Page 28

Surround Opt.

Note 8891 Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.

Note 8891 Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.

Comment

Basement Stairs

Type 1712 Oak Stairs ***STD MAIN STAIRS***

Colour 7922 Eclipse (Pewter) STAIN TO COMPLEMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***

Carpet Runner 1111 N/A *****

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42
Locked:
Closed:

21 of 44

Handrail/Pickets/Post Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Post Colours	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Carpet	1111	N/A *****
Custom Stain/Paint	1111	N/A *****
Comment		

Main Stairs

Type	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment		

Throughout

Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Comment		

Customer Colours

Robert Smith/
Project: Wallaceton
Unit: 9, Phase: 1
Model: 25-2500 C The Bridgeport

Created: 2/19/2020 11:25:42

Locked:

Closed:

22.644

Purchaser:


Robert Smith

20 MAR 2020
Date

Decor Consultant

20/03/20
Date

Purchaser:


Wallaceton

Date

Wallaceton

Date Approved

- APPROVED -

-03- 23 2020



Sales Selection Sheet
Wallaceton

23 of 44

PURCHASER: Robert Smith

TEL: RES.: 647-532-2234

LOT / UNIT	PHASE	MODEL
9	1	25-2500 C The Bridgeport

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Cabinetry

1 189,316	CABINETRY - 12J-LIGHT VALANCE (PER 8 foot LENGTH PRICE) (FOR CLARIFICATION OF STYLES SEE MOULDING MATRIX) (LIGHT VALANCE IS NOW APPROXIMATELY 2" [50MM] HIGH. PLEASE ENSURE LIGHT FIXTURES USED WILL BE CONCEALED BY THE VALANCE.); Note: PRICE ALL THE SAME FOR ALL LINES - KITCHEN	Qty: 2
2 189,203	CABINETRY - 02B-RAISE KITCHEN CABINETS FOR HARDWOOD/POST-INSTALL FLOORING (SAMPLE TO BE PROVIDED TO	Qty: 1
21,118	Note:	

Ceramics

3 184,537	CERAMICS - FLOOR - FOYER - UPGRADE 2 Note:	Qty: 1
4 189,411	CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 1 Note:	Qty: 1
5 184,724	CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 1 Note:	Qty: 1
6 184,661	CERAMICS - FLOOR - GARAGE ENTRY / MUD ROOM - UPGRADE 2 Note:	Qty: 1
7 184,653	CERAMICS - FLOOR - POWDER ROOM - UPGRADE 2 Note:	Qty: 1

Hardwood

8 184,844	HARDWOOD - VINTAGE - 3-1/4" RED OAK ENGINEERED - KITCHEN / BREAKFAST - STANDARD SERIES Note:	Qty: 1
--------------	---	--------

Mirrors/Glass Pro:

9 184,853	MIRRORS/GLASS PRODUCTS - UPGRADE TO FRAMELESS CLEAR GLASS WITH D-RING HANDLE IN CHROME - ENSUITE MASTER SKETCH# 6 PAGE 27 Note: FRAMELESS FULL FRONT NO 42" HALF WALL	Qty: 1
--------------	--	--------

MISC.

TAX#:1

PREPARED BY: Tina LeFur

PE 246-1

Sh Invoice rpt 28may19

Initials: RS



Sales Selection Sheet

Wallaceton

PURCHASER: Robert Smith

TEL: RES.: 647-532-2234

LOT / UNIT	PHASE	MODEL
9	1	25-2500 C The Bridgeport

MISC.

10	FIVE HUNDRED (\$500.00) IN UPGRADES AT DECOR AND FIVE THOUSAND (\$5,000.00) IN UPGRADES AT DECOR AS PER SCHEDULE E	Qty: 1
21,117	Note:	

Structured Wiring

*11	STRUCTURED WIRING - COMBINATION: DATA LINE ROUGH-IN CAT 5E / TV CABLE LINE ROUGH-IN RG 6 FOR BEDROOMS 2, 3 AND 4 SEE SKETCH # 6 PAGE 27	Qty: 3
189,777		
21,108	Note:	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

PURCHASER:


Robert Smith

20-Mar-20
DATE

20-Mar-20
DATE

Decor Consultant

APPROVED

-03- 23 2020



Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Tina LeFur

PE 246-2

Invoice.rpt 28may19


UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

25 of 44
THE BRIDGEPORT

With finished Lower Level
ELEVATION C & D | 2,619 SQ. FT.
With 120 sq. ft. of finished Lower Level
792 sq. ft. of opt. finished Lower Level

25-2500 ELEV. C

Sketch #4

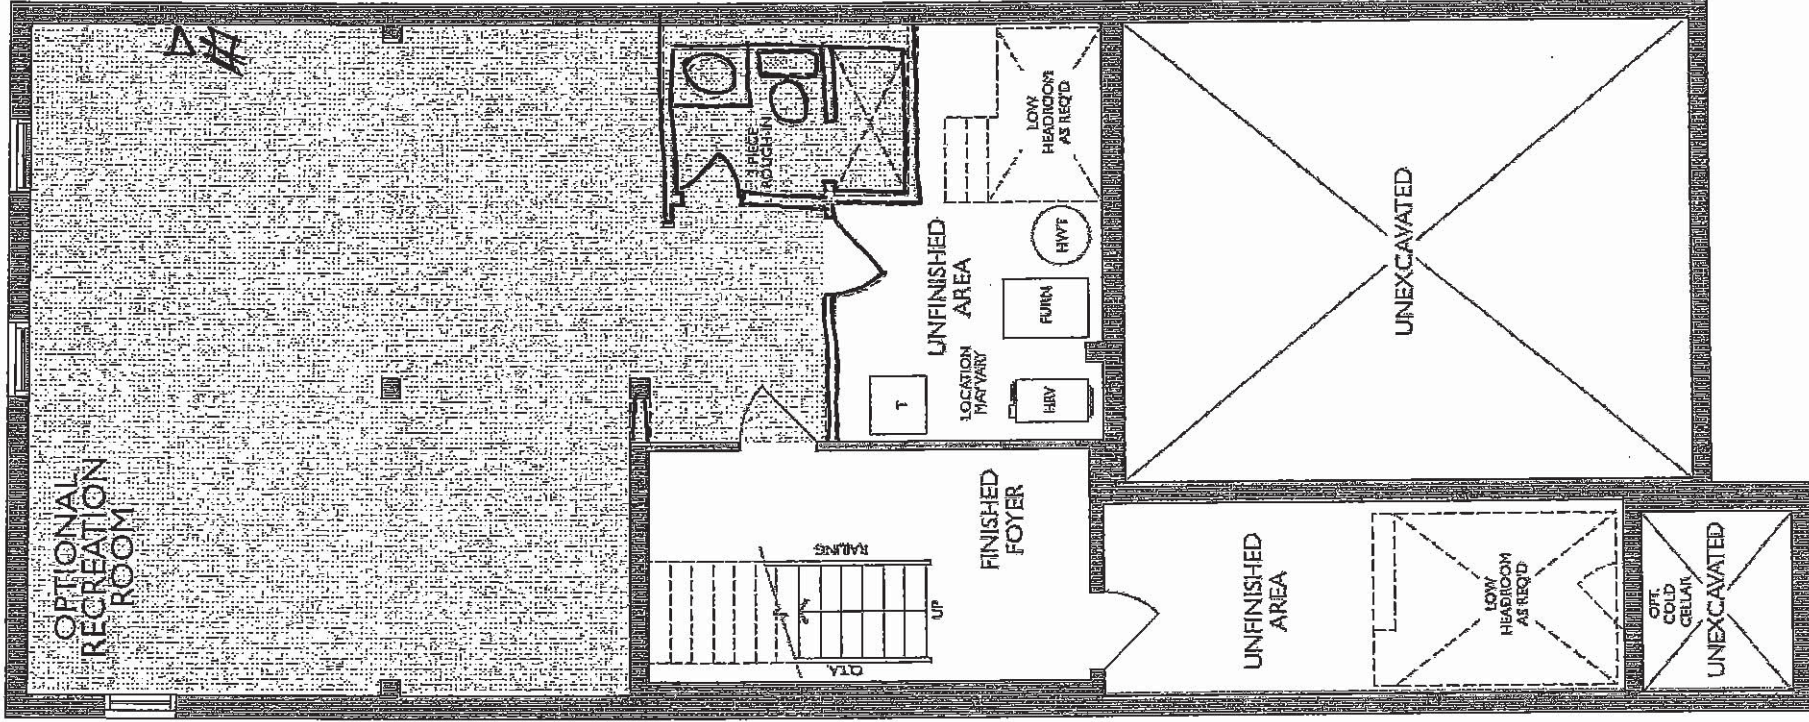

LOWER LEVEL
ELEVATION A, B, C & D

B

**UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT**


2604 THE BRIDGEPORT

With finished lower level

ELEVATION C & D | 2,619 SQ. FT.
With 120 sq. ft. of finished Lower Level

25-2500 ELEV. C

792 sq. ft. of opt. finished Lower Level

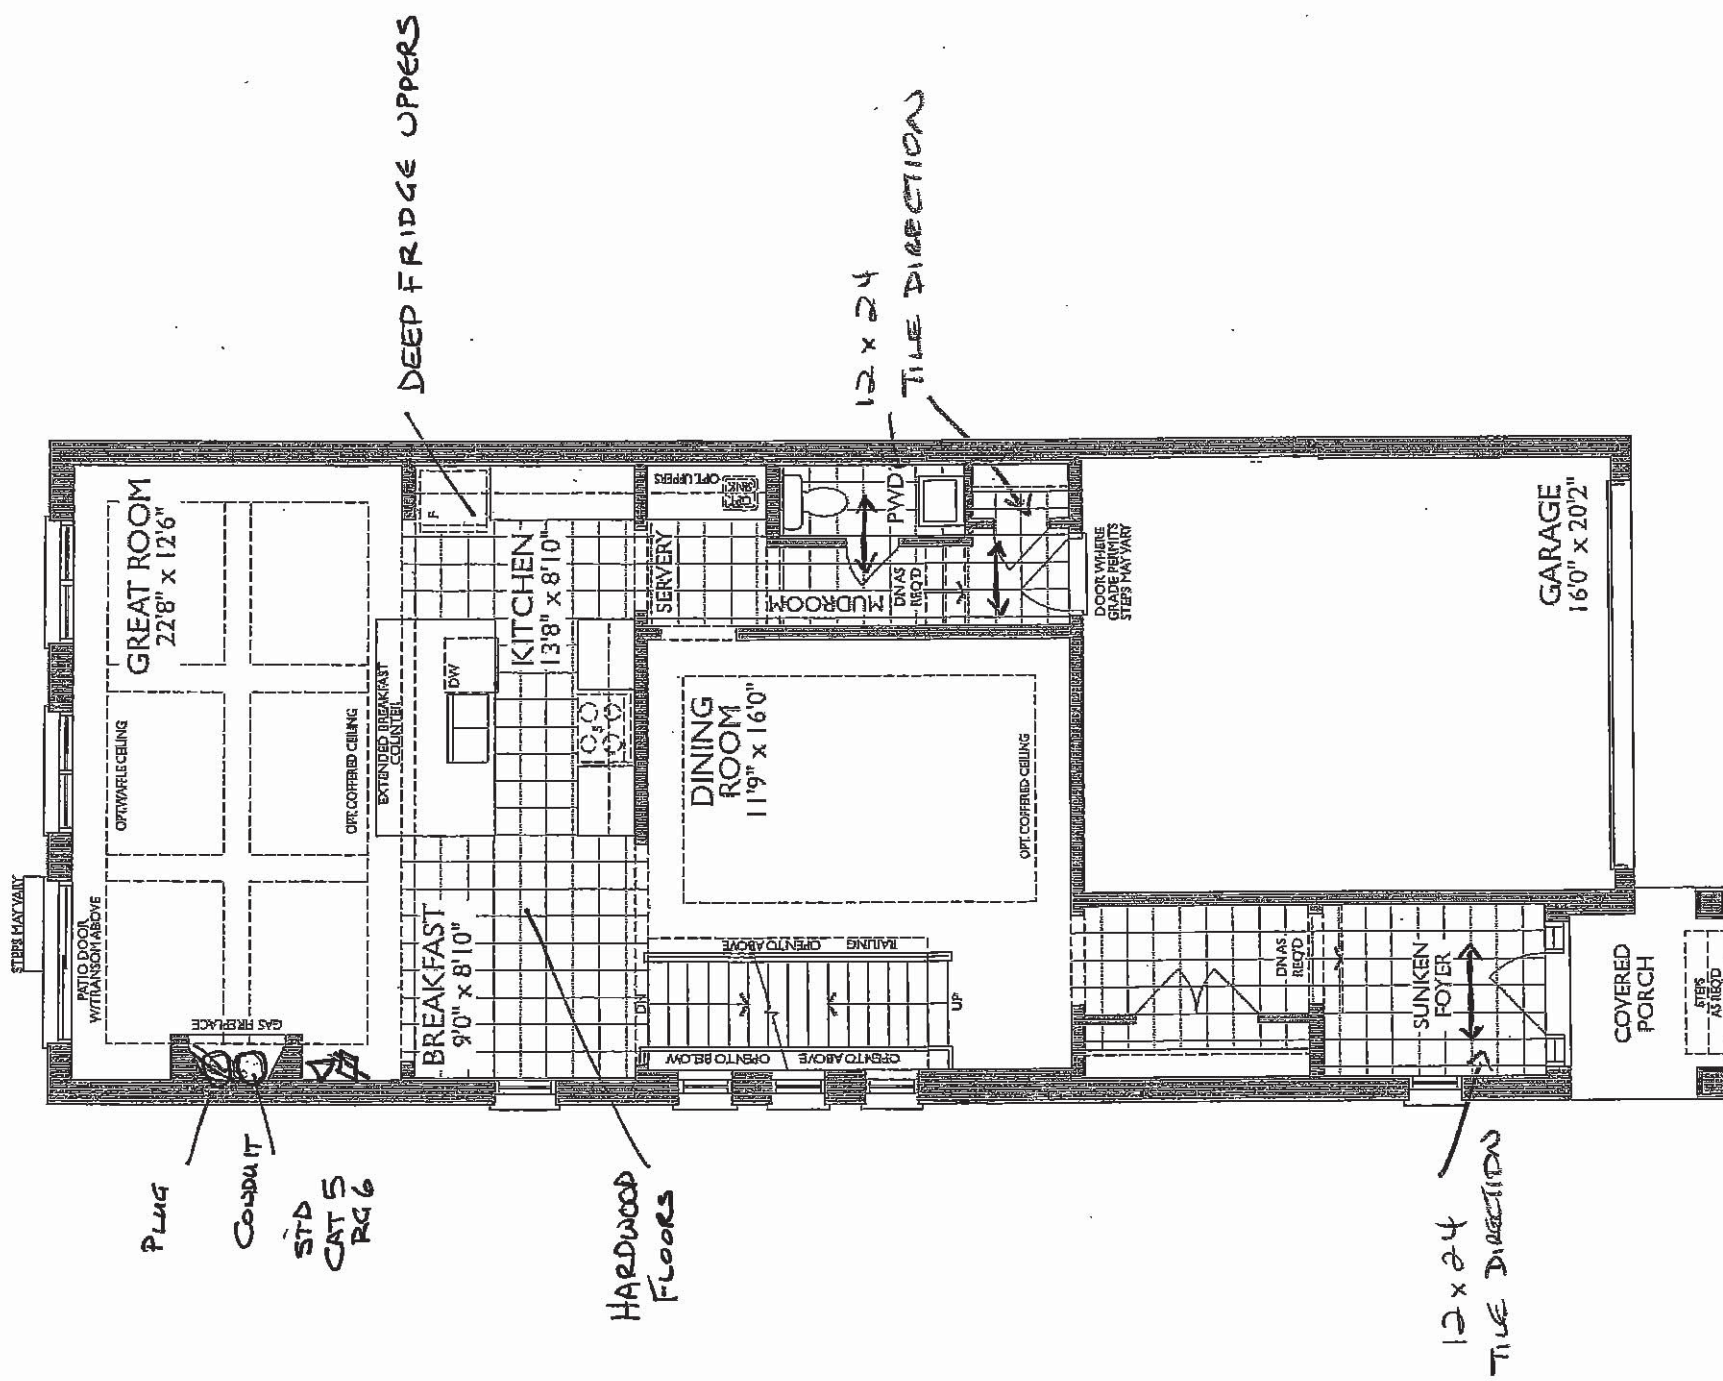

MAIN FLOOR
ELEVATION C



UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

27 of 44
THE BRIDGEPORT


With finished Lower Level

ELEVATION C & D | 2,619 SQ. FT.
With 120 sq. ft. of finished Lower Level

792 sq. ft. of opt. finished Lower Level

25-2500 ELEV. C

Sketch #6

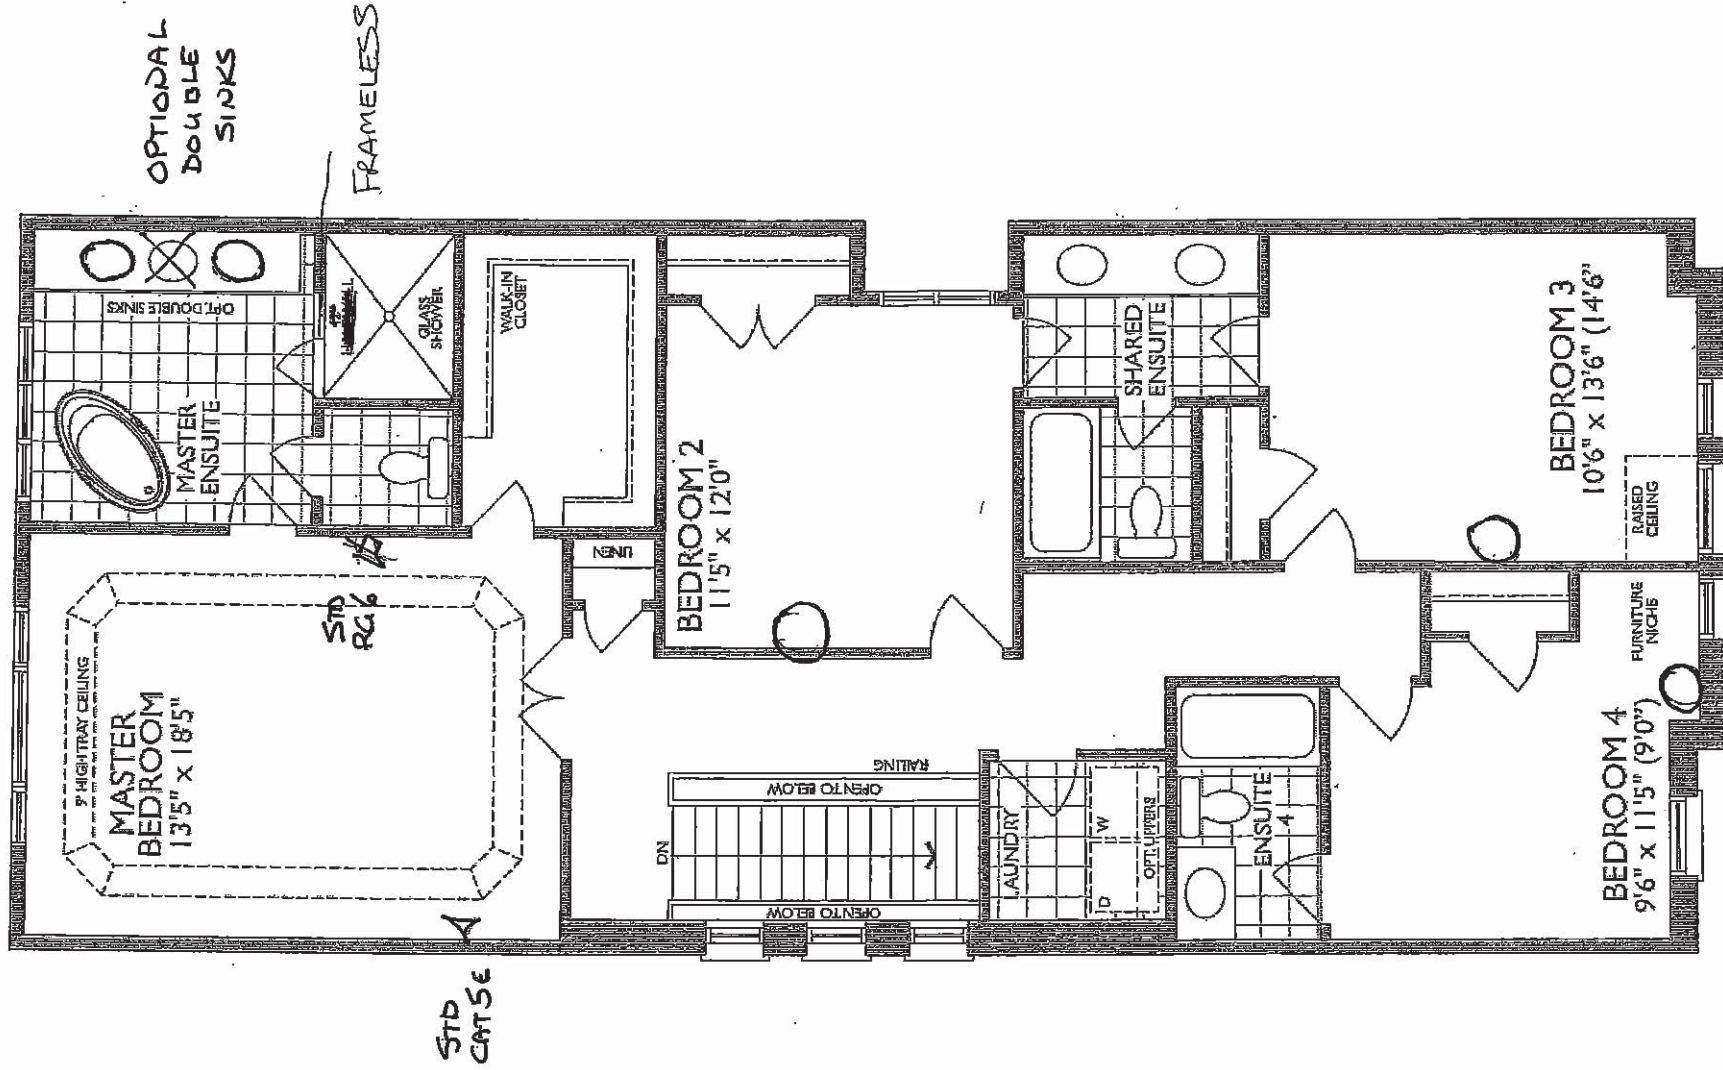


SECOND FLOOR
ELEVATION C

○ COMBINATION B
DATA LINE ROUGH-IN
CAT 5E / TV CABLE RG6
BEDROOMS 2, 3, 4

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT


28 of 44

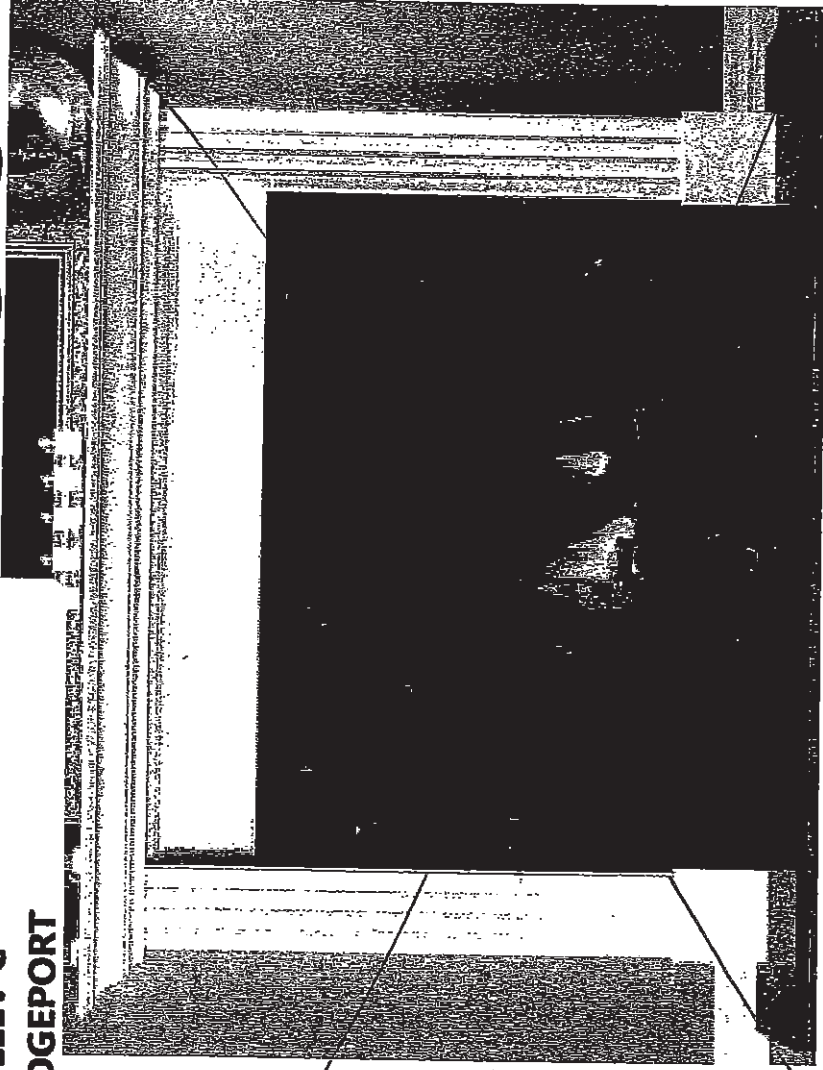

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

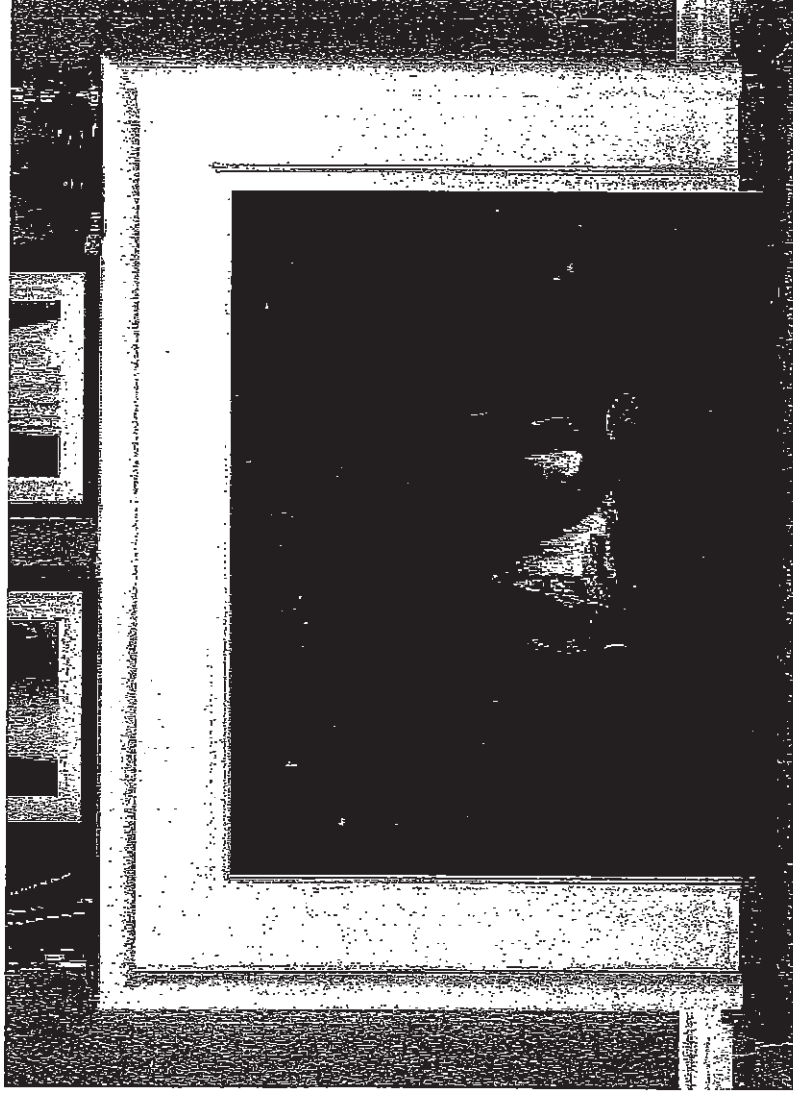

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

B


UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

29 of 44


Regence

STANDARD KITCHEN SINK

ND1831UA/9

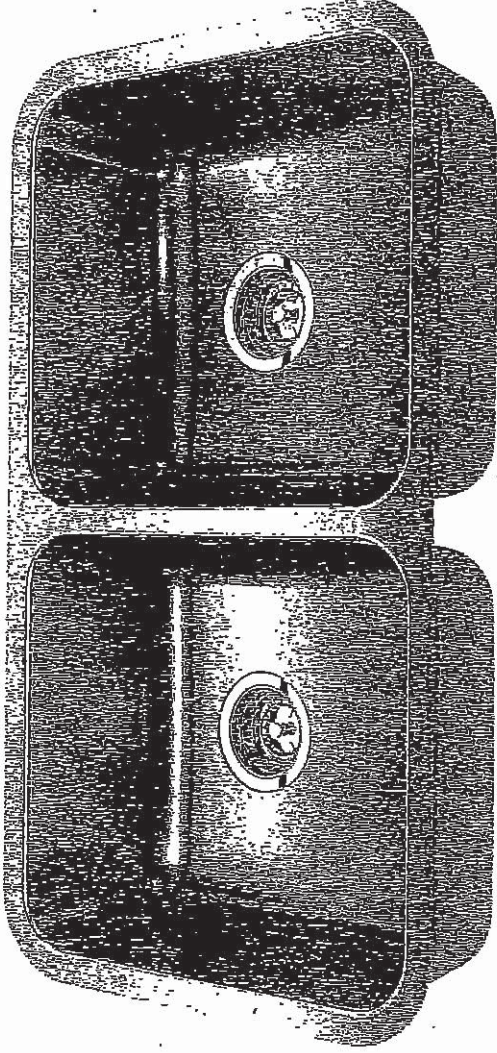

Optional Accessories

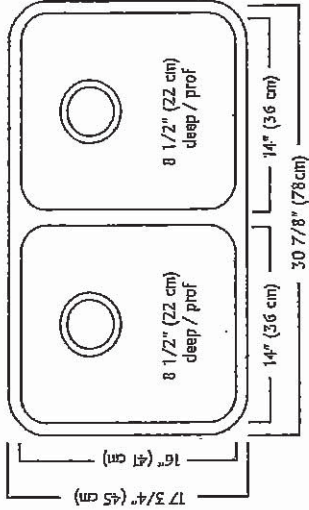

8 1/2\"/>

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2\", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4\"/>
- Recommended for minimum 36\"/>

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

B


UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

30 of 44

STANDARD KITCHEN FAUCET

Align

Modern

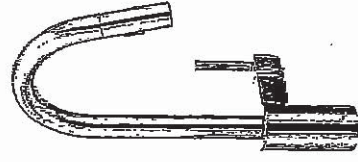

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†


BS

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

31 of 44


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

R

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

32 of 44

American Standard

Style That Works Better



OVALYN™ UNDERCOUNTER SINK

- Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template


0496.221 Unglazed rim
489 x 413mm
(19-1/4" x 16-1/4")

Bowl size:
432mm (17") wide
356mm (14") front to back
140mm (5-1/2") deep


x2 MASTER

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

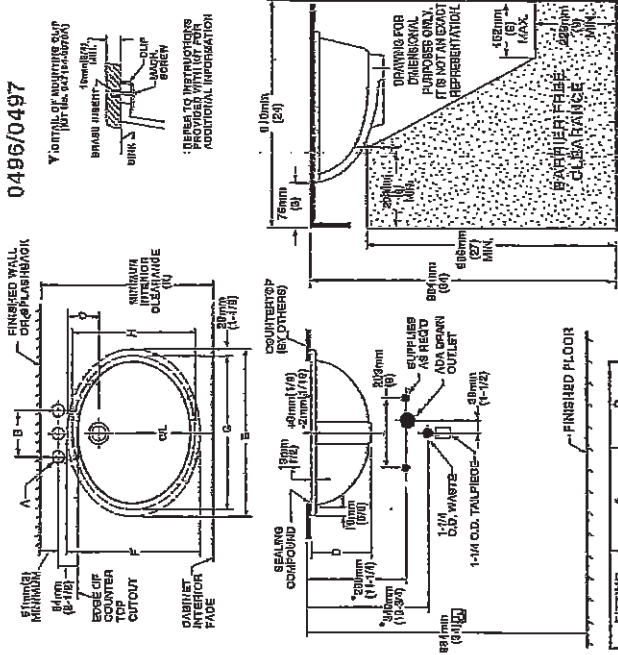

0496/0497



NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND \"P\" TRAP ARE SUGGESTED.
* UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K) FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT! Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.


Countertop 864mm (34\") front finished floor. Lavatory installed 76mm (3\") from front edge of countertop. Countertop thickness to be 25mm (1\") maximum.

FITTING	A	B
CENTERSET	1-1/4\" (32mm)	4\" (102mm)
SPREAD	1-3/8\" (36mm)	9\" (229mm)

OAT NO.	A	B	C	D	E	F	G	H	I	J	K
0496.221	403mm (15-7/8\")	413mm (16-1/4\")	432mm (17-1/8\")	489mm (19-1/4\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")
0497.221	403mm (15-7/8\")	413mm (16-1/4\")	432mm (17-1/8\")	489mm (19-1/4\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")	864mm (33-7/8\")

B

OVALYN™
UNDERCOUNTER SINK
VITREOUS CHINA

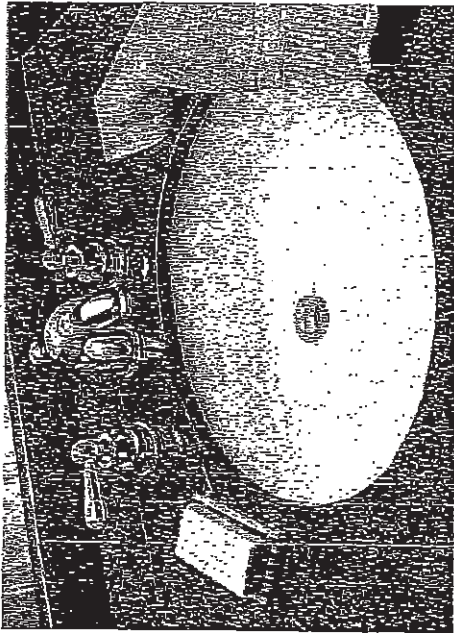

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

33 of 44

Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB
WRF535SMB WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

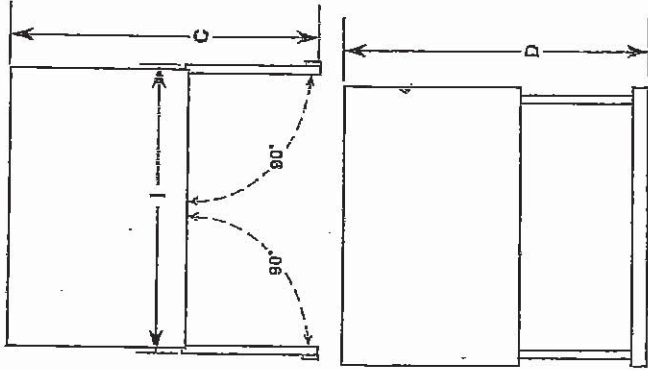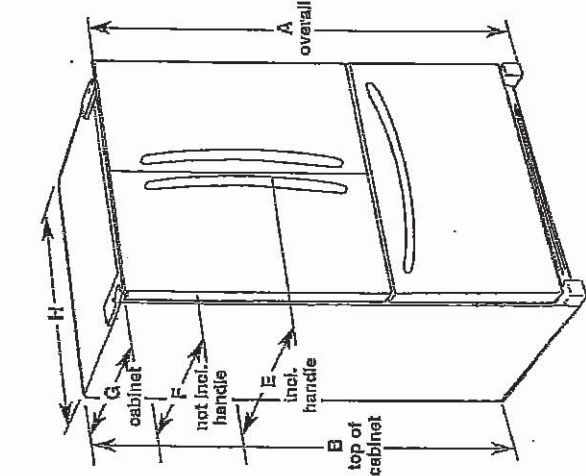

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 1/8" (174.8 cm)	48 1/8" (122.1 cm)	53 1/2" (135 cm)	35 1/2" (90 cm)	32 1/8" (83.7 cm)	29 1/2" (74 cm)	35 1/2" (90.5 cm)	43 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 1/8" (174.8 cm)	48 1/8" (122.1 cm)	53 1/2" (135 cm)	35 1/2" (90 cm)	32 1/8" (83.7 cm)	29 1/2" (74 cm)	35 1/2" (90.5 cm)	43 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/2" (178.1 cm)	68 1/8" (174.8 cm)	47 1/2" (120.6 cm)	52 1/2" (133.3 cm)	34 1/2" (87.6 cm)	31 1/8" (79.3 cm)	28 1/2" (72.6 cm)	32 1/2" (82.5 cm)	42 1/2" (107.9 cm)
WRF540CWB 20 cu. ft.	70 1/2" (178.1 cm)	68 1/8" (174.8 cm)	48" (121.9 cm)	44 1/2" (113.0 cm)	29 1/2" (74.6 cm)	28" (71.1 cm)	24 1/2" (61.3 cm)	35 1/2" (90.5 cm)	39 3/4" (100.0 cm)

LOCATION REQUIREMENTS

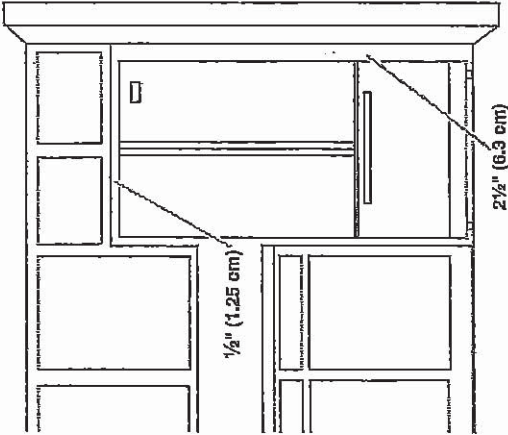

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


Ref. W10597594B
10/17/14

B

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

34 of 44

Whirlpool 6.2 cu. ft. Front-Control Electric Stove with TimeSavor™ Convection (YWEE... Page 1 of 2

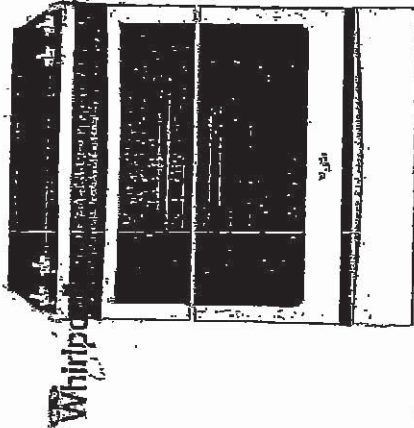

Whirlpool 6.2 cu. ft. Front-Control Electric Stove with TimeSavor™ Convection

Print

BASE MSRP

\$1,799.99

Choose A Color

Stainless Steel

2.4

20 Reviews

Write a Review

where to buy

Add to Compare

AVAILABLE COLOR OPTIONS



Stainless Steel • YWEE730H0DS

3 SHARE



OVERVIEW | FEATURES | SPECIFICATIONS | RATINGS & REVIEWS | MANUALS | RELATED MODELS & ACCESSORIES

Whirlpool 6.2 cu. ft. Front-Control Electric Stove with TimeSavor™ Convection

Leave unnecessary meal prep behind with the 6.2 cu. ft. front-control electric stove that fits your kitchen and delivers delicious results. TimeSavor™ convection cooking helps you cook faster roasts and bake bread with just the right texture in less time than non-convection ovens. You'll be able to skip the preheat and cook frozen favorites faster in this self-cleaning stove with Frozen Bake™ technology. And thanks to the FIT system, it's easy to upgrade to a full-depth range made to fit in your existing kitchen cabinet. When it's time for cleanup, AquaLift™ self-cleaning technology helps you wipe away messes without harsh chemicals or odors.

why you'll love it...

6.2 cu. ft. Capacity

The 6.2 cu. ft. oven has room to bake and roast holiday dishes, so there's always enough space to handle even your largest meals.

Frozen Bake™ Technology

Skip preheating for favorites like pizza, sausage, chicken nuggets, fries or pies so you can cook frozen foods faster.

Full-Depth Slide-In Range with the FIT System

Upgrade to a full-depth slide-in range that fits both your life and your range cabinet. Thanks to the FIT system.

RS

UK 75 WALLACETON
 LOT 9
 25-2500 ELEV C
 THE BRIDGEPORT

35 of 44

YWE73040DS

- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See the appropriate "Electrical Requirements" section.
- Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F (93°C).
- Use an insulated pad or ¼" (0.64 cm) plywood under/range if installing range over carpeting.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local codes.


Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.
- Four-wire power supply cord or cable must be used in a mobile home installation. The appliance wiring will need to be revised. See "Electrical Connection - U.S.A. Only" section.

Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

Model KSEB900

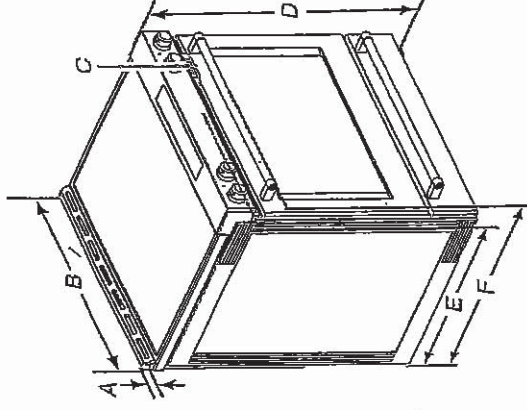

- A. 1 ¾" (3.0 cm) height from cooktop to top of vent
- B. 29 ½" (75.9 cm) behind the oven door on the top right-hand side of the oven frame
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 28 ¾" (71.9 cm) max. depth from front of console to back of range
- F. 28 ¾" (73.3 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

B

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

36 of 244

Draw 7/02/17


Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.
Range may be installed next to combustible walls with zero clearance.


NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.
Slide-In Cutout

Freestanding Cutout

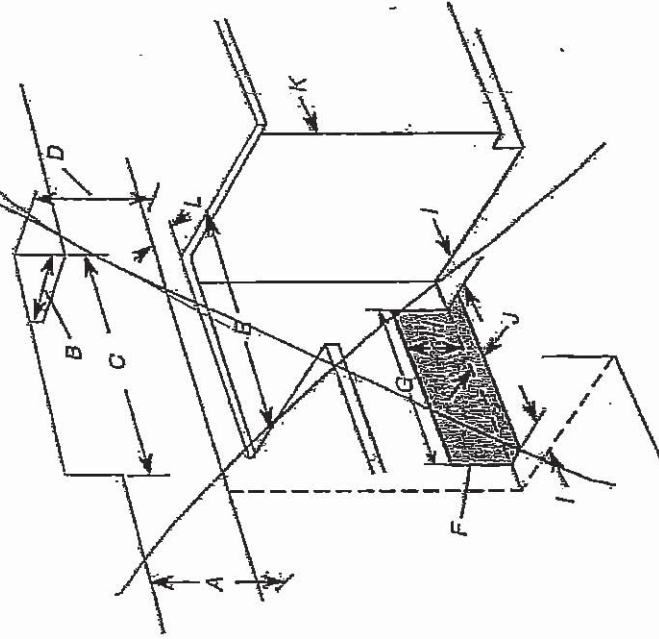

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 18" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/8" (19.5 cm)
- I. 4 1/8" (12.2 cm)
- J. 3 1/8" (9.4 cm) plus measurement of L
- K. Cabinet door or hinges should not extend into the cutout.
- L. Remaining counter depth should not exceed 2 1/4" (5.7 cm).

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.
30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

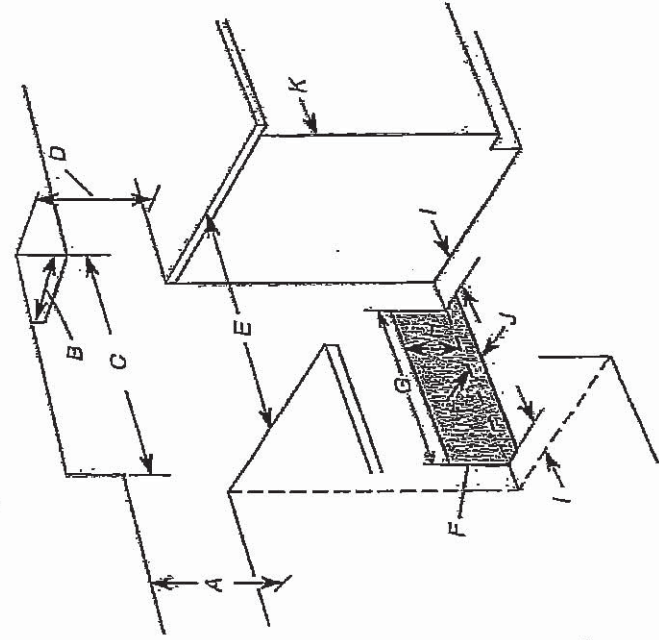

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 18" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/8" (19.5 cm)
- I. 4 1/8" (12.2 cm)
- J. 3 1/8" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.

RS

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT



Undercounter Dishwasher


PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDE530PSV
WDF111PAB	WDF320PAD	WDF640PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF510PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.


If connecting dishwasher with a power supply cord:

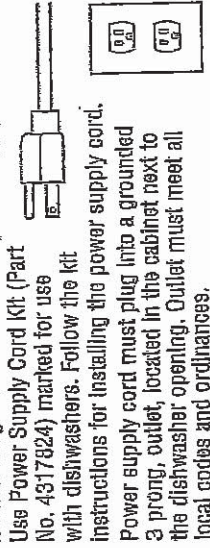

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 882 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 8385568) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.


Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended



that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap. Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

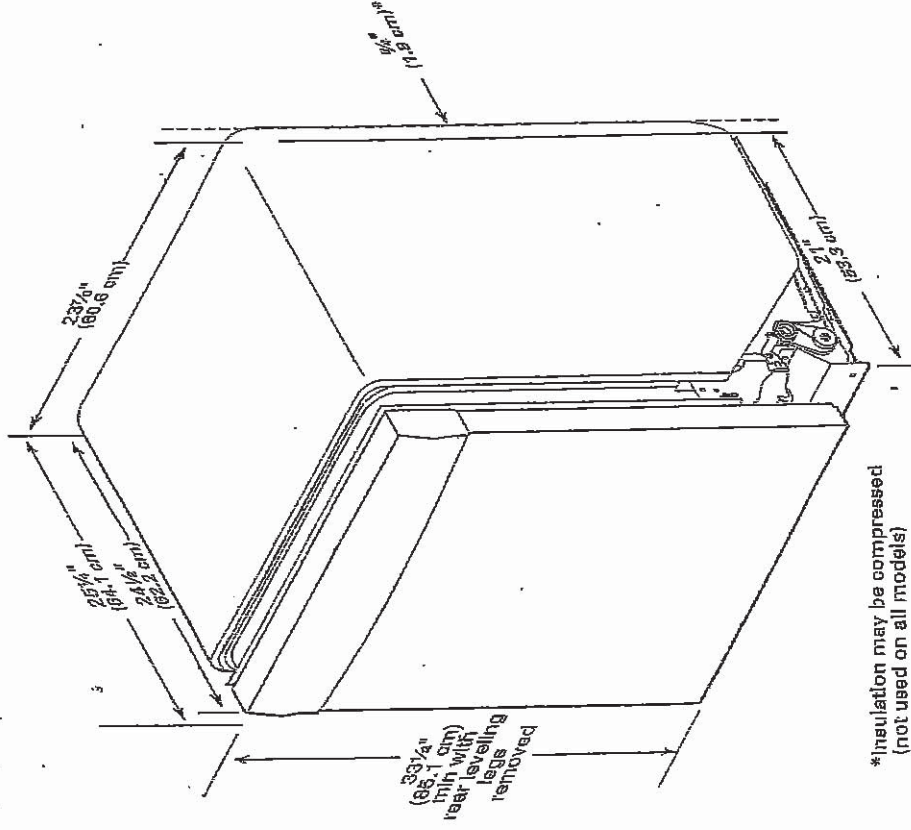

*insulation may be compressed (not used on all models)

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT


38 of 41²

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

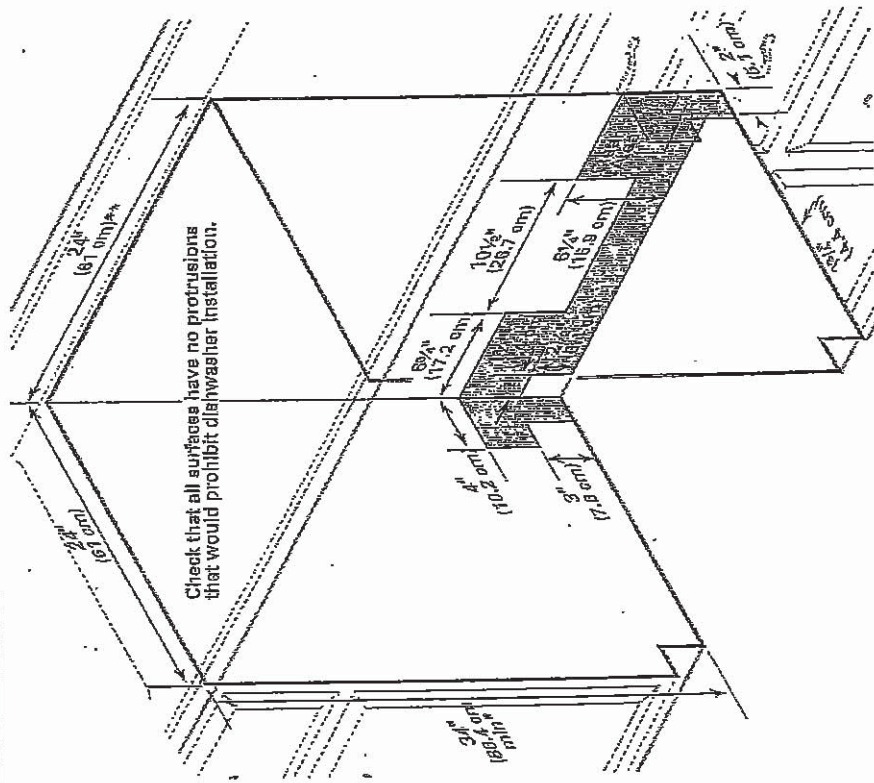


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

39 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

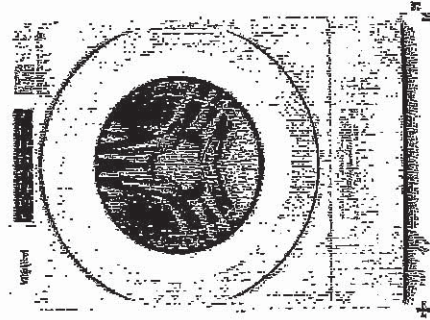

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser
Model #: WFW5620HW

Dimensions

Depth	50.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

18

UK 75 WALLACETON
 LOT 9
 25-2500 ELEV C
 THE BRIDGEPORT

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

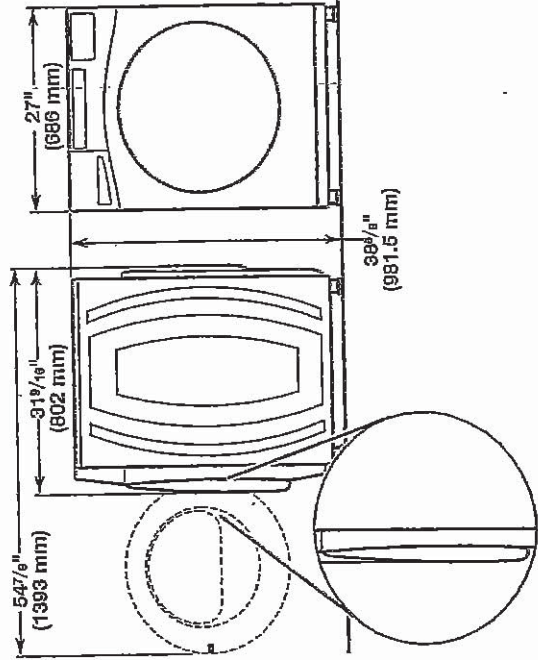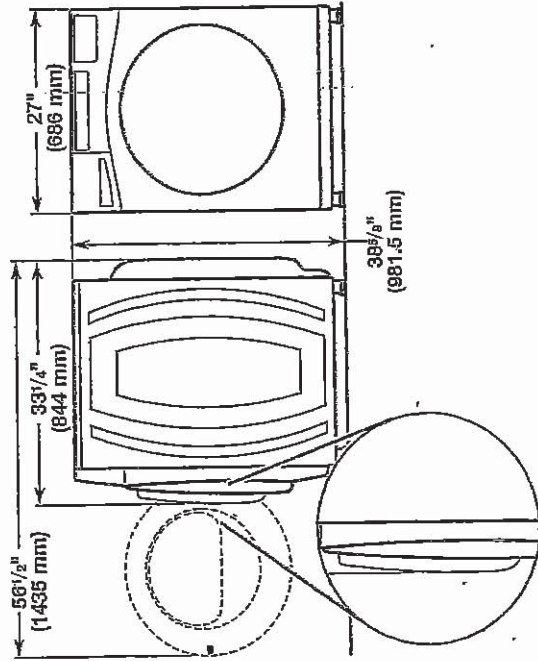

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


Maytag Models

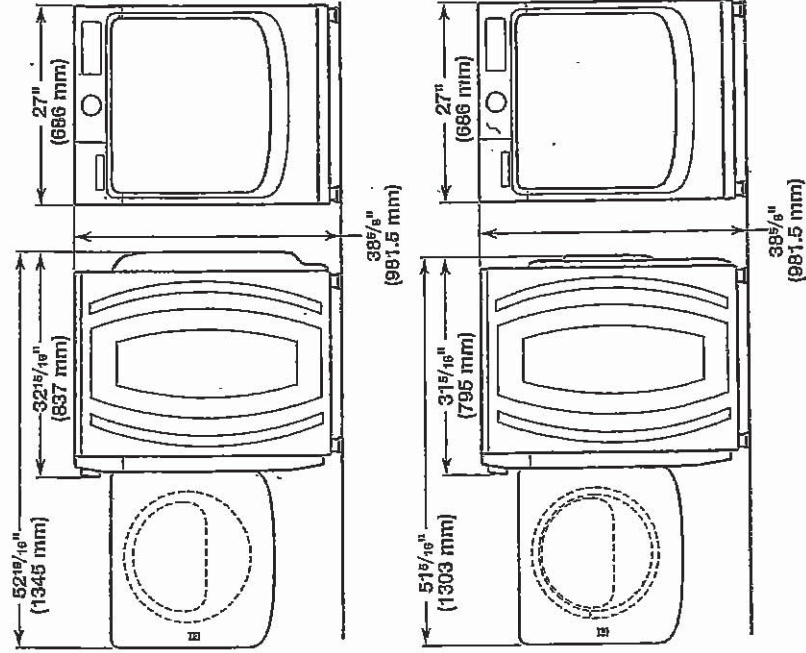

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


Recessed area or closet installation (stacked washer and dryer):

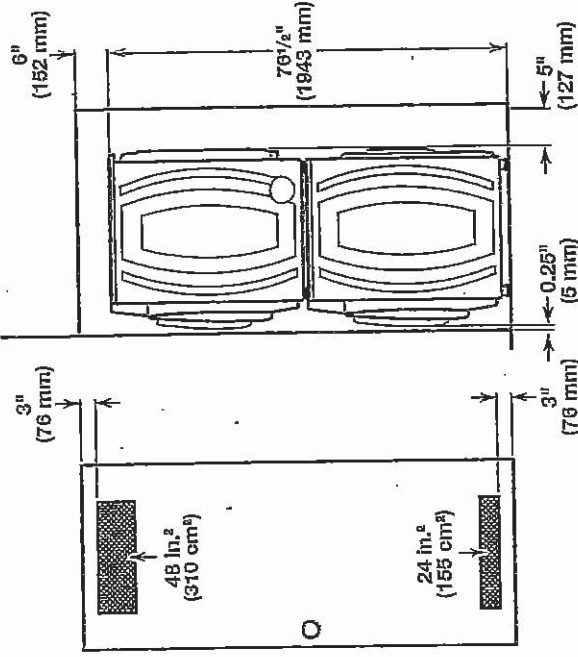


RS

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

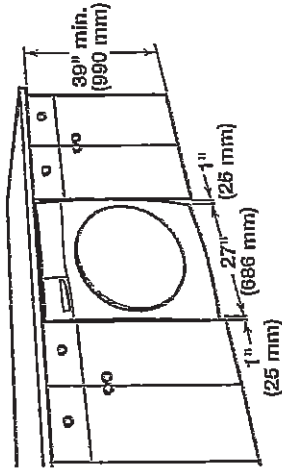

Recessed area or closet installation:

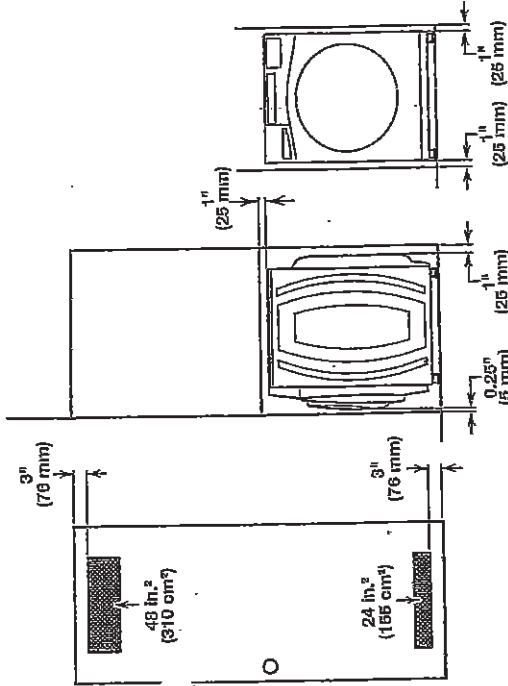

Custom cabinet installation:

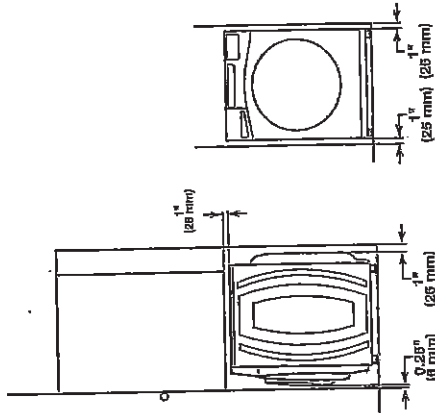


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

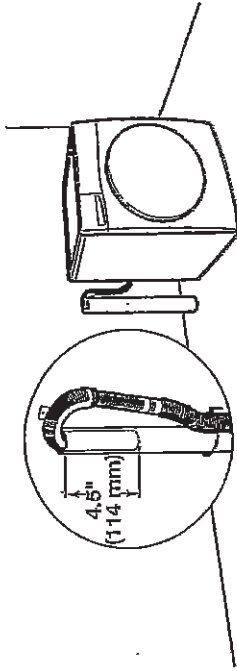


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

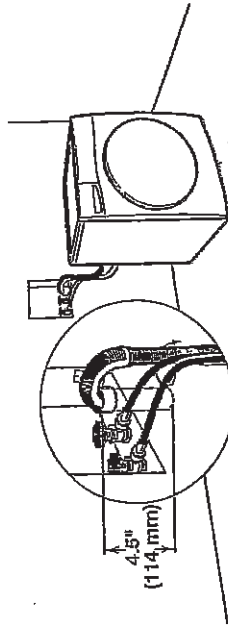

See requirements for floor standpipe drain system.

Laundry tub drain system

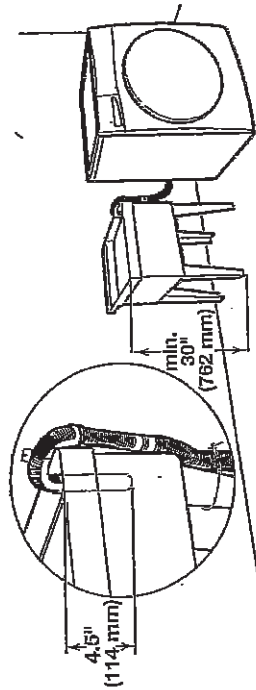

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


BS

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

42 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool (Brand) Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

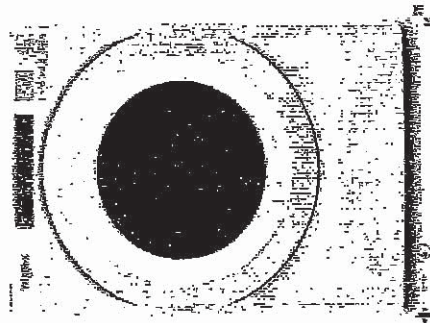

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 80 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 39-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	85
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
----	----

Power Cord Included

Yes


B

**UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT**

13 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

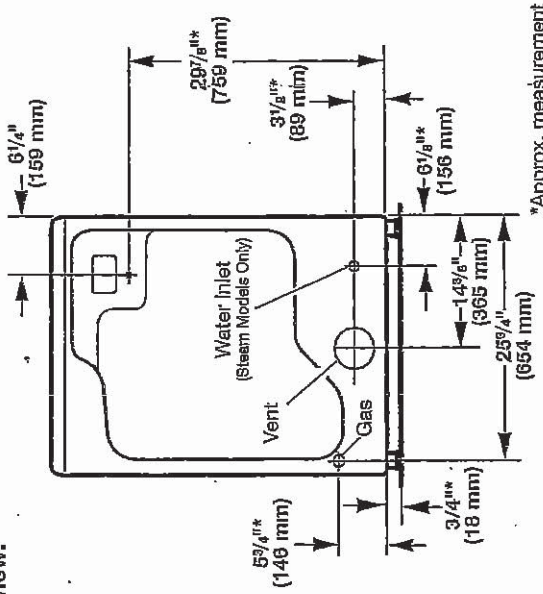

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or lowered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

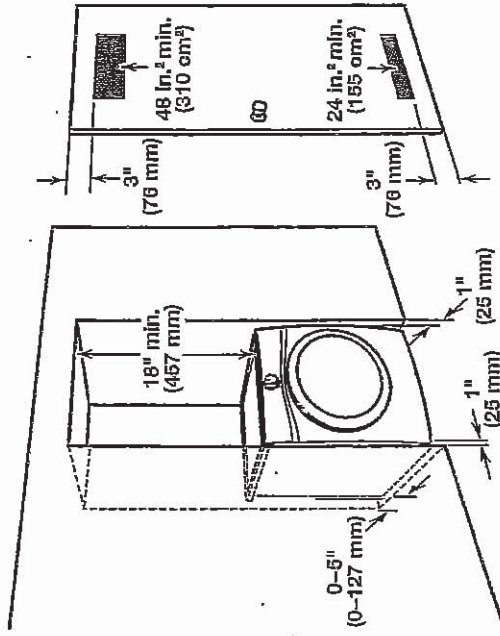

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

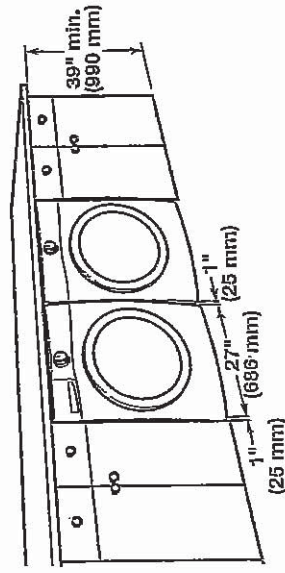

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

RS

UK 75 WALLACETON
LOT 9
25-2500 ELEV C
THE BRIDGEPORT

4/14/17

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

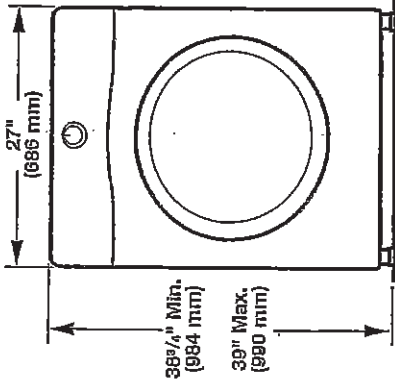


Side view:
Whirlpool Models

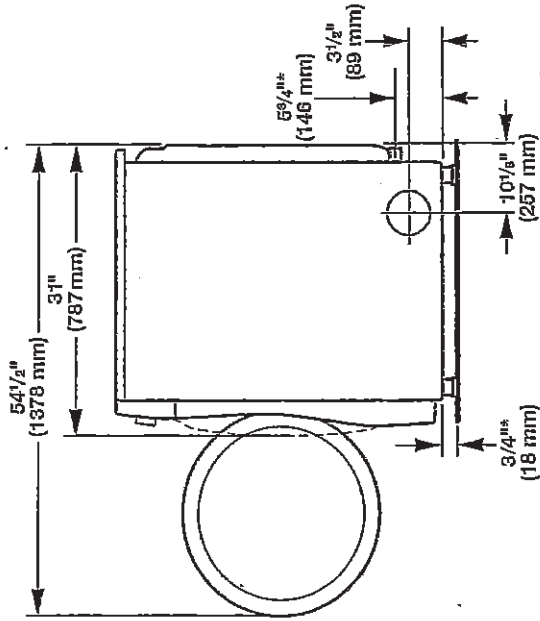

*Approx. measurement

Maytag Models

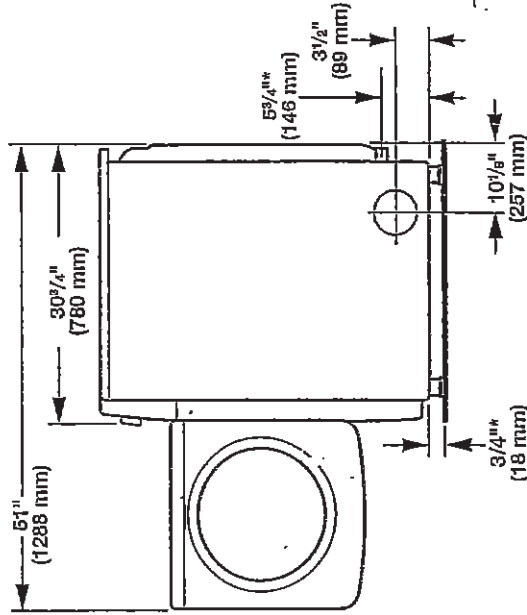

*Approx. measurement

BS