



Sales Selection Sheet

Wallaceton

REVISED

PURCHASER: HILY YUSIFI

TEL: BUS.: 226-972-8058

33 of 38

LOT / UNIT 18	PHASE 1	MODEL 27-2587 CRN B The Maxwell
------------------	------------	------------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Cabinetry

*1 112,636	CABINETRY - 06H-ACCOMMODATE FOR BUILT-IN REFRIGERATOR WITH PROUD INSTALLATION (TYPICALLY THE DOOR OF THIS UNIT WILL PROTRUDE BEYOND THE CABINETS AND HAVE A VISIBLE VENT OR GRILL.) NOTE: MODIFIED TO ONE PANTRY TO RIGHT WHEN FACING FRIDGE	Qty: 1
16,823	Note: SEE SKETCH # 5 PAGE 35 SPECS PAGES 36-38	

Ceramics

*2 111,563	CERAMICS - SHOWER WALL AND CEILING - INSTALL IN SPECIFIC PATTERN - ENSUITE MASTER - PATTERN	Qty: 1
15,299	Note: ITEM CHARGED IN ERROR EXTRAS DATED SEPTEMBER 17/19	
*3 112,812	CERAMICS - 4" FLOOR TILE BASEBOARD; PRICE PER LN.FT.	Qty: 1
15,300	Note: ITEM CHARGED IN ERROR EXTRAS DATED SEPTEMBER 17/19	

Plumbing

*4 113,102	PLUMBING - KINDRED - KITCHEN SINK COLLECTION REGINOX ND1831 U/A 9 STAINLESS DOUBLE (EQUAL SIZE) BOWL UNDERMOUNT SINK (OR EQUIVALENT)	Qty: 1
15,302	Note: ITEM CHARGED IN ERROR EXTRAS DATED SEPTEMBER 17/19	
*5 112,999	PLUMBING - OPTIONAL EXTRA - ROUGH- IN FOR FUTURE WET BAR -	Qty: 1
15,304	Note: ITEM CHARGED IN ERROR EXTRAS DATED SEPTEMBER 17/19	

CREDIT ON CLOSING	Sub Total
	HST
	Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

TAX#:1

PREPARED BY: Brenda Luker

PE 93-1

Slrinvoice.rpt 28may19

Initials:



PURCHASER: HILY YUSIFI

Sales Selection Sheet
Wallaceton

LOT / UNIT
18

PHASE
1

MODEL
27-2587 CRN B The Maxwell

TEL: BUS.: 226-972-8058

Payment Summary

Paid By

Amount

Total Payment: _____

PURCHASER:

Signature on file by
HILY YUSIFI *e-mail confirmation*

25-Oct-19
DATE

BRENDA LUKER
Decor Consultant

25-Oct-19
DATE

M. Rosen

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Brenda Luker

PE 93-2


SlInvoice.rpt 28may19

**UK-75 WALLACETON
LOT 18
27-2587 CRN B
THE MAXWELL**

27-2587 ELEV. B

Sketch #5


735 sq. ft. of opt. finished Lower Level

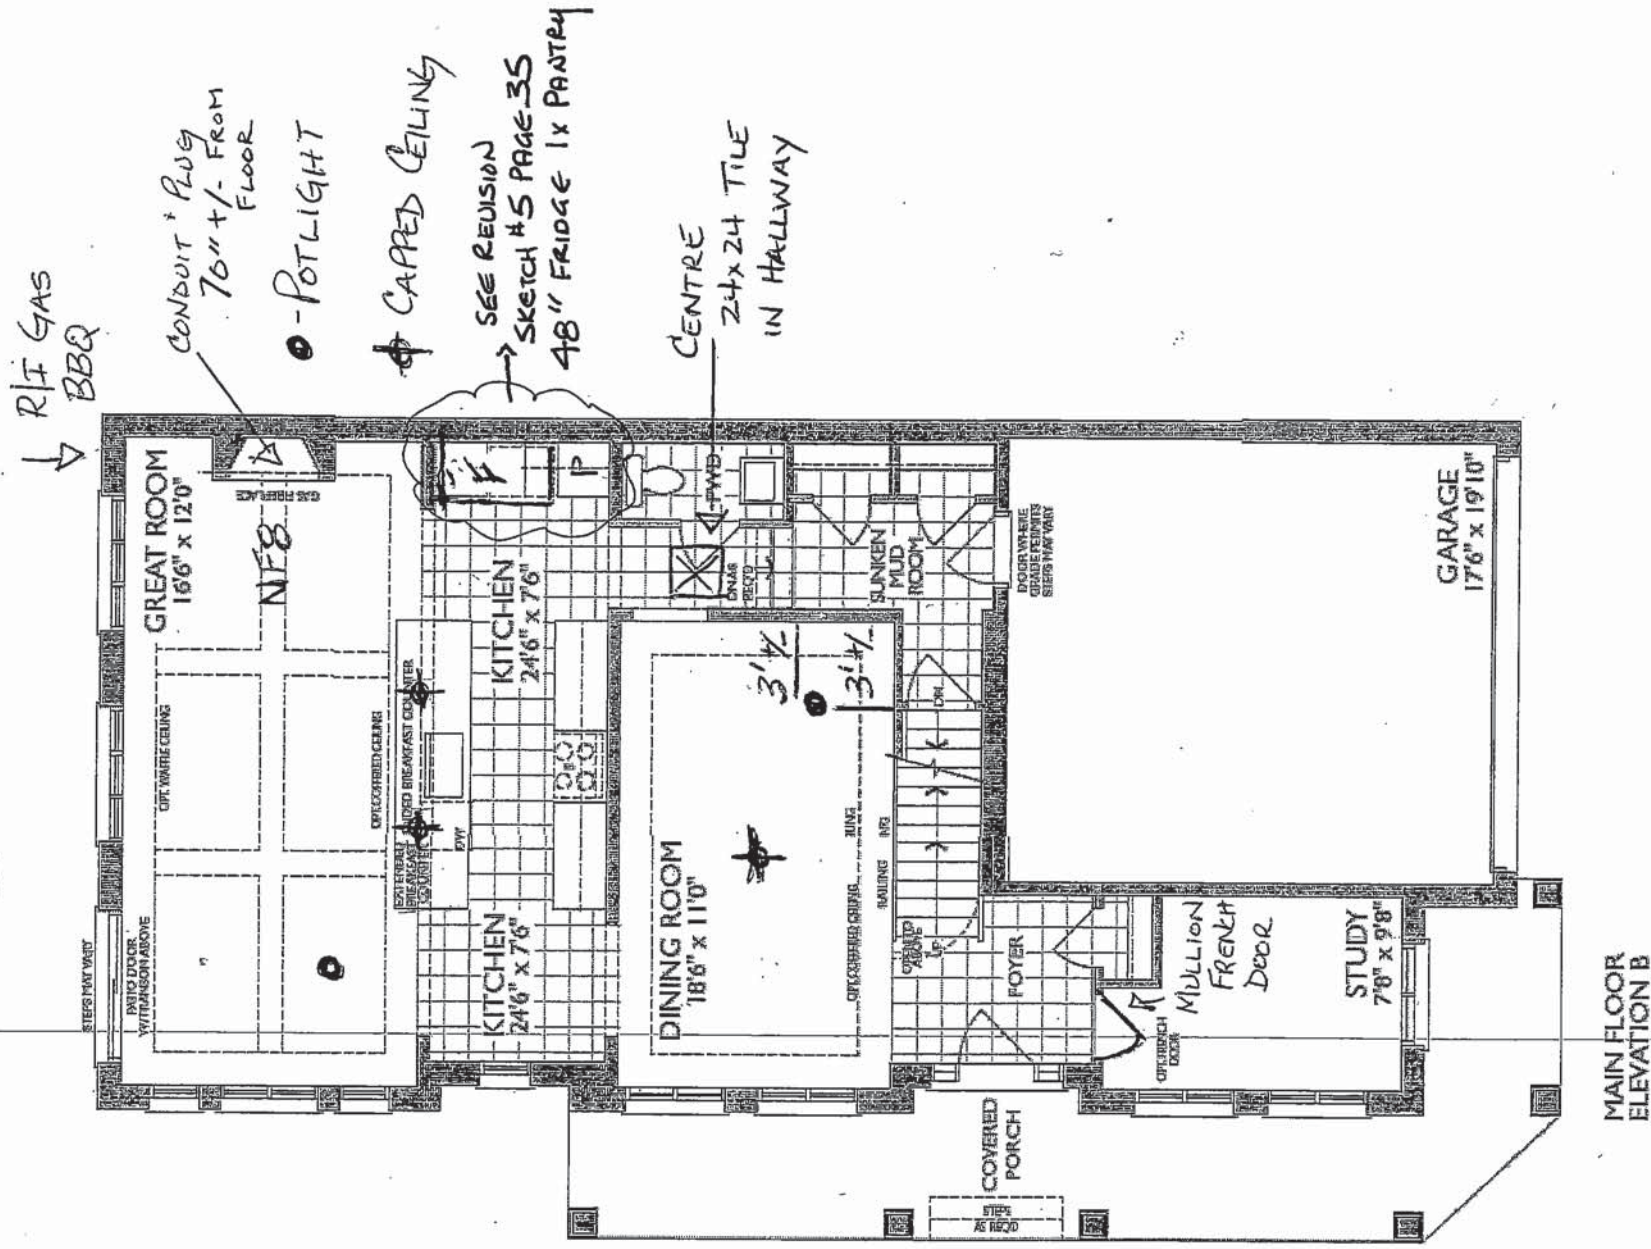

UK-75 WALLACETON
LOT 18
27-2587 CRN B
THE MAXWELL

36 of 38

KitchenAid®

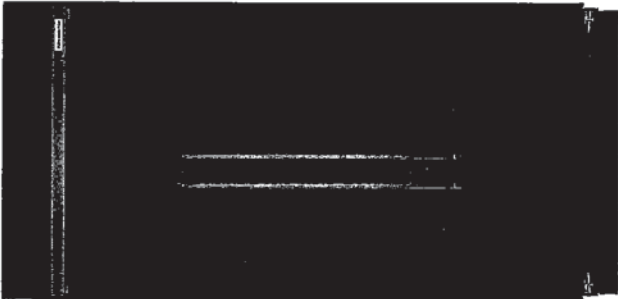

KitchenAid® 29.5 cu. ft 48-Inch Width Built-In Side by Side Refrigerator with PrintShield™ Finish

KBSD608EBS

This versatile 29.5 Cu. ft built-in refrigerator features the ExtendFresh™ Plus Temperature Management System, which maintains the perfect temperature for fresh ingredients. The Produce Preserver extends freshness by neutralizing the over-ripening effects of ethylene emitted by certain fruits and vegetables. It also features PrintShield™ Finish, a fingerprint resistant finish, which protects against smudges and enhances the look of the refrigerator.

Top Features

PrintShield™ Finish

Resists smudges while enhancing the overall look of the refrigerator. This new feature for KitchenAid® takes the worry out of keeping a working kitchen beautiful.

ExtendFresh™ Temperature Management System

Uses sensors in the refrigerator and freezer to help ensure all your ingredients remain at the appropriate temperature for optimum taste and texture.

Produce Preserver

Absorbs ethylene gas emitted by many fruits and vegetables, causing them to over ripen. By removing ethylene, the produce preserver helps extend freshness.

StainGlide® Crispers

Add a smooth experience to the crispers drawers. The ball bearing rollers and glides allow effortless in-and-out movement even when fully loaded.

Exterior Ice and Water Dispenser

Light touch controls provide easy access to ice and water and enhances the refrigerator's look and performance.

Available Finishes/Colours



KBSD608EBS
Black Stainless
Steel with
PrintShield® #8482;
Finish



KBSD608ESS
Stainless Steel with
PrintShield® #8482;
Finish

Manuals & Literature:



Use and Care



Energy Guide



Warranty



Dimension Guide



Installation Instructions

PrintShield™

Depth

27 3/4

Height

83 3/8

Width

48 1/4

Cutout Depth

24

Cutout Height

83 1/2

Cutout Width

47 1/2

Height To Top Of Cabinet

83 3/8

Depth With Door Open 90 Degree

51 3/8

Depth Excluding Handles

24 3/8

Depth Closed (Including Handles)

27 3/4 in

Width with Doors Closed

48 1/4

Performance

Freezer Capacity

10.30

Refrigerator Capacity

19.22

Energy Star® Qualified

ENERGY STAR® Qualified

Refrigerator Features

Humidity-Controlled Drawers

No

Lighting

LED

Number of Interior Shelf(s)

5

Spill-Proof Glass Shelf(s)

1 Fixed Full Width / 2 Adjustable Full Width

Temperature-Controlled Drawers

1 Full-Width

APPLIANCE TYME

Sukhvir Pablay

sukhvirpablay@gmail.com

334 Manitou Dr, Unit# B

Kitchener, ON N2C 1L3

Page 2 of 2

APPLIANCE TYME

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

UK-75 WALLACETON
LOT 18
27-2587 CRN B
THE MAXWELL

37 of 38

KitchenAid®

FOR THE WAY IT'S MADE:

Side By Side Built-In Refrigerator

PRODUCT MODEL NUMBERS

KBSD602E KBSD606E KBSD608E KBSN602E KBSN608E
KBSD612E KBSD618E

Electrical: A 115 volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system gwing to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


IMPORTANT:

- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

PRODUCT DIMENSIONS

- The depth from the front of the top grille to the back of the refrigerator cabinet is 5⅞" (64.5 cm).
- The power cord is 84" (213 cm) long.
- Height dimensions are shown with leveling legs extended ⅛" (3 mm) below the rollers.

SIDE VIEW

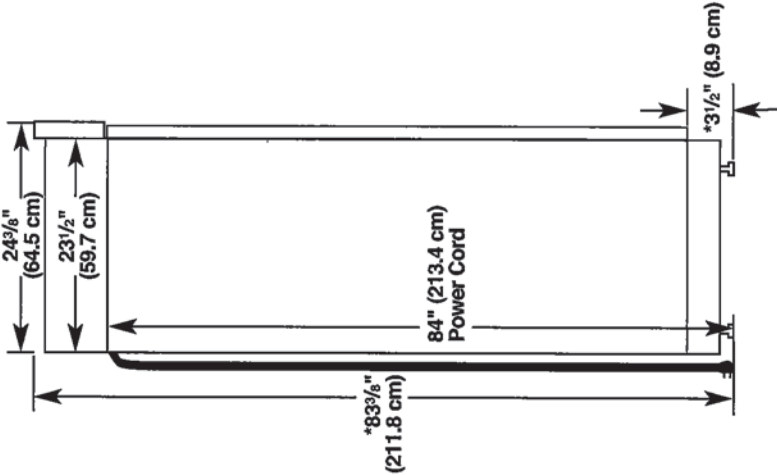

*When leveling legs are fully extended to 1¼" (3.2 cm) below rollers, add 1⅞" (2.9 cm) to the height dimensions.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

OPENING DIMENSIONS

To avoid tipping during use, the solid soffit must be within 1" (2.5 cm) maximum above the refrigerator. If the solid soffit is higher than 1" (2.5 cm) or one is not available, then the refrigerator must be braced. If the anti-tip boards are needed, they must be attached to the rear wall studs 80" to 90" (203 cm to 229 cm) above the floor. See "Install Anti-Tip Boards" for more information.

NOTE: A clearance of ½" (1.3 cm) above the top grille must be maintained in order for the top grille to be removed.

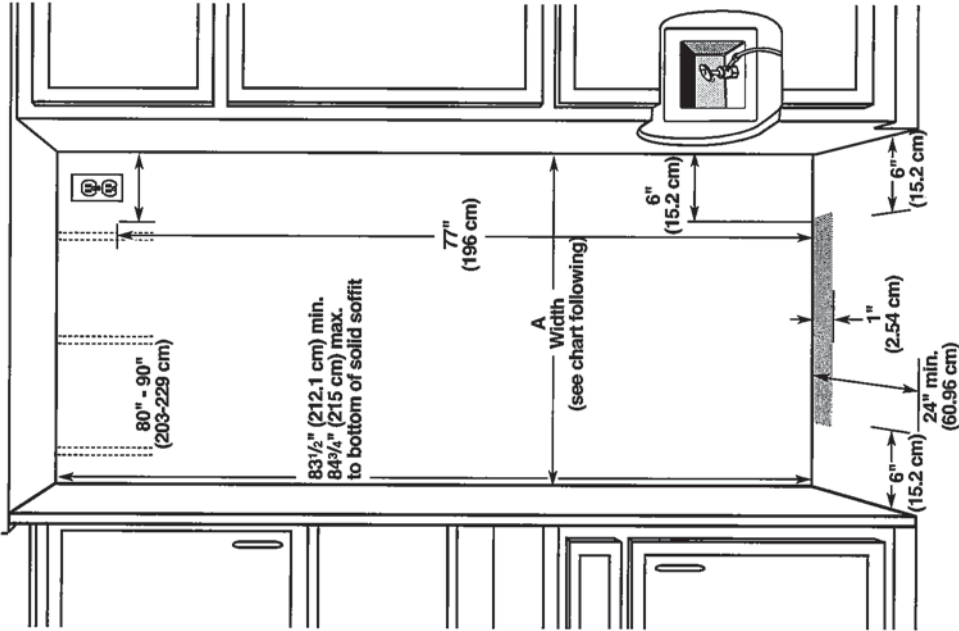


Model	Width A (as shown above)	Dimension B (as shown above)
36	35½" to 35¾" (90.2 cm to 90.8 cm)	4" (10.2 cm)
42	41½" to 41¾" (105.4 cm to 106.1 cm)	7½" (19.1 cm)
48	47½" to 47¾" (120.7 cm to 121.3 cm)	13½" (34.3 cm)

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.

UK-75 WALLACETON
LOT 18
27-2587 CRN B
THE MAXWELL


TOP VIEW

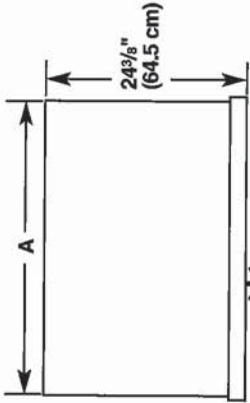

Model	Width A
36	35" (88.9 cm)
42	41" (104.1 cm)
48	47" (119.4 cm)

FRONT VIEW

- Width dimensions were measured from trim edge to trim edge.
- Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.

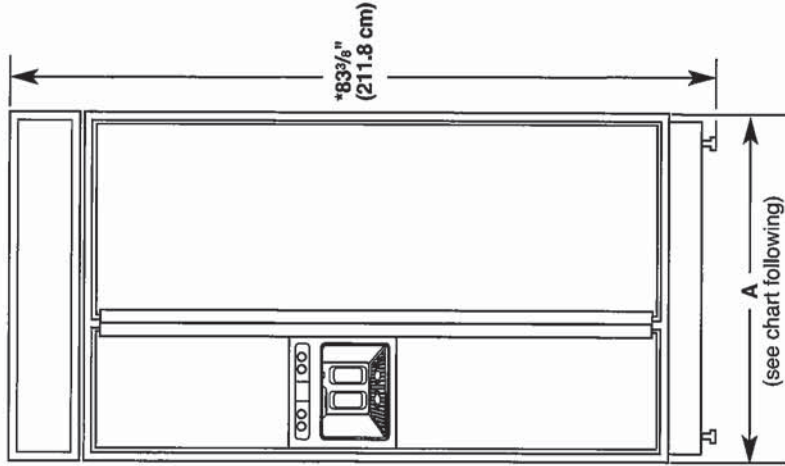

Model	Width A (Trim edge to trim edge)
36	36 11/32" (92.3 cm)
42	42 11/32" (107.5 cm)
48	48 11/32" (122.8 cm)

*When leveling legs are fully extended to 1/4" (3.2 cm) below rollers, add 1 1/8" (2.9 cm) to the height dimensions.


DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 5" (12.7 cm) minimum space between the side of the refrigerator and a corner wall.


NOTE: More clearance may be required if you are using overlay panels, custom handles, or extended handles on a Classic model.

To adjust the door swings, see "Adjust Doors."

36" (91.4 cm) Models

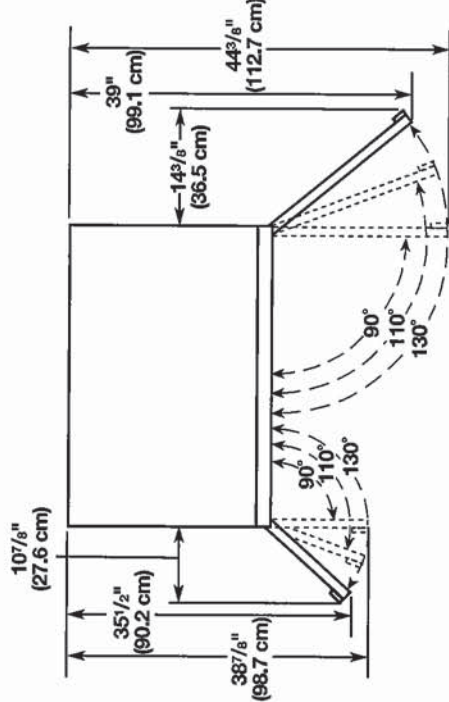

42" (106.7 cm) Models

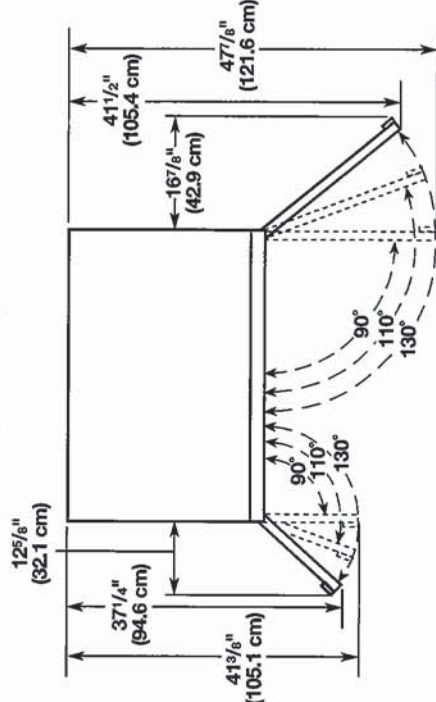

48" (121.9 cm) Models

