

PRE-Sales Selection Sheet
Checklist

1 of 35

LOT 268 Model: 25-2140 A The Wallace ALT

PURCHASERS: CESAR, ALFONSO MUNOZ PEREZ AND ANDREA, CAROLINA VIDAL PINZON

VENDOR: Heathwood Homes (Huron) Limited

DELETE GREAT ROOM FIREPLACE

- ☐ FINISHED BASEMENT
☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☐ MAIN FLOOR
☐ SECOND FLOOR
☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE
☐ WET BAR ROUGH-IN
☐ HUMIDIFIER
☒ AIR CONDITIONING

GAS ROUGH-IN

- ☒ STOVE
☐ DRYER
☐ BBQ
☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT
☐ 7 IN ROUND DUCT

FULL BASEMENT STAIRS:	Paint Grade
UPPER BASEMENT STAIRS:	N/A
LOWER BASEMENT STAIRS:	N/A
MAIN STAIRS:	All Oak
MEDIA STAIRS (if applicable):	N/A
LOFT STAIRS (if applicable):	N/A

Aug 4/20

Signatures

Date

Purchaser:

ON FILE

Aug 4/20

IRIT SALEM

Date

Decor Consultant:

Date

Purchaser:

-08- 04 2020

Date

Heathwood Homes (Huron) Limited

Approved

Locked Date:



Sales Selection Sheet

Wallaceton
SCHEDULE 'E'

2 of 35

PURCHASERS: CESAR, ALFONSO MUNOZ PEREZ and ANDREA,
CAROLINA VIDAL PINZON

TEL:

LOT / UNIT	PHASE	MODEL	
268	2	25-2140 A The Wallace	ALT

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	SCHEDULE E: FIVE APPLIANCES, SS FRIDGE, STOVE, CHIMNEY HOOD FAN, DISHWASHER, WHITE FRONT LOADER WASHER/DRYER- SINGLES	Qty: 1	
30,218	Note: SPECS PAGES 21-35		

CABINETRY GENI

2	SCHEDULE E: DEEP FRIDGE UPPERS IN KITCHEN -SINGLES	Qty: 1	
30,219	Note:		

Sub Total
HST
Total

- 1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
Paid By	Amount
Total Payment:	

PURCHASER: Signature on 04-Aug-20 RIT SALEM 04-Aug-20
CESAR, ALFONSO MUNOZ PEREZ DATE Decor Consultant DATE

PURCHASER: file 04-Aug-20 APPROVED
ANDREA, CAROLINA VIDAL PINZON DATE -08-04 2020 mRosen

Date Approved Heathwood Homes (Huron) Limited


TAX#:1
PREPARED BY: Marilyn Rosen
PE 357-1
S\invoice.rpt 28may19

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

3 of 35

Kitchen

Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG*** 
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Island Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	8108	OD.ON.DGR.02.HEX.MT-ONTARIO HEXAGON MATTE-DARK GREY ***2***
Backsplash Grout	2225	Grout-(27) Silver ***STD***
Backsplash Tile Pattern	1111	N/A *****

HoodFan	9117	SCB50030-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS PAGES 21-22
Appliances	9117	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliances	9117	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	9117	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		

Kitchen/Breakfast

Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

4 of 35

Comment

Foyer

Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Comment

Laundry Room

Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Comment

Laundry Room Opt.

Cabinet - Uppers	1111	N/A *****
Cabinet Hardware	1111	N/A *****

Comment

Mud Room

Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
----------	------	--

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

5 of 35

Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Comment

Powder Room

Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
---------------------------	------	-----------------------------------

Comment

Dining Room/Hall

Flooring	9015	White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-BUCKINGHAM-3/4 inch x 5 inch
----------	------	---

Comment

Dining Room/Hall

Flooring	1111	N/A *****
----------	------	-----------

Comment

DUPLICATE

Great Room

Flooring	9015	White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-BUCKINGHAM-3/4 inch x 5 inch
----------	------	---

Comment

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace ~ ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

6 of 35

Upper Hall

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Opt. Finished Basement (Rec) Room/Hall

Flooring	1111	N/A *****
Comment		

Master Bedroom

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Bedroom 2

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Bedroom 3

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Bedroom 4

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

7 of 35

Master Ensuite

Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***

Countertop 9122 MSI Quartz GROUP 1 ICED GREY 3/4 inch with double mitre edge ***1***

Countertop Edge 4010 GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1***

Cabinet Hardware 2098 12801-HARDWARE ***STD***

Floor Tile 5494 GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***

Floor Tile Grout 2225 Grout-(27) Silver ***STD***

Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

Shower Floor Tile 8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***

Shower Floor Tile Grout 2226 Grout-(00) White ***STD***

Shower Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

Shower Wall Tile 9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Shower Wall Tile Grout 2226 Grout-(00) White ***STD***

Shower Wall Tile Pattern 3090 VERTICAL STACKED ***STD***

Shower Jamb(s) and Sill(s) 8923 Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (colour) 1737 Plumbing Fixtures-WHITE ***STD***

Comment

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace -- ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

8 of 35

Main Bathroom	
Cabinet Colour/Style	9111 VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8801 P-344 LM-Countertop-INUKSHUK GREY-Arborite ***STD***
Countertop Edge	1111 N/A *****
Cabinet Hardware	2098 12801-HARDWARE ***STD***
Flooring	5494 GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Wall Tile	9022 QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***
Wall Tile Grout	2226 Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3090 VERTICAL STACKED ***STD***
Plumbing Fixture (Colour)	1737 Plumbing Fixtures-WHITE ***STD***
Comment	
Opt. Shower Floor Tile	
Shower Floor Tile Grout	1111 N/A *****
Shower Floor Tile Pattern	1111 N/A *****
Shower Wall Tile	1111 N/A *****
Shower Wall Tile Grout	1111 N/A *****

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

9 of 35

Shower Wall Tile Pattern	1111	N/A *****
--------------------------	------	-----------

Shower Jamb(s)	1111	N/A *****
----------------	------	-----------

Cabinet Colour/Style	1111	N/A *****
----------------------	------	-----------

Countertop	1111	N/A *****
------------	------	-----------

Countertop Edge	1111	N/A *****
-----------------	------	-----------

Cabinet Hardware	1111	N/A *****
------------------	------	-----------

Flooring	1111	N/A *****
----------	------	-----------

Floor Tile Grout	1111	N/A *****
------------------	------	-----------

Floor Tile Pattern	1111	N/A *****
--------------------	------	-----------

Plumbing Fixture (Colour)	1111	N/A *****
---------------------------	------	-----------

Comment		
---------	--	--

Great Room Fireplace

Type	1111	N/A *****
------	------	-----------

Mantle	1111	N/A *****
--------	------	-----------

Surround Opt.	1111	N/A *****
---------------	------	-----------

Note	1111	N/A *****
------	------	-----------

Note	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
------	------	---

Comment	DELETE FIRE PLACE	
---------	-------------------	--

Basement Stairs

Type	1713	Paint Grade Stairs ***STD BASEMENT STAIR ***
------	------	--

Customer Colours

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace -ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

10 of 35

Colour	1111	N/A *****
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	1111	N/A *****
Handrail/Pickets/Post Colours	1111	N/A *****
Carpet	1111	N/A *****
Custom Stain/Paint	1111	N/A *****
Comment		

Landing to Basement

Flooring	1111	N/A *****
Comment		

Main Stairs

Type	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7936	Buckingham STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment		

Hall

Flooring	1111	N/A *****
----------	------	-----------

Customer Colours

CESAR, ALFONSO MUNOZ PEREZ/ANDREA, CAROLINA VIDAL PINZON
Project: Wallaceton
Unit: 268, Phase: 2
Model: 25-2140 A The Wallace - ALT

Created: 7/13/2020 11:38:26
Locked:
Closed:

11 of 35

Comment

Throughout

Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 ¼ Baseboard and 2 ¼ Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***

Comment

Purchaser: Cesar Munoz
CESAR, ALFONSO MUNOZ PE

JUL-17-2020
Date

[Signature]
Decor Consultant

July 17, 20
Date

Purchaser: [Signature]
ANDREA, CAROLINA VIDAL P

July 17/2020
Date

[Signature]
Wallaceton

APPROVED

-08-04-2020

Date Approved



Sales Selection Sheet
Wallaceton

12 of 35
TEL:

PURCHASERS: CESAR, ALFONSO MUNOZ PEREZ and ANDREA,
CAROLINA VIDAL PINZON

LOT / UNIT 268	PHASE 2	MODEL 25-2140 A The Wallace - ALT PLAN	
-------------------	------------	---	--

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

ADMIN FEE

1	DELETE FIRE PLACE IN GREAT ROOM	Qty: (1)
29,489	Note:	

Ceramics

2	CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2	Qty: 1
181,823		
29,485	Note:	
3	CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 2	Qty: 1
189,350		
29,486	Note:	

Electrical

4	ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) SKETCH # 2 PAGE 15	Qty: 2
189,445		
29,467	Note: 4 POT LIGHT IN THE DINING ROOM- USE SEPARATE SWITCH 6-POT LIGHT IN GREAT ROOM- USE SEPARATE SWITCH 4 POOT LIGHT IN THE KITCHEN-USE SEPARATE SWITCH 2 POT LIGHT IN BREKFASST ROOM - USE SEPARATE SWITCH	
5	ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET.	Qty: 1
189,417		
29,488	Note: RELOCATE STD. KITCHEN LIGHT TO BE ABIVE THE BREAKDAST BAR- USE STD. KITCHEN SWITCH SKETCH # 2 PAGE 15	

Granite

6	GRANITE - COUNTERTOP - 3/4" GROUP 1 WITH MITRE EDGE - KITCHEN / ISLAND - UPGRADE 1	Qty: 1
181,864		
29,487	Note:	

Hardwood

7	HARDWOOD - VINTAGE - 5" WHITE OAK SCULPTED - DINING ROOM - UPGRADE 4	Qty: 1
181,894		
29,474	Note:	
8	HARDWOOD - VINTAGE - 5" WHITE OAK SCULPTED - GREAT ROOM - UPGRADE 4	Qty: 1
181,890		
29,478	Note:	

Heating/Air

9	HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED.	Qty: 1
89,474		
29,473	Note: SPECS PAGES 24-27 GAS RANGE	

Initials: CA A.V



Sales Selection Sheet
Wallaceton

13 of 35

PURCHASERS: CESAR, ALFONSO MUNOZ PEREZ and ANDREA,
CAROLINA VIDAL PINZON

TEL:

LOT / UNIT 268	PHASE 2	MODEL 25-2140 A The Wallace <i>ALT PLAN</i>	
-------------------	------------	--	--

Sub Total
HST
Total

- 1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

PURCHASER:	<u>CESAR</u>	<u>17-Jul-20</u>	<u>[Signature]</u>	<u>17-Jul-20</u>
	CESAR, ALFONSO MUNOZ PEREZ	DATE	Decor Consultant	DATE
PURCHASER:	<u>[Signature]</u>	<u>17-Jul-20</u>	- APPROVED -	
	ANDREA, CAROLINA VIDAL PINZON	DATE	-08-04-2020	
			Date Approved	Heathwood Homes (Huron) Limited

PAID BY AMENDMENT
DEPOSIT OF 4100
VISA 1000
CHEQUES 3100

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

14 of 35


THE WALLACE

ELEVATION A | 2,140 SQ. FT.
580 sq. ft. of opt. finished lower level

25-2140 ALT ELEV.A

WALLACETON
EST. 1875

Sketch # 1

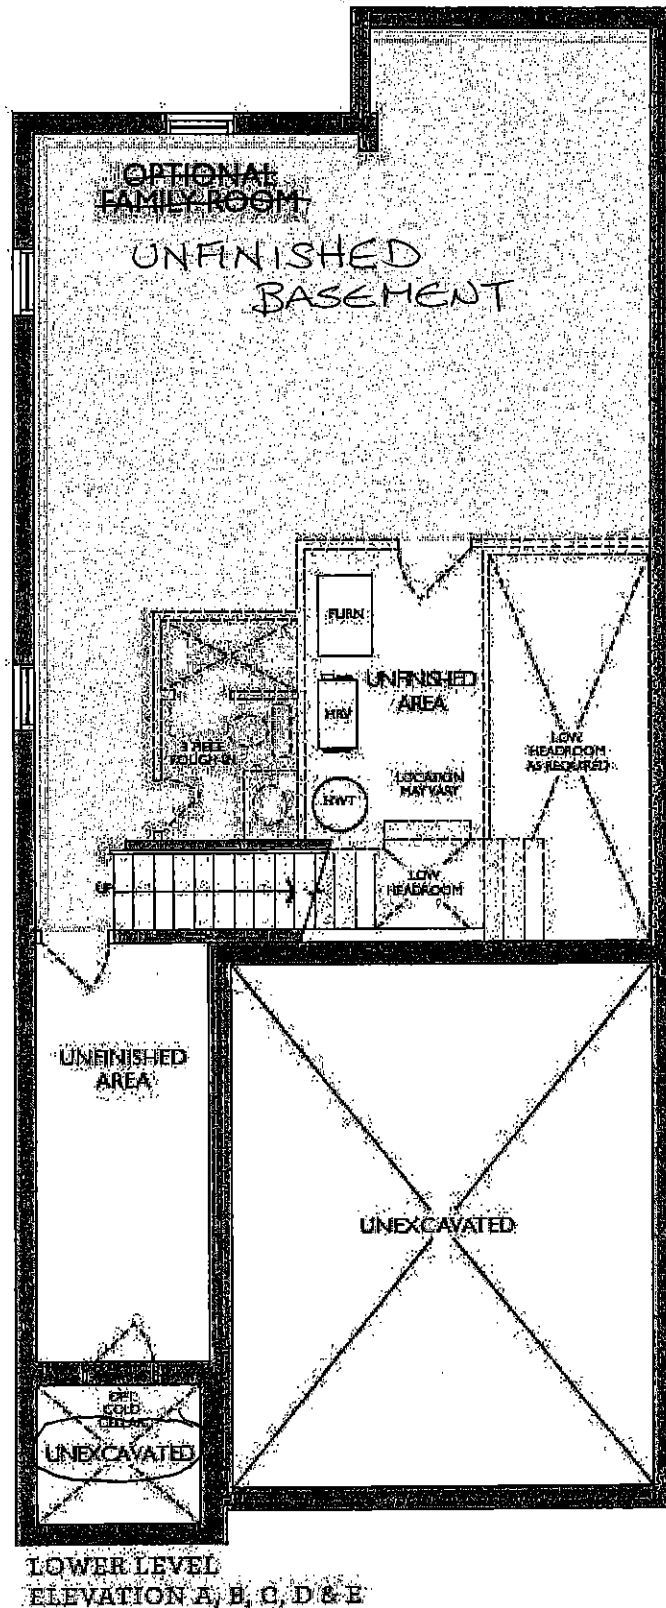

A.V
CM

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

15 of 35


Sketch # 2

THE WALLACE

ELEVATION A | 2,140 SQ. FT.
580 sq. ft. of opt. finished Lower Level

25-2140 ALT ELEV.A

WALLACETON
EST. 1979

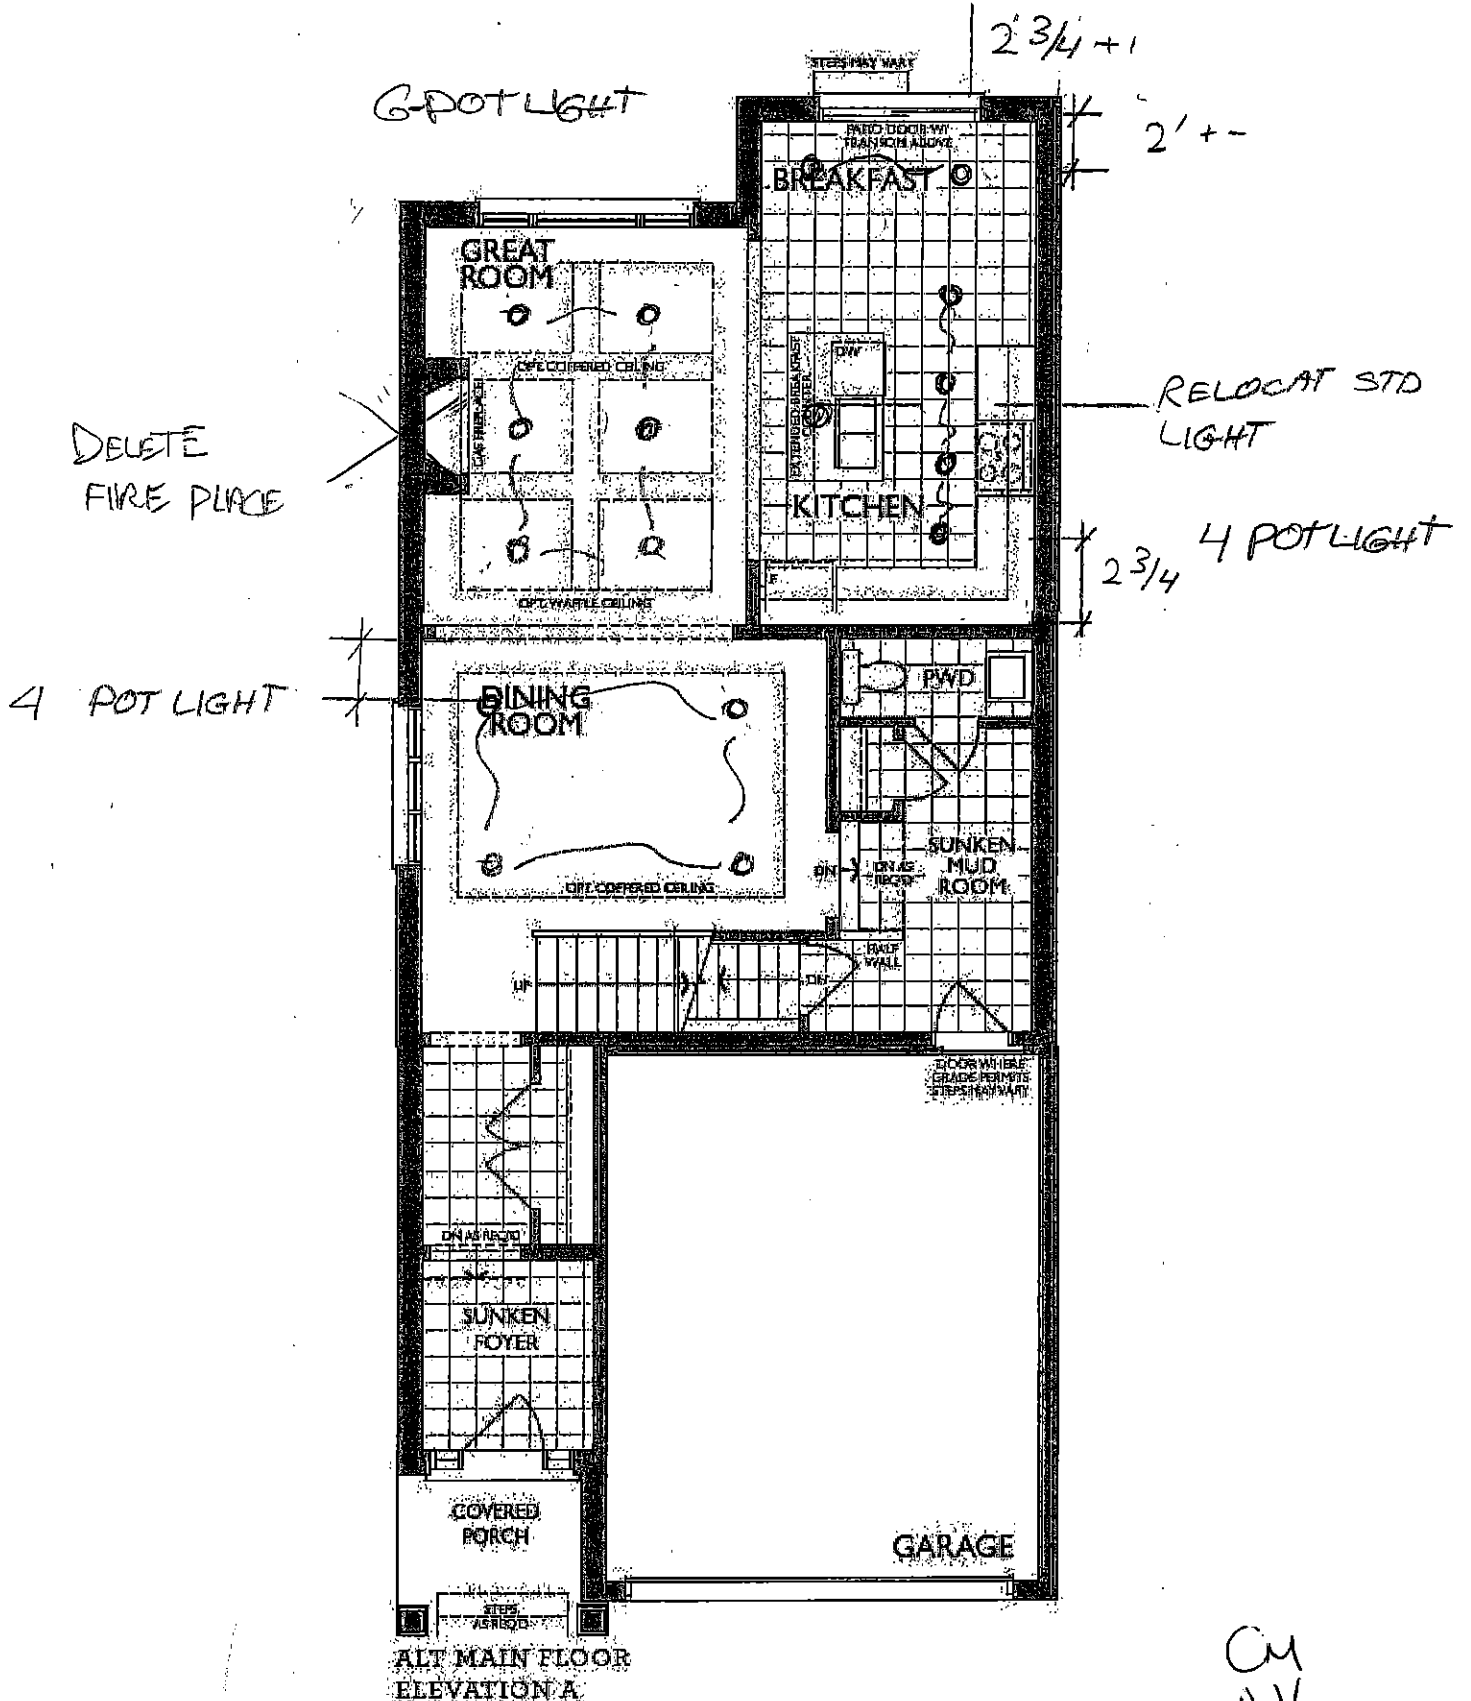


UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

16 of 35

Sketch #3

25-2140 ALT ELEV.A

THE WALLACE
ELEVATION A | 2,140 SQ. FT.
588 sq. ft. of opt. finished lower level
WALLACETON
EXT. 1030

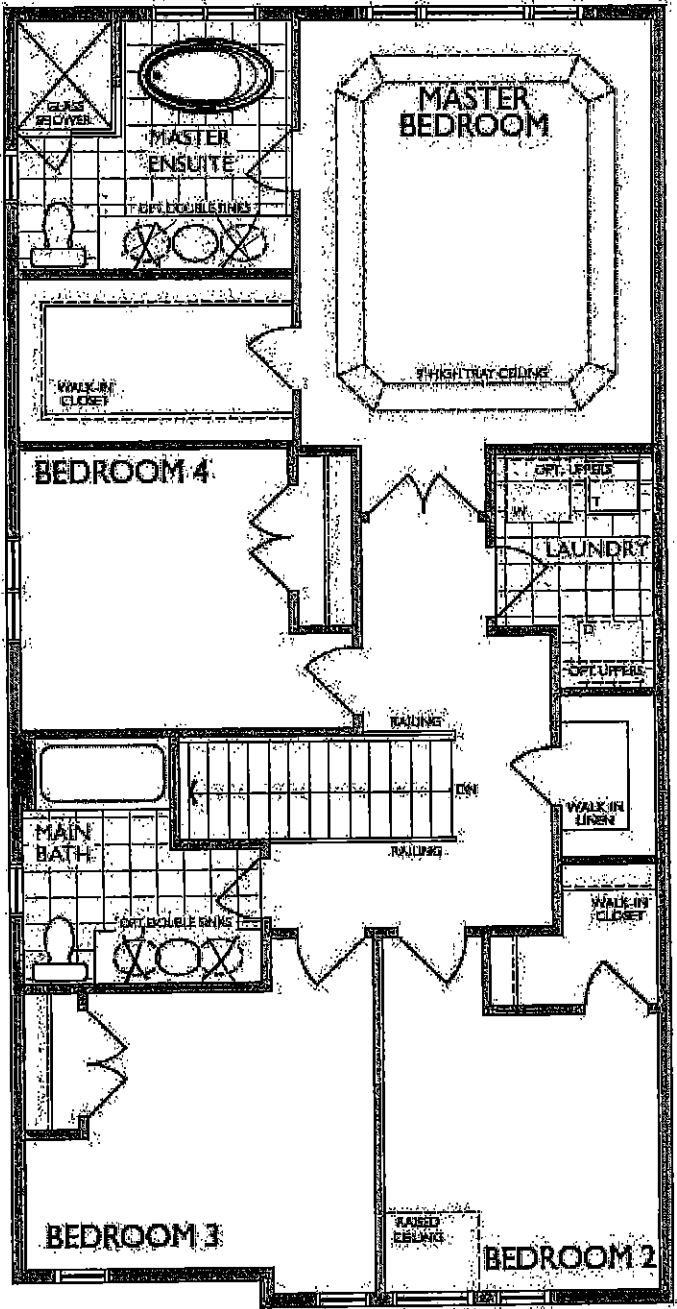


SECOND FLOOR
ELEVATION A



CM
A-V

UK-75 WALLACETON
 LOT 268
 25-2140 ELEV A ALT
 THE WALLACE

17 of 35

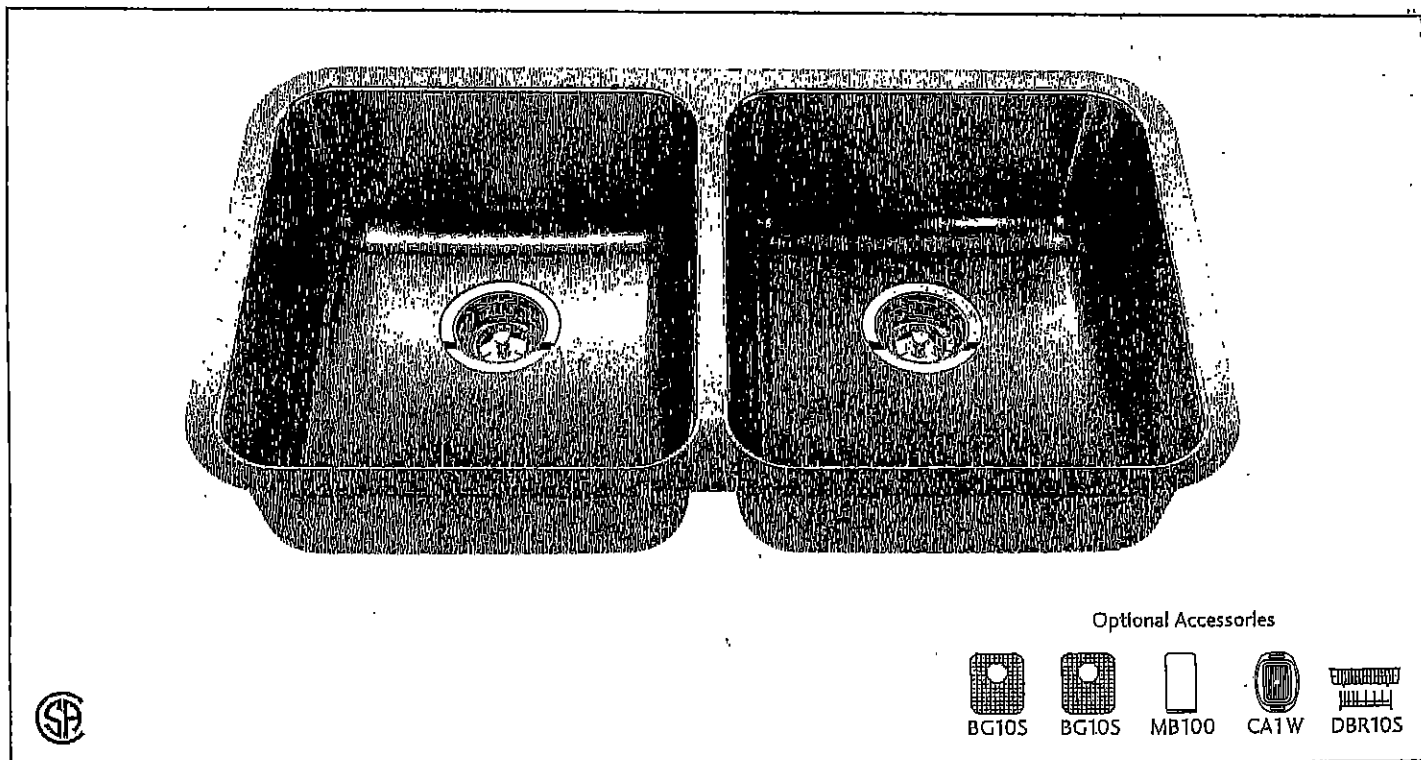

Optional Accessories

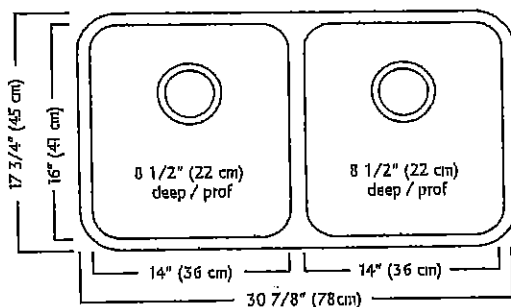

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
 P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

AN
 CM


UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

18 of 35

STANDARD KITCHEN FAUCET

Align

Modern

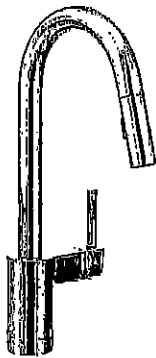

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

A.V
CM

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

19 of 35

MASTER BATHROOM

American Standard
Style That Works Better

 BARRIER FREE


OVALYN™
UNDERCOUNTER SINK
VITREOUS CHINA

OVALYN™ UNDERCOUNTER SINK


- Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template

☐ 0496.221 Unglazed rim
489 x 413mm
(19-1/4" x 16-1/4")

Bowl size:
432mm (17") wide
356mm (14") front to back
140mm (5-1/2") deep

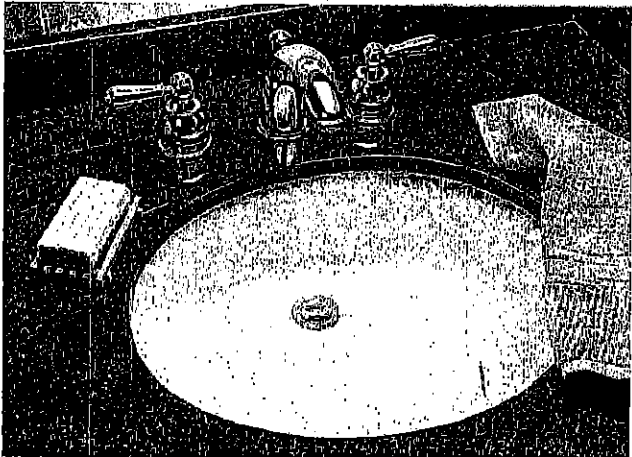


Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures
• CAN/CSA B45 series

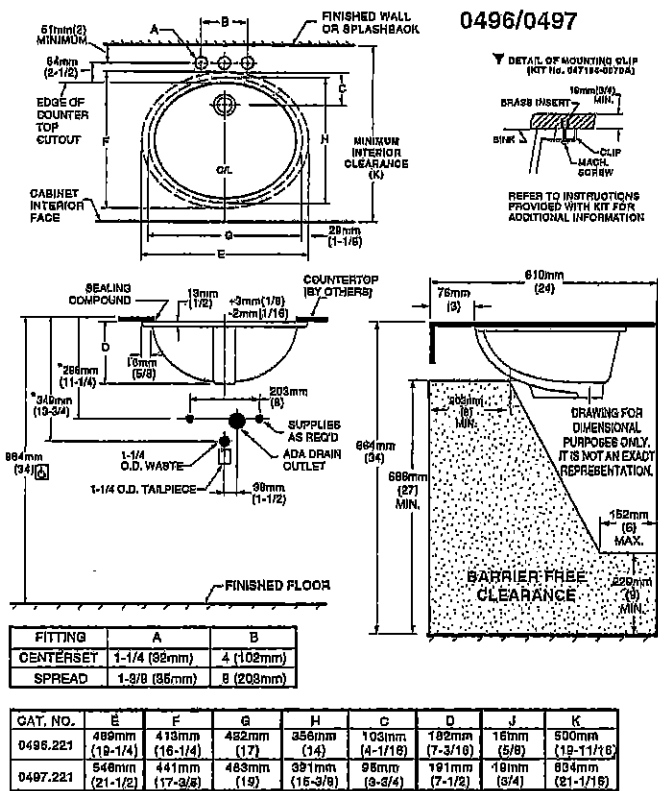


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

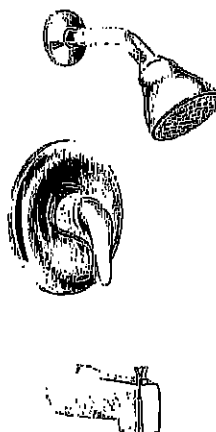

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†

(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS


A.V.
C.V.

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

21 of 35

SC(B)500 | ALITO Collection

Cyclone®
Breathe Better

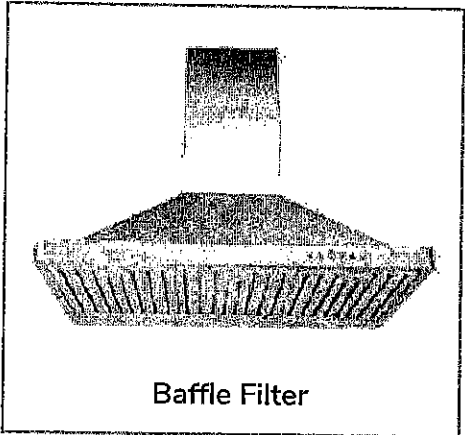

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with time-delay OFF feature up to nine minutes, 550 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel



Dishwasher
Safe Filters



Long-Lasting
LED Light



Time-Delay
OFF Feature



Model	Colour	Ducting	Filters	Size	CFM
SC50024	Stainless Steel	6"	Mesh	24"	550
SC50030	Stainless Steel	6"	Mesh	30"	550
SC50036	Stainless Steel	6"	Mesh	36"	550
SCB50024	Stainless Steel	6"	Baffle	24"	550
SCB50030	Stainless Steel	6"	Baffle	30"	550
SCB50036	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive Unit 16, Toronto, ON, M1S 3J1, Canada



Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

SC(B)500 | ALITO Collection

1225
Cyclone[®]
Breathe Better

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W)
- Dishwasher-safe mesh or baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- Plug-in connection

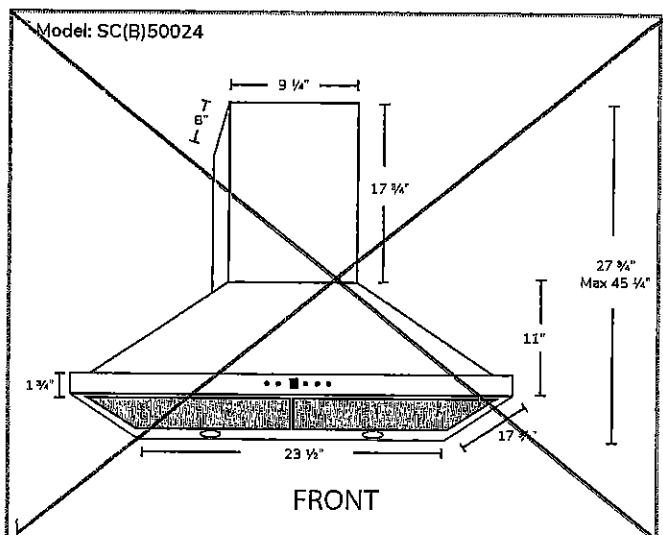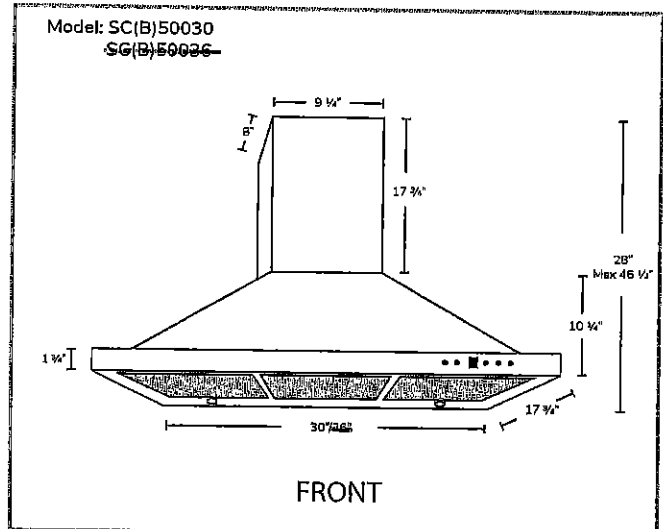

Options

- Filters: SC500 - Quick Release Aluminum Mesh Filters
SCB500 - Quick Release Stainless Steel Baffle Filters
- Available Chimney Flues:
Short (7 ft. - 8 ft. A1.CH10)
Standard (8 ft. - 9 ft. A1.CH18)
Extended (9 ft. - 11 ft. A1.CH30)
- Widths: 24", 30", 36"

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120V/60Hz
- Power Consumption: 210 Watts
- Current: 2.5 Amps
- Fan Speed: 1600RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Dimensions: Width: 24", 30", 36"
Height: 46"
Depth: 18"

- Noise Level: Min. 2 Sones
Max. 6 Sones



Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB
WRF535SMB

WRF535SWB
WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

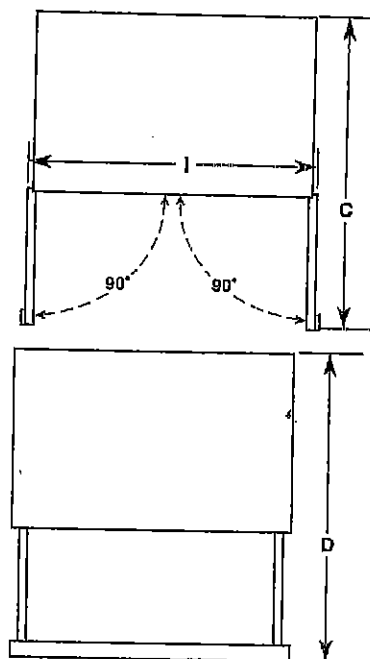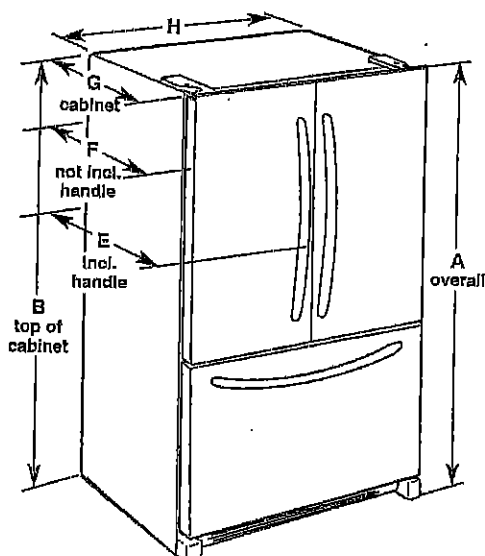

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SWB 25.2 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/2" (135 cm)	35 1/2" (90 cm)	32 1/2" (83.7 cm)	29 1/4" (74 cm)	35 1/2" (90.5 cm)	43 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/2" (135 cm)	35 1/2" (90 cm)	32 1/2" (83.7 cm)	29 1/4" (74 cm)	35 1/2" (90.5 cm)	43 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	47 1/2" (119.5 cm)	52 1/2" (132.4 cm)	34 1/2" (87.5 cm)	31 1/2" (81.1 cm)	28 1/2" (71.4 cm)	32 1/2" (82.9 cm)	42 1/2" (107.6 cm)
WRF540CWB 20 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48" (121.9 cm)	44 1/2" (113.0 cm)	29 1/2" (74.6 cm)	28" (71.1 cm)	24 1/4" (61.3 cm)	35 1/2" (90.5 cm)	39 1/2" (100.0 cm)

LOCATION REQUIREMENTS

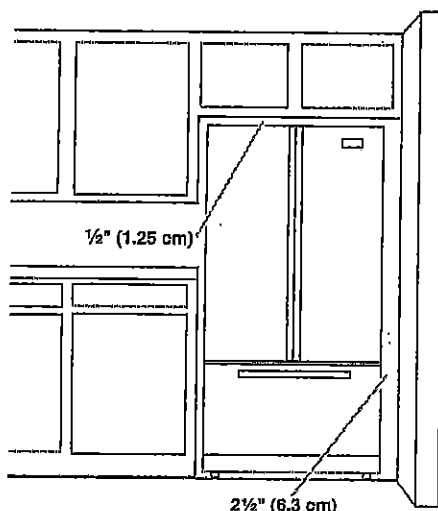

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

24 of 35

Whirlpool®

FRONT CONTROL
GAS RANGES



FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.*



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.



Every day, care.™

From the #1 Selling Appliance brand in the USA†

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

25 of 35

Front Control Gas Ranges

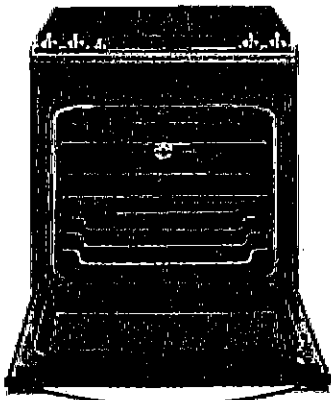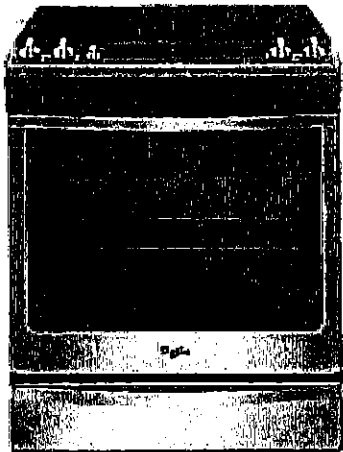

Available colors



S
Stainless
Steel




H
White



B
Black

PRODUCT DIMENSIONS

This manual covers several models. Your model may accept differences from the models depicted. Dimensions given are maximum dimensions of models.



- A: 35 1/4" (900 mm) height from floor to top of cooktop
- B: 20 1/2" (519 mm) depth
- C: 31 1/2" (803 mm) width
- D: 30 1/2" (775 mm) height from floor to top of oven door
- E: 26 1/4" (667 mm) width from front panel to back of range
- F: 26 1/4" (667 mm) width from front panel to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the concept as a reference for leveling the range is not recommended.
*Range can be leveled up to 1/2" (12.5 mm) by adjusting the leveling legs.

Type of Gas


Natural gas

For this range, a Ready Set for use with Natural gas. See "Gas Conversion" section. If a conversion kit is required, please refer to the manual for the type of gas that can be used. If the type of gas is not listed, the type of gas available should be used.

LP gas conversion

Conversion must be done by a qualified service technician. No attempt should be made to convert the appliance from LP gas to natural gas or vice versa. See "Gas Conversion" section.

CABINET OPENING DIMENSIONS

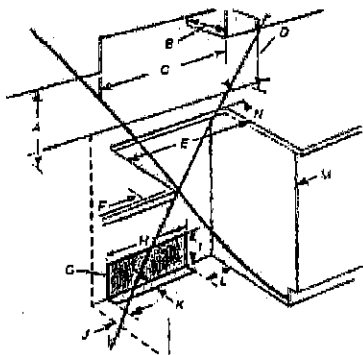

IMPORTANT: If installing a large hole or irregular hole, refer to the "Large Hole" section. A range hood is required for installation. Refer to the instructions for dimensional clearance above the cooktop. The range may not be installed in a cabinet with a depth less than 24 inches (610 mm).
NOTE: When installed in a cabinet, the top of the oven door may protrude beyond the cabinet.

- A: 35 1/4" (900 mm) height from floor to top of cooktop
- B: 20 1/2" (519 mm) depth
- C: 31 1/2" (803 mm) width
- D: 30 1/2" (775 mm) height from floor to top of oven door
- E: 26 1/4" (667 mm) width from front panel to back of range
- F: 26 1/4" (667 mm) width from front panel to back of range
- G: 31 1/2" (803 mm) width
- H: 30 1/2" (775 mm) height from floor to top of oven door
- I: 26 1/4" (667 mm) width from front panel to back of range
- J: 26 1/4" (667 mm) width from front panel to back of range
- K: 31 1/2" (803 mm) width
- L: 30 1/2" (775 mm) height from floor to top of oven door
- M: 26 1/4" (667 mm) width from front panel to back of range

NOTE: 24" (610 mm) minimum clearances from back of cabinet to back of range. 24" (610 mm) minimum clearances from back of cabinet to back of range. 24" (610 mm) minimum clearances from back of cabinet to back of range.

WEG745HOF

NEW

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Center Oval burner
• Temperature Sensor



CompleteClean System
• EZ-2-Lift™ Hinged Grates
• AquaLift™ Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook

ACCESSORIES & REPLACEMENT PARTS

- Part number 8273888A Anti-Tip Kit for Range
- Part number 4378577 Brick Baking Stone
- Part number 4390923 Porcelain Broiler Pan & Grid
- Part number W10123240 Premium Broil Pan & Roasting Rack
- Part number 8009 Appliance Light Bulb - 40 Watt

Whirlpool®

*Compared to a traditional preheat and bake cycle for pizza, nuggets/fries, pies and lasagna. **Compared to thermal-bake cycle on the same model. †Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers, and Laundry appliances. Timeline: 2014.

©2016 Whirlpool. All rights reserved. 5716 Form No. WC130089B

26 of 35

Whirlpool® 30" (76.2 cm) Slide-in Gas Range

C

PRODUCT MODEL NUMBERS

WEG798H0D

WEG760H0D

WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:


- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, 1/2" (1.3 cm) or 3/4" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A 1/2" (1.3 cm) male pipe thread is needed for connection to the female pipe-threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



A. Gas supply line
B. Shutoff valve "open" position
C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

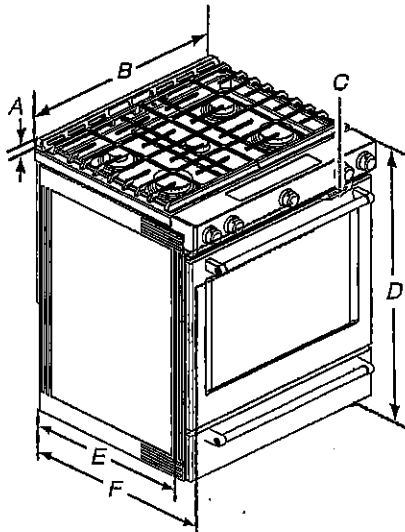

- A. 1 1/8" (3.0 cm) height from cooktop to top of vent
- B. 29 1/4" (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 28 1/8" (71.9 cm) max. depth from front of console to back of range.
- F. 28 1/4" (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

®TEFLON is a registered trademark of Chemours.

27 OF 35

Cabinet Dimensions


Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.


Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

Slide-In Cutout

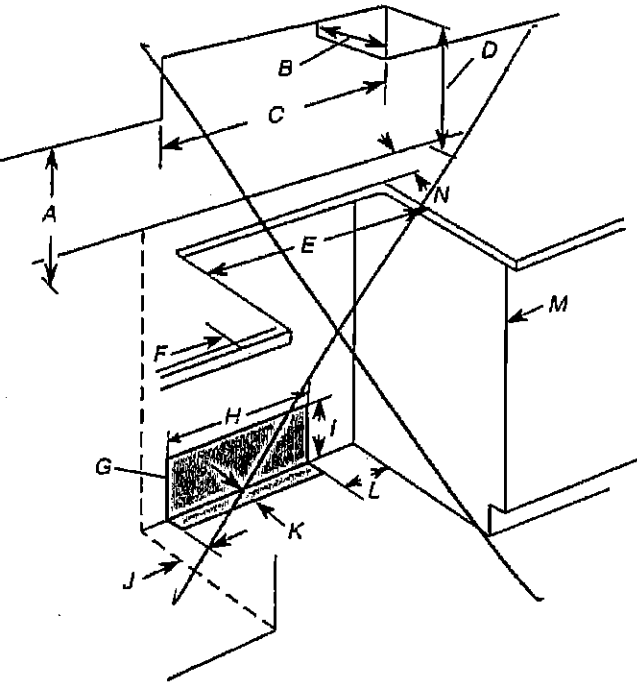

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/8" (19.5 cm)
- J. 4 1/8" (12.2 cm)
- K. 3 1/8" (9.4 cm) plus measurement of N
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining counter depth should not exceed 2 1/4" (5.7 cm).

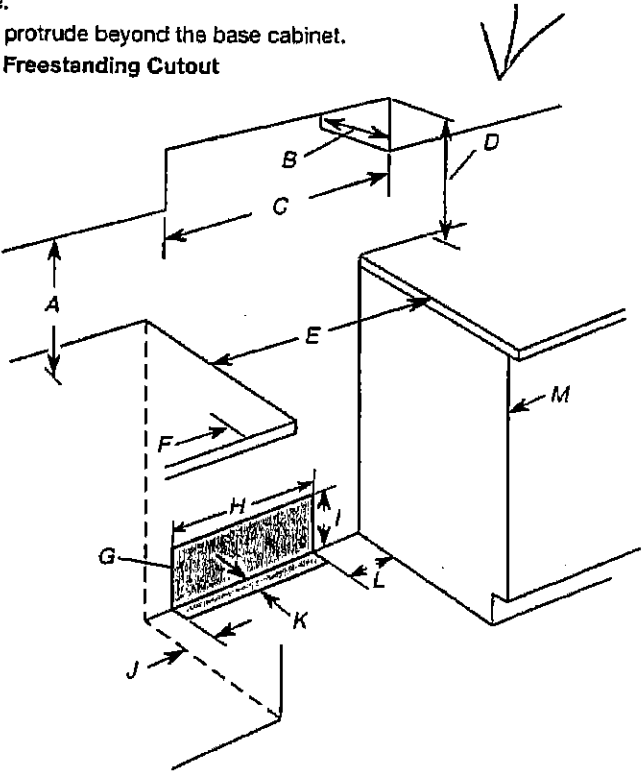

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/8" (19.5 cm)
- J. 4 1/8" (12.2 cm)
- K. 3 1/8" (9.4 cm)
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

28 of 35

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDE530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.


Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

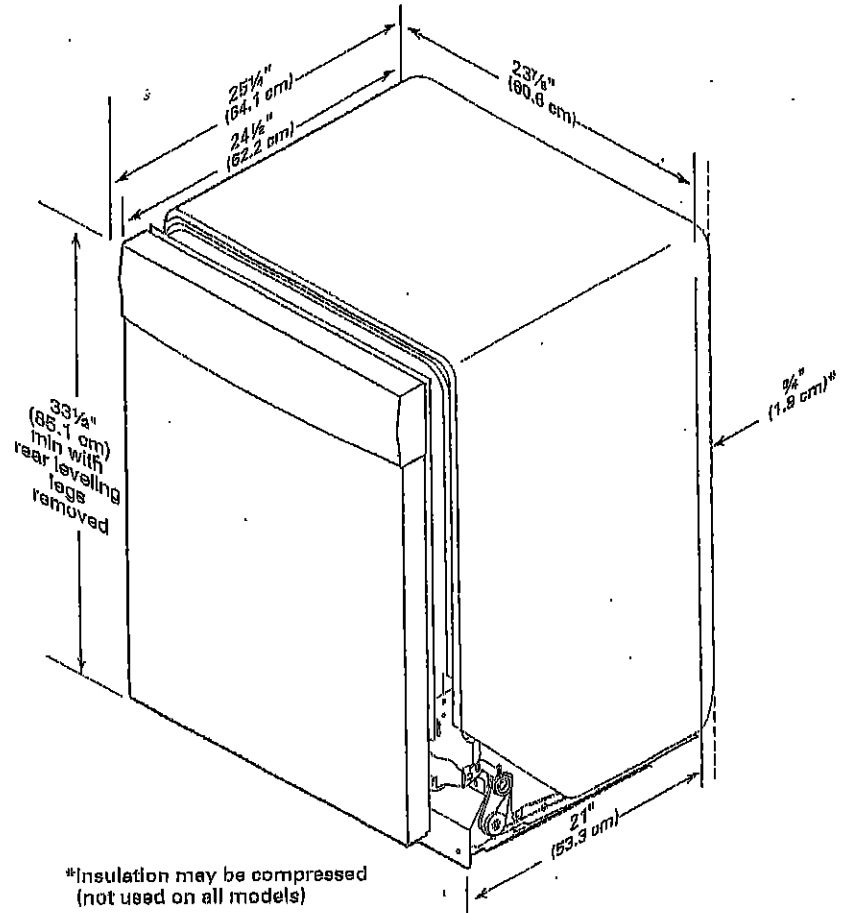

*Insulation may be compressed (not used on all models)

Cy
A-V


1, 2
29 of 35

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear levelling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

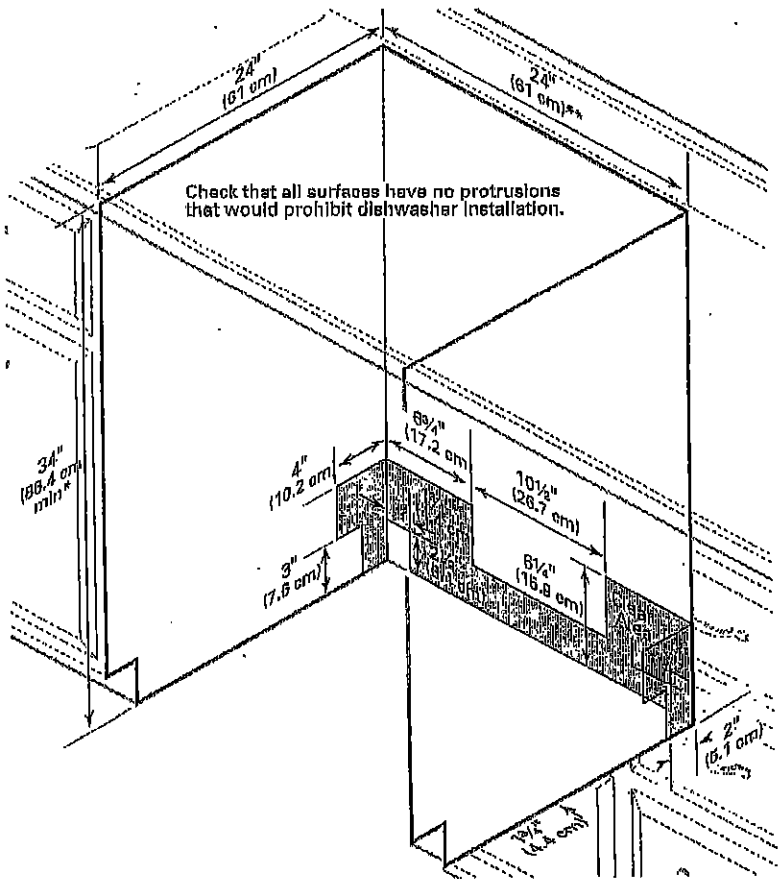


CM
A-V

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

30 of 35

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

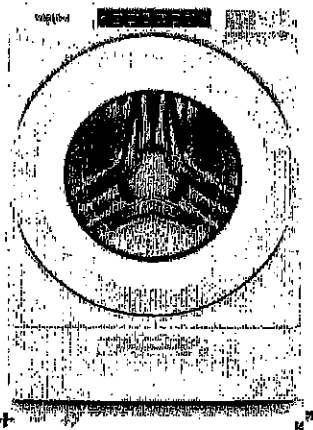

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

CM
A-V

31 of 35

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kg).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

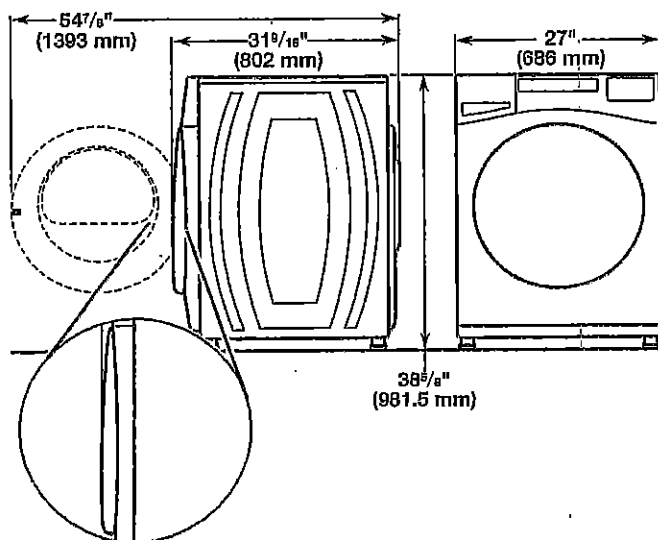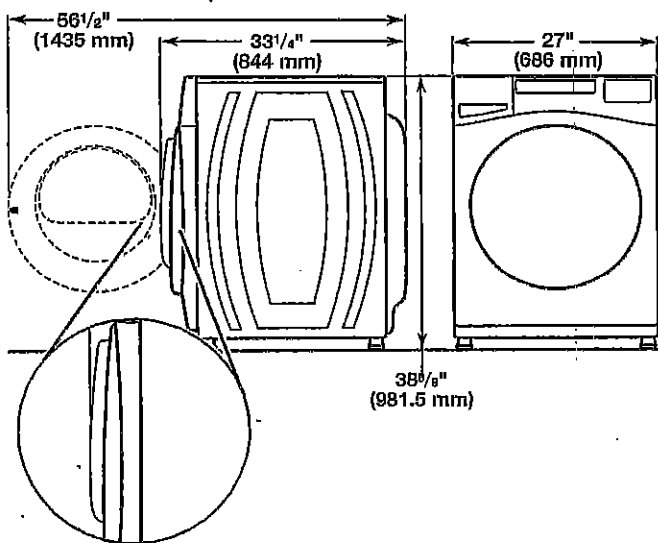


Maytag Models

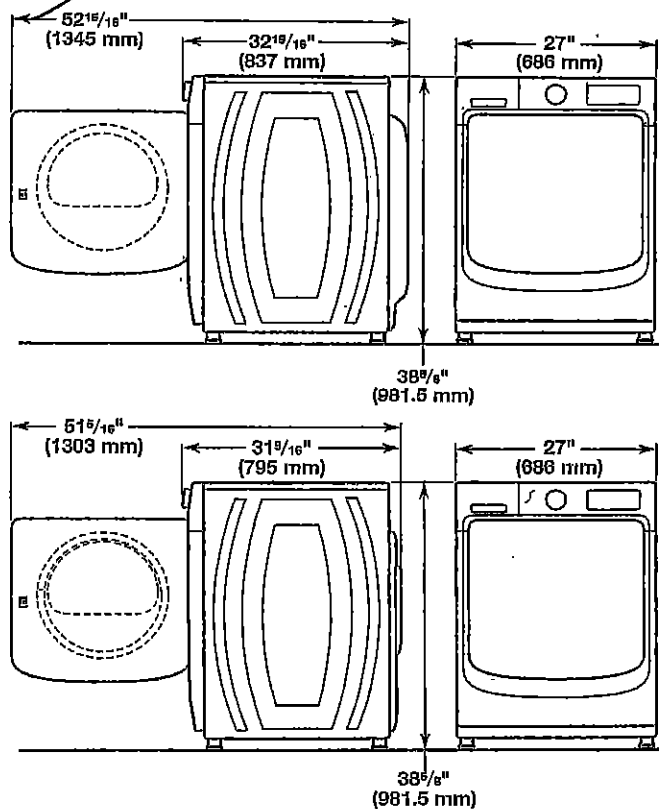

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

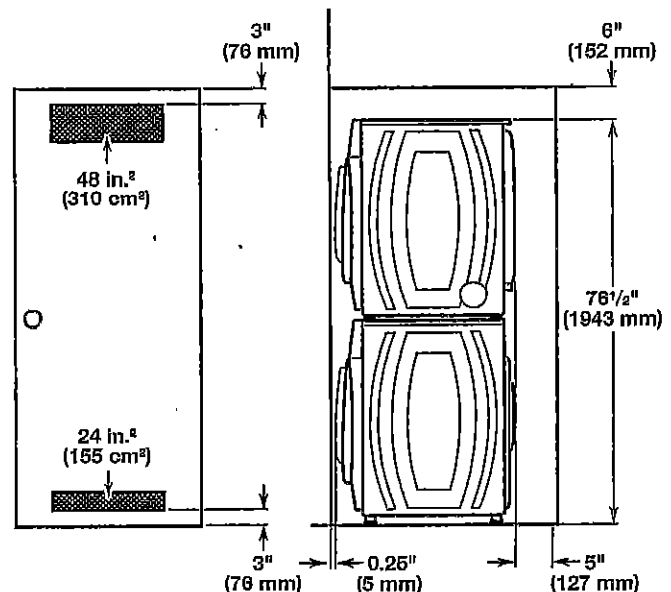

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


CM
A-V

UK-75 WALLACETON
 LOT 268
 25-2140 ELEV A ALT
 THE WALLACE


32 of 35

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

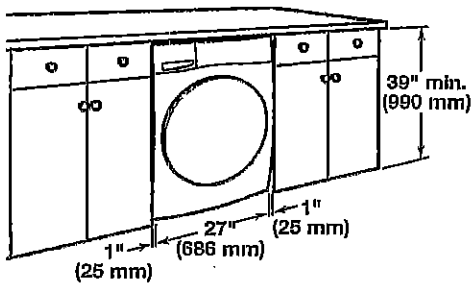

Recessed area or closet installation:

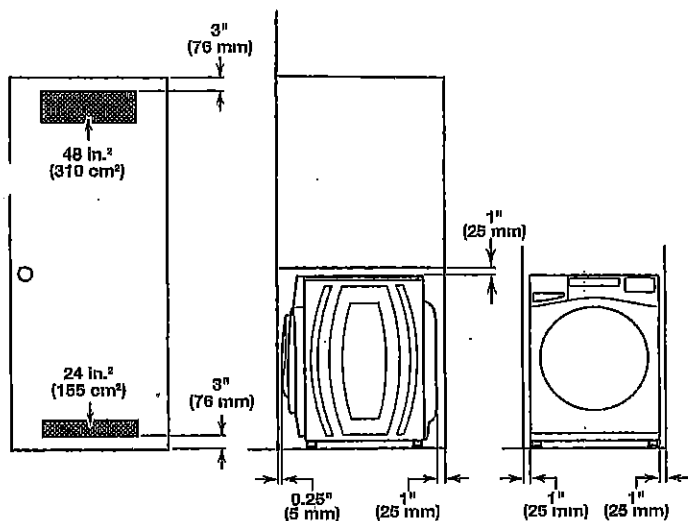

Custom cabinet installation:

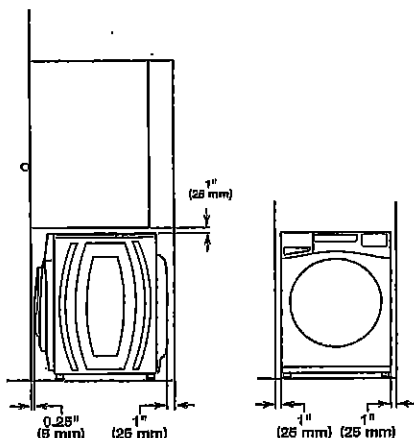


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

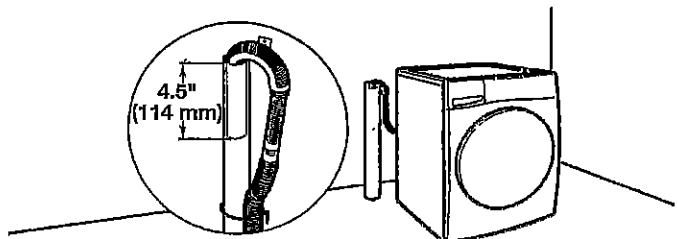


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

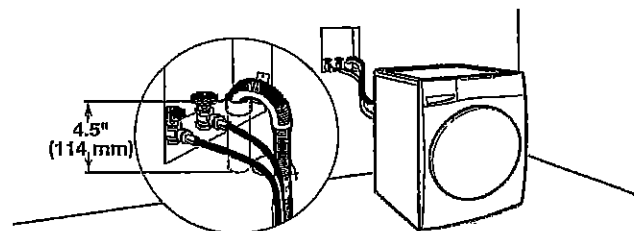

See requirements for floor standpipe drain system.

Laundry tub drain system

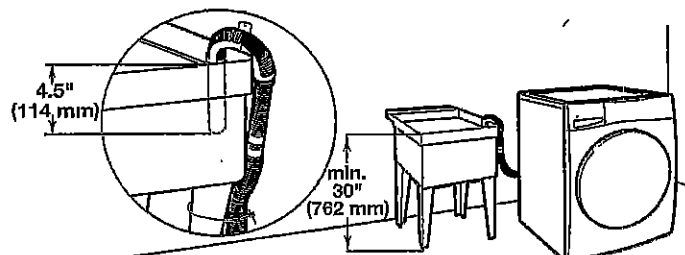

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


CM
 A-V

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

33 of 35

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

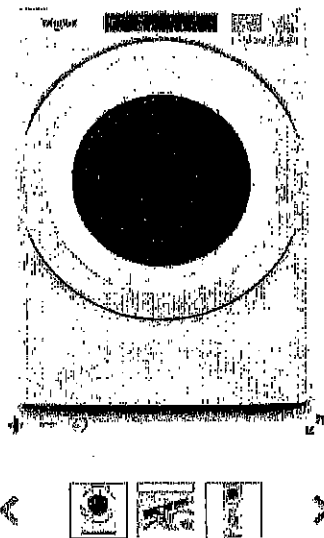

Define
Your Style
www.whirlpool.ca

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls

Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls
Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	35
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


CM
A-V

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

34 of 35

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

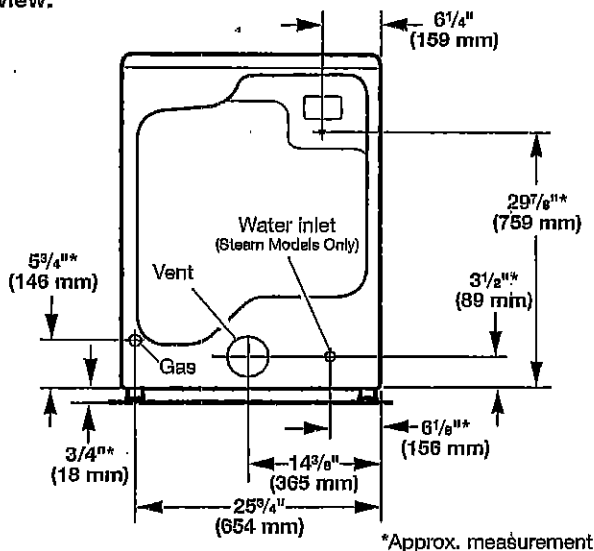

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

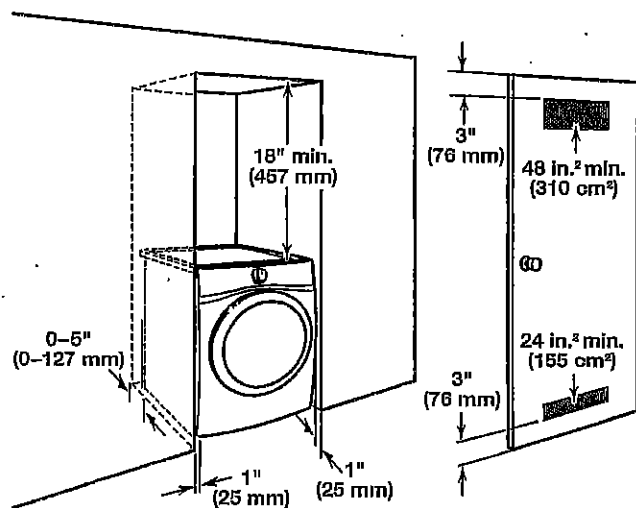

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

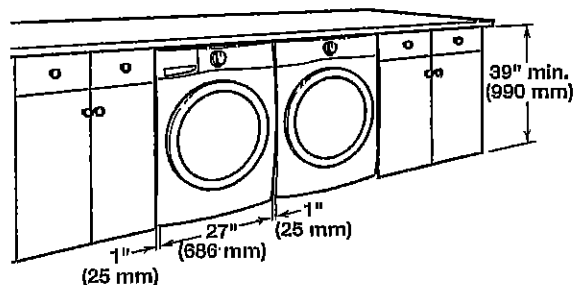

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

Am
A.L.

UK-75 WALLACETON
LOT 268
25-2140 ELEV A ALT
THE WALLACE

35 of 35

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

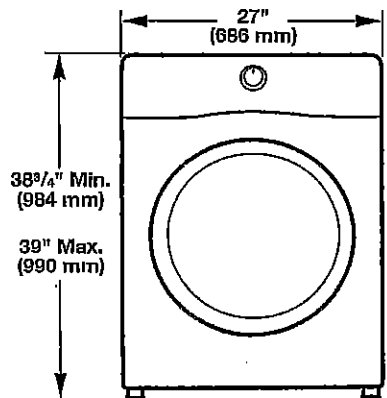


Side view:

Whirlpool Models ✓

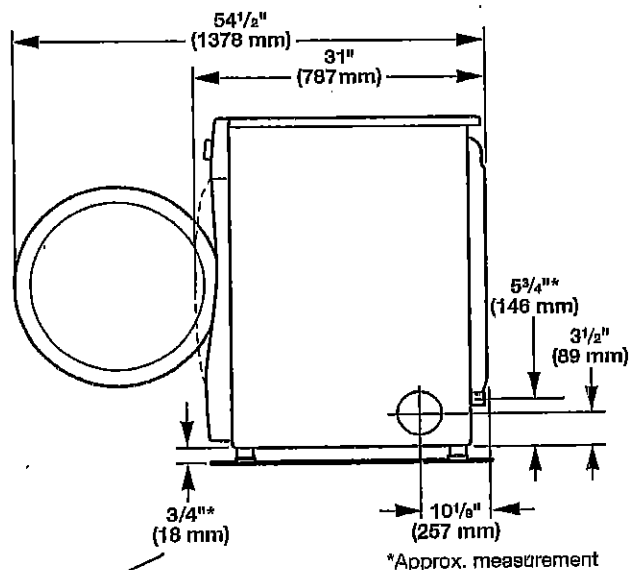

Maytag Models

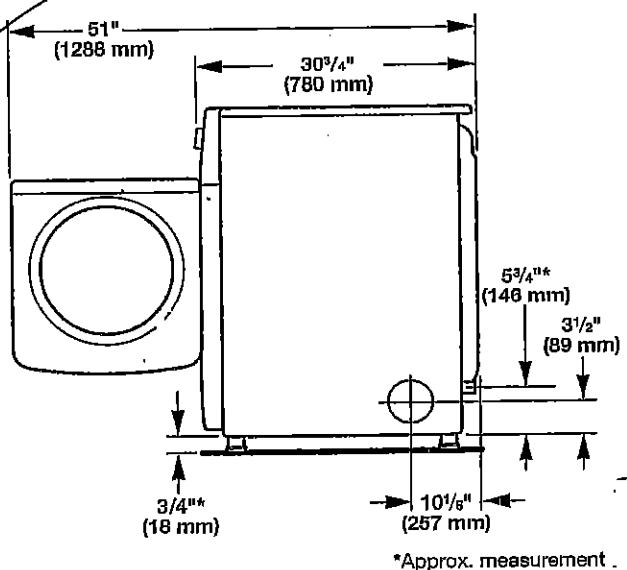

AM
12