

ZONING INFORMATION

ZONE DESIGNATION	PERMITTED	PROVIDED
R1-26		
LOT AREA (sq m)	420.00	440.82
LOT FRONTAGE (m)	14.300	15.059
FRONT YARD SETBACK TO DWELLING (m)	4.50	6.36
FRONT YARD SETBACK TO GARAGE (m)	6.00	6.00
ONE INTERIOR SIDE YARD SETBACK (m)	1.20	1.28
OTHER INTERIOR SIDE YARD SETBACK (m)	1.20	1.28
REAR YARD SETBACK (m)	6.00	8.28
LOT COVERAGE (%)	40.00	38.89
BUILDING HEIGHT (m)	10.00	8.40
LANDSCAPED OPEN SPACE (%)	30.00	50.54
FRONT YARD LANDSCAPED OPEN SPACE (%)	40.00	62.50

STRUCTURE

MODEL NO.	KAHSHE 3000B								
HOUSE STYLE (i.e. walkout, bungalow etc.)	2 STOREY								
ADJACENT MODEL	<table> <tr> <td>EAST</td><td>KAHSHE 3000A</td></tr> <tr> <td>WEST</td><td>CARLYLE 2950A</td></tr> <tr> <td>NORTH</td><td>N/A</td></tr> <tr> <td>SOUTH</td><td>N/A</td></tr> </table>	EAST	KAHSHE 3000A	WEST	CARLYLE 2950A	NORTH	N/A	SOUTH	N/A
EAST	KAHSHE 3000A								
WEST	CARLYLE 2950A								
NORTH	N/A								
SOUTH	N/A								
FIREBREAK LOT	NO								

LEGEND

	SINGLE CATCHBASIN
	DOUBLE CATCHBASIN
	SANITARY MH
	STORM MH
	SANITARY SERVICE CONNECTION
	STORM SERVICE CONNECTION
	WATER SERVICE CONNECTION
	FLOW DIRECTION
	ROOF DRAIN
	ENGINEERED FILL
000.00	EXISTING ELEVATION
000.00	PROPOSED ELEVATION
FFF	FINISHED 1ST FLOOR
TW	TOP OF FOUNDATION WALL
FS	FINISHED SLAB
USF	U/S FOOTING
RUSF	REAR U/S FOOTING
TWG	TOP OF GARAGE FOUNDATION WALL
USFG	U/S FOOTING GARAGE
	SUMP PUMP
	VALVE AND BOX
	HYDRANT AND VALVE
	BELL PEDESTAL
	CABLE PEDESTAL
	UNDERGROUND PEDESTAL
	HYDRO TRANSFORMER
	STREETLIGHT
	STREETLIGHT PEDESTAL
	HYDRO SERVICE CONNECTION
	SUPER MAILBOX
	MUNICIPAL ADDRESS
	SLOPE 3:1 MAXIMUM
	FOOTINGS LOWERED TO MAINTAIN 1.22m FROST PROTECTION

GENERAL NOTES

ALL SLOPES TO BE 3:1 MAX
THE BUILDER SHALL BE RESPONSIBLE FOR THE VERIFICATION OF HOUSE TYPE AND ELEVATION, PRIOR TO COMMENCEMENT OF CONSTRUCTION

BENCHMARK

ELEVATION: 286.399
ELEVATION IS BASED ON BENCHMARK No. 0011931U463S HAVING AN ELEVATION OF 286.399 METRES.
LOCATION: TOWNSHIP OF CHURCHILL UNITED CHURCH, TABLE IN NORTH STONE FOUNDATION WALL OF TOWER, 23cm FROM NORTHWEST CORNER AND 1.62m BELOW BRICKWORK.

SERVICING CHECK BOX


WATER SERVICE AT PL	SANITARY SERVICE AT PL	STORM SERVICE AT PL
DEPTH	DEPTH	DEPTH
Min 1.70	Min 242.54	2.735
		241.455
		2.65
		241.54

THE UNDERSIGNED HAS REVIEWED AND TAKES RESPONSIBILITY FOR THE ARCHITECTURAL PORTION OF THIS PLAN AND HAS THE QUALIFICATIONS AND MEETS THE REQUIREMENTS SET OUT IN THE ONTARIO BUILDING CODE TO BE A DESIGNER.


QUALIFICATION INFORMATION

LEO ARIEMMA
NAME SIGNATURE LICENCE NUMBER 7561

KEY PLAN

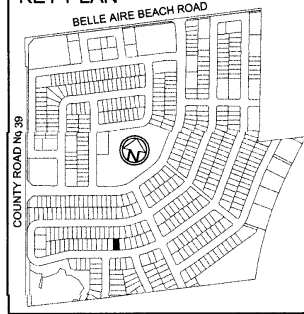

14.3 m
47 foot
LOT

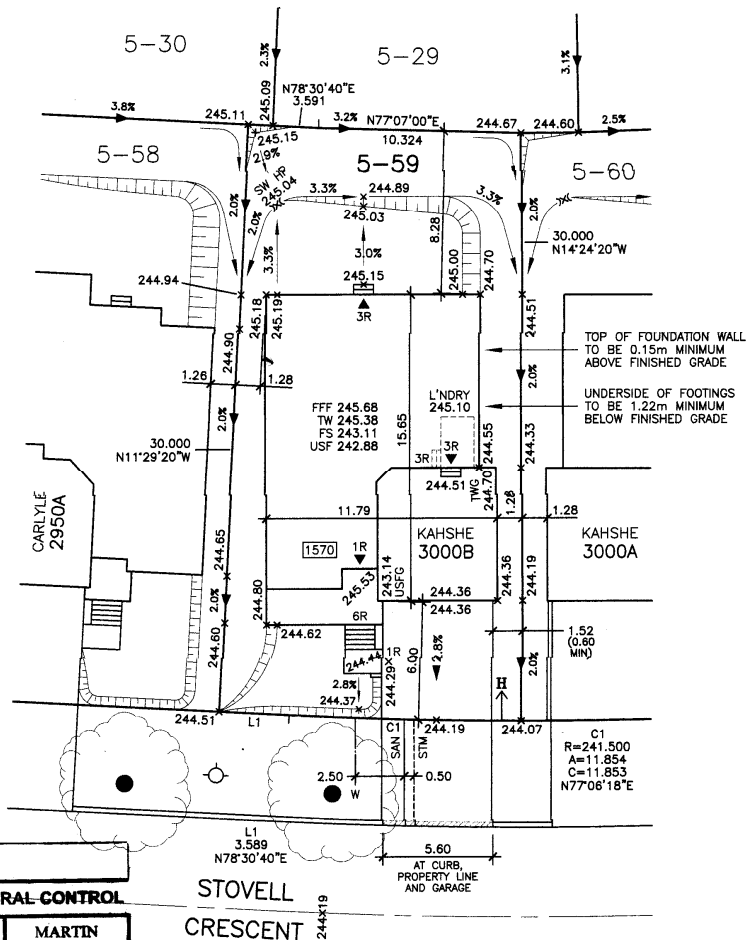

ARCHITECTURAL CONTROL

<input checked="" type="checkbox"/>	Approved
<input type="checkbox"/>	Approved as Noted

MARTIN ASSOCIATES

This approval is for architectural control review only as defined by the applicable Community Control Guidelines and does not constitute compliance or approval for construction.

13-09-2021



NO.	REVISIONS	DATE	INITIAL
1	ISSUED	AU 03 21	TP

ARCHITECTURAL DESIGN INC.

56 PENNSYLVANIA AVE.
UNIT 1
CONCORD, ONTARIO
L4K 3V9
TEL 905 660-9393
FAX 905 660-9419
adci@bellnet.ca



ALL DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF THE ARCHITECT AND CANNOT BE USED OR REPRODUCED WITHOUT HIS APPROVAL
THE CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS ON THE SITE AND REPORT ANY DISCREPANCIES TO THE ARCHITECT
DRAWINGS MUST NOT BE SCALED

THE PROPOSED LOT GRADING IS APPROVED AS BEING IN GENERAL CONFORMITY WITH THE OVERALL APPROVED GRADING PLAN FOR THIS SUBDIVISION.

COMPANY NAME: IBI Group

APPROVED BY: Kishan Pai

SIGNATURE: Kishan Pai

DATE: 05-AUG-2021

STOVELL CRESCENT
LOT 59, PLAN 51M-1169
PHASE 5, STAGE
BELLAIRE PROPERTIES INC.
PARCEL P1 - LEFROY
TOWN OF INNISFIL

SCALE: 1:250
DATE: AUG 2021
DRAWN: T.P.
DESIGNED: T.P.

DRAWING No:

A-1