

Lot 50 FC

PP975SM

GE Profile™ Series 36" Built-In CleanDesign Electric Cooktop

Dimensions and Installation Information (in inches)

KW Rating	
240V	8.9
208V	6.7
Breaker Size	
240V	40 Amps†
208V	40 Amps†


†Note: Check local codes for required breaker size

Important: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead

cabinets. Units are furnished with a 48" flexible armored cable.


Note: 36" Ribbon cooktops are approved for use over GE 30" Single Wall Ovens and Warming Drawers only. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Profile™ Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered, especially on raised bullnose countertops. Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

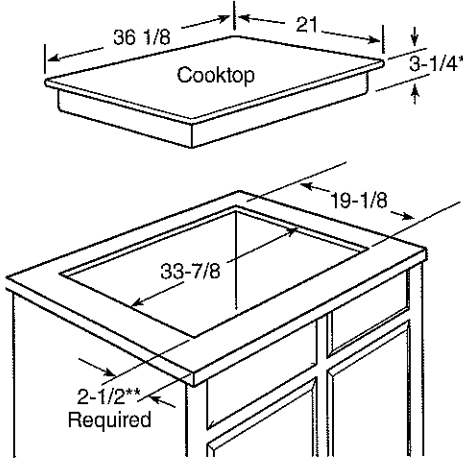

*Depth of unit at conduit connection location (rear) is 6-1/4" on models PP975/945 and 4-3/16" on models CP350/650, PP944/962/932/912, and JP656/356/336. Depth of unit at baffle (front) is 4-5/8" on models PHP960/900.

**Raised bull nose countertops may require up to 3/8" additional clearance to prevent interference with curved front.

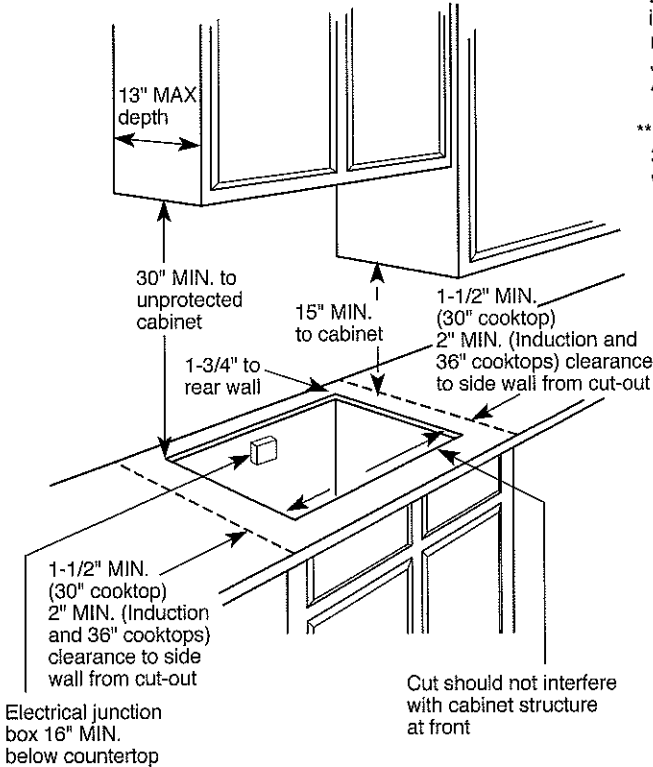

For answers to your Monogram® or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.





Similar Items At Lowe's Canada



Frigidaire CFEF3014LW 30-
in Freestanding 4-Element
\$598.00

[Write a Review](#)



LG LDE3037ST Electric 30-
in Freestanding Range
\$1,898.00

(1)



10966732S

0

GE GE Appliances PCT916SR Stainless Steel 4.4 cubic ft 30-in Profile Series Self-Cleaning Convection Single Wall Oven

Price **\$1,998.00**

Out of Stock

Free Store Pickup
Lowe's Truck Delivery

Be the first to write a review

Lowe's Item Mfr Part #
358644 PCT916SRSS

- Oven Capacity: 4.1 to 4.5 cubic ft
- Approximate Stove & Oven Width: 30-in
- Stoves & Ovens by Type: Electric Range

Notify When in Stock

Add to Compare

[Shipping Policy](#) | [Return Policy](#)

Description	Dimensions	Reviews
-------------	------------	---------

Product Description

Cabinet and accessories not included

- Half/Split Rack: Yes
- Sabbath Mode: Yes
- Proofing: Yes
- Automatic Shut-Off: Yes
- Oven Window: Yes
- Oven Door Lock: Yes
- Hidden Bake Element: Yes
- Oven Meat Probe: Yes
- Installable Under Cooktop: Yes
- Adjustable Cleaning Levels: Yes
- Light Self-Clean Option: Yes
- Heavy-Duty Self-Clean Option: Yes
- Cutout Height: 27.25 Inches
- Cutout Width: 28.5 Inches
- Cutout Depth: 23.5 Inches
- Automatic Convection Conversion: Yes
- Time Bake: No
- Proofing Mode: A dedicated low temperature setting provides the gentle heating needed for proofing breads and other baked goods
- Truetemp system manages oven temperatures to ensure accurate, consistent heating and total cooking performance
- Precise air convection system: The exclusive precise air convection system uses an innovative fan that rotates one way then reverses direction to allow heated air to circulate evenly around food
- Hidden bake oven interior: Hides previously exposed bottom element to deliver a clean interior appearance
- Improved broil performance
- Under counter installation approved
- SmartLogic electronic control with platinum sensor constantly monitors the oven's performance to ensure more precise temperature management
- Delay Bake: Yes
- Precise air convection system
- Convection bake and roast
- CleanDesign oven interior
- Thermal bake and roast
- 7-embossed rack positions

- Audible pre-heat signal
- C or F programmable
- Electronic clock and kitchen timer
- Optional clock display
- Temperature display
- Start pad
- Flush appearance installation
- Amperage: 20/20 amp at 240/208 volt
- KW Rating: 3.8/2.8 kW at 240/208 volt
- EnerGuide Rating: 309 kWh/year
- Keep Warm Setting: Yes

Warranty	
Approximate Stove & Oven	1-year
Width	30-in
Cleaning Type	Self Cleaning
Number of Ovens	1
Oven Capacity	4.1 to 4.5 cubic ft
Oven Fit	Built In
Oven Heat Type	Convection
Stoves & Ovens by Type	Electric Range

Dimensions & Weights

Width:	29.75in
Height:	28.25in
Depth:	27.25in

Questions & Answers

Type your question here...

Ask

There are no questions from the community yet

Customer Reviews

This product has no customer reviews yet

[Write an online review](#) and be the first to share your thoughts with other customers

Tag This Product

Reserve online, pick up in-store within 20 minutes.

New! Discover more categories.

Français | Find Local Store | Welcome, Create an Account or Sign In | My Account

Search products, articles & help topics

Fast, FREE Shipping* or pick up in store today!

- Departments
- Brands
- Deals & Flyers
- Ask & Learn
- Support & Installation

Home > Appliances > Kitchen > Microwaves & Toaster Ovens > Microwave Trim Kits >

g+1 0 Tweet 0 Like 0

Panasonic 27" Microwave Trim Kit (NNTK722S) - Stainless Steel

Model Number: NNTK722S | WebID: 10227511


No reviews yet
Be the first to write a review

Panasonic

LOT 50 FC

219⁹⁹

Fast, FREE shipping*
Easy returns.

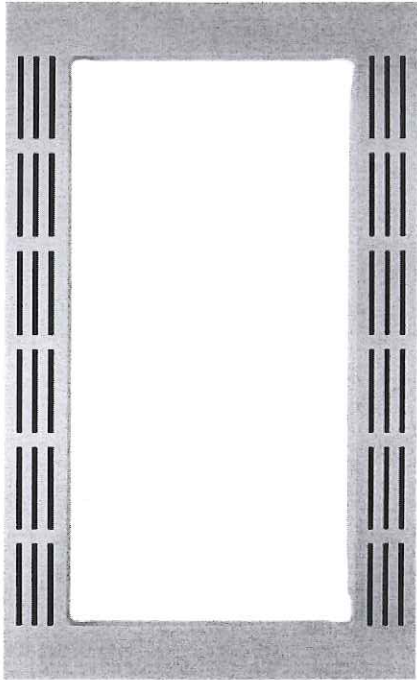

Online

Sold Out

Quantity Remaining: 0

Local Store

☒ Monivale

☒ Barrhaven

☒ Kanata

Check stores

Reserve in Store

Same day pick up, ready in 20 minutes. Details. How it works. See video.

Add to Price Watch

Add to Wish List

Overview

Details and Specs

Height	43.3 cm
Width	68.6 cm
Depth	1.9 cm
Weight	4.5 kg
Warranty Parts	2 Year(s)



Microwave Ovens Countertop

Countertop NN-ST762

Model Number	NN-ST762S	
Type	Family-size	
Capacity	1.6 cu.ft.	
Technology	Inverter®	
Power	Microwave	1,200 W
	Grill	NA
	Grill Power Level	NA
	Convection	NA
Combination	Microwave + Grill	NA
	Power Level	NA
Design	Colour	Stainless Steel
	Dial / Button	-
	Door Release	Push Open
	Finish	Half Mirror
	Panel Design	Embossed look
Display	Type	4 Digit LCD
	Colour	Green
	Back Light	yes
Power Level + Other.	Power Level	10
	Delay Start	yes
	Clock	12 Hour
	Child Lock	yes
Menu	Stage Cooking	3 Stage
	Sensor	yes
	Turbo Defrost	yes
	Popcorn	yes
	Keep Warm	yes (up to 30 minutes)
	Quick Min	yes (up to 10 minutes)

	Auto Reheat	Sensor Reheat
	# of Auto Cook Categories	12
Turntable Size		380 mm
Accessory		Glass Tray
Trim Kit		NNTK722 / 732S
Power Source		120 V / 60 Hz
Power Consumption	Microwave	1,460 W
	Grill	NA
	Combination	NA
Cooking Power	Microwave	1,200 W
	Grill	NA
Dimensions	Outside (H × W × D)	304 × 555 × 493 mm
	Oven (H × W × D)	228 × 418 × 470 mm
Weight	Net	14.3 kg
	Shipping	16.7 kg
NOTE	Specifications are subject to change without notice.	