



Sales Selection Sheet
Wallaceton

10 of 44
TEL: RES.: 226-505-0869

PURCHASER: HAIPING LI

| | | | |
|-----------------------|------------|-----------------------------------|--|
| LOT / UNIT 188C-15 | PHASE 1 | MODEL 20-2095 END B The Forbes | |
|-----------------------|------------|-----------------------------------|--|

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

| | | | |
|--------|---|--------|--|
| 1 | SCHEDULE E: FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER; WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES | Qty: 1 | |
| 31,635 | Note: SPECS PAGES 31-44 | | |

MISC.

| | | | |
|--------|---|--------|--|
| 2 | SCHEDULE E: FIVE THOUSAND DOLLARS (\$5,000) AT DECOR (NO CASH VALUE) -TOWNHOMES | Qty: 1 | |
| 31,636 | Note: | | |
| 3 | SCHEDULE E: DECOR UPGRADES PAGES 1-9 | Qty: 1 | |
| 31,637 | Note: | | |
| 4 | SCHEDULE E: Schedule X Item # 5 Adjustments (e) and (f) Combined to be Capped at \$5,000. | Qty: 1 | |
| 31,638 | Note: | | |

| |
|-----------|
| Sub Total |
| HST |
| Total |

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

| Payment Summary | |
|-----------------------|---------------|
| <u>Paid By</u> | <u>Amount</u> |
| <u>Total Payment:</u> | |

Initials:



Sales Selection Sheet
Wallaceton

11 of 44

PURCHASER: HAIPING LI

TEL: RES.: 226-505-0869

| | | | |
|-----------------------|------------|-----------------------------------|--|
| LOT / UNIT 188C-15 | PHASE 1 | MODEL 20-2095 END B The Forbes | |
|-----------------------|------------|-----------------------------------|--|

PURCHASER: Signature on file
HAIPING LI

17-Aug-20
DATE

BRENDA LUKER
Decor Consultant

17-Aug-20
DATE

- APPROVED -

-08- 17 2020
Date Approved



M. Rosen
Heathwood Homes (Huron) Limited

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

12 of 44

Kitchen

| | | |
|-----------------------------|------|---|
| Cabinet Colour/Style | 6177 | Viking II-MANCHESTER-TIMBERLAKE CL-OAK ***STD*** |
| Countertop | 9053 | Group 1-Quartz-BAYSHORE SAND ***STD*** |
| Countertop Edge | 4010 | SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***  |
| Cabinet Hardware | 7666 | 96650-HARDWARE ***STD*** |
| Island Cabinet Colour/Style | 6177 | Viking II-MANCHESTER-TIMBERLAKE CL-OAK ***STD*** |
| Island Countertop | 9053 | Group 1-Quartz-BAYSHORE SAND ***STD*** |
| Backsplash | 8690 | QT.CD.BIS.0306.br-Colour and Dimension-Biscuit-3 x 6 ***STD*** |
| Backsplash Grout | 2226 | Grout-(00) White ***STD*** |
| Backsplash Tile Pattern | 3060 | HORIZONTAL BRICK ***STD***  |
| HoodFan | 9117 | SCB50030-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS PAGES 8-9 PRE-SSS PAGE 30 |
| Appliances | 9117 | Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included. |
| Appliances | 9117 | Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards. |
| Appliances | 9117 | Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after |
| Comment | | |

Kitchen/Breakfast

| | | |
|--------------------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

RL

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

13 of 44

Comment

Foyer

| | | |
|--------------------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

Comment

Laundry Room

| | | |
|--------------------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

Comment

Laundry Room Opt.

| | | |
|------------------|------|-----------|
| Cabinet - Uppers | 1111 | N/A ***** |
| Cabinet Hardware | 1111 | N/A ***** |

Comment

Mud Room

| | | |
|----------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
|----------|------|---|

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

14 of 44

| | | |
|--------------------|------|---------------------------------|
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

Comment

Powder Room

| | | |
|--------------------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

| | | |
|---------------------------|------|-----------------------------------|
| Plumbing Fixture (Colour) | 1737 | Plumbing Fixtures-WHITE ***STD*** |
|---------------------------|------|-----------------------------------|

Comment

Hall

| | | |
|--------------------|------|---|
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |

Comment

Great Room

| | | |
|----------|------|--|
| Flooring | 7500 | Red Oak Pearl-Vintage Engineered-ANTIQUE BROWN-3/4 inch x 3 1/4 inch ***STD*** |
|----------|------|--|

Comment

HL

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

15 of 44

Upper Hall

Flooring 7500 Red Oak Pearl-Vintage Engineered-ANTIQUE BROWN-3/4 inch x 3 1/4 inch ***3***

Comment

Finished Basement (Rec) Room/Hall

Flooring 9253 DY 16970-Dynasty Tex-SAND-40 oz Poly***STD***

Comment

Master Bedroom

Flooring 9253 DY 16970-Dynasty Tex-SAND-40 oz Poly***STD***

Comment

Bedroom 2

Flooring 9253 DY 16970-Dynasty Tex-SAND-40 oz Poly***STD***

Comment

Bedroom 3

Flooring 9253 DY 16970-Dynasty Tex-SAND-40 oz Poly***STD***

Comment

Bedroom 4

Flooring 9253 DY 16970-Dynasty Tex-SAND-40 oz Poly***STD***

Comment

HL

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

16.44

Master Ensuite

| | | |
|----------------------------|------|---|
| Cabinet Colour/Style | 6267 | Viking III-MANCHESTER-TIMBERLAKE CL-MAPLE ***STD*** |
| Countertop | 8825 | 4588K-07-Countertop-KALAHARI TOPAZ-Wilsonart ***STD*** |
| Countertop Edge | 1111 | N/A ***** |
| Cabinet Hardware | 7666 | 96650-HARDWARE ***STD*** |
| Floor Tile | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |
| | | |
| Shower Floor Tile | 8662 | OD.ON.BON.0202.MT.N-Ontario Series Mosaic-Bone Matte-2 x 2 ***STD*** |
| Shower Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Shower Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |
| | | |
| Shower Wall Tile | 5432 | GE.LR.IVO.0810-La Riserva-Ivory-8 inch x 10 inch ***STD*** |
| Shower Wall Tile Grout | 2226 | Grout-(00) White ***STD*** |
| Shower Wall Tile Pattern | 3090 | VERTICAL STACKED ***STD*** <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |
| Shower Jamb(s) and Sill(s) | 8924 | Shower Jamb / Sill-Vienna Beige ***STD*** |
| Plumbing Fixture (colour) | 1737 | Plumbing Fixtures-WHITE ***STD*** |

Comment

HL

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

17 of 44

Main Bathroom

| | | |
|----------------------------|------|---|
| Cabinet Colour/Style | 6267 | Viking III-MANCHESTER-TIMBERLAKE CL-MAPLE ***STD*** |
| Countertop | 8825 | 4588K-07-Countertop-KALAHARI TOPAZ-Wilsonart ***STD*** |
| Countertop Edge | 1111 | N/A ***** |
| Cabinet Hardware | 7666 | 96650-HARDWARE ***STD*** |
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |
| Wall Tile | 5432 | GE.LR.IVO.0810-La Riserva-Ivory-8 inch x 10 inch ***STD*** |
| Wall Tile Grout | 2226 | Grout-(00) White ***STD*** |
| Main Bathroom Tile Pattern | 3090 | VERTICAL STACKED ***STD*** <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |
| Plumbing Fixture (Colour) | 1737 | Plumbing Fixtures-WHITE ***STD*** |
| Comment | | |

Finished Basement Bathroom

| | | |
|----------------------|------|---|
| Cabinet Colour/Style | 6267 | Viking III-MANCHESTER-TIMBERLAKE CL-MAPLE ***STD*** |
| Countertop | 8825 | 4588K-07-Countertop-KALAHARI TOPAZ-Wilsonart ***STD*** |
| Countertop Edge | 1111 | N/A ***** |
| Cabinet Hardware | 7666 | 96650-HARDWARE ***STD*** |
| Flooring | 5491 | GE.LR.IVO.1313-La Riserva-Ivory-13 x 13 ***STD*** |

HL

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

18 of 44

| | | |
|---------------------------|------|--|
| Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |
| Shower Floor Tile | 8662 | OD.ON.BON.0202.MT.N-Ontario Series Mosaic-Bone Matte-2 x 2 ***STD*** |
| Shower Floor Tile Grout | 2224 | Grout-(44) Pale Umber ***STD*** |
| Shower Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD*** |
| Shower Wall Tile | 5432 | GE.LR.IVO 0810-La Riserva-Ivory-8 inch x 10 inch ***STD*** |
| Shower Wall Tile Grout | 2226 | Grout-(00) White ***STD*** |
| Shower Wall Tile Pattern | 3090 | VERTICAL STACKED ***STD*** <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |
| Shower Jamb(s) | 8924 | Shower Jamb / Sill-Vienna Beige ***STD*** |
| Plumbing Fixture (Colour) | 1737 | Plumbing Fixtures-WHITE ***STD*** |
| Comment | | |

Great Room Fireplace

| | | |
|---------------|------|---|
| Type | 8865 | Dimplex-Electric Fireplace-PF3033HL ***STD*** |
| Mantle | 9114 | NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PAGE 26 |
| Surround Opt. | 1111 | N/A ***** |
| Note | 1111 | Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. |
| Note | 1111 | Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing. |
| Comment | | |

Basement Stairs

AL

HAIPING LI/
Project: Wallaceon
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

19 OF 44

| | | |
|-------------------------------|------|--|
| Type | 1714 | Carpet Grade Stairs ***STD BASEMENT STAIRS*** |
| Colour | 7924 | Antique Brown (Berkshire) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING |
| Carpet Runner | 1111 | N/A ***** |
| Handrail/Pickets/Post Type | 7652 | 1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD*** |
| Handrail/Pickets/Post Colours | 7762 | Carpet Grade-Stain handrail, stringers, nosing ,post(s). (Me |
| Carpet | 9253 | DY 16970-Dynasty Tex-SAND-40 oz Poly***STD*** |
| Custom Stain/Paint | 1111 | N/A ***** |
| Comment | | |

Basement Stairs Landings (Upper and Lo

| | | |
|----------|------|--|
| Flooring | 7500 | Red Oak Pearl-Vintage Engineered-ANTIQUE BROWN-3/4 inch x 3 1/4 inch ***3*** |
| Comment | | |

Main Stairs

| | | |
|-------------------------------|------|--|
| Type | 1712 | Oak Stairs ***STD MAIN STAIRS*** |
| Colour | 7924 | Antique Brown (Berkshire) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING |
| Carpet Runner | 9253 | DY 16970-Dynasty Tex-SAND-40 oz Poly***STD*** |
| Handrail/Pickets/Posts Type | 7652 | 1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD*** |
| Handrail/Pickets/Posts Colour | 1728 | Oak Grade-Stain handrail,oak pickets,stringers,treads,risers |
| Custom Stain/Paint | 1111 | N/A ***** |
| Comment | | |

Main Stairs Landing(s) (Lower)

42

HAIPING LI/
Project: Wallaceton
Unit: 188C-15, Phase: 1
Model: 20-2095 END B The Forbes

Created: 6/4/2020 15:31:01
Locked:
Closed:

20 of 44

Flooring 7500 Red Oak Pearl-Vintage Engineered-ANTIQUE BROWN-3/4 inch x 3 1/4 inch ***STD***

Comment

Throughout

Walls - Paint Colour 1717 22-Wall-WARM GREY ***STD***

Underpad 1079 500 Series-Underpad ***STD***

Thresholds 2232 Metal Thresholds ***STD***

Switches and Plug 5796 Decora White Switches and Plugs ***STD***

Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***

Trim - Paint Colour 1716 Trim-WHITE ***STD***

Comment

Purchaser: HAIPING LI Aug 12/20 Decor Consultant Aug 12/20

Purchaser: Wallaceton -08- 17 2020 Date Approved

AL

| | | | |
|-----------------------|------------|-----------------------------------|--|
| LOT / UNIT 188C-15 | PHASE 1 | MODEL 20-2095 END B The Forbes | |
|-----------------------|------------|-----------------------------------|--|

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Carpet

| | | |
|-------------------------|--|--------|
| *1 179,708 31,368 | CARPET - CARPET RUNNER -DYNASTY TEX DY 16970 SAND 40 oz Poly - MAIN STAIR - UPGRADE 1 Note: | Qty: 1 |
|-------------------------|--|--------|

Ceramics

| | | |
|------------------------|--|--------|
| 2 179,666 31,364 | CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 1 Note: | Qty: 1 |
| 3 189,411 31,365 | CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 1 Note: | Qty: 1 |

Hardwood

| | | |
|------------------------|--|--------|
| 4 179,773 31,366 | HARDWOOD - VINTAGE - 3-1/4" RED OAK ENGINEERED - UPPER HALL - STANDARD SERIES Note: | Qty: 1 |
|------------------------|--|--------|

MISC.

| | | |
|-----------------|---|--------|
| 5 31,362 | Note: FIVE THOUSAND (\$5000) DOLLARS AT DECOR (NO CASH VALUE) | Qty: 1 |
|-----------------|---|--------|

| |
|-----------|
| Sub Total |
| HST |
| Total |

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.



Sales Selection Sheet
Wallaceton

22 of 44
TEL: RES.: 226-505-0869

PURCHASER: HAIPING LI

| | | | |
|-----------------------|------------|-----------------------------------|--|
| LOT / UNIT 188C-15 | PHASE 1 | MODEL 20-2095 END B The Forbes | |
|-----------------------|------------|-----------------------------------|--|

| Payment Summary | |
|-----------------------|---------------|
| <u>Paid By</u> | <u>Amount</u> |
| <u>Total Payment:</u> | |

| | | | | | | |
|------------|-------------------|------------------|-------------|-------------------------|------------------|-------------|
| PURCHASER: | <u>HAIPING LI</u> | <u>12-Aug-20</u> | <u>DATE</u> | <u>Decor Consultant</u> | <u>12-Aug-20</u> | <u>DATE</u> |
|------------|-------------------|------------------|-------------|-------------------------|------------------|-------------|

- **APPROVED** -
-08- 17 2020
Date Approved Heathwood Homes (Huron) Limited

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

23 of 44


THE FORBES

20-2095 END ELEV. B

ELEVATION B | 2,720 SQ. FT.

Includes 698 square feet of finished lower level

Sketch # 4

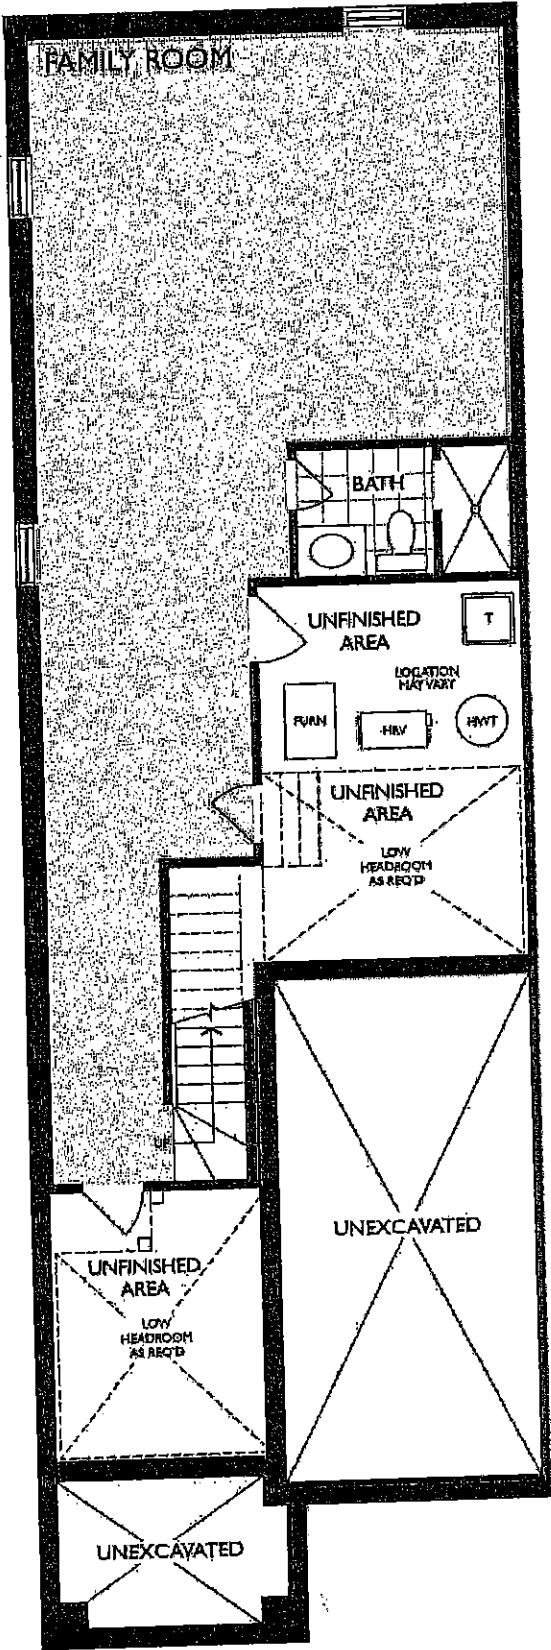

LOWER LEVEL
ELEVATION A & B

HL

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

24 of 44


THE FORBES

20-2095 END ELEV. B

ELEVATION B | 2,720 SQ. FT.

Includes 698 square feet of finished lower level

Sketch #5

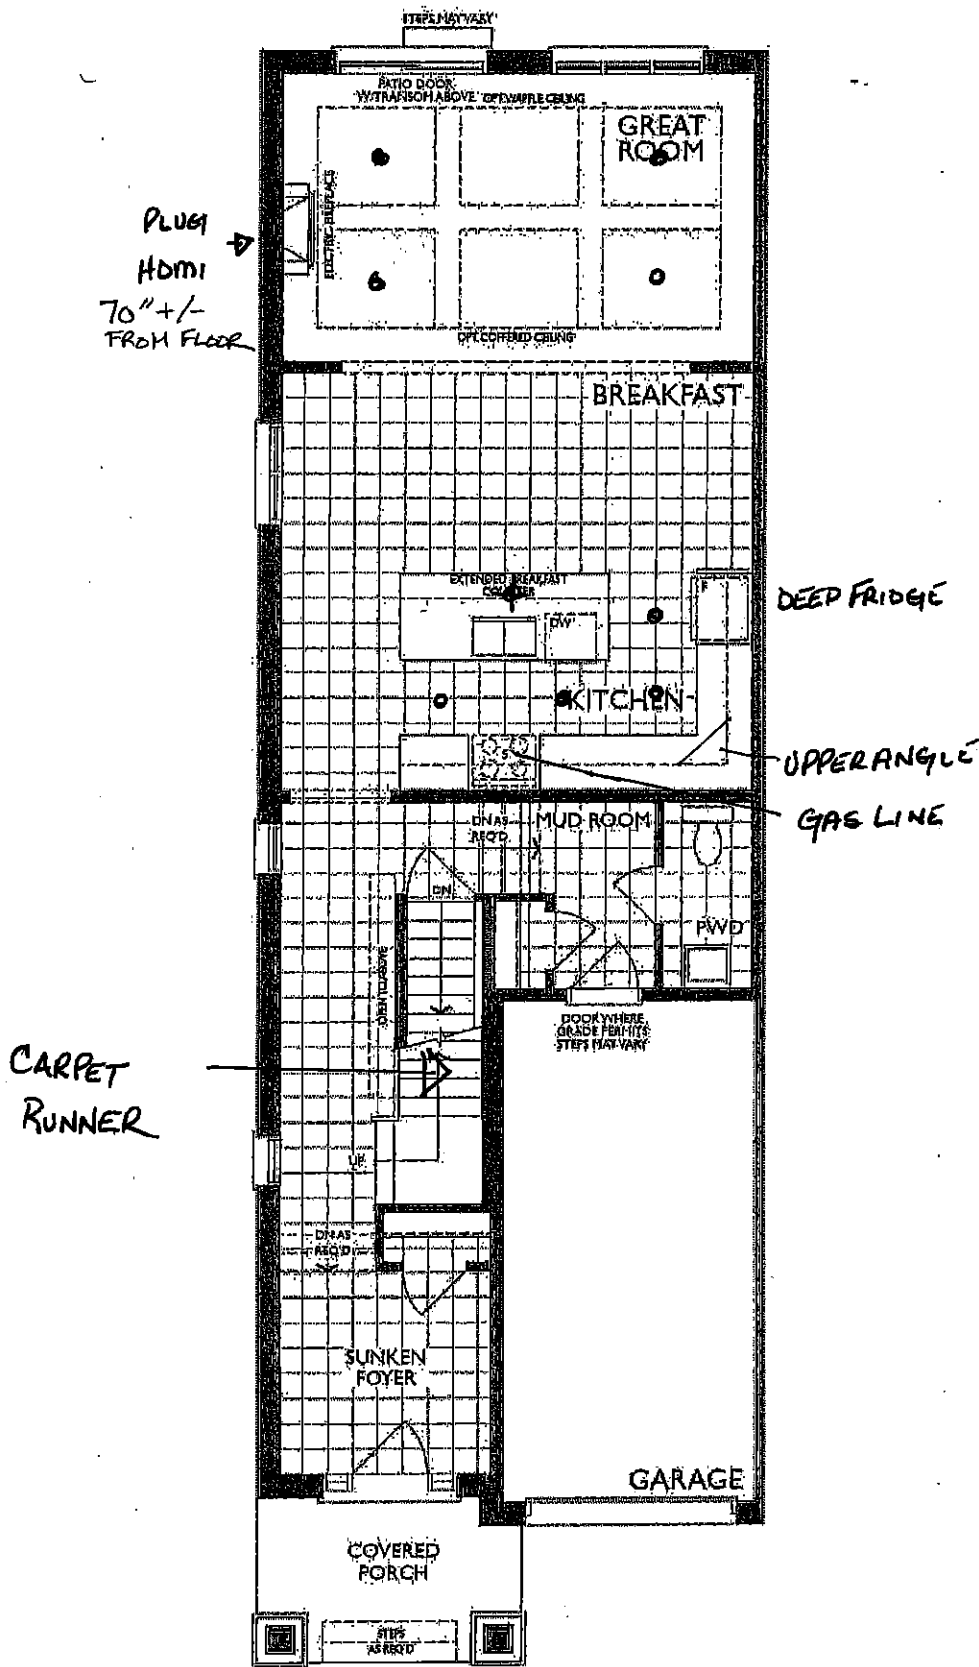

MAIN FLOOR
ELEVATION B

AL

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES


25 of 44

THE FORBES

20-2095 END ELEV. B

ELEVATION B | 2,720 SQ. FT.
Includes 638 square feet of finished lower level

Sketch #6

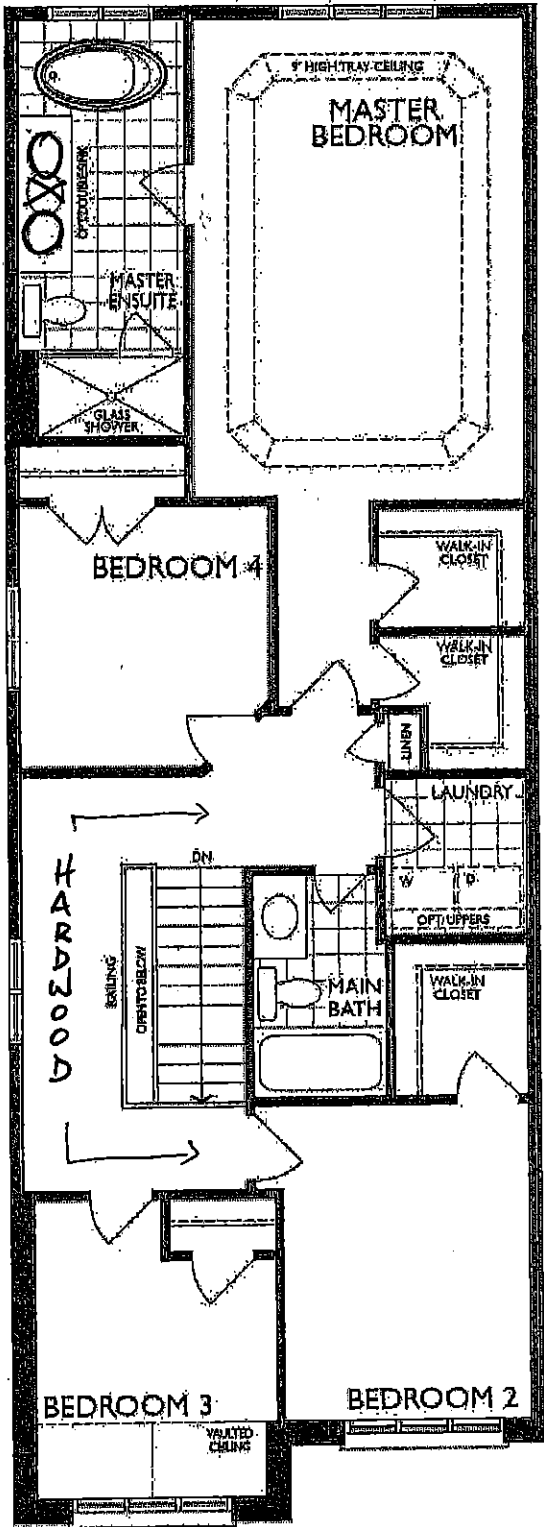


SECOND FLOOR
ELEVATION B

AL

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

26 of 44

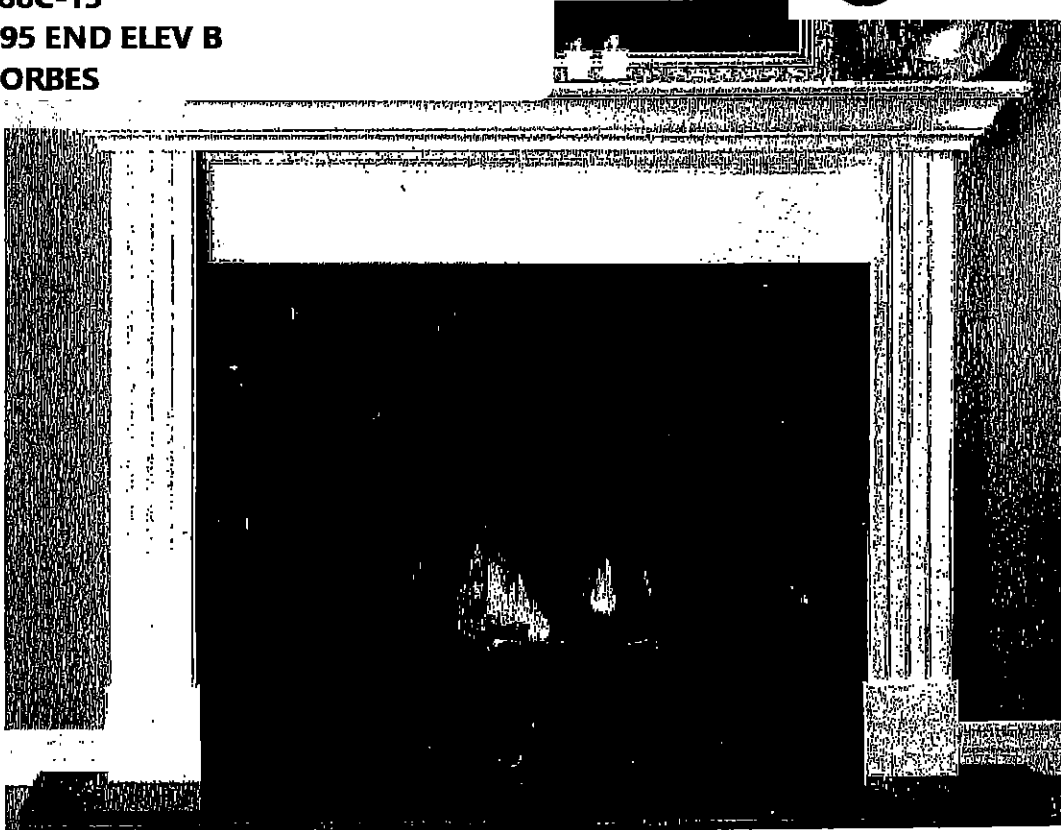

'CABINET'

STANDARD NF 15 Mantel

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

HL

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

27 of 44




STANDARD KITCHEN SINK

ND1831UA/9







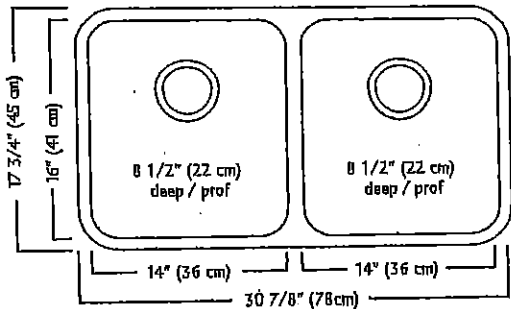

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Franke Kindred Canada Limited

Printed in Canada

1117

HK


UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

28 OF 44

STANDARD KITCHEN FAUCET

Align

Modern

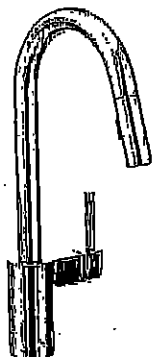

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†


182

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

Chateau


Transitional

29 of 44



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

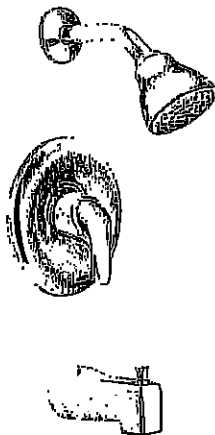

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†
OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS


67C

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

30 of 44

SC(B)500 | ALITO Collection

Cyclone®
Breathe Better

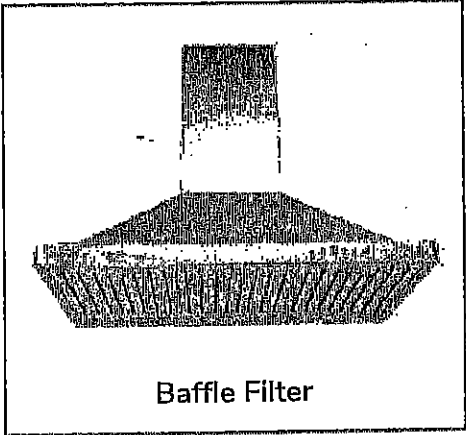

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with time-delay OFF feature up to nine minutes, 550 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel



Dishwasher
Safe Filters



Long-Lasting
LED Light



Time-Delay
OFF Feature



| Model | Colour | Burting | Filters | Size | GFM |
|----------|-----------------|---------|---------|------|-----|
| SC50024 | Stainless Steel | 6" | Mesh | 24" | 550 |
| SC50030 | Stainless Steel | 6" | Mesh | 30" | 550 |
| SC50036 | Stainless Steel | 6" | Mesh | 36" | 550 |
| SCB50024 | Stainless Steel | 6" | Baffle | 24" | 550 |
| SCB50030 | Stainless Steel | 6" | Baffle | 30" | 550 |
| SCB50036 | Stainless Steel | 6" | Baffle | 36" | 550 |

Cyclone Range Hoods Inc.
1361 Huntingwood Drive, Unit 16, Toronto, ON M1S 3J1, Canada
Toll Free 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4798 Website: www.CycloneRangeHoods.com

HL

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

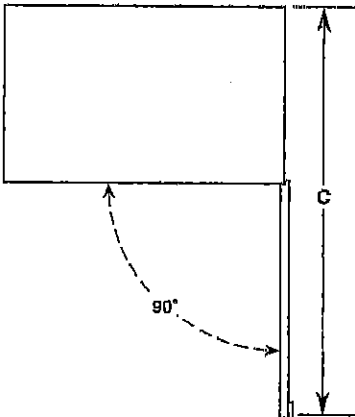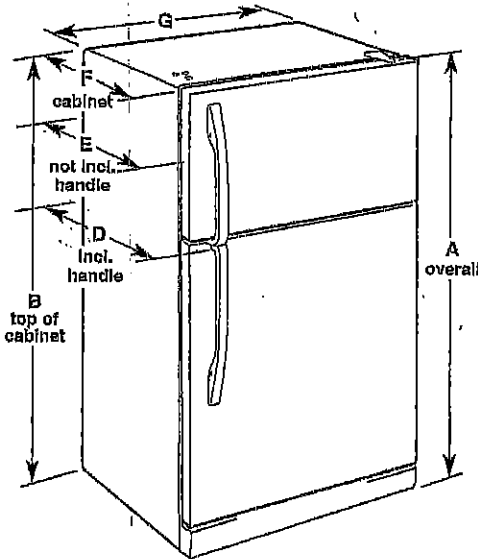

| Model Number | Model Size | Reversible Door | Height - Overall "A" | Height - Top of Cabinet "B" | Depth - Door Open 90° "C" | Depth - With Handles "D" | Depth - Without Handles "E" | Depth - Cabinet Only "F" | Width - Cabinet "G" |
|------------------------|--------------|-----------------|----------------------|-----------------------------|---------------------------|--------------------------|-----------------------------|--------------------------|---------------------|
| WRT311FZD | 20.5 cu. ft. | Yes | 66 1/4" (168.3 cm) | 65 1/2" (166.4 cm) | 62 1/4" (158.1 cm) | 32 3/4" (83.5 cm) | 30 3/8" (77.8 cm) | 28 1/2" (72.4 cm) | 32 3/4" (83.2 cm) |
| WRT511SZD WRT541SZD | 21.3 cu. ft. | Yes | 66 1/4" (168.3 cm) | 65 1/2" (166.4 cm) | 62 1/4" (158.1 cm) | 34" (86.4 cm) | 32 1/2" (82.3 cm) | 28 1/2" (72.4 cm) | 32 3/4" (83.2 cm) |

LOCATION REQUIREMENTS

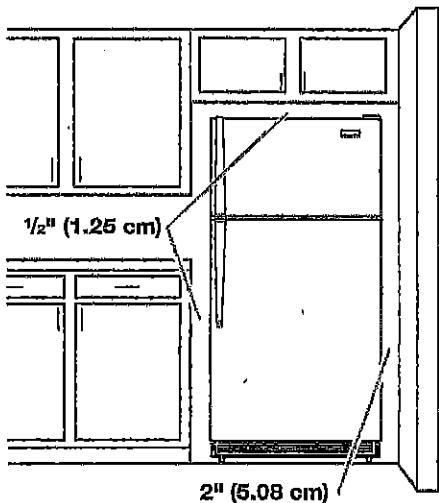


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each end and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Refrigerator Door Swing Verification

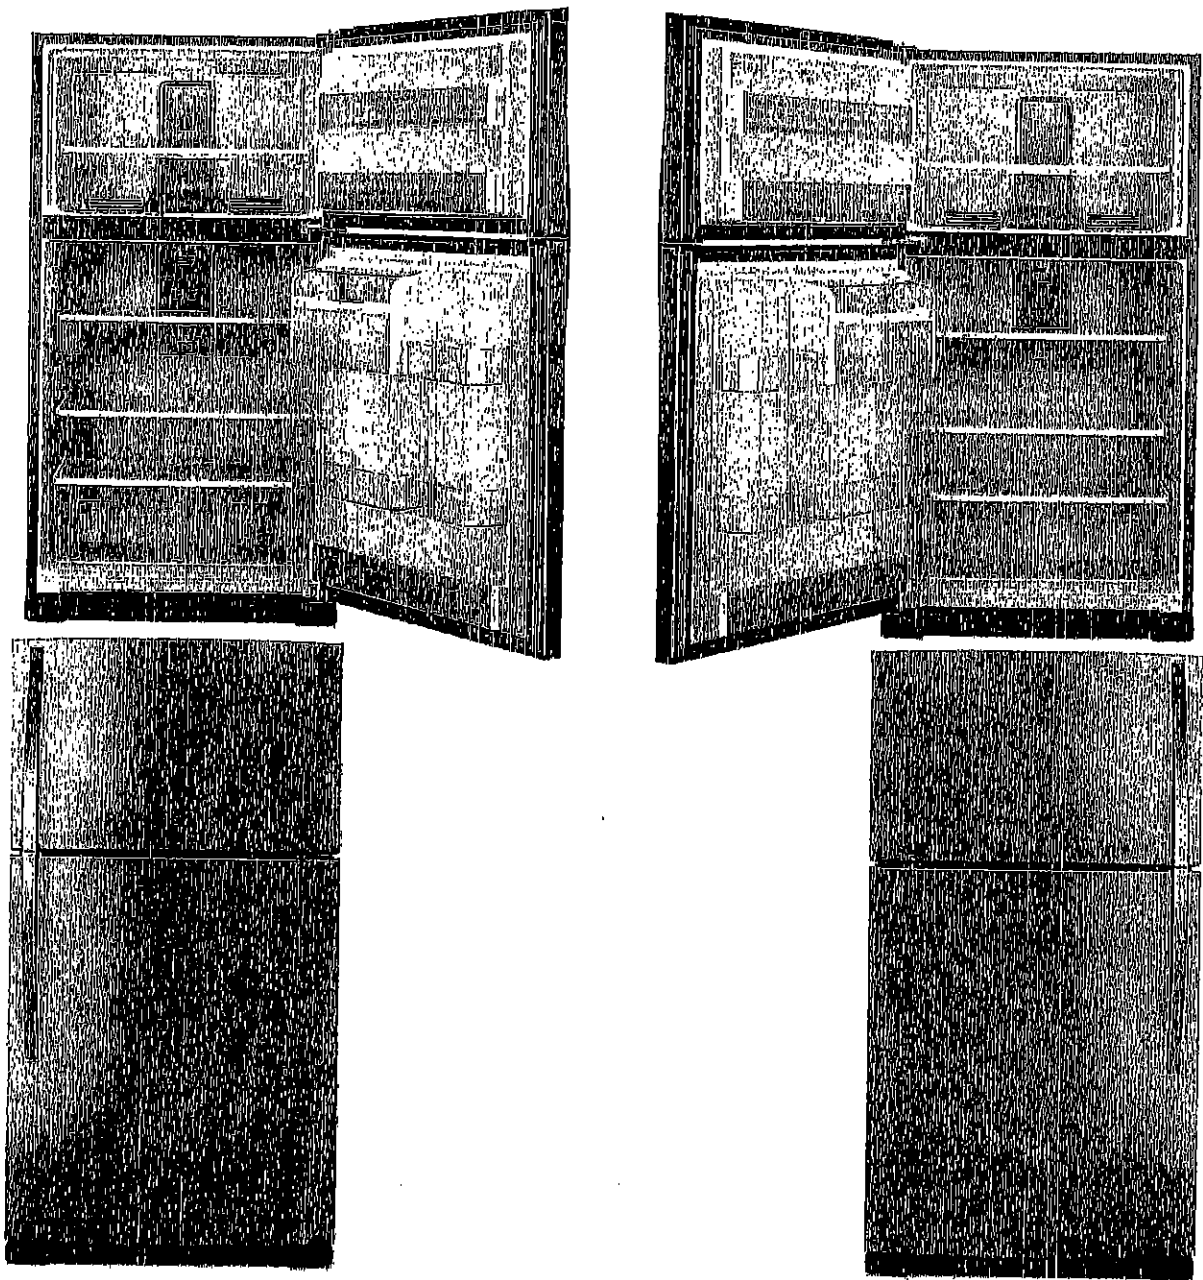

When facing the refrigerator




**RIGHT HAND
DOOR OPENING**

- *Hinges on right*
- *Handle on left*

INITIAL

**LEFT HAND
DOOR OPENING**

- *Hinges on left*
- *Handle on right*



mf

INITIAL

Please check and INITIAL your door swing selection.

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

33 of 44


WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

**5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology**

YWFE515S0JS

Whirlpool®


[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > YWFE515S0JS

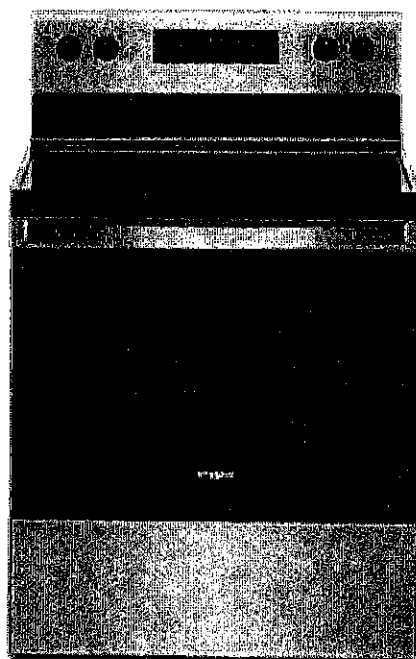

34 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Product Dimensions

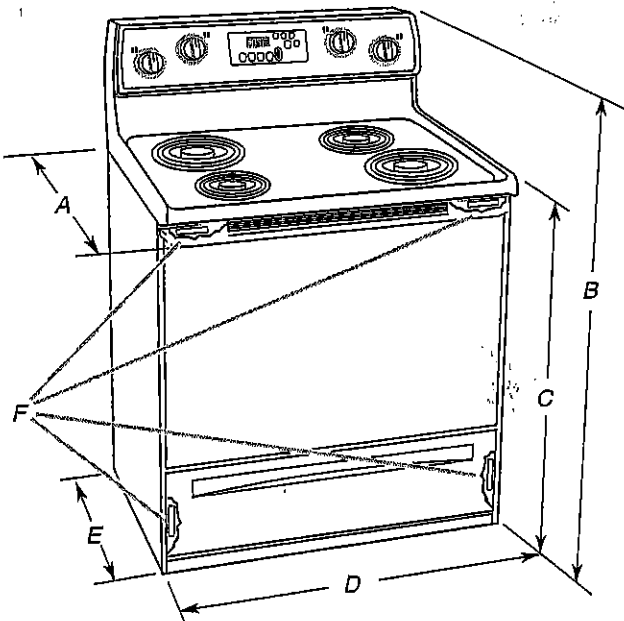

- A. 27³/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

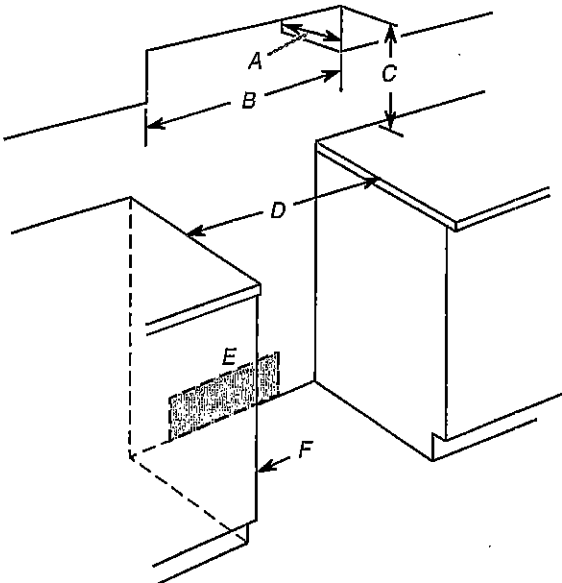

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

35 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket

⚠ WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

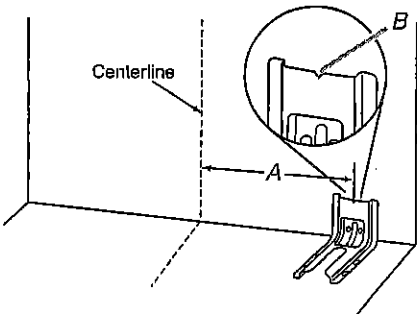


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting

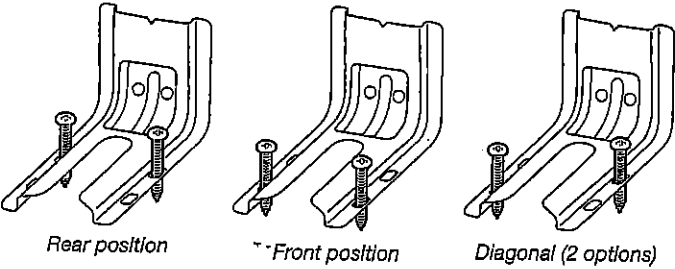

Wall Mounting




5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.
8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.




UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

36 of 44


Whirlpool® Dishwasher with ENERGY STAR® qualification



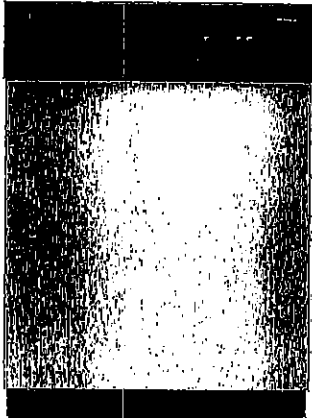




WDF310PAAS
Black-on-Stainless


OTHER AVAILABLE COLORS

Black
Model: WDF310PAAB

Black-on-Biscuit
Model: WDF310PAAT

White
Model: WDF310PAAW

Universal Silver
Model: WDF310PAAD



| DIMENSIONS | | KEY FEATURES |
|--|---------------|--|
| Maximum Height | 34 1/2 Inches | ENERGY STAR® Qualified |
| Minimum Height | 33 1/2 Inches | No One Has Fewer Repairs 17 Years In A Row |
| Height | 34 1/2 Inches | Resource - Efficient Wash System |
| Depth | 24 1/2 Inches | CEE Tier 1 qualified |
| Width | 23 7/8 Inches | Tall Tub Design |
| Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product. | | White Plastic Interior |
| | | Quiet Partner(TM) I Sound Package |
| ELECTRICAL | | Auto Soil Sensor |
| 15 Amps Amps. 60 Hz. 120 V. 15, | | Electronic Controls |
| Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer. | | 3 Automatic Cycles |
| | | 1-Hour Wash Cycle |
| | | Heavy Wash Cycle |
| | | Normal Cycle |
| | | 4 Options |
| | | High Temperature Wash System |
| | | Heated Dry Option |
| | | 4 Hour Delay Wash Option |
| | | 4-Tier SheerClean Direct Feed Wash System |
| | | Control Lock |
| | | Vinyl Racks |
| | | In-Rack Silverware Basket |

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

37 of 144

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

| | | |
|-----------|-----------|-----------|
| WDF110PAB | WDE310PLA | WDF530PSY |
| WDF111PAB | WDF320PAD | WDF540PAD |
| WDF120PAF | WDF510PAY | WDF730PAY |
| WDF121PAF | WDF520PAD | WDT710PAY |
| WDF310PAA | WDF530PAY | WDT720PAD |
| WDF310PCA | WDF530PLY | WDT770PAY |

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.


If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/APMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

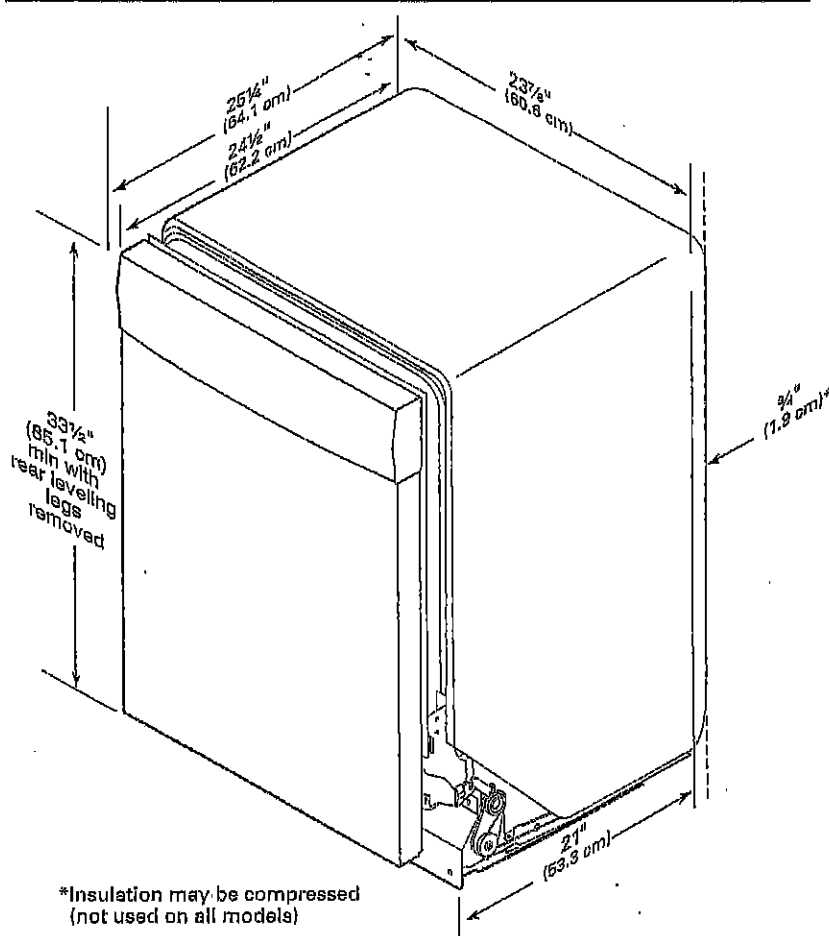

38 of 44


CABINET CUTOUT DIMENSIONS

WDF320PDD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

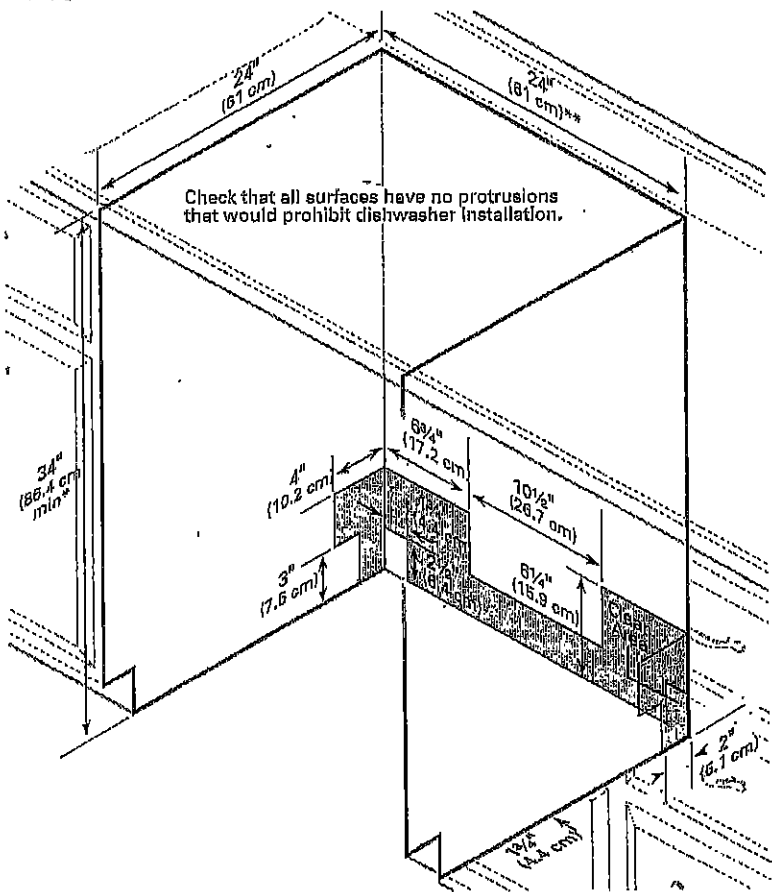


UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

39 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

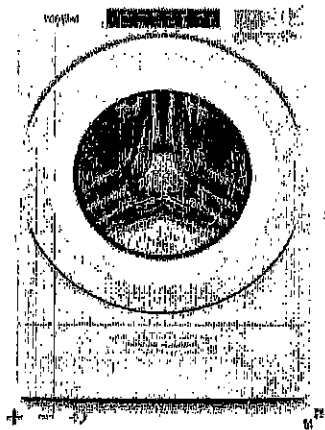

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

| | |
|--------------------------------|----------------------|
| Depth | 80.17 cm, 31-9/16 in |
| Depth With Door Open 90 Degree | 143.51 cm, 56-1/2 in |
| Minimum Height | 98.11 cm, 38-5/8 in |
| Width | 68.58 cm, 27.0 in |

Appearance

| | |
|------------------|-----|
| LCD Touch Screen | No |
| Window | Yes |

Details

| | |
|---------------|-----------------|
| Drum Material | Stainless Steel |
|---------------|-----------------|

Cycles and Options

| | |
|-----------------------|----|
| Number of Wash Cycles | 37 |
|-----------------------|----|

Electrical

| | |
|---------------------|-----|
| Hz | 60 |
| Power Cord Included | Yes |

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

40 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).



IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

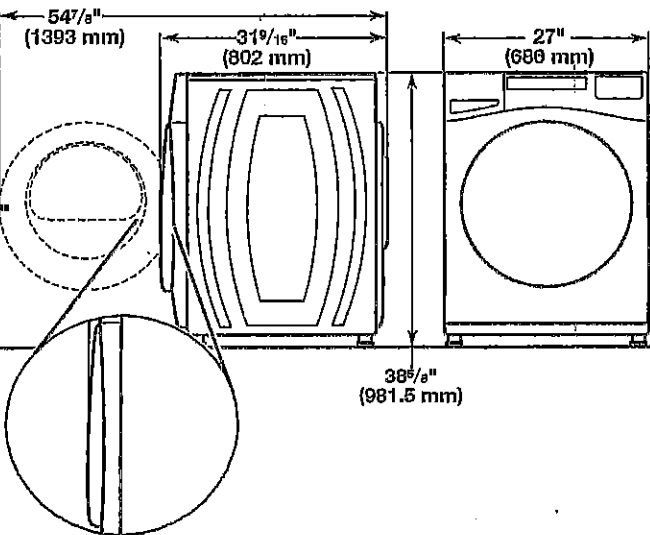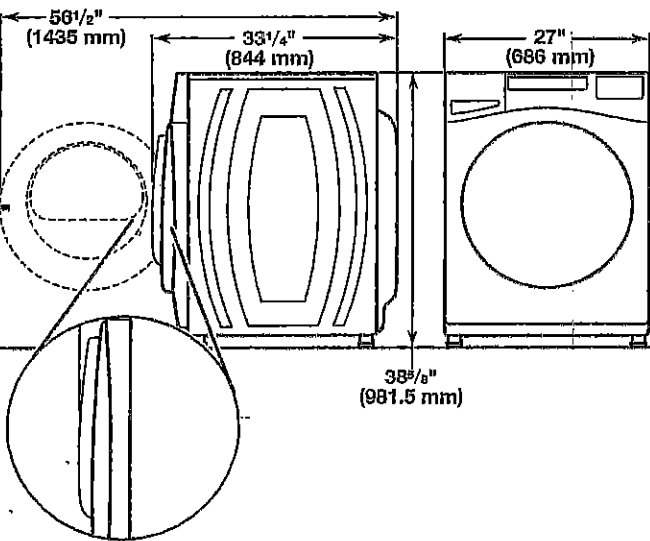


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

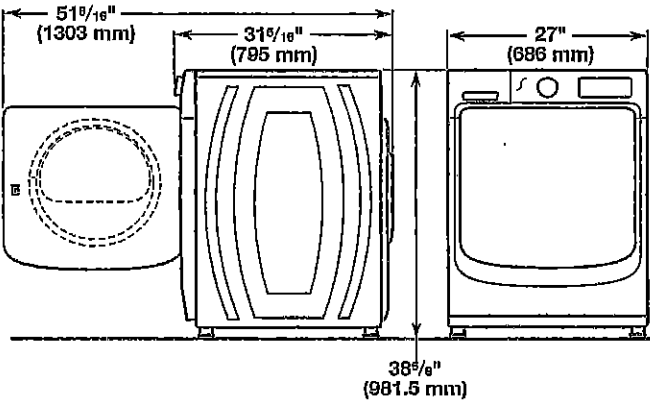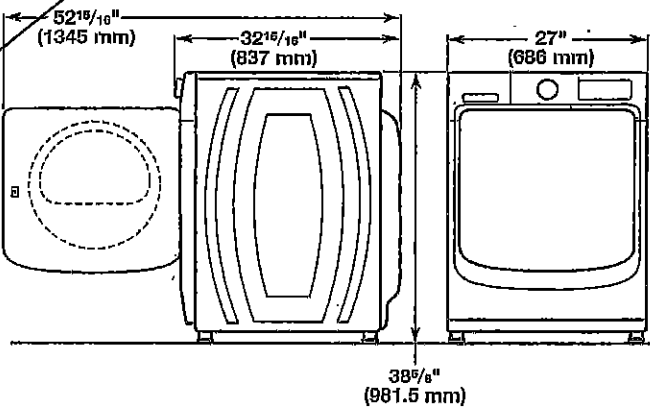

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


Recessed area or closet installation (stacked washer and dryer):

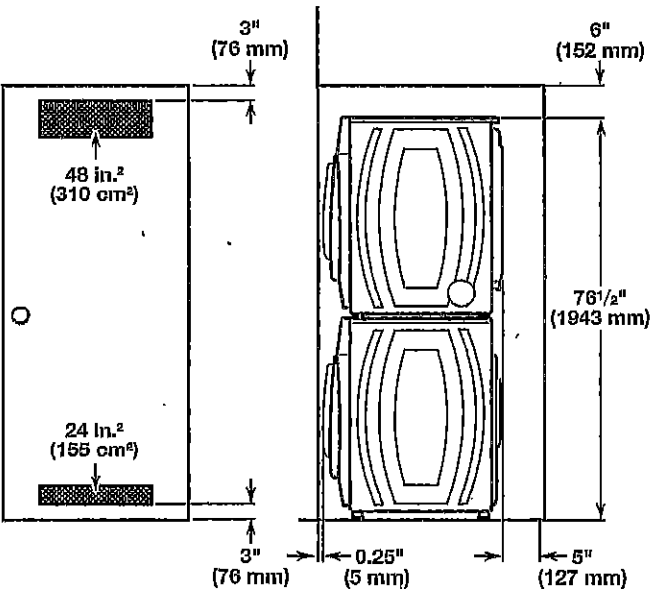


UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

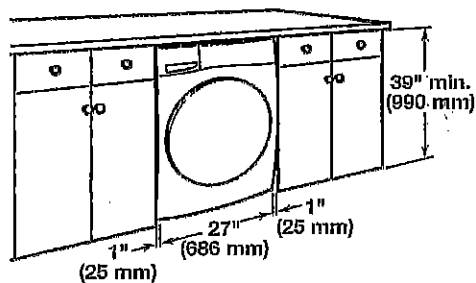

Recessed area or closet installation:

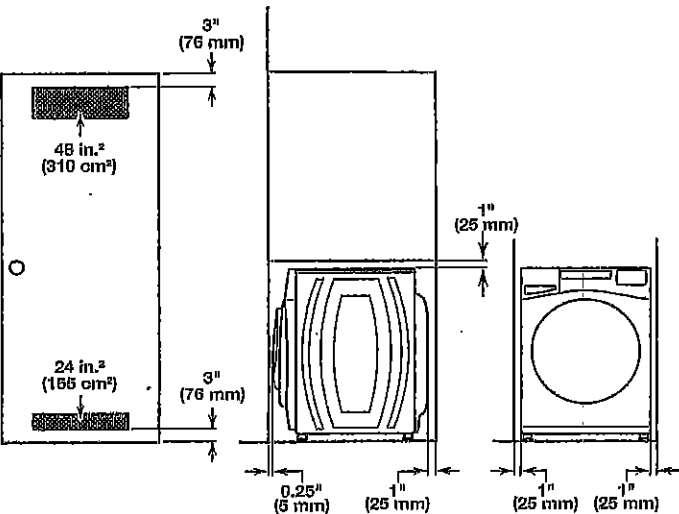

Custom cabinet installation:

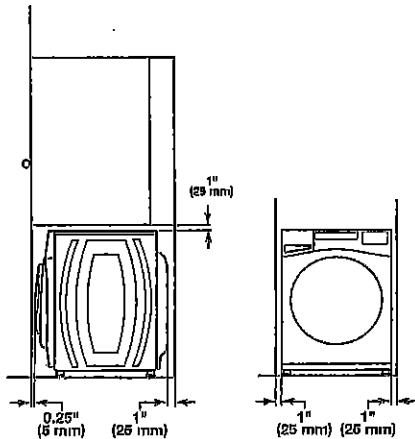


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

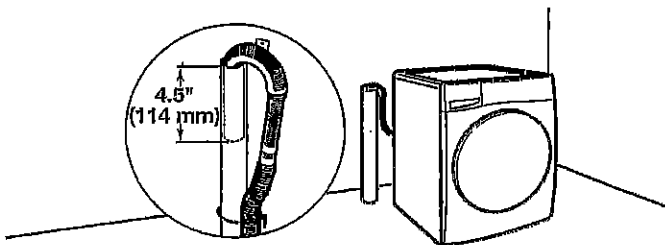


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; Install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

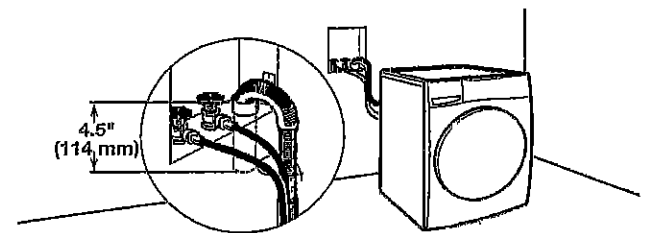

See requirements for floor standpipe drain system.

Laundry tub drain system

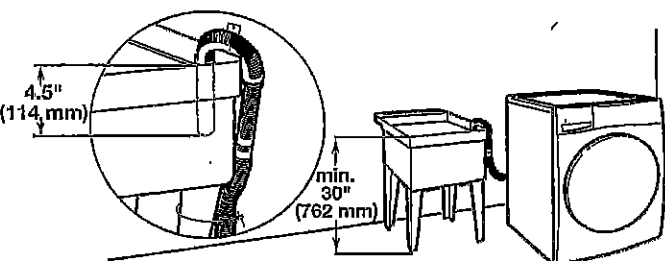


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; Install no higher than 96" (2.44 m) from bottom of washer.

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

42 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

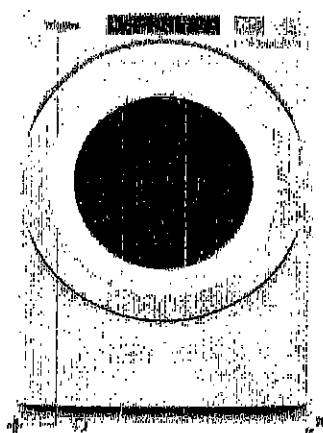

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool® 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls
Model #: YWED5620HW

Dimensions

| | |
|--------------------------------|----------------------|
| Depth | 76.74 cm, 30.0 in |
| Depth With Door Open 90 Degree | 139.43 cm, 54-1/2 in |
| Height | 98.42 cm, 38-9/16 in |
| Width | 68.58 cm, 27.0 in |

Configuration and Overview

| | |
|-----------|----------|
| Fuel Type | Electric |
|-----------|----------|

Cycles and Options

| | |
|--------------------------|-----|
| Cycle Time Remaining | Yes |
| Lint Filter Indicator | No |
| Number of Dryer Cycles | 36 |
| Number of Dryness Levels | 3 |

Ventilation System

| | |
|---------------------|---------------------------|
| Long Vent | No |
| Maximum Vent Length | 64 |
| Venting Direction | Left, Right, Bottom, Rear |

Electrical


| | |
|---------------------|-----|
| Hz | 60 |
| Power Cord Included | Yes |

UK-75 WALLACETON
 LOT 188C-15
 20-2095 END ELEV B
 THE FORBES

43 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

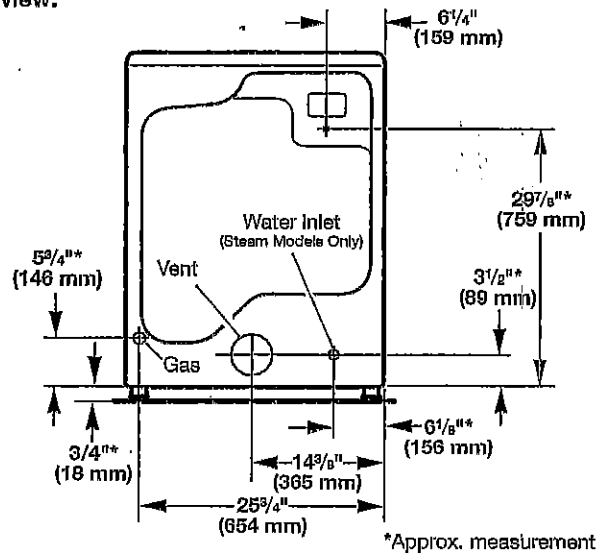

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

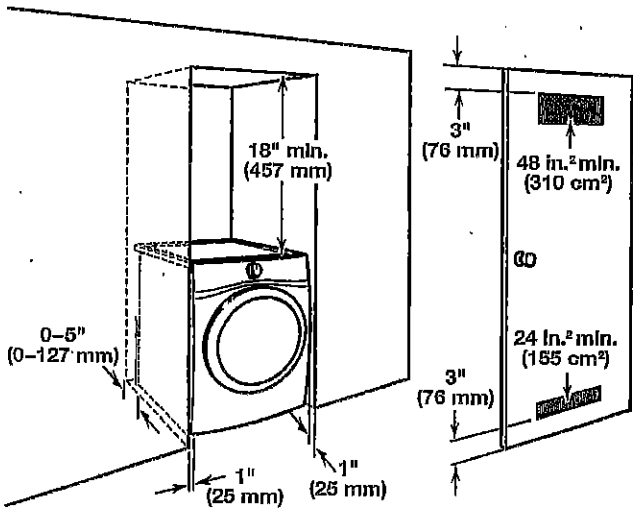

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

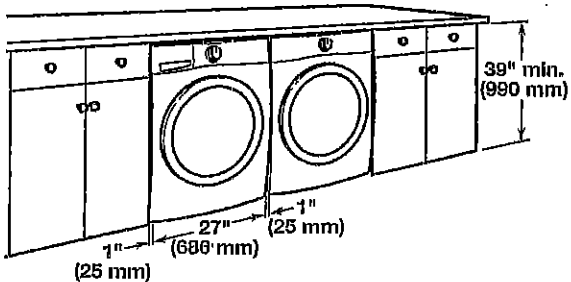

Mobile home – Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

UK-75 WALLACETON
LOT 188C-15
20-2095 END ELEV B
THE FORBES

44 OF 44

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.


Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

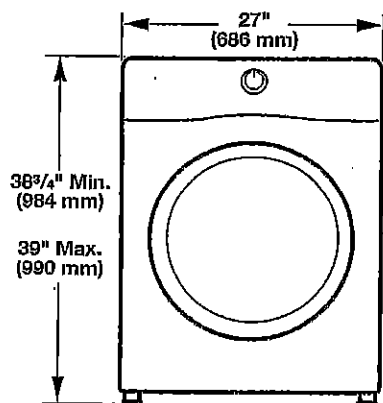


Side view:

Whirlpool Models

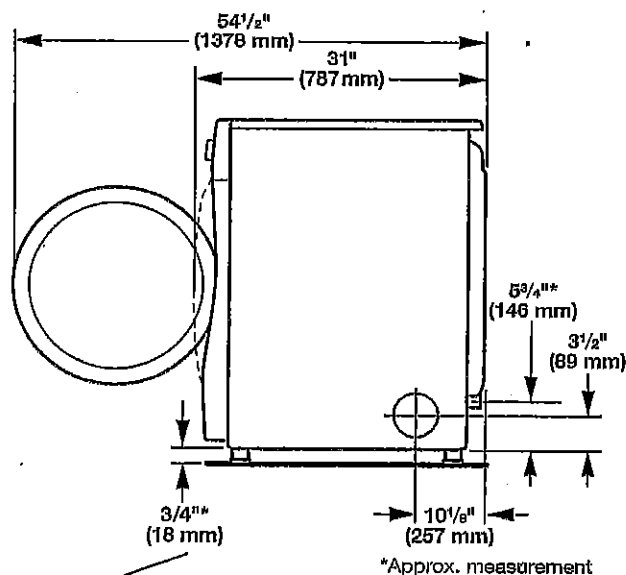

*Approx. measurement

Maytag Models

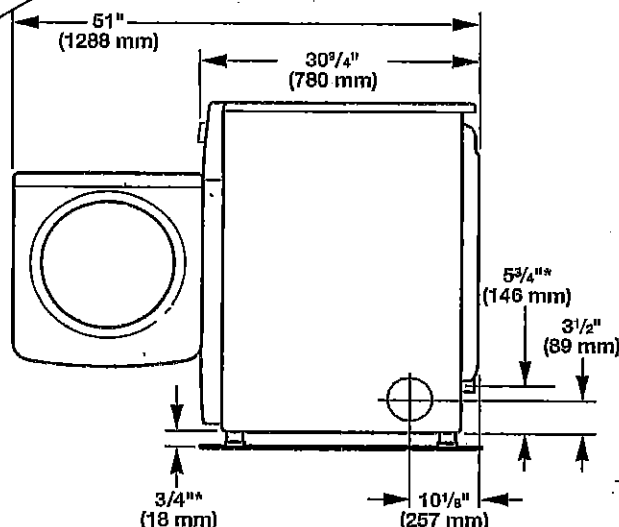

*Approx. measurement