




Monogram

Monogram ZET1PMSS
Stainless Steel
30" Single Wall Oven

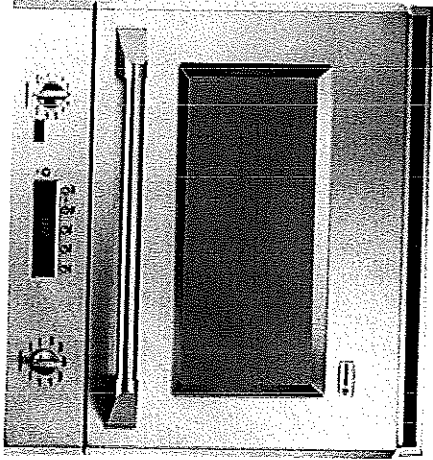

Representational Photo
View Line Drawing

Reasons to buy:

- 4.4 Cu. Ft. Capacity
- Electronic Dial Controls
- Halogen Light Columns
- True Hidden Bake Element
- Exclusive Self-Cleaning, Full-Extension Oven Racks
- Reverse-Air Convection System

Other Colour(s) Available:

Approx Dimensions (in.):

Height: 28-1/4 Depth: 23-1/2 Width: 29-3/4

Approx Dimensions (cm.):

Height: 71.75 Depth: 59.69 Width: 75.56

Approx Shipping Weight:


Weight: 190 lbs./86 kgs.

For more information, please call the Mabe Customer Service Centre at 1-800-361-1100.

Capacity	
Oven Capacity	4.4
Features	
24-Hr/12-Hr Time Display	Yes
8-Pass Bake Element	Dual Element
8-Pass Broil Element	Dual Element
Auto Oven Shut-Off with Override	Yes
Automatic Meat Thermometer	Yes
Automatic Self-Clean Oven Door Lock	Yes
Broil	Dual and Standard
Certified Sabbath Mode	Yes
Control Type	Electronic Knob, Professional Diecast Metal
Cooking System	True European, Reverse Air Convection
Fuel Type	Electric
Hidden Bake Oven Interior	True
Oven Meat Probe	Yes
Oven Racks	3 Heavy-Duty, Self-Clean, Full-Extension
Variable Broil	Hi/Low Standard/Dual
Variable Cleaning Time	w/Delay Clean Option
Warm Mode	Yes
Convection Bake	Yes
Convection Broil	Yes
Convection Roast	Yes
Proofing Mode	Yes
Oven Interior	Convection Self-Clean
Oven Style	30" Single Oven
Thermal Bake / Thermal Roast	Yes
Embossed Rack Positions	5
Indicator Lights	
Oven Interior Light	Halogen (2)
Oven Interior Light	Yes
Oven Controls	
Control Lock Capability	Yes
Electronic Clock & Kitchen Timer	Yes
Appearance	
Colour Appearance	Stainless Steel
Handle Style	Professional Style
Oven Door with Window	Yes
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	190
Cabinet Width Required (in.)	30
Cutout Dimensions (w x h x d) (in.)	28-1/2 x 27-1/4 x 23-1/2
Overall Depth (in.)	23-1/2
Overall Height (in.)	28-1/4
Overall Width (in.)	29-3/4
Electrical Requirements	
Amp Rating at 208V	20
Amp Rating at 240V	20
KW Rating at 208V	3.0
KW Rating at 240V	4.0
Wattage	
Bake Wattage	2700
Broiler Wattage	3900
Convection Wattage	2500
Accessories	
Ceramic Pan	Yes
Warranty	
Full 1 Year	Entire Appliance; In Home; Parts & Labour



Monogram ZGU364NDPSS
Stainless Steel
36" Professional Gas Cooktop with 4
Burners and Griddle



Representational Photo
View Line Drawing

Reasons to buy:

- Sealed, Dual Flame Stacked Burners
- Authentic Professional appearance
- Stainless steel griddle cover
- Electronic Ignition with Automatic Reignition
- Reversible burner grates
- Stainless steel and aluminum-clad griddle


Other Colour(s) Available:
Stainless Steel-ZGU364NRPSS

Approx Dimensions (in.):
Height: 8-7/16 Depth: 28-1/4 Width: 35-7/8
Approx Dimensions (cm.):
Height: 21.43 Depth: 71.75 Width: 91.12
Approx Shipping Weight:
Weight: 240 lbs./109 Kgs.

For more information, please call the Mabe
Customer Service Centre at 1-800-361-
1100.

Features	
Adjustable simmer down to 140 degrees Fahrenheit	All burners
Auto Reignition	Yes
Configuration	4 Burners; Griddle
Cooktop Burners	4 Sealed, Dual Flame Stacked
Cooktop Surface	Stainless Steel
Electronic Pilotless Ignition	Yes
Fuel Type	Natural Gas
Reversible cast-iron, porcelain - enameled wok grates	All burners
Seamless porcelain burner pans	Yes
Stainless Steel Grill / Griddle Covers	1
Stainless steel and aluminum-clad griddle	Yes
Appearance	
Colour Appearance	Stainless Steel
Control Location	Upfront
Exterior Design	Authentic, Professional Appearance
Flush Install Capable	Yes
Knob Colour	Die-cast Metallic
LED bullnose task lighting	Yes
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	240
Overall Depth (in.)	28-1/4
Overall Height (in.)	8-7/16
Overall Width (in.)	35-7/8
BTU Ratings	
Griddle BTU Rating - Nat. Gas/LP (000	18.0 / 16.0
Top Burner BTU Rating - Nat. Gas / LP (000's BTU's)	(4) 18.0 / (4)15.0
Electrical Requirements	
Volts; Hertz; Amps	120V; 60Hz; 6.6A
Accessories	
Bamboo cutting board	Included
Die-cast Black Knobs	Optional
Factory-installed Island Backguard	Included
High Altitude Conversion Kit	WB28K10553
LP Conversion Kit	Included
Optional 12" Stainless Steel Backsplash	ZX12B36PSS
Optional Adjustable-height Stainless Steel Backsplash w/Warming Shelf	ZXADJB36PSS
Warranty	
Limited 2-year	Entire Appliance; In Home; Parts & Labour
Limited Additional 3-year Warranty	Limited Parts, See Written Warranty for Details

Monogram
Monogram ZE2160SFC
Stainless Steel
2.1 Cu. Ft. Full-Size Countertop
Microwave Oven

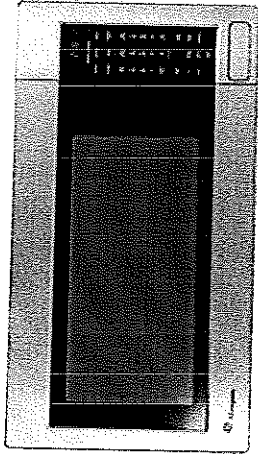

Representational Photo
View Line Drawing

Reasons to buy:

- Sensor Controls - Automatically adjust time and power for perfect cooking results
- 2.1 cu. ft. Oven Capacity
- Electronic Touch Controls
- Instant on Convenience Cooking Controls
- 10 Power Levels - Offers the flexibility to accurately cook any meal, from frozen entrees to refrigerated casserole dishes.
- Child Lock-Out
- Optional trim kit - Offers a built-in appearance of a countertop model

Other Colour(s) Available:

Approx. Dimensions (in.):
Height: 14 Depth: 19 7/8 Width: 24
Approx Dimensions (cm.):
Height: 35.56 Depth: 50.48 Width: 60.96
Approx Shipping Weight:
Weight: 51 lbs./23 kgs.

For more information, please call the Mabe Customer Service Centre at 1-800-361-1100.

Capacity	
Oven Cavity (cu. ft.)	2.1
Features	
Electronic Touch Controls	
Style	Yes
Watts IEC-705 Test Procedure	Family-Size
Display On/Off	1100
Electronic Digital Display w/Clock	Yes
Time Preference	Yes
Add 30 Seconds	Control Enhancement (1/9)
Cooking System	Instant-On
Defrost Type	Turntable
Delay Start	Auto & Time
Express Cook	Yes
Instant On Controls	Instant-on 1-6 minutes
Micro / Time Cook	Yes
Power Levels	I & II
Child Lockout	10
Child Lockout	Yes
Interactive Display System	
Demo Mode	
Help Pad	Yes
Reminders / Signals / Timers	
Cooking Complete Reminder	Yes
Kitchen Timer / Timer (On/Off)	No / Yes
Sensor Controls	
Beverage	
Chicken / Fish	Yes
Popcorn	Yes
Potatoes	Yes
Reheat	Yes
Sensor Controls	Yes
Vegetables	Yes
Turntable	
Turntable	Yes
Appearance	
Case Colour	Glass
Colour Appearance	Greystone
Door Colour	SS
Weights & Dimensions	
Approximate Shipping Weight (lbs)	Black/Stainless Steel
Cavity (W x H x D)	51
Overall Depth (excluding handle)	17 x 11 x 19
Overall Height	19 7/8
Overall Width	14
Overall Width	24
Electrical Requirements	
Electrical Input @ 120V Amperage	13.5
Electrical Input @ 120V Watts	1500
Frequency (Mhz)	2450
Accessories	
Optional 27" Built-In Kit	JX2127SH
Optional 30" Built-In Kit	JX2130SH
Warranty	
Limited Nine-Year Magnetron Warranty (10yrs Total)	Magnetron Tube; Part Only; In-Home
One-Year Warranty	Full ; Entire Appliance; Parts & Labour; In-Home