




■ GE GTH18GBDBB

Black on Black
Energy Star 18.2 Cu.Ft. Top-
Freezer, Frost-Free Refrigerator



Representational Photo

Reasons to buy:



- NeverClean™ Condenser
- Upfront Temperature Controls
- Optional Icemaker (IM4A)
- 2 Full-width gallon storage + 1 Full-width can storage on FF door
- Clear Snack Pan

Approx Dimensions (in.):

Height: 67-3/8 Depth: 32-3/8 Width: 28

Approx Dimensions (cm.):

Height: 171.13 Depth: 82.23 Width: 71.12


Approx Shipping Weight:

Weight: 192 lbs./87 kgs.

Capacity	
Freezer (cubic feet)	4.26
Fresh Food (cubic feet)	13.9
Shelf Area (square feet)	21.7
Total (cubic feet)	18.2
Features	
Defrost Type	Frost Free
Upfront Temperature Controls	Yes
Dairy Compartment	1 Clear
Fresh Food Door Shelves	3 FW fixed (2 with gallon storage/1 with can storage)
Interior Lights	Yes
Snack Pan	Yes - clear
Vegetable / Fruit Crisper(s)	2 Adj. Humidity
Freezer Features	
Cabinet Shelves	Step Shelf
Door Shelves	2 Fixed
Fresh Food Cabinet Shelves	
Adjustable	Yes
Total Number of Shelves	2 Full-Width Glass
Ice Service Features	
Automatic Icemaker & Ice Bin	Optional (IM4A)
Ice N' Easy Trays	1
Economical / Quiet	
Cabinet Liner	ABS
Door Liner	ABS
Energyguide Rating	311 kWh/yr
Energy Star® Qualified	Yes
NeverClean™ Condenser	Yes
Appearance	
Colour Appearance	WW
Door Handles	Colour-Matched Smooth
Exterior Design	
Adjustable Rollers	Front
Door Stops	Yes
Door Swing	Shipped w/ Right-Hand Door Opening
Easy to Remove Door Gaskets	Yes
Reversible Doors	Yes
Squared Doors	Yes
Air Clearances	
Back (in.)	1
Each Side (in.)	3/4
Top (in.)	1
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	192
Case Depth Without Door (in.)	26-3/4
Depth With Door Open 90 Degrees (in.)	56-3/8
Depth Without Door Handle (in.)	30-1/2
Height to Top of Case (in.)	66-7/8
Overall Depth (in.)	32-3/8
Overall Height (in.)	67-3/8
Overall Width (in.)	28
Width w/Door Open 90 Degrees Less Handle (in.)	28-7/8
Electrical Requirements	
Volts; Hertz; Amps	120v; 60Hz; 15A
Warranty	
Full 1 Year	Entire Appliance; Parts & Labour; In-Home



GE JCBS250TBB
lack on Black
3" Free Standing Electric
standard Clean Range



Representational Photo

asons to buy:

Super Large Oven Capacity
One-Piece Upswept Cooktop
Removable One-Piece Drip Bowls
Dual Element Bake


pprox Dimensions (in.):
ight: 46 7/8 Depth: 27 3/4 Width: 29-7/8
pprox Dimensions (cm.):
ight: 119.06 Depth: 70.48 Width: 75.88
pprox Shipping Weight:
eight: 158 lbs./72 kgs.

Lot 140 SMT

Capacity	
Oven Capacity	5.0
Controls	
Clock & Kitchen Timer	Yes
QuickSet Controls	QuickSet III
Features	
4 Pass Bake Element	2585 watt
4 Pass Broil Element	3410 watt
Cooktop Type	Coil Lift Top
Dual Element Bake	Yes
Fuel Type	Electric
Oven Interior Light	Yes
Oven Rack Positions	6
Oven Shelves	2
Oven Type / Cleaning	Manual Clean
6" Heating Element	2 coil (1500W)
8" Heating Element	2 coil (2600W)
Centre Caps	Black
Infinite Heat Controls	Yes
Removable One-Piece Drip Bowls	Black Porcelain Enameled
Outlets	1
Removable Full-Width Storage Drawer	Black
One-Piece Upswept Cooktop	Porcelain Enamel
Indicator Lights	
Oven Interior Light	Switch
Surface Unit On	1
Total Indicator Lights	1
Appearance	
Backguard Type	Steel, Black
Colour Appearance	Black on Black
Easy Level System	4 Leveling Legs
Handle Style	Black, high gloss
Oven Door Type	Black Steel
Textured Steel Side Panels	Black
Window	Regular Hearth Shaped Window
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	158
Depth with Door Open (in.)	46 1/4
Overall Depth (in.)	26 1/4
Overall Depth including Handle (in.)	27 3/4
Overall Height (in.)	46 7/8
Overall Width (in.)	29-7/8
Electrical Requirements	
Amps @ 240V/208V	40
KW Rating at 208V	8.8
KW Rating at 240V	11.6
EnerGuide Rating	
EnerGuide Rating (kwh/year)	572
Warranty	
Full 1 Year	Entire Appliance; In Home; Parts & Labour



GE GSD3300DBB
black on Black
Built-In Dishwasher

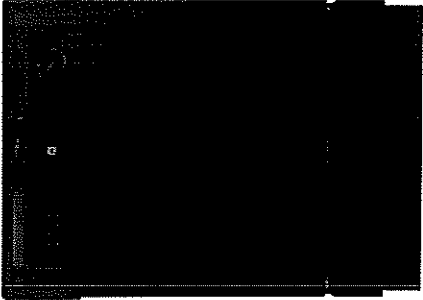

Representational Photo

Reasons to buy:



Energy Star Certified
4-level PowerScrub wash system with
PowerShower
100% Water Filtration
Piranha Hard Food Disposer
TouchTap controls
HotStart option
QuietPower 61 sound package - 61
3A

Approx Dimensions (in.):
Height: 35 Depth: 25 -3/4 Width: 24
Approx Dimensions (cm.):
Height: 88.9 Depth: 61.59 Width: 60.96
Approx Shipping Weight:
Weight: 100 lbs./45 kgs.

Lot 140 SMT.

Features	
Control Type	Turn-to-Start Dial
Cycle Progress Indicators	
Cycles / Options	GPF65 - WX13X10001 (service part) 5 / 3
Hard Countertop Installation	
Latch / Door Handle	Center Throw
Leveling Screws	Yes
Rinse Aid Dispenser	With Indicator
Standard Tub	Yes
Touchpads	5 TouchTap
Tub & Door Liner	PermaTuf
Wash System	
Hard Food Disposer	Piranha
Wash Arm - Lower Level	Yes
Wash Arm - Mid-Level	Tower
Wash Arm - Upper Level	Power Shower
Wash Arms	1 - Direct Feed
Wash Levels	4
Wash System	PowerScrub and PowerShower
Water Filtration	100% w/ ExtraFine Filter
Cycles	
Light Wash	Dial
Normal Wash	Yes
Plate Warmer	Dial
Pots & Pans	Yes
Rinse Only	Dial
Options	
Heated Dry	Yes
Hi-Temp Wash	Yes
HotStart	Dial
Start / Cancel / Reset Pad	Yes
Racking	
Lower Rack	Standard
Racking System	PVC
Silverware Basket	Deluxe
Upper Rack	Deluxe
DryIndex	
Calrod Heating Element	Yes
Convection Airflow	Yes
Economical / Quiet	
Door Insulation	Yes
Energy Star Qualified	Yes
Outer Wrap	Insulation Blanket
Quiet Water Valve	Yes
QuietPower Motor	Yes
Sound Insulation Package	61 dBA
Tub Insulation	U-Shaped Blanket
Appearance	
Colours Available	WW / BB / SS
Door Style	Flat Door
Exterior Style	Traditional
Weights & Dimensions	
Approx. Shipping Weight (lbs.)	100
Overall Depth (in.)	25 -3/4
Overall Height (in.)	34
Overall Height with Legs Extended (in.)	35
Overall Width (in.)	24
Power & Ratings	
Calrod Heater Watts	500
Electrical Requirements	120 V; 60 Hz; 6.2 A
Accessories	
1/4" Panel Kit	GPF325 W / B / C
Non-wood countertop kit	GPF65
Optional Heavy Door Spring Kit	GPF100
Warranty	
Full 1 Year	Entire Appliance; In-Home; Parts & Labour



■ GE JVM1630BTC

1.6 Cu.Ft. Over-the-Range
Microwave Oven



Representational Photo

Reasons to buy:

- Electronic Touch Controls
- Instant on Convenience Cooking Controls
- 10 Power Levels - Offers the flexibility to accurately cook any meal, from frozen entrees to refrigerated casserole dishes.
- Child Lock-Out
- Easy Mount Installation

Approx Dimensions (in.):

Height: 16-13/32 Depth: 14-31/32 Width: 29-7/8

Approx Dimensions (cm.):

Height: 41.67 Depth: 38.02 Width: 75.88

Approx Shipping Weight:

Weight: 68 lbs./31 kgs.

LOT 140 SMT


Capacity	
Oven Cavity (cu. ft.)	1.6
Convenience Controls	
Baked Goods	Instant-On
Beverage	Instant-on
Cook	Instant-On
Pizza	Instant-on
Popcorn	Instant-on
Potatoes	Instant-on
Reheat	6 codes
Features	
Electronic Touch Controls	Yes
Electronic Touch Controls	Yes with LCD Touch Screen Display
Style	Over-The-Range
Watts IEC-705 Test Procedure	1000
Display On/Off	sub-pad w/ zero
Time Preference	Control Enhancement (1/9)
Add 30 Seconds	Instant-On
Defrost Type	Auto/Food/Time/1 lb Quick Defrost /
Delay Start	Yes
Express Cook	Instant-on 1-6 minutes
Power Levels	10
Time Cook	I & II
Cooktop Lighting	Bright/Night/Off
Child Lockout	Yes
Easy Mount Installation	Yes
Exhaust Fan	2-Speed High-Capacity (180 CFM)
Reminders / Signals / Timers	
Cooking Complete Reminder	Yes
Kitchen Timer / Timer (On/Off)	No / Yes
Reminder (24 hr)	Yes
Sound Volume Control	4 levels
SmartControl System	
Clock	Plus AM/PM pad
Concurrent Programming	Yes
Variable Scroll Speed	5 Speeds (Options Pad)
Turntable	
Turntable	Glass
Turntable Size (in.)	13-3/5
Appearance	
Case Colour	Black
Colour Appearance	BB
Door Colour	Stainless Steel
Door Screen	BB
Handle	Yes
Weights & Dimensions	
Approximate Shipping Weight (lbs)	68
Cavity (W x H x D)	20-2/32 x 9-9/32 x 14-13/32
Overall Depth (excluding handle)	14-31/32
Overall Height	16-13/32
Overall Width	29-7/8
Electrical Requirements	
Electrical Input @ 120V Watts	1500
Accessories	
Recirculating Charcoal Filter Kit	JX81J
Warranty	
Limited Four-Year Magnetron Warranty (5 yrs Total)	Magnetron Tube; Part Only; In-Home



GE GFWN1100DWW

/White

Energy Star 4.2 IEC cu.ft. capacity
stainless steel drum frontload
washer with Steam



Representational Photo

Reasons to buy:



Energy Star
Speed Wash Cycle
Energy Saving Option eWash
Stain Wash Cycle Yes


Approx Dimensions (in.):
Height: 39.8 Depth: 33.6 Width: 27
Approx Dimensions (cm.):
Height: 101 Depth: 86 Width: 68.58
Approx Shipping Weight:
Weight: 250 lbs./114 kgs.

LOT 140 SMT.

Features	
Adaptive Capabilities	Load Size, Adaptive Fill
Control Type	Rotary-Electronic
Dispenser	Detergent (Liquid/ Powder) Timed Flow-Thru, Bleach Timed Flow-Thru, Fabric softener Timed Flow-Thru
Door Style	See-Thru Glass
Energy Saving Option	eWash
Load Access	Front-Loading
Max Spin Speed	1000 RPM
Number of Wash Cycles	7
Optional Pedestal Accessory (sold separately)	SBSD137H
Stain Wash Cycle	Yes
Wash / Rinse Temperatures	4
Wash Basket Type	Tilted Stainless Steel
Water Levels	Automatic
Water Temp System	PerfectTemp Deluxe
Drain & Spin	Yes
Cycles	
Colour Cycle	Yes
Delicates	Yes
Hand Wash	Yes
Specialty Cycles	BasketClean
Whites Cycle	Yes
Options	
Extra Rinse	Yes
Optional Soil Levels	Heavy / Normal / Light / Extra Light
Speed Wash	Yes
Economical / Quiet	
Energy Star Qualified	Yes
Quiet Package	Quiet-By-Design
Appearance	
Colour Appearance	White
Colour Appearance Code	WW
Installation	Undercounter, Stacked, Side-by-Side, Built-In
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	250
Overall Depth (in.)	33.6
Overall Height (in.)	39.8
Overall Width (in.)	27
Electrical Requirements	
Circuit Breaker or Time Delay Fuse	15 or 20 Amp
Motor Speeds	Variable
Receptacle Type	3-Prong Grounding
Volts / Hertz	120V / 60 Hz
Volts / Hertz	120V; 60Hz
Warranty	
Labour Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details



GE GFMN110ELWW
/White
7.0 cu.ft. Super Capacity Electric
Dryer

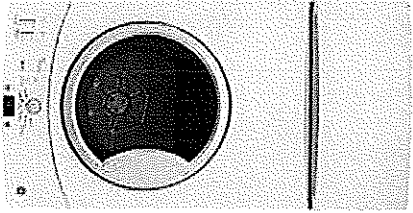

Representational Photo

Reasons to buy:

- 7.0 Cu. Ft. Capacity
- Rotary-Electronic controls with cycle status lights
- 4 Heat Selections
- Dryer Interior Light
- Quiet-By-Design
- Sensor Dry Plus
- 10 Dry Cycles

- Approx Dimensions (in.):**
Height: 41-1/2 Depth: 31-1/8 Width: 27
- Approx Dimensions (cm.):**
Height: 105.41 Depth: 79.05 Width: 68.58
- Approx Shipping Weight:**
Weight: 130 lbs./59 kgs.

Lot 140 SMT

Capacity	
Cubic Feet	7
Drum	
Drum Interior	DuraDrum
Air Fluff	Yes
Features	
Add Time	Yes
Child Lock	Yes
Clean Lint Filter Reminder Light	Yes
Control Type	Rotary-Electronic
Cycle Countdown	Yes
Cycle Status Lights	LED
Door Style	See-Thru Glass
Dual Thermistors	Yes
End-of-Cycle Signal	Yes
Fuel Type	Electric
Heat Selections	4
Moisture Sensor	Sensor Dry Plus
Optional Pedestal Accessory (sold separately)	SBSD137H
Temperature Options	High / Medium / Low / Extra Low
Dryer Interior Light	Yes
Reverse-a-Door	Yes
100% Front Serviceable	Yes
Exhaust Options	4-Way (Rear; Right; Left & Bottom)
Cycles	
Cottons	Yes
Delicates	Yes
Mixed Load	Yes
Number of Cycles	10
Speed Dry	Yes
Timed Dry	Yes, 90 Mins
Options	
Extended Tumble	Yes
Optional Dryness Levels	More Dry / Dry / Less Dry
Quiet	
Quiet-By-Design	Yes
Appearance	
Colour	WW (White)
Installation	Undercounter, Side-by-Side, Stacked
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	130
Case Depth (in.)	25-1/2
Depth w/Door Open 90@ (in.)	51-3/4
Height to Top of Case (in.)	36
Overall Depth (in.)	31-1/8
Overall Height (in.)	41-1/2
Overall Width (in.)	27
Electrical Requirements	
Gas Model Available	Yes
Volts / Watts / Amps	120/240 V; 5600 W; 24 A or 120/208 V; 4400 W; 22 A
Warranty	
Labour Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details