

### Sales Selection Sheet

Wallaceton

46 of 48

PURCHASER: INVENTORY HOME 188A-1

TEL:

LOT / UNIT PHASE MOD	DEL
188A-1 1 20-2146 CR	RN B The Upton

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

#### **GRANITE**

1	GRANITE - COUNTERTOP WITH 4" BACKSPLASH - 3/4" GROUP 1 - ENSUITE MASTER - UPGRADE 1	Qty: 1
	Note: MSI QUARTZ ICED WHITE ON PAGE 14 OF 44, MISSED CHARGE.	
PLUMB	ING	
2	CHANGE DOUBLE STD COLONY SINKS TO DOUBLE UNDERMOUNT OVALYN SINKS FOR QUARTZ COUNTERTOP	Qty: 1
	Note: Original Pre-SSS page 3 of 9	
184		

Sub Total HST Total

- 1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Amount

Total Payment:					
PURCHASER:		06-Jan-21	MARILYN	Rosen	06-Jan-21
<del>/</del>	**	DATE	Decor Consultant	of 100	DATE
			- APPROVED -	104	0
			-01- 0 5 2020	My	Soen
			Date Approved Heat	thwood Homes (I	Huron) Limited

TAX#:1

PREPARED BY: Marilyn Rosen

Payment Summary

Paid Rv

# American Standard

Style That Works Better

**BARRIER FREE** 

# OVALYNTM UNDERCOUNTER SINK VITREOUS CHINA

#### OVALYN™ UNDERCOUNTER SINK

- · Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template

☐ 0495.221 Unglazed rim

435 x 359mm (17-1/8" x 14-1/8")

☐ 0495.300 Glazed underside

#### Bowl size:

382mm (15-1/16") wide 306mm (12-1/16") front to back 140mm (5-1/2") deep

☐ 0496.221 Unglazed rim

489 x 413mm (19-1/4" x 16-1/4")

☐ 0496.300 Glazed underside

#### Bowl size:

432mm (17") wide 356mm (14") front to back 140mm (5-1/2") deep

☐ 0497.221 Unglazed rim

546 x 441mm (21-1/2" x 17-3/8")

☐ 0497.300 Glazed underside

#### Bowl size:

483mm (19") wide 391mm (15-3/8") front to back 140mm (5-1/2") deep

#### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

### To Be Specified:

- □ Color: □ White □ Bone □ Linen □ Silver □ Fawn Beige □ Black
- ☐ Faucet\*:
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- \* See faucet section for additional models available

	The

SEE REVERSE FOR ROUGHING-IN DIMENSIONS


\_\_\_\_\_\_ J53 \_\_\_\_\_\_ © 2008 AS America Inc. Revised 2/08


# American Standard

Style That Works Better



## **OVALYN<sup>TM</sup>** UNDERCOUNTER SINK



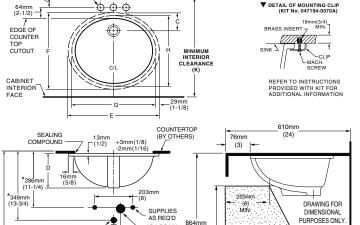

ADA DRAIN OUTLET (34) 1-1/4 O.D. TAILPIECE-(27) MIN. (6) MAX. FINISHED FLOOR CLEARANCE

CAT. NO.	Е	F	G	Н	С	D	J	К
0496.221	489mm	413mm	432mm	356mm	103mm	182mm	16mm	500mm
	(19-1/4)	(16-1/4)	(17)	(14)	(4-1/16)	(7-3/16)	(5/8)	(19-11/16)
0497.221	546mm	441mm	483mm	391mm	95mm	191mm	19mm	534mm
	(21-1/2)	(17-3/8)	(19)	(15-3/8)	(3-3/4)	(7-1/2)	(3/4)	(21-1/16)

4 (102mm)

# **VITREOUS CHINA**

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.


▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT
SEALING COMPOUND SUPPLIED BY OTHERS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.





FITTING CENTERSET

1-1/4 (32mm)

1-3/8 (35mm)

NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE
ORDERED SEPARATELY.
\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.
▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

