

PRE-Sales Selection Sheet
Checklist

1 of 39

LOT 284B-10 Model: 20-1790 B The Dunmore

PURCHASERS: LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

VENDOR: Heathwood Homes (Huron) Limited

- ☒ FINISHED BASEMENT
- ☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

☐ CORNER UPGRADE

☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

☐ MAIN FLOOR

☐ SECOND FLOOR

☐ BASEMENT

ADDITIONAL ROUGH-INS

☐ 200 AMP SERVICE

☐ WET BAR ROUGH-IN

☐ HUMIDIFIER

☒ AIR CONDITIONING

GAS ROUGH-IN

☒ STOVE

☐ DRYER

☐ BBQ

☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

☒ 6 IN ROUND DUCT

☐ 7 IN ROUND DUCT

FULL BASEMENT STAIRS:

UPPER BASEMENT STAIRS:

LOWER BASEMENT STAIRS:

MAIN STAIRS:

MEDIA STAIRS (if applicable):

LOFT STAIRS (if applicable):

N/A

All Oak

Carpet Grade

All Oak

N/A

N/A

APR 4 / 21

Signature

Date

on file

Purchaser:

Date

APPROVED -

APR 4 / 21

Date

Decor Consultant:

on file

Date

Heathwood Homes (Huron) Limited

APPROVED -

APR 4 / 21

Date

Approved

on file

Date

Heathwood Homes (Huron) Limited

APPROVED -

APR 4 / 21

Date

Approved

on file

Date

Locked Date:



Sales Selection Sheet

Wallaceton

PURCHASERS: LAKHWINDER, SINGH DHALIWAL and MANPREET KAUR

2 of 39

TEL:

LOT / UNIT	PHASE	MODEL
284B-10	2	20-1790 B The Dunmore

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

MODIFICATIONS

1	- SCHEDULE "E" FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER / DRYER - TOWNHOMES	Qty: 1
54,284	Note: SEE APPLIANCE SPECS PAGES 25-39	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	Amount
Paid By	
Total Payment:	

PURCHASER:

Signature on file
LAKHWINDER, SINGH DHALIWAL
MANPREET KAUR

04-Feb-21
DATE

Decor Consultant

IRIT SALEM
04-Feb-21
DATE

PURCHASER:

Signature

04-Feb-21
DATE

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 742-1

Invoice rpt 28may19

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR
Project: Wallaceon
Unit: 284B-10, Phase: 2
Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19
Locked:
Closed:

3 of 39

Kitchen

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG*** 
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Island Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Island Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****

HoodFan

8909	KVWB600DSS-KITCHEN AID 30 inch STAINLESS CHIMNEY HOOD-STAINLESS STEEL-30 inch ***Upg*** Page 24
------	--

Appliance

8909	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
------	--

Appliance

8909	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
------	---

Appliance

8909	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
------	---

Comment

NVC 2.S

Kitchen/Breakfast

Flooring

9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch 2 Page 7 ***5***
------	--

Floor Tile Grout

2225	Grout-(27) Silver ***STD***
------	-----------------------------

Floor Tile Pattern

3040	FRONT TO BACK ***STD***
------	-------------------------

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceton

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

4 of 39

Comment

Foyer

Flooring

9057

OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24
See Tile Direction on Sketch 2 Page 17 ***5***

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3040

FRONT TO BACK ***STD***

Comment

Laundry Room

Flooring

5494

GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***

Floor Tile Grout

7705

Grout-(01) Alabaster ***UPG***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Laundry Room Opt.

Cabinet - Uppers

1111

N/A *****

Cabinet Hardware

1111

N/A *****

Comment

Mud Room

Flooring

5494

GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***

225

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceston

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

5 of 39

Floor Tile Grout

7705 Grout-(01) Alabaster ***UPG***

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Comment

Powder Room

Flooring

9057 OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24
See Tile Direction on Sketch 2 Page 17 ***5***

Floor Tile Grout

2225 Grout-(27) Silver ***STD***

Floor Tile Pattern

3040 FRONT TO BACK ***STD***

Plumbing Fixture (Colour)

1737 Plumbing Fixtures-WHITE ***STD***

Comment

Hall

Flooring

9011 Red Oak PEARL-Vintage Red Oak Sculpted-PEWTER-3/4
inch X 5 inch ***UPG***

Comment

Dining Room

Flooring

9011 Red Oak PEARL-Vintage Red Oak Sculpted-PEWTER-3/4
inch X 5 inch ***UPG***

Comment

Great Room

Flooring

9011 Red Oak PEARL-Vintage Red Oak Sculpted-PEWTER-3/4
inch X 5 inch ***UPG***

Comment

2/2/25

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR
Project: Wallaceton
Unit: 284B-10, Phase: 2
Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

6 of 39

Upper Hall

Flooring

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Poly***STD***

Comment

Finished Basement (Rec) Room/Hall

Flooring

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Poly***STD***

Comment

Master Bedroom

Flooring

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Poly***STD***

Comment

Bedroom 2

Flooring

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Poly***STD***

Comment

Bedroom 3

Flooring

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Poly***STD***

Comment

Master Ensuite

Cabinet Colour/Style

9166

Viking III-CHARLESTON-ORCHID-3DL ***STD***

Countertop

9069

MSI Quartz GROUP 1 ICED WHITE ***1***

25

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceston

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

7 of 39

Countertop Edge

4006

GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***

Cabinet Hardware

2093

9671-HARDWARE ***STD***



Floor Tile

9057

OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24
See Tile Direction on Sketch 4 Page 19 ***5***

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3040

FRONT TO BACK ***STD***

Shower Floor Tile

8103

OD.ON.SWT.02.HEX.MT-ONTARIO HEXAGON
MATTE-SNOW WHITE ***2***

Shower Floor Tile Grout

2226

Grout-(00) White ***STD***

Shower Floor Tile Pattern

1111

N/A *****

Shower Wall Tile

9020

QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Shower Wall Tile Grout

2226

Grout-(00) White ***STD***

Shower Wall Tile Pattern

3090

VERTICAL STACKED ***STD***



Shower Jamb(s) and Sill(s)

8923

Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Main Bathroom

Cabinet Colour/Style

9168

Viking III-CHARLESTON-MOONLIGHT-3DL ***STD***

Countertop

8806

4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***

Countertop Edge

1111

N/A *****

Handwritten signature and number 25

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceston

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

8 of 39

Cabinet Hardware

2093 9671-HARDWARE ***STD***

Flooring

8913 UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile
Direction on Sketch 4 Page 19 ***2***

Floor Tile Grout

7705 Grout-(01) Alabaster ***UPG***

Floor Tile Pattern

3050 SIDE TO SIDE ***STD***

Wall Tile

9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Wall Tile Grout

2226 Grout-(00) White ***STD***

Main Bathroom Tile Pattern

3090 VERTICAL STACKED ***STD***



Plumbing Fixture (Colour)

1737 Plumbing Fixtures-WHITE ***STD***

Comment

Finished Basement Bathroom

Cabinet Colour/Style

9166 Viking III-CHARLESTON-ORCHID-3DL ***STD***

Countertop

8797 6697-46-Countertop-ARGENTO ROMANO ETCHINGS
FINISH-Formica ***STD***

Countertop Edge

1111 N/A *****

Cabinet Hardware

7672 135-HARDWARE ***STD***

Flooring

8915 UN.BL.ATR.1224-Biel-Antracita (Dark Grey)-12 x 24 See
Tile Direction on Sketch 1 Page 16 ***2***

Floor Tile Grout

7704 Grout-(19) Pearl Gray ***STD***

Floor Tile Pattern

3040 FRONT TO BACK ***STD***

Handwritten signature and initials.

Shower Floor Tile

8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
White Matte-2 x 2 ***STD***

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceton

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunimore

Created: 12/16/2020 09:07:19

Locked:

Closed:

9 of 39

Shower Floor Tile Grout

2226 Grout-(00) White ***STD***

Shower Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Shower Wall Tile


9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Shower Wall Tile Grout

2226 Grout-(00) White ***STD***

Shower Wall Tile Pattern

3090 VERTICAL STACKED ***STD***



Shower Jamb(s)

8923 Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (Colour)

1737 Plumbing Fixtures-WHITE **STD***

Comment

Great Room Fireplace

Type

8865 Dimplex-Electric Fireplace-PF3033HL ***STD***

Mantle

8891 NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
PAGE 20

Surround Opt.

1111 N/A *****

Note

1111 Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.

Note

1111 Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.

Comment

Basement Stairs

Type

1714 Carpet Grade Stairs ***STD BASEMENT STAIRS***

Colour

7922 Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***

Carpet Runner

1111 N/A *****

Handrail/Pickets/Post Type

9119 Handrail only on closed walls (one or two sides per building code) ***STD***

Customer Colours

294

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR

Project: Wallaceton

Unit: 284B-10, Phase: 2

Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

10 of 39

Handrail/Pickets/Post Colours

1729

Carpet Grade-Stain handrail, pickets, stringers, nosing_pos

Carpet

9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***

Custom Stain/Paint

1111

N/A *****

Comment

Basement Stairs Landings (Upper and Lo

Flooring

9011

Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-PEWTER-3/4 inch X 5 inch ***4***

Comment

Main Stairs

Type

1712

Oak Stairs ***STD MAIN STAIRS***

Colour

7922

Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***

Carpet Runner

1111

N/A *****

Handrail/Pickets/Posts Type

7652

1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***

Handrail/Pickets/Posts Colour

1728

Oak Grade-Stain handrail,oak pickets,stringers,treads,risers

Custom Stain/Paint

1111

N/A *****

Comment

Main Stairs Landing(s)

Flooring

9011

Red Oak PEARL-Vintage Red Oak Sculpted-PEWTER-3/4 inch X 5 inch ***UPG***

Comment

Throughout

2 of 25

LAKHWINDER, SINGH DHALIWAL/MANPREET KAUR
Project: Wallaceton
Unit: 284B-10, Phase: 2
Model: 20-1790 B The Dunmore

Created: 12/16/2020 09:07:19

Locked:

Closed:

1 of 39


Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***

Comment

Purchaser:


LAKHWINDER, SINGH DHALIN
Date
Decor Consultant
Date

Purchaser:


MANPREET KAUR
Date
Wallaceton
Date Approved

APPROVED -

02-01-2021

5/2/23



Sales Selection Sheet

Wallaceton

PURCHASERS: LAKHWINDER, SINGH DHALIWAL and MANPREET KAUR

12 of 39

TEL:

LOT / UNIT 284B-10	PHASE 2	MODEL 20-1790 B The Dunmore
-----------------------	------------	--------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	- KITCHENAID KQWB600DSS 30"CHIMNEY HOOD FAN	Qty: 1
54,056	Note: KQWB600DSS 30"CHIMNEY SPEC PAGE 24	

CABINETRY

2	- CABINETRY - 11A-UPPER ANGLE CORNER PER UNIT - UPGRADE 1	Qty: 1
189,343		
54,059	Note: SKETCH # 2 AND 3 PAGES 17 AND 18	
3	- CABINETRY - 22A-GLASS DOOR (EACH) (SPECIFY CLEAR, FRIGATE , OR SMOKED GLASS) (UNFINISHED CABINET INTERIOR); PRICE ALL THE SAME FOR ALL LINES - KITCHEN	Qty: 1
189,07C		
54,060	Note: SKETCH # 2 AND 3 PAGES 17 AND 18	
4	- CABINETRY - VIKING VIII/KITCHEN BUILT IN - KITCHEN - STANDARD SERIES	Qty: 1
189,047	SKETCH # 2 AND 3 PAGES 17 AND 18	
54,093	Note: APPLIANCE SPECS PAGES 25-33	

CERAMICS

5	- CERAMICS - FLOOR - FOYER - UPGRADE 5	Qty: 1
177,575		
54,078	Note:	
6	- CERAMICS - FLOOR - KITCHEN - UPGRADE 5	Qty: 1
177,442		
54,079	Note:	
7	- CERAMICS - FLOOR - POWDER ROOM - UPGRADE 5	Qty: 1
177,583		
54,080	Note:	
8	- CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 2	Qty: 1
177,447		
54,087	Note:	
9	- CERAMICS - SHOWER FLOOR - ENSUITE MASTER - UPGRADE 2	Qty: 1
177,58C		
54,088	Note:	
10	- CERAMICS - FLOOR - BASEMENT BATHROOM - UPGRADE 2	Qty: 1
177,463		
54,090	Note:	

TAX#1

PREPARED BY: Irit Salem

PE 726-1

SIInvoice.rpt 28May19

Initials:

MLC

2.S



Sales Selection Sheet

Wallaceton

PURCHASERS: LAKHWINDER, SINGH DHALIWAL and MANPREET KAUR

13 of 39
TEL:

LOT / UNIT 284B-10	PHASE 2	MODEL 20-1790 B The Dunmore
-----------------------	------------	--------------------------------

CERAMICS

11 177,458 54,116 Note:	- CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 5	Qty: 1
12 177,487 54,117 Note:	- CERAMICS - FLOOR GROUT - MAIN BATHROOM - GROUT	Qty: 1
13 177,486 54,279 Note:	- CERAMICS - FLOOR GROUT - LAUNDRY ROOM - GROUT	Qty: 1
14 177,486 54,280 Note:	- CERAMICS - FLOOR GROUT - MUD ROOM - GROUT	Qty: 1

ELECTRICAL

15 189,45C 54,053	- ELECTRICAL - CEILING ROUGH-IN (CAPPED) Note: GREAT ROOM- TO BE INSTALLED IN THE CENTRE OF THE ROOM- USE SEPARATE SWITCH KITCHEN- TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE SEPARATE SWITCH SEE SKETCH # 2 PAGE# 17	Qty: 2
16 189,451 54,054	- ELECTRICAL - ADDITIONAL SWITCH Note: GREAT ROOM AND KITCHEN SKETCH # 2 PAGE 17	Qty: 2
17 189,44E 54,055	- ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) Note: GREAT ROOM- TO BE INSTALLED ABOVE THE FIRE PLACE 70" FROM FLOOR SEE SKETCH # 2 PAGE# 17	Qty: 1
18 189,417 54,095	- ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET. RELOCATE STANDARD 240 V 40AMP FROM STOVE TO BUILT-IN OVEN LOCATION SKETCH # 2 AND 3 PAGES 17 AND 18 SECS PAGES 28-30	Qty: 1

GRANITE

19 189,464 54,094	- GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP SKETCH # 3 PAGE 18 Note: COOKTOP SPECS PAGES 26-27	Qty: 1
20 177,608 54,281 Note:	- GRANITE - COUNTERTOP - 3/4" GROUP 2 WITH MITRE EDGE - KITCHEN / ISLAND - UPGRADE 2	Qty: 1

Initials: MP

TAX#:1

PREPARED BY: Irit Salem

PE 726-2

Simvoice.rpt 28may19



Sales Selection Sheet

Wallaceton

PURCHASERS: LAKHWINDER, SINGH DHALIWAL and MANPREET KAUR

14 of 39

TEL:

LOT / UNIT 284B-10	PHASE 2	MODEL 20-1790 B The Dunmore
-----------------------	------------	--------------------------------

GRANITE

21 177,615 54,282 Note:	- GRANITE - COUNTERTOP WITH 4" BACKSPLASH - 3/4" GROUP 1 - ENSUITE MASTER - UPGRADE 1	Qty: 1
22 177,622 54,283 Note:	- GRANITE - COUNTERTOP WITH 4" BACKSPLASH - 3/4" GROUP 1 WITH MITRE EDGE - ENSUITE MASTER - UPGRADE 2	Qty: 1

HARDWOOD

23 177,645 54,081 Note:	- HARDWOOD - VINTAGE - 5" RED OAK SCULPTED - MAIN HALL - UPGRADE 3	Qty: 1
24 177,645 54,082 Note:	- HARDWOOD - VINTAGE - 5" RED OAK SCULPTED - LANDING(S) TO BSMT - UPGRADE 3	Qty: 1
25 177,653 54,083 Note:	- HARDWOOD - VINTAGE - 5" RED OAK SCULPTED - LANDING(S) TO 2ND FLOOR - UPGRADE 3	Qty: 1
26 177,641 54,084 Note:	- HARDWOOD - VINTAGE - 5" RED OAK SCULPTED - GREAT ROOM / DINING ROOM - UPGRADE 3	Qty: 1

HEATING / AIR

27 189,474 54,057 Note:	- HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY BE RELOCATED TO BUILT-IN OVEN LOCATION SKETCH # 3 PAGE 18 GAS COOKTOP SPECS PAGES 26-27	Qty: 1
----------------------------------	--	--------

Sub Total
HST
Total

TAX#:1

PREPARED BY: Irit Salem

PE 726-3

8invoices.rpt 25may19

Initials: NK

25



Sales Selection Sheet

Wallaceton

15 of 39

PURCHASERS: LAKHWINDER, SINGH DHALIWAL and MANPREET KAUR

TEL:

LOT / UNIT	PHASE	MODEL
284B-10	2	20-1790 B The Dunmore

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	Amount
Paid By	
Total Payment:	

PURCHASER:

Lakhwinder Singh
LAKHWINDER, SINGH DHALIWAL

04-Jan-21
DATE

Decor Consultant

04-Jan-21
DATE

PURCHASER:

Manpreet Kaur
MANPREET KAUR

04-Jan-21
DATE

APPROVED

M. Kaur

04-Jan-21

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Init Salem

PE 726-4

Invoice.rpt 28may18

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE


16 of 39
THE DUNMORE

Sketch #1

ELEVATION B | 2,263 SQ. FT.

Includes 443 square feet of finished lower level

20-1790 ELEV. B

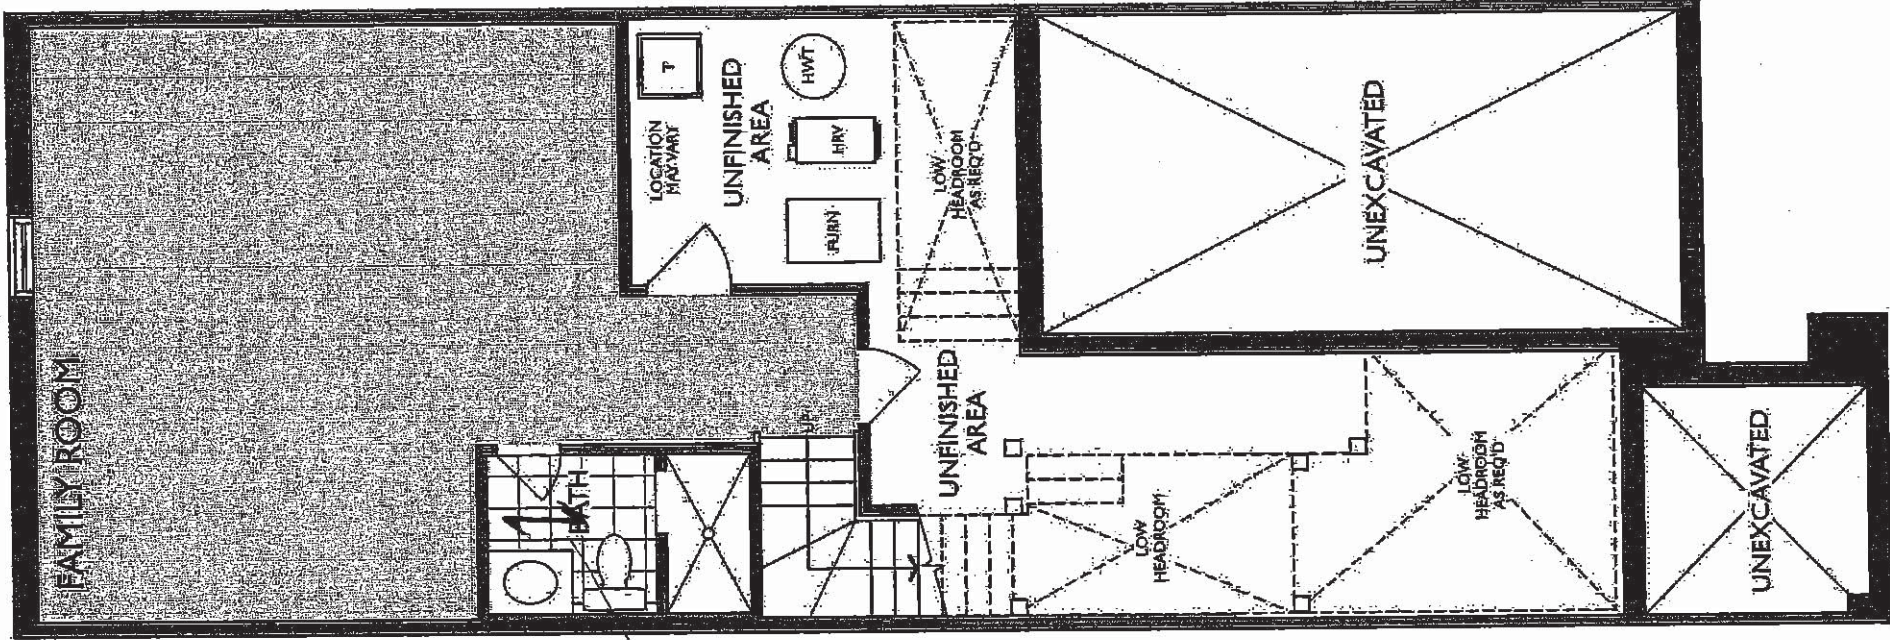

LOWER LEVEL
ELEVATION B

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

17 of 39


THE DUNMORE

Sketch #2

ELEVATION B | 2,263 SQ. FT.


Includes 443 square feet of finished lower level

20-1790 ELEV. B

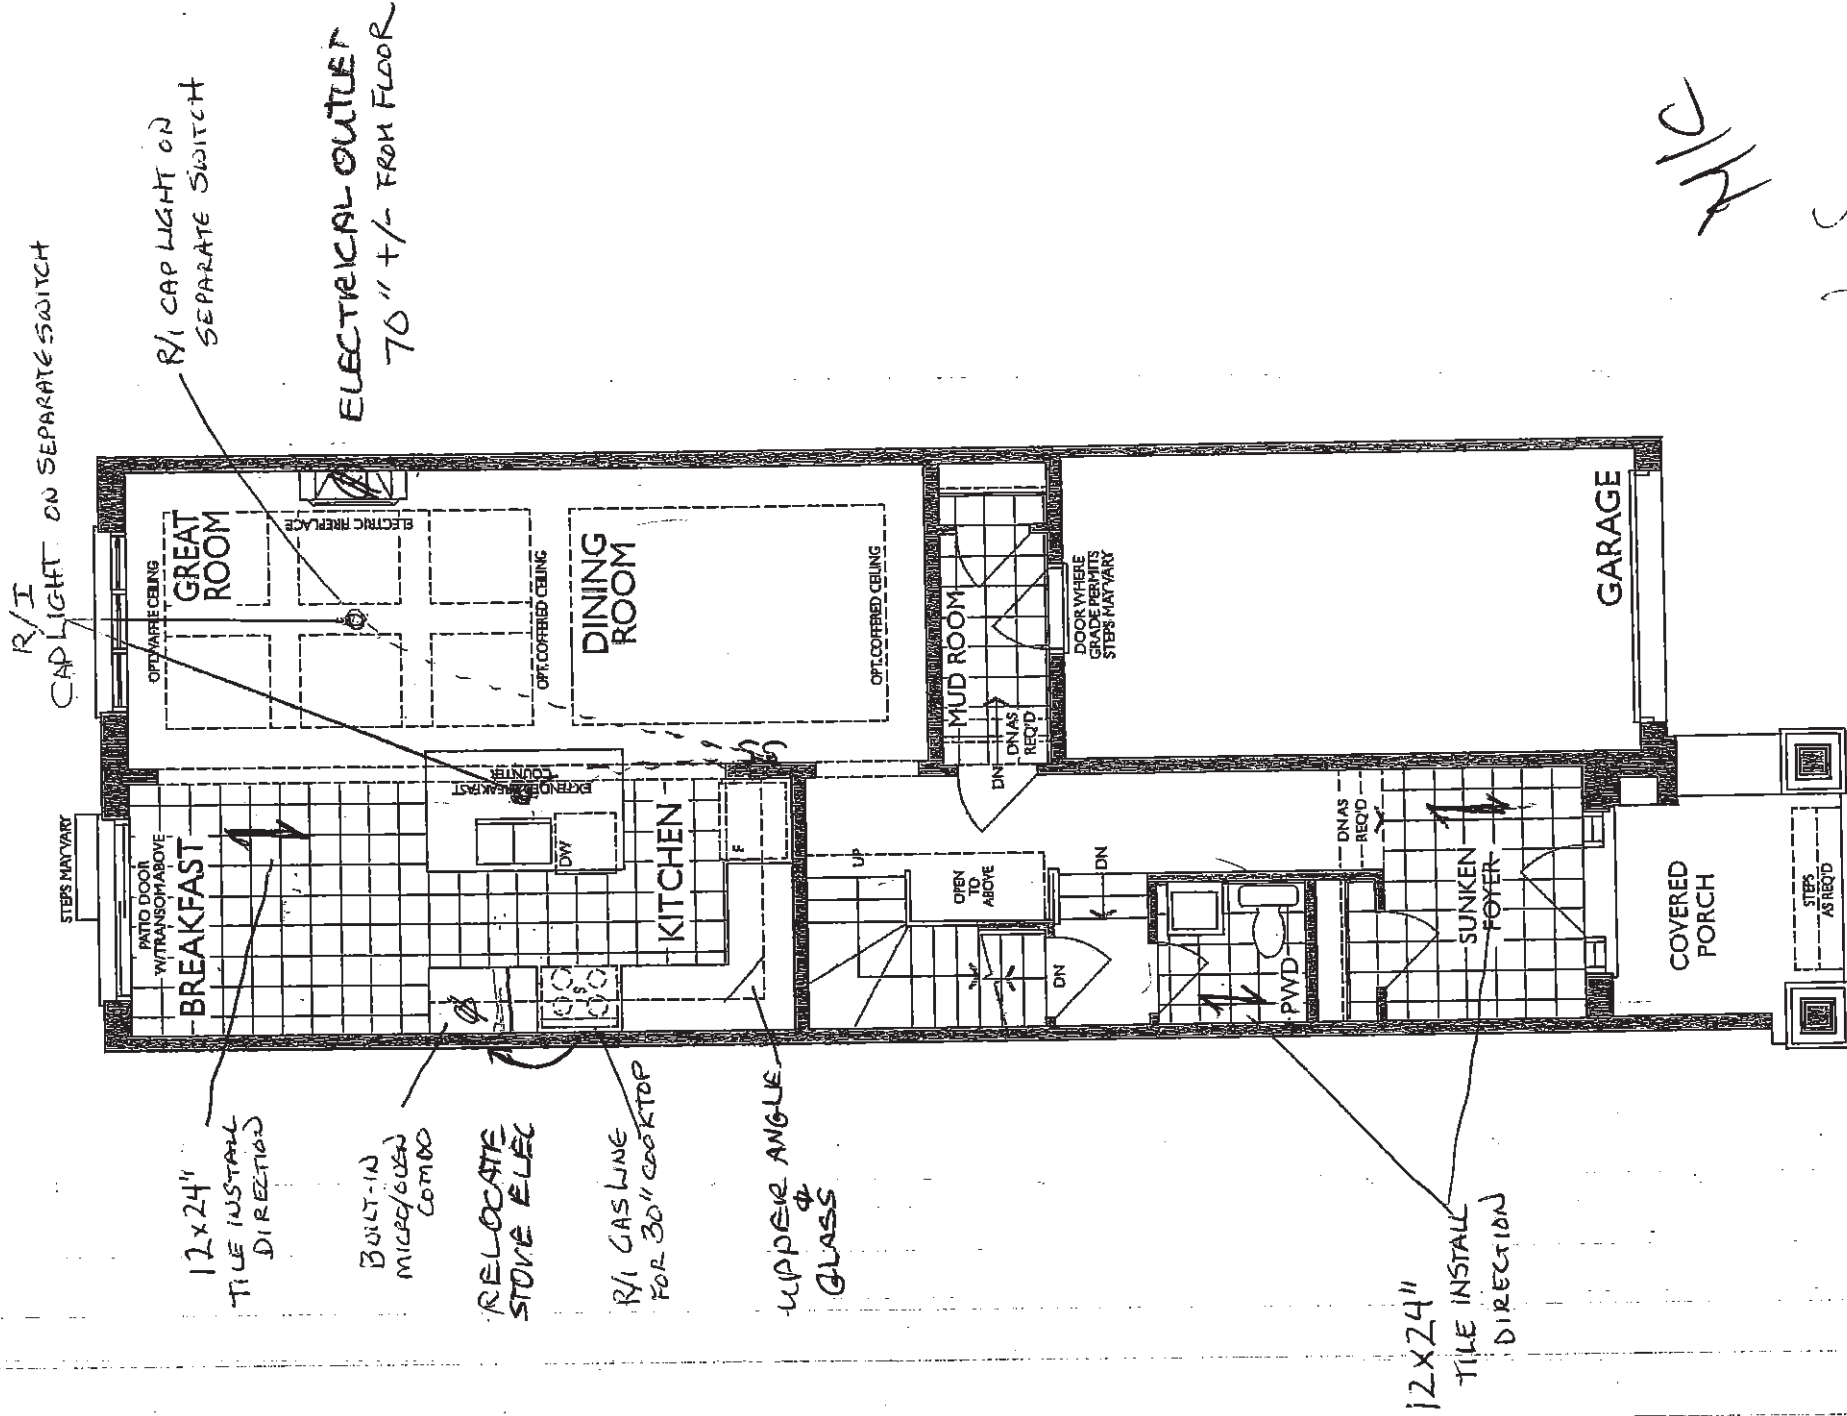

MAIN FLOOR
ELEVATION B

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE



HEATHWOOD HOMES
WALLACETON, KITCHENER
MODEL: 20-1790 (2004)

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30"W Std. hood
 - Fridge Opening: 37 3/8 "W X 73"
 - Fridge cabinet & gables: 66cm L
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blumotion Hinges- soft close doors
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)


Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blumotion Hinges- not soft close
- Tandem Box Drawers- soft close
- Master Ensuite: Top drawers (Full height doors at sink)
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets


THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT REPRESENTATION.

8 of 39


Sketch # 3

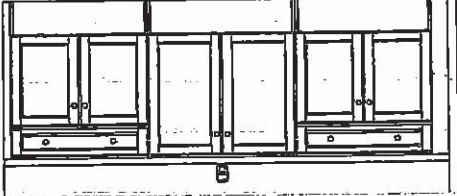


MASTER ENSUITE
(2ND FLR)

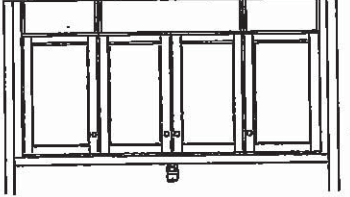



MAIN BATH
(2ND FLR)

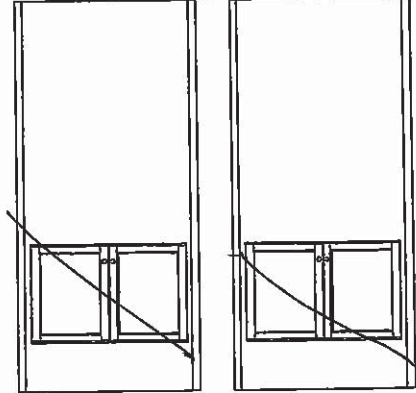


STD. BASEMENT BATH




RELOCATE
STANDARD 240V HOAMP
FOR BUILT-IN MICROWAVE COMBO

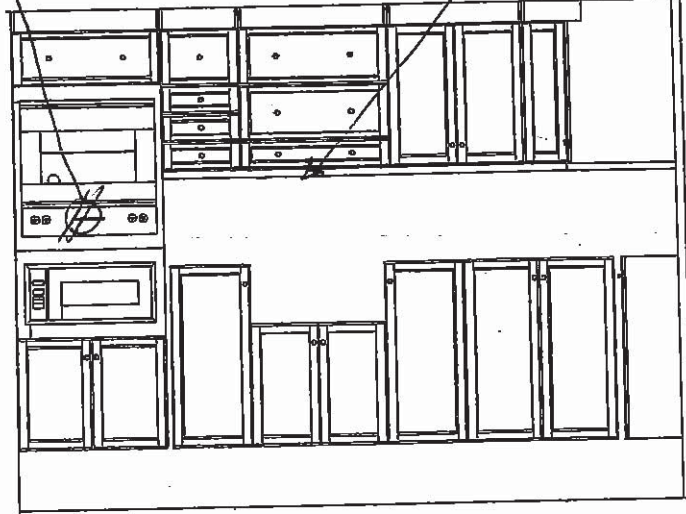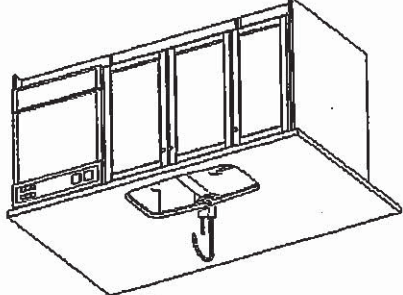

R1 GAS WIDE

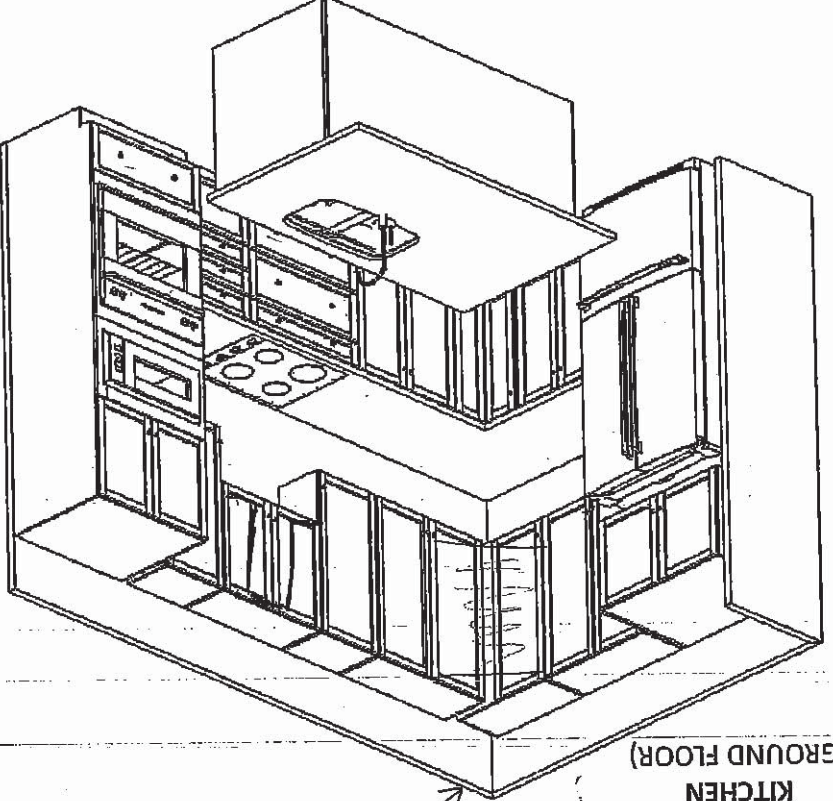

UPPER ADDED CABINET
& CLEAR GLASS DOOR

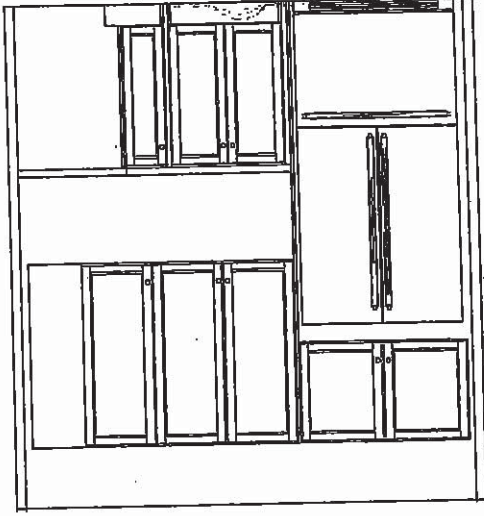

KITCHEN
(GROUND FLOOR)

11/13/2019

2.5

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE


19 of 39
THE DUNMORE

Sketch #4

20-1790 ELEV. B

ELEVATION B | 2,263 SQ. FT.


Includes 443 square feet of finished lower level

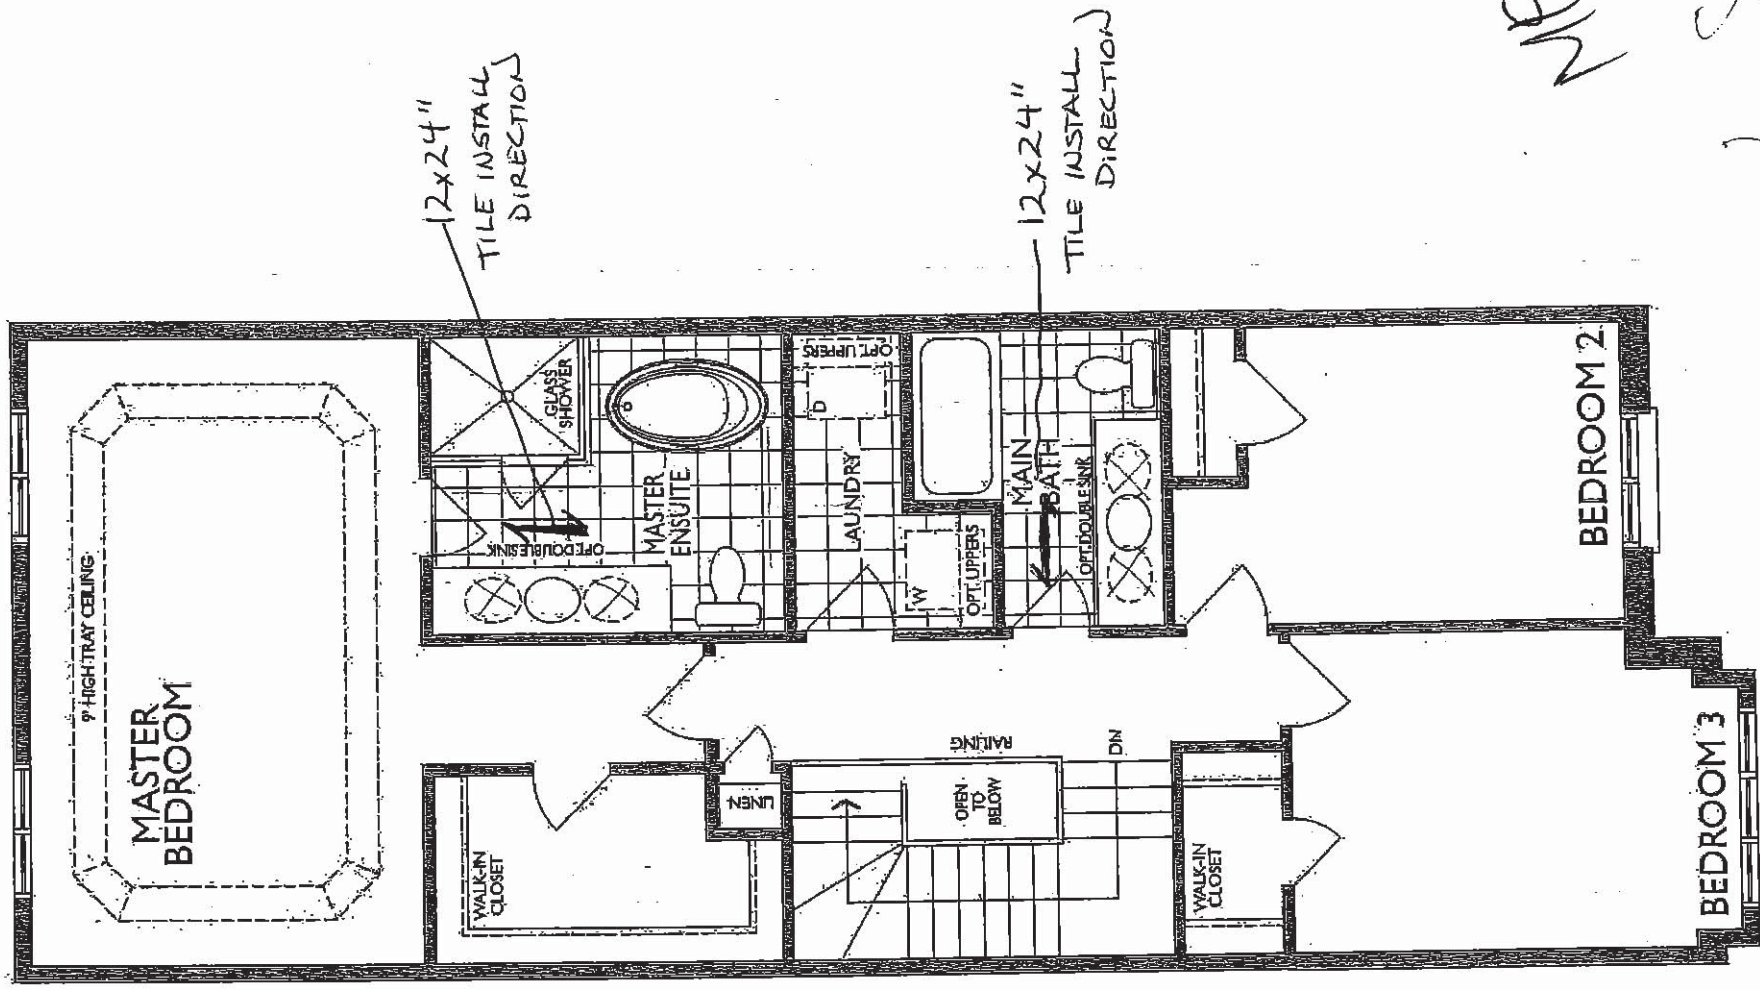

SECOND FLOOR
ELEVATION B

July 7, 2020


UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

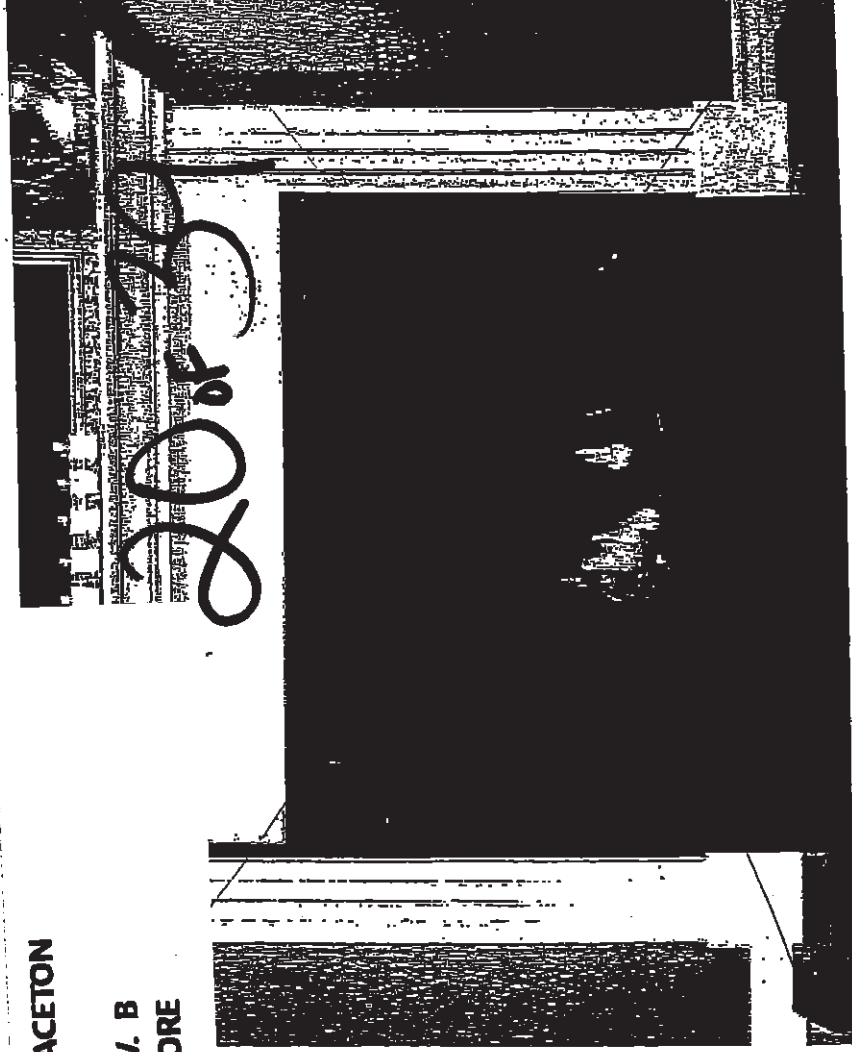

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

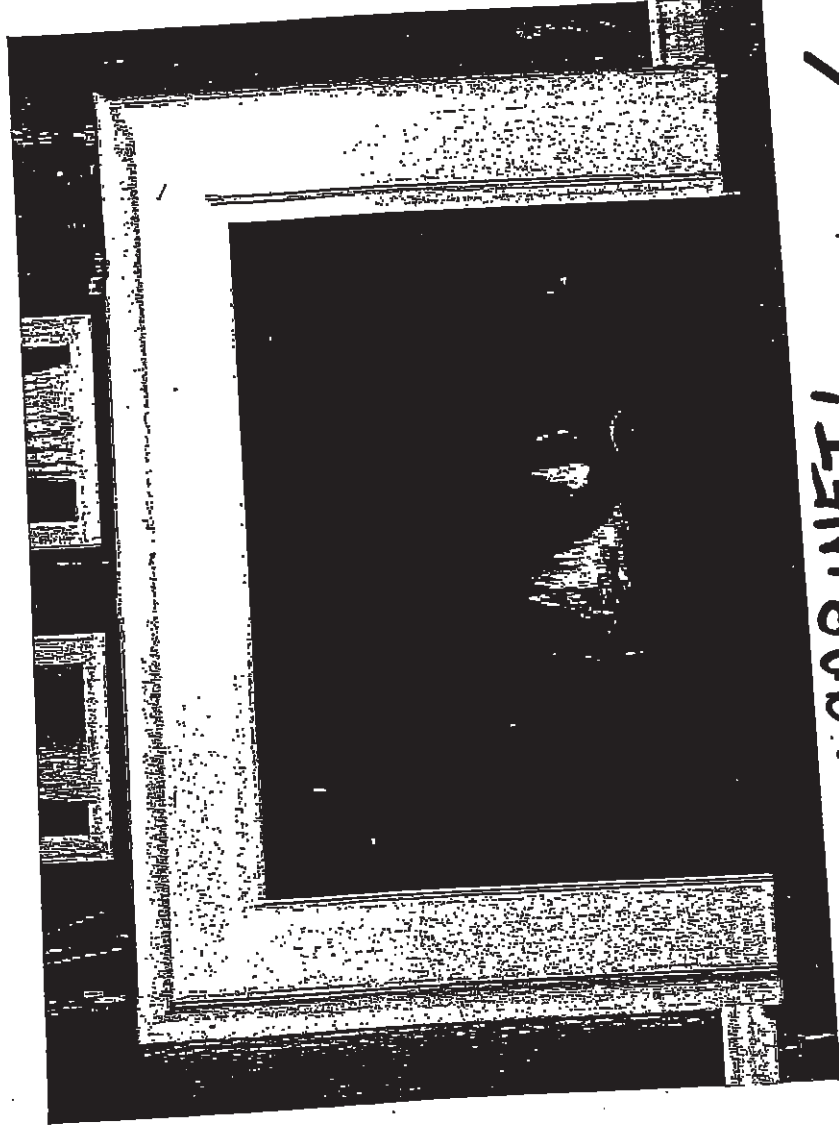

'CABINET' STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH


(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE



21 of 39

STANDARD KITCHEN SINK

ND1831UA/9

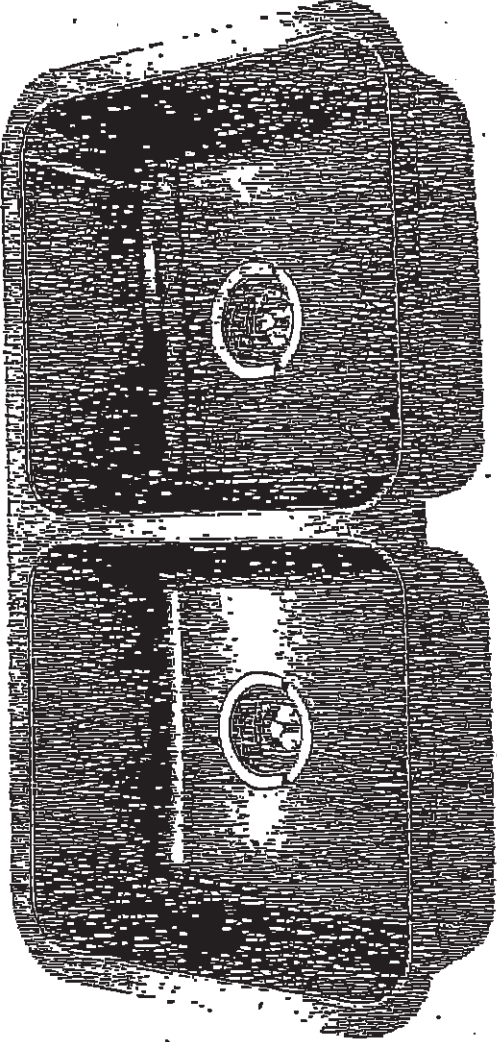

Optional Accessories

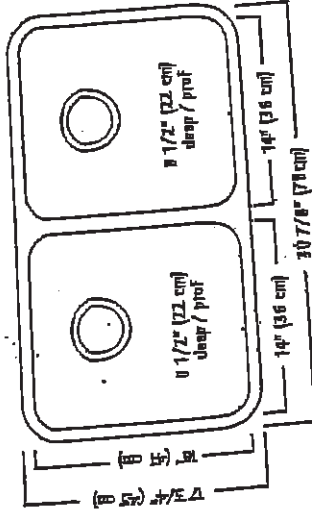

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- * O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- * Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Franke Kindred Canada Limited

Printed in Canada

7117

2.4
2.5
2.6


UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

22 of 39

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

Tip


2.5 HP

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

23 of 39

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS




2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

25/12

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

24.39

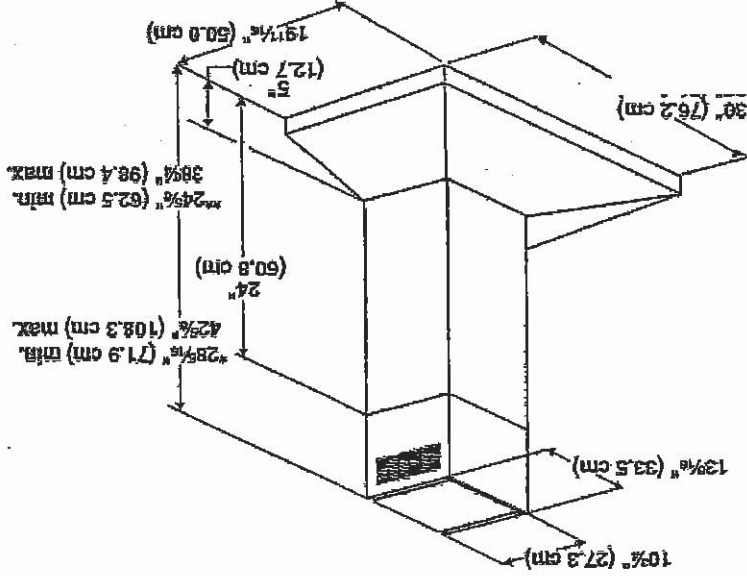

*For non-vented (recirculating) installations
**For vented installations

PERFORMANCE
Round
6"
ELECTRICAL
15amp, 60 Hz, 120 V.
Duct Outlet Type
Duct Outlet Size


This 3-speed vent hood has power to effectively vent an output of up to 65K BTUs. Auto speed sensing keeps the vent at the proper fan speed by sensing the amount of heat coming from the cooktop. This 30-inch wall-mount canopy hood has both LED and halogen lights to brighten almost any work area.

MODEL: KQWB600DSS
30-in. Width | Wall-Mount Canopy | 600 CFM Motor



FOR THE WAY IT'S MADE.
FOR THE WAY IT'S MADE.

IMPORTANT:
For non-vented (recirculating) installations
Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
Suggested maximum distance "X": 36" (91.4 cm)

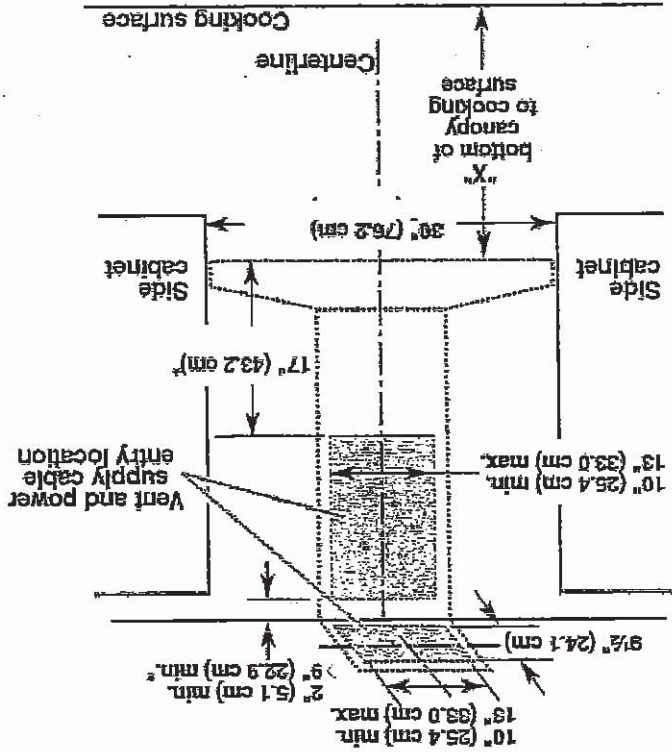

PRODUCT FEATURES


600 CFM/65K BTU Threshold
Allows installation over any kitchenAid regular 30-inch range or cooktop, and some commercial-style cooking surfaces with outputs up to 65K BTU

Perimeter Ventilation
Increases ventilation system efficiency by pulling air from the edges of the hood and speeding up the movement of air at the center, allowing it to efficiently handle up to a 65K BTU total output

Auto Speed Setting
Takes the guesswork out of protecting cabinets from steam, grease, and moisture by automatically adjusting fan speed to ventilation needs depending on the heat being produced

LED Task Lights
Provide extra lighting over the cooking surface to help in the cooking process

Halogen Night Lights
Enhances the style-of the ventilation system by providing soft, accent lighting in the kitchen

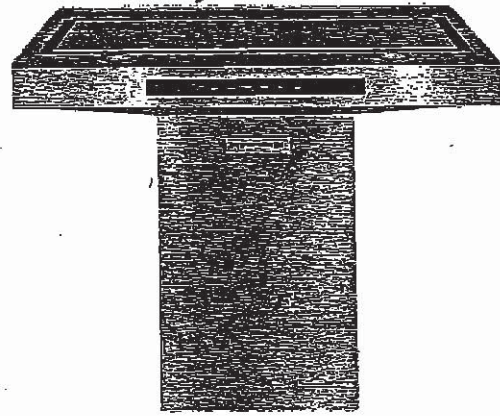

24.39

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

25 of 39



French Door w/Ice Dispenser Refrigerator

PRODUCT MODEL NUMBERS
WRF555SDF ~~WRF555SDH~~

Electrical: A 115-volt, 60 Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply:


IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

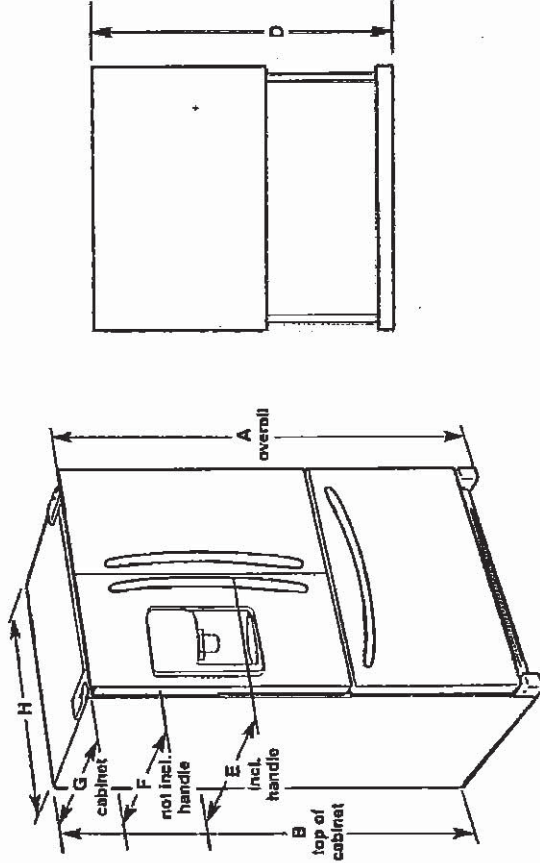

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
24.7 cu. ft.	70 1/2" (178.4 cm)	68 1/4" (174.3 cm)	48" (121.9 cm)	54" (137.2 cm)	35 1/2" (89.5 cm)	32 1/2" (83.5 cm)	29" (73.7 cm)	35 3/4" (90.5 cm)

LOCATION REQUIREMENTS

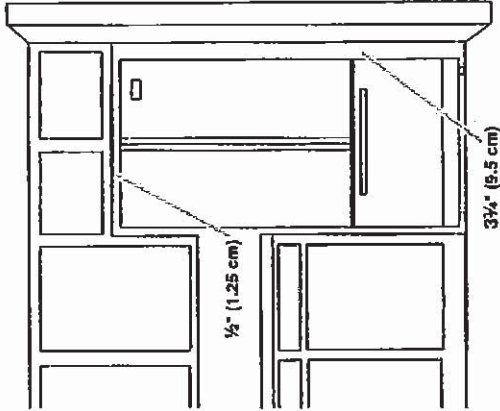

IMPORTANT: This refrigerator is designed for indoor, household use only. To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE


26 of 39

30" Gas Cooktop

Benchmark® Series – Stainless Steel NGMP056UC



BOSCH
Invented for life



NGMP056UC
Stainless Steel

The 30" Benchmark® Series gas cooktop features a dual-stacked burner that delivers both a low simmer and high heat flame.

Features & Benefits

Dual stacked burner designed for faster boil time (20,000 BTUs) and a low simmer

OptiSim® Burner – simmer delicate sauces and melt chocolate without scorching

Electronic re-ignition will automatically re-ignite the burner in case the flame goes out

Continuous grates make moving heavy pots easier

Distinctive red LED light indicates burners are on

General Properties	
Knob material	Metal
Sealed burners	Yes
Grate material	Cast iron
Element Performance	
Total BTU load (NG / LP)	51,000 / 43,200
Power of front left burner (NG / LP)	10,000 / 9,100
Power of back left burner (NG / LP)	5,500 / 5,000
Power of center burner (NG / LP)	20,000 / 15,000
Power of back right burner (NG / LP)	10,000 / 9,100
Power of front right burner (NG / LP)	5,500 / 5,000

Technical Details	
Watts	360 W
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3 prong
Power cord length	60"
Energy source	Gas
Convertible to LP (kit required)	Yes



Dimensions & Weight	
Overall appliance dimensions (HxWxD)	3 13/16" x 31" x 21 1/4"
Required cutout size (HxWxD)	3 13/16" x 28 15/16" x 19 1/8"
Minimum distance from counter front	1 7/8"
Minimum distance from rear wall	3"
Net weight	38 lbs
Accessories — Included	
Included	LP conversion kit
Accessories — Optional	



HEZ27751
Cooktop control knob kit,
black stainless steel

† To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

27 of 39


BOSCH
Invented for life

The drawing shows a range hood with the following dimensions:

- Top View:**
 - Overall width: 31" (788)
 - Inner width: 21 1/4" (540)
 - Front flange width: 3 13/16" (97)
 - Gas connection offset: 1" (25)
 - Gas connection hole diameter: 9/16" (15)
- Side View:**
 - Depth: 17 1/8" (37)
- Front View:**
 - Top flange width: 3" (76)
 - Top flange depth: 28 15/16" (735)
 - Top flange offset: 19 1/8" (486)
 - Top flange thickness: 13" (330)
 - Main body depth: 17 1/8" (48)
 - Main body thickness: 13" (330)
 - Max. front flange offset: max. 3" (76)

• Dimension from countertop to top of grates in front of 17 1/8" (37).
 ** When installed in combination with a hood, refer to hood manufacturers requirements for installation.

Measurement in inches (mm)

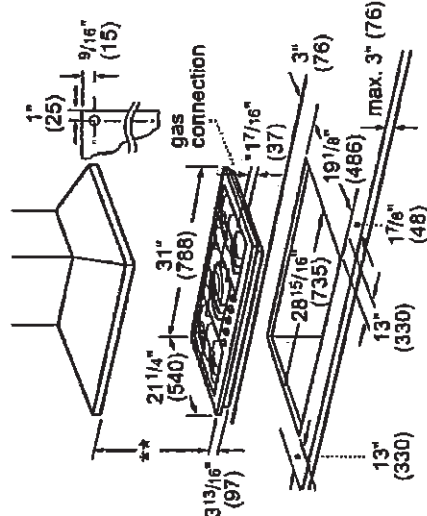

- * Dimension from countertop to top of grates in front of 17/16" (37).
** When installed in combination with a hood, refer to hood manufacturers requirements for installation.

Installation above Wall Ovens

30" Built-in oven - under gas cooktop

The diagram illustrates the installation of a 30-inch built-in oven under a gas cooktop. Key dimensions and labels include:

- 30" Built-in oven - under gas cooktop**: The main title of the diagram.
- 67/16" (165)**: Dimension for the oven's base width.
- 31/16" (97)**: Dimension for the cooktop's base width.
- 7/16" (22)**: Dimension for the cooktop's base thickness.
- see notes**: Reference to additional installation instructions.
- 3"**: Dimension for the cooktop's base height.
- 28 1/4" (718)**: Dimension for the cooktop's base depth.
- 29" (737)**: Dimension for the cooktop's base depth.
- 26 7/16" (674)**: Dimension for the cooktop's base depth.
- 36" (915)**: Dimension for the cooktop's base depth.
- 4 1/4" (121)**: Dimension for the cooktop's base depth.
- 24 5/16" (625)**: Dimension for the oven's base width.
- 30" Built-in Oven**: Label for the oven unit.
- INSULATING COIL UNIT (AIR WALL)**: Label for the insulation unit.

Notes:

- Dimensions based on standard countertop height (36" with 43/4" toe kick including base plate).
- The built-in oven can be installed below the gas cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

Measurements in inches (mm)

Side View Gas Cooktop Installation

Diagram illustrating the side view of a gas cooktop installation, showing dimensions and components.


Dimensions (inches):

- 3 13/16" (97)
- 3 1/8" NPT
- 3 3/8" (86)
- 1/2" NPT
- 60" (1.524)

Components and Labels:

- gas regulator
- power cord
- flexible gas line
- 120 V receptacle
- gas cut-off valve
- gas supply line
- stub-out
- Rough-in Cooktop Box
- Arrow on the pressure regulator shows the direction of gas flow
- Floor

Measurements in inches (mm)

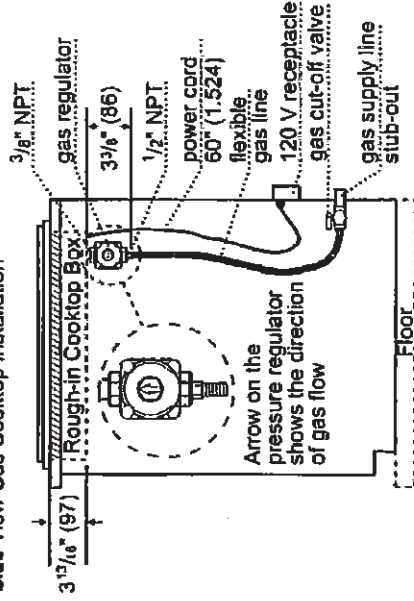

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 5 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unresisted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.


© 2018 Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

28 of 39

Whirlpool®

6.4 cu. ft. Smart Combination Wall Oven
WOC75EC0H

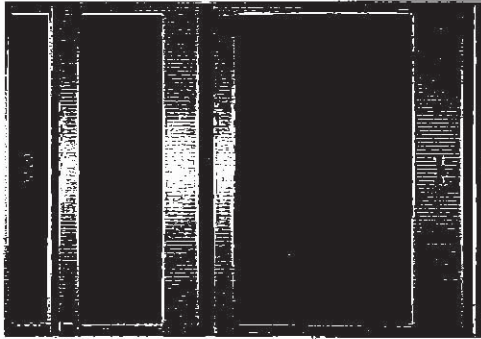

Stainless Steel
WOC75EC0HS

Also available in:

- ☐ White WOC75EC0HW
☐ Black WOC75EC0HB
☐ Black Stainless WOC75EC0HV

Key Features & Benefits

Smart Appliance


Care smarter with connected features that let you send cooking instructions to the oven from your smartphone, control your kitchen with voice commands using a compatible voice-enabled device* or skip preheating.

Scan-to-Cook Technology™

Get the right settings every time. Scan a frozen food barcode with your smartphone or tablet and send recommended or customized cooking instructions straight to your oven or microwave for dinner done the way your family wants it.

Yummily® Guided Cooking™

Prompts in the app even send cooking instructions straight to your Whirlpool® smart wall oven* at the right times, so dinner's ready when your family's hungry.

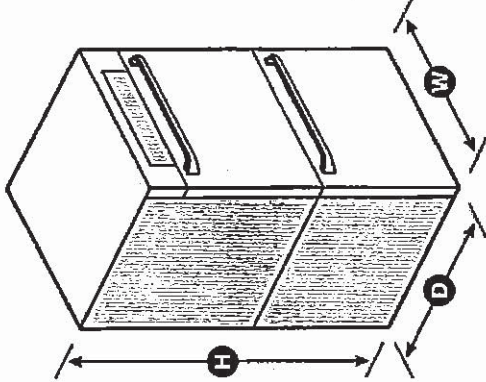

Capacity		6.4 cu. ft.
Oven		
General Features & Properties		
Touchscreen		
Voice control with a compatible voice-enabled device**		
Fingerprint Resistant		
Frozen Bake™ technology		
Multi-Step Cooking		
True Convection Cooking		
Convection Conversion		
Steam Clean option		
Scan-to-Connect Technology		
Electrical Details		
Amps		40
Volts		240
Certifications		
Connected/Smart Appliance		Yes
Star-K Certified/Kosher		Yes
Technical Details		
Fuel Type		Electric
Oven Type		Combination
Oven Cooking System		True Convection
Number of Oven Racks		3
Cleaning Type		Self-Cleaning
Dimensions		
Product Dimensions (H x W x D)		42-9/16" x 30" x 23-1/4"
Depth with Door Open 90°		46-3/4"
Cutout Dimensions (H x W x D)		41-5/16" x 28-1/2" x 24"
Reference Material		
Install Guide		
Use & Care Guide		
Energy Guide		
Warranty		


*Appliance must be set to remote enable. WiFi & App Required. Features subject to change. Details and privacy info at whirlpool.com/connect. **U.S. Only. †Select recipes only. Compatible smart appliance required. Appliance must be set to remote enable. Features subject to change. For details and privacy statements, visit whirlpool.com/connect and yummily.com/privacy. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
©/TM © 2020. All rights reserved. Printed in the U.S.A. D200104XXE. WOC75EC0HSpecSheetV01.

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

29 of 39

Product Dimensions

~~27" (68.6 cm) and 30" (76.2 cm) Ovens~~

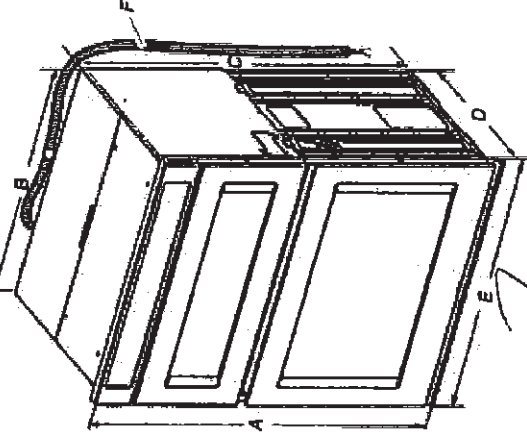

~~27" (68.6 cm) models~~


- ~~A. 42 $\frac{1}{8}$ " (108.0 cm) overall height~~
- ~~B. 25 $\frac{1}{8}$ " (64.6 cm) recessed width~~
- ~~C. 41" (104.1 cm) recessed height~~
- ~~D. 23 $\frac{1}{2}$ " (59.1 cm) max. recessed depth~~
- ~~E. 27" (68.6 cm) overall width~~
- ~~F. 48" (121.9 cm) Flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.~~

~~30" (76.2 cm) models~~

- ~~A. 42 $\frac{1}{8}$ " (108.0 cm) overall height~~
- ~~B. 28 $\frac{1}{2}$ " (72.3 cm) recessed width~~
- ~~C. 41" (104.1 cm) recessed height~~
- ~~D. 23 $\frac{1}{2}$ " (59.1 cm) max. recessed depth~~
- ~~E. 30" (76.2 cm) overall width~~
- ~~F. 48" (121.9 cm) Flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.~~

Cabinet Dimensions

~~27" (68.6 cm) and 30" (76.2 cm) Ovens~~

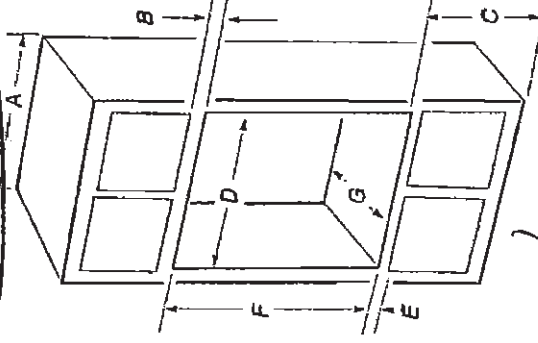

~~27" (68.6 cm) models~~

- ~~A. 27" (68.6 cm) min. cabinet width~~
- ~~B. 1" (2.5 cm) top of cabinet door bottom of upper cabinet door~~
- ~~C. 19 $\frac{1}{2}$ " (48.9 cm) bottom of cutout to floor is recommended.~~
- ~~D. 25 $\frac{1}{2}$ " (64.6 cm) cutout width~~
- ~~E. 1 $\frac{1}{2}$ " (3.8 cm) min. bottom of cutout to top of cabinet door~~
- ~~F. 41 $\frac{1}{8}$ " (105 cm)* recommended cutout height~~
- ~~G. 24" (60.7 cm) cutout depth~~

~~30" (76.2 cm) models~~

- ~~A. 30" (76.2 cm) min. cabinet width~~
- ~~B. 1" (2.5 cm) top of cabinet door bottom of upper cabinet door~~
- ~~C. 19 $\frac{1}{2}$ " (48.9 cm) bottom of cutout to floor is recommended.~~
- ~~D. 28 $\frac{1}{2}$ " (72.4 cm) cutout width~~
- ~~E. 1 $\frac{1}{2}$ " (3.8 cm) min. bottom of cutout to top of cabinet door~~
- ~~F. 41 $\frac{1}{8}$ " (105 cm)* recommended cutout height~~
- ~~G. 24" (60.7 cm) cutout depth~~

~~* NOTE: The cutout height can be between 41" (104.1 cm) and 41 $\frac{1}{2}$ " (105.6 cm) for microwave/oven combination.~~

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

30 of 39

Electrical Requirements

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:


National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

Electrical Connection

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage, amperage, and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.5 to 7.2 kW at 208 volts) require a separate 40-amp circuit. Models rated at 7.2 kW and below at 240 volts (5.4 kW and below at 208 volts) require a separate 30-amp circuit.

- A circuit breaker is recommended.

- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See the "Make Electrical Connection" section.

- Flexible conduit from the oven should be connected directly to the junction box.

- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.

- A UL Listed or CSA Approved conduit connector must be provided.

- If the house has aluminum wiring, follow the procedure below:

1. Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from: National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575.

For power requirements, refer to the following table.

Voltage	Amperage (L1)*	Amperage (L2)*	Rating (kW)
120/240	30	15	7.2
120/208	26	13	5.4

* L1 includes both the microwave and the oven, and L2 includes only the oven. Amperage values noted above are for information purposes only. The units are rated in watts.

31 of 39

31 of 39



UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

32 of 39

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB WDF30PSY
WDF111PAB WDF320PAD
WDF120PAF WDF330PAP
WDF121PAP WDF330PAP
WDF310PAA WDF330PLY
WDF310PCA WDF330PLY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" P.T. external pipe threads on one end. Do not solder within 8" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended


that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

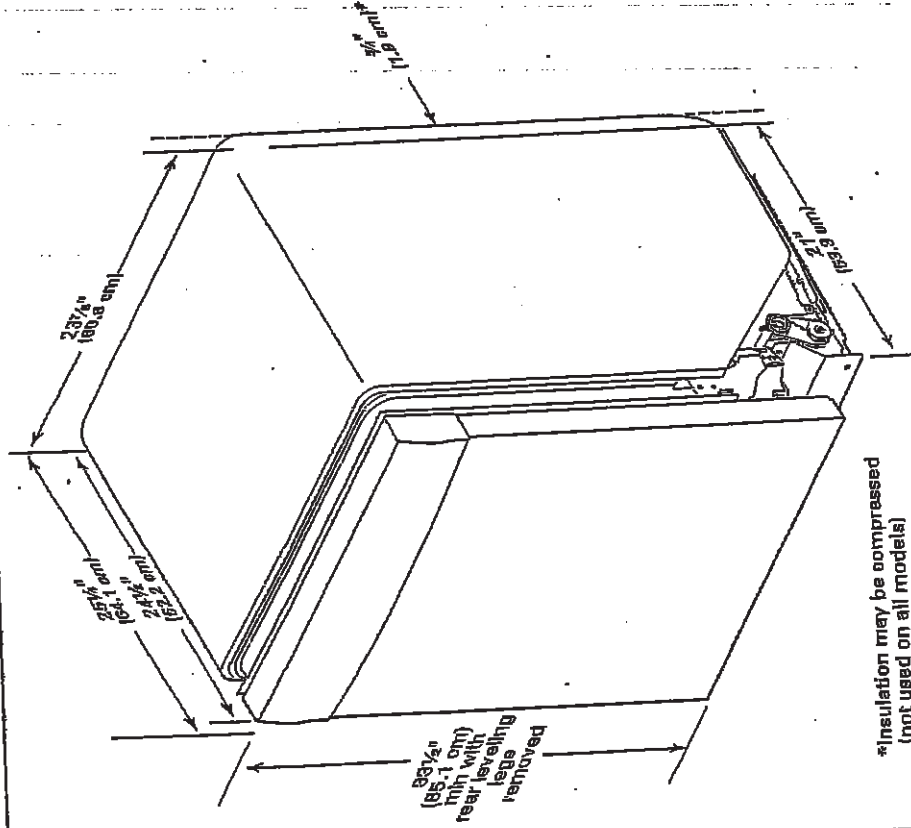

*Insulation may be compressed (not used on all models)

WKS
25

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

33 of 39


CABINET CUTOUT DIMENSIONS

WIDE 320 PPD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

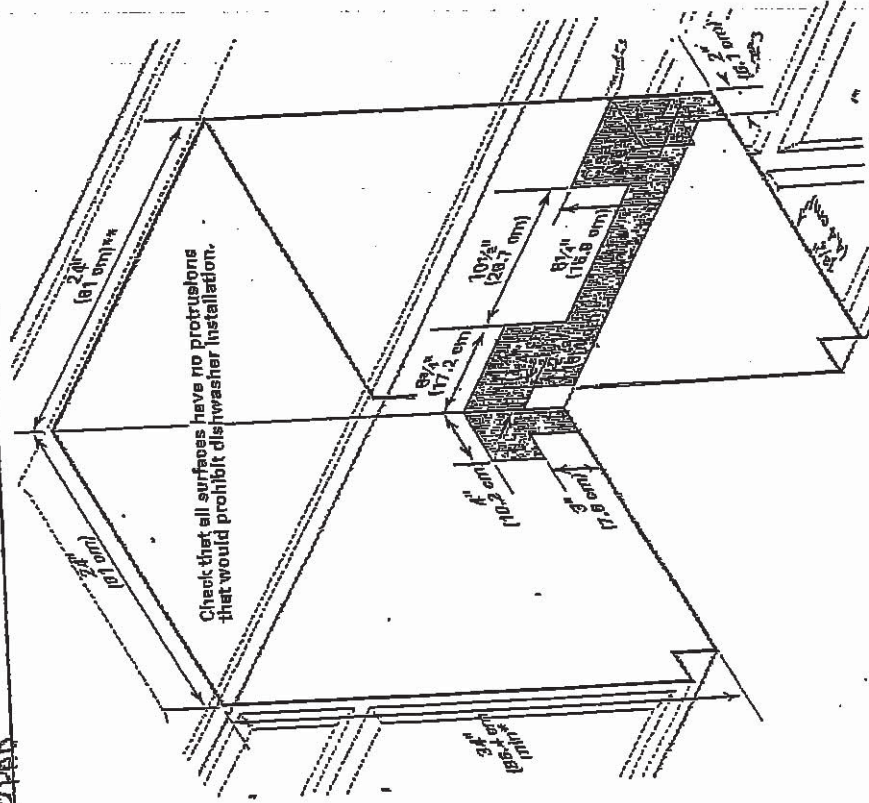


21/5
21/5

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

34 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Ventured | Front Load Washers | WFW5620HW

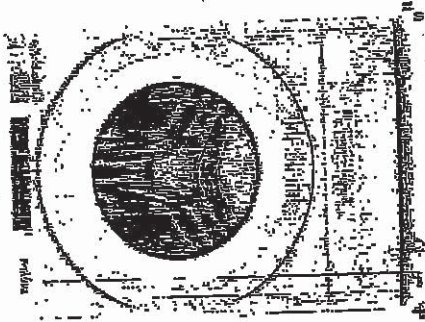

5 1/2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5 1/2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser
Model #: WFW5620HW

Dimensions

Depth	30.17 in; 76.76 cm
Depth With Door Open 90 Degree	143.51 cm; 56-1/2 in
Minimum Height	33.11 cm; 13-5/8 in
Width	33.58 cm; 27.0 in

Appearance

LED Touch Screen	No
Window	Yes

Details

Drum Material	Brushless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

W/C
L/S

UK-75 WALLACETON
 LOT 284B-10
 20-1790 ELEV. B
 THE DUNMORE

35 of 39

WHIRLPOOL WASHER Model #: WFW5620HW




LOCATION REQUIREMENTS

Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
 - A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
 - Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
 - A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
 - Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).
- IMPORTANT:** Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.



Whirlpool Models*

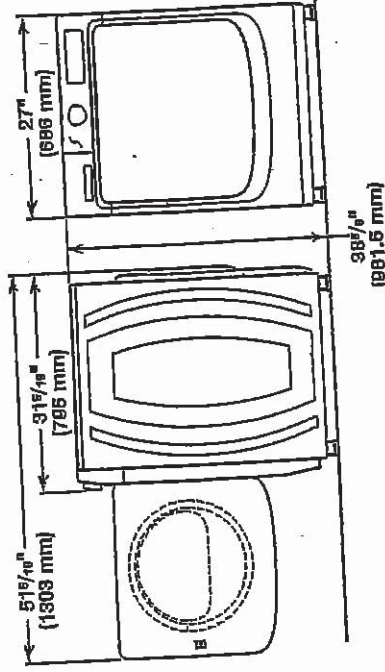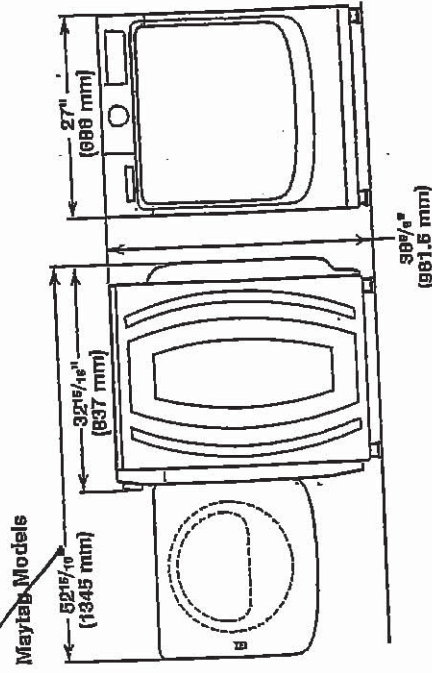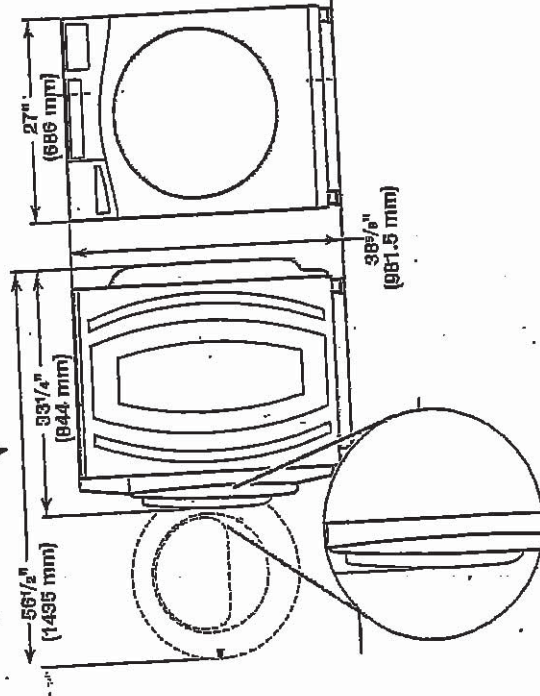

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

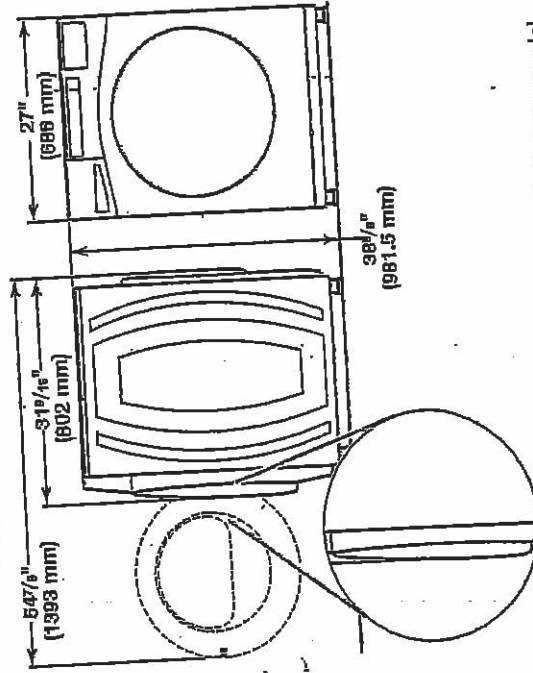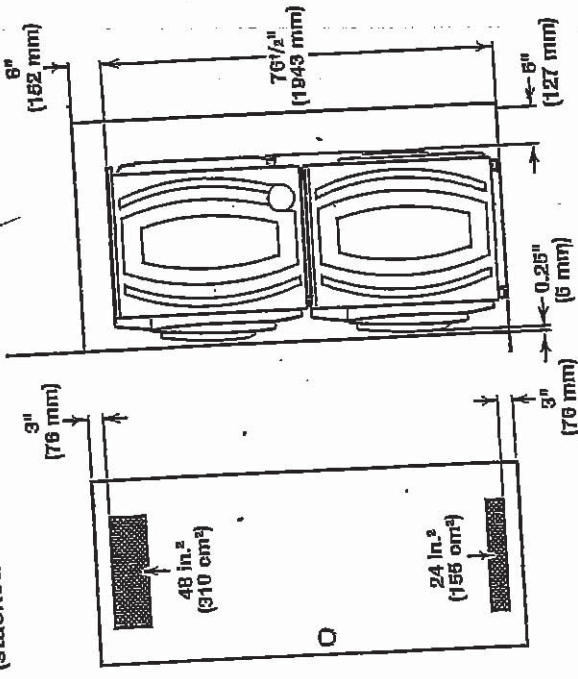

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

2.5

UK-75 WALLACETON

LOT 284B-10


20-1790 ELEV. B

THE DUNMORE


36 of 39

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

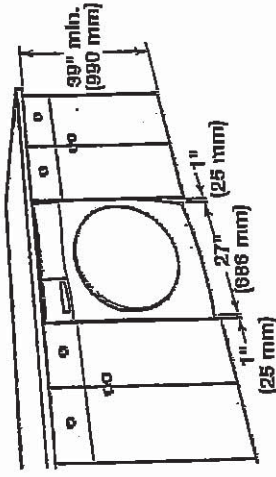

Recessed area or closet installation:

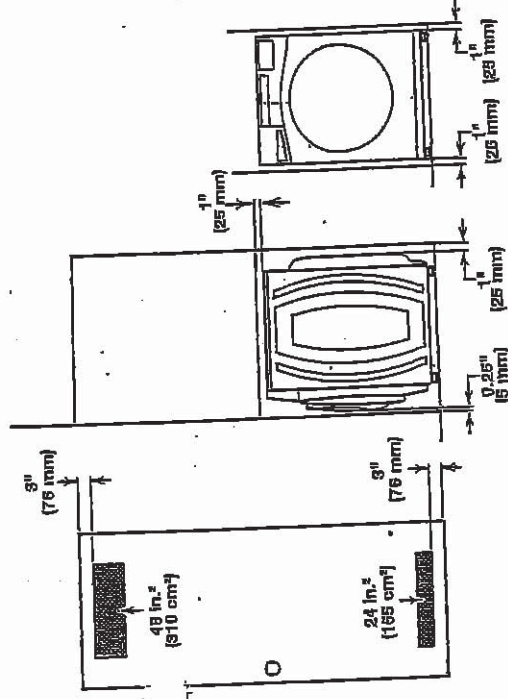

Custom cabinet installation:

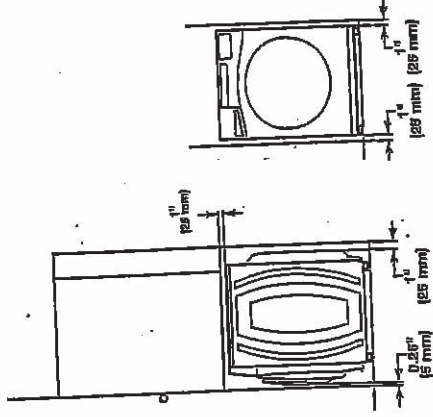


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

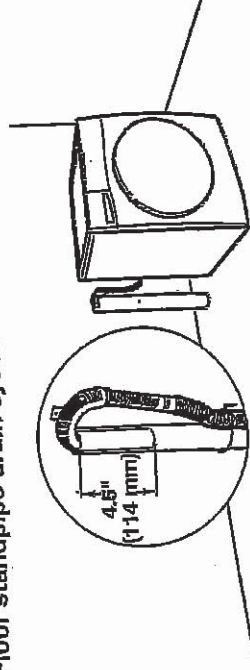


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3963920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

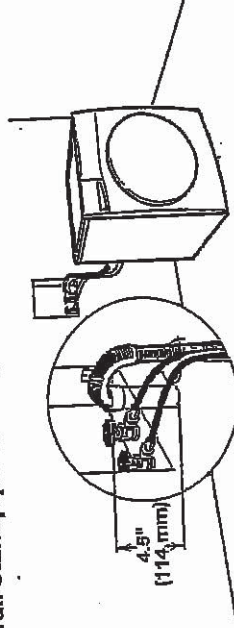

See requirements for floor standpipe drain system.

Laundry tub drain system

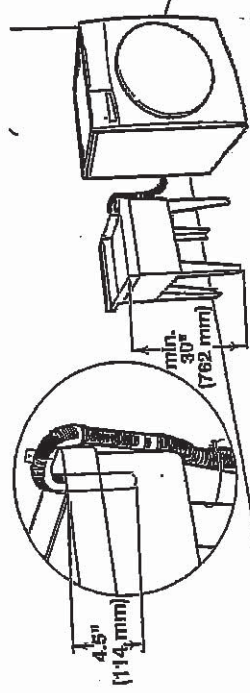

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


25

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

37 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Qualified English | Washer and Dryer | Electric Dryer | YWED5620HW

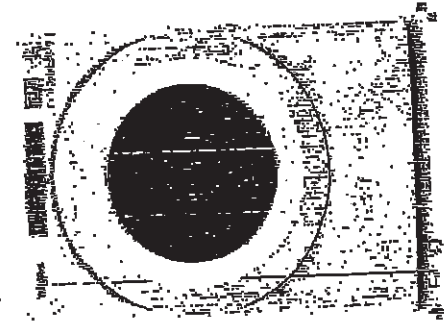

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth

70.74 cm, 27.8 in

Depth With Door Open 80 Degree

130.43 cm, 51.4 in

Height

98.42 cm, 38.8 in

Width

68.58 cm, 27.0 in

Configuration and Overview

Fuel Type

Electric

Cycles and Options

Cycle Time Remaining

Yes

Lint Filter Indicator

No

Number of Drying Cycles

96

Number of Dryness Levels

3

Ventilation System

Long Vent

No

Maximum Vent Length

64

Venting Direction

Left, Right, Bottom, Rear

Exhaust

Yes

Power Cord Included


W/C
2.5

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

38 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

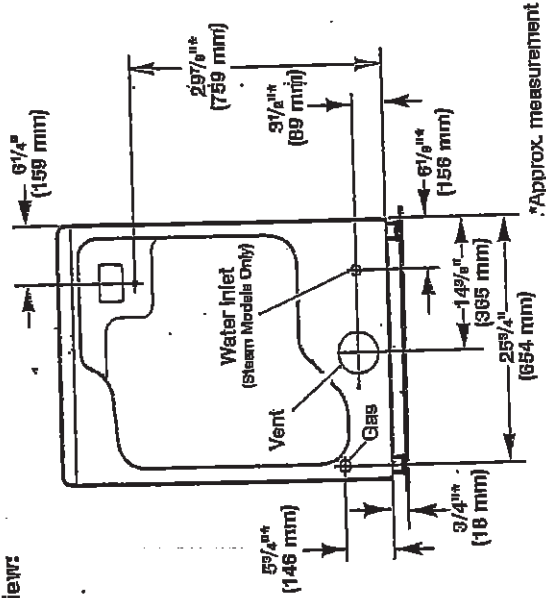

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow.
*See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

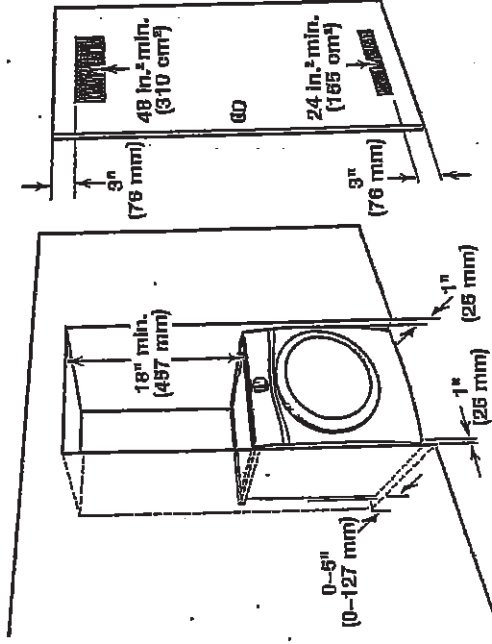

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kniked.

Custom under-counter installation:

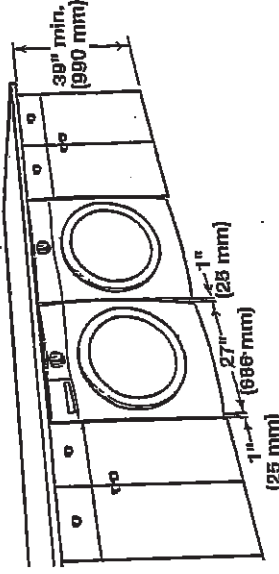

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 348764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

2.5

UK-75 WALLACETON
LOT 284B-10
20-1790 ELEV. B
THE DUNMORE

39 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view

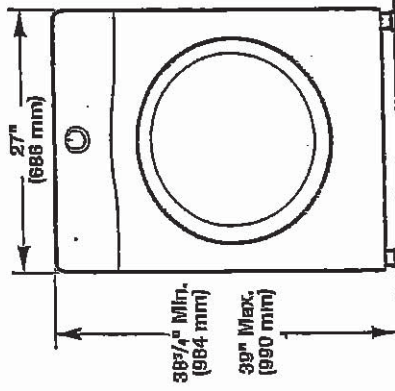


Side view

Whirlpool Models

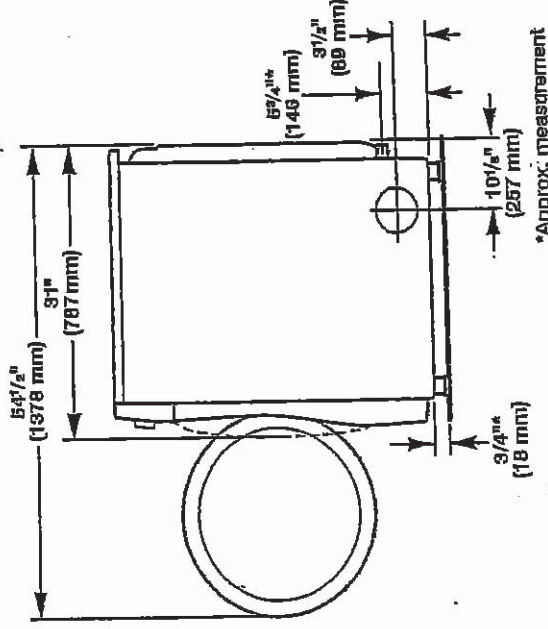

Maytag Models

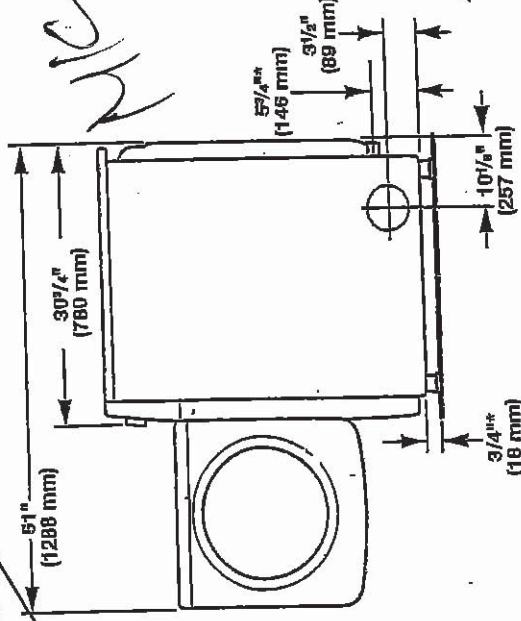

*Approx. measurement.

2.5