


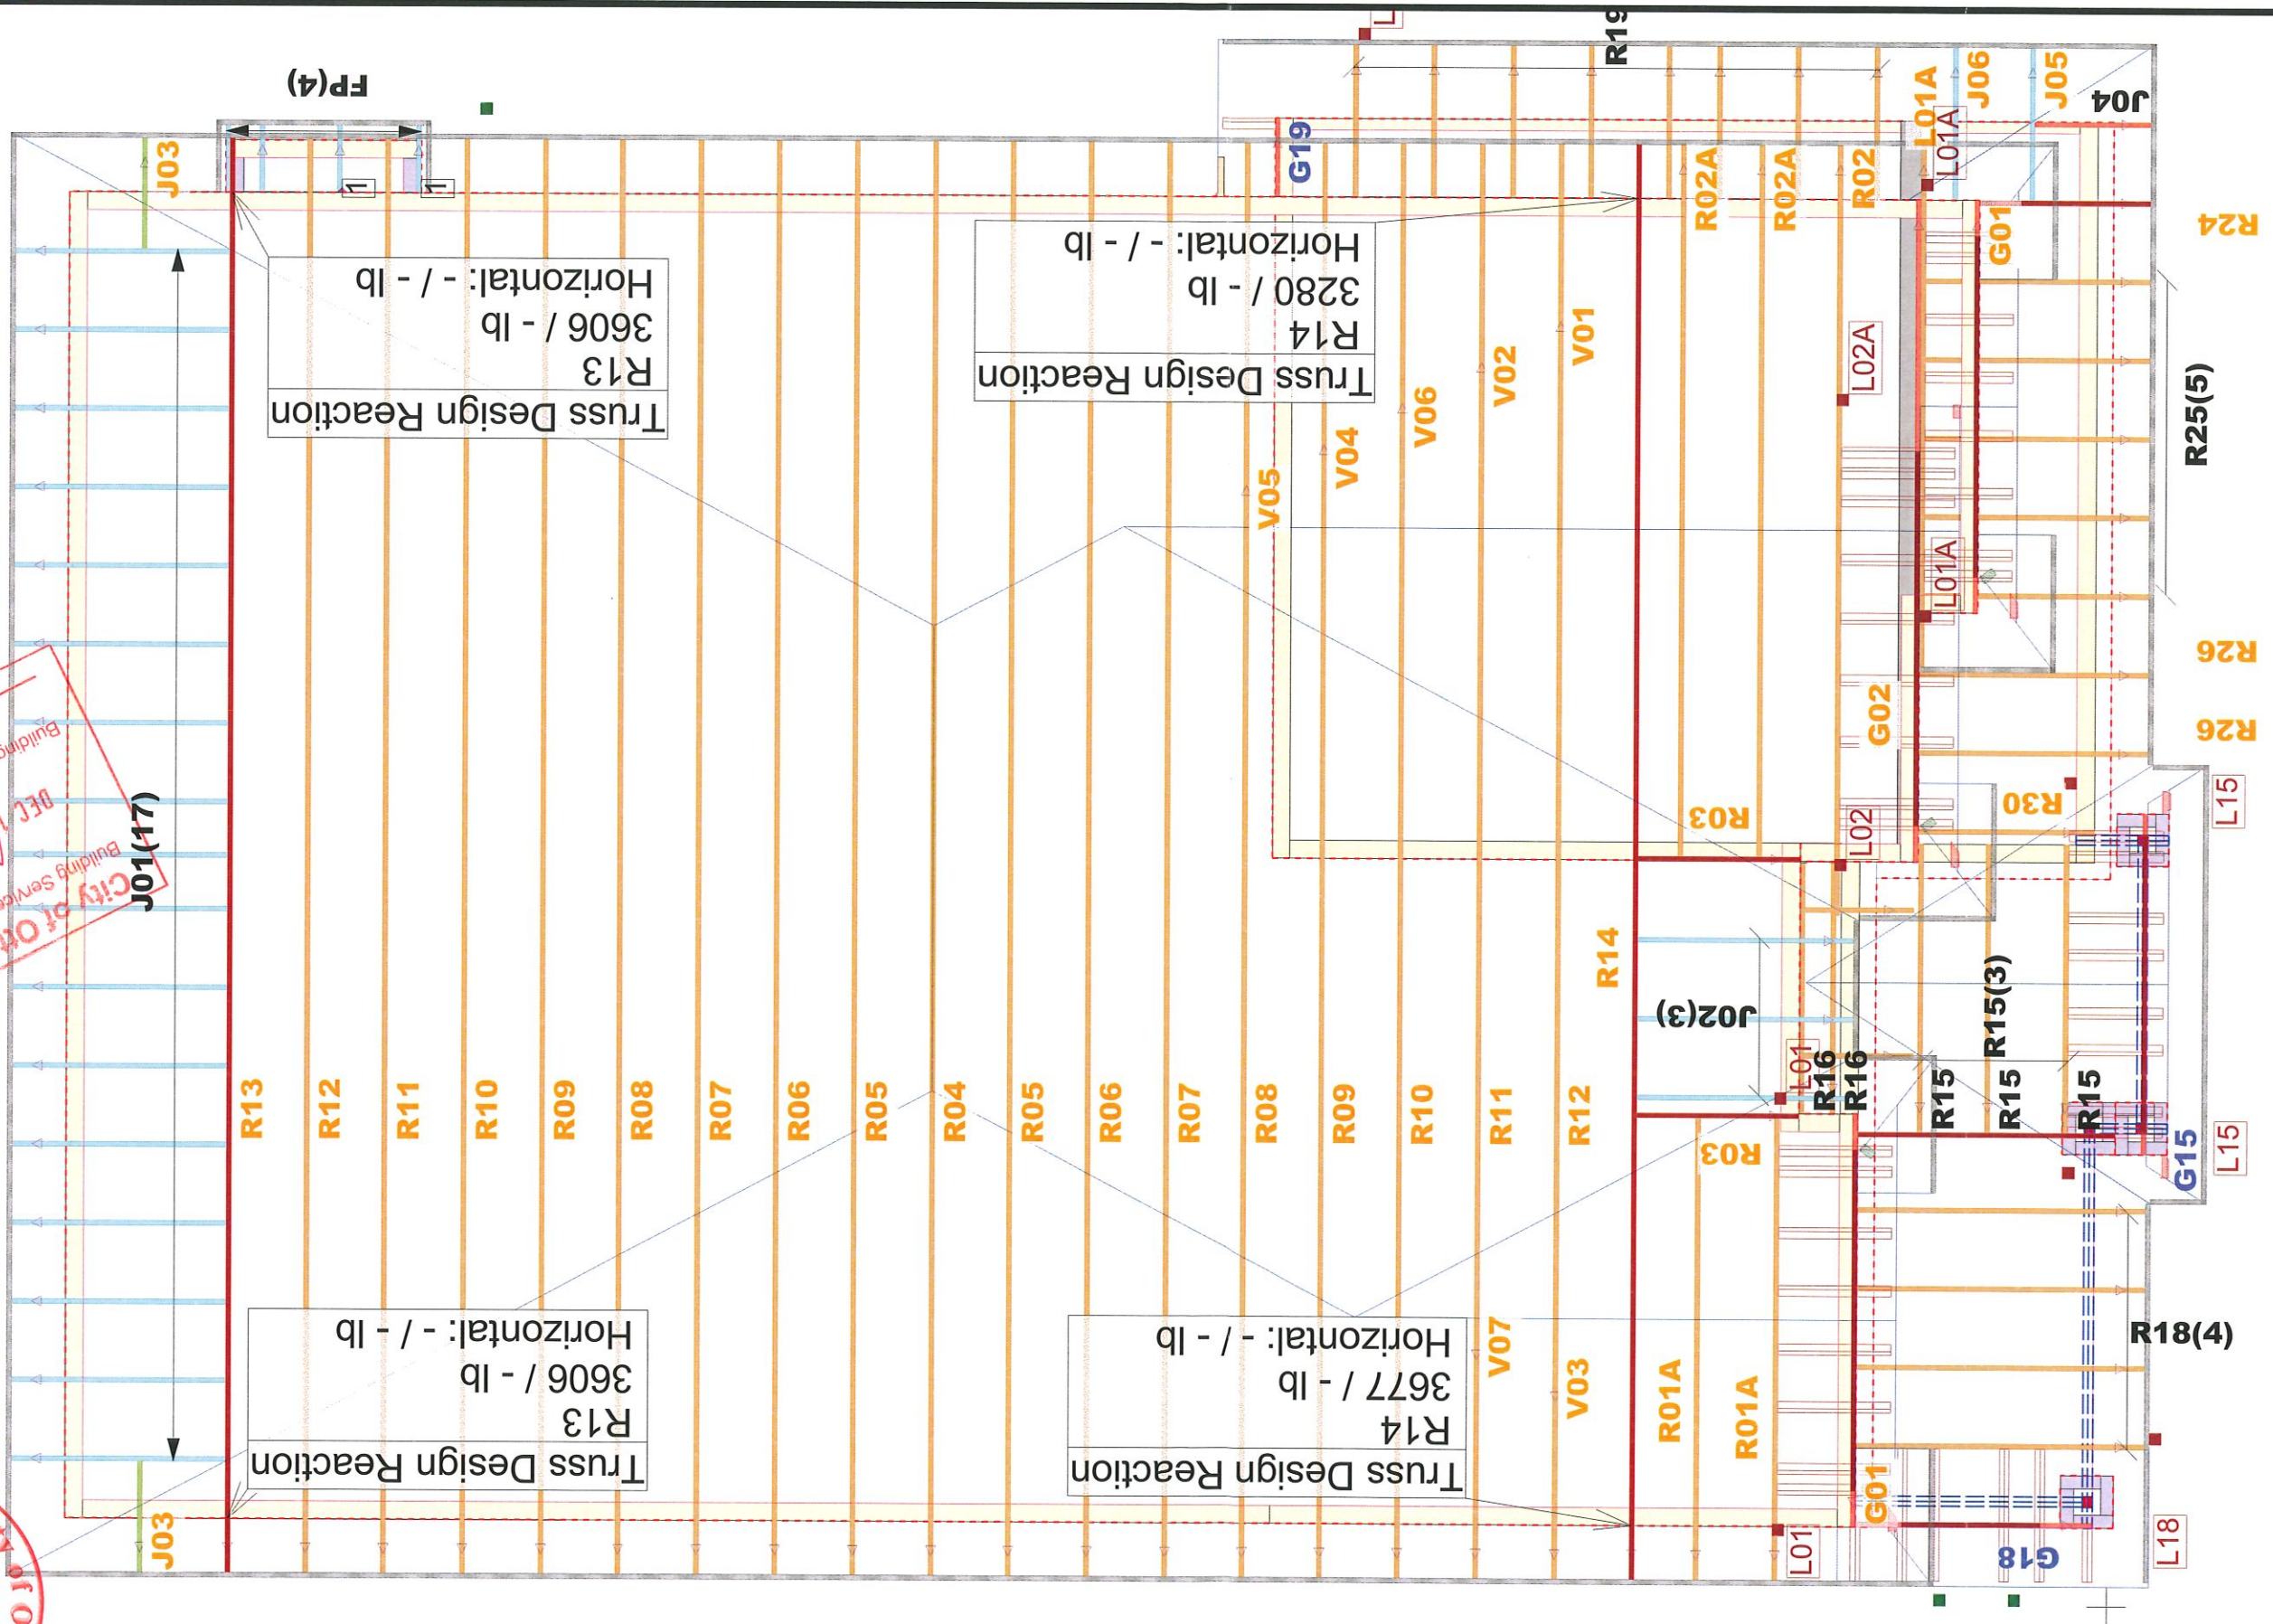

Truss Design Reaction
R13
3606 / - lb
Horizontal: - / - lb

Truss Design Reaction
R14
3677 / - lb
Horizontal: - / - lb

Truss Design Reaction
R14
3280 / - lb
Horizontal: - / - lb

Truss Design Reaction
R13
3606 / - lb
Horizontal: - / - lb

TYPICAL OTTAWA DESIGN LOADS

Member	Load Type	PT 9	PT 4
Top Chord	Snow	37.1	50
	Dead	5	5-10
	Live	0	10
Bot Chord	Dead	7	7
	Live	0	10

TYPICAL SPACING = 24.0 IN C/C

THIS DESIGN COMPLIES WITH:

- PART 4 OR 9 OF OBC 2012 Reg. 332/12 (2019 Amendment)
- CSA 086-09
- CCMC ACCEPTANCE 11996-L, 0319-L, 13270-L
- TPIC 2014 (REFER TO INDIVIDUAL TRUSS DRAWINGS FOR SPECIFIC LOADS & SPACING)

HURRICANE AND SEISMIC TIES:

- ANY TIES SPECIFIED ON THIS LAYOUT FOR UPLIFT OR SEISMIC CONNECTIONS MUST BE REVIEWED AND APPROVED BY THE BUILDING DESIGNER/ENGINEER, AS STATED IN THE TPIC 2014. THE TRANSFER OF THESE LOADS TO THE ENTIRE STRUCTURE BELOW HAS NOT BEEN ANALYZED.

JOB:
PHOENIX HOMES
MADISON "C"
PMADC-4



DATE: 09/11/2020