

PRE-Sales Selection Sheet
Checklist

1 of 37

LOT 285B-11 Model: 20-1606 B The Grassfield
PURCHASERS: PRADEEP, KUMAR VALLURU/
VENDOR: Heathwood Homes (Huron) Limited

- ☒ FINISHED BASEMENT
- ☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
- ☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☐ MAIN FLOOR
- ☐ SECOND FLOOR
- ☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☐ 200 AMP SERVICE
- ☐ WET BAR ROUGH-IN
- ☐ HUMIDIFIER
- ☒ AIR CONDITIONING

GAS ROUGH-IN

- ☒ STOVE
- ☐ DRYER
- ☐ BBQ
- ☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT
- ☐ 7 IN ROUND DUCT

FULL BASEMENT STAIRS:

UPPER BASEMENT STAIRS:

LOWER BASEMENT STAIRS:

MAIN STAIRS:

MEDIA STAIRS (if applicable):

LOFT STAIRS (if applicable):

N/A
All Oak
Carpet Grade
All Oak
N/A
N/A

Nov 13/20	Signature	Nov 13/20	IRIT SALEM
Date	Purchased: on file	Date	Decor Consultant:
		APPROVED -	
		-11- 16 2020	myLoren
Date	Purchaser:	Date	Heathwood Homes (Huron) Limited
Locked Date:		Approved	



Sales Selection Sheet

Wallaceton

PURCHASER: PRADEEP, KUMAR VALLURU

2 of 37

TEL:

LOT / UNIT 285B-11	PHASE 2	MODEL 20-1606 B The Grassfield
-----------------------	------------	-----------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

ADMIN FEE

1	- SCHEDULE "E" FIVE APPLIANCES : SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER/DRYER-TOWNHOMES	Qty: 1
47,007	Note: SPECS PAGES 24-37	
2	- TWO THOUSAND DOLLARS (\$2,000.00) AT DECOR (NO CASH VALUE) -TOWNHOMES	Qty: 1
47,008	Note:	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
Paid By	Amount
Total Payment:	

PURCHASER:

Signature on file
PRADEEP, KUMAR VALLURU

16-Nov-20

DATE

IRIT SALEM

16-Nov-20

DATE

Decor Consultant

APPROVED

-11- 16 2020

mloren

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 628-1

Slnoice.rpt 28may19

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

3 of 37

Kitchen

Cabinet Colour/Style

9120 VIKING III-GEORGIAN-ORCHID 3DL ***STD***

Countertop

9069 MSI Quartz GROUP 1 ICED WHITE ***STD***

Countertop Edge

4010 SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***



Cabinet Hardware

7667 12881-HARDWARE ***STD***

Island Cabinet Colour/Style

9120 VIKING III-GEORGIAN-ORCHID 3DL ***STD***

Island Countertop

9069 MSI Quartz GROUP 1 ICED WHITE ***STD***

Backsplash

1111 N/A *****

Backsplash Grout

1111 N/A *****

Backsplash Tile Pattern

1111 N/A *****

Q

HoodFan

9117 SCB50030-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS

PAGES 22-23

Appliance

9117 Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.

Appliance

9117 Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.

Appliance

9117 Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after

Comment

Kitchen/Breakfast

Flooring

9117 GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout

2225 Grout-(27) Silver ***STD***

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Customer Colours

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

4 of 37

Comment

Foyer

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Laundry Room

Flooring

5480

GE.CM.SIL.1313-Corte Milia-Silver-13 x 13 ***STD***

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Mud Room

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

8

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

5 of 37

Powder Room

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Plumbing Fixture (Colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Hall

Flooring

1737

GE.BY.AZR.1313 New Byzantine Azzuro 13

Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Great Room

Flooring

9063

White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch ***2***

Comment

Upper Hall

Flooring

9251

DY 88664-Dynasty Tex-MORNING LIGHT-40 oz
Poly***STD***

Comment

8

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

6 of 37

Finished Basement (Rec) Room/Hall

Flooring	9251	DY 88664-Dynasty Tex-MORNING LIGHT-40 oz Poly***STD***
Comment		

Master Bedroom

Flooring	9251	DY 88664-Dynasty Tex-MORNING LIGHT-40 oz Poly***STD***
Comment		

Bedroom 2

Flooring	9251	DY 88664-Dynasty Tex-MORNING LIGHT-40 oz Poly***STD***
Comment		

Bedroom 3

Flooring	9251	DY 88664-Dynasty Tex-MORNING LIGHT-40 oz Poly***STD***
Comment		

Master Ensuite

Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Floor Tile	8261	TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile Line Pattern on Sketch 3 Page 17 ***STD***
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

7 of 37

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Shower Floor Tile

8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
White Matte-2 x 2 ***STD***

Shower Floor Tile Grout

2226 Grout-(00) White ***STD***

Shower Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

Shower Wall Tile

8257 TR.ST.BYZ.0810-Serpentine-Beyaz/White-8 x 10
STD

Shower Wall Tile Grout

2226 Grout-(00) White ***STD***

Shower Wall Tile Pattern

3090 VERTICAL STACKED ***STD***

Shower Jamb(s) and Sill(s)

8923 Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (colour)

1737 Plumbing Fixtures-WHITE ***STD***

Comment

Main Bathroom

Cabinet Colour/Style

8376 Viking III-MANCHESTER-OREGANO-MAPLE ***STD***

Countertop

8818 1877K-52-Countertop-AUTUMN CARNIVAL-Wilsonart
STD

Countertop Edge

1111 N/A *****

Cabinet Hardware

2093 9671-HARDWARE ***STD***

Flooring

8263 TR.ST.KRM.1313-Serpentine-Krem/Cream-13x13 See Tile
Line Pattern on Sketch 3 Page 17 ***STD***

Floor Tile Grout

2224 Grout-(44) Pale Umber ***STD***

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

2

Customer Colours

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

8 of 37

Wall Tile	8259	TR.ST.KRM.0810-Serpentine-Krem/Cream-8 x 10 ***STD***												
Wall Tile Grout	2224	Grout-(44) Pale Umber ***UPG***												
Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD*** <table border="1"><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***												
Comment														

Finished Basement Bathroom

Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2093	9671-HARDWARE ***STD***
Flooring	5490	GE.LR.GRY.1313-La Riserva-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	5426	GE.LR.GRY.0810-La Riserva-Grey-8 inch x 10 inch ***STD***

Handwritten signature

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

9 of 37

Shower Wall Tile Grout	2226	Grout-(00) White ***STD***								
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD*** <table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>								
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***								
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***								
Comment										

Great Room Fireplace

Type	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PAGE 18
Surround Opt.	1111	N/A *****
Note	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Note	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.

Comment

Basement Stairs

Type	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7938	Gotham STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	7762	Carpet Grade-Stain handrail, stringers, nosing_post(s). (Me
Carpet	9251	DY 88664-Dynasty Tex-MORNING LIGHT-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****

Comment

2

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallacaton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

Of 37

Basement Stairs Landings (Upper and Lower)

Flooring 9063 White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch ***5***

Comment

Main Stairs

Type 1712 Oak Stairs ***STD MAIN STAIRS***

Colour 7938 Gotham STAIN TO COMPLIMENT HARDWOOD AND
WILL VARY FROM FLOORING ***99***

Carpet Runner 1111 N/A *****

Handrail/Pickets/Posts Type 8148 Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap
Post(s)-BLACK ***2***

Handrail/Pickets/Posts Colour 7761 Oak Grade-Stain handrail, stringers, treads, risers, nosing post

Custom Stain/Paint 1111 N/A *****

Comment

Main Stairs Landing(s)

Flooring 9063 White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch ***2***

Comment

Throughout

Walls - Paint Colour 1717 22-Wall-WARM GREY ***STD***

Underpad 1079 500 Series-Underpad ***STD***

Thresholds 2232 Metal Thresholds ***STD***

Switches and Plug 5796 Decora White Switches and Plugs ***STD***

Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***

Trim Baseboard 1717 22-Wall-WARM GREY ***STD***

Customer Colours

244

PRADEEP, KUMAR VALLURU/
Project: Wallaceton
Unit: 285B-11, Phase: 2
Model: 20-1606 B The Grassfield

Created: 11/9/2020 15:20:56

Locked:

Closed:

Trim - Paint Colour

11/16

Trim-WHITE

STD

Comment

Purchaser:

PRADEEP, KUMAR VALLURU

Date

Decor Consultant

Date

- APPROVED -

-11- 16 2020

Purchaser:

Date

Wallaceton

Date Approved



Sales Selection Sheet

Wallaceton

12 of 37

PURCHASER: PRADEEP, KUMAR VALLURU

TEL:

LOT / UNIT	PHASE	MODEL
285B-11	2	20-1606 B The Grassfield

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

ADMIN FEE

1	- PROMO	Qty: (1)
46,978	Note:	

APPLIANCES

2	- SCB50030 WALLMAOUNT HOOD FAN	Qty: 1
46,953	Note: WALLMAOUNT HOOD FAN SS SPEC PAGES 22-23	

CERAMICS

3	- CERAMICS - TUB WALL GROUT - MAIN BATHROOM - GROUT	Qty: 1
176,778		
46,975	Note:	

ELECTRICAL

4	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)	Qty: 2
189,45C		
46,946	Note: GREAT TOOM-TO BE INSTALL IN THE CENTRE OF THE ROOM-USE EXISTING SWITCH PLUG KITCHEN- TO BE INSTALL ABOVE THE BREAKFAST BAR SEE SKETCH # 2 PAGE # 16	
5	- ELECTRICAL - ADDITIONAL SWITCH	Qty: 1
189,451		
46,947	Note: KITCHEN TO BE USE FOR THE R/I CAP LIGHT SKETCH # 2 Page 16	
6	- ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)	Qty: 1
189,449		
46,950	Note: GREAT ROOM TO BE INSTALLED ABOVE THE FIRE PLACE 70" FROM FLOOR SEE SKETCH# 2 PAGE# 16	

HARDWOOD

7	- HARDWOOD - VINTAGE - 5" WHITE OAK SCULPTED - LANDING(S) TO 2ND FLOOR - UPGRADE 4	Qty: 1
177,011		
46,957	Note:	
8	- HARDWOOD - VINTAGE - 5" WHITE OAK SCULPTED - LANDING(S) TO BSMT - UPGRADE 4	Qty: 1
177,007		
46,958	Note:	

TAX#:1

PREPARED BY: Init Salem

PE 624-1

SlInvoice.rpt 28may19

Initials:



Sales Selection Sheet

Wallaceton

13 of 37

PURCHASER: PRADEEP, KUMAR VALLURU

TEL:

LOT / UNIT	PHASE	MODEL
285B-11	2	20-1606 B The Grassfield

HARDWOOD

9	- HARDWOOD - VINTAGE - 5" WHITE OAK SCULPTED - GREAT ROOM - UPGRADE 4	Qty: 1
177,003		
46,959	Note:	

HEATING / AIR

10	- HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED	Qty: 1
189,474		
46,948	Note: FOR FUTURE USE	

INTERIOR RAILINGS

11	- INTERIOR RAILING - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2" SQUARE/CAP POST(S) AS PER PLAN - THOUGHOUT - UPGRADE 2	Qty: 1
177,036		
46,979	Note:	

STRUCTURED WIRING

*12	- STRUCTURED WIRING - RELOCATION OF CABLE	Qty: 1
189,775		
46,949	Note: BASEMENT FAMILY ROOM SEE SKETCH # 1 PAGE# 15	
13	- STRUCTURED WIRING - HDMI TO ABOVE FIREPLACE ROUGH-IN	Qty: 1
189,785		
46,976	Note: GREAT ROOM FROM ABOVE THE FIRE PLACE 70" FROM FLOOR TO STD. PHONE LOCATION SEE SKETCH # 2 PAGE# 15	
*14	- STRUCTURED WIRING - RELOCATION OF CABLE	Qty: 1
189,775		
46,977	Note: RELOCATE STD. CABLE TO BE ABOVE THE FIRE PLACE 70" FROM FLOOR SEE SKETCH # 2 PAGE# 15	

Sub Total
HST
Total

TAX#:1

PREPARED BY: Irit Salem

PE 624-2

Invoice rpt 26may19

Initials:



Sales Selection Sheet

Wallaceton

14 of 37

PURCHASER: PRADEEP, KUMAR VALLURU

TEL:

LOT / UNIT	PHASE	MODEL
285B-11	2	20-1606 B The Grassfield


1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
Paid By	Amount
Total Payment:	

PURCHASER:


PRADEEP KUMAR VALLURU

13-Nov-20
DATE

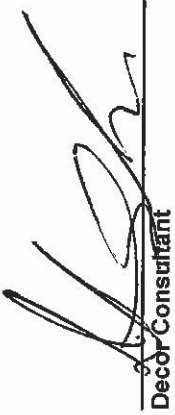
Decor Consultant

13-Nov-20
DATE

APPROVED



11-16-2020

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 624-3

Invoice.rpt 29may19

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

150F37


THE GRASSFIELD

ELEVATION B | 1,986 SQ. FT.
Includes 380 square feet of finished lower level

20-1606 ELEV. B

Sketch #1

WALLACETON
EST. 1870

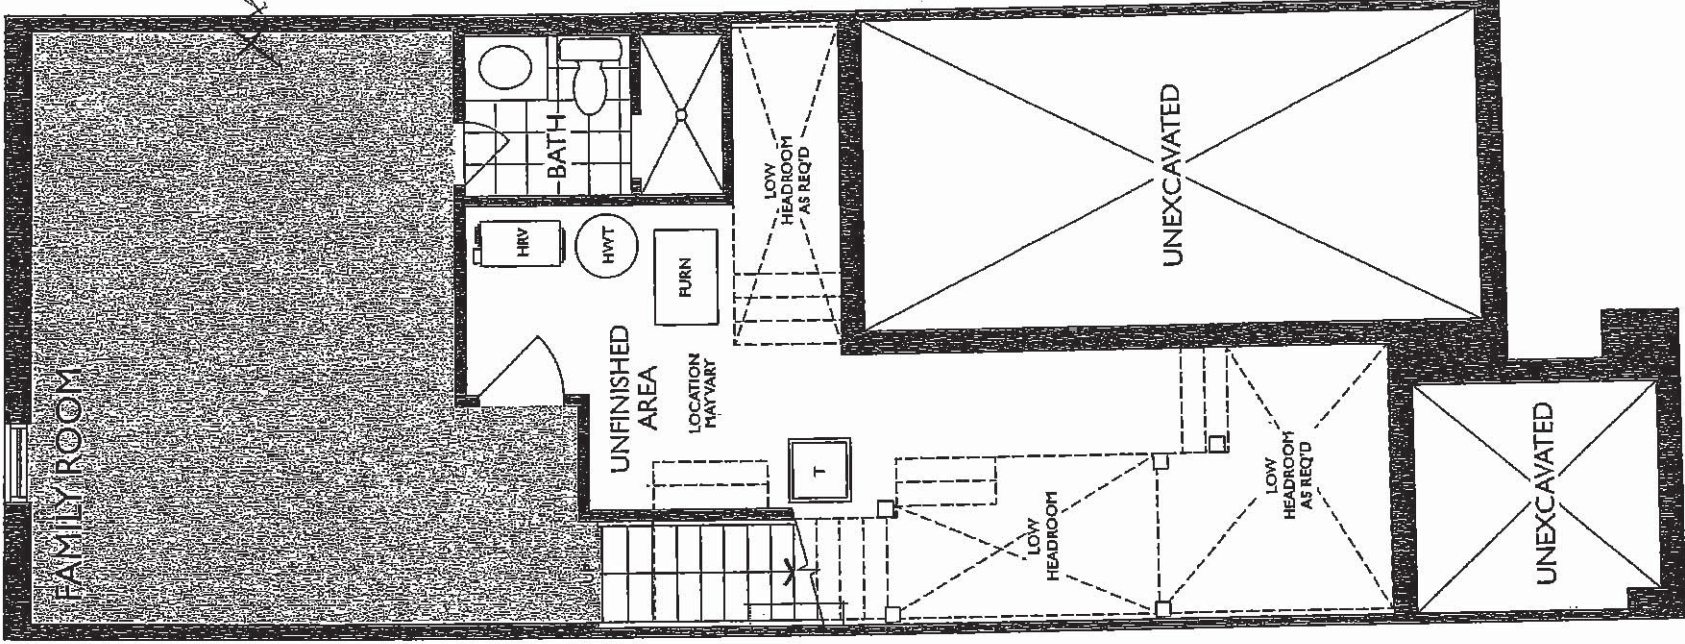

LOWER LEVEL
ELEVATION B

UK - 75 WALLACETON
LOT 282b-12
20-1606 ELEV B
THE GRASSFIELD

16 of 37

THE GRASSFIELD

ELEVATION B | 1,886 SQ. FT.


Includes 380 square feet of finished lower level

20-1606 ELEV. B

Sketch #2

WALLACETON

HST. 1870

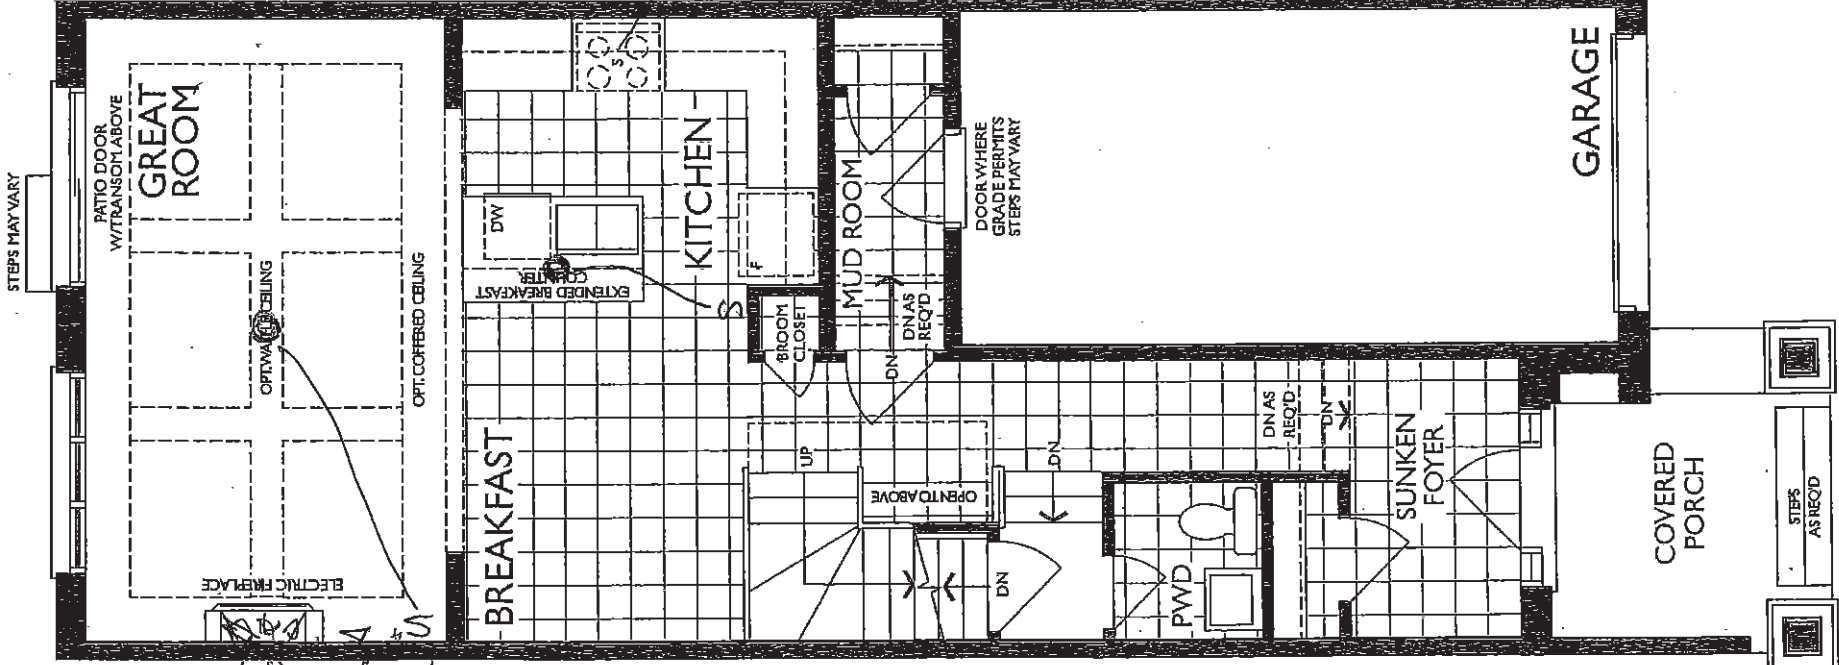

ELECTRIC
RELOCATE
CABLES R46
H.D.M.D.
70"4/- FROM
FLOOR ABOVE
FIREPLACE

R/I
CAP LIGHT
ON EXISTING
SWITCHED PLUG

R/I CAP
LIGHT ON
SEPARATE SWITCH
R/I GAS LINE

Ø

MAIN FLOOR
ELEVATION B

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

17 of 37

THE GRASSFIELD

ELEVATION B | 1,986 SQ. FT.


Includes 380 square feet of finished lower level

20-1606 ELEV. B

Sketch #3

WALLACETON


EST. 1870

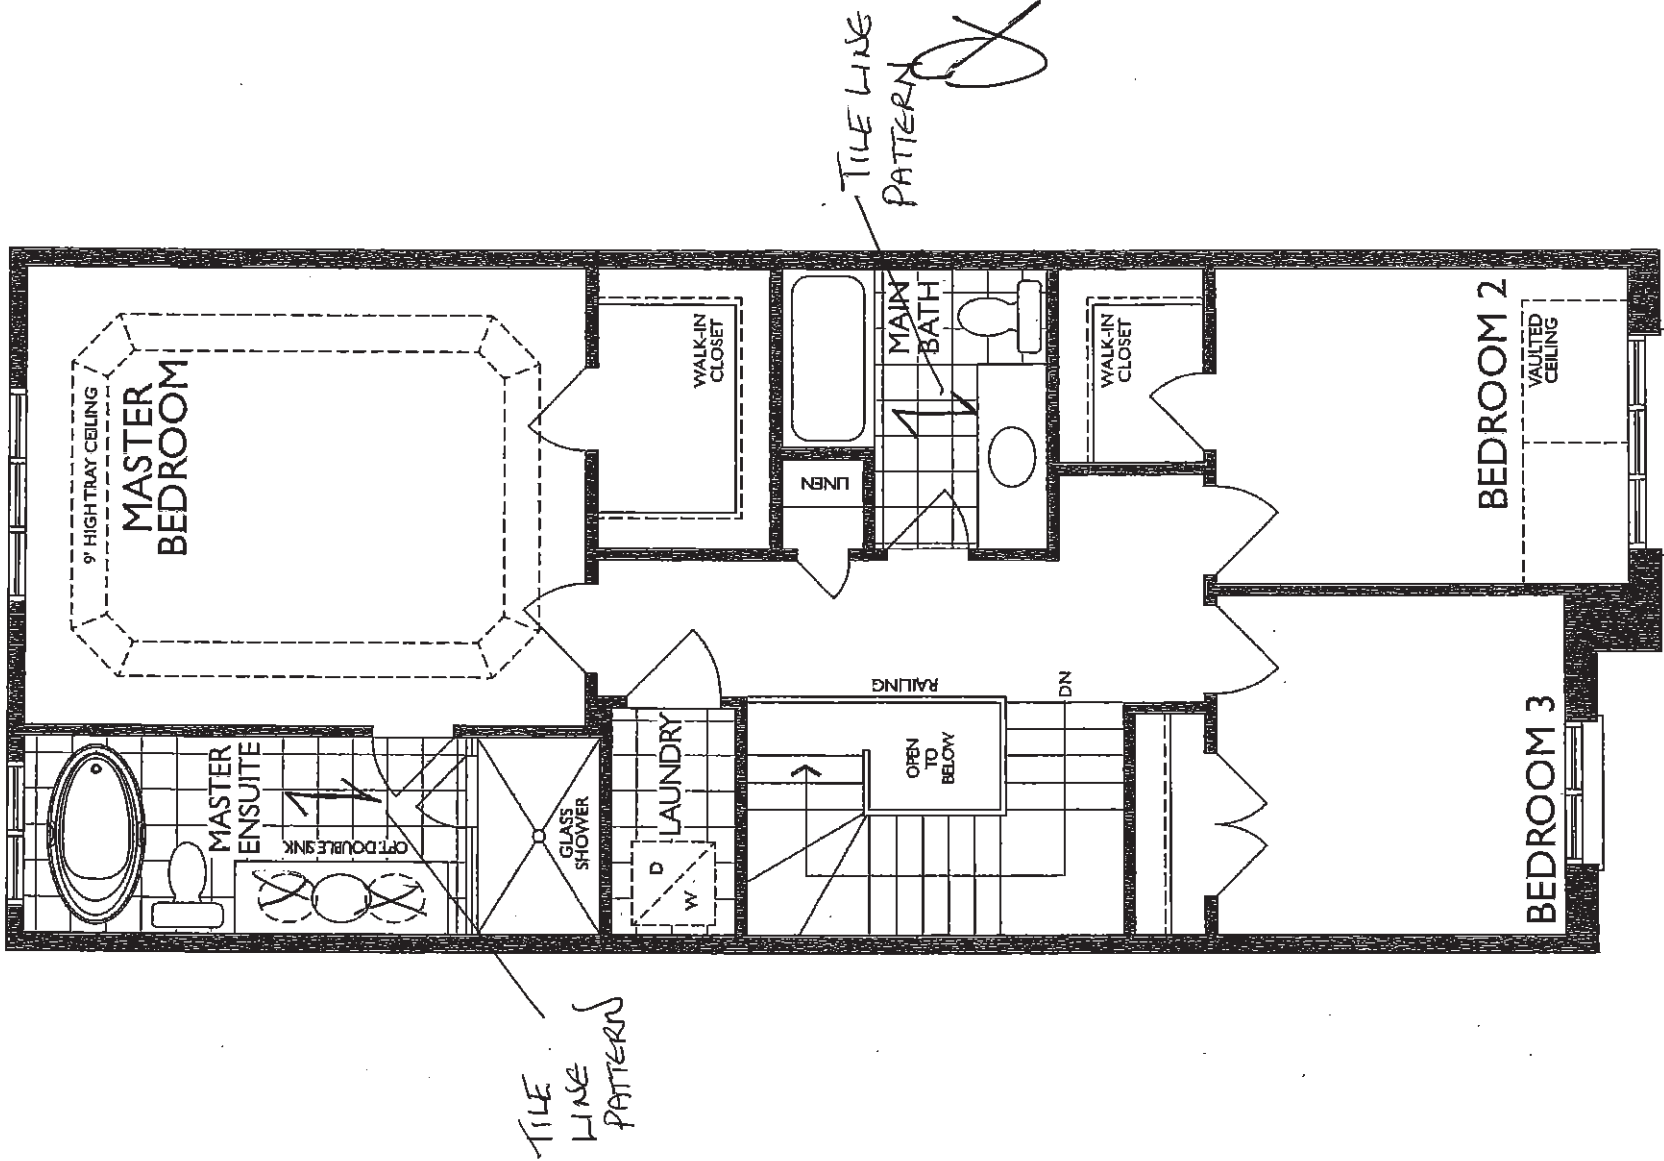

SECOND FLOOR
ELEVATION B

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

18 of 37

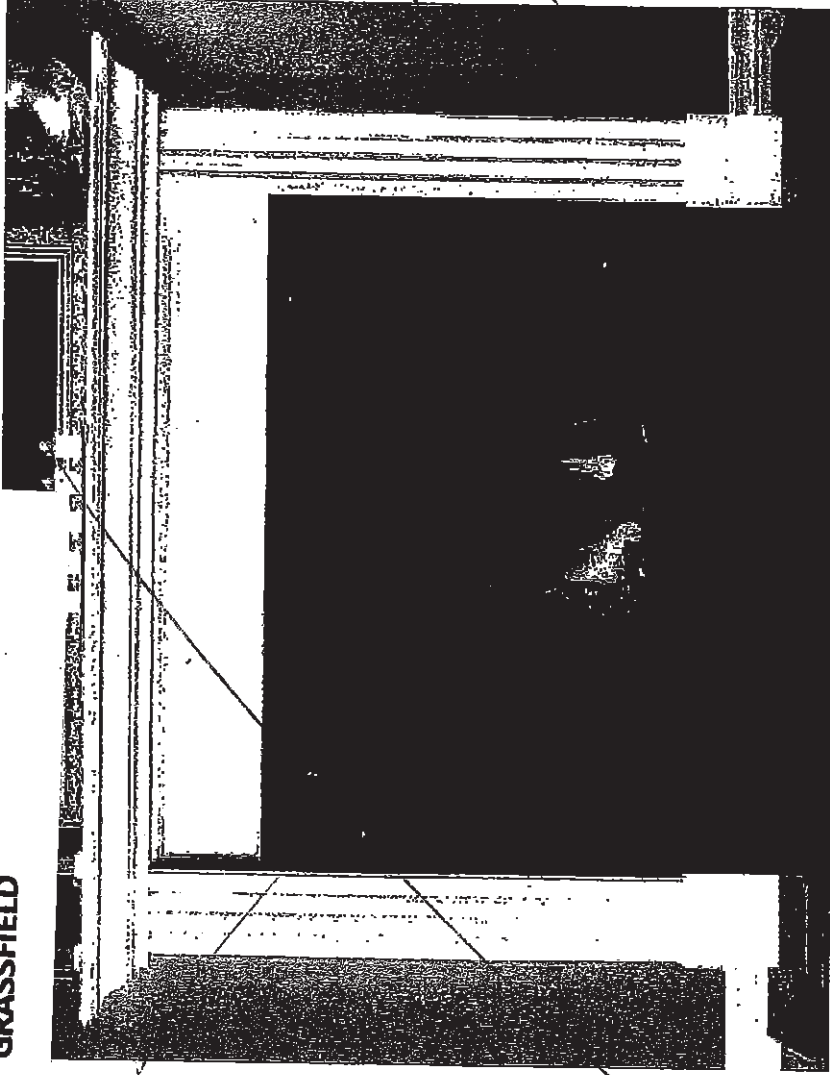


STANDARD NF 15 Mantel X

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

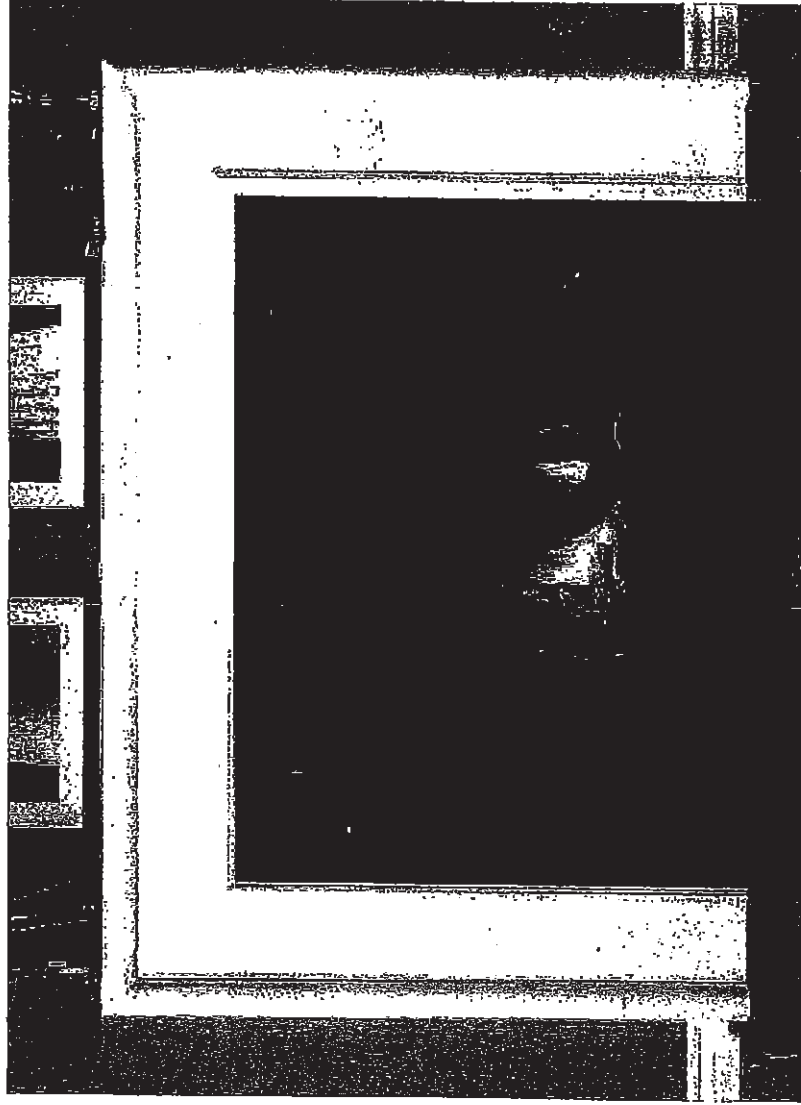

'CABINET'

STANDARD NF 17 Mantel ✓

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)


UK - 75 WALLACETON
LOT 282B-11
20-1606 ELEV B
THE GRASSFIELD

19 of 37

Regina

STANDARD KITCHEN SINK

ND1831UA/9

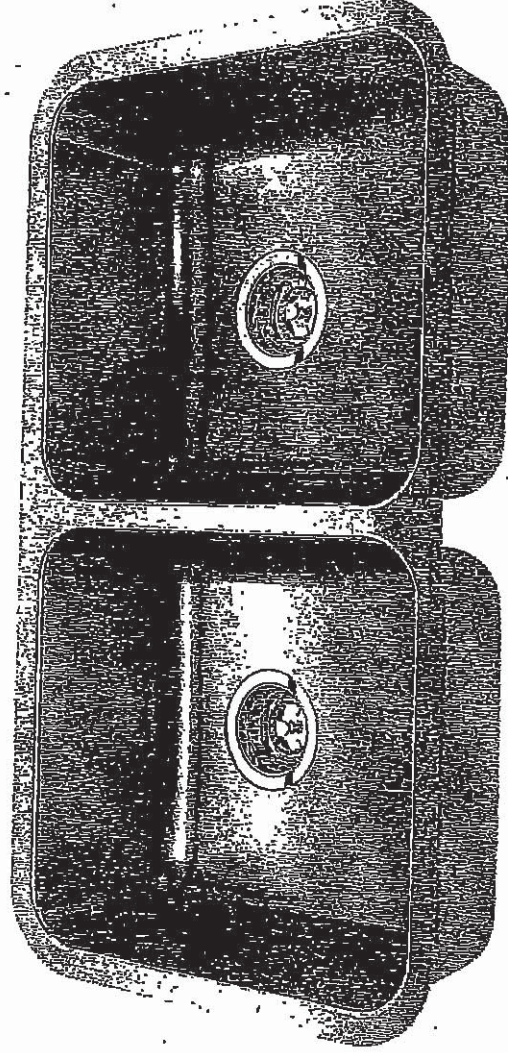

Optional Accessories



BG10S



BG10S



MB100





CATW



DBR10S

Q

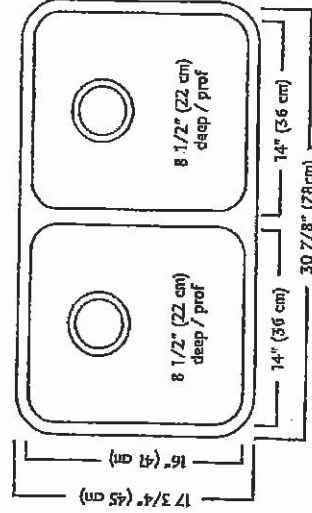

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD


20 of 37

Q

STANDARD KITCHEN FAUCET

Align

Modern

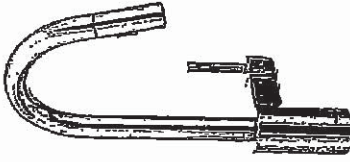

Single Handle Pull-Down Kitchen
Faucet


Model 7565+

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV B
THE GRASSFIELD

21 of 37

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP+
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+


FREESTANDING TUB FAUCETS

UK - 75 WALLACETON
LOT 282B-11
20-1606 ELEV B
THE GRASSFIELD

22 of 37

SC(B)500 | ALITO Collection

Cyclone®
Breathe Better

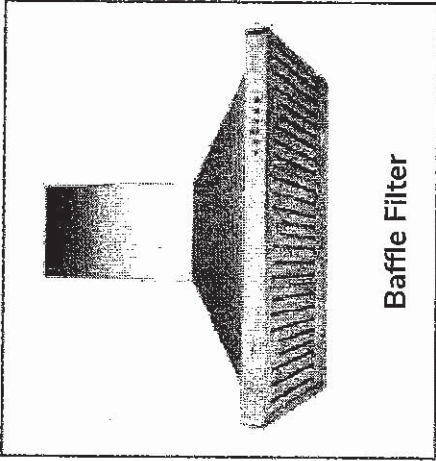

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with time-delay OFF feature up to nine minutes, 550 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel




Dishwasher
Safe Filters



Long-Lasting
LED Light



Time-Delay
OFF Feature

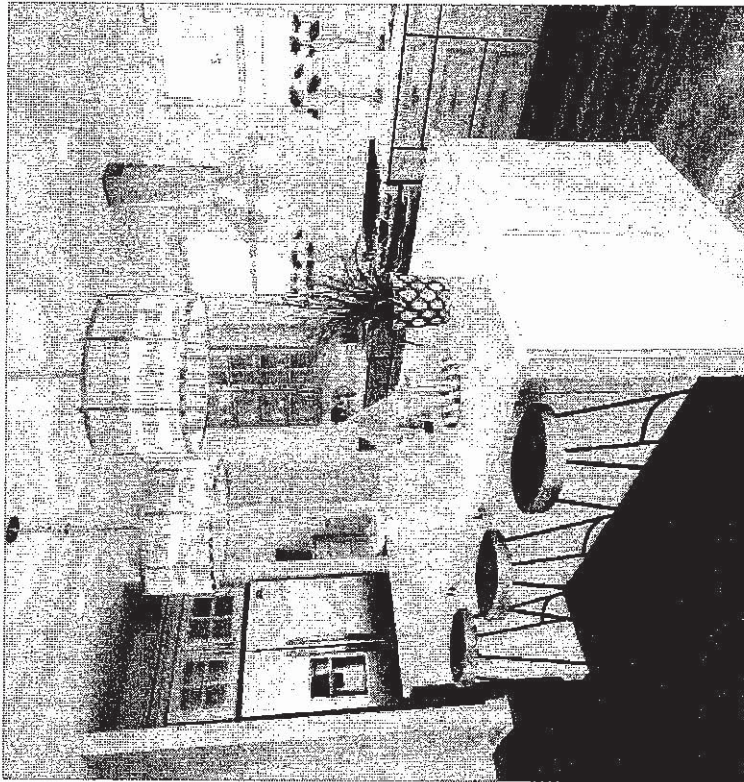

Model	Colour	Ducting	Filters	Size	CFM
SC50024	Stainless Steel	6"	Mesh	24"	550
SC50030	Stainless Steel	6"	Mesh	30"	550
SC50036	Stainless Steel	6"	Mesh	36"	550
SCB50024	Stainless Steel	6"	Baffle	24"	550
SCB50030	Stainless Steel	6"	Baffle	30"	550
SCB50036	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.
1361 Huntingwood Drive, Unit 16, Toronto, ON M1S 3J1, Canada
Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

23 of 37


1225

SC(B)500 | ALITO Collection




Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W)
- Dishwasher-safe mesh or baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- Plug-in connection

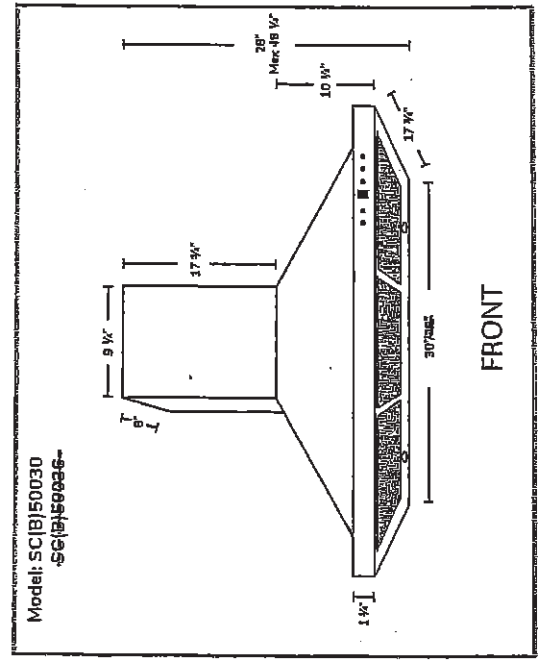

Q

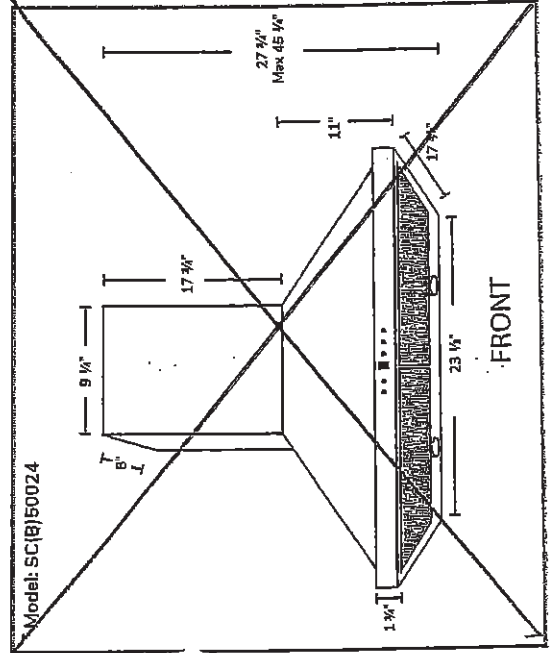

Options

- Filters: ~~SC500~~ - Quick Release Aluminum Mesh Filters
- SCB500 - Quick Release Stainless Steel Baffle Filters
- Available Chimney Flues:
 - Short (7 ft. - 8 ft.. A1.CH10)
 - Standard (8 ft. - 9 ft.. A1.CH18)
 - Extended (9 ft. - 11 ft. A1.CH30)
- Widths: 24", 30", 36"

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120V/60Hz
- Power Consumption: 210 Watts
- Current: 2.5 Amps
- Fan Speed: 1600RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel

- Ducting: 6" Round
- Dimensions: Width: 24" 30" 36"
Height: 46"
Depth: 18"

- Noise Level: Min. 2 Sones
Max. 6 Sones



UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

24 of 37

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

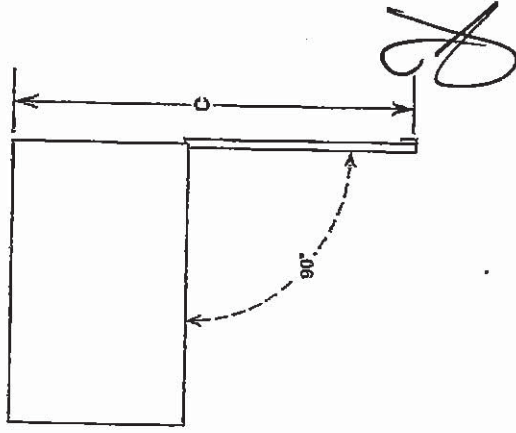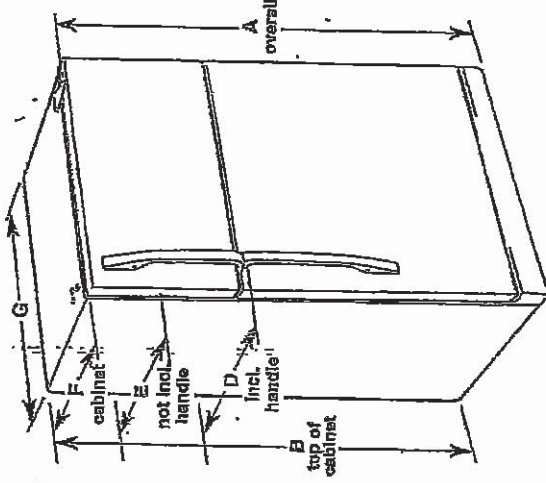

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 7/8" (83.5 cm)	30 3/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	24.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/4" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

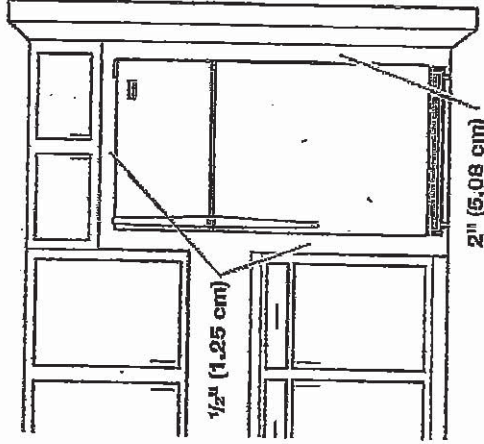

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (16°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Dimensions are for planning purposes only. For complete details, see installation instructions packet with product. Specifications subject to change without notice.

Ref. W1074109
10/29/14

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

25 of 37

Refrigerator Door Swing Verification

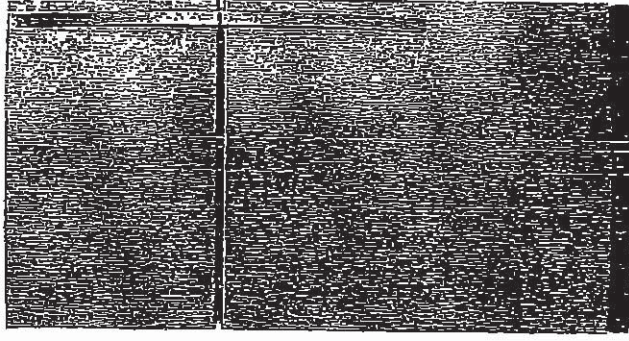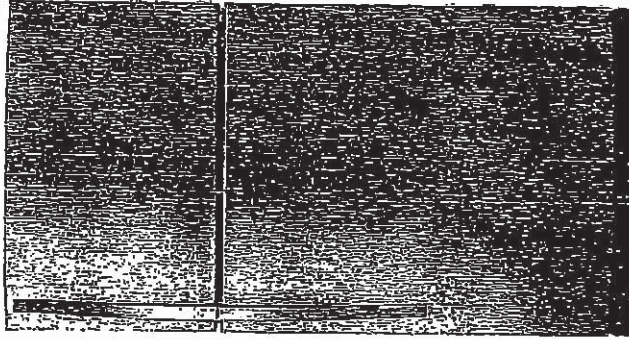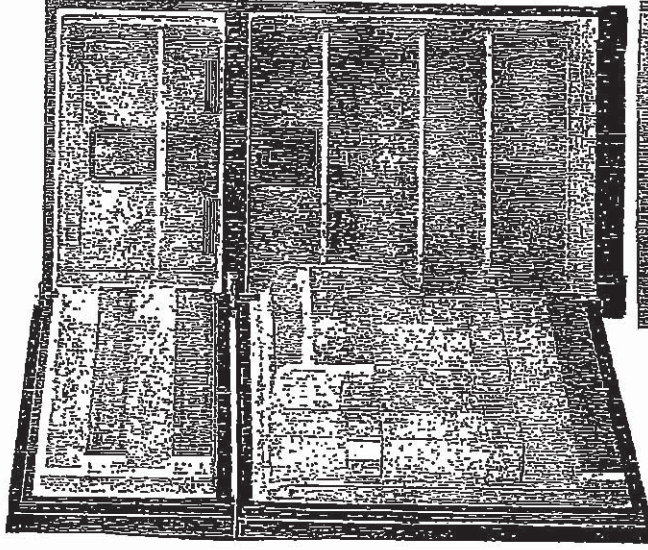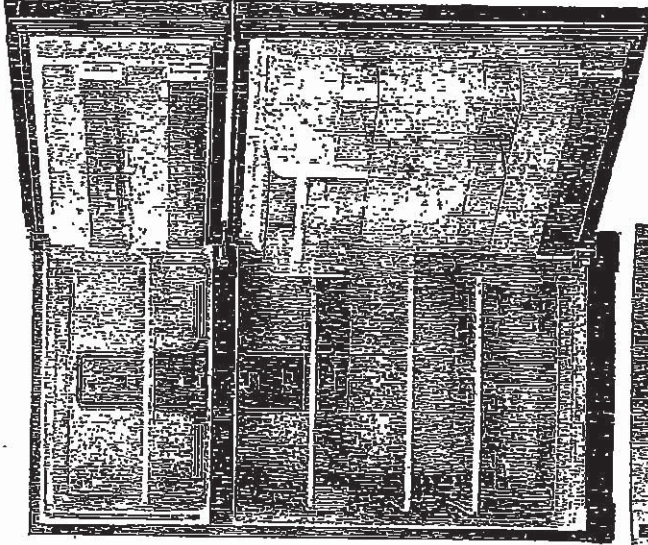

8

When facing the refrigerator



RIGHT HAND
DOOR OPENING

LEFT HAND
DOOR OPENING

- Hinges on right
- Handle on left

- Hinges on left
- Handle on right

mlm
INITIAL

INITIAL

GARAGE RIGHT

Please check and INITIAL your door swing selection.

UK-75 WALLACETON
LOT 285B-11
20-16-6 ELEV B
THE GRASSFIELD

26 of 37


WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology

YWFE515S0JS

Whirlpool


[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > YWFE515S0JS



27 of 37

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions

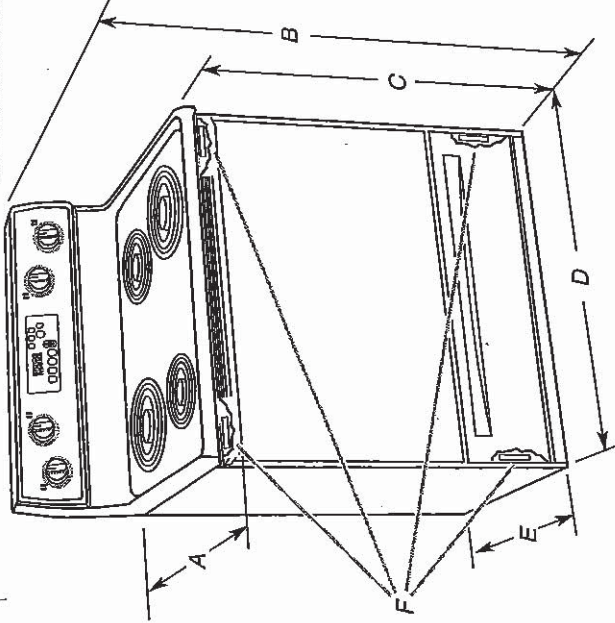

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46¹/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25³/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

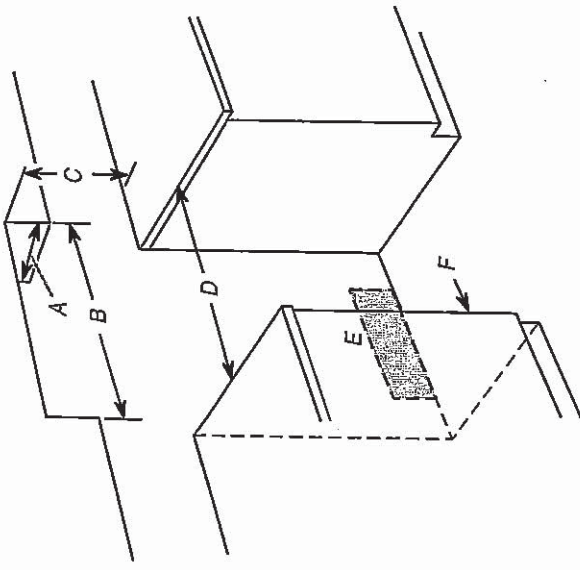

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

UK-75 WALLACETON
LOT 285B-11
20-16-6 ELEV B
THE GRASSFIELD

28 of 37

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

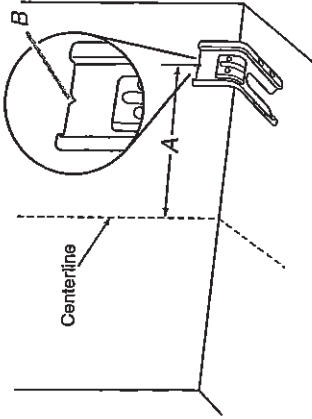

A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting

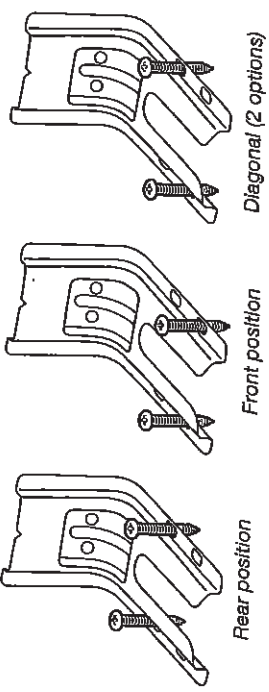


Rear position


Front position

Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

29 of 37

29 of 37



UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

30 of 37

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PCA

WDE310DELA
WDF320PAD
WDF330PAY
WDF520PAD
WDF530PAY
WDF530PLY

WDF630PSY
WDF640PAD
WDF730PAY
WDT770PAY
WDT720PAD
WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part

No. 4317824) marked for use

with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385566) that meets all current AIA/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

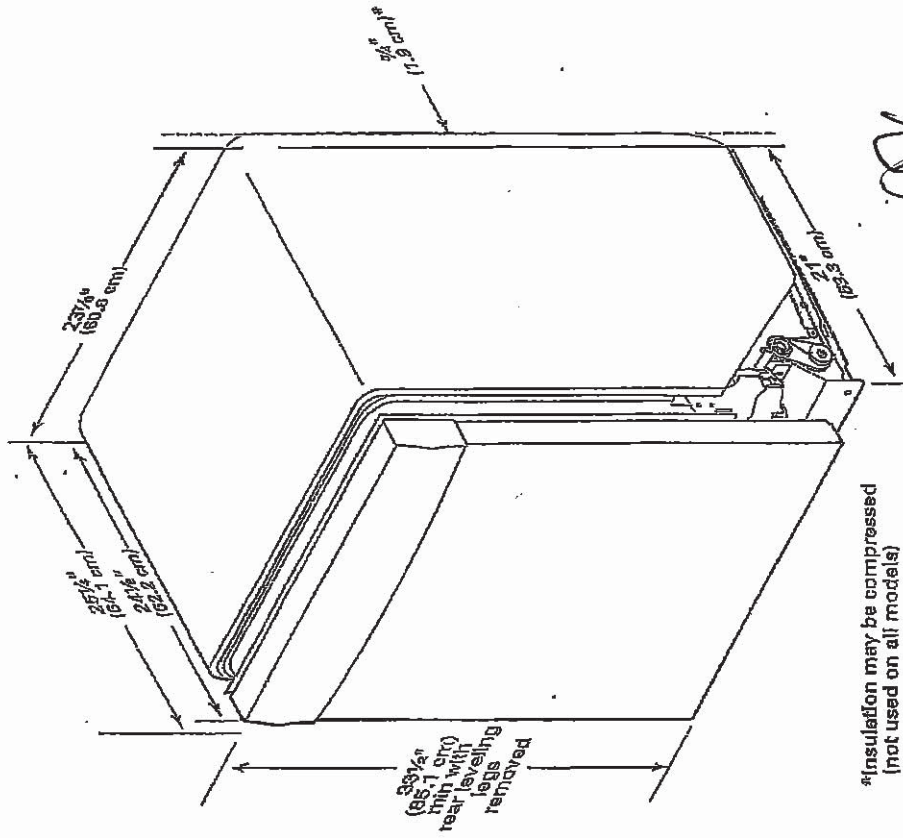

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

31 of 37


CABINET CUTOUT DIMENSIONS

WDE320PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear levelling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

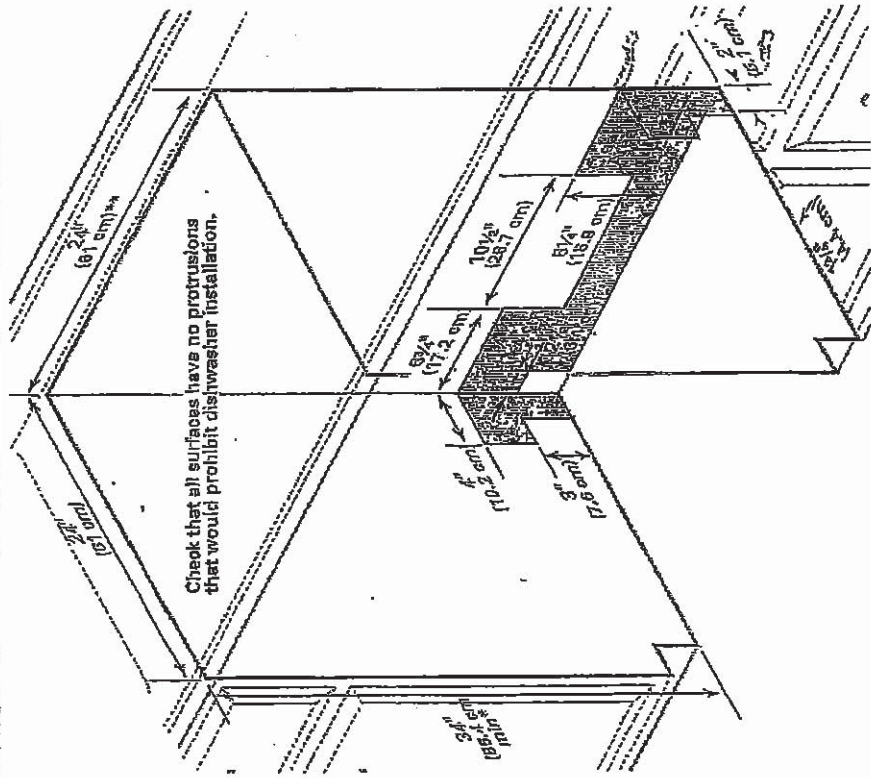


08

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

32 of 37

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

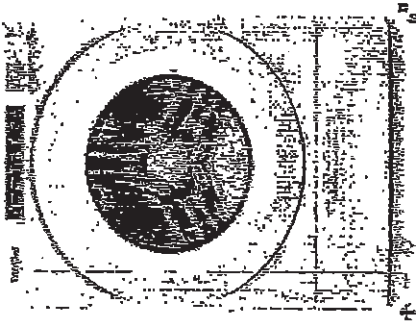

5.2 cu. ft. I.E.C. Close-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Close-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

(X)

Dimensions

Depth	80.17 cm, 31-5/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	88.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

33 of 37

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

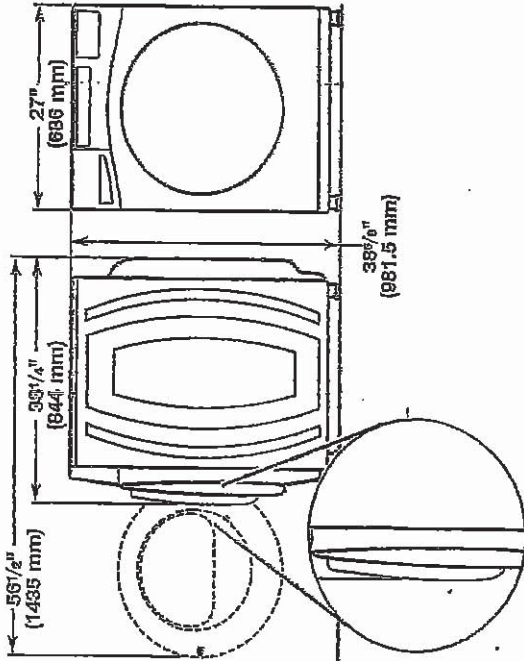



Maytag Models

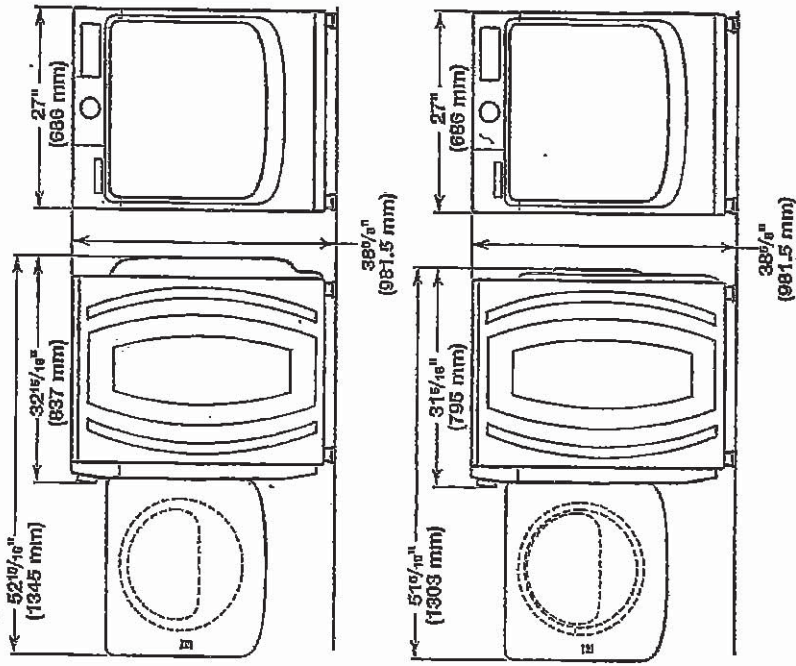

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

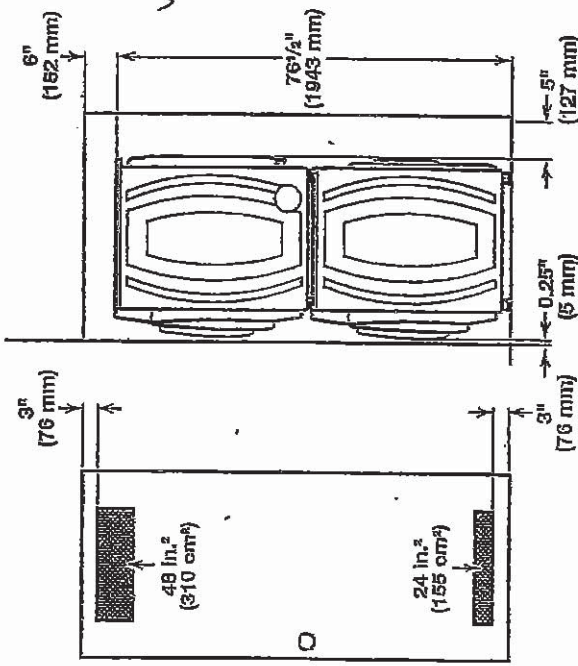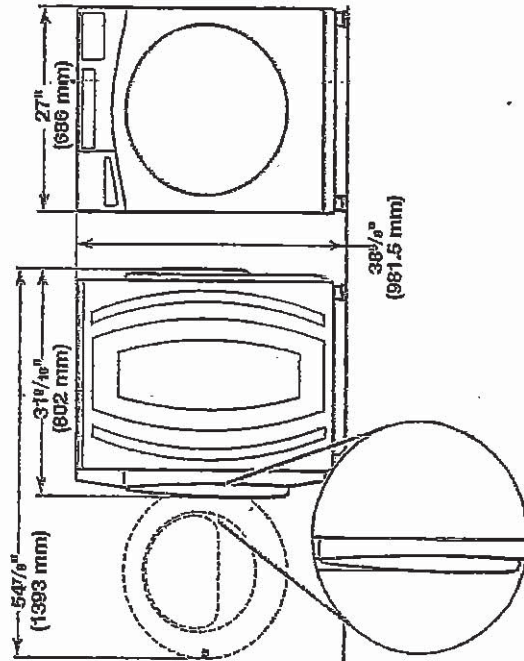


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

UK-75 WALLACETON
 LOT 285B-11
 20-1606 ELEV. B
 THE GRASSFIELD


34 of 37

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

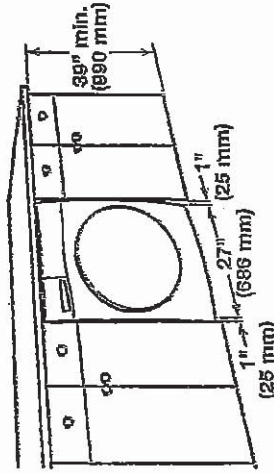

Recessed area or closet installation:

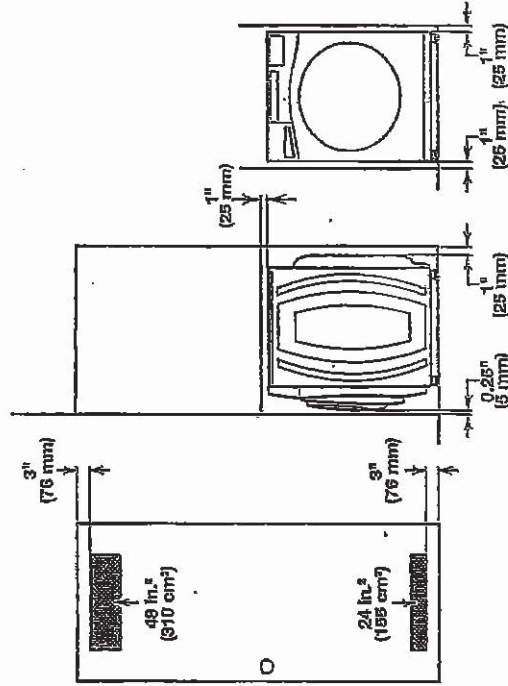

Custom cabinet installation:

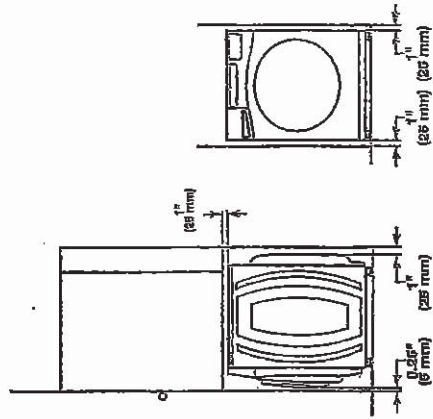


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe; or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

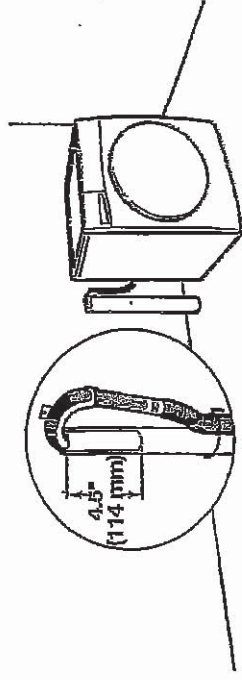


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

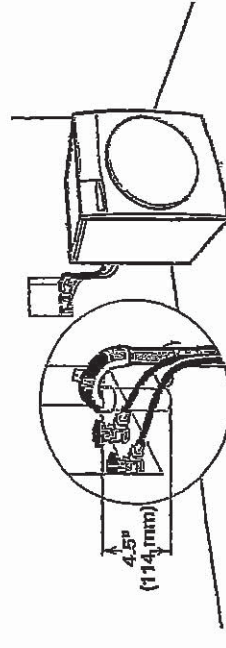

See requirements for floor standpipe drain system.

Laundry tub drain system

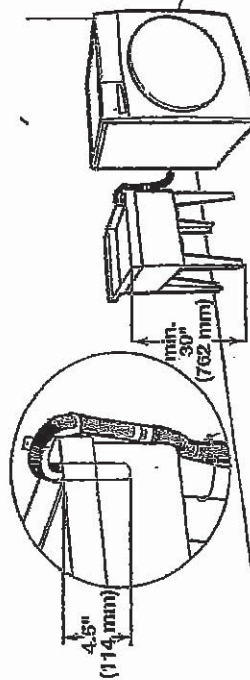

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


8

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

35 of 37

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Whirlpool Dryers | Dryers | Electric Dryers | YWED5620HW

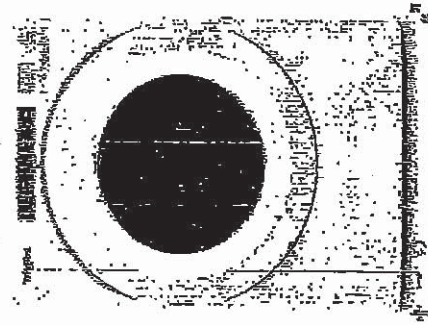

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Q

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degrees	130.43 cm, 51.4/2 in
Height	98.42 cm, 38-9/16 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Reminting	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	34
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
----	----

Power Cord Included


Yes

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

36 of 37

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

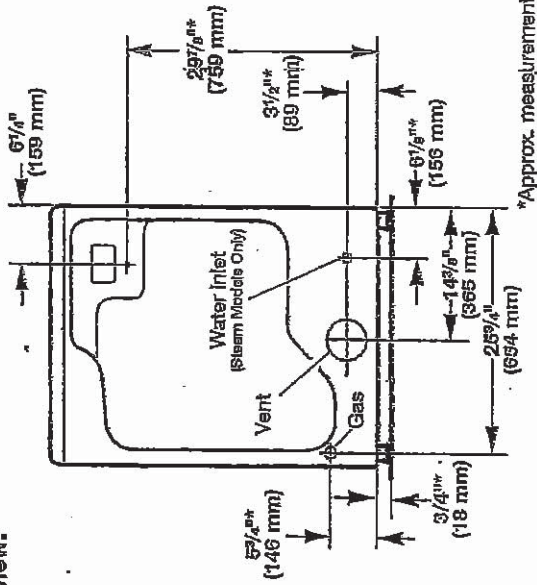

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

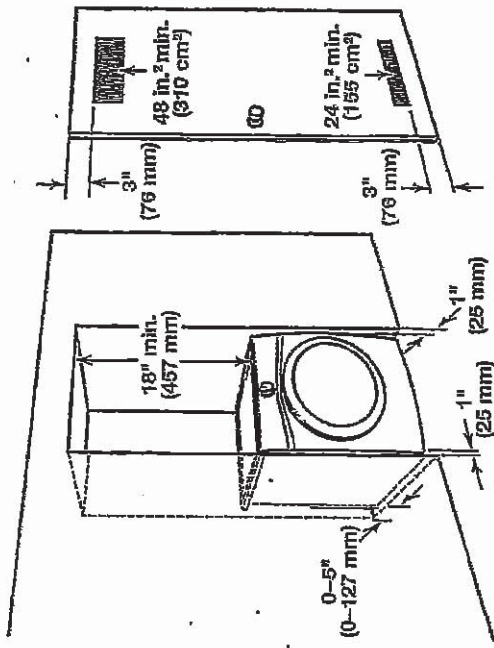

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

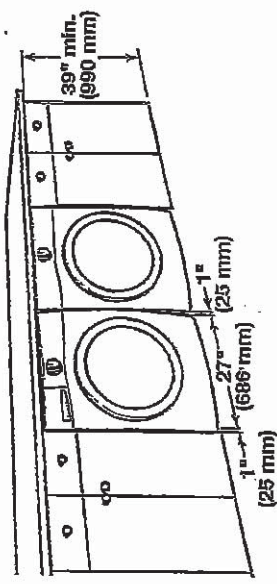

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

37

UK-75 WALLACETON
LOT 285B-11
20-1606 ELEV. B
THE GRASSFIELD

37 of 37

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

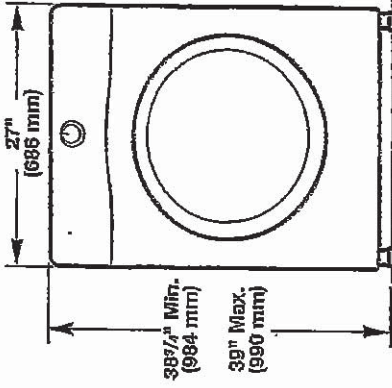


Side view:

Whirlpool Models

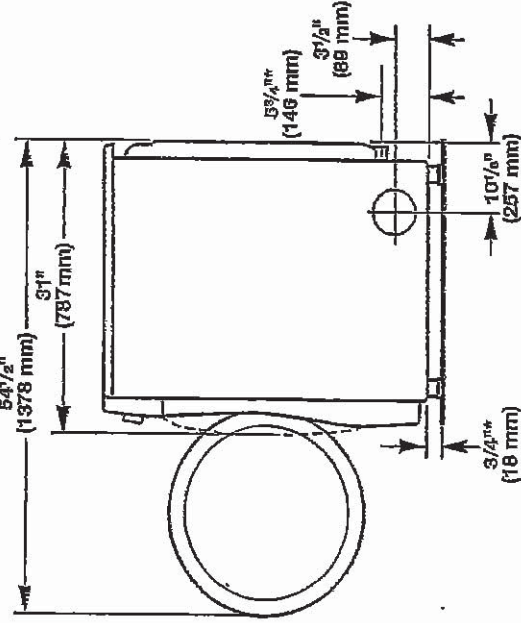

*Approx. measurement

Maytag Models

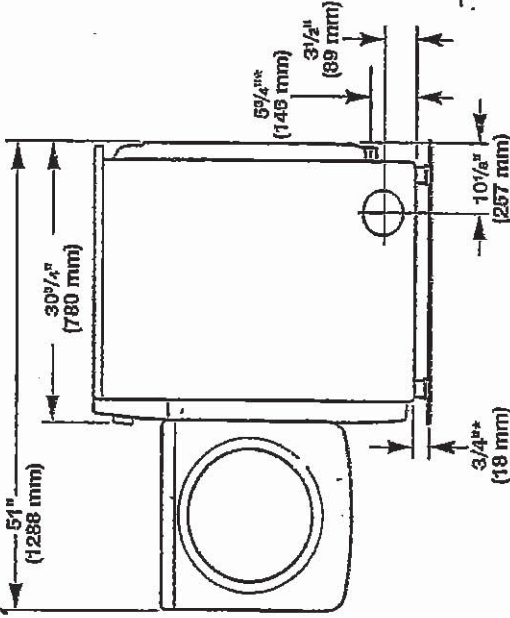

*Approx. measurement

2