

PURCHASER'S OWN APP.

28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen Family Hub™ (Black Stainless Steel)

Features Specifications Support Compare Reviews

Explore Offers Support Business Search Cart Account



360°

Video

28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen Family Hub™ (Black Stainless Steel)

RF28R7SS1SG/AC

4.7 (290)

- Family Hub™ - Screen for all family members, for their communal and emotional experience
- FlexZone™ - Flexible storage drawer with different temperature settings
- Twin Cooling Plus™ - Enjoy fresh food

Choose your Colour



Choose your Capacity



28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen Family Hub™ (Black Stainless Steel)

Black | 28 cu.ft.

Where to buy

Family Hub™

Family Hub™ lets you manage your family's calendars, play music on Spotify, share pictures and stay connected right on your refrigerator.

Family

28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen
Family Hub™ (Black Stainless Steel)

[Features](#) [Spec](#) [Support](#) [Compare](#) [Review](#)

Ice Max

The Ice Max produces up to 10lbs (4.5kg) of ice a day and store up to 4.2lbs (1.9kg) of ice at a time. And its slim and compact design means it takes up less space, so there is more room to store food.

* Based on internal testing compared with conventional Samsung model, Samsung #F28R7751- ice storage up to 4.2lbs (1.9kg) / ice making capacity per day up to 10lbs (4.5kg).



EZ-Open™
Handles

Open the mid and freezer drawers with a gentle pull using the EZ-Open™ Handles. Simply lift up the handle and it breaks the door's vacuum seal. The drawer will glide open without having to pull hard, ideal for children or the elderly. But the latch keeps the door securely shut.

Specifications

Net Weight [kg]

157 kg

Cooling Type

Twin Cooling Plus

Capacity

Net Total (cu.ft)
27.7 cu.ft

Net for Mid-Drawer (cu.ft)
3.8 cu.ft

Net for Freezer (cu.ft)
8.3 cu.ft

Net for Fridge (cu.ft)
15.6 cu.ft

28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen Family Hub™ (Black Stainless Steel)

Features	Spec	Support	Compare	Review
		Net Case Height with Hinge (inch) 70 inch	Net Case Height without Hinge (inch) 68 7/8 inch	
		Net Depth with Door Handle (inch) 36 1/2 inch	Net Depth without Door Handle (inch) 34 inch	
		Net Depth without Door (inch) 29 1/2 inch	Packing Dimension (WxHxD)(inch) 38 1/4" x 76" x 36 7/8"	
		Net Weight (kg) 157 kg	Packing Weight (kg) 167 kg	
		20/40/40H (Container) 26 (40ft)		
Cooling Feature	Cooling Type Twin Cooling Plus			
Refrigerator Feature	Humidity Control (Vegetable&Fruit Drawer) Yes		Number of Shelf (Total) 5 EA	
	Number of Shelf (Foldable) 1 EA		Shelf Material Tempered Glass	
	Number of Vegetable&Fruit Drawer 2 EA		Number of Door Pocket 6 EA	
	Icemaker Cubed and Crushed Ice		Interior LED Light High Efficiency LED Lighting	
Mid Drawer Feature	Convertible Room (°C) -1,1,3,5 °C		Smart Divider Yes	
Exterior Feature	Dispenser with Water Filter Yes		Door Handle New Handle	

28 cu. ft. 4-Door French Door Refrigerator with 21.5" Touch Screen Family Hub™ (Black Stainless Steel)

FeaturesSpecSupportCompareReview

Performance

Energy Consumption
755 kWh/year

Energy

Energy Star Certification
Yes

Installation

Free Standing
Yes

Hide All Specs ^

Support

Find answers to the questions you have about the product

Go to Support

User manual & Downloads

See More Content ↗

Compare the models

Compare with similar items

Step-by-step installation

STEP 1 Select a site

Select a site that:

- Has a solid, level surface without carpeting or flooring that may obstruct ventilation
- Is away from direct sunlight
- Has adequate room for opening and closing the door
- Is away from any heat sources
- Provides room for maintenance and servicing
- Has a temperature range between 50 °F (10 °C) and 109 °F (43 °C)

CAUTION


- If your refrigerator is equipped with an ice maker, provide extra space at the rear of the refrigerator for the water line connection.
- When you install the refrigerator next to a fixed wall, you must provide a minimum clearance of 3 3/4" (95 mm) from the wall to allow the door to swing open.
- Use of an electrical outlet with a ground fault interrupter (GFI) is not recommended.

NOTE

To facilitate moving your refrigerator to its final location, be sure to measure the width and height of doorways, thresholds, stairways, and anything else that needs to be taken into consideration to ensure you can move your refrigerator safely. The following diagram illustrates the exact height and depth (factory specifications) of your refrigerator.


Clearance

See the pictures and table below for space requirements for installation.

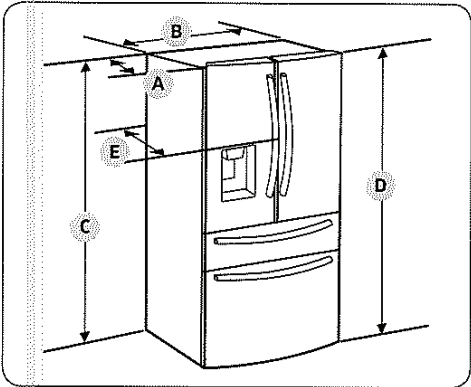

Model	RF28R*
Depth "A"	34" (864 mm)
Width "B"	35 3/4" (908 mm)
Height "C"	68 7/8" (1749 mm)
Overall Height "D"	70" (1777 mm)
Depth "E"	36 1/2" (926 mm)

Installation

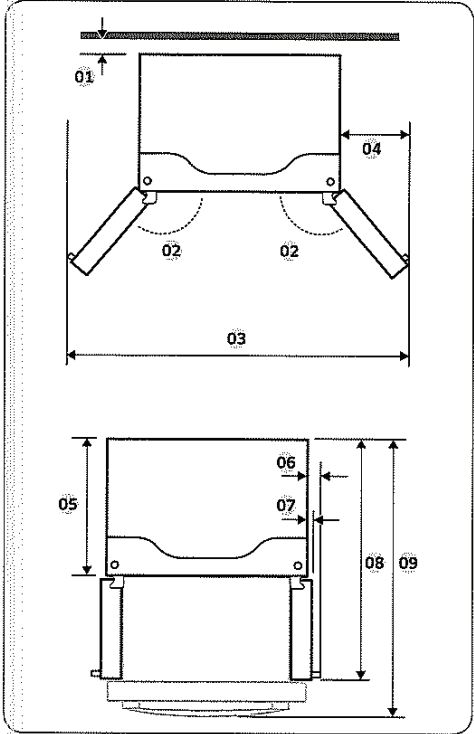

Model	RF28R*
01	2" (50 mm)
02	125°
03	62 1/8" (1578 mm)
04	13 2/8" (335 mm)
05	24" (610 mm)
06	4 6/8" (122 mm)
07	2 3/8" (61 mm)
08	48 1/4" (1226 mm)
09	53" (1346 mm)

NOTE


The measurements in the table above may differ slightly from the actual measurements, depending on the measuring and rounding method.

PURCHASER'S OWN APP.

NQ70M7770DG Combi Double Oven with Power Convection

FeaturesSpecSupportCompareReview

ExploreOffersSupportBusiness

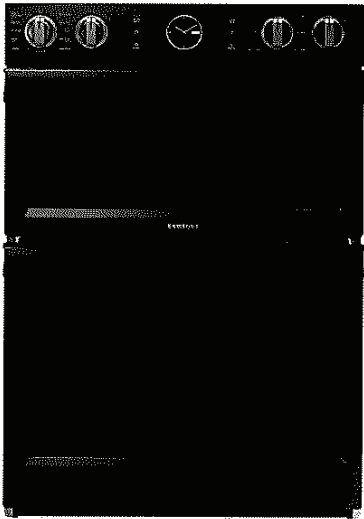

NQ70M7770DG
Combi Double
Oven with
Power
Convection

NQ70M7770DG/AA

4.0 (49)

- Flexible choice of cooking
- Crispy outside, Juicy inside
- Easily check your food

NQ70M7770DG Combi
Double Oven with Power
Convection

Where to buy

Flexible choice of cooking

Combi Double Oven

A Combi Double Oven offers a flexible choice of cooking methods to perfectly match your needs. The upper cavity works as a microwave oven, with Power Convection technology, while the lower cavity is a normal oven.


NQ70M7770DG Combi Double Oven with Power Convection

FeaturesSpecSupportCompareReview

Perfectly crispy food

Hot Plate

With the Hot Plate you can enjoy crispy and crunchy foods. It evenly bakes and browns the top and bottom of frozen or leftover foods like pizza, quiche and chicken nuggets. You can also bake and fry without oil.

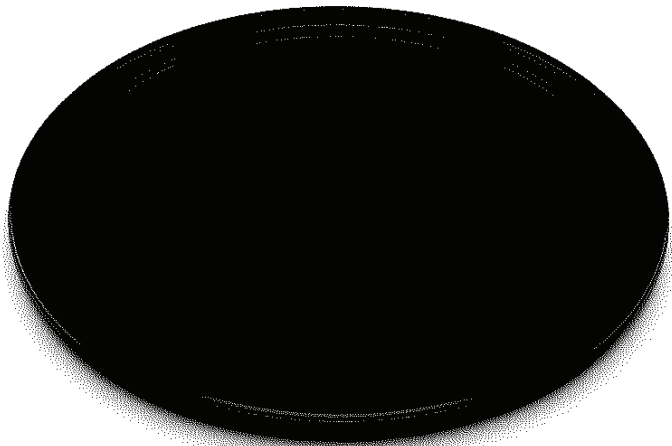

Specifications

	Oven Capacity	Heater Element
	Upper 1.9 cu.ft / Lower 5.1 cu.ft	Broil 1650 W
Capacity	Oven Capacity Upper 1.9 cu.ft / Lower 5.1 cu.ft	

Features

Heater Element	Type of Controls
Broil 1650 W	7" LCD + Knobs
Auto Programs	Child Safety Lock
29	Yes
Light (Lamp) On/Off	Convection
Yes	3250 W
Interior Lamp	Type (Ceramic)
LED	Yes

Materials/Finishes

Cavity Material	Oven Type
Ceramic	Convection

NQ70M7770DG Combi Double Oven with Power Convection

Features

Spec

Support

Compare

Review

Oven Door Glass
4

Door Type
Drop Down

Power/Ratings

MWO Watts
950 W

Type

Installation Type
Built-in

Weights/Dimensions

Net (WxHxD)
756 x 1099 x 685 mm

Gross (WxHxD)
854 x 1224 x 757 mm

Cutout (WxHxD)
724 x 1065 x 587 mm

Loading Quantity (20/40ft)
19 / 42

Weight (Net)
119

Weight (Shipping)
132.5

Hide All Specs ^

Support

Find answers to the questions you have about the product

Go to Support

User manual & Downloads

See More Content ↗

Compare the models

Compare with similar items

PURCHASER'S OWN APP.

Galaxy 5G Mobile TV & AV Home Appliances Computing Shop

DW80R5061US Dishwasher with StormWash, Stainless Steel

Explore Offers Support Business



Features Spec Compare Review



DW80R5061US Dishwasher with StormWash, Stainless Steel

DW80R5061US/AA

3.6 (97)

- StormWash™ gets messy pots and pans clean without pre-washing.
- Enjoy sparkling clean dishes with the AutoRelease™ feature.
- Finger print resistant finish for a great appearance.

Choose your Colour

☒ Silver

☐ Black

Choose your Capacity

☒ 15 Place Setting

DW80R5061US Dishwasher with StormWash, Stainless Steel

Silver | 15 Place Setting

Where to buy



StormWash™



AutoRelease™



3rd Rack



Hard Food Disposer

Clean dishes of various sizes

StormWash™

The StormWash™ heavy-duty wash system gets messy pots and pans clean without pre-washing. An extra spray jet blasts water from every angle to clean heavily soiled dishes of various shapes and sizes.

Less noise. Less disturbance.

Less Noise

The dishwasher's insulation technology is designed to create less noise and disturbance. Its Stainless Steel Tub absorbs sound and vibration when working at a very low noise level at just 48 decibels.



Specifications

Design

Install Type
Built under

Size
24" T

Control Type
Hidden touch

Color/Material
Stainless Steel

Display Light Color
Ice blue

Washing Type
Rotary

Performance

Capacity (Place Setting)
15 P/S

Energy Star Certification
Yes

	Energy Annual consumption 265 kWh/year	Dry System AutoRelease™
	Water Consumption Per Cycle (gallons) 3.5 gallons	Noise level (dBA) 48 dBA
	Cycle time (min) 170-103 min	
<hr/>		
Programs	Number of programs 6	Normal Yes
	Auto Yes	Delicate Yes
	Rinse Only Yes	Heavy Yes
	Express 60' Yes	
<hr/>		
Options	Number of Option 6	Storm Wash™ Yes
	Delay Start Yes	Half load Yes
	Sanitize Yes	Hi-Temp Wash Yes
	Control Lock Yes	Auto Door Open Yes
<hr/>		
Upper Rack	Basket handle Yes	Foldable cup shelves Yes
	Adjustable Height Yes	Adjustable Tines Yes
<hr/>		
Lower Rack	Basket handle No	Fold down tines Yes

	<div>Adjustable Tines Yes</div>	<div>Max Dish loading 14"</div>
Cutlery Basket	<div>Cutlery Tray Yes</div>	<div>Cutlery Basket Yes</div>
General Feature	<div>Aqua stop N/A</div>	<div>Tub Material STSS</div>
	<div>Heater Position Hidden</div>	<div>NSF Certified for Sanitization Yes</div>
	<div>Leakage Sensor Yes</div>	<div>Number of Wash Arm Upper/Mid/Low</div>
	<div>Food Disposer Yes</div>	<div>Cancel&Drain Button Yes</div>
Dimension	<div>Net Width (inch) 23.9"</div>	<div>Net Height(inch) 33.9"</div>
	<div>Net Depth(inch) 24.8"</div>	<div>Net Weight 46 kg</div>
	<div>Gross Weight 51 kg</div>	
Power/Ratings	<div>Electrical(Volts/Hertz/Amps) 120/60/15</div>	<div>Heater Watts 1100W</div>
	<div>Circulation Motor 150-190W</div>	<div>Drain Pump 35 W</div>
Smart	<div>WiFi Embedded N/A</div>	

PURCHASER'S OWN APP.

[Galaxy S6](#) [Mobile](#) [TV & AV](#) [Home Appliances](#) [Computing](#) [Shop](#)

NZ36K7880UG Induction with Virtual Flame Technology™, 10.8 kW

[Explore](#) [Offers](#) [Support](#) [Business](#) [Search](#) [Shopping Cart](#) [User Profile](#)

[Features](#) [Specs](#) [Support](#) [Compare](#) [Review](#)



NZ36K7880UG Induction with Virtual Flame Technology™, 10.8 kW

NZ36K7880UG/AA

4.2 (50)

- Easy, intuitive control
- Precise power & easy cleaning
- Flexibly cook multiple dishes together

NZ36K7880UG Induction with Virtual Flame Technology™, 10.8 kW

Where to buy



Virtual Flame Technology™



Movable Magnetic Knob



Induction

Easy and intuitive control

With Virtual Flame Technology™ you can enjoy the intuitive visual control of flames. LED lighting in front of the burners glows like a real gas flame to clearly show if they're on or off, giving added peace of mind.



Automatically safer to prevent accidents

A Safety Shutoff provides complete peace of mind. It automatically turns off any cooking zones if things have been left cooking on them for a long time or there's no change in the operation after a certain period.

Safe and efficient residual heat use

A 2 Stage Residual Heat Indicator lets you safely and efficiently use any residual heat for cooking. It clearly shows an 'h' if a cooking zone is hot or an 'H' if it is very hot, but turns off when safe to touch.



Specifications

Number of Burner

5 EA


Net (WxHxD)

914.4 x 108.2 x 540 mm

Materials/Finishes

Model Type Install
36 inch Built-In Induction Cooktop

Cooktop Frame
Black Stainless Frame

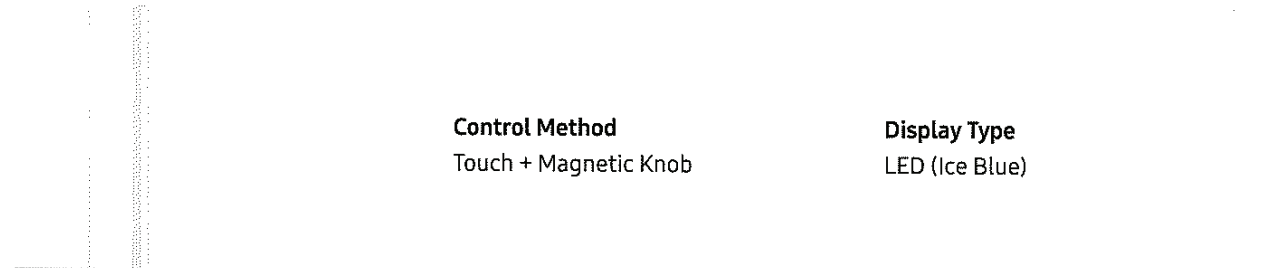		
	Control Method Touch + Magnetic Knob	Display Type LED (Ice Blue)
Power/Ratings	Total Power (kW) 10.8 kW	Flex Zone Graphic Size 204 x 384.2 mm
	Element - Left Front Flex Zone 1800 W / 2600 W (B)	Element - Left Rear Flex Zone 1800 W / 2600 W (B)
	Element - Right Front 8" 2200 W / 3200 W (B), Virtual Flame™	Element - Right Rear 6" 1400 W / 1800 W (B), Virtual Flame™
	Element - Center 7" / 11" 3600 W / 4800 W (B), Virtual Flame™	Qty of Power Boost 5
	Power Level 1 ~ 15, Boost	Power Supply 240 V / 60 Hz (10.8 kW), 208 V / 60 Hz (9.5 kW)
Features	Child Safety Lock Yes	Surface Black Glass
	Simmer/Melt Yes	Kitchen Timer Yes
	Pause Yes	Residual Heat Indicator Yes
	Safety Shutoff Yes	High Temp. Limit Yes
	Small Utensil Detection Yes	Auto Pan Detection Yes
	Sound on/off Yes	Virtual Flame On/Off Yes
	Power On/Off Yes	
Cooktop	Number of Burner 5 EA	

Smart

WiFi Embedded	Auto Connectivity (with Hood)
Yes	Yes
Bluetooth	WiFi Dongle(Separate sale) Support
No	No
WiFi Kit	
No	

App Connectivity

SmartThings App Support
Yes

Weights/Dimensions

Package (WxHxD)	Cutout (WxHxD)
1020 x 230 x 636 mm	W 860 x D 485.6 mm
Net (WxHxD)	Weight (Gross)
914.4 x 108.2 x 540 mm	30.9 kg
Weight (Net)	Loading Quantity (20/40ft)
27.2 kg	200 / 410

Hide All Specs ^

Support

Find answers to the questions you have about the product

Go to Support

User manual & Downloads

See More Content ↗

Compare the models

Compare with similar items