



PIVOTAL®  
TempAssure® 17T  
Series H<sub>2</sub>Okinetic®  
Shower Trim

MODEL#: T17T299

★★★★★ 4.4 (8)  
[Write a review](#) [Ask a question](#)

Finish: **Chrome**



List Price\*:  
**\$665.45**

**PRINT**

The confident slant of the Pivotal® Bath Collection makes it a striking addition to a bathroom's contemporary geometry for a look that makes a statement. With separate handles for volume and temperature control, this Delta tub/shower provides a more refined showering experience. Simply set the water at your preferred temperature and turn the shower on or off with the volume control handle - without interrupting your set temperature. Delta® thermostatic valves use TempAssure® Technology to protect you and your family from sudden temperature changes. You can install with confidence, knowing that Delta faucets are backed by our Lifetime Limited Warranty.

- Trim kit only, must order MultiChoice Universal Valve separately to complete the unit
- TempAssure® thermostatic valve keeps water temperature within a safe  $\pm 3^{\circ}\text{F}$  ( $\pm 1.6^{\circ}\text{C}$ ), helping to protect you from sudden changes in hot or cold water pressure
- Control volume and water temperature independently with two separate handles for more refined control of your shower experience





PIVOTAL®

# 6-Setting 3-Port Diverter Trim

MODEL#: T11999

★★★★★ 5.0 (3)  
[Write a review](#) [Ask a question](#)

Finish: **Chrome**



List Price\*:

**\$270.25**

 **PRINT**

The confident slant of the Pivotal Bath Collection makes it a striking addition to a bathroom's contemporary geometry for a look that makes a statement. This 3-port, 6-setting diverter trim allows for three individual and three shared positions for use of your shower components. You can install with confidence, knowing that Delta faucets are backed by our Lifetime Limited Warranty.

- Trim kit only, must order MultiChoice universal valve R11000 separately to complete the unit
- ADA compliant
- 3-port, 6-position diverter trim
- 3 individual and 3 shared positions
- Monitor pressure balance valve keeps water temperature within a safe +/-3°F (+/-1.6°C), helping to protect you from sudden changes in hot or cold water pressure





DELTA®

# 3- And 6-Setting Diverter Rough

MODEL#: R11000



4.6 (54)

[Write a review](#)

[Ask a question](#)

Finish:Not Applicable

List Price\*:

**\$134.50**

 **PRINT**

This rough-in kit may be installed prior to choosing the specific trim and finish. Allows for construction or a renovation project to proceed without delays when narrowing down a design style. Trim kit is sold separately and is required to complete the unit. Save time, effort, and money on future renovation updates because there's no need to alter plumbing behind the wall.

- MultiChoice® Universal valve body rough-in kit only
- Must purchase trim kit to complete the unit
- Forged brass body
- Three port diverter rough
- Cartridge ships with trim
- For use with (3) three or (6) six function diverter





UNIVERSAL SHOWERING

# H2Okinetic<sup>®</sup> 3-Setting Slide Bar Hand Shower

MODEL#: 51799



4.3 (6)

[Write a review](#)

[Ask a question](#)

Finish: **Chrome**



List Price\*:

**\$371.35**

 **PRINT**

The confident slant of the Pivotal™ Bath Collection makes it a striking addition to a bathroom's contemporary geometry for a look that makes a statement. Experience a better shower with the control and flexibility of a Delta® hand shower. Great for showering yourself or your loved ones and pets, as well as for keeping your shower and tub clean. Delta® H2Okinetic® Showers look different because they are different. Using advanced technology, H2Okinetic showers sculpt water into a unique pattern giving you 3X the coverage of a standard shower head. The end result is a shower that provides more coverage, more warmth and more intensity for a truly drenching shower experience. So go ahead and indulge, because now you can enjoy the feeling of more water without using more water. While other products may gather unsightly mineral build-up over time, Delta soft rubber Touch-Clean® spray holes allow any mineral residue to simply be wiped away for an instantly refreshed look – with no need for soaking or the aid of chemical cleaners. The pause setting gives you ample space for shaving, lathering and other shower tasks, then easily restarts the water with the temperature where you left off. This spray setting helps you conserve water, so you can worry less about depleting your supply of hot water.





DELTA®

# Square Wall Elbow For Hand Shower

MODEL#: 50570




4.9 (50)

[Write a review](#)

[Ask a question](#)

Finish: **Chrome**



List Price\*:

**\$58.30**

 **PRINT**

he shower becomes your private sanctuary where body sprays and showerheads work in perfect  
armony. Getting ready in the morning is far from routine when you are surrounded by a bath that  
reflects your personal style. Customize your experience with hand showers, body sprays, body jets and  
raincan showerheads. You can install with confidence knowing that Delta backs this adjustable slide  
bar with a lifetime limited warranty.

- Square wall elbow for hand shower
- May be used with Delta hand showers (sold separately)
- 1/2 in. IPS female inlet
- 1/2 in. NPSM outlet for connecting to shower hoses
- For new construction installation





HYDRACHOICE® BODY SPRAY SYSTEM

# HydraChoice® Body Spray Rough

MODEL#: R50200



(0)

[Write a review](#)

[Ask a question](#)

Finish:Not Applicable

List Price\*:

**\$85.15**

 **PRINT**

This rough-in kit may be installed prior to choosing the specific trim and finish. Allows for construction or a renovation project to proceed without delays when narrowing down a design style. Trim kit is sold separately and is required to complete the unit. Save time, effort, and money on future renovation updates because there's no need to alter plumbing behind the wall.

- Rough-in kit only
- Must purchase trim kit and spray heads separately to complete the unit
- 1/2 in. rough-in
- 2-9/16 in. thru hole in wall
- Forged brass body






HYDRACHOICE® BODY SPRAY SYSTEM

# HydraChoice® Square Body Spray Trim

MODEL#: T50210

★★★★★ 5.0 (3)  
[Write a review](#) [Ask a question](#)

Finish: **Chrome**



List Price\*:  
**\$76.65**

 **PRINT**

reate a truly custom shower by installing this HydraChoice Body Spray Square Trim Only in Chrome. he flush-mount design doesn't sacrifice functionality, and offers a sleek look with 50° of adjustability in any direction to help aim the water where you want it. The ability to change spray options to customize your shower experience before and after installation offers complete design flexibility.

- Flush mount installation
- 1.0 GPM at 80 psi; 3.8 l/minimum at 552 kPa
- Rough and spray head sold separately
- Must also order rough-in (model # R50200) and choice of spray heads (model #s SH5000-KS, SH5002-KS, SH5003-KS, or SH5005-KS) separately to complete the unit
- 1/2 in. (12.7 mm) rough-in








HYDRACHOICE® BODY SPRAY SYSTEM

# HydraChoice® Body Spray - H<sub>2</sub>Okinetic® Massaging Spray Head

MODEL#: SH5005

★☆☆☆☆ 1.0 (1)  
[Write a review](#) [Ask a question](#)

Finish: **Chrome**



List Price\*:  
**\$23.30**

 **PRINT**

Create a truly custom shower with this HydraChoice 1-Spray Massaging Body Spray with H<sub>2</sub>Okinetic technology. Spray heads extend out of the wall when the water is turned on. Users can simply press the spray heads back into position when they are finished showering. Spray heads are easy and affordable to swap out, offering choice and differentiation in spray pattern and pressure before and after installation. By simply removing a set screw, you can transform your shower experience from a soothing to massaging or invigorating spray option. A 1/2 in. rough-in allows the body spray trim and spray head installation to occur after the rough-in stage is complete and the wall surface has been finished. The oscillating pattern of the water prevents the build-up of mineral deposits, making H<sub>2</sub>Okinetic spray holes self-cleaning. Adjust the spray 50° in any direction to help you aim the water where you want it. Choose between a round or square trim option (sold separately) and 4, interchangeable spray heads (sold separately) with H<sub>2</sub>Okinetic Technology or Touch Clean spray head. Available spray options are Invigorating, Soothing, Massaging and Full Spray.







QUOTE BY: Kevin Allen

SOLD TO: PHOENIX HOMES MASTERS

PO#: \*\*KA 2020 2 F RE



Ship Via: Ground/Next Truck


QUOTE #: JKEV17141

SHIP TO:

PROJECT NAME: Costing

REFERENCE: G.O.R CLAYSTONE

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-1	Rough Opening: 72.5 X 82.5	VPD2 60610 V PD 2 Wide ( Frame= 71 1/2 x 81 1/2 ) FX / OP , *(Ext= Claystone) ** ,Jamb= 6 5/8 , 3mmLowETemp/13mm/3mmTemp A-Gas , ( Std Lock , , ScrnCol: ** Claystone ** , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.54 , Energy Star Zone: 2 'U' Factor 1.82 , Energy Rating: 33 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR Zone(s) " as per the January 1, 2015 criteria. PEV 2021.1.0.3029/PDV 5.982 (01/04/21) UW COMMENTS: DELETE	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-2	Rough Opening: 70.8125 X 82.625	VD-A V Dbl34" A13 (Frame= 69 13/16 x 81 5/8 ) LH / R-Flush Bolt *(Ext= Smoke)** , 6 5/8 Steel Slab Primed DB DB ( (22x64 Ins) (23x65 C/O) 3mmLowETemp/13mm/3mmTemp A-Gas ) Chrome ** (With Screen) Smoke , L/a 18.38 , Dr 'U' Factor: 1.42 , Dr SHGC: 0.27 , Energy Star Zone: 2 Install: NONE ,WT 170.00 lb This product qualifies for Canadian ENERGY STAR Zone(s) '2' as per the January 1, 2015 criteria. PEV 2021.1.0.3029/PDV 5.982 (01/04/21) UW COMMENTS: ADD	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

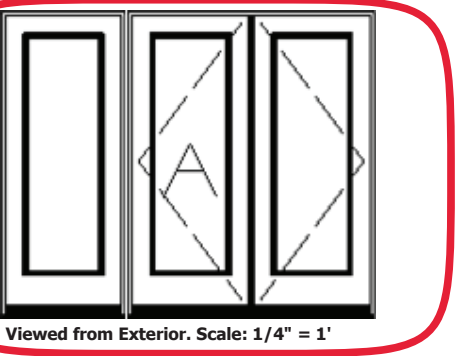LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-3	Rough Opening: 100.0625 X 82.625	Main Line Item V Double Door Mull (NoShp) (OA Frame= 99 1/16 x 81 5/8 ) Factory Mull Int= , **(Ext= Smoke)** , Jamb= 6 5/8 , ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Install: NONE <small>PEV 2021.1.0.3029/PDV 5.982 (01/04/21) UW</small> COMMENTS: ADD	
			1
Line-3-2 (A1)		VS-A V Sng32" A13 (Frame= 33 3/16 x 81 5/8 ) FX **(Ext= Smoke)** , 6 5/8 Steel Slab Primed DB ( (22x64 Ins) (23x65 C/O) 3mmLowETemp/13mm/3mmTemp ) A-Gas Chrome , L/a 9.19 , Dr 'U' Factor: 1.42 , Dr SHGC: 0.27 , Energy Star Zone: 2 Install: NONE PGR: R-PG35 , Air: A3 , DP: +1680/-1680 Pa , Water: 290 Pa ,WT 107.00 lb This product qualifies for Canadian ENERGY STAR Zone(s) '2' as per the January 1, 2015 criteria.	
Line-3-1 (A2)		VD-A V Dbl32" A13 (Frame= 65 13/16 x 81 5/8 ) LH / R-Flush Bolt ** (Ext= Smoke)** , 6 5/8 Steel Slab Primed DB DB ( (22x64 Ins) (23x65 C/O) 3mmLowETemp/13mm/3mmTemp A-Gas ) Chrome ** (With Screen) Smoke Site Install Door Insert , L/a 18.38 , Dr 'U' Factor: 1.42 , Dr SHGC: 0.27 , Energy Star Zone: 2 Install: NONE ,WT 115.00 lb This product qualifies for Canadian ENERGY STAR Zone(s) '2' as per the January 1, 2015 criteria.	
Total Units:			3

Due to a significant influx in order volumes and supply chain challenges resulting from COVID-19, we must advise that normal delivery dates and lead times on products manufactured and shipped from our Canadian and US facilities will be impacted. Increased lead times will remain in effect until such time as the supply chain across North America stabilizes.

We will do everything within our control to revert to standard lead times on all products as soon as possible. At this point there is no way of knowing how long these issues will remain. As the situation changes, we will bring you more detailed information.

We thank you in advance for your cooperation and patience as we work through these changing business conditions together.

It is the responsibility of the Builder/Purchaser to ensure that all windows and doors in the quote above are in accordance with, but not limited to, the following:

- 1. All current Zoning requirements.
- 2. All current Fire Regulations.
- 3. All current Building Standard Regulations, including, but not limited to, the Local Building code.

Presented by: \_\_\_\_\_

Date: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Date: \_\_\_\_\_



# Studio® Concealed Trapway Right Height® Dual Flush Elongated Front toilet with Seat - American Standard - Product Details



This page was printed from <http://americanstandard.ca>

## Product Information

### Studio® Concealed Trapway Right Height® Dual Flush Elongated Front toilet with Seat

This page was printed from <http://americanstandard-ca.com>

MODEL #: 2794204, 735168-400, 4000204, 3075120, 5218110, 7381203-200 | COLLECTION: STUDIO



### Description

- LXP (Luxury Performance) Toilet
- Combination dual flush bowl and tank, with seat
- 12" (305mm) rough-in
- Siphon action jetted bowl with smooth-sided, concealed trapway
- High efficiency, low consumption
  - Full Flush 1.3 gpf/6.0 Lpf
  - Conserving Flush 0.9 gpf/4.1 Lpf, utilizes 21% less water
- Meets EPA WaterSense® Criteria (Pending)
- EverClean® Surface
- PowerWash™ rim scrubs bowl with each flush
- 16-1/2" (419mm) rim height
- Fully-glazed 2-1/8" trapway
- Oversized 3" flush valve
- Generous 9" x 8" water surface area
- Includes Duroplast slow close seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning
- Chrome-plated top mounted push button actuator
- 2 colour matched bolt hole covers
- 5 year warranty on entire toilet
- Design coordinates with Studio® and Boulevard® lavatories

Nominal Dimensions -  
Length x Width x Height:  
30-1/4" x 15-3/4" x 30-3/4"  
(769 x 400 x 780mm)

### Features and Innovations

- [5 Year Warranty](#)
- [EverClean™ Surface](#)
- [Right Height](#)
- [Toilet Performance - Best - MAP Score between 800-1000g](#)
- [Toilet Shape - Elongated](#)
- [Water Efficient](#)
- [WaterSense® Certified](#)

### Buy Now



Product: 7381203-200.0070A  
Dual Flush Push Button,Top Mount \$25.00 Each

Qty

### Videos

