


Product Specification Sheet

B923 Apron Front Sink w/ 15mm Radius Corners

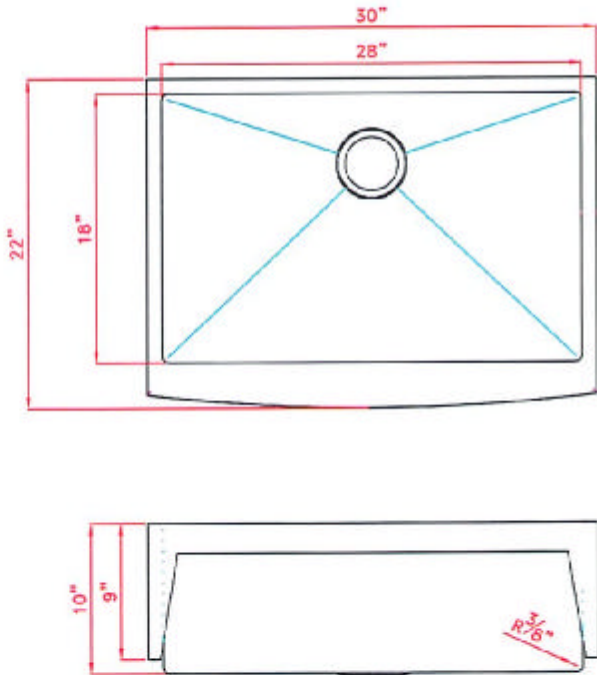

Colour Finish
Stainless Steel

Model No.
B923

- Description**
- Curved front single bowl apron front sink with 15mm radius corners
 - Outside dimensions: 30" x 21 5/8" x 10"
 - Minimum Cabinet Size: 30"
 - Individually Hand Made, therefore measurements not guaranteed
 - Stainless Steel Single Bowl Sink
 - 16 Gauge Type 304 Stainless Steel
 - Stone Guard undercoating over rubber pad
 - 3 1/2" drain opening
 - Supplied with installation clip, template and strainer
 - cUPC certified

- Available accessories**
- BG923 - Stainless Steel Grid
 - Colander Strainer - Stainless Steel
 - Drying Rack



MAIN LOCATION
BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION
BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT
Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com




PURCHASER'S OWN APP.



MICROWAVE OVEN
TRIM KIT INSTALLATION DIAGRAMS

MODEL: NN-TK612GSQP (Stainless Steel)

Suitable for Microwave Oven Models:
NN-ST67JS, NN-ST69JS, NN-ST665B



Above: Artist impression only, i.e. gap between microwave and trim kit may be larger than shown here. For airflow there needs to be a surrounding gap of 10mm (+/-2mm).

Microwave ovens should not be built into a unit directly above a top front venting conventional cooker. This will invalidate your one year guarantee.
1. This trim kit can be installed into a cabinet. The cabinet opening must have the following internal dimensions as shown. A vent is required at the rear of the cabinet it should travel the full height of the cabinet and the cabinet should not be obstructed. Minimum dimension of vent 45 mm x 562 mm.

MINIMUM INSTALLATION HEIGHT 850 MM.




2. Electrical Connections

The appliance is supplied with a mains plug attached and should only be connected into an earthed socket that has been installed according to the relevant safety regulations.
If the plug is no longer accessible after the appliance has been built into the cabinet, a dual pole isolator must be installed to conform to the relevant safety standards.
3. It is essential that the cabinet is fixed to the wall for stability. The shelf must be able to support a weight of 30 kg.
4. If the microwave oven is to be removed from the kitchen cabinet and used free standing, the built in parts must be removed, and the oven returned to its original condition. Keep these installation instructions for future reference so the installation process can be reversed.

TAKE CARE NOT TO KINK OR TRAP THE MICROWAVE ELECTRICAL CABLE.
The diagram may vary from the actual unit and is only for your reference.

NOTES:

- 1. Diagrams are not to scale.
- 2. Specifications are subject to change without notice. Publish date: June 2019.

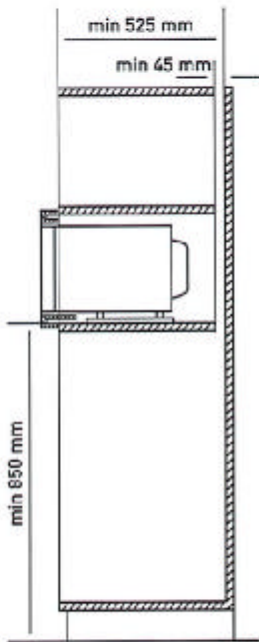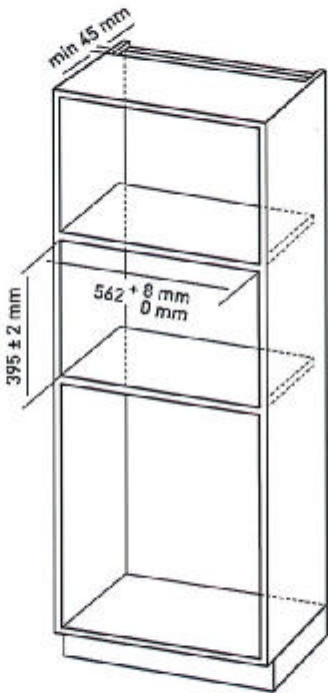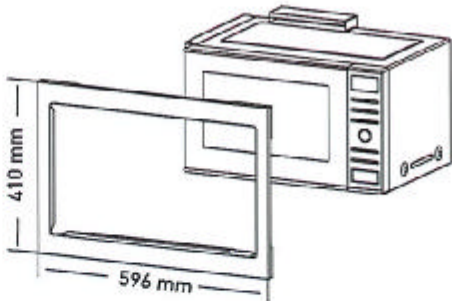

Trim Kits	Model No	Cabinet Opening Dimensions			Trim Kit: Outside Dimensions	
		H (mm)	W (mm)	D (mm)	H (mm)	W (mm)
	NN-TK612GSQP	395	562	525	410	596



Cafe

Cafe Self-cleaning and steam cleaning Convection Double Electric Wall Oven (Stainless steel) (Common: 30 -in; Actual: 29.75-in)

Item#: 330756541 | MFR#: CTD90FP2NS1

★★★★★ 4.8 (356)

[Write a review](#)



Feedback

Customer Service

[SAVE TO LIST](#) [SHARE](#) [EMAIL](#) [PRINT](#)



\$8,695.00

Get It Installed - [Get a Quote Now](#)

FREE DELIVERY With a purchase of \$695 or more of appliances [More Details >](#)


10% OFF GE CAFE [More Details >](#)

⚠ This special order item is out of stock.

DS
RP

2 A CUTOUT FOR SINGLE OVENS IN WALL CABINET

NOTE: If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.

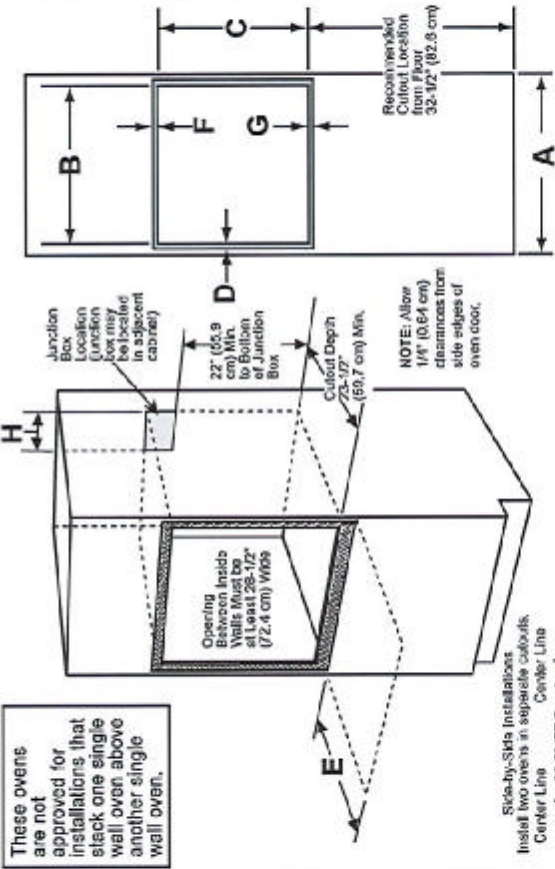


Dimension	Dimension Description	27" Single Oven	30" Single Oven
A	Cabinet Width	27" (68.6 cm)	30" (76.2 cm)
B	Cutout Width	25" (63.5 cm) min. 25 1/4" (64.1 cm) max.	28 1/2" (72.4 cm) min. 28 5/8" (72.7 cm) max.
C	Cutout Height	27 1/2" (70.2 cm) min. 28 1/2" (71.4 cm) max.	27 1/2" (69.2 cm) min. 27 3/4" (69.4 cm) max.
D	Clearance from cutout - side edges*	1" (2.5 cm)	1 1/4" (1.75 cm)
E	Clearance to Adjacent Corners, Drawers, Walls, etc., When Door is Open	23" (58.8 cm) min.	23" (58.3 cm) min.
F	Clearance from cutout - top*	1" (2.5 cm) min.	1" (2.5 cm) min. (1 1/4" (3.2 cm) for PT9050, ZET1S and ZET1P)
G	Clearance from cutout - bottom*	1" (2.5 cm) min.	1 1/4" (3.2 cm)
H	Junction Box Location	8 3/4" (22.2 cm) max. right side only	9 1/2" (24.1 cm) max. right side only

* Refers to minimum clearance required for wall oven installation and does not reflect actual product dimensions.

2 B CUTOUT FOR SINGLE OVENS – UNDER COUNTER

NOTE: These ovens are only approved to be installed under the specific models as labeled on the unit.

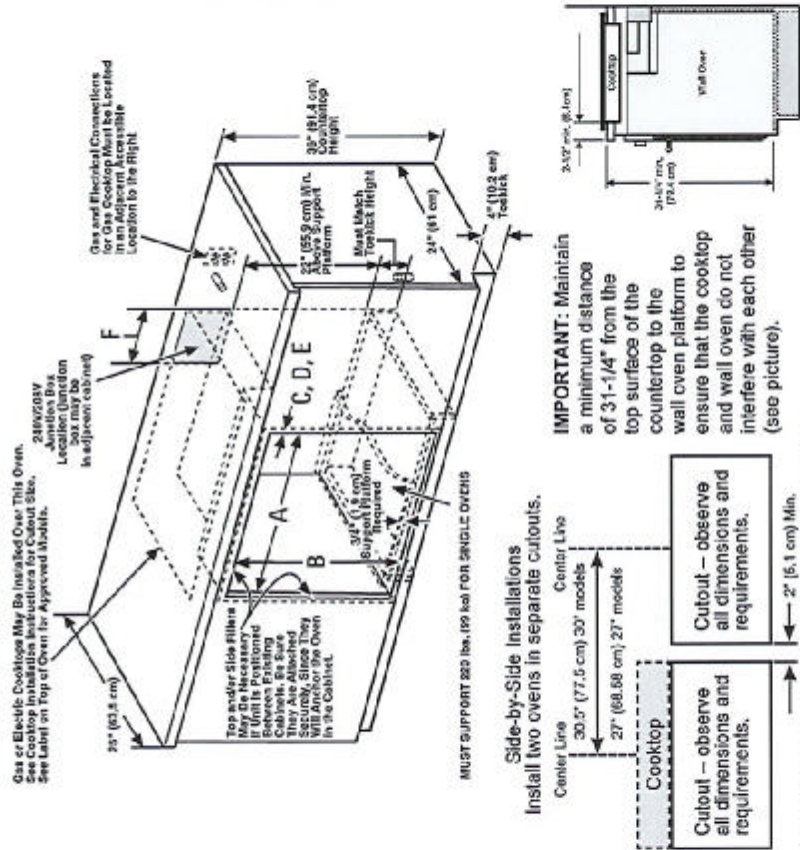


Dimension	Dimension Description	27" Single Oven	30" Single Oven
A	Cabinet Width	25" (63.5 cm) min. 25 1/4" (64.1 cm) max.	28 1/2" (72.4 cm) min. 28 5/8" (72.7 cm) max.
B	Cutout Height	27 1/2" (70.2 cm) min. 28 1/2" (71.4 cm) max.	27 1/2" (69.2 cm) min. 27 3/4" (69.4 cm) max.
C	Clearance from cutout - top*	1" (2.5 cm)	1" (2.5 cm) (1 1/4" (3.2 cm) for PT9050, ZET1S and ZET1P)
D	Clearance from cutout - bottom*	1" (2.5 cm)	1 1/4" (3.2 cm)
E	Clearance from cutout - side edges*	8 3/4" (22.2 cm) max. right side only	9 1/2" (24.1 cm) max. right side only
F	Junction Box Location		

* Refers to minimum clearance required for wall oven installation and does not reflect actual product dimensions. Continue to Section 4.

Model# **HRT4806U**





Thor Kitchen 48-inch Professional Range Top

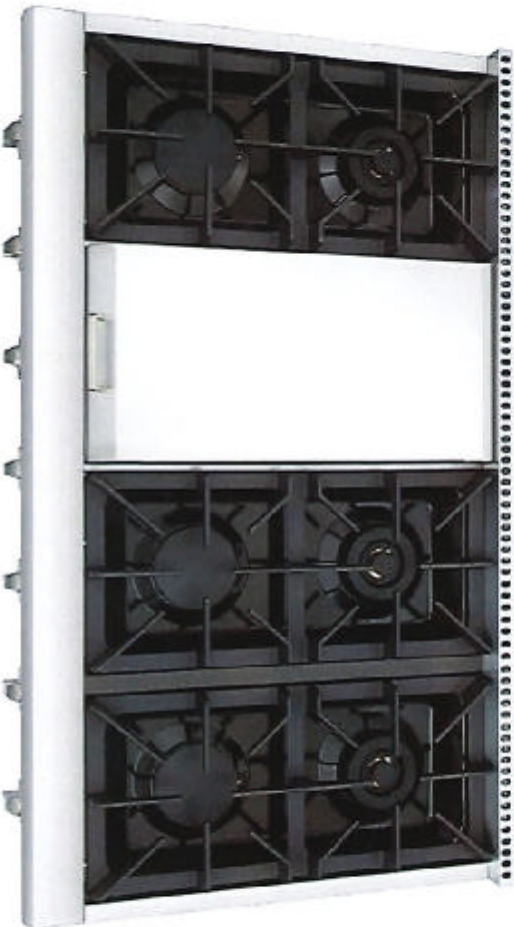

FEATURES				
Black Porcelain Drip Pan On Cook Top				
Heavy Duty Continuous Cast Iron Cooking Grates				
Automatic Re-Ignition Safety Feature				
Blue LED Control Panel Light				
Zinc Alloy Controller Knobs				
304 Stainless Steel Control Panel				
BURNER PERFORMANCE				
Total Number of Range Top Burners	6 Burners			
3 Front Burners (Single)	15K (650 BTU Simmer)	15K Griddle	15K (650 BTU Simmer)	15K (650 BTU Simmer)
3 Rear Burners (Dual burner with simmer function)	15,000 BTU (650 BTU for Simmer)			
Stainless Steel Griddle	15,000 BTU			
TECHNICAL DETAILS				
Fuel Type	Natural Gas / LP Convertible			
Electrical Requirements	120V			
Circuit Breaker (A)	15 or 20 A			
Frequency (Hz)	60 Hz			
DIMENSION				
Product Dimension (W x D x H) (in)	47.9"W x 28.38"D x 8.72"H			
Required Cutout Size (W x D x H) (in)	48 1/8"W x 24.77"D x 7.3"H			
Adjustable Range Legs	1/2"			
ACCESSORIES (NOT INCLUDED)				
LPHRT4806U	Liquid Propane Gas Conversion Kit			
RG1022	Cast Iron Reversible Griddle			
RG1032	Cast Iron Range Griddle			





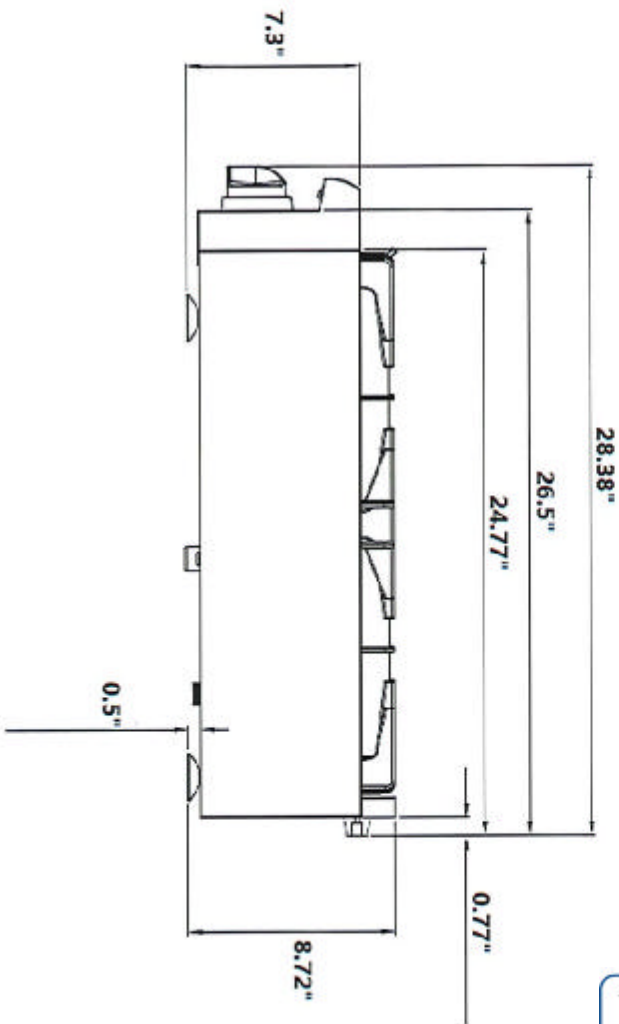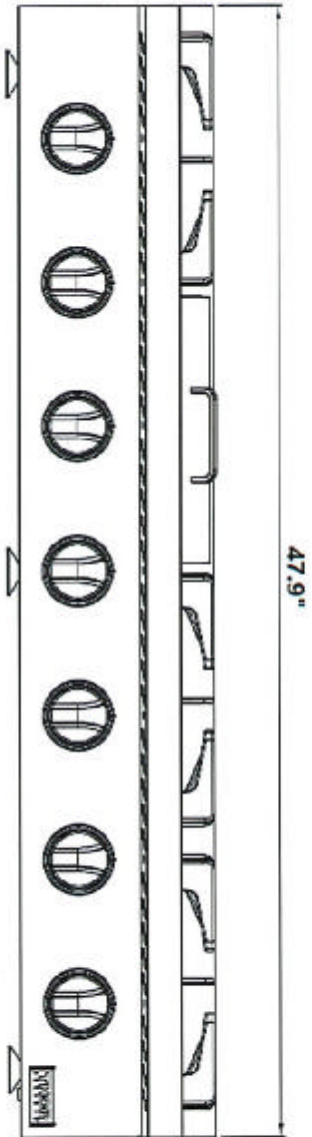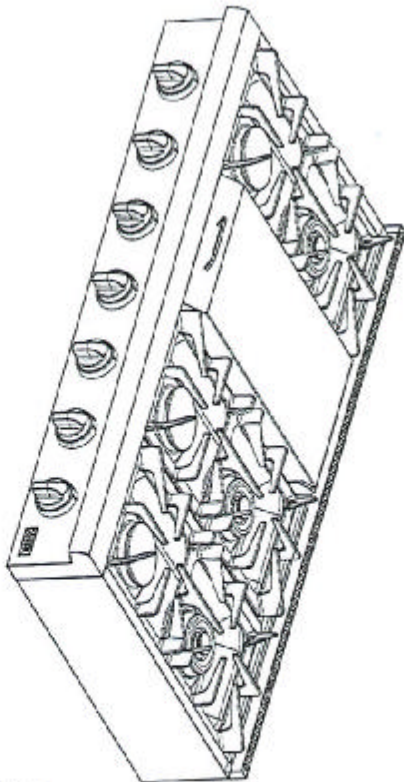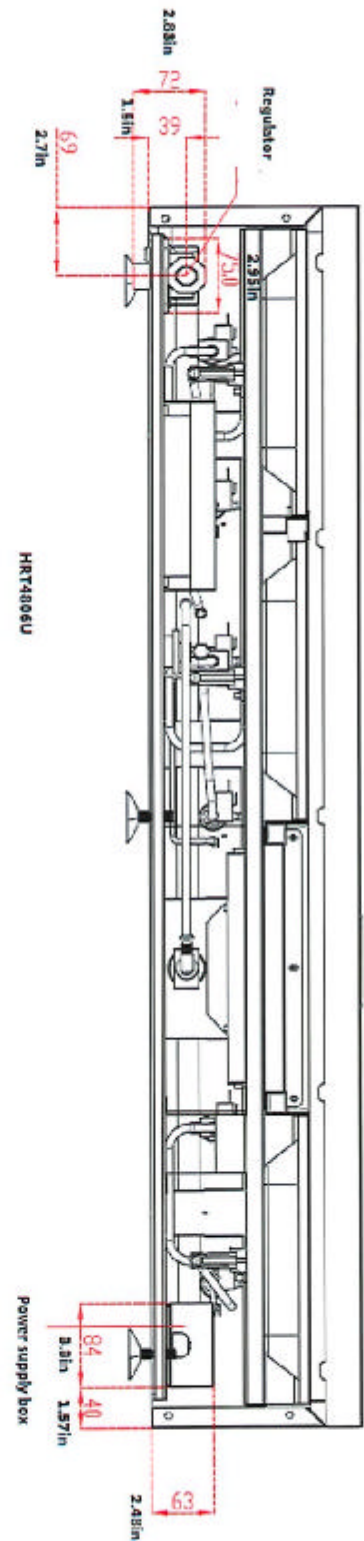

DS
RP



All Refrigerator
FPRU19F8RF

18.6 Cu. Ft.



Shown with companion All-Freezer model FPFU19F8RF and optional coordinated Dual 75" Louvered Trim Kit (TRIMKITE22).

Signature Features



PureAir Ultra® Filtration System
Fresh air offers great taste. PureAir Ultra® Filtration removes up to 7 times more odor than baking soda to keep ingredients tasting fresh.¹



SpacePro™ Shelving System
Offers quick access to fresh ingredients with organizational solutions designed for space optimization including SpacePro™ Door Bins, SpacePro™ Crisper Bins and SpacePro™ Full-Width Drawer.



Smudge-Proof™
Resists fingerprints and cleans easily.

Product Dimensions	
Height (Cabinet Incl. Hinge)	70-5/8"
Width	32"
Depth (Including Door)	26-1/2"

More Easy-To-Use Features

Automatic Alerts
Alerts you if the door is left open, if the temperature rises or if the power goes out so your food stays at its optimal temperature.

SpacePro™ Crisper Bins
Keep a variety of foods fresh and easily accessible with our SpacePro™ Crisper Bins.

SpacePro™ Full-Width Drawer
Fits a variety of fresh foods for quick access.

SpacePro™ Shelving
Optimize your refrigerator space with adjustable shelving.

SpacePro™ Door Bins
Access fresh food from our adjustable gallon-size door bins quickly.

PowerBright™ LED Lighting
Find fresh foods quickly with PowerBright™ LED Lighting.

PrecisionPro Controls™
Adjust settings at the touch of a button.

Sabbath Mode (Star-K® Certified)

Available in:



Optional Trim Kits

Single 79" Louvered or 75" Collar Trim Kit (TRIMKITE21)
Optional trim kit that is designed to provide a built-in look for the All Refrigerator. Install with louver for 79" fit or easy-to-remove louver for a 75" fitted collar look.

Dual 79" Louvered or 75" Collar Trim Kit (TRIMKITE22)
Optional trim kit that is designed to provide a built-in look for the All Refrigerator and All Freezer when the units are installed next to each other. Install with louver for 79" fit or easy-to-remove louver for a 75" fitted collar look.

¹Based on a six-hour closed door test of certain common odors in the fresh food compartment of a 21 Cu. Ft. refrigerator.



FRIGIDAIRE
PROFESSIONAL.

All Refrigerator
FPRU19FERF 18.6 Cu. Ft.

Features	
Door Design	Flat
Door Finish	Smudge-Proof™ Stainless Steel
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Hinge Covers	Hidden
Automatic Door Closer	Yes
Leveling System/Leveling Legs	Yes/4
Controls	
Controls	PrecisionPro™
Location of Controls	Inside Cabinet, on Top
Temperature Display C°/F°	Yes
Control Lock/Light	Yes / No
Temp Failure Alerts (Audible & Duration)	Yes
Door Ajar Alert (Audible)	Yes
Power Failure Alert (Duration)	Yes
Air Filter/Air Filter Change Indicator Light	PureAir Ultra / Yes
Refrigerator Features	
Refrigerator Shelves	2 SpacePro™ Adjustable Glass
Full-Width Deli Drawer	1 SpacePro™
Full-Width Bottom Crisper	1 SpacePro™
Crisper Divider Quantity	2 (Per Crisper)
Full-Width Gallon Door Bin	2 Clear SpacePro™
Half-Width Liter Bin	4 Clear SpacePro™
Dairy Bin	1 Clear
Lighting	8-Point PowerBright™ LED
Optional Accessories	
Single Louvered Trim Kit	PN# TRIMKITEZ1
Dual Louvered Trim Kit	PN# TRIMKITEZ2
Certifications	
Sabbath Mode (Star-K® Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	18.6
Shelf Area (Sq. Ft.)	20.6
Annual Energy (kWh)	331
Annual Energy Cost (12/kWh)	\$40
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	115V/60Hz/20A
Connected Load (kW rating) @ 115 Volts ¹	0.55
Amps @ 115 Volts	15
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	245 Lbs.

¹An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.


Optional Trim Kits

Kits include top and side trim pieces, louvered grille, reversible kickplate and leveling system to fit 75" or 79" opening height.

Single 79" Louvered or 75" Collar Trim Kit
PN# TRIMKITEZ1

Dual 79" Louvered or 75" Collar Trim Kit
PN# TRIMKITEZ2
(Includes hardware to secure side-by-side units together.)

Note: Both kits attach directly to cabinetry through top trim piece or louvered grille to stabilize unit(s).

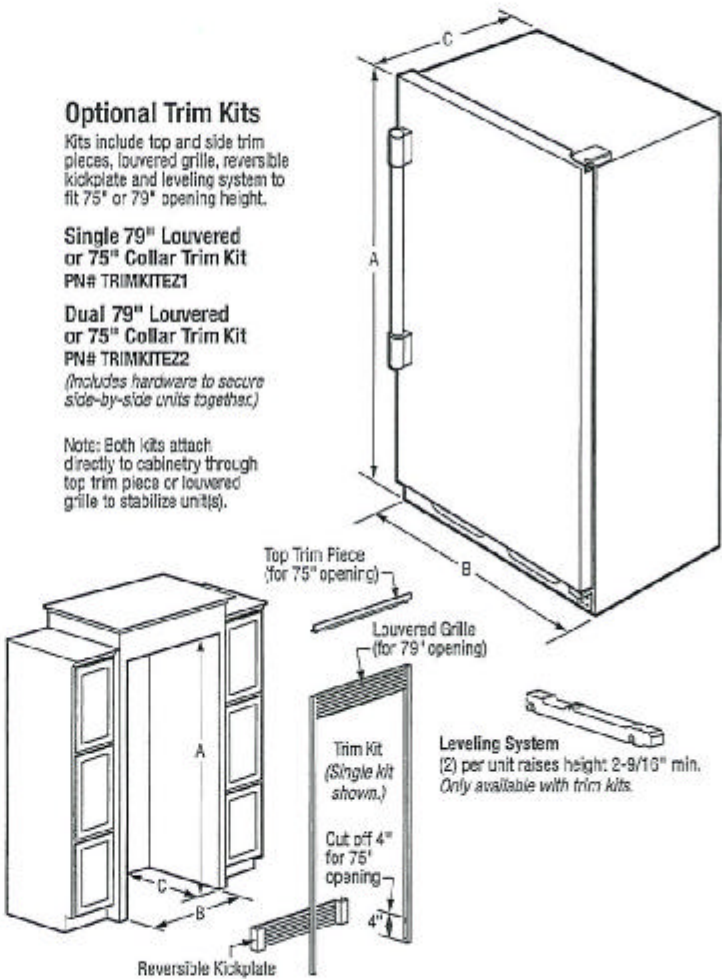

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at fridgdaire.com.



Overall Exterior Dimensions	
A - Height (Incl. Door)/(Cabinet Incl. Hinge)	71-3/8" / 70-5/8"
B - Width	32"
C - Depth (Incl. Door)	26-1/2"
Depth with Door Open 90°	57-3/8"

Built-In Cutout Dimensions	
Single Unit without Trim Kit -	
A - Height	72"
B - Width	33"
C - Depth	25-1/4" min. ¹
Single Unit with Trim Kit & Leveling System -	
A - Height	75" or 79"
B - Width	33"
C - Depth	25-1/4" min. ¹

Built-In Cutout Dimensions	
Dual Unit ² without Trim Kit -	
A - Height	72"
B - Width	66"
C - Depth	25-1/4" min. ¹
Dual Unit ² with Trim Kit & Leveling System -	
A - Height	75" or 79"
B - Width	66"
C - Depth	25-1/4" min. ¹

¹Minimum depth from face of cabinet side panels and requires recessed electrical outlet.

²Side-by-Side

Accessories information available on the web at fridgdaire.com

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • fridgdaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • fridgdaire.ca
FPRU19FERF 07/15

© 2015 Electrolux Home Products, Inc.

Specifications subject to change.

